

(51) International Patent Classification:
C10G 11/18 (2006.01)(21) International Application Number:
PCT/US2014/068279(22) International Filing Date:
3 December 2014 (03.12.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/109,895 17 December 2013 (17.12.2013) US(71) Applicant: UOP LLC [US/US]; 25 East Algonquin Road,
P. O. Box 5017, Des Plaines, Illinois 60017-5017 (US).

(72) Inventors: LUEBKE, Charles P.; UOP LLC, 25 East Algonquin Road, P. O. Box 5017, Des Plaines, Illinois 60017-5017 (US). LIU, Kirk; UOP LLC, 25 East Algonquin Road, P. O. Box 5017, Des Plaines, Illinois 60017-5017 (US). FEI, Zhihao; UOP LLC, 25 East Algonquin Road, P. O. Box 5017, Des Plaines, Illinois 60017-5017 (US).

(74) Agent: PASCHALL, James C.; UOP LLC, 25 East Algonquin Road, P. O. Box 5017, Des Plaines, Illinois 60017-5017 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PROCESS AND APPARATUS FOR IMPROVING PROPYLENE YIELD FROM A FLUID CATALYTIC CRACKING PROCESS

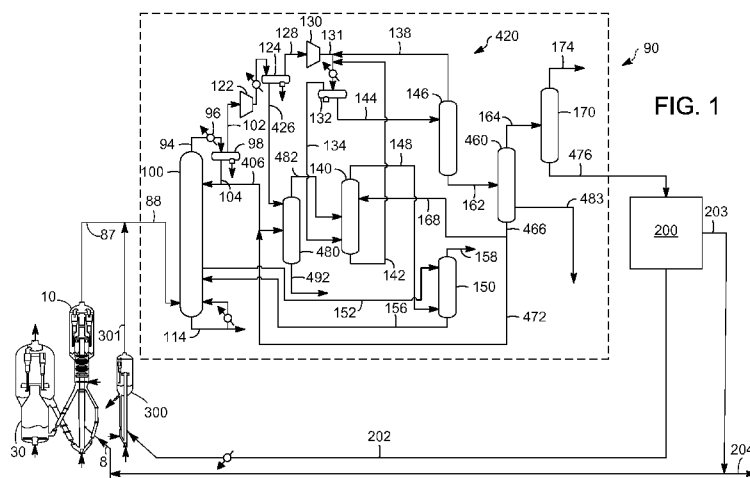

PROCESS AND APPARATUS FOR IMPROVING PROPYLENE YIELD FROM A FLUID
CATALYTIC CRACKING PROCESS

STATEMENT OF PRIORITY

[0001] This application claims priority to U.S. Application No. 14/109,895 which was
5 filed December 17, 2013, the contents of which are hereby incorporated by reference in its
entirety.

FIELD

[0002] The disclosure relates to an extraction process for improving propylene yield.

BACKGROUND OF THE INVENTION

10 [0003] Fluid catalytic cracking (FCC) is a catalytic hydrocarbon conversion process
accomplished by contacting heavier hydrocarbons in a fluidized reaction zone with a catalytic
particulate material. The reaction in catalytic cracking, as opposed to hydrocracking, is
carried out in the absence of substantial added hydrogen or the consumption of hydrogen.
Various products may be produced from such a process, including a naphtha product and/or a
15 light product such as propylene and/or ethylene.

[0004] There have been several development efforts to increase the propylene yield from
an FCC unit. One of the solutions has been to recycle the 4- and/or 5-carbon olefin product
back to the FCC unit in order to selectively crack these components to propylene. Another
solution is to recycle the olefins back to a second reactor optimized to convert the olefins to
20 propylene. In this case, a separate recovery section is needed to process the product from the
second reactor. This configuration works well at low to moderate propylene yields, but if
higher yields are required, then the amount of material that needs to be recycled increases
rapidly as the 4- and/or 5-carbon paraffins are not separated from the 4- and/or 5-carbon
olefins in most FCC processes. As the paraffins cannot be rejected, this inert material must
25 also be recycled in order to be able to recycle a greater amount of the olefin material.

[0005] Therefore, what is needed is a new process configuration which allows for the
advantages of a traditional FCC unit configuration, but improves the overall configuration by
allowing for the 4- and/or 5-carbon paraffins to be separated from the 4- and/or 5-carbon
olefins. The overall FCC process recovery section is simplified compared to a process using
30 the aforementioned second reactor as a common recovery section can be used.

SUMMARY OF THE INVENTION

[0006] An is a process for catalytic cracking, the process comprising (a) feeding a hydrocarbon feed stream to a first catalytic reactor; (b) passing an effluent of the first catalytic reactor to a fractionation zone to produce a first fractionation zone stream and a second fractionation zone stream, the first fractionation zone stream comprising $C_{(x-1)}$ hydrocarbons, and the second fractionation zone stream comprising C_x hydrocarbons, wherein x is an integer; (c) passing the second fractionation zone stream to a separation unit to produce a first separation unit stream and a second separation unit stream, the first separation unit stream comprising C_x paraffins, and the second separation unit stream comprising C_x olefins; and (d) feeding the second separation unit stream to a second catalytic reactor. An embodiment further comprises (e) producing a third fractionation zone stream comprising $C_{(x+1)}$ hydrocarbons in the fractionation zone; and (f) feeding the third fractionation zone stream to the second catalytic reactor. An embodiment is a catalytic cracking system, comprising a first catalytic reactor configured to receive a hydrocarbon feed stream; a fractionation zone, the fractionation zone is in fluid communication with the first catalytic reactor, wherein the fractionation zone is configured to produce a first fractionation zone stream comprising C_3 hydrocarbons and a second fractionation zone stream comprising C_4 hydrocarbons; a separation unit, the separation unit is in fluid communication with fractionation zone, wherein separation unit is configured to produce a first separation unit stream comprising C_4 paraffins and a second separation unit stream comprising C_4 olefins; and a second catalytic reactor, the second catalytic reactor being in fluid communication with the separation unit for receiving the second separation unit stream.

[0007] These and other features, aspects, and advantages of the present invention will become better understood upon consideration of the following detailed description, drawings and appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a process flow scheme for one embodiment of a process of the present invention.

[0009] FIG. 2 is a process flow scheme for a separation unit used in the process of FIG. 1.

[0010] FIG. 3 is a process flow scheme for another embodiment of a process of the present invention.

[0011] FIG. 4 is a plot of butene extraction versus temperature and pressure.

[0012] FIG. 5 is a plot of pentene extraction versus temperature and pressure.

5 [0013] Like reference numerals will be used to refer to like parts from Figure to Figure in the following description of the drawings.

DETAILED DESCRIPTION OF THE INVENTION

[0014] As used herein, the following terms have the corresponding definitions.

10 [0015] The term “communication” means that material flow is operatively permitted between enumerated components.

[0016] The term “downstream communication” means that at least a portion of material flowing to the subject in downstream communication may operatively flow from the object with which it communicates.

15 [0017] The term “upstream communication” means that at least a portion of the material flowing from the subject in upstream communication may operatively flow to the object with which it communicates.

[0018] The term “direct communication” means that flow from the upstream component enters the downstream component without undergoing a compositional change due to physical fractionation or chemical conversion.

20 [0019] The term “column” means a distillation column or columns for separating one or more components of different volatilities which may have a reboiler on its bottom and a condenser on its overhead. Unless otherwise indicated, each column includes a condenser on an overhead of the column to condense and reflux a portion of an overhead stream back to the top of the column and a reboiler at a bottom of the column to vaporize and send a portion of a
25 bottoms stream back to the bottom of the column. Feeds to the columns may be preheated. The top pressure is the pressure of the overhead vapor at the outlet of the column. The bottom temperature is the liquid bottom outlet temperature.

[0020] The term “C_x hydrocarbons” wherein “x” is an integer means hydrocarbons having x carbon atoms.

30 [0021] The term “C_x” wherein “x” is an integer means a hydrocarbon stream with hydrocarbons having x and/or less carbon atoms and preferably x and less carbon atoms.

[0022] The term “C_x⁺” wherein “x” is an integer means a hydrocarbon stream with hydrocarbons having x and/or more carbon atoms and preferably x and more carbon atoms.

[0023] The term “predominant” means a majority, suitably at least 80 wt% and preferably at least 90 wt%.

5

DESCRIPTION OF THE INVENTION

[0024] A general understanding of the process and apparatus of this invention can be obtained by reference to FIGS. 1-3. FIGS. 1-3 have been simplified by the deletion of a large number of apparatuses customarily employed in a process of this nature, such as vessel internals, temperature and pressure controls systems, flow control valves, recycle pumps, etc. which are not specifically required to illustrate the performance of the invention. Furthermore, the illustration of the process of this invention in the embodiment of a specific drawing is not intended to limit the invention to specific embodiments set out herein.

10

[0025] Commercially there is a demand for FCC technology capable of producing high propylene yields from conventional feedstocks. We have found that propylene yield can be increased to a great extent economically by directing the C₄ and/or C₅ materials recovered from the fractionation zone to a separation unit. By selectively recovering the C₄ and/or C₅ olefins from the C₄ and/or C₅ paraffins and then passing the olefins to a second catalytic reactor, it is possible to increase the propylene yield but with surprisingly significantly less capital and utility costs over that provided by an equivalent FCC process without a C₄ materials separation unit.

15

20

[0026] One embodiment of the present invention is an apparatus and process that may be described with reference to four components shown in FIG. 1: a first catalytic reactor 10, a fractionation section 90, a separation unit 200, and a second catalytic reactor 300. Many configurations of the present invention are possible, but specific embodiments are presented herein by way of example. All other possible embodiments for carrying out the present invention are considered within the scope of the present invention.

25

[0027] The first catalytic reactor 10 may be an FCC reactor. A conventional FCC feedstock and higher boiling hydrocarbon feedstock are a suitable first feed 8 to the first FCC reactor. The most common of such conventional feedstocks is a “vacuum gas oil” (VGO), which is typically a hydrocarbon material having a boiling range of from 343° to 552°C (650° to 1025°F) prepared by vacuum fractionation of atmospheric residue. Such a fraction is

30

generally low in coke precursors and heavy metal contamination which can serve to contaminate catalyst. Heavy hydrocarbon feedstocks to which this invention may be applied include heavy bottoms from crude oil, heavy bitumen crude oil, shale oil, tar sand extract, deasphalted residue, products from coal liquefaction, atmospheric and vacuum reduced
5 crudes. Heavy feedstocks for this invention also include mixtures of the above hydrocarbons and the foregoing list is not comprehensive. Moreover, additional amounts of feed may also be introduced downstream of the initial feed point.

[0028] The first catalytic reactor 10, which may be an FCC reactor, can operate at any suitable temperature, and typically operates at a temperature of 150° to 580°C, preferably
10 520° to 580°C at the reactor outlet. In one exemplary embodiment, a higher temperature may be desired, such as no less than 565°C at the outlet and a pressure of from 69 to 517 kPa (gauge) (10 to 75 psig) but typically less than 275 kPa (gauge) (40 psig). The catalyst-to-oil ratio, based on the weight of catalyst and feed hydrocarbons entering the bottom of the reactor, may range up to 30:1 but is typically between 4:1 and 25:1. Hydrogen is not normally
15 added to the reactor. Steam may be passed into the first reactor 10 equivalent to 2 to 35 wt% of feed. Typically, however, the steam rate may be between 2 and 7 wt% for maximum gasoline production and 10 to 30 wt% for maximum light olefin production. The average residence time of catalyst in the reactor may be less than 5 seconds.

[0029] The catalyst in the first catalytic reactor 10 can be a single catalyst or a mixture of
20 different catalysts. Usually, the catalyst includes two components or catalysts, namely a first component or catalyst, and a second component or catalyst. Such a catalyst mixture is disclosed in, e.g., US 7,312,370. Generally, the first component may include any of the well-known catalysts that are used in the art of FCC, such as an active amorphous clay-type catalyst and/or a high activity, crystalline molecular sieve. Zeolites may be used as molecular
25 sieves in FCC processes. Preferably, the first component includes a large pore zeolite, such as a Y-type zeolite, an active alumina material, a binder material, including either silica or alumina, and an inert filler such as kaolin.

[0030] Typically, the zeolitic molecular sieves appropriate for the first component have a large average pore size. Usually, molecular sieves with a large pore size have pores with
30 openings of greater than 0.7 nanometers in effective diameter defined by greater than 10, and typically 12, member rings. Pore Size Indices of large pores can be above 31. Suitable large pore zeolite components may include synthetic zeolites such as X and Y zeolites, mordenite

and faujasite. A portion of the first component, such as the zeolite, can have any suitable amount of a rare earth metal or rare earth metal oxide.

[0031] The second component may include a medium or smaller pore zeolite catalyst, such as a MFI zeolite, as exemplified by at least one of ZSM-5, ZSM-11, ZSM-12, ZSM-23, ZSM-35, ZSM-38, ZSM-48, and other similar materials. Other suitable medium or smaller pore zeolites include ferrierite, and erionite. Preferably, the second component has the medium or smaller pore zeolite dispersed on a matrix including a binder material such as silica or alumina and an inert filler material such as kaolin. The second component may also include some other active material such as Beta zeolite. These compositions may have a crystalline zeolite content of 10 wt% to 50 wt% or more, and a matrix material content of 50 wt% to 90 wt%. Components containing 40 wt% crystalline zeolite material are preferred, and those with greater crystalline zeolite content may be used. Generally, medium and smaller pore zeolites are characterized by having an effective pore opening diameter of less than or equal to 0.7 nanometers, rings of 10 or fewer members, and a Pore Size Index of less than 31. Preferably, the second catalyst component is an MFI zeolite having a silicon-to-aluminum ratio greater than 15, preferably greater than 75. In one exemplary embodiment, the silicon-to-aluminum ratio can be 15:1 to 35:1.

[0032] The total catalyst mixture in the first reactor 10 may contain 1 to 25 wt% of the second component, including a medium to small pore crystalline zeolite with greater than or equal to 7 wt% of the second component being preferred. When the second component contains 40 wt% crystalline zeolite with the balance being a binder material, an inert filler, such as kaolin, and optionally an active alumina component, the catalyst mixture may contain 0.4 to 10 wt% of the medium to small pore crystalline zeolite with a preferred content of at least 2.8 wt%. The first component may comprise the balance of the catalyst composition. In some preferred embodiments, the relative proportions of the first and second components in the mixture may not substantially vary throughout the first reactor 10. The high concentration of the medium or smaller pore zeolite as the second component of the catalyst mixture can improve selectivity to light olefins. In one exemplary embodiment, the second component can be a ZSM-5 zeolite and the catalyst mixture can include 0.4 to 10 wt% ZSM-5 zeolite excluding any other components, such as binder and/or filler. Coke is deposited on the catalyst when it contacts the feed in the reactor 10. Coked catalyst is regenerated by combustion in the regenerator 30 and recycled back to the reactor 10.

[0033] First cracked products in the line 87 from the first catalytic reactor 10, relatively free of catalyst particles, exit the first catalytic reactor 10. The first cracked products stream in the line 87 may be subjected to additional treatment to remove fine catalyst particles or to further prepare the stream prior to fractionation. The first cracked products stream in the line 5 87 can be combined with the second cracked products stream in a line 301 to produce a products stream in line 88. The line 88 transfers the cracked products streams to the fractionation section 90 that in an embodiment may include a main fractionation column 100 and a gas recovery section 420.

[0034] The main column 100 is a fractionation column with trays and/or packing 10 positioned along its height for vapor and liquid to contact and reach equilibrium proportions at tray conditions and a series of pump-arounds to cool the contents of the main column. The main fractionation column is in downstream communication with the first reactor 10 and second reactor 300 and can be operated with an top pressure of 35 to 172 kPa (gauge) (5 to 25 psig) and a bottom temperature of 343° to 399°C (650° to 750°F). In the product recovery 15 section 90, the gaseous FCC product in line 88 is directed to a lower section of an FCC main fractionation column 100. A variety of products are withdrawn from the main column 100. In this case, the main column 100 recovers an overhead stream of light products comprising unstabilized naphtha and lighter gases in an overhead line 94. The overhead stream in overhead line 94 is condensed in a condenser and perhaps cooled in a cooler both represented 20 by 96 before it enters a receiver 98 in downstream communication with the first reactor 10. A line 102 withdraws a light off-gas stream of liquefied petroleum gas (LPG) and dry gas from the receiver 98. An aqueous stream is removed from a boot in the receiver 98. A bottoms liquid stream of light unstabilized naphtha leaves the receiver 98 via a line 104. A first portion of the bottoms liquid stream is directed back to an upper portion of the main column 25 and a second portion in line 406 may be directed to the gas recovery section 420. Both lines 102 and 406 may be fed to the gas recovery section 420. Several other fractions may be separated and taken from the main column including an optional heavy slurry oil from the bottom in line 114.

[0035] In the embodiment shown in FIG. 1, the naphtha splitter column 480 may be 30 located upstream of a primary absorber column 140 to improve the efficiency of the gas recovery unit. This embodiment has the advantage of decreasing the molecular weight of the primary absorber lean oil and also makes it possible to recover and heat the second

hydrocarbon feed more efficiently. With the naphtha splitter column 480 positioned upstream of the primary absorber column 140, the second hydrocarbon feed can be recovered as a vapor draw from the debutanizer column bottom or reboiler since the heavy naphtha is recovered in the upstream naphtha splitter.

5 [0036] The gas recovery section 420 is shown to be an absorption based system, but any vapor recovery system may be used including a cold box system. To obtain sufficient separation of light gas components, the gaseous stream in line 102 is compressed in a compressor 122, also known as a wet gas compressor, which is in downstream communication with the main fractionation column overhead receiver 98. Any number of
10 compressor stages may be used, but typically dual stage compression is utilized. In dual stage compression, compressed fluid from compressor 122 is cooled and enters an interstage compressor receiver 124 in downstream communication with the compressor 122. Liquid in line 426 from a bottom of the compressor receiver 124 and the unstabilized naphtha in line 406 from the main fractionation column overhead receiver 98 flow into the naphtha splitter
15 column 480 in downstream communication with the compressor receiver 124. In an embodiment, these streams may join and flow into the naphtha splitter column 480 together. In the embodiment shown in FIG. 1, line 426 flows into the naphtha splitter column 480 at a higher elevation than line 406. The naphtha splitter column 480 is also in downstream communication with a bottom of the main fractionation column overhead receiver 98 and the
20 first reactor 10. In an embodiment, the naphtha splitter column 480 is in direct downstream communication with the bottom of the overhead receiver 98 of the main fractionation column 100 and/or a bottom of the interstage compressor receiver 124. Gas in line 128 from a top of the compressor receiver 124 enters a second compressor 130, also known as a wet gas compressor, in downstream communication with the compressor receiver 124. Compressed
25 effluent from the second compressor 130 in line 131 is joined by streams in lines 138 and 142, and gaseous components are partially condensed and all flow to a second compressor receiver 132 in downstream communication with the second compressor 130. Compressed gas from a top of the second compressor receiver 132 travels in line 134 to enter a primary absorber column 140 at a lower point than an entry point for the naphtha splitter overhead stream in
30 line 482. The primary absorber column 140 is in downstream communication with an overhead of the second compressor receiver 132. A liquid stream from a bottom of the second compressor receiver 132 travels in line 144 to a stripper column 146.

[0037] The naphtha splitter column 480 may split naphtha into a heavy naphtha bottoms, typically C_7^+ , in line 492 which may be recovered in line 184. An overhead stream from the naphtha splitter column 480 may carry light naphtha in line 482, typically a C_7^- material, to the primary absorber column 140. The compressed gas stream in line 134 may enter the primary absorber column 140 which is in downstream communication with the naphtha splitter column 480. In this location the naphtha splitter column 480 may be operated at a top pressure to keep the overhead in liquid phase, such as 344 to 3034 kPa (gauge) (50 to 150 psig) and a temperature of 135° to 191°C (275° to 375°F).

[0038] The gaseous hydrocarbon stream in lines 134 fed to the primary absorber column 140 is contacted with naphtha from the naphtha splitter overhead in line 482 to effect a separation between C_3^+ and C_2^- hydrocarbons by absorption of the heavier hydrocarbons into the naphtha stream upon counter-current contact. A debutanized naphtha stream in line 168 from the bottom of a debutanizer column 460 is delivered to the primary absorber column 140 at a higher elevation than the naphtha splitter overhead stream in line 482 to effect further separation of C_3^+ from C_2^- hydrocarbons. The primary absorber column 140 utilizes no condenser or reboiler but may have one or more pump-arounds to cool the materials in the column. A liquid C_3^+ stream in line 142 from the bottoms of the primary absorber column is returned to line 131 upstream of condenser to be cooled and returned to the second compressor receiver 132. An off-gas stream in line 148 from a top of the primary absorber 140 is directed to a lower end of a secondary or sponge absorber 150. A circulating stream of light cycle oil (LCO) in line 152 absorbs most of the remaining C_5^+ material and some C_3 - C_4 material in the off-gas stream in line 148 by counter-current contact. LCO from a bottom of the secondary absorber in line 156 richer in C_3^+ material than the circulating stream in line 152 is returned in line 156 to the main column 100. The overhead of the secondary absorber column 150 comprising dry gas of predominantly C_2^- hydrocarbons with hydrogen sulfide, amines and hydrogen is removed in line 158 and may be subjected to further separation to recover ethylene and hydrogen.

[0039] Liquid from a bottom of the second compressor receiver 132 in line 144 is sent to the stripper column 146. Most of the C_2^- material is stripped from the C_3 - C_7 material and removed in an overhead of the stripper column 146 and returned to line 131 via overhead line 138 without first undergoing condensation. The overhead gas in line 138 from the stripper column comprising C_2^- material, LPG and some light naphtha is returned to line 131 without

first undergoing condensation. Therefore, only light naphtha is circulated in the gas recovery section 420. The condenser on line 131 will partially condense the overhead stream from line 138 with the gas compressor discharge in line 131 and with the bottoms stream 142 from the primary absorber column 140 will undergo vapor-liquid separation in second compressor receiver 132. The stripper column 146 is in downstream communication with the first reactor 10, a bottom of the second compressor receiver 132, a bottom of the primary absorber 140 and an overhead of the naphtha splitter 480 via the primary absorber column. The bottoms product of the stripper column 146 in line 162 is rich in light naphtha.

[0040] FIG. 1 shows that the liquid bottoms stream from the stripper column 146 may be sent to a first debutanizer column 460 via line 162. The debutanizer column 460 is in downstream communication with the first reactor 10, a bottom of the second compressor receiver 132, and the bottom of the primary absorber 140 and an overhead of the naphtha splitter 480. The debutanizer column 460 may fractionate a portion of first cracked products from the first catalytic reactor 10 to provide a C_4^- overhead stream and C_5^+ bottoms stream. A portion of the debutanizer bottoms in line 466 may be split between line 168 carrying debutanized naphtha to the primary absorber column 140 to assist in the absorption of C_3^+ materials and line 472, which may recycle debutanized naphtha to the naphtha splitter 480 optionally in combination with line 406. The overhead stream in line 164 from the debutanizer comprises C_3 - C_4 olefinic product which can be sent to an LPG splitter column 170 which is in downstream communication with an overhead of the debutanizer column 460.

[0041] In the LPG splitter column 170, C_3 materials may be forwarded from the overhead in a line 174 to a C_3 splitter to recover propylene product. C_4 materials from the bottom in line 476 may be recovered for blending in a gasoline pool as product or further processed. The line 476 is in communication with the separation unit 200, wherein C_4 materials comprising olefins and paraffins are separated with C_4 olefins recovered from the separation unit in the line 202 and C_4 paraffins recovered in the line 203.

[0042] In an embodiment, C_4 material in line 202 may be delivered as a second hydrocarbon feed to a second catalytic reactor 300 which is in downstream communication with an overhead of the main fractionation column 100, a bottom of the primary absorber 140, the separation unit 200 and a bottom of the LPG splitter 170. The second catalytic reactor 300 is in downstream communication with the separation unit 200. In an embodiment, a light naphtha stream may be withdrawn from a side of the debutanizer 460 as a side cut in line 483

and recovered. The second catalytic reactor 300 may be a fluidized bed reactor or an ebullating bed reactor. The second catalytic reactor 300 may be a second FCC reactor. Although the second reactor 300 is depicted as a second FCC reactor, it should be understood that any suitable catalytic reactor can be utilized, such as a fixed bed or a fluidized bed reactor. The second catalytic reactor may also be an olefin cracking reactor or an oligomerization reactor. For purposes of this discussion, the second catalytic reactor will be treated as a second FCC reactor. The second hydrocarbon feed may be fed to the second FCC reactor 300 in recycle feed line 202. The second hydrocarbon feed is preferably a portion of the first cracked products produced in the first reactor 10, fractionated in the main column 100 of the product recovery section 90 and provided to the second reactor 300. In an embodiment, the second reactor is in downstream communication with the product fractionation section 90, the separation unit 200 and/or the first reactor 10 which is in upstream communication with the product fractionation section 90.

[0043] The second hydrocarbon feed is contacted with catalyst in the second catalytic reactor 300 to produce upgraded products. The catalyst may be fluidized by inert gas. Generally, the second reactor 300 may operate under conditions to convert the light naphtha feed to smaller hydrocarbon products. C₄ olefins crack into one or more light olefins, such as ethylene and/or propylene. The mixture of gaseous, upgraded product hydrocarbons in the line 301 is combined with the hydrocarbon product in the line 87 for delivery to the main column via the line 88. In some embodiments, the second catalytic reactor 300 can contain a mixture of the first and second catalyst components as described above for the first reactor. In one preferred embodiment, the second reactor 300 can contain less than 20 wt%, preferably less than 5 wt% of the first component and at least 20 wt% of the second component. In another preferred embodiment, the second reactor 300 can contain only the second component, preferably a ZSM-5 zeolite, as the catalyst. Coked catalyst from the second reactor 300 may also be regenerated in the regenerator 30 and recycled back to the second reactor 300.

[0044] The second reactor 300 can operate in any suitable condition, such as a temperature of 425° to 705°C, preferably a temperature of 550° to 600°C, and a pressure of 40 to 700 kPa (gauge), preferably a pressure of 40 to 400 kPa (gauge), and optimally a pressure of 200 to 250 kPa (gauge). Typically, the residence time of the second reactor 300

can be less than 5 seconds and preferably is between 2 and 3 seconds. Exemplary risers and operating conditions are disclosed in, e.g., US 7,247,233 and US 6,538,169.

[0045] In an aspect, the C₄ paraffin stream in line 203 can be fed to the first catalytic reactor 10. Line 203 may be mixed with the feed in line 8 to become the main feed for reactor 10. The C₄ paraffin stream may be fed to the first catalytic reactor 10 separate from the feed in line 8 at another location. Propylene production of the first reactor 10 is increased as the C₄ olefin material promotes selective cracking to C₃ olefins. A portion of the C₄ paraffin stream can be taken as product in line 204.

[0046] FIG. 2 shows the components of the separation unit 200 in detail. The separation unit 200 comprises two main vessels being an extraction vessel 210 and a distillation vessel 220. Paraffins and olefins enter the extraction vessel 210 through the line 476 wherein the hydrocarbon materials are contacted with an extraction material. The extraction vessel 210 may be operated at a bottom temperature of 90°C to 140°C, with a top temperature of 30°C to 90°C, and an overhead pressure of 275 to 690 kPa (gauge) or otherwise appropriate to maintain the aforementioned temperature profile. The extraction material enters the extraction vessel 210 through the line 221. The ratio of solvent to hydrocarbon should be between 2 and 20 by weight.

[0047] In one embodiment, when C₄ materials are contacted with the extraction material, an immiscible, biphasic mixture is formed, wherein the C₄ olefins selectively partition into an extract phase along with the extraction material while the C₄ paraffins remain in a raffinate phase. The C₄ materials may further comprise additional trace hydrocarbons which may also partition into the extract phase. In certain embodiments the extraction material is a chemical compound selected from the group consisting of dimethylformamide (DMF), acetonitrile (ACN), acetone, N-methyl-2-pyrrolidone (NMP), and N-formylmorpholine (NFM). Preferably, the chemical compound contains a morpholine group. More preferably the chemical compound is N-formylmorpholine (NFM). The raffinate phase composed primarily of the C₄ paraffins is recovered from the extraction vessel 210 through a line 212 and condensed. A portion of the line 212 can be returned to the extraction vessel 210 through a line 213 with the remainder of the raffinate phase sent on for further processing through a line 203.

[0048] The extract phase composed primarily of the C₄ olefins and the extraction material is recovered from the extraction vessel 210 through a line 211 which is in upstream

communication with the distillation vessel 220. The distillation vessel 220 is operated in a manner so as to effect a separation of the extraction material from the C₄ olefins and additionally other trace hydrocarbons. Preferably, the separation is based on a difference in boiling points between the extraction material and the C₄ olefins. The distillation vessel 220 may contain trays, plates or an alternative packing material to effect the separation. The distillation vessel 220 may be operated with a bottoms temperature between 160 and 240°C and preferably between 180 and 220°C and a pressure between 70 and 350 kPa (gauge). In one example, a bottoms stream containing the higher boiling extraction material is recovered from the distillation vessel 220 through a bottoms line 221 which is in downstream communication with the extraction vessel 210. A distillate stream composed primarily of the C₄ olefins and optionally other trace hydrocarbons is recovered from the distillation vessel 220 through a line 222 and condensed. A portion of the line 222 can be returned to the distillation vessel 220 through a line 223 with the remainder of the distillate phase sent on for further processing as described in FIG. 1 by way of the line 202.

[0049] The following Table shows expected yields from the separation unit 200.

TABLE
Typical Yields
Separate Butanes from Butenes

Components, wt%	Feed	Product	
		Butanes	Butenes
i-Butane	28.2	80.1	---
n-Butane	8.2	18.4	2.6
i-Butene	16.8	0.9	25.4
n-Butene	46.8	0.6	72.0
Total	100.0	100.0	100.0
Butene Recovery, wt%			99.2

[0050] One unique feature of the disclosed apparatus and process is that the configuration allows for the advantages of a traditional FCC unit configuration, but improves the overall configuration by allowing for the 4-carbon paraffins to be separated from the 4-carbon olefins. We have surprisingly found that combining a first reaction with a fractionation section, a separation unit for processing the C₄ materials and a second reactor not only results in a

higher propylene yield, but also reduces the capital cost and utility cost when compared to process with a second product recovery section. In regard to the present invention, the overall process recovery section is simplified compared to a process with a separation unit as a common fractionation section can be used. This approach results in less dilution of the hydrocarbon feed to the second reactor 300 with paraffins hence providing a feed richer in olefins. With less dilution of the hydrocarbon feed with paraffins, the hydrocarbon feed rate is lower to the second catalytic reactor 300 and recirculation of C_4^+ material in the gas recovery section is limited to the primary absorber lean oil in line 142. The disclosed apparatus and process can provide propylene yields greater than 20% (e.g., 25%).

[0051] The separation unit 200 may also be used to extract C_5 olefins from C_5 paraffins in a stream comprising C_5 hydrocarbons. Such a C_5 hydrocarbon stream may be obtained in FIG. 1 except that the debutanizer column 460 would be changed to a depentanizer column to provide a C_3 - C_5 hydrocarbon stream in overhead line 164 and the LPG splitter column 170 would be changed to a debutanizer column to provide a C_5 hydrocarbon stream in bottoms line 476. It also envisioned that a mixed C_4 and C_5 hydrocarbon stream could be provided in line 476 as well. Such a C_4 and C_5 hydrocarbon stream may be obtained in FIG. 1 except that the debutanizer column 460 would be changed to a depentanizer column to provide a C_3 - C_5 hydrocarbon stream in overhead line 164 and the LPG splitter column 170 would be changed to a depropanizer column to provide a C_4 and C_5 hydrocarbon stream in bottoms line 476.

[0052] Turning now to FIG. 3, another embodiment of the present invention is an apparatus and process that may be described with reference to four components shown in FIG. 3: a first catalytic reactor 10, a fractionation section 90, a separation unit 200, and an olefin cracking reactor 400. The embodiment of FIG. 3 differs from the embodiment of FIG. 1 in that the second catalytic reactor 300 of FIG. 1 have been removed and replaced with the olefin cracking reactor 400 and a line 402. The olefin cracking reactor 400 is in fluid communication with the LPG splitter column 170 via line 402. The similar components in FIG. 3 that were described above for FIGS. 1 and 2 will not be described again for FIG. 3.

[0053] In the apparatus of FIG. 3, the process stream containing C_4 olefins and/or C_5 olefins from line 201 is introduced into the olefin cracking reactor 400, such as in the form of a fixed bed reactor, and the process stream contacts with an olefin cracking catalyst and at reaction conditions effective to convert C_4 olefins to form a cracked olefins effluent stream in line 402. The cracked olefins effluent stream comprises C_2 and C_3 olefins. Catalysts suitable

for olefin cracking comprise a crystalline silicate of the MFI family which may be a zeolite, a silicalite or any other silicate in that family or the MEL family which may be a zeolite or any other silicate in that family. Examples of MFI silicates are ZSM-5 and Silicalite. An example of an MEL zeolite is ZSM-11. Other examples are Boralite D and Silicalite-2 as described by the International Zeolite Association, Atlas of Zeolite Structure Types. The preferred crystalline silicates have pores or channels defined by ten oxygen rings and a high silicon/aluminum atomic ratio typically of at least 120 attained by suitable dealumination methods.

[0054] The catalyst has structural and chemical properties and is employed under particular reaction conditions whereby the catalytic cracking of the C₄ olefins readily proceeds. Different reaction pathways can occur on the catalyst. Suitable olefin cracking process conditions include a temperature of around 400° to 600°C, preferably from 500° to 600°C, and a pressure of from 100 to 500 kPa.

[0055] As shown in FIG. 3, the cracked olefins effluent stream from the olefin cracking reactor 400 can be appropriately processed by being returned to the LPG splitter column 170 via line 402. The cracked olefins effluent stream may include ethylene and propylene. In the LPG splitter column 170, C₂ and C₃ materials may be forwarded from the overhead in a line 174 to an ethylene recovery unit to recover ethylene product and a propylene recovery unit to recover propylene product. The bottom stream in line 476 may be sent to the separation unit 200 for further processing as described above.

EXAMPLES

[0056] A feed comprising 67 wt-% butenes and 33 wt-% butanes was mixed with NMP solvent at a solvent to hydrocarbon ratio of 14:1 by weight at a range of 53 to 83°C and a pressure of 4.7 to 5.9 kPa (gauge). Distillation of the extract overhead from the extraction vessel provided olefins in the vapor phase up to 61 wt-% to 38 wt-% paraffins indicating a reasonable separation as shown in FIG. 4. FIG. 4 indicates that the fraction of olefins in the distillation overhead may be increased at higher temperature and/or pressure.

[0057] A stream of pentenes may be extracted from pentanes. A feed comprising 73 wt-% pentenes and 26 wt-% pentanes was mixed with NMP solvent at a solvent to hydrocarbon ratio of 8:1 by weight at a range of 22 to 71°C and a pressure of 3.1 to 5.7 kPa (gauge). Distillation of the extract overhead from the extraction vessel provided olefins in the vapor

phase up to 57 wt-% to 26 wt-% paraffins indicating a reasonable separation as shown in FIG. 5

SPECIFIC EMBODIMENTS

[0058] While the following is described in conjunction with specific embodiments, it will be understood that this description is intended to illustrate and not limit the scope of the preceding description and the appended claims.

[0059] A first embodiment of the invention is a process for catalytic cracking, the process comprising (a) feeding a hydrocarbon feed stream to a first catalytic reactor; (b) passing an effluent of the first catalytic reactor to a fractionation zone to produce a first fractionation zone stream and a second fractionation zone stream, the first fractionation zone stream comprising $C_{(x-1)}^-$ hydrocarbons, and the second fractionation zone stream comprising C_x hydrocarbons, wherein x is an integer; (c) passing the second fractionation zone stream to a separation unit to produce a first separation unit stream and a second separation unit stream, the first separation unit stream comprising C_x paraffins, and the second separation unit stream comprising C_x olefins; and (d) feeding the second separation unit stream to a second catalytic reactor. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph further comprising (e) producing a third fractionation zone stream comprising $C_{(x+1)}^+$ hydrocarbons in the fractionation zone; and (f) feeding the third fractionation zone stream to the second catalytic reactor. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein step (c) comprises (i) contacting the second fractionation zone stream with an extraction material to selectively extract C_x olefins from the second fractionation zone stream; (ii) separating the residual C_x paraffins in the second fractionation zone stream from the extraction material and C_x olefins to produce the first separation unit stream; and (iii) recovering the C_x olefins from the extraction material to produce the second separation unit stream. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein steps (i) and (ii) further comprise a liquid-liquid extraction process. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein the first separation unit stream is immiscible with the extraction material and C_x olefins. An embodiment of the invention is one, any or all of prior

embodiments in this paragraph up through the first embodiment in this paragraph wherein step (iii) further comprises recovering the C_x olefins from the extraction material based on a difference in the boiling points of the C_x olefins and the extraction material. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first

5 embodiment in this paragraph wherein step (iii) further comprises recycling the extraction material for contacting with the second fractionation zone stream in step (i). An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein step (c) comprises feeding the second fractionation zone stream comprising paraffins, olefins and optionally traces of other hydrocarbons in

10 gaseous or liquid form into a first separation vessel; feeding an extraction material in liquid form into the first separation vessel; separating the second fractionation zone stream into the first separation unit stream and a first bottom stream comprising the extraction material laden with the C_x olefins and optionally traces of other hydrocarbons; feeding the first bottom stream to a second separation vessel; and separating the first bottom stream into the second

15 separation unit stream and a second bottom stream comprising the extraction material. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein the extraction material is a chemical compound comprising a morpholine group. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph

20 further comprising recirculating the second bottom stream to the first separation vessel. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph further comprising passing an effluent of the second catalytic reactor to the fractionation zone, wherein the effluent of the second catalytic reactor comprises propylene. An embodiment of the invention is one, any or all of prior

25 embodiments in this paragraph up through the first embodiment in this paragraph wherein the second catalytic reactor is a fixed bed reactor. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein x equals 4. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph further comprising

30 extracting C_x paraffins from the second fractionation zone stream, thereby increasing the overall propylene yield of the process. An embodiment of the invention is one, any or all of

prior embodiments in this paragraph up through the first embodiment in this paragraph further comprising reacting the C_x olefins in the second catalytic reactor to produce C₃ olefins.

[0060] A second embodiment of the invention is a process for catalytic cracking, the process comprising (a) feeding a hydrocarbon feed stream to a first catalytic reactor; (b) passing an effluent of the first catalytic reactor to a fractionation zone to produce a first fractionation zone stream and a second fractionation zone stream, the first fractionation zone stream comprising C₃ hydrocarbons, and the second fractionation zone stream comprising C₄ hydrocarbons; (c) passing the second fractionation zone stream to a separation unit to produce a first separation unit stream and a second separation unit stream, the first separation unit stream comprising C₄ paraffins, and the second separation unit stream comprising C₄ olefins; (d) feeding the second separation unit stream to a second catalytic reactor; and (e) passing an effluent of the second catalytic reactor to the fractionation zone, wherein the effluent of the second catalytic reactor comprises propylene.

[0061] A third embodiment of the invention is a catalytic cracking system, comprising a first catalytic reactor configured to receive a hydrocarbon feed stream; a fractionation zone, the fractionation zone is in fluid communication with the first catalytic reactor, wherein the fractionation zone is configured to produce a first fractionation zone stream comprising C₃ or C₄ hydrocarbons and a second fractionation zone stream comprising C₄ and/or C₅ hydrocarbons; a separation unit, the separation unit is in fluid communication with the fractionation zone, wherein separation unit is configured to produce a first separation unit stream comprising C₄ and/or C₅ paraffins and a second separation unit stream comprising C₄ and/or C₅ olefins; and a second catalytic reactor, the second catalytic reactor being in fluid communication with the separation unit for receiving the second separation unit stream. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the third embodiment in this paragraph wherein the second catalytic reactor is in fluid communication with the fractionation zone for supplying C₃ hydrocarbons to the fractionation zone. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the third embodiment in this paragraph wherein the second catalytic reactor is a fixed bed reactor, an ebullating bed reactor or a fluidized reactor. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the third embodiment in this paragraph wherein the separation unit comprises a first separation vessel including an extraction material in liquid form for separating the second

fractionation zone stream into the first separation unit stream and a first bottom stream comprising the extraction material laden with the C₄ and/or C₅ olefins; and a second separation vessel is in fluid communication with first separation vessel, the second separation vessel for receiving the first bottom stream and for separating the first bottom stream into the second separation unit stream and a second bottom stream comprising the extraction material.

[0062] Although the invention has been described in considerable detail with reference to certain embodiments, one skilled in the art will appreciate that the present invention can be practiced by other than the described embodiments, which have been presented for purposes of illustration and not of limitation. Therefore, the scope of the appended claims should not be limited to the description of the embodiments contained herein.

[0063] Without further elaboration, it is believed that one skilled in the art can, using the preceding description, utilize the present invention to its fullest extent. The preceding preferred specific embodiments are, therefore, to be construed as merely illustrative, and not limitative of the remainder of the disclosure in any way whatsoever.

[0064] In the foregoing, all temperatures are set forth in degrees Celsius and, all parts and percentages are by weight, unless otherwise indicated.

[0065] From the foregoing description, one skilled in the art can easily ascertain the essential characteristics of this invention and, without departing from the spirit and scope thereof, can make various changes and modifications of the invention to adapt it to various usages and conditions.

CLAIMS:

1. A process for catalytic cracking, the process comprising:
 - (a) feeding a hydrocarbon feed stream to a first catalytic reactor;
 - (b) passing an effluent of the first catalytic reactor to a fractionation zone to produce a
5 first fractionation zone stream and a second fractionation zone stream, the first fractionation zone stream comprising $C_{(x-1)}^-$ hydrocarbons, and the second fractionation zone stream comprising C_x hydrocarbons, wherein x is an integer;
 - (c) passing the second fractionation zone stream to a separation unit to produce a first
10 separation unit stream and a second separation unit stream, the first separation unit stream comprising C_x paraffins, and the second separation unit stream comprising C_x olefins; and
 - (d) feeding the second separation unit stream to a second catalytic reactor.
2. The process of claim 1 further comprising:
 - (e) producing a third fractionation zone stream comprising $C_{(x+1)}^+$ hydrocarbons in the
15 fractionation zone; and
 - (f) feeding the third fractionation zone stream to the second catalytic reactor.
3. The process of claim 1 wherein step (c) comprises:
 - (i) contacting the second fractionation zone stream with an extraction material to
selectively extract C_x olefins from the second fractionation zone stream;
 - 20 (ii) separating the residual C_x paraffins in the second fractionation zone stream from the extraction material and C_x olefins to produce the first separation unit stream; and
 - (iii) recovering the C_x olefins from the extraction material to produce the second separation unit stream.
- 25 4. The process of claim 3 wherein steps (i) and (ii) further comprise a liquid-liquid extraction process.
5. The process of claim 3 wherein the first separation unit stream is immiscible with the extraction material and C_x olefins.

6. The process of claim 3 wherein step (iii) further comprises recovering the C_x olefins from the extraction material based on a difference in the boiling points of the C_x olefins and the extraction material.

7. The process of claim 3 wherein step (iii) further comprises recycling the
5 extraction material for contacting with the second fractionation zone stream in step (i).

8. The process of claim 1 wherein step (c) comprises:

feeding the second fractionation zone stream comprising paraffins, olefins and
optionally traces of other hydrocarbons in gaseous or liquid form into a first
separation vessel;

10 feeding an extraction material in liquid form into the first separation vessel;


separating the second fractionation zone stream into the first separation unit stream
and a first bottom stream comprising the extraction material laden with the C_x
olefins and optionally traces of other hydrocarbons;

feeding the first bottom stream to a second separation vessel; and

15 separating the first bottom stream into the second separation unit stream and a second
bottom stream comprising the extraction material.

9. The process of claim 8 wherein the extraction material is a chemical compound
comprising a morpholine group.

10. The process of claim 8 further comprising recirculating the second bottom stream
20 to the first separation vessel.

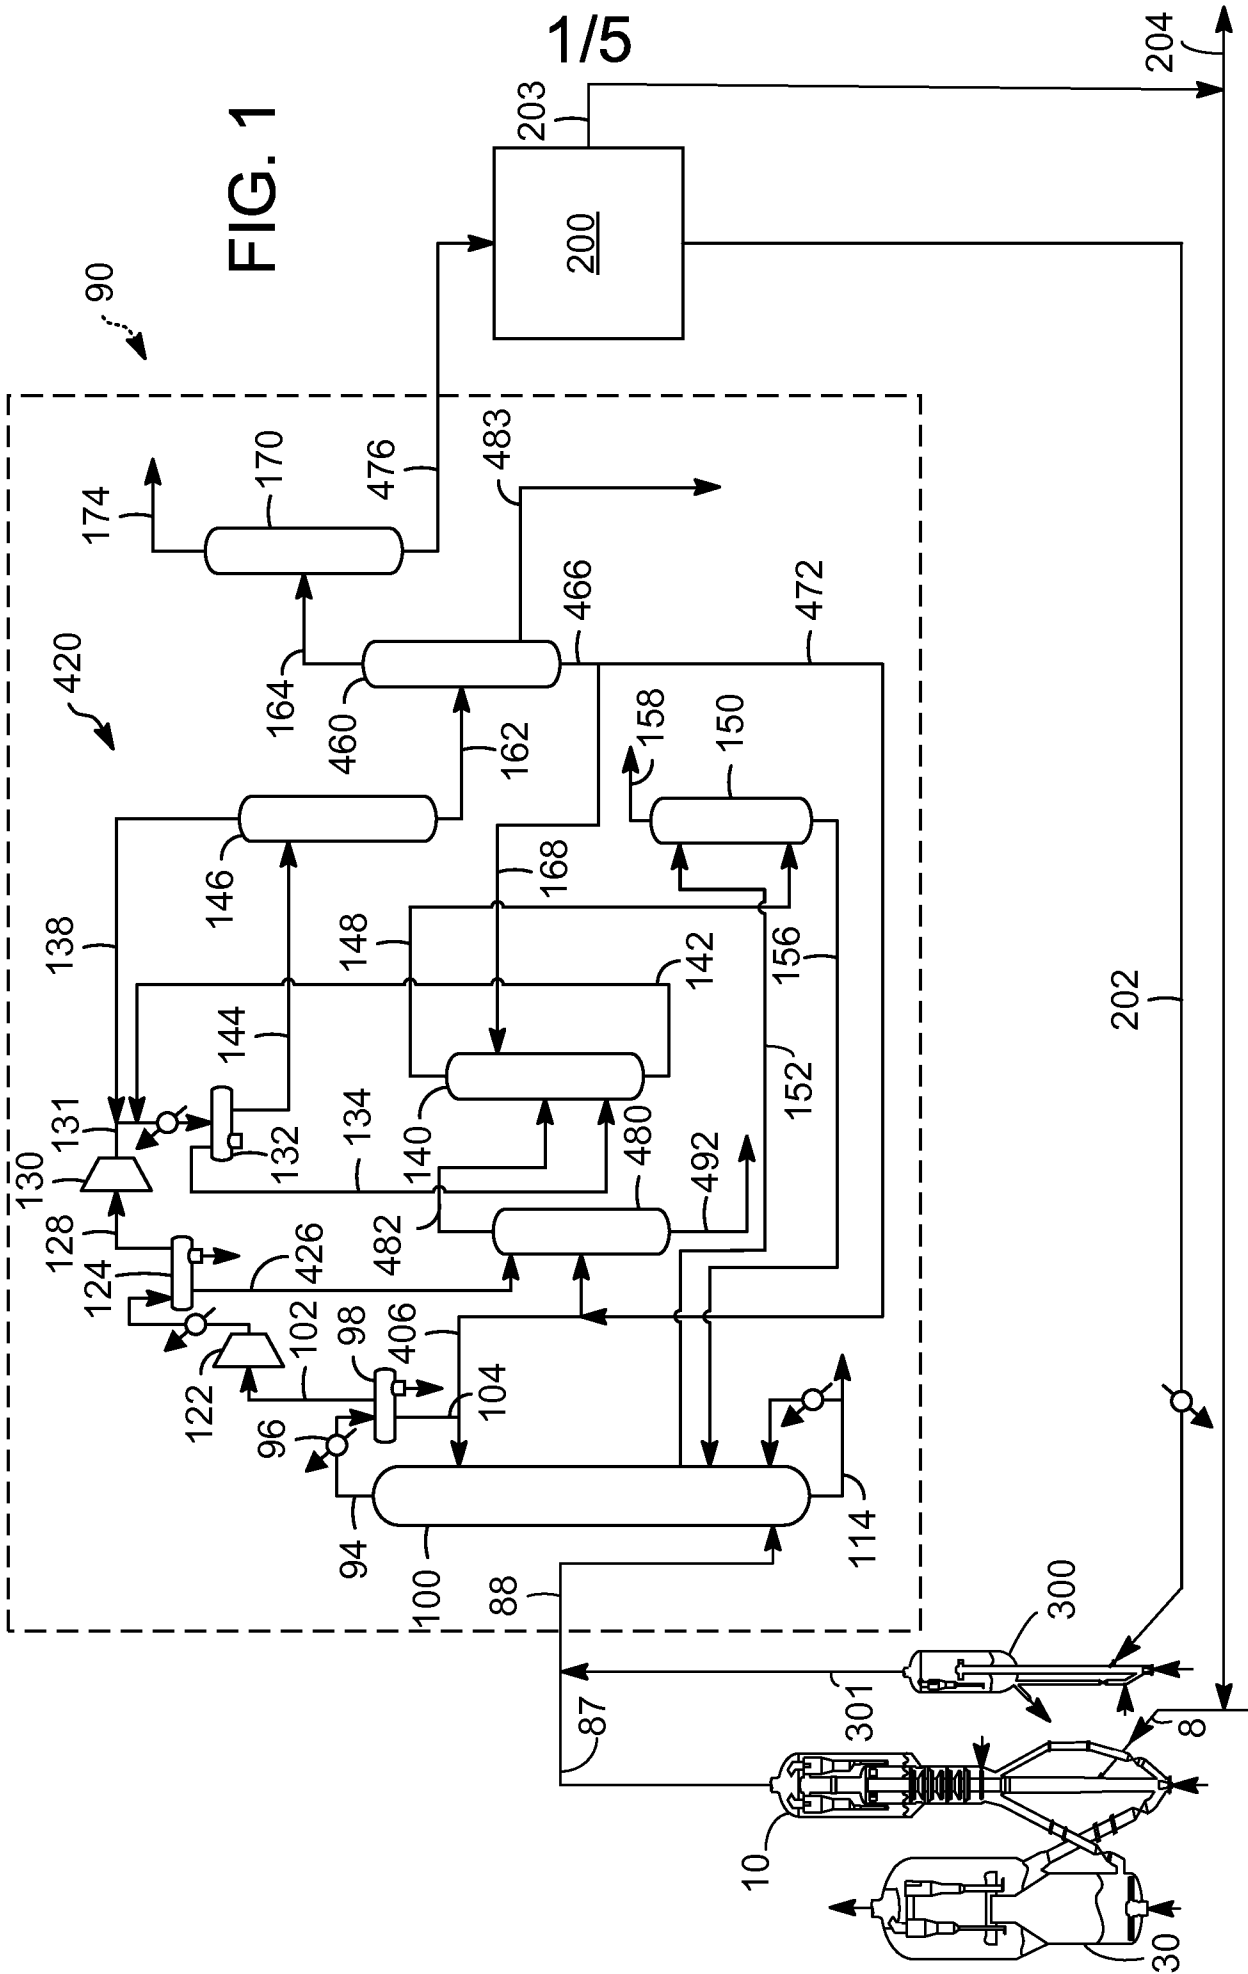

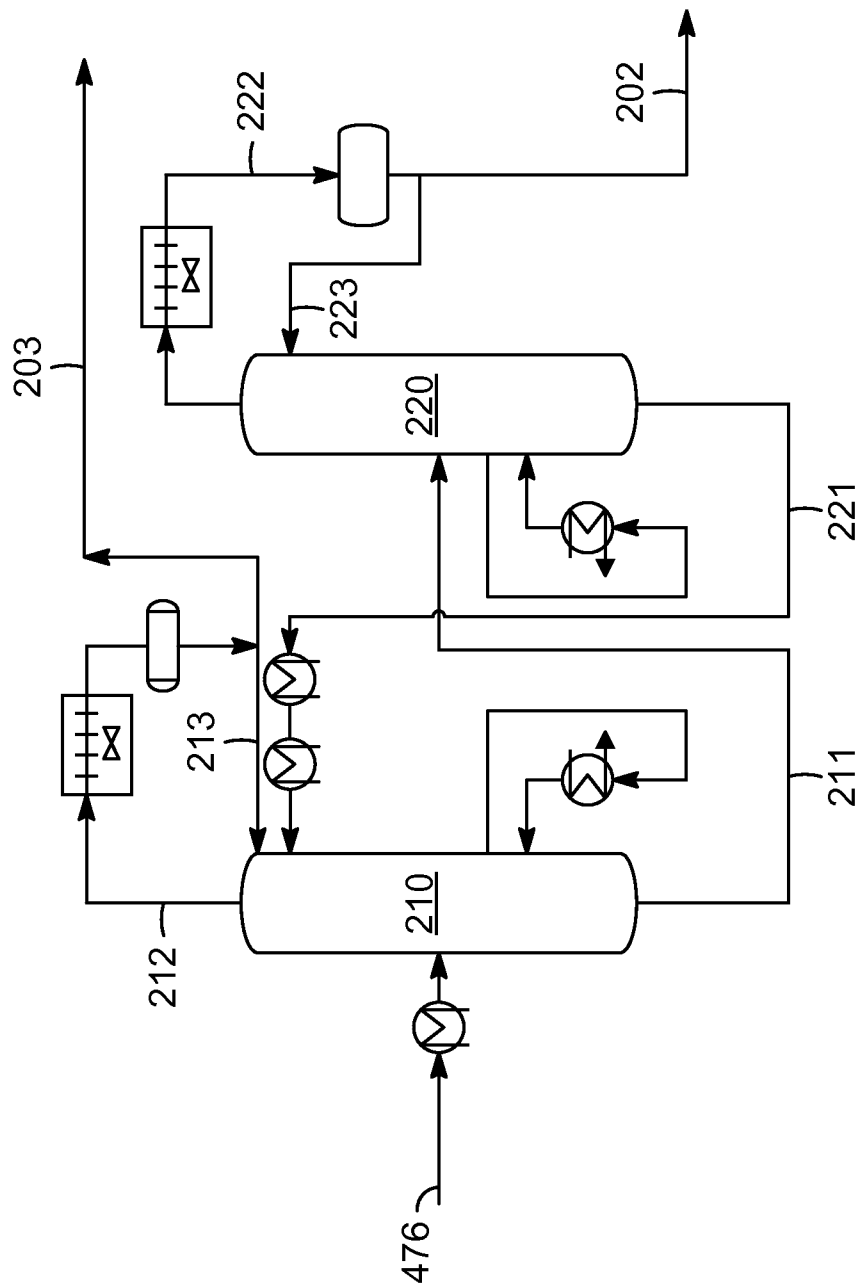


FIG. 2

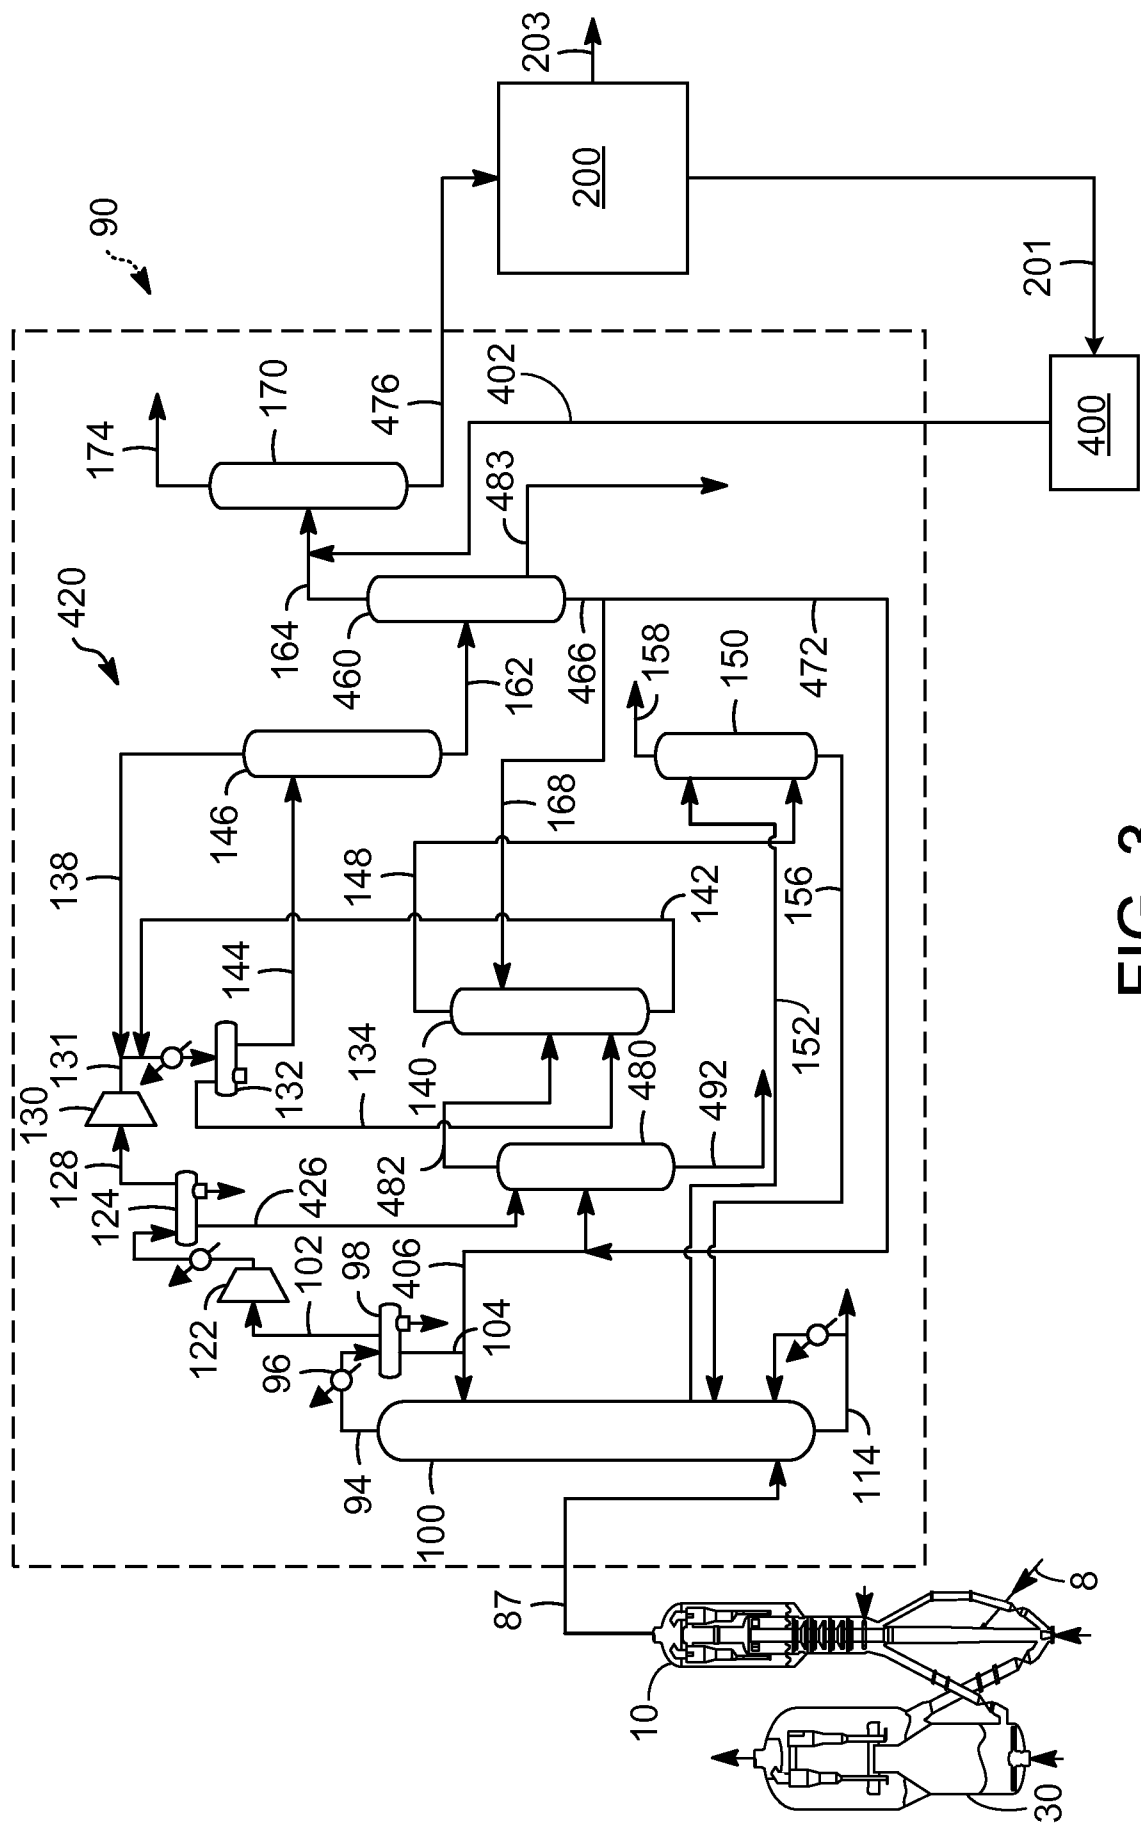


FIG. 3

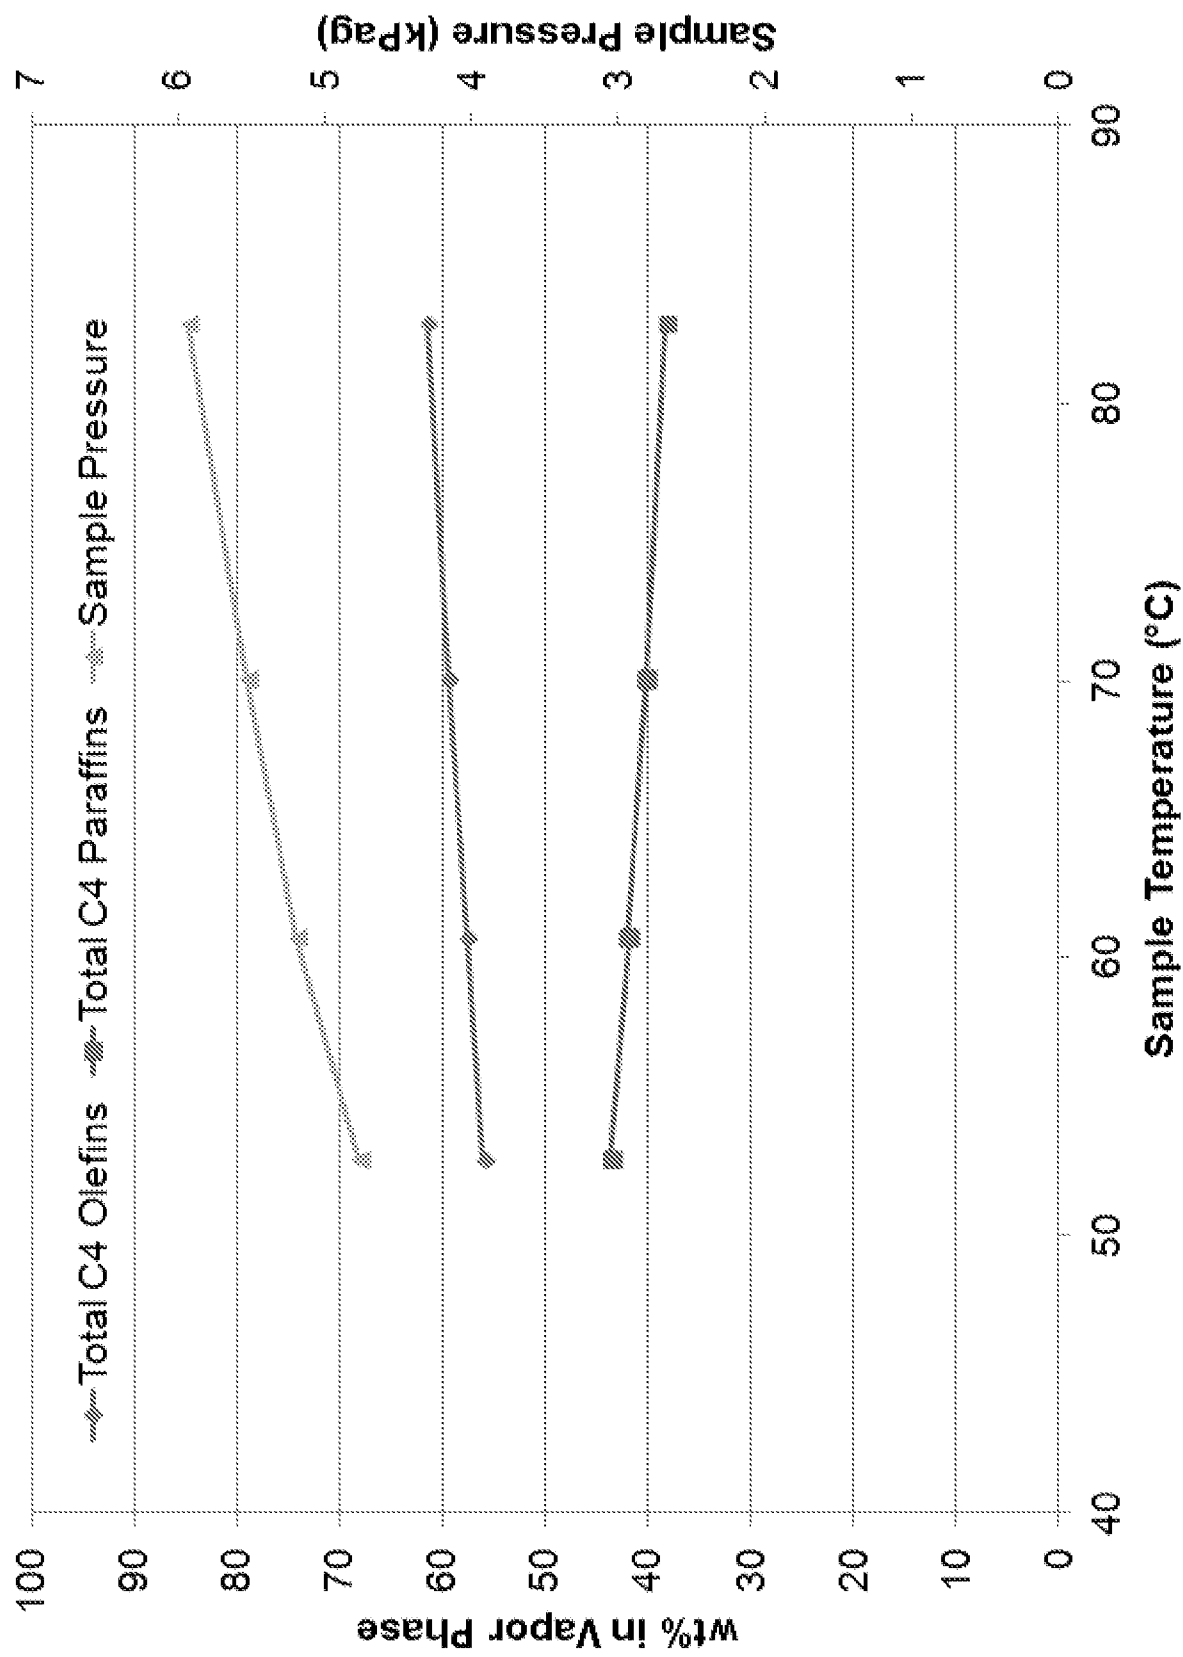


FIG. 4

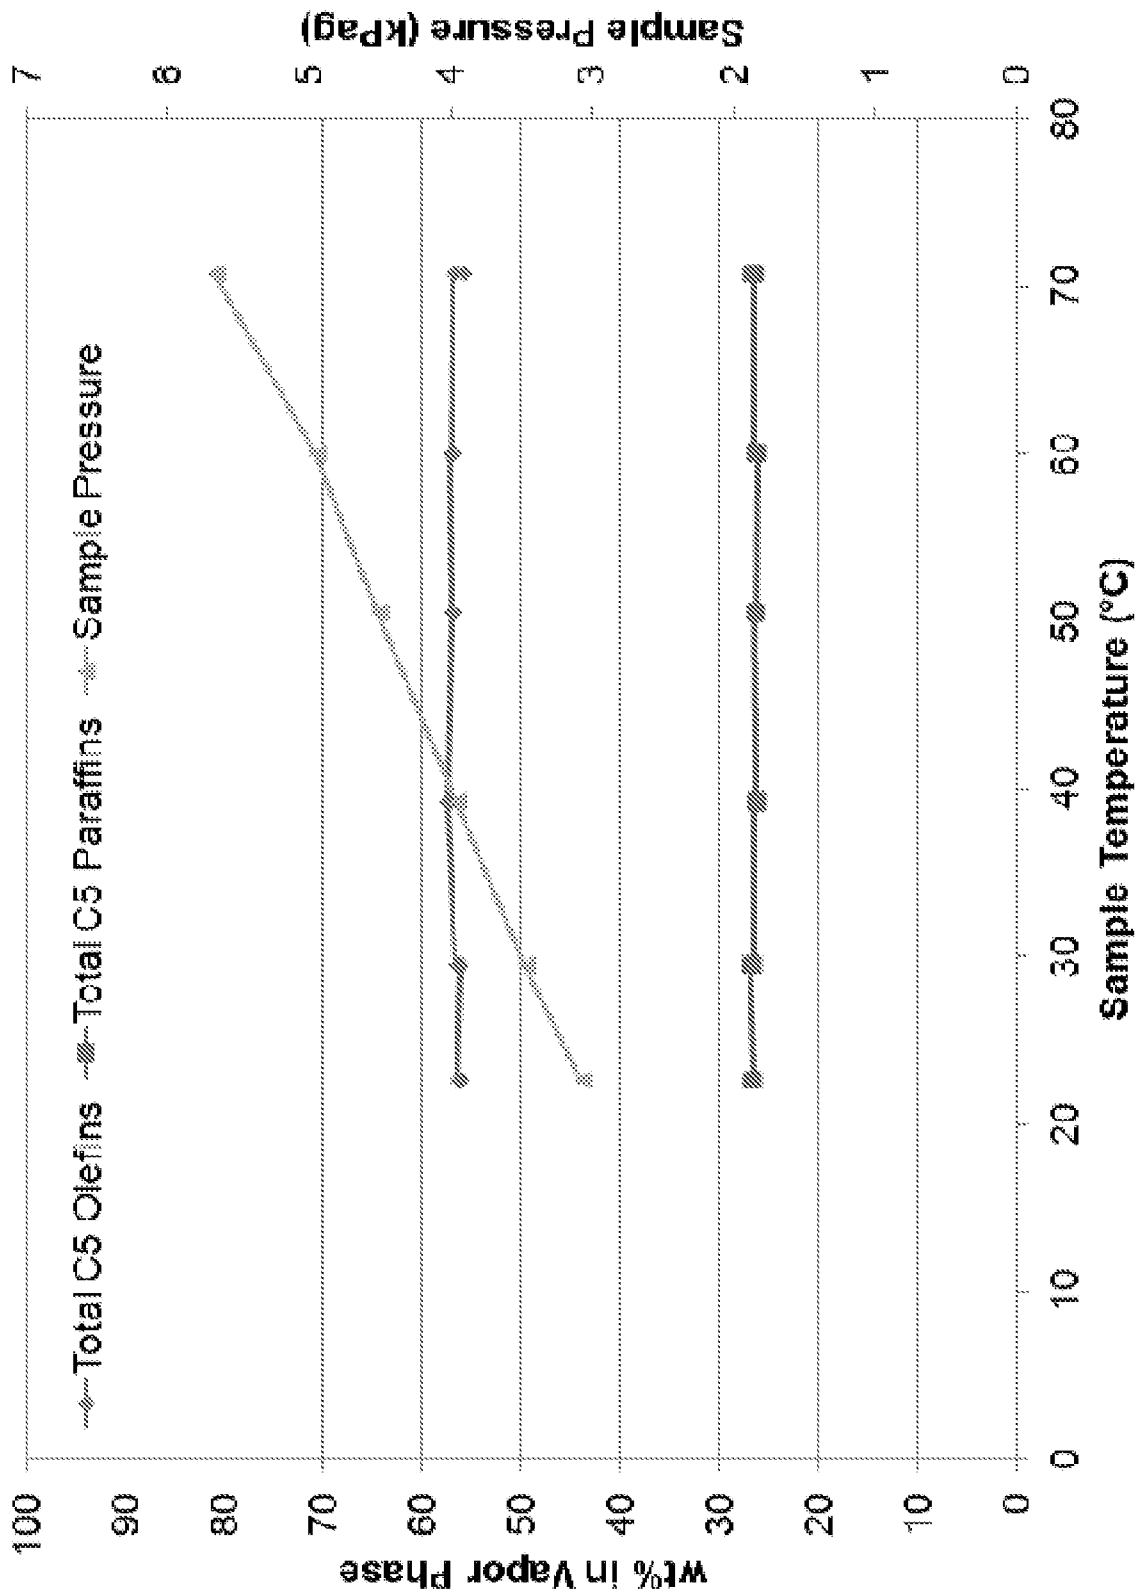


FIG. 5

A. CLASSIFICATION OF SUBJECT MATTER**C10G 11/18(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C10G 11/18; C10G 51/06; B01J 8/26; C10C 1/08; C07C 2/76; C07C 2/06; B01J 8/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: fluid catalytic cracking, fractionation, separator, C4 paraffins, C4 olefins, propylene, liquid-liquid extraction, morpholine**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2011-056691 A2 (UOP LLC) 12 May 2011 See abstract; paragraphs [0024]-[0026], [0037], [0038], [0040]-[0049]; figure 1.	1-10
Y	CN 86104676 A (KRUPP KOPPERS GMBH) 11 March 1987 See abstract; page 6, line 7-page 7, line 15; claims 1, 2; figure 1.	1-10
A	US 2013-0261359 A1 (DA SILVA FERREIRA ALVES, J. J. et al.) 3 October 2013 See abstract; paragraphs [0027], [0030]-[0042]; claims 1-5; figure 1.	1-10
A	US 2012-0141333 A1 (ULAS ACIKGOZ, S. et al.) 7 June 2012 See abstract; paragraphs [0021], [0034]-[0048]; figure.	1-10
A	US 2008-0156696 A1 (NICCUM, P. K. et al.) 3 July 2008 See abstract; paragraphs [0076]-[0079]; claims 1, 8; figure 1.	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 February 2015 (25.02.2015)

Date of mailing of the international search report

25 February 2015 (25.02.2015)

Name and mailing address of the ISA/KR


International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 3473

Authorized officer

LEE, Dong Wook

Telephone No. +82-42-481-8163



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/068279

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011-056691 A2	12/05/2011	CN 102549113 A CN 102549113 B KR 10-1304041 B1 KR 10-2012-0080236 A US 2011-0108458 A1 US 2011-0110825 A1 US 8354018 B2 US 8506891 B2 WO 2011-056691 A3	04/07/2012 03/12/2014 04/09/2013 16/07/2012 12/05/2011 12/05/2011 15/01/2013 13/08/2013 22/09/2011
CN 86104676 A	11/03/1987	AT 40982 T CN 1011307 B DE 3532289 A1 EP 0216991 A1 EP 0216991 B1 ES 8706590 A1 JP 62-061934 A JP 729944 B2 SU 1493097 A3	15/03/1989 11/09/1985 19/03/1987 08/04/1987 01/03/1989 16/09/1987 18/03/1987 05/04/1995 07/07/1988
US 2013-0261359 A1	03/10/2013	US 2011-245559 A1 US 2014-213837 A1 US 8471084 B2 US 8704021 B2	06/10/2011 31/07/2014 25/06/2013 22/04/2014
US 2012-0141333 A1	07/06/2012	US 2012-0138509 A1 US 8747654 B2 WO 2012-074691 A2 WO 2012-074691 A3	07/06/2012 10/06/2014 07/06/2012 10/01/2013
US 2008-0156696 A1	03/07/2008	US 7611622 B2 WO 2008-085378 A2 WO 2008-085378 A3	03/11/2009 17/07/2008 04/12/2008