

(19) AUSTRALIAN PATENT OFFICE

- (54) Title
Engagement system for connecting gardening tools and similar to a power unit
- (51)⁶ International Patent Classification(s)
A01B 1/22 (2006.01) 20060101ALI2006050
A01G 3/00 (2006.01) 8BHAU B25F
B25F 1/02 (2006.01) 1/02
B25F 3/00 (2006.01) 20060101ALI2006050
A01B 1/22 8BHAU B25F
20060101AFI2006050 3/00
8BHAU A01G 20060101ALI2006050
3/00 8BHAU
- (21) Application No: 2006201743 (22) Application Date: 2006.04.26
- (30) Priority Data
- | | | |
|------------------|------------|--------------|
| (31) Number | (32) Date | (33) Country |
| RE 2005 A 000054 | 2005.05.17 | IT |
- (43) Publication Date : 2006.12.07
(43) Publication Journal Date : 2006.12.07
- (71) Applicant(s)
Emak S.P.A.
- (72) Inventor(s)
Cobb Jr., William T.
- (74) Agent/Attorney
Spruson & Ferguson, Level 35 St Martins Tower 31 Market Street, Sydney, NSW, 2000

26 Apr 2006

2006201743



ABSTRACT

ENGAGEMENT SYSTEM FOR CONNECTING GARDENING TOOLS AND
SIMILAR TO A POWER UNIT

5

An engagement system (1) for removably connecting
gardening tools and similar to a power unit comprising a
motor, said system comprising a base element (2) suitable
for being fixed to a crankcase housing the drive motor, a
10 fastening element (3) of a tool that can be actuated by
the shaft of said motor, suitable for coupling with the
base element (2), where said elements (2, 3) are equipped
with respective mutual engagement/disengagement means (5,
6) suitable for cooperating with each other to removably
15 lock said elements (2, 3) in an engagement position, said
base element (2) being equipped with at least one safety
switch (19) actuated elastically by a rod (11) between a
first position in which it is closed and prevents the
operation of the drive motor, and a second position in
20 which it is open and allows the operation of the drive
motor, said second position only being obtainable when
the fastening element (3) is engaged with the base
element (2).

1/4

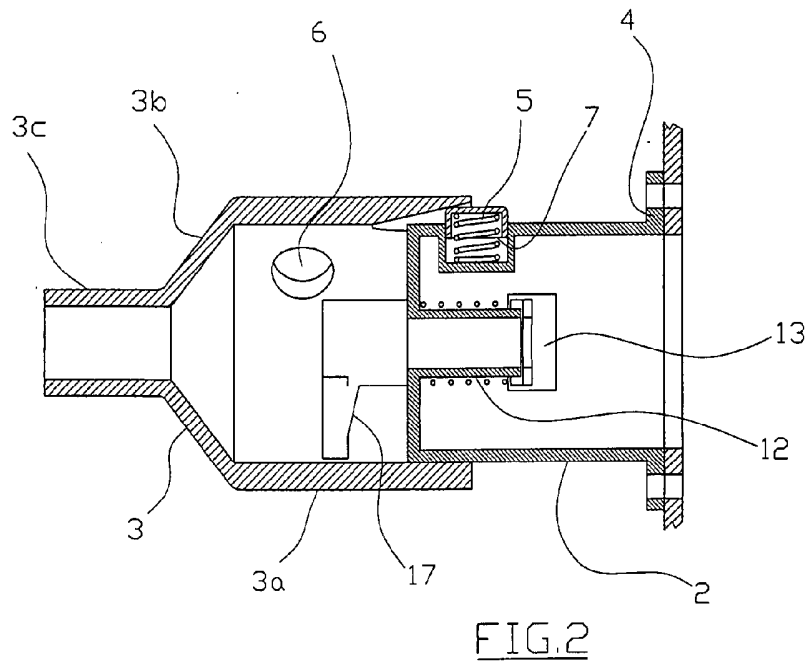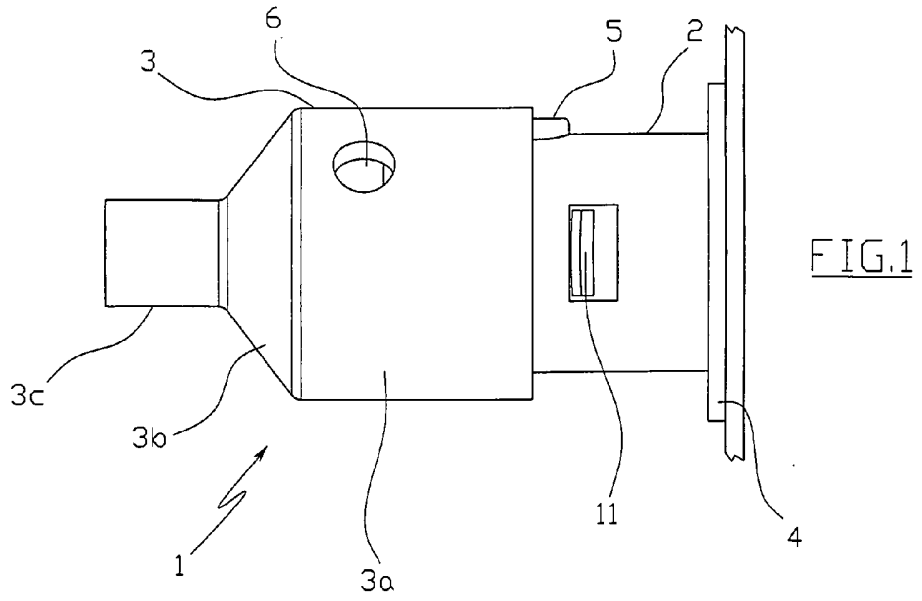

2006201743 26 Apr 2006

S&F Ref: 762638

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

Name and Address of Applicant :	EMAK S.P.A., of Bagnolo in piano, Via Fermi, 4, I-42011, Reggio Emilia, Italy
Actual Inventor(s):	William T. Cobb Jr.
Address for Service:	Spruson & Ferguson St Martins Tower Level 35 31 Market Street Sydney NSW 2000 (CCN 3710000177)
Invention Title:	Engagement system for connecting gardening tools and similar to a power unit

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

26 Apr 2006

2006201743

- 1 -

ENGAGEMENT SYSTEM FOR CONNECTING GARDENING TOOLS AND
SIMILAR TO A POWER UNIT

5 The present invention refers to an engagement system for
connecting gardening tools and similar to a power unit
comprising, for example, an internal combustion engine.
More specifically, the present invention refers to an
engagement system that allows the connection of
10 interchangeable tools, which can be actuated by the same
power unit.

As known, in the field of gardening the use of motorised
devices that allow the use of various interchangeable
implements that are to be fixed through engagement
15 systems to a power unit comprising a motor housed in a
housing crankcase is increasingly common.

The structure of engagement systems of conventional
motorised devices is, however, relatively complicated and
also exposes the user to dangers deriving above all from
20 the motor being accidentally switched on during
replacement of the implement.

Indeed, in systems of the prior art the means actuated by
the motor, like for example the drive shaft, are often
directly accessible during replacement of the implement.

25 Currently, the market requires that such systems be as
easy to use and as safe for the user as possible.

The purpose of the present invention is that of avoiding
the aforementioned drawbacks with reference to the prior
art providing an engagement system for connecting
30 gardening tools and similar to a power unit, which is
easy to use and which ensures greater safety for the
user, so as to satisfy the aforementioned requirements.

Such a purpose is accomplished through an engagement
system for connecting gardening tools and similar to a
35 power unit in accordance with claim 1.

The dependent claims outline preferred and particularly advantageous embodiments of the engagement system for connecting gardening tools and similar to a power unit according to the invention.

- 5 Further characteristics and advantages of the invention shall become clear from reading the following description provided as an example and not for limiting purposes, with the help of the figures illustrated in the attached tables, in which:
- 10 - figure 1 shows a front view of the engagement system in accordance with the present invention;
- figure 2 shows a section view along a vertical plane of the system of figure 1;
- figure 3 shows an enlargement of a detail of figure 2;
- 15 - figures 4A and 4B show the base element of the system of figure 1 according to two embodiments;
- figures 5A, 5B and 5C show the base element in section for the view inside an elastic element according to three embodiments;
- 20 - figures 6A and 6B show a section view along a vertical plane of the switch associated with the base element respectively closing and opening a circuit connected to earth;
- figure 7 shows a perspective view of a fastening system associated with the system of figure 1;
- 25 - figure 8 shows a section view of figure 7 taken along a plane of symmetry;
- figure 9 shows a perspective view of an element of figure 7.
- 30 With reference to figures 1 and 2, an engagement system for connecting gardening tools and similar to a motor in accordance with the present invention is globally indicated with 1.
- The engagement system 1 essentially comprises a base
35 element 2 suitable for being fixed to a crankcase housing

a drive motor (not illustrated) and a fastening element 3 for a tool, in which the fastening element 3 is suitable for coupling with the base element 2 clamping onto it.

In the illustrated example, the base element 2 is in the form of a male hollow cylindrical body equipped with a flange 4 for attachment to the crankcase, whereas the fastening element 3 is in the form of a female body having a cylindrical portion 3a shaped to fit onto the base body 2 and a frusto-conical portion 3b with a cylindrical portion 3c on top from where the fastening of the tool (not illustrated) takes place.

In accordance with the present invention, the elements 2 and 3 are shaped so as to make the rotary components of the motor inaccessible when they are coupled together.

Alternatively, it is possible to foresee the use of a base body 2 formed integrally with the crankcase as well as a fastening body 3 formed integrally with the corresponding tool.

The base body 2 comprises a button 5 suitable for cooperating with a corresponding opening 6, formed on the fastening body 3 and shaped to receive it so that it fits to size under the thrusting of a spring.

Said spring, according to a first embodiment (Figs. 3, 4A), is in the form of a coil spring 7 housed in a space 8, formed in the base body 2, so as to exert a radial thrust outwards. In a second embodiment, said spring can be formed from an elastic portion 9 (Fig. 4B) that extends axially on the surface of the base body 2.

The spring 7 or 9 exerts a radial thrust outwards so that when the button 5 is inserted into the hole 6 it prevents the fastening body 3 from rotating. Moreover, the button 5, when it is inserted in the corresponding hole 6, locks the system 1 in the use position unequivocally determined by the mutual position between the button 5 and the hole 6.

In the illustrated example, the spring 7 or 9 is automatically preloaded during the insertion of the base body 2 into the fastening body 3. Indeed, a draft 10 is foreseen (Fig. 3) formed inside the fastening body 3 to receive the button 5 that gradually presses it inwards during insertion into the fastening body 3. The draft 10 is circumferentially staggered with respect to the hole 6, so that once the body 3 is inserted, it is rotated until the button 5 reaches the hole 6 where the spring 7 or 9 pushes it back outwards.

The base body 2 comprises a rod 11 (Figs. 5 and 6), centrally perforated to allow the passage of the guide shaft of the tool, which is flexible and flat, fixed on the inside to the base body 2 through a hollow small cylinder 12, arranged centrally. The rod 11 is perpendicular to the axis of the small cylinder 12, and has the two opposite ends slightly projecting from the surface of the base body 2 through two opposite openings 13. Said rod 11 can be rigid, with the possibility to translate according to the axis of the base body 2 and associated with it by elastic means.

The elastic means can take up different embodiments; the preferred ones are illustrated in figures 5A-5C. In particular, the elastic means can be a coil spring 14, arranged surrounding the small cylinder 12 for carrying the rod 11 (Fig. 5A), or else a pair of coil springs 15 arranged beside the small cylinder 12 (Fig. 5B). Alternatively, it is possible to foresee the use of a rod 11 consisting of a leaf spring (Fig. 5C).

In the illustrated examples, said elastic element 14, 15 is loaded through a relative rotation of the fastening body 3 with respect to the base body 2. This loading is preferably obtained through a ramp 17 (Fig. 2) formed inside the fastening body 3 that guides the projecting ends of the rod 11 associated with the base body 2

against two switches 19 (Figs. 6A, 6B).

In the clamping position, not illustrated for the sake of simplicity, i.e. when the ends of the rod 11 are forced by the ramp 17 and the button 5 is inserted in the hole 6, the rod 11 presses elastically against the switches 19 (Fig. 6B).

The two electrical switches 19 form part of a circuit, for the sake of simplicity schematised in the figures with just the two electrical connection cables, which connects the circuit for switching on the motor to earth. In the illustrated example, the two switches 19 are fixed to the base body 2 near to the two openings 13. Said switches 19 are arranged so as to be actuated open by the rod 11 so as to open the earth circuit and allow the operation of the motor (Fig. 6A). In the case of detachment, possibly accidentally, of the fastening body 3, the switches 19 close and stop the motor (Fig. 6A). This always occurs when the fastening body 3 is separated from the base body 2, i.e. when the elastic element 14, 15 (or the rod 11 if it is a leaf spring) is not loaded. On the other hand, when the fastening body 3 is clamped to the base element 2, the ends of the rod 11 engage against the ramp 17 bending, against the action of the elastic element 14, 15, and moving away from the switches 19 so as to open the safety circuit and allowing the operation of the motor (Fig. 6B).

The engagement system 1 of the present invention can furthermore be provided with a coupling system (Figs. 7, 8) arranged between the guide shaft 30 of the tool and the drive shaft. Said coupling system comprises an engagement cover 20 made to rotate by the drive shaft through a friction engagement and a hollow connector 21 associated with a square tang 22 formed on the centre of the cover 20. The free end of the connector 21 has a shaped receiving seat 23 having tapered curves that

converge towards a square opening for coupling with the tang 22 of the cover 20 (Fig. 9). This particular configuration of the receiving seat allows easy insertion of the guide shaft 30 of the tool, which has the free
5 coupling end shaped like a wedge.

The cover 20 is arranged inside the crankcase near and coaxial to the base element 2, with the connector 21 that extends inside the small cylinder 12.

As can be appreciated from what has been described, the
10 engagement system for connecting gardening tools and similar to a power unit according to the present invention allows the requirements to be satisfied and allows the drawbacks mentioned in the introductory part of the present description with reference to the prior
15 art to be overcome.

The engagement system of the present invention is simple to use. Indeed, through a simple pressing of the button and rotation of the fastening element the two bodies are locked, and all parts in movement are made inaccessible
20 to the user.

Thanks to the presence of the safety switch, effectively actuated in the case of even accidental detachment of the two bodies, the operation of the motor is prevented.

Of course, a man skilled in the art can bring numerous
25 modifications and variants to the engagement system for connecting gardening tools and similar to a power unit described above in order to satisfy contingent and specific requirements, all of which are covered by the scope of protection of the invention, as defined by the
30 following claims.

The claims defining the invention are as follows:

1. Engagement system (1) for removably connecting gardening tools and similar to a power unit comprising a motor, said system comprising a base element (2) suitable for being fixed to a crankcase housing the drive motor, a fastening element (3) of a tool that can be actuated by the shaft of said motor, suitable for coupling with the base element (2), characterised in that said elements (2, 3) are equipped with respective mutual engagement/disengagement means (5, 6) suitable for cooperating with each other to removably lock said elements (2, 3) in an engagement position, said base element (2) being equipped with at least one safety switch (19) actuated elastically by a rod (11) between a first position in which it is closed and prevents the operation of the drive motor, and a second position in which it is open and allows the operation of the drive motor, said second position only being obtainable when the fastening element (3) is engaged with the base element (2).
2. System (1) according to claim 1, in which said base element (2) comprises a male hollow cylindrical body equipped with a flange (4) for attachment to the crankcase.
3. System (1) according to claim 1, in which said base element (2) is formed in a single piece with the crankcase.
4. System (1) according to claim 1, in which said fastening element (3) comprises a female hollow cylindrical body suitable for at least partially containing the base element (2).

5. System (1) according to claim 1, in which said fastening element (3) is formed in a single piece with the tool.

5 6. System (1) according to claim 1, in which said engagement/disengagement means comprise a button (5) mounted on the base element (2), said button (5) being suitable for cooperating with a corresponding opening (6) formed on the fastening element (3) and shaped to receive
10 it so that it fits to size under the thrust of a spring (7, 9).

7. System (1) according to claim 6, in which said spring is a coil spring (7) arranged radially in a space (8)
15 formed on the base element (2).

8. System (1) according to claim 6, in which said spring is an elastic portion (9) formed canti-levered from the base element (9).

20 9. System (1) according to claim 1, in which said rod (11) cooperates with an elastic element (14, 15) associated with the base element (2) and is actuated by a ramp (17) of the fastening element (3) when it engages with the base element (2).

25 10. System (1) according to claim 9, in which said elastic element (14, 15) is loaded through a relative rotation of the fastening element (3) with respect to the base element (2).

30 11. System (1) according to claim 9, in which said elastic element comprises a spiral spring (14, 15) that acts in contrast to the transversal rod (11).

35 12. System (1) according to claim 1, further comprising a

2006201743 26 Apr 2006

- 9 -

coupling system arranged between the guide shaft (30) of the tool and the drive shaft.

5 13. System (1) according to claim 12, in which said coupling system comprises an engagement cover (20) and a connector (21) centrally associated with said cover (20).

10 14. System (1) according to claim 13, in which said connector (21) has a shaped seat (23) for receiving the guide shaft (30) of the tool.

2006201743 26 Apr 2006

- 10 -

15. An engagement system for removably connecting gardening tools and similar to a power unit, said engagement system being substantially as hereinbefore described with reference to any one embodiment, as that embodiment is depicted in the accompanying drawings.

5



Dated 24 April, 2006




EMAK S.P.A.

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

1/4

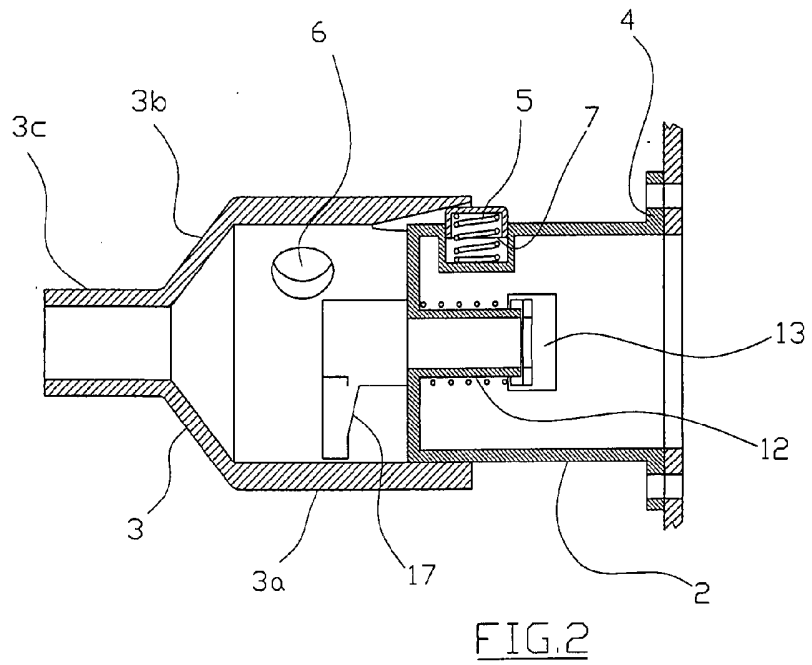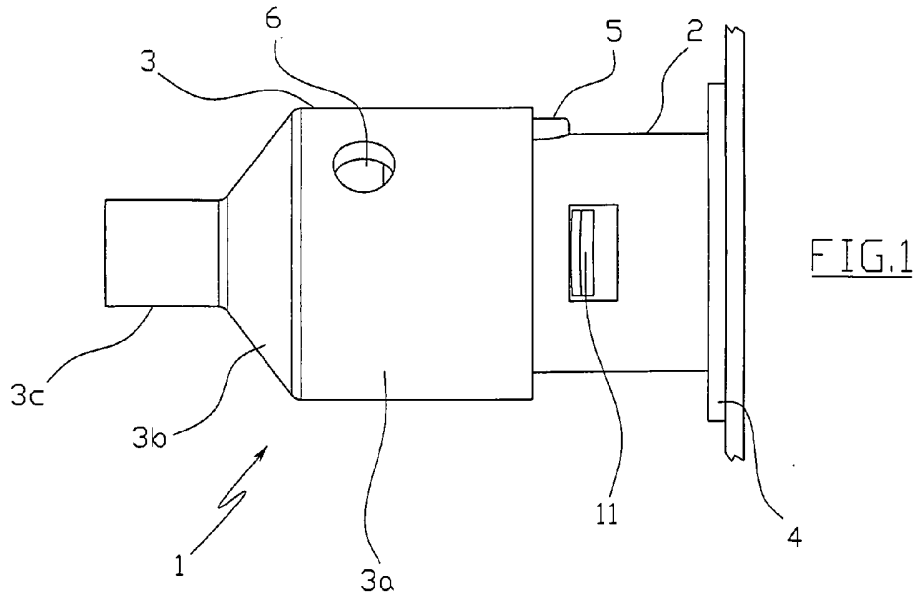

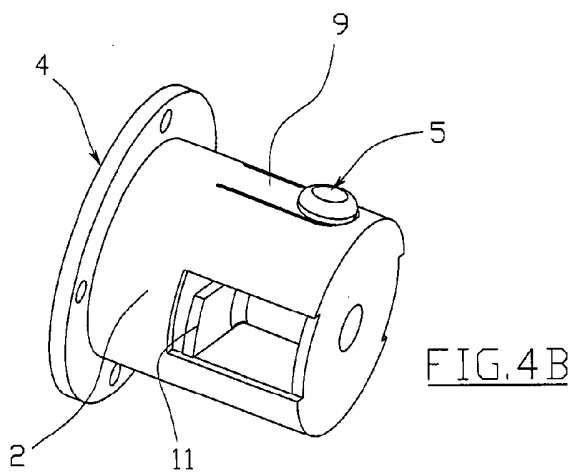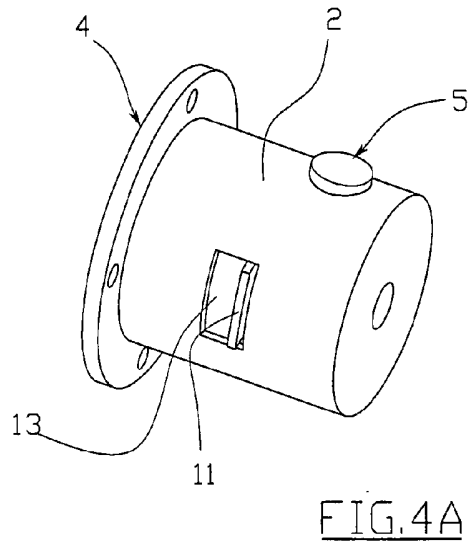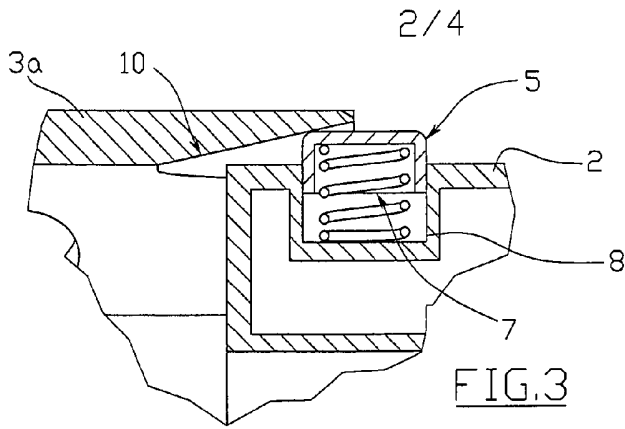

3/4

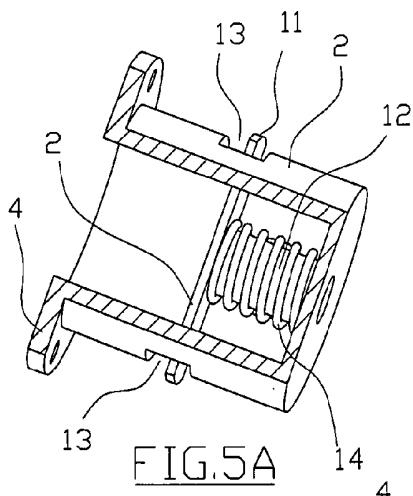


FIG. 5A

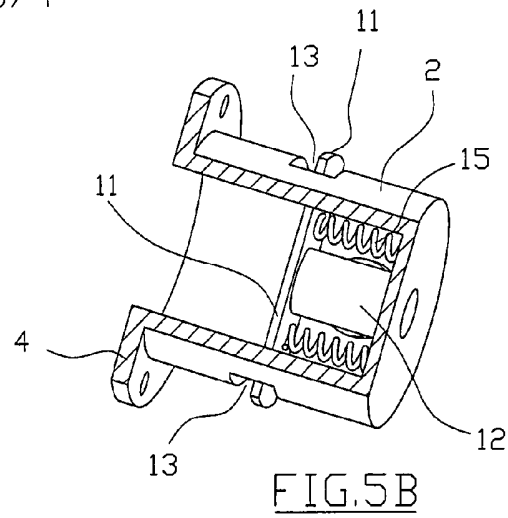


FIG. 5B

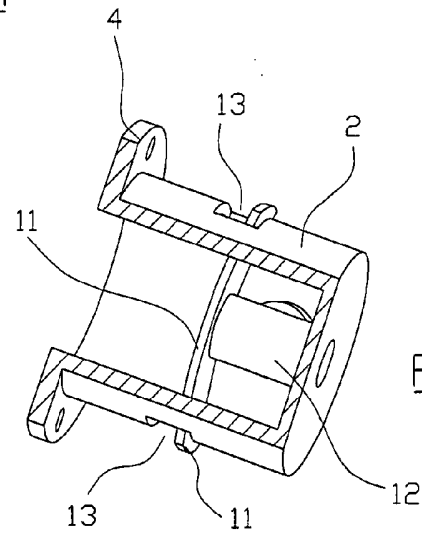


FIG. 5C

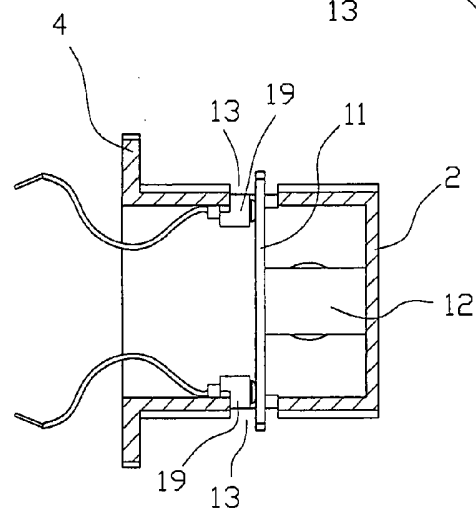


FIG. 6A

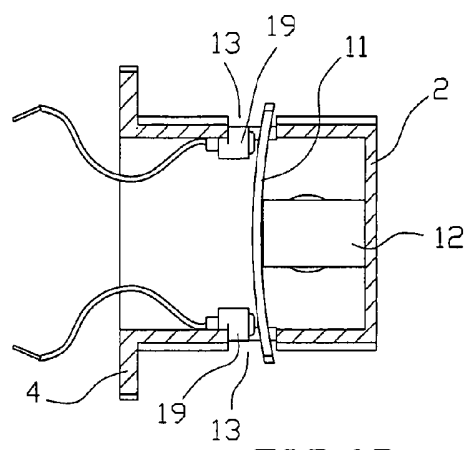


FIG. 6B

