



HU000033665T2

(19) **HU**(11) Lajstromszám: **E 033 665**(13) **T2****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 12 754762**(22) A bejelentés napja: **2012. 02. 06.**(51) Int. Cl.: **B65D 75/36** (2006.01)**B65D 75/52** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20120754762

(86) A nemzetközi (PCT) bejelentési szám:

PCT/IB 12/000205

(97) Az európai bejelentés közzétételi adatai:

EP 2681127 A2 **2012. 09. 13.**

(87) A nemzetközi közzétételi szám:

WO 12120344

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2681127 B1 **2016. 12. 07.**

(30) Elsőbbségi adatok:

201113041131 **2011. 03. 04.** **US**

(73) Jogosult(ak):

**Sands Innovations Ltd., Forest Glen, QLD
4556 (AU)**

(72) Feltaláló(k):

**TEYS, Bradley, Donald, Caloundra, Queensland 4551
(AU)****STEVENS, David, Tewantin, Queensland 4565 (AU)**

(74) Képviselő:

**Danubia Szabadalmi és Jogi Iroda Kft.,
Budapest**

(54)

Törhető tartály

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 681 127 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
07.12.2016 Bulletin 2016/49

(21) Application number: **12754762.8**

(22) Date of filing: **06.02.2012**

(51) Int Cl.:
B65D 75/36 (2006.01) B65D 75/52 (2006.01)

(86) International application number:
PCT/IB2012/000205

(87) International publication number:
WO 2012/120344 (13.09.2012 Gazette 2012/37)

(54) **FRACTURABLE CONTAINER**
BRECHBARER BEHÄLTER
CONTENANT FRACTURABLE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **04.03.2011 US 201113041131**

(43) Date of publication of application:
08.01.2014 Bulletin 2014/02

(73) Proprietor: **Sands Innovations Pty Ltd.**
Brisbane, Queensland 4000 (AU)

(72) Inventors:
• **TEYS, Bradley, Donald**
Caloundra, Queensland 4551 (AU)

• **STEVENS, David**
Tewantin, Queensland 4565 (AU)

(74) Representative: **Maury, Richard Philip**
Marks & Clerk LLP
90 Long Acre
London WC2E 9RA (GB)

(56) References cited:
FR-A5- 2 198 461 US-A- 3 741 384
US-A- 4 155 454 US-A- 5 009 894
US-A1- 2010 116 772 US-A1- 2011 024 462
US-B1- 7 270 239

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] The present invention relates generally to a container and, more particularly, to a fracturable container for opening.

Background

[0002] Containers are made from various materials, including glass, metal and plastic. Recently, plastic containers have been favored for their light weight construction and low cost. In particular, plastic containers can be made by known molding and thermoforming processes. In order to withstand shipping, handling and storage, the plastic should be robust. Preferred plastics today include PET and high-impact polystyrene. In particular, the plastics are selected so as to resist fracturing upon the application of expected and unexpected forces.

[0003] Many of the known sealed containers include a body defining a cavity for receiving material and a lid or cover for sealing the cavity. In some containers, the cover is connected to the body by a mechanical interconnection, such as a snap-fit connection or threaded connection. In other containers, the cover can be connected to the body by adhesives and heat sealing. In some of these containers, the cover can be easily removed from the body to allow for access to the stored material. With small containers, however, removal of the cover can be difficult.

[0004] Other containers can be configured so that cover remains connected to the body, and the body can be fractured upon the application of force. To provide a fracturable opening while maintaining the general strength of a container made from PET or high-impact polystyrene, one of the walls of the container will have a weakened section, such as a thinned wall section or perforations of the wall.

[0005] Plastic containers, including a weakened section, are often made by a basic molding process, as the wall thickness can be varied during the molding process. Other plastic containers with a weakened section are thermoformed, where the weakened section is a result of cutting or perforating. Due to the reduced wall thickness associated with thermoformed containers, the weakened section is produced on generally flat sections of the containers so that a minimum wall thickness can be maintained, thereby providing a measure of structural stability, while weakening a section sufficiently to be fracturable.

[0006] The weakened section allows the package to maintain a desired structural integrity inherent in the PET or high-impact polystyrene along the majority of the container body. However, by weakening a section of the container body, the container can be undesirably compromised by the application of force on the container body or as a result of internal pressure within the container, resulting in an unsealed container.

[0007] To reduce the impact of employing a weakened section, known thermoformed containers position the weakened section to extend along a corner or otherwise smaller section of the container. The resulting small opening from this minimized weakened section does not provide for free flow of product stored in the cavity under the influence of gravity. While this aids in reducing unintended dispensation from the cavity, a user must squeeze or otherwise deform the container rather than simply tilting the container to dispense the contents.

[0008] Many containers include an inner coating or layer to provide further protection for the contents. Although these coatings are effective for particular materials to be stored in the container or for particular environments, they are not intended to accommodate for the compromised integrity of the container body resulting from the weakened wall section.

[0009] US 3741384 discloses a sprinkle-packet for salt, pepper, or the like having a plastic body sealed to a paper backing. The plastic body includes a pocket and an elongate neck in communication with the pocket. When a user wishes to open the packet, he holds the neck at its uppermost end and bends the neck backwards to break open the package. The neck is stiff to concentrate rupturing action at the junction of the neck with the pocket.

[0010] The invention is in the container of Claim 1.

Brief Description of the Drawings

[0011]

FIG. 1 is a perspective view of a container;

FIG. 2 is an enlarged perspective view of an intermediate portion of the container of FIG. 1;

FIG. 3 is a perspective view of the container of FIG. 1 being grasped by a user;

FIG. 4 is a side elevational view of the container of FIG. 1 and a graph showing the relative position of a neutral axis of the container along its length;

FIG. 5 is an enlarged side elevational view of the intermediate portion of the container of FIG. 1;

FIG. 6 is an enlarged side elevational view of the intermediate portion of the container of FIG. 1 showing a partially fractured body;

FIG. 7 is an enlarged cross-sectional view of the side elevational view of an intermediate portion of the container of FIG. 1;

FIG. 8 is an enlarged cross-sectional view of the side elevational view of an intermediate portion of the container of FIG. 1 with a force being applied on the

container;

FIG. 9 is an enlarged cross-sectional view of the side elevational view of an intermediate portion of the container of FIG. 1 showing a fractured lower surface as a result of a force being applied on the container;

FIG. 10A is a side elevational view of the container of FIG. 1;

FIG. 10B is a cross-sectional view of an end elevational view of the container of FIG. 10A;

FIG. 11A is a side elevational view of the container of FIG. 1;

FIG. 11B is a cross-sectional view of an end elevational view of the container of FIG. 11A;

FIG. 12A is a side elevational view of the container of FIG. 1;

FIG. 12B is a cross-sectional view of an end elevational view of the container of FIG. 12A;

FIG. 13A is a side elevational view of the container of FIG. 1;

FIG. 13B is a cross-sectional view of an end elevational view of the container of FIG. 13A;

FIG. 14A is a side elevational view of the container of FIG. 1;

FIG. 14B is a cross-sectional view of an end elevational view of the container of FIG. 14A;

FIG. 15A is a side elevational view of the container of FIG. 1;

FIG. 15B is a cross-sectional view of an end elevational view of the container of FIG. 15A;

FIG. 16A is a plan view of the container of FIG. 1;

FIG. 16B is a side elevational, cross-sectional view of the container of FIG. 16A;

FIG. 17 is an end elevational, cross-sectional view of the container of FIG. 1 along the bend showing an angular tapered profile and the neutral axis;

FIG. 18 is an end elevational, cross-sectional view of the container of FIG. 1 along the bend showing an alternative rounded tapered profile and the neutral axis;

FIG. 19 is an end elevational, cross-sectional view

of the container of FIG. 1 along the bend showing an alternative rounded tapered profile with a nipple and the neutral axis;

FIG. 20 is a graph comparing the linear relationship of stress and the distance y from the neutral axis;

FIG. 21 is a graph comparing the relationship of stress and the distance y from the neutral axis with the container body including tension relieving ribs; and

FIG. 22 is an enlarged cross-sectional view of the side elevational view of an intermediate portion of the container of FIG. 1 showing a fractured body re-closed by the frictional engagement of a protrusion of a wall portion frictionally engaged with another wall portion.

Detailed Description

[0012] In FIG. 1, a container 2 is shown for sealing dispensable goods in a cavity. The container 2 includes a body 4 defining the cavity for receiving the dispensable goods. An upper edge 6 of the body 4 defines an opening of the cavity. A flange 8 of the container 2 extends from the upper edge 6 of the body 4. An upper surface 10 of the flange 8 has a generally flat surface for having a cover 12 affixed thereto. The body 4 and cover 12 provide a sealed environment for storage of the dispensable goods. In order to easily access the goods, the container 2 is fracturable across its width 14 along a specified break path 16. To ensure the integrity of the sealed environment within the container, the body 4 has a constant wall thickness 18, even along the break path 16.

[0013] As shown in FIGS. 1-3, the body 4 includes an elongate construction, although other configurations are contemplated. The body 4 includes opposite ends 20 and 22 with an intermediate portion 24 positioned between the opposite ends 20 and 22. As shown in FIGS. 1-9, the break path 16 is positioned within the intermediate portion 24 of the body 4. As shown in FIG. 3, the body 4 includes a handle portion 26 extending from the first end 20 to the break path 16, and a distal portion 28 extending from the second end 22 to the break path 16. The handle portion 26 is configured to be gripped by a user to allow for one-handed operation and use of the container 2. An engageable surface 30 of the distal portion 28 is configured to be engaged by a user, such as by a thumb of the user, to exert an opening force on the distal portion 28 of the body 4 so that the body 4 fractures along the break path 16. As shown in FIG. 3, the engageable surface 30 is offset from a lower surface 31 of the handle portion 26 and arcuate, such as to approximate a finger, to provide an ergonomic engagement.

[0014] As shown in FIGS. 10A-16B, the constant wall thickness 18 about the break path 16 reduces the tendency for the integrity of the container 2 to be unintentionally

tionally compromised during filling, handling and storage. In order to provide increased structural integrity, the container 2 is configured to maximize the stress at a base surface 32 along the break path 16 of the container 2 as force is being exerted on the engageable surface 30 of the distal portion 28 of the body 4.

[0015] In particular, as shown in FIGS. 1, 2, and 4-9, the body 4 includes a bend 34 extending across the width 14 of the body 4 and which defines the break path 16. In addition, as shown in FIGS. 1 and 2, the container 2 includes a tapered profile 36 within the intermediate portion 24 of the body 4 and an enlarged flange portion 38 of the flange 8 adjoining the break path 16.

[0016] The bend 34 of the body 4 is provided by the thermoforming process. A similar bend could be provided by bending a preformed body to provide a crease. Bending, however, may not be preferred because it may produce stress along the bend, which may reduce the overall strength of the body 4 and may lead to undesired fracturing. In contrast, the thermoformed bend 34 does not result in additional stress to the body 4.

[0017] The bend 34 of the body 4 provides additional stress on the base surface 32 of the bend 34 along the outer surface 33 of the body 4 as force is applied to the engageable surface 30 of the distal portion 28. As shown in FIGS. 7-9, the bend 34 straightens as force is applied to the engageable surface 30. In particular, FIG. 7 shows a cross section of the body 4 with no force being applied. As shown in FIG. 8, as force is being applied to the engageable surface 30, the base surface 32 of the bend 34 is put under tension creating stress on the body 4. As shown in FIG. 9, once the stress along the base surface 32 exceeds the tension required to straighten the bend 34, the bend 34 straightens and a fracture 40 forms along the base surface 32 of the bend 34. Once fractured, the bend 34 defines the break path 16 along which a cleavage tear is propagated. The force required to initiate the fracture is greater than that required to propagate the tear along the break path 16. As a result, the container 2 is able to withstand higher stress and maintain a sealed condition, but allows for easy opening once the container 2 has been fractured.

[0018] The bend 34 includes an angle α defined by wall portions 42 and 44 of the body 4 located on either side of the bend 34. The angle α is configured to promote fracturing along the bend 34. In particular, a larger angle α provides increased stress along the bend 34 as the bend 34 is straightened. To provide the desired increased stress, the angle α is at least about 70 degrees. In some cases, the angle α ranges from about 70 to about 90 degrees.

[0019] As indicated above, the body 4 includes other features to increase the amount of stress on the base surface 32 of the bend 34. The stress at the base surface 32 of the bend 34 can be characterized by the Bernoulli-Euler beam stress equation:

$$\sigma = \frac{My}{I_x}$$

σ - Average stress on the beam component.

M' The moment about a neutral axis 58 provided by the force applied at surface 30.

y' The perpendicular distance from the neutral axis 58 to the failure point, represented by the base surface 32 of the bend 34 in an unfractured container 2.

I_x' The second moment of area about the neutral axis 58.

[0020] The body 4 includes features to both increase the distance y between the neutral axis 58 and the base surface 32 of the bend 34 and decrease the second moment of area (I_x), specifically at the desired rupture or break path 16. The tapered profile 36 of the body 4 about the break path 16 reduces the amount of material located away from the neutral axis 58. Further, the height of the body 4 is reduced at the break path 16 to specifically reduce the second moment of area (I_x).

[0021] As shown in FIGS. 4-6, the container 2 includes a neutral axis 58 along which point there is no longitudinal stress. More particularly, upon the application of force on the engageable surface 30, compressive stress acts on a portion 60 of the container 2 extending from the neutral axis 58 to the flange 8. Further, tensile stress acts on a portion 62 of the container 2 extending from the neutral axis 58 to the base surface 32. The location of the neutral axis 58 is determined based upon the shape of the container 2 and the distribution of mass. As shown in FIG. 4, the location of the neutral axis 58 varies along the length of the container 2 as the shape or geometry of the body 4 changes. As described above, the Bernoulli-Euler equation represents that the stress at any given point of the container 2, as force is being applied to the engageable surface 30, is proportional to the distance y of that point from the neutral axis 58.

[0022] To guide the fracturing of the body 4 along the break path 16, the flange 8 of container 2 includes enlarged flange portions 38 along the intermediate portion 24 adjoining the break path 16. The enlarged flange portions 38 increase the mass of the flange 8 adjoining the break path 16 relative to the body 4. The increase of mass along the flange 8 shifts the neutral axis 58 within the intermediate portion 24 of the container 2 toward the flange 8 and away from the base surface 32 of the bend 34, as shown in FIG. 4. As a result, the base surface 32 is further away from the neutral axis 58, thereby proportionally increasing the stress at the base surface 32 along the break path 16 and reducing the amount of force necessary to overcome the tensile strength of the body 4.

[0023] As the base surface 32 fractures and the body

4 breaks, the neutral axis 58 shifts toward the flange 8 until the break reaches the flange 8. In particular, the neutral axis 58 shifts toward the enlarged flange portions 38 due to the increased mass associated with the enlarged flange portions 38. The movement of the neutral axis 58 guides the tearing along the break path 16.

[0024] As shown in FIGS. 1, 2, 10B, 11B, 12B and 13B, the upper edge 6 of the body 4 includes inwardly extending portions 63 at the ends of the break path 16. The inwardly extending portions 63 correspond to the enlarged portions 38 of the flange 8, thereby providing a reduced width of the body 4 extending between the enlarged flange portions 38.

[0025] Alternatively, other configurations providing the enlarged flange portion 38 are contemplated, including altering the thickness of the flange 8 adjacent the break path 16 or extending the flange 8 further outward. Further, it is contemplated that the flange 8 could extend inwardly or a combination of inwardly or outwardly from the upper edge 6 of the body 4.

[0026] To further concentrate the stress along the break path 16, the body 4 includes the tapered profile 36, as shown in FIGS. 1, 2 and 17-19. The tapered profile 36 provides a reduced width 46 of the base surface 32, which concentrates the stress produced by the application of force on the engageable surface 30 in a smaller area. As a result, the amount of force necessary to generate sufficient stress to straighten the bend 34 of the body 4 is reduced as compared to a container having a wider body.

[0027] The tapered profile 36 includes a peak 48 of the base surface 32 along the break path 16. The peak 48 can include an angular configuration 49, as shown in FIG 17, to minimize the width 46 and thereby concentrate the stress on an even smaller area. Alternatively, as shown in FIGS. 18, the peak 48 can include a rounded configuration 50. The rounded configuration 50 also provides the reduced width 46 which is slightly larger than the width of the angular configuration 49. Although this requires more force to fracture the body 4, the resulting opening is larger and can accommodate a quicker and easier dispensation of the contents of the cavity.

[0028] In addition to reducing the width 46 of the base surface 32 of the body 4, the tapered profile 36 also affects the position of the neutral axis 58 due to the reduced material utilized to provide a tapered profile 36 as compared to a more squared-off profile. As a result, the neutral axis 58 shifts toward the flange 8 and away from the base surface 32, thereby further increasing the stress along the base surface 32 as force is applied to the engageable surface 30.

[0029] The peak 48 can further include a nipple 52 on the rounded configuration 50 of the body 4. As best shown in FIGS. 2 and 19, the nipple 52 extends from the rounded configuration 48 to provide an angular or almost angular base nipple surface 54. The base nipple surface 54 provides a nipple width 56 which would be less than the width 46 of the rounded configuration 48, but wider

than an angular configuration 49. While the addition of the nipple 52 may shift the neutral axis 58 away from the flange 8, the distance y between the base surface 32 and the neutral axis 58 increases by a larger amount. The nipple 52 thereby causes stress to concentrate along a smaller area, similar to what would be observed with an angular configuration 49, but provides an increased opening size associated with the rounded configuration 50.

[0030] As shown in FIGS. 1 and 2, the container 2 includes inward protruding ribs 64 on the handle portion 26 of the body 4. The ribs 64 include a pair of spaced edges 66 and 68 opening to a recessed portion 70 of the body 4 and a corresponding widened section 72 of the flange 8. The ribs 64 provide relief from tensile stress along the body 4 as force is applied to the engageable surface 30. In particular, increased stress on the body 4 urges the spaced edges 66 and 68 away from one another, thereby flattening out the recessed portion 70 of the rib 64.

[0031] In the absence of the ribs 64, the stress at individual locations along the body 4 is generally directly proportional to the distance y from the neutral axis 58, as shown in FIG. 20. The average stress on the body 4 is the average of the stresses at the individual locations across the width of the body 4. However, the inclusion of ribs 64 acts to reduce the stress along the body 4 adjacent to the flange 8. As a result of the reduced stress along portions of the body 4, stress along other portions of the body 4 increases so that the average stress along the body 4 does not change. As shown in FIG. 21, the inclusion of ribs 64 causes stress to increase with distance y along a curve which more closely resembles an exponential curve than the linear relationship shown in FIG. 20. As a result, the stress on the body 4 adjacent the flange 8 is reduced, while the stress at the base surface 32 is increased significantly.

[0032] As shown in FIG. 10B, the recessed portions 70 of the ribs 64 are configured so that the widened sections 72 of the flange 8 adjoining the ribs 64 are not wider than the enlarged portion 38 of the flange 8 adjoining the break path 16. If the widened sections 72 were wider, the neutral axis 58 would be affected and the fracture would follow a ragged path toward the ribs 64 rather than a smooth, predefined path along the break path 16.

[0033] The ribs 64 further provide structural strength to the container 2 to resist collapse of the container 2.

[0034] The body 4 and flange 8 are preferably formed as a single member, as shown in FIGS. 1-4. The body 4 and flange 8 can be formed by known processes, in particular thermoforming. The body 4 and flange 8 are preferably constructed of a material which is strong enough to be handled, filled and transported. Further, the material must be brittle enough to allow for the body 4 to be fractured along the bend 34. Preferably, the material has low tear propagation strength so that after the initial fracture of the bend 34, the cleavage can continue without excessive force. In particular, exemplary materials include

natural or low-impact polystyrene, medium impact polystyrene, and biaxially oriented polystyrene.

[0035] The body 4 has a wall thickness 18 selected to provide a robust container which can withstand the rigors of filling, distribution and handling. The constant wall thickness along the entire body 4 provides a constant level of protection along the container 2.

[0036] To accommodate specific materials being stored in the container 2, or to provide an additional level of protection, a functional inner coating or layer can be applied to an inner surface 74 of the body 4. The inner coating provides additional safeguards, such as acting as a sealant or an oxygen barrier. The addition of coatings to the inner surface 74 of the body 4 does not affect the fracturing processes as the fracturing occurs and is initiated on the outer surface 33 of the body 4. As such, the coating is applied in an amount to provide functional properties, not to provide structural support.

[0037] The cover 12 is made of a pliable material. The cover 12 may be affixed to the body 4 after the cavity is filled by a permanent adhesive seal, heat welding, or ultrasonic bonding. The outer cover material is selected to be able to act as a hinge between the handle portion 26 and the distal portion 28 once the bend 34 has been fractured. As such, the cover 12 is selected so as to not fracture or otherwise break as the body 4 is fractured. The cover 12 may be the same or different material than the body 4. For example, the cover 12 may be made from a single layer of polymer sheet, such as polypropylene, or from a laminate material containing, for example, a combination of polymer, paper or aluminum foil layers. The cover 12 can be printed to identify the product or the contents stored in the container 2.

[0038] The flange 8 can be configured to remain intact when the body is fractured and, with the cover 12, acts as a hinge between the handle portion 26 and the distal portion 28. In some cases, the body 4 is configured to be recloseable as disclosed in U.S. Patent Application No. 11/771,372 filed June 29, 2007, now US 8091242B.

[0039] For example, the wall portions 42 and 44 can be configured to provide a friction fit therebetween after the body 4 has been fractured. In particular, as shown in FIG. 22, the wall portion 44 can include a protrusion 76 extending along the outer surface 30 thereof. The protrusion 76 can be configured to be received within the cavity and engage an inner surface 74 of the wall portion 42, thereby resisting pivoting of the distal portion 28 about the hinge.

[0040] While the invention has been particularly described with specific reference to particular method and product embodiments, it will be appreciated that various alterations, modifications, and adaptations may be based on the present disclosure, and are intended to be within the scope of the invention as defined by the following claims.

Claims

1. A container (2) comprising:

5 a body (4) having opposite ends (20 and 22), a width (14) and an intermediate portion (24) positioned between said opposite ends (20 and 22), said body (4) having at least one cavity for storing dispensable contents;
 10 an upper edge (6) of the body (4) defining an opening for filling the cavity;
 a flange (8) extending along the upper edge (6) of the body (4);
 15 a cover (12) affixed to the flange (8) to seal the dispensable contents within the cavity;
 a bend (34) extending across the width (14) of the intermediate portion (24) of the body (4) along which bend the body (4) fractures (16) upon the application of force exceeding a predetermined level on either side of the bend (34);
 20 a tapered profile (36) of the intermediate portion (24) of the body (4) for providing a reduced width of the body (4) so that stress concentrates along the reduced width as the force is applied on either side of the bend (34),
 25 and enlarged portions (38) of the flange (8) at the bend (34) configured to increase the mass of the flange (8) adjoining the bend (34) relative to the body, and thereby to shift a neutral axis (58) of the container (2) toward the flange (8) to provide increased stress along the bend (34) as the force is applied on either side of the bend (34), **characterised in that**
 30 the intermediate portion (24) of the body (4) being of constant wall thickness (18) throughout.

2. The container (2) of claim 1 wherein the bend (34) generally defines an angle of about 70 degrees.

40 3. The container (2) of claim 1 wherein the bend (34) generally defines an angle ranging from about 70 degrees to about 90 degrees.

45 4. The container (2) of any one of claims 1-3 wherein the body (4) includes inward protruding ribs (64) spaced from the bend (34) to relieve tensile stress on the body (4) as force is applied on opposite sides of the bend (34).

50 5. The container (2) of any one of claims 1-4 wherein the flange (8) extends outwardly from the upper edge (6) of the body (4).

55 6. The container (2) of any one of claims 1-5 wherein the flange (8) has a generally constant wall thickness throughout (18).

7. The container (2) of any one of claims claim 1-6

wherein the upper edge (6) of the body (4) includes a pair of inwardly extending portions (63) corresponding to the enlarged portion of the flange (38).

8. The container (2) of any one of claims 1-7 wherein the tapered profile (36) includes an angular configuration (49) to reduce the width (46) at the intermediate portion (24). 5
9. The container (2) of any one of claims 1-10 wherein the tapered profile (36) includes a rounded configuration (50) to reduce the width (46) at the intermediate portion (24). 10
10. The container (2) of claim 1 wherein the bend has a rounded configuration and tapered profile (36) includes a nipple (52) having a width (56) less than a reduced width of the rounded configuration (50) to concentrate stress along the nipple (52). 15
11. The container (2) of any one of claims 1-10 wherein the body (4) has a generally constant wall thickness throughout the body (4). 20
12. The container (2) of claim 10 further comprising inward protruding ribs (64), the ribs (64) being spaced from the bend (34) to relieve tensile stress on the body (4) as force is applied on opposite sides of the bend (34). 25
13. The container (2) of claim 12 wherein the flange (8) includes a widened section (72) adjoining the ribs (64). 30
14. The container (2) of claim 13 wherein the widened section (72) of the flange (8) adjoining the ribs (64) is not wider than the enlarged portion (38) of the flange (8). 35
15. The container (2) of any one of claims 5-14 wherein the ribs (64) include a pair of spaced edges (66) and (68) opening to a recessed portion (70) of the body (4). 40

Patentansprüche

1. Behälter (2), der Folgendes umfasst:

einen Körper (4), der gegenüberliegende Enden (20 und 22), eine Breite (14) und einen Zwischenabschnitt (24), der zwischen den beiden gegenüberliegenden Enden (20 und 22) positioniert ist, aufweist, wobei der Körper (4) mindestens einen Hohlraum zur Lagerung von Ausgabehalten aufweist;
einen oberen Rand (6) des Körpers (4), der eine Öffnung zum Füllen des Hohlraums definiert;

einen Flansch (8), der sich entlang dem oberen Rand (6) des Körpers (4) erstreckt;
eine an dem Flansch (8) befestigte Abdeckung (12) zum Versiegeln der Ausgabehalten in dem Hohlraum;

einen Knick (34), der sich über die Breite (14) des Zwischenabschnitts (24) des Körpers (4) erstreckt, entlang dem der Körper (4) bei Anwendung einer Kraft, die eine vorbestimmte Höhe übersteigt, beidseitig des Knicks (34) bricht (16);

ein sich verjüngendes Profil (36) des Zwischenabschnitts (24) des Körpers (4) zur Bereitstellung einer reduzierten Breite des Körpers (4), so dass sich die Spannung bei Anwendung der Kraft beidseitig des Knicks (34) entlang der reduzierten Breite konzentriert,

und vergrößerte Abschnitte (38) des Flanschs (8) an dem Knick (34), die dazu konfiguriert sind, die an den Knick (34) angrenzende Masse des Flanschs (8) bezüglich des Körpers zu erhöhen, und dadurch eine neutrale Achse (58) des Behälters (2) zu dem Flansch (8) hin zu verschieben, um bei Anwendung der Kraft beidseitig des Knicks (34) eine erhöhte Spannung entlang dem Knick (34) bereitzustellen, **dadurch gekennzeichnet, dass**

der Zwischenabschnitt (24) des Körpers (4) durchweg eine konstante Wanddicke (18) aufweist.

2. Behälter (2) nach Anspruch 1, wobei der Knick (34) allgemein einen Winkel von etwa 70 Grad definiert.

3. Behälter (2) nach Anspruch 1, wobei der Knick (34) allgemein einen Winkel im Bereich von etwa 70 Grad bis etwa 90 Grad definiert.

4. Behälter (2) nach einem der Ansprüche 1-3, wobei der Körper (4) nach innen vorstehende Rippen (64) umfasst, die von dem Knick (34) beabstandet sind, um die Zugspannung am Körper (4) bei Anwendung von Kraft auf gegenüberliegenden Seiten des Knicks (34) zu entlasten.

5. Behälter (2) nach einem der Ansprüche 1-4, wobei sich der Flansch (8) von dem oberen Rand (6) des Körpers (4) nach außen erstreckt.

6. Behälter (2) nach einem der Ansprüche 1-5, wobei der Flansch (8) durchweg eine allgemein konstante Wanddicke (18) aufweist.

7. Behälter (2) nach einem der Ansprüche 1-6, wobei der obere Rand (6) des Körpers (4) ein Paar sich nach innen erstreckender Abschnitte (63) umfasst, die dem vergrößerten Abschnitt des Flanschs (38) entsprechen.

8. Behälter (2) nach einem der Ansprüche 1-7, wobei das sich verjüngende Profil (36) eine Winkelkonfiguration (49) zum Reduzieren der Breite (46) an dem Zwischenabschnitt (24) umfasst.
9. Behälter (2) nach einem der Ansprüche 1-10, wobei das sich verjüngende Profil (36) eine abgerundete Konfiguration (50) zum Reduzieren der Breite (46) an dem Zwischenabschnitt (24) umfasst.
10. Behälter (2) nach Anspruch 1, wobei der Knick eine abgerundete Konfiguration aufweist und das sich verjüngende Profil (36) einen Nippel (52) umfasst, der eine Breite (56) aufweist, die weniger als eine reduzierte Breite der abgerundeten Konfiguration (50) beträgt, um die Spannung entlang dem Nippel (52) zu konzentrieren.
11. Behälter (2) nach einem der Ansprüche 1-10, wobei der Körper (4) über den Körper (4) hinweg eine allgemein konstante Wanddicke aufweist.
12. Behälter (2) nach Anspruch 10, der ferner nach innen vorstehende Rippen (64) umfasst, wobei die Rippen (64) von dem Knick (34) beabstandet sind, um die Zugspannung am Körper (4) bei Anwendung von Kraft auf gegenüberliegenden Seiten des Knicks (34) zu entlasten.
13. Behälter (2) nach Anspruch 12, wobei der Flansch (8) einen an die Rippen (64) angrenzenden verbreiterten Bereich (72) umfasst.
14. Behälter (2) nach Anspruch 13, wobei der an die Rippen (64) angrenzende verbreiterte Bereich (72) des Flanschs (8) nicht breiter als der vergrößerte Abschnitt (38) des Flanschs (8) ist.
15. Behälter (2) nach einem der Ansprüche 5-14, wobei die Rippen (64) ein Paar beabstandeter Ränder (66) und (68) umfassen, die zu einem vertieften Abschnitt (70) des Körpers (4) münden.

Revendications

1. Contenant (2) comprenant :

un corps (4) ayant des extrémités opposées (20 et 22), une largeur (14) et une portion intermédiaire (24) positionnée entre lesdites extrémités opposées (20 et 22), ledit corps (4) ayant au moins une cavité pour stocker des contenus pouvant être distribués ;
un bord supérieur (6) du corps (4) définissant une ouverture pour remplir la cavité ;
une bride (8) s'étendant le long du bord supérieur (6) du corps (4) ;

un recouvrement (12) fixé à la bride (8) pour sceller les contenus pouvant être distribués à l'intérieur de la cavité ;
une courbure (34) s'étendant en travers de la largeur (14) de la portion intermédiaire (24) du corps (4), le long de laquelle courbure le corps (4) se casse (16) lors de l'application d'une force dépassant un niveau prédéterminé de chaque côté de la courbure (34) ;
un profil effilé (36) de la portion intermédiaire (24) du corps (4) pour fournir une largeur réduite du corps (4) de telle sorte que les contraintes se concentrent le long de la largeur réduite à mesure que la force est appliquée de chaque côté de la courbure (34) ;
et des portions agrandies (38) de la bride (8) au niveau de la courbure (34), configurées pour augmenter la masse de la bride (8) adjacente à la courbure (34) par rapport au corps, et pour ainsi déplacer un axe neutre (58) du contenant (2) vers la bride (8) pour fournir une contrainte accrue le long de la courbure (34) à mesure que la force est appliquée de chaque côté de la courbure (34), **caractérisé en ce que**
la portion intermédiaire (24) du corps (4) a une épaisseur de paroi (18) constante sur toute son étendue.

2. Contenant (2) selon la revendication 1, dans lequel la courbure (34) définit généralement un angle d'environ 70 degrés.

3. Contenant (2) selon la revendication 1, dans lequel la courbure (34) définit généralement un angle compris entre environ 70 degrés et environ 90 degrés.

4. Contenant (2) selon l'une quelconque des revendications 1 à 3, dans lequel le corps (4) comporte des nervures (64) faisant saillie vers l'intérieur espacées de la courbure (34) pour détendre les contraintes de traction sur le corps (4) à mesure qu'une force est appliquée sur des côtés opposés de la courbure (34).

5. Contenant (2) selon l'une quelconque des revendications 1 à 4, dans lequel la bride (8) s'étend vers l'extérieur depuis le bord supérieur (6) du corps (4).

6. Contenant (2) selon l'une quelconque des revendications 1 à 5, dans lequel la bride (8) a une épaisseur de paroi (18) généralement constante sur toute son étendue.

7. Contenant (2) selon l'une quelconque des revendications 1 à 6, dans lequel le bord supérieur (6) du corps (4) comporte une paire de portions (63) s'étendant vers l'intérieur correspondant à la portion agrandie de la bride (38).


8. Contenant (2) selon l'une quelconque des revendications 1 à 7, dans lequel le profil effilé (36) comporte une configuration angulaire (49) pour réduire la largeur (46) au niveau de la portion intermédiaire (24). 5
9. Contenant (2) selon l'une quelconque des revendications 1 à 10, dans lequel le profil effilé (36) comporte une configuration arrondie (50) pour réduire la largeur (46) au niveau de la portion intermédiaire (24). 10
10. Contenant (2) selon la revendication 1, dans lequel la courbure présente une configuration arrondie et le profil effilé (36) comporte une saillie (52) ayant une largeur (56) inférieure à une largeur réduite de la configuration arrondie (50) pour concentrer les contraintes le long de la saillie (52). 15
11. Contenant (2) selon l'une quelconque des revendications 1 à 10, dans lequel le corps (4) présente une épaisseur de paroi généralement constante à travers tout le corps (4). 20
12. Contenant (2) selon la revendication 10, comprenant en outre des nervures saillant vers l'intérieur (64), les nervures (64) étant espacées de la courbure (34) pour détendre les contraintes de traction sur le corps (4) à mesure qu'une force est appliquée sur des côtés opposés de la courbure (34). 25
13. Contenant (2) selon la revendication 12, dans lequel la bride (8) comporte une section élargie (72) adjacente aux nervures (64). 30
14. Contenant (2) selon la revendication 13, dans lequel la section élargie (72) de la bride (8) adjacente aux nervures (64) n'est pas plus large que la portion agrandie (38) de la bride (8). 35
15. Contenant (2) selon l'une quelconque des revendications 5 à 14, dans lequel les nervures (64) comportent une paire de bords espacés (66) et (68) s'ouvrant vers une portion en retrait (70) du corps (4). 40


45

50

55

FIG. 1

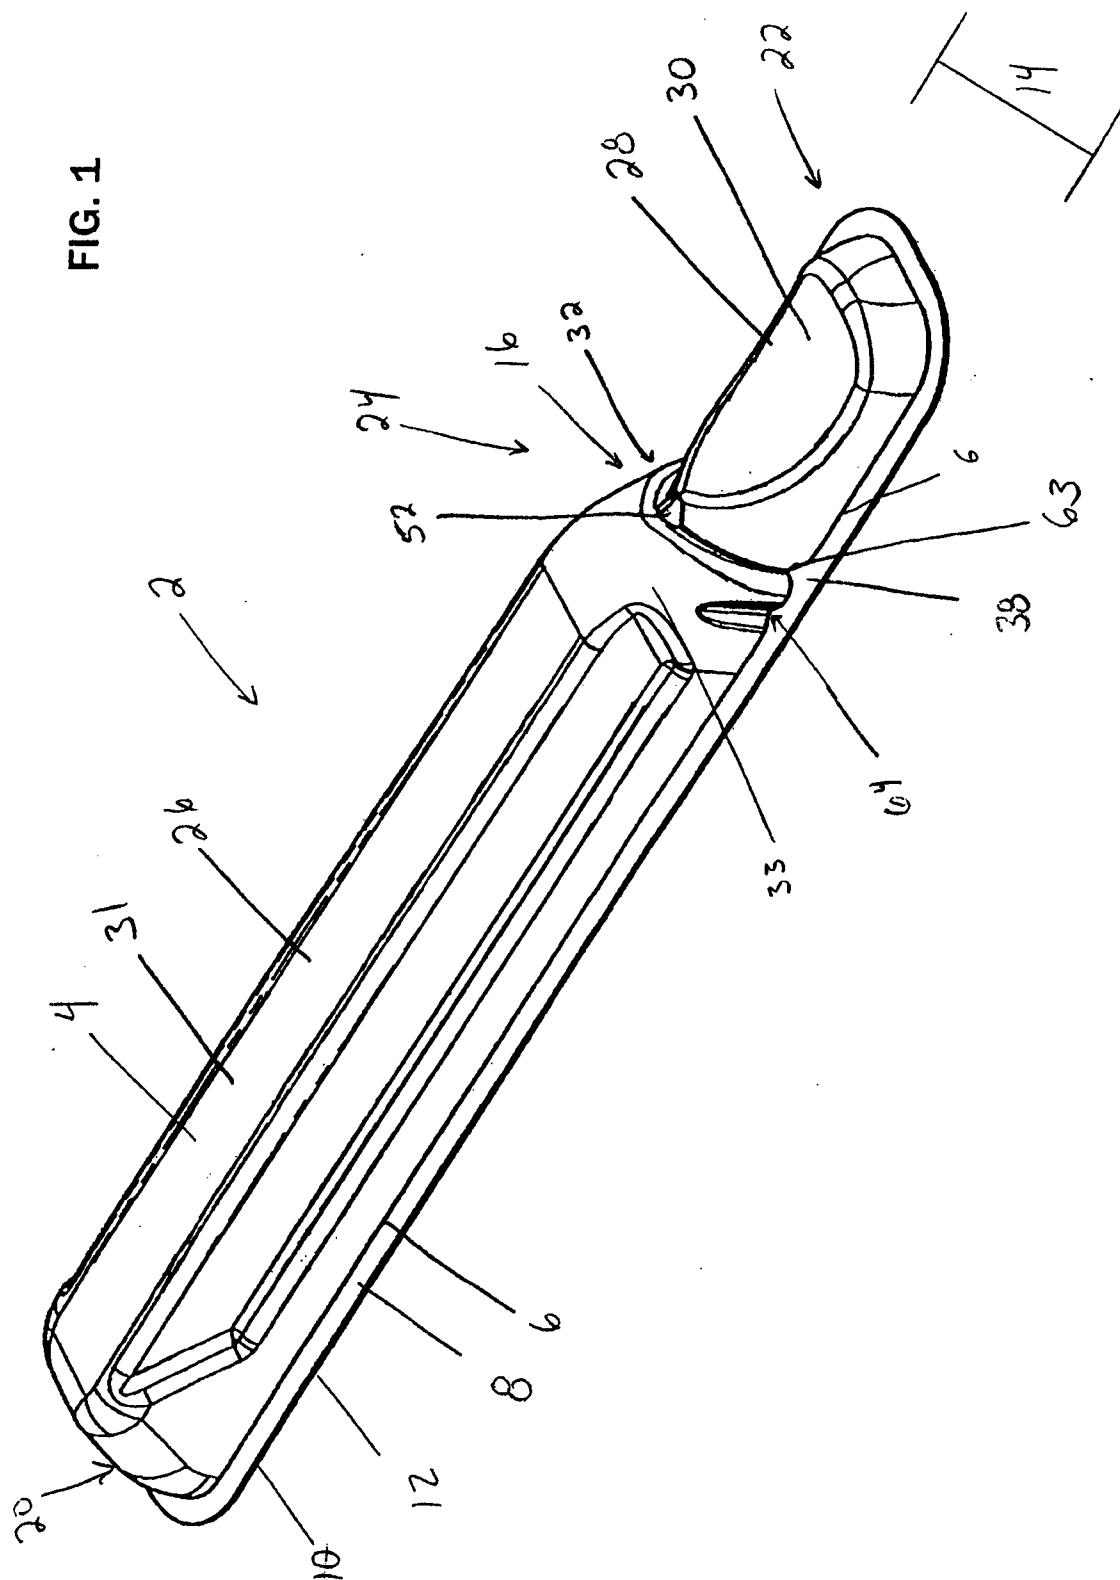

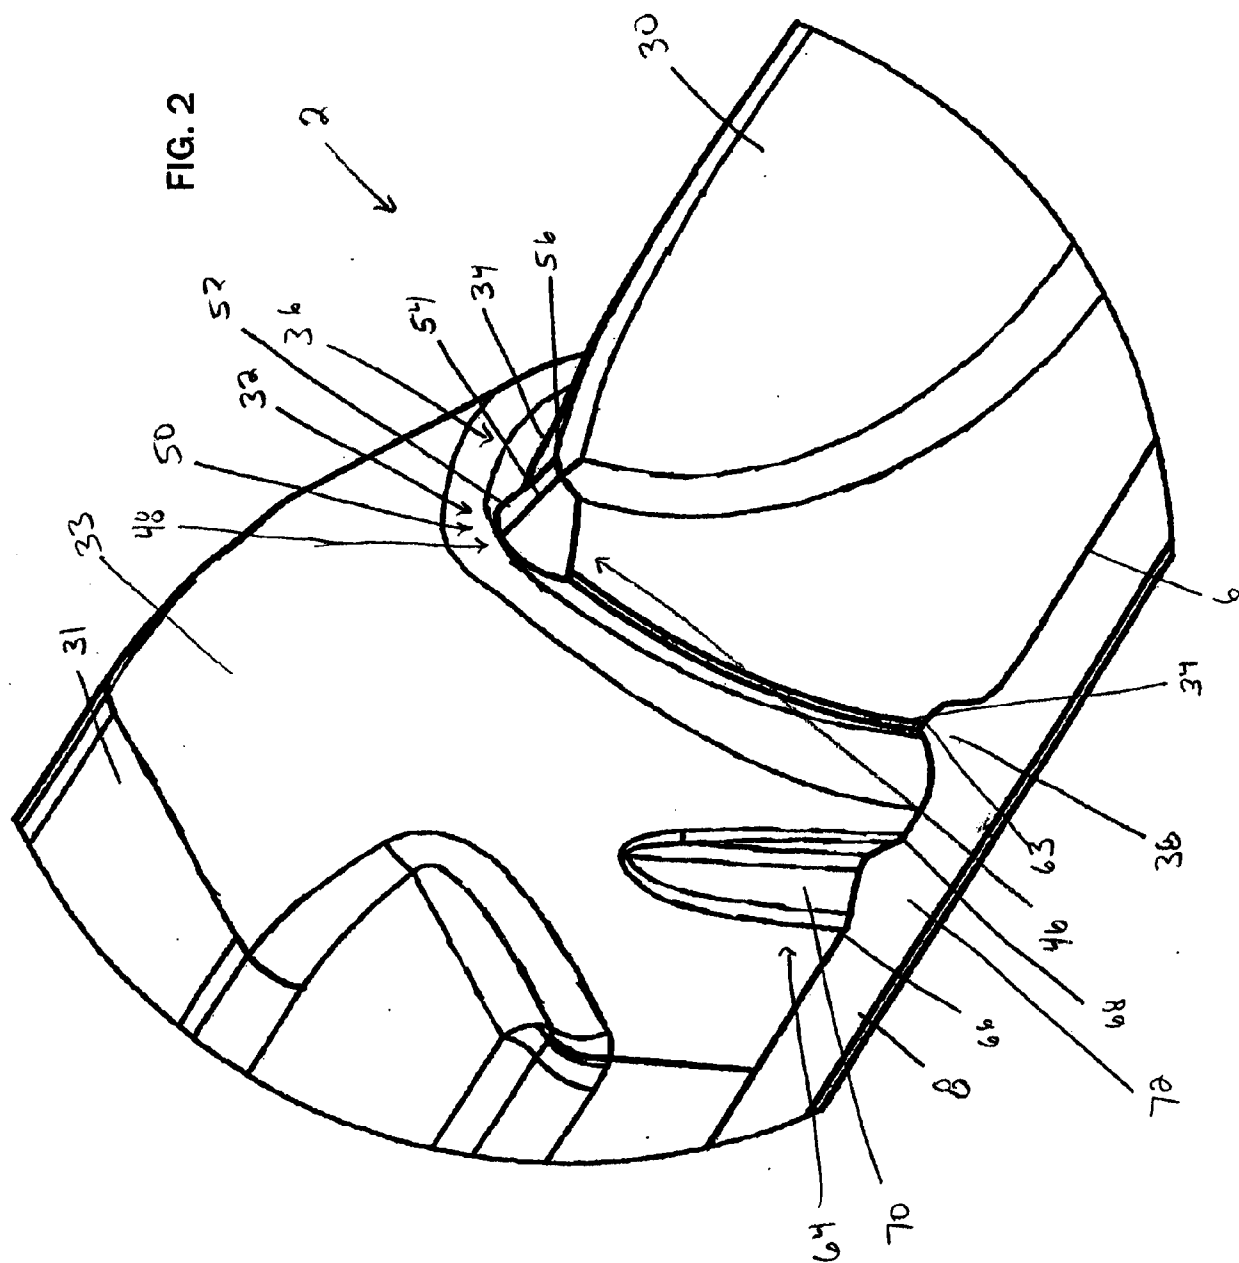

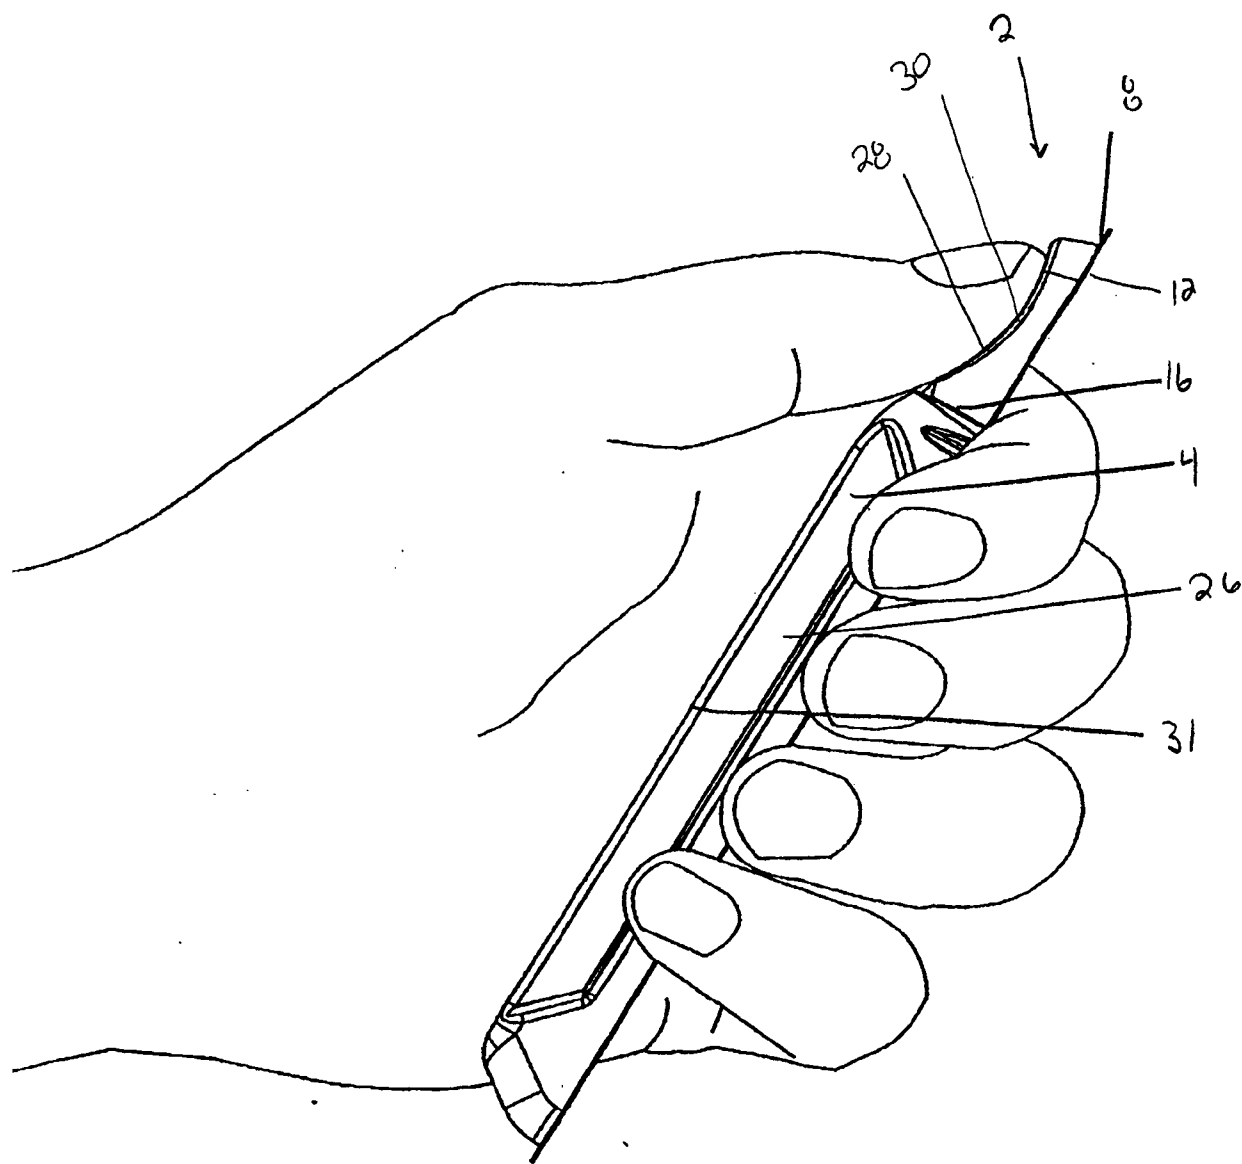


FIG. 3

FIG. 4

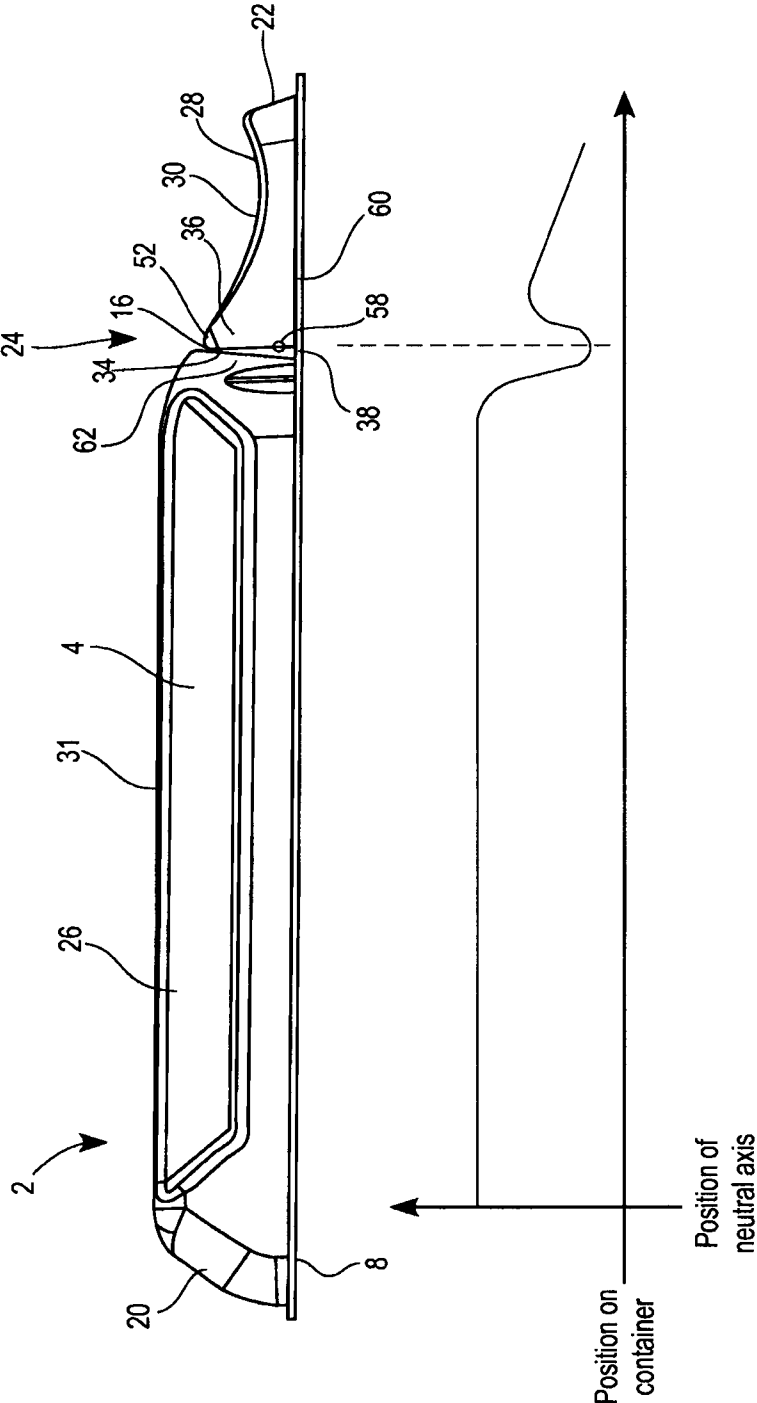


FIG. 5

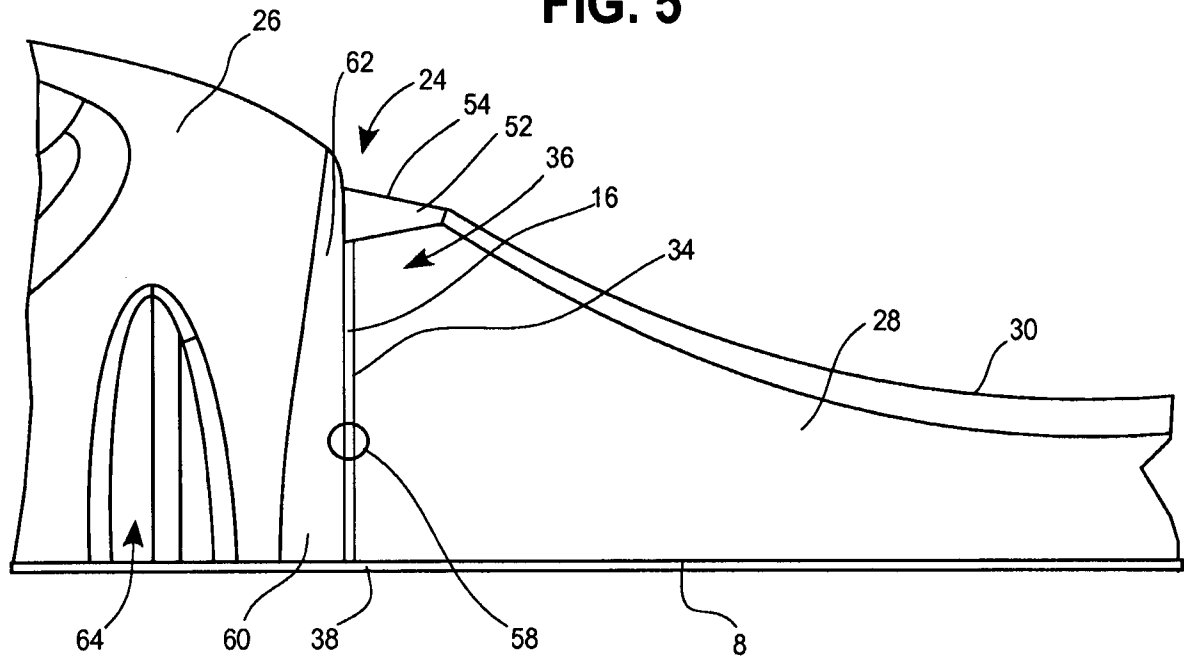
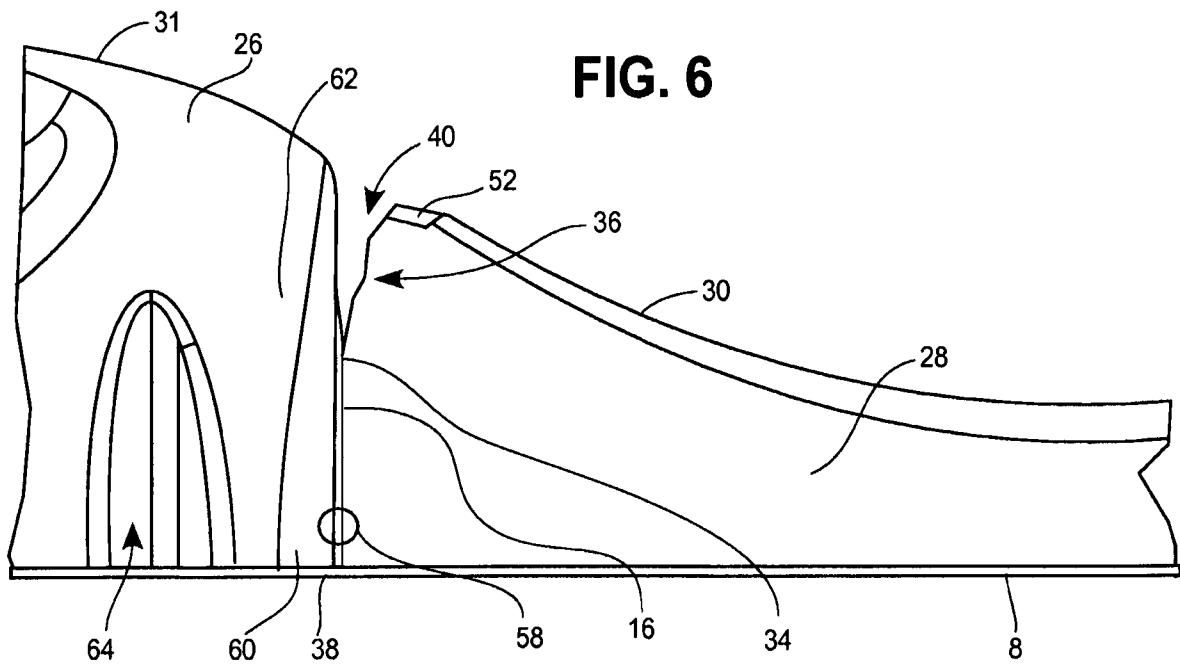
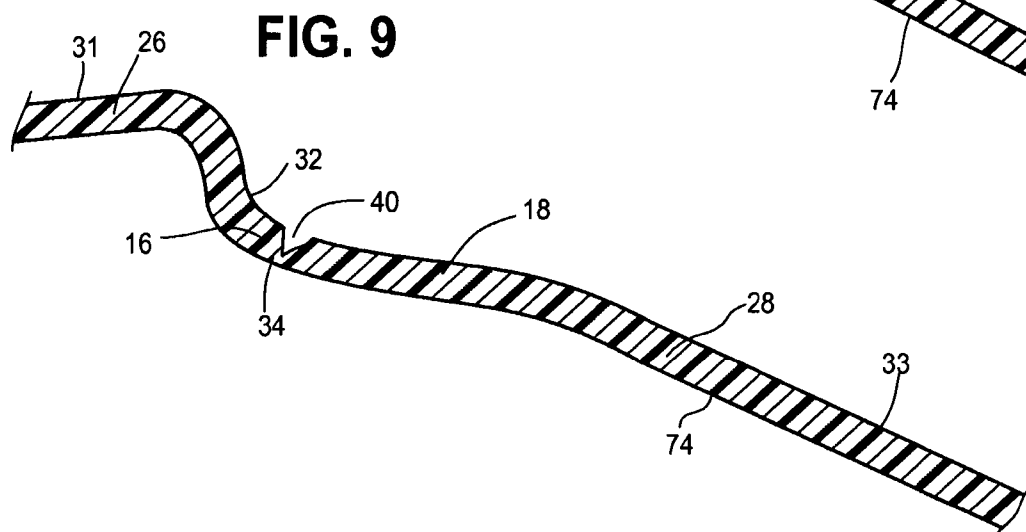
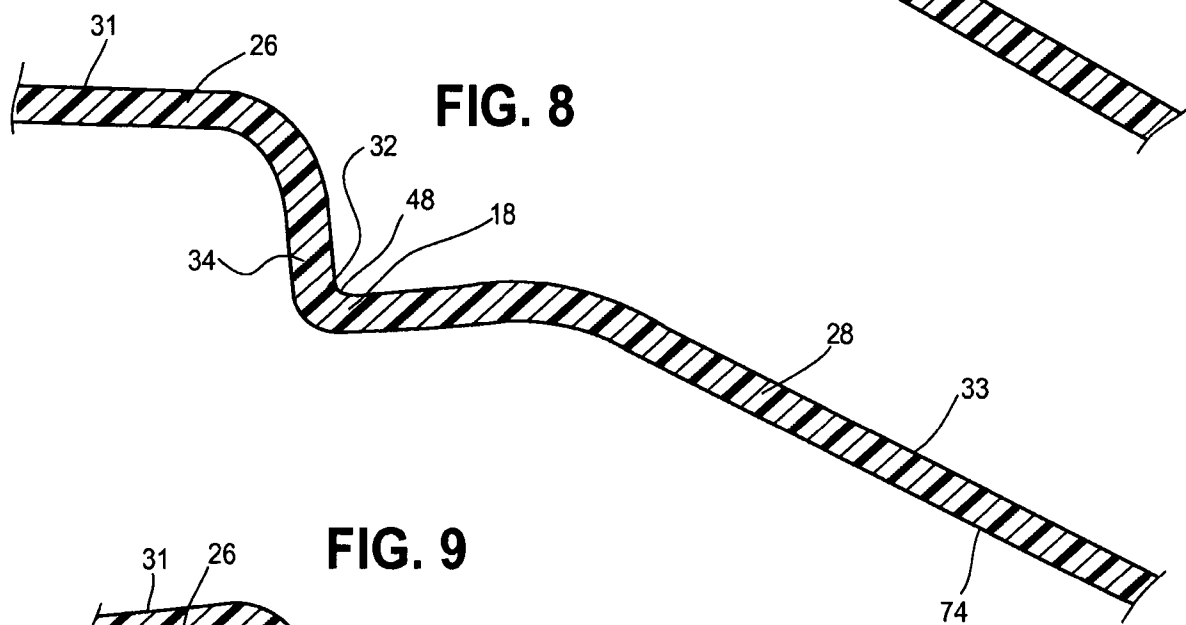
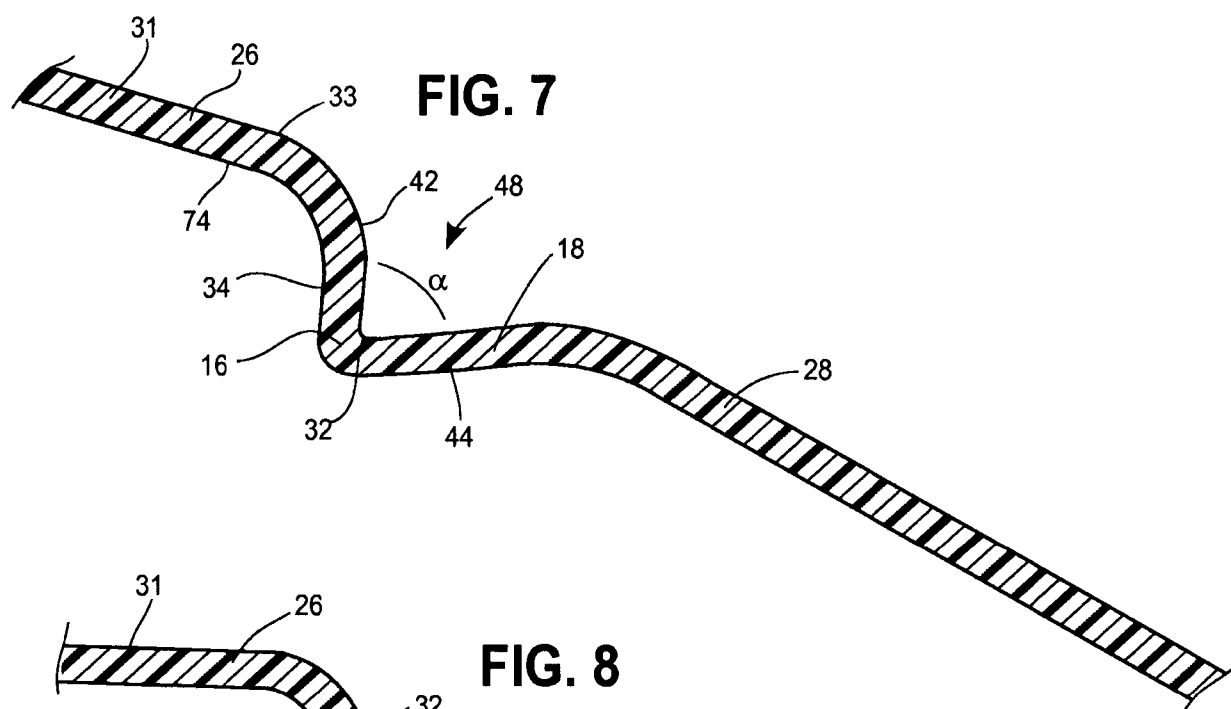
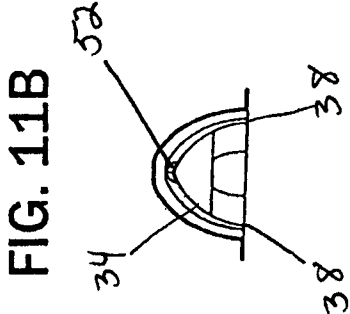
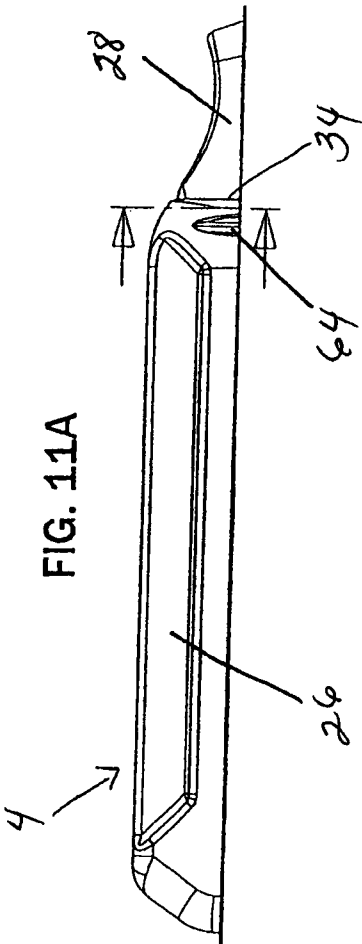
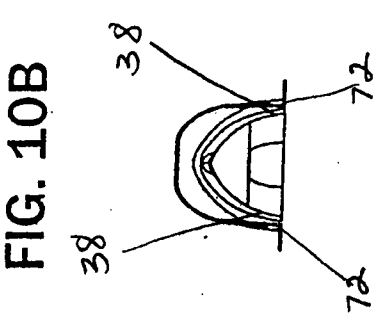
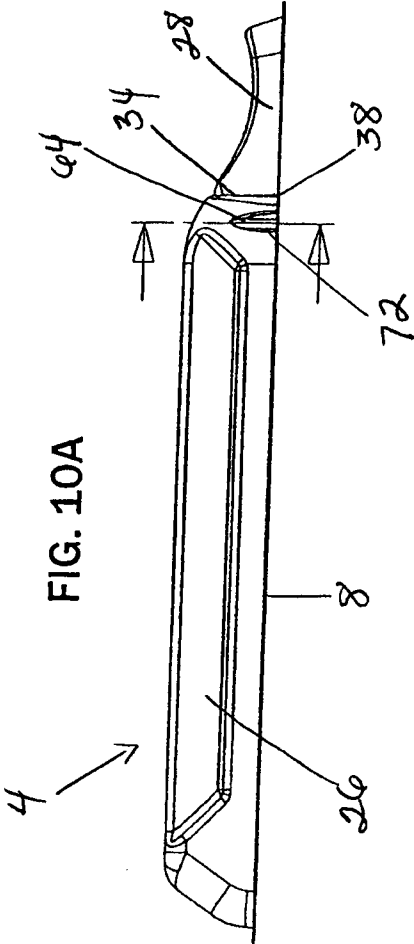
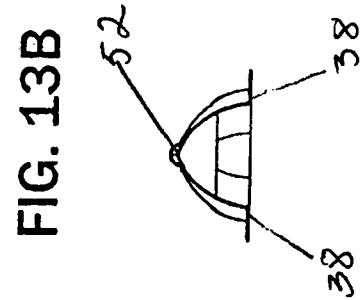
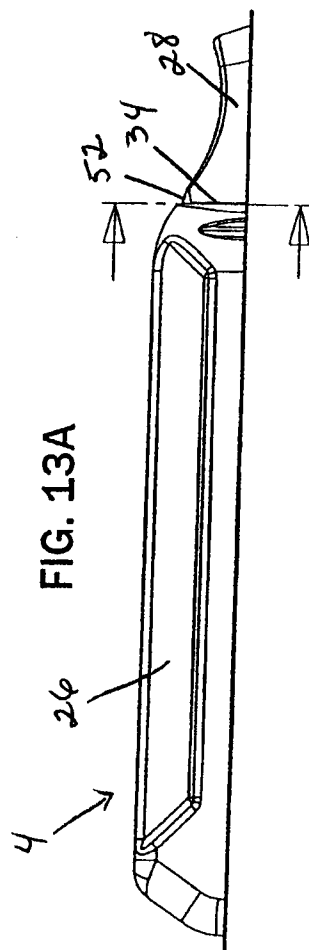
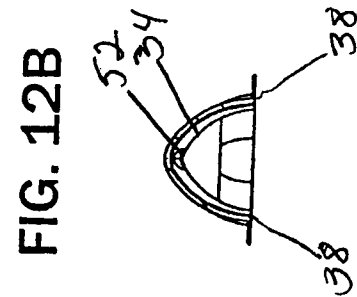
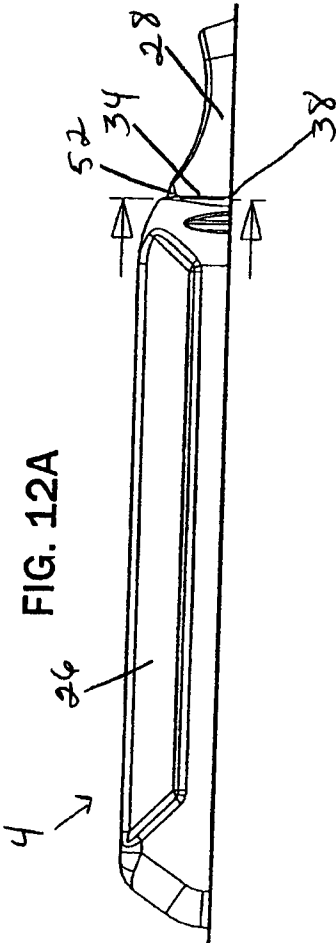






FIG. 6









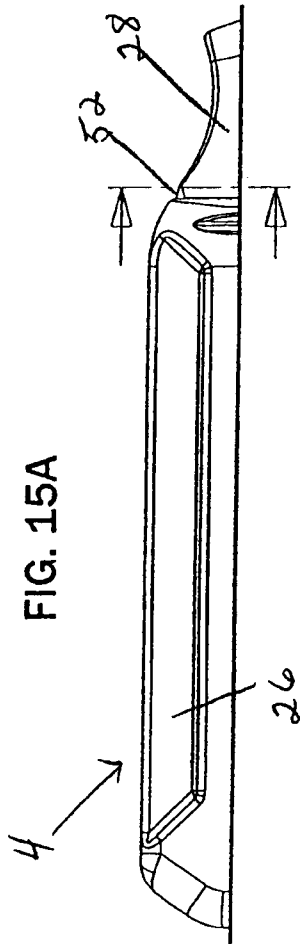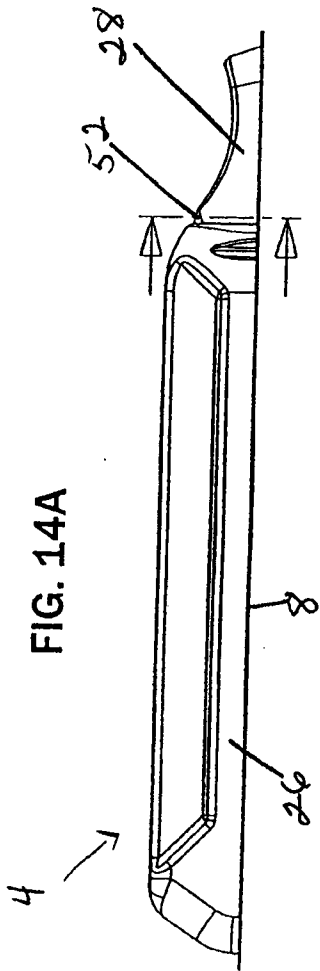

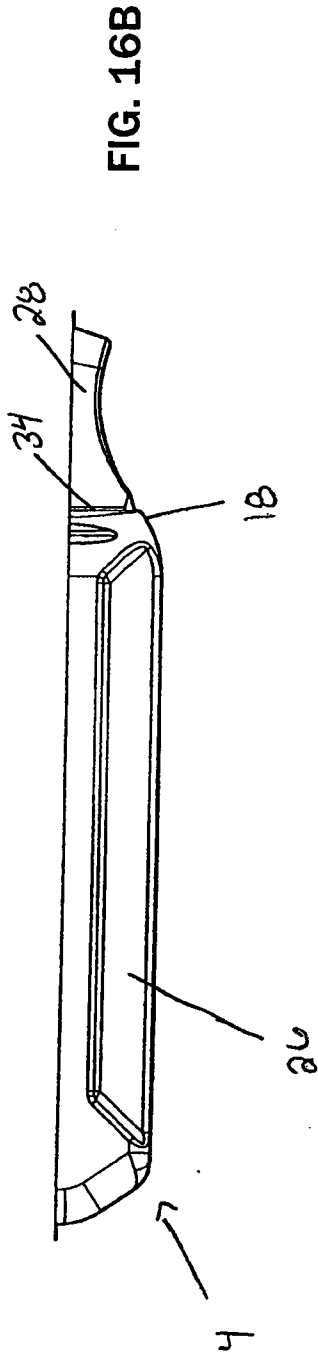
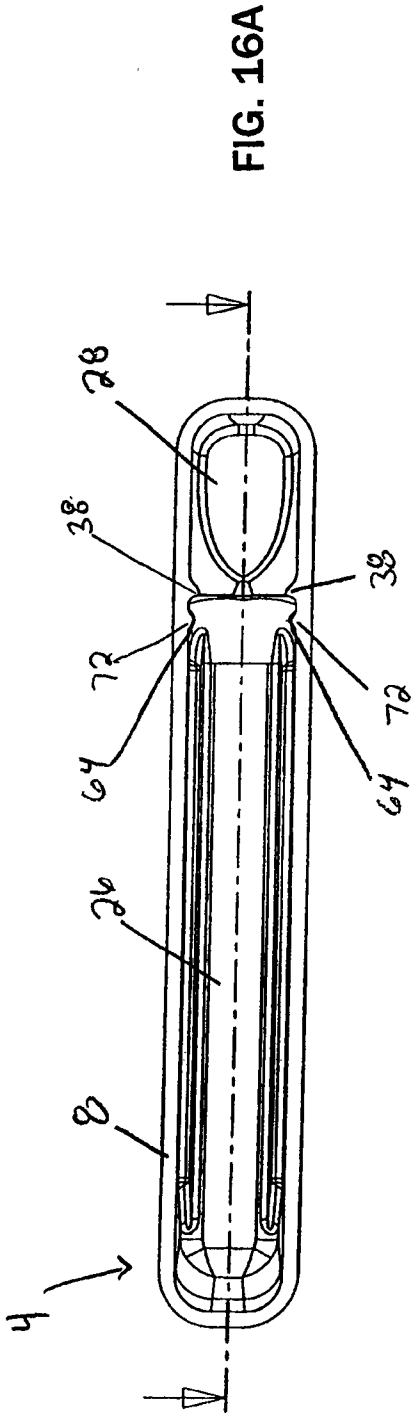


FIG. 17

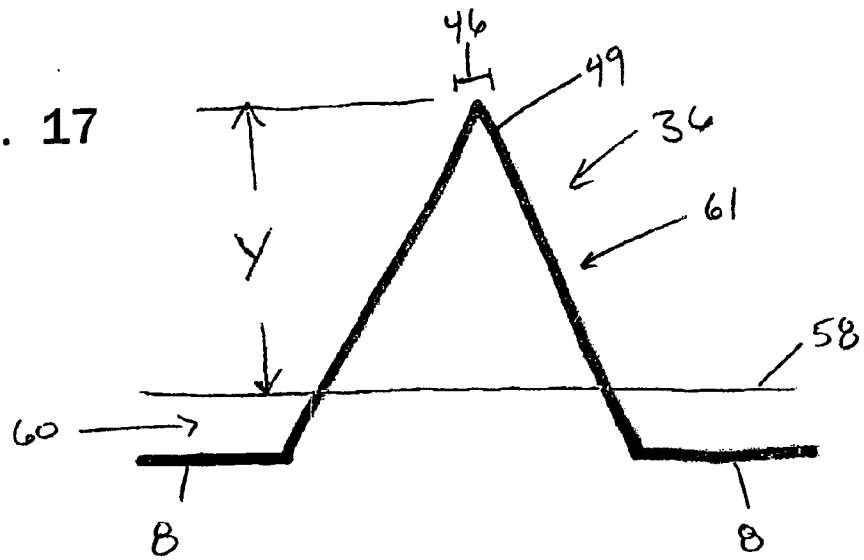


FIG. 18

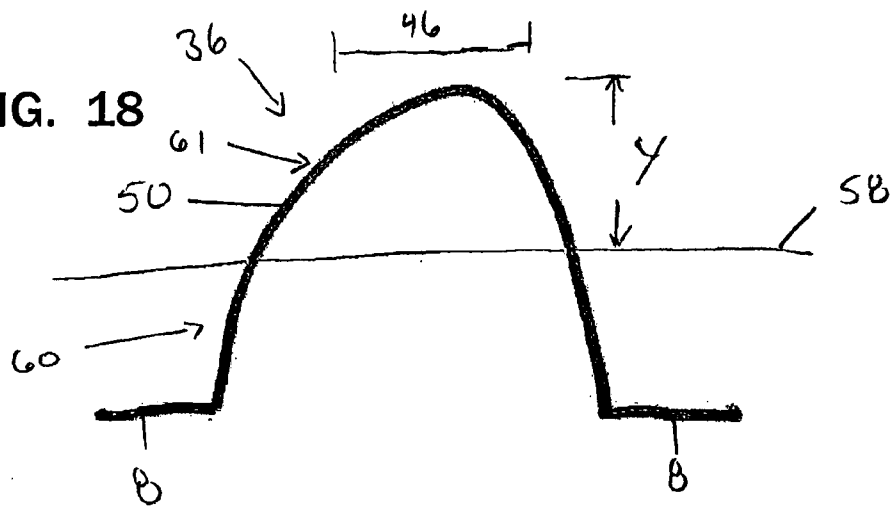


FIG. 19

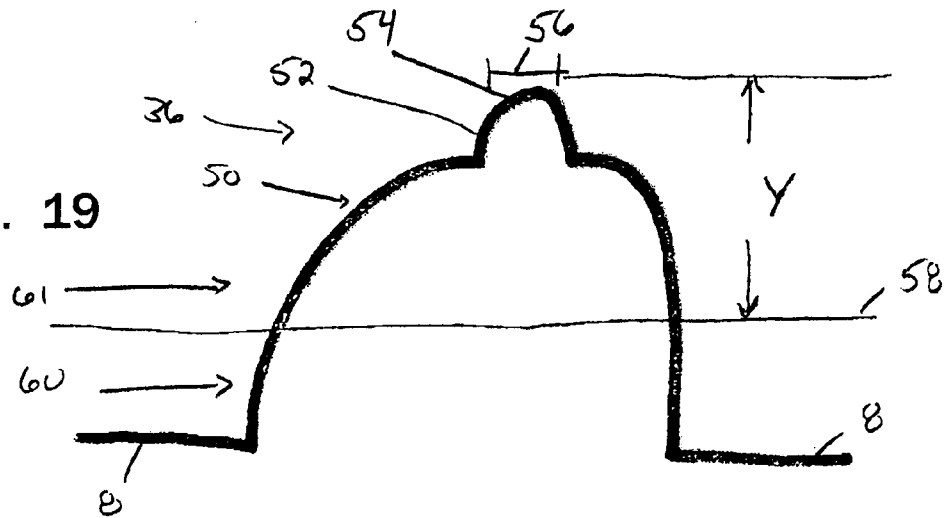
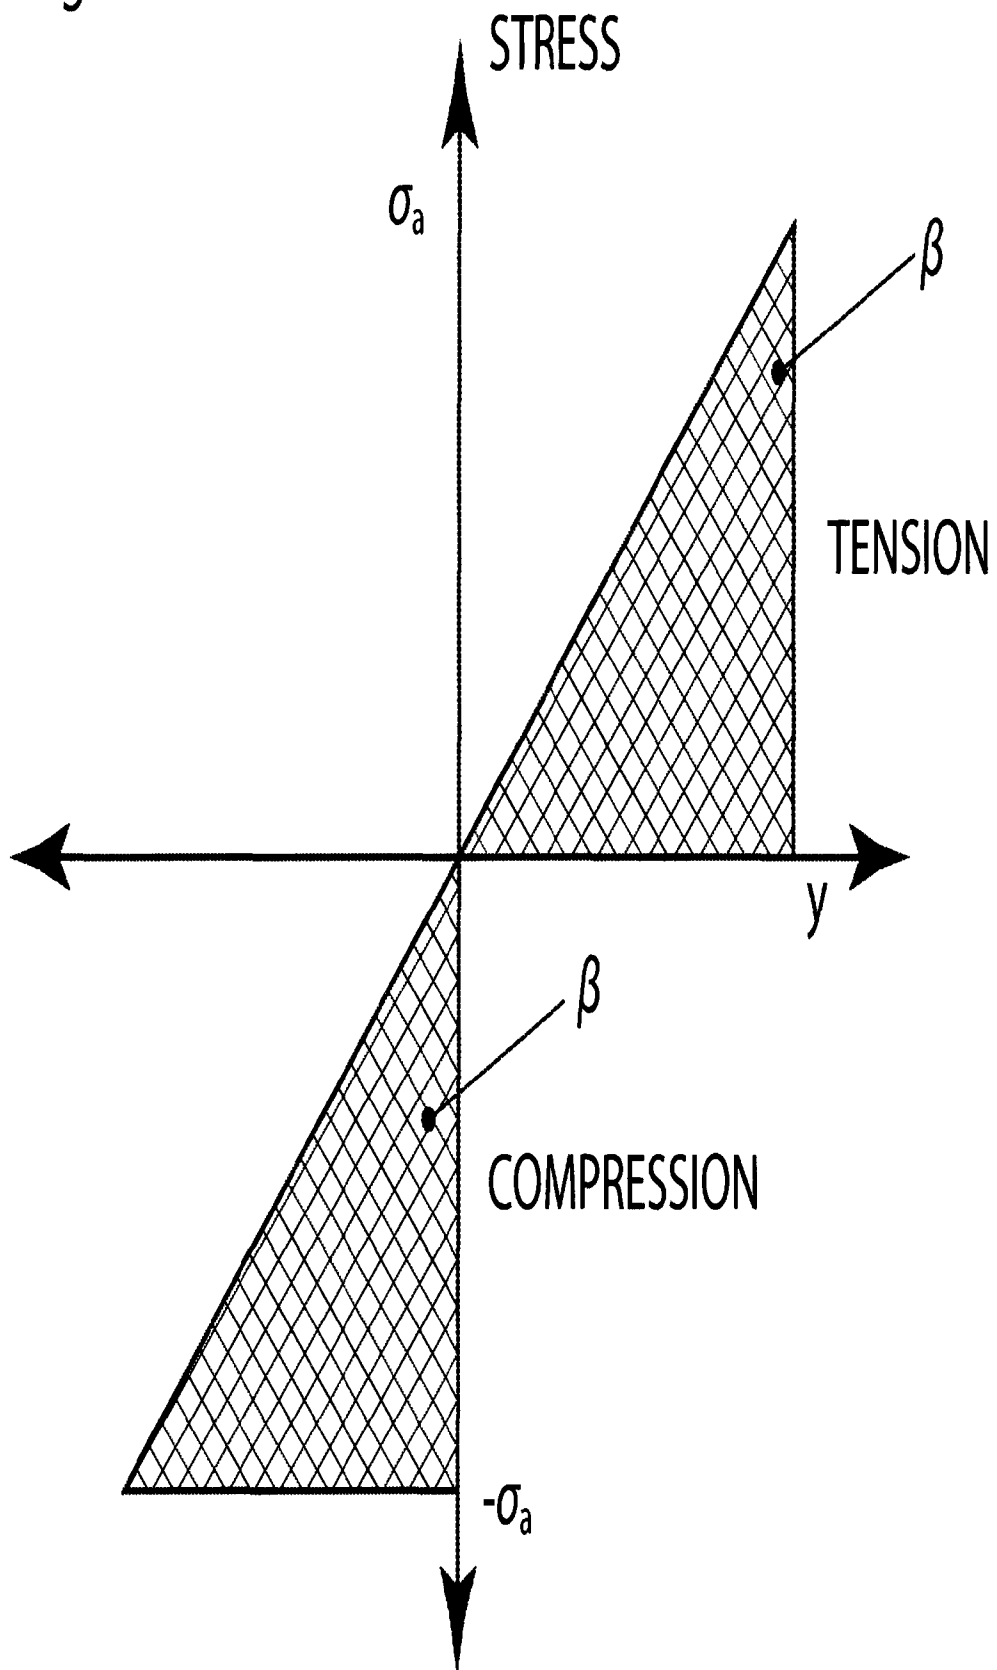


Fig. 20




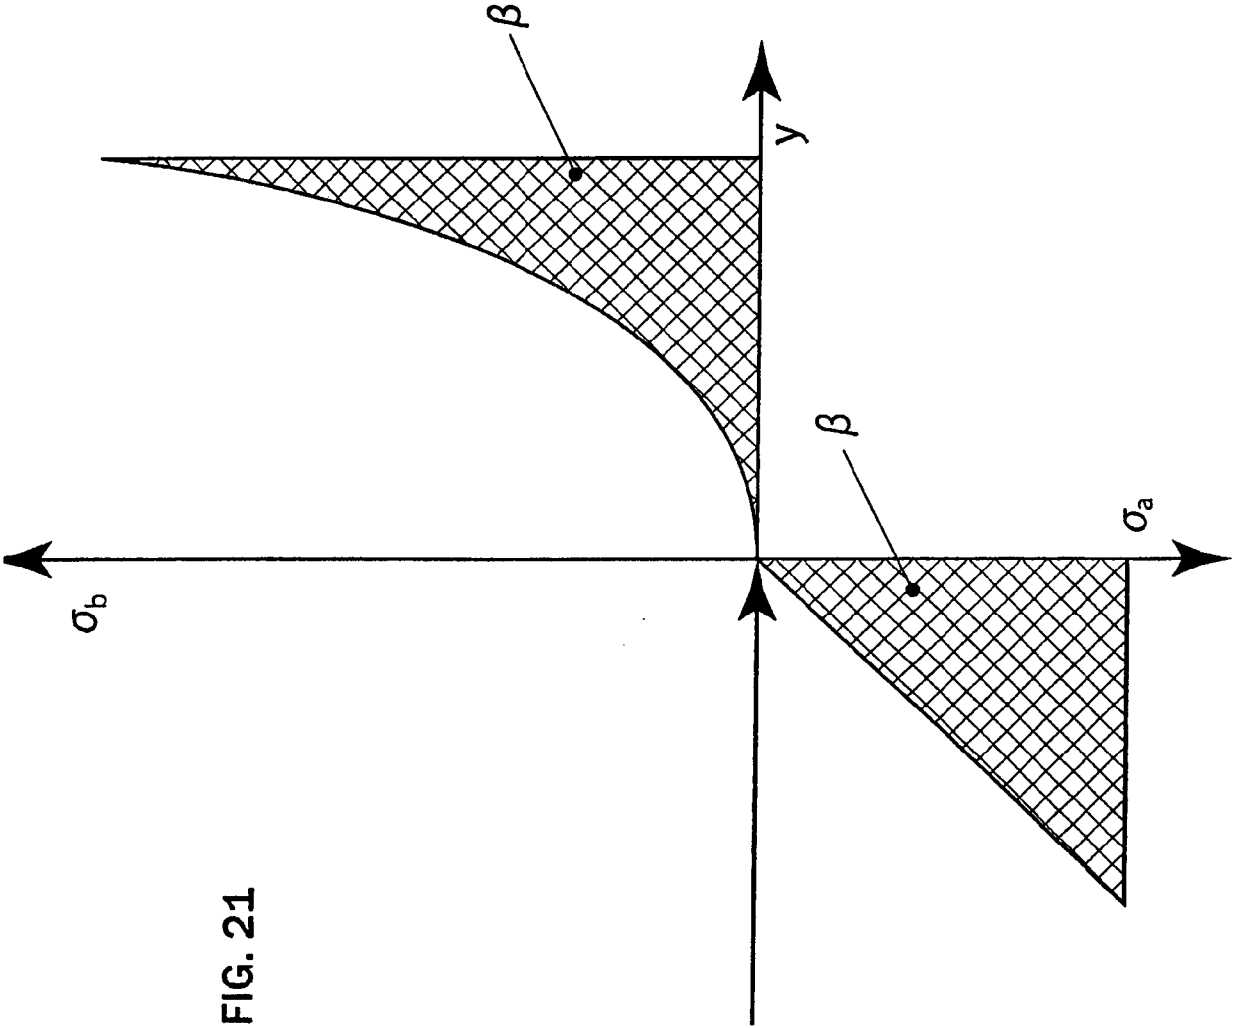


FIG. 21

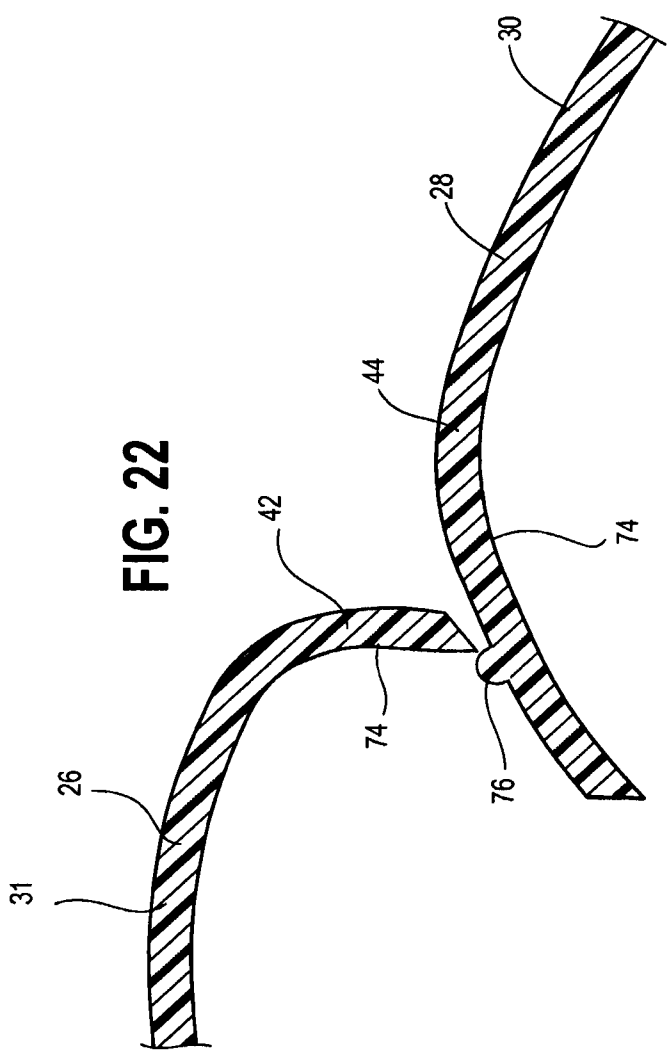

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3741384 A [0009]
- US 77137207 A [0038]
- US 8091242 B [0038]



SZABADALMI IGENYPONTOK

1. Tartály (2), amely tartalmaz:

testet (4), amelynek két, egymással átellenes vége (20 és 22), továbbá szélessége (14), valamint az egymással átellenes végek (20 és 22) között elhelyezkedő, középső része (24) van, és a testnek (4) legalább egy, kiadagolható tartalom tárolására szolgáló ürege van;

a testnek (4) az üreg megtöltésére szolgáló nyílást határoló felső pereme (6) van;

a test (4) felső pereme (6) mentén húzódó szegélye (8) van;

fedőeleme (12), amely a szegélyhez (8) van rögzítve annak érdekében, hogy elszigetelje az üregben elrendezett, adagolható tartalmat;

valamint a test (4) középső részének (24) szélessége (14) mentén húzódó hajlata (34) van, amely hajlat mentén a test (4) a hajlat (34) bármely oldalára gyakorolt, előre meghatározott mértékű erő hatására eltörik;

továbbá a test (4) középső részének (24) kúpos profilja (36) van annak érdekében, hogy a test (4) szélessége csökkenjen úgy, hogy a hajlat (34) bármely oldalára gyakorolt igénybevételt okozó erőhatás a csökkentett szélesség mentén támadjon,

továbbá a szegélynek (8) kiszélesedő részei (38) vannak a hajlatnál (34), amelyek növelik a testet a hajlathoz (34) csatlakoztató szegély (8) tömegét, és ennél fogva a tartály (2) semleges tengelyét (58) a szegély (8) irányába tolják, hogy fokozott igénybevétel lépjen fel a hajlat (34) mentén, amikor az erő a hajlatra (34) hat, **azzal jellemezve**, hogy

a test (4) középső része (24) mindenhol állandó falvastagságú (18).

2. Az 1. igénypont szerinti tartály (2), ahol a hajlat (34) lényegében kb. 70 fokos szögben fut.

3. Az 1. igénypont szerinti tartály (2), ahol a hajlított rész (34) kb. 70 fok és kb. 90 fok közötti szögtartományban van.

4. Az 1. – 3. igénypontok bármelyike szerinti tartály (2), ahol a testen (4) a hajlattól (34) bizonyos távolságban, befelé álló bordák (64) vannak, amelyek csökkentik a testre (4) ható igénybevételt, amikor az erő a hajlat (34) egymással átellenes oldalaira hat.

5. Az 1. – 4. igénypontok bármelyike szerinti tartály (2), ahol a szegély (8) a test (4) felső peremétől (6) kifelé húzódik.

6. Az 1. – 5. igénypontok bármelyike szerinti tartály (2), ahol a szegély (8) lényegében mindenhol (18) állandó falvastagságú.

7. Az 1. – 6. igénypontok bármelyike szerinti tartály (2), ahol a test (4) felső pereme (6), a perem kiszélesedő részénél (38) egy pár, befelé húzódó befűződéssel (63) van kialakítva.

8. Az 1. – 7. igénypontok bármelyike szerinti tartály (2), ahol a kúpos profil (36) szögben álló kialakítású (49) annak érdekében, hogy csökkentse a középső rész (24) szélességét (46).

9. Az 1. – 10. igénypontok bármelyike szerinti tartály (2), ahol a kúpos profil (36) tartalmaz egy legömbölyített elemet (50) annak érdekében, csökkentse a középső rész (24) szélességét (46).

10. Az 1. igénypont szerinti tartály (2), ahol a hajlított rész lekerekített kialakítású és a kúpos profil (36) ajakkal (52) van ellátva, amelynek szélessége (56) kisebb, mint a lekerekített elem (50) csökkentett szélessége annak érdekében, hogy az erőt az ajak (52) környezetére koncentrálja.

11. Az 1. – 10. igénypontok bármelyike szerinti tartály k (2), ahol a testnek (4) lényegében mindenhol állandó falvastagsága van.

12. A 10. igénypont szerinti tartály (2), amely tartalmaz továbbá befelé álló bordákat (64), ahol a bordák (64) a hajlattól (34) bizonyos távolságban vannak annak érdekében, hogy csökkentsék a testre (4) ható nyíróerőt, miközben az erő a hajlat (34) egymással átellenes oldalaira hat.

13. A 12. igénypont szerinti tartály (2), ahol a szegélynek (8) a bordákhoz (64) csatlakozó, kiszélesedő szakasza (72) van.

14. A 13. igénypont szerinti tartály (2), ahol a szegélynek (8) a bordákat (64) összekötő, kiszélesedő szakasza (72) nem szélesebb, mint a szegély (8) kiszélesedő része (38).

15. Az 5. – 14. igénypontok bármelyike szerinti tartály (2), ahol a bordák (64) egy pár, a test (4) súllyesztett részébe (70) nyíló, egymástól bizonyos távolságban elrendezett peremmel (66, 68) vannak ellátva.