



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**22.04.2009 Bulletin 2009/17**

(51) Int Cl.:  
**F23D 1/02 (2006.01)**

(21) Application number: **09151678.1**

(22) Date of filing: **16.08.2006**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR**

Designated Extension States:  
**AL BA HR MK RS**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:  
**06254290.7 / 1 892 470**

(71) Applicant: **The Babcock & Wilcox Company**  
**Barberton, Ohio 44203-0351 (US)**

(72) Inventors:  

- **LaRue, Albert D.**  
**Uniontown, Ohio 44685 (US)**

- **Kahle, William J.**  
**Canal Fulton, Ohio 44614 (US)**
- **Sayre, Alan N.**  
**North Canton, Ohio 44720 (US)**
- **Sarv, Hamid**  
**Canton, Ohio 44708 (US)**
- **Rowley, Daniel R.**  
**Alliance, Ohio 44608 (US)**

(74) Representative: **Meldrum, David James**  
**D Young & Co**  
**120 Holborn**  
**London EC1N 2DY (GB)**

Remarks:

This application was filed on 29-01-2009 as a divisional application to the application mentioned under INID code 62.

(54) **Burner with center air jet**

(57) A new burner apparatus and method of combusting fossil fuels for commercial and industrial application is provided wherein the new burner apparatus

achieves low NO<sub>x</sub> emissions by supplying oxygen to the center of the burner flame in as manner so as to create a fuel rich internal combustion zone within the burner flame.

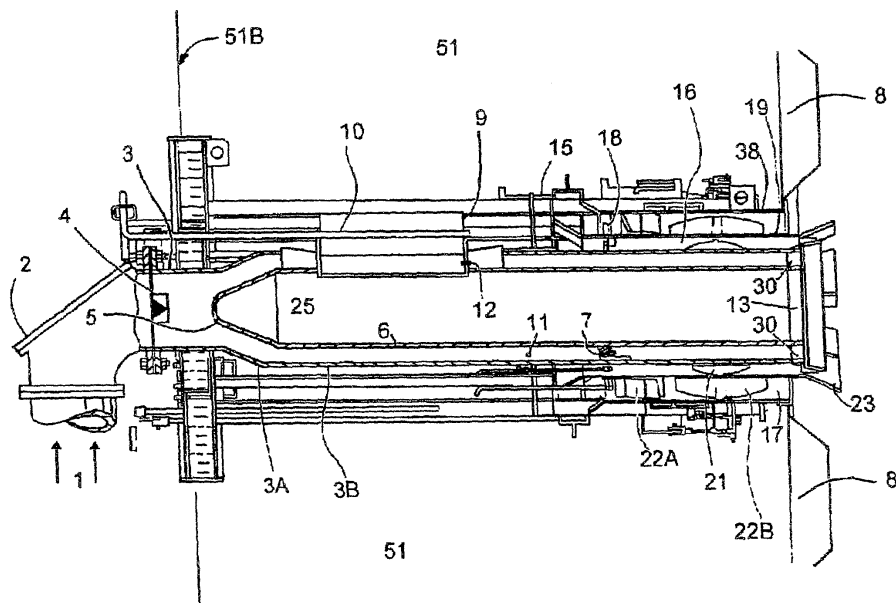


FIG. 1

## Description

### [0001] Field of Invention

[0002] The present invention relates generally to fuel burners and, in particular, to a new and useful pulverized coal burner and method of combustion which achieves low NO<sub>x</sub> emissions by supplying oxygen directly to the center of the burner flame in a manner so as to create a fuel rich internal combustion zone within the burner flame and accelerate fuel combustion.

### [0003] Background of the Invention

[0004] NO<sub>x</sub> is a byproduct produced during the combustion of coal and other fossil fuels. Environmental concerns regarding the effects of NO<sub>x</sub> have prompted enactment of NO<sub>x</sub> emissions regulations requiring sharp NO<sub>x</sub> emission reductions from industrial and utility power plants in several countries including the United States. Current commercial methods and apparatuses for reducing NO<sub>x</sub> emissions have been successful in lowering NO<sub>x</sub> emissions from the levels emitted in previous years; however, further advances, beyond those of currently known methods and apparatuses, are needed to maintain compliance with current NO<sub>x</sub> emissions regulations.

[0005] A variety of low NO<sub>x</sub> burners are commercially available and widely used to fire pulverized coal (PC) and other fossil fuels in a NO<sub>x</sub> reducing manner as compared to conventional burners. Examples of such burners are The Babcock & Wilcox Company's DRB-XCL<sup>®</sup> and DRB-4Z<sup>®</sup> burners. Common to these and other low NO<sub>x</sub> burner designs is an axial coal nozzle surrounded by multiple air zones which supply secondary air (SA). During operation, PC suspended in a primary air (PA) stream, is injected into the furnace through an axial coal nozzle, as an axial jet, with little or no radial deflection. Ignition of the PC is accomplished by swirling SA, thereby causing recirculation of hot gases along the incoming fuel jet.

[0006] Typically a fraction of the SA is supplied to an air zone in close proximity to the coal nozzle and swirled to a relatively greater extent than the SA supplied to the other air zones to accomplish ignition. The remaining SA from the burner is introduced through air zones further outboard in the burner utilizing less swirl, so as to mix slowly into the burner flame, thereby providing fuel rich conditions in the root of the flame. Such conditions promote the generation of hydrocarbons which compete for available oxygen and serve to destroy NO<sub>x</sub> and/or inhibit the oxidation of fuel-bound and molecular nitrogen to NO<sub>x</sub>.

[0007] NO<sub>x</sub> emissions can further be reduced by staged combustion, wherein the burner is provided with less than stoichiometric oxygen for complete combustion. A fuel rich environment results at the burner flame. The fuel rich environment inhibits NO<sub>x</sub> formation by forcing NO<sub>x</sub> precursors to compete with uncombusted fuel in an oxygen lean environment. Combustion is then staged by providing excess oxygen to the boiler at a point above the burner wherein the excess fuel combusts at a lower temperature, thus preceding the production of ther-

mal NO<sub>x</sub> as the combustion occurs at a lower temperature away from the burner flame. Staging also serves to lessen oxygen concentrations during the combustion process which inhibits oxidation of fuel bound nitrogen (fuel NO<sub>x</sub>).

[0008] Oxygen for staged combustion is normally provided in the form of air via air staging ports, commonly called Over Fire Air (OFA) ports, in a system utilizing low NO<sub>x</sub> burners. U.S. Patent No. 5,697,306 to LaRue, and U.S. Patent No. 5,199,355 to LaRue, herein incorporated by reference, disclose low NO<sub>x</sub> burners that may be combined with air staged combustion methods to further reduce NO<sub>x</sub> emissions.

[0009] Unlike conventional burners, low NO<sub>x</sub> burners tend to form long flames and produce higher levels of unburned combustibles. Long flames are not always desirable as they may be incompatible with furnace depth or height, and can impair boiler operation by causing flame impingement, slagging, and/or boiler tube corrosion.

[0010] Long flames result from an insufficient air supply to the fuel jet as it proceeds into the furnace. SA from the outer air zones of low NO<sub>x</sub> burners do not effectively penetrate the downstream fuel jet, such that unburned fuel persists due to a lack of air supply along the flame axis. High levels of unburned fuel are undesirable in both furnaces with OFA and those without. Unburned combustibles in the form of unburned carbon and CO reduce boiler efficiency and add operation expenses, whereas unburned pulverized coal, by nature of its abrasiveness, may cause undesirable erosive damage to the furnace itself.

[0011] Incomplete air/fuel mixing ahead of an OFA system can cause excessive amounts of unburned fuel to persist up to the OFA ports. When large amounts of unburned fuel try to burn with air at the OFA zone, NO<sub>x</sub> formation can increase, thereby minimizing or negating the benefit of staged combustion with OFA. In addition it becomes increasingly difficult to completely burn out these combustibles at and beyond the OFA ports, such that they add to inefficiency and operational difficulties.

### [0012] Summary of the Invention

[0013] The present invention solves the aforementioned problems associated with delayed combustion produced by typical low NO<sub>x</sub> burners and introduces a new burner apparatus and method of combusting fossil fuels to further reduce NO<sub>x</sub> emissions in commercial and utility boilers.

[0014] A burner according to the present invention is suitable for firing pulverized coal (PC) or gaseous hydrocarbons. The present invention comprises an axial zone concentrically surrounded by a first annular zone. The first annular zone provides fuel to the burner at a predetermined velocity so as to create a fuel jet exiting the burner and subsequently forming a burner flame via combustion in the presence of oxygen. The axial zone produces a center air jet piercing the burner flame along its internal axis.

The center air jet provides oxygen along the center axis of the burner flame, allowing the flame to combust from the inside out, while maintaining an overall fuel rich environment in the flame root thereby suppressing NO<sub>x</sub> formation.

**[0015]** Additional oxygen supplied by second and third annular zones concentrically surrounding the first annular zone further reduces NO<sub>x</sub> formation while providing a means for accelerating combustion. Flow conditioning devices of the second and third annular zones aerodynamically suppress fuel jet expansion. Within this aerodynamic suppression, swirl from the air exiting the second and third annular zones creates an internal recirculation zone along the outer boundary of the flame zone which inhibits NO<sub>x</sub> formation. The internal recirculation zone (IRZ) causes NO<sub>x</sub> formed along the outer air-rich periphery of the flame to recirculate back into the fuel rich flame core. The hotter flame temperature, resulting from the inside out combustion of the center air jet, cause uncombusted hydrocarbon radicals to scavenge available oxygen within the IRZ, thereby suppressing the formation of NO<sub>x</sub>, and reducing NO back to other nitrogenous species. A wider, shorter flame envelope results as flame temperature increases due to the accelerated combustion of fuel from the inside out and outside in within the IRZ.

**[0016]** Another aspect of the present invention can be considered a method of reducing NO<sub>x</sub> emissions in a center air jet burner comprising, providing a burner having an axial zone concentrically surrounded by a first annular zone, providing the axial zone with a first gas comprising oxygen, wherein the first gas exits the axial zone at a velocity between about 5000 ft/min and about 10,000 ft/min, providing the first annular zone with a carrier gas comprising a pulverized coal, wherein the carrier gas exits the axial zone at a velocity between about 3000 ft/min and about 5000 ft/min.

**[0017]** Yet another aspect of the present invention can be considered a method of reducing NO<sub>x</sub> emissions in a center air jet burner comprising, providing a four zone burner, wherein the innermost zone is an axial zone concentrically surrounded by a first annular zone, which in turn is concentrically surrounded by a second annular zone, which in turn is concentrically surrounded by a third annular zone, providing the axial zone with a first gas comprising oxygen, providing the first annular zone with a carrier gas comprising a pulverised coal, providing the second annular zone with a second gas comprising oxygen, providing the third annular zone with a third gas comprising oxygen, providing the burner with the carrier gas at a velocity greater than about 3000 ft/min, providing the burner with the first gas at a velocity greater than the carrier gas, providing the burner with the second gas at a velocity less than the carrier gas, providing the burner with the third gas at a velocity greater than the carrier gas, combusting the pulverized coal in the carrier gas stream from the inside of the stream with the first gas, combusting the pulverized coal in the carrier gas stream

from the outside with the second gas and the third gas, utilizing the velocity gradient between the four annular zones to create a recirculation zone within a burner flame, suppressing NO<sub>x</sub> formation and accelerating combustion by recirculation of uncombusted coal and oxygen in the burner flame.

**[0018]** The various features of novelty which characterize the present invention are pointed out with particularity in the claims annexed to and forming a part of this disclosure. For a better understanding of the invention, it's operating advantages and specific benefits attained by it's uses, reference is made to the accompanying drawings and descriptive matter in which the preferred embodiments of the invention are illustrated.

**[0019] Brief Description of the Drawings**

**[0020]** FIG. 1. is a schematic sectional view of an embodiment of the present invention;

**[0021]** FIG. 2 is a schematic view of an embodiment of the present invention wherein arrows identify the flow paths of air and coal;

**[0022]** FIG. 3 is a outside view of a burner assembly embodiment of the present invention identifying the location of feeding duct 9; and

**[0023]** FIG. 4 is a schematic cross sectional view of an embodiment of the present invention which identifies the concentric zones of the present invention.

**[0024] Description of the Preferred Embodiments**

**[0025]** Referring to the drawings, generally where like numerals designate the same or functionally similar features, throughout the several views and first to FIG. 1, there is shown a schematic sectional view of a burner depicted in accordance with the present invention. Axial pipe 6, defining an axial zone 25 therein, is concentrically surrounded by a first annular pipe 3 wherein the area between the two pipes defines a first annular zone 11. Radially interposed between a portion of first annular pipe 3 and axial pipe 6 is feeder duct 9 such that axial pipe 6 and windbox 51 are in fluid communication with opposite ends of feeder duct 9.

**[0026]** Referring now to FIG. 3, a top view of feeder duct 9 radially interposed between at least a portion of first annular pipe 3 and axial pipe 6 (not shown in FIG. 3) is provided, such that axial pipe 6 and windbox 51 are in fluid communication with opposite ends of feeder duct 9.

**[0027]** Referring back to FIG. 1, secondary air is supplied by forced draft fans (not shown), preheated in air heaters (not shown), and under pressure to windbox 51. Feeder duct 9 in turn provides secondary air from windbox 51 to axial pipe 6, at a rate controlled by damper 10. An air flow measuring device 12 quantifies the secondary air flowing through feeder duct 9.

**[0028]** A pulverizer (not shown) grinds coal which is conveyed with primary air through a conduit connected to a burner elbow 2. An igniter (not shown) may be positioned on the axis of the burner, penetrating elbow 2, plug 5, and extending through axial pipe 6.

**[0029]** Pulverized coal and primary air (PA/PC) 1 pass

through the burner elbow 2. The pulverized coal generally travels along the outer radius of elbow 2 and concentrates into a stream along the outer radius at the elbow exit. The pulverized coal enters first annular zone 11 and encounters a deflector 4 which redirects the coal stream into plug 5 and disperses the coal. Axial pipe 6 is attached to the downstream side of plug 5.

First annular pipe 3 expands in section 3A to form a larger diameter section 3B. The dispersed coal travels along first annular zone 11 wherein bars and chevrons 7 provide more uniform distribution of the pulverized coal before exiting the first annular zone 11 as a fuel jet. Wedged shaped pieces 9A and 9B (Fig. 3) provide a more contoured flow path for the PA/PC 1 as it travels past feeder duct 9.

**[0030]** A flow conditioning device 30 may be used to disperse the coal to increase the rate at which it interacts with the secondary air. Flow conditioning device 30 may consist of swirl vanes and/or one or more bluff bodies to locally obstruct flow and induce swirl.

**[0031]** Another flow conditioning device 13 may be positioned at the end of axial pipe 6 to provide more uniform flow to secondary air as it exits axial zone 25 into burner throat 8, and out into the furnace (not shown) in the form of a center air jet. Flow conditioning device 13 can be vanes, perforated plates, or other commonly used devices to provide more uniform flow. In some cases, flow conditioning device 13 may provide swirl to the core air to further accelerate coal ignition and reduce emissions.

**[0032]** An aspect pertaining to the operational method of the present invention is the creation of a center air jet within with the fuel jet stream as it exits throat 8 and enters the furnace. Preferably, the center air jet will have a velocity exceeding that of the fuel jet so as to create a velocity gradient within the flame which promotes ignition of the fuel from the inside out utilizing the oxygen from the center air jet.

**[0033]** Optimum operating conditions occur when PA/PC exits the first annular zone at a velocity between about 3,000 ft/min and about 5,000 ft/min, and more preferably between about 3,500 ft/min and about 4,500 ft/min. Optimum operating conditions further occur when secondary air exits axial zone 25 at a velocity between about 5,000 ft/min and 10,000 ft/min, and more preferably between about 5,500 ft/min and 7,500 ft/min.

**[0034]** Damper 15 controls the entry of additional secondary air to the burner assembly. When in the open position damper 15 allows secondary air to flow into a second annular zone 16 concentrically surrounding first annular zone 11, wherein the second annular zone 16 is defined as the area between pipe 3B and barrel 19. Damper 15 further allows secondary air to flow into third annular zone 17 concentrically surrounding second annular zone 16, wherein the third annular zone 16 is defined as the area between barrel 19 and outside burner zone wall 38. Damper 15 can be positioned to preferentially throttle secondary air to one zone over the other, or to supply lesser quantities of secondary air to both zones.

An igniter (not shown) may optionally be situated in annular zone 17, if not through pipe 6.

**[0035]** Optimal operating conditions for utilizing all three annular zones to provide secondary air for combustion occur when between about 20 percent and about 40 percent of the total oxygen provided to the burner by secondary air is provided through axial zone 25, more preferably between about 25 percent and 35 percent. About 10 percent to about 30 percent of the total oxygen provided to the burner by secondary air is provided through second annular zone 16, more preferably between about 15 to about 25 percent. About 40 percent to about 70 percent of the total oxygen provided to the burner by secondary air is provided through third annular air zone 17, more preferably between about 50 percent to about 65 percent.

**[0036]** Air flow measurement device 18 measures the secondary air flow through second annular zone 16 and third annular zone 17. Optimum operating conditions occur when secondary air exits second annular zone 16 at a velocity between about 3000 ft/min and about 4500 ft/min, more preferably between about 3100 ft/min and about 3900 ft/min. Further, wherein secondary air exits third annular zone 17 at a velocity between about 5500 ft/min and about 7500 ft/min, more preferably the velocity is between about 5700 ft/min and about 6700 ft/min.

**[0037]** Optimal air shear conditions generally occur when the inner diameter of the axial zone is between about 9 inches and about 20 inches, the inner diameter of the first annular zone is between about 15 inches and about 30 inches, the inner diameter of the second annular zone is between about 20 inches and about 40 inches, and wherein the inner diameter of the third annual zone is between about 22 and about 50 inches.

**[0038]** Adjustable vanes 21 are situated in the second annular zone 16 to provide swirled secondary air prior to exiting second annular zone 16. Other air distribution devices such as perforated plates and ramps may also be installed at the end of second annular zone 16. Fixed vanes 22A and adjustable vanes 22B impart swirl to the secondary air passing through third annular zone 17. As swirled air leaves third annular zone 17, vane 23, which may alternatively be placed in the middle of the air zone exit, deflects part of the air away from the primary combustion zone.

**[0039]** Referring now to FIG. 2, a graphical depiction, wherein arrows identify the flow paths of secondary air and PA/PC 1, is provided.

**[0040]** In an alternative embodiment, a gas comprising oxygen at a greater concentration than air may be utilized in place of all or part of the secondary air.

**[0041]** In another alternative embodiment, a hydrocarbon fuel other than pulverized coal may be utilized as fuel.

**[0042]** In another alternative embodiment a center conduit may be placed within axial zone 25 such that axial pipe 6 concentrically surrounds the center conduit. In such an embodiment the center conduit may house an igniter, an oil atomizer or gas alternative, or a lance

for introduction of concentrated oxygen or additional hydrocarbon fuel into the flame core either axially or by radial dispersion.

**[0043]** In another alternative embodiment a plurality of center conduits may be placed within axial zone 25 such that axial pipe 6 concentrically surrounds each of the plurality of conduits. In such an embodiment the plurality of center conduits may provide concentrated oxygen in more than one stream, or at least one of the conduits may provide additional coal or other hydrocarbon fuel for combustion.

**[0044]** In another embodiment multiple feeder ducts and/or booster fans or conduits may be utilized to provide additional secondary air or oxygen to axial zone 25.

**[0045]** In another embodiment staged combustion is utilized with the burner and NO<sub>x</sub> reduction methods of the present invention to further reduce NO<sub>x</sub> emissions.

**[0046]** In yet another embodiment an alternative air ducting system may be devised wherein secondary air is ducted through outer wall 51B of windbox 51 and fed into axial zone 25 through the outer radius of an enlarged burner elbow or elsewhere to form a axial zone 25 in fluid connection with the windbox 51.

**[0047]** Particular aspects of the disclosure are set out in the following numbered clauses:

- 1. A center air jet burner comprising:

- an axial zone concentrically surrounded by a first annular zone,

- wherein the diameter of the axial zone is between about 9 inches and about 20 inches and the diameter of the first annular zone is between about 15 inches and 30 inches.

- 2. A burner as recited in clause 1, further comprising a second annular zone concentrically surrounding the first annular zone, wherein the diameter of the second annular zone is between about 20 inches to about 40 inches.

- 3. A burner as recited in clause 2, further comprising a third annular zone concentrically surrounding the second annular zone, wherein the diameter of the third annular zone is between about 22 inches to about 50 inches.

- 4. A burner as recited in clause 3, further comprising a conduit concentrically surrounded by the axial zone.

- 5. A method of reducing NO<sub>x</sub> emissions in a pulverized coal burner comprising the steps of; providing a four zone burner, wherein the innermost zone is an axial zone concentrically surrounded by a first annular zone, which in turn is concentrically surrounded by a second annular zone, which in turn

- is concentrically surrounded by a third annular zone; providing the axial zone with a first gas comprising oxygen;

- providing the first annular zone with a carrier gas comprising a pulverized coal;

- providing the second annular zone with a second gas comprising oxygen;

- providing the third annular zone with a third gas comprising oxygen;

- providing the burner with the carrier gas at a velocity greater than about 3000 ft/min;

- providing the burner with the first gas at a velocity greater than the carrier gas;

- providing the burner with the second gas at a velocity less than the carrier gas;

- providing the burner with the third gas at a velocity greater than the carrier gas;

- combusting the pulverized coal in the carrier gas stream from the inside of the stream with the first gas;

- combusting the pulverized coal in the carrier gas stream from the outside with the second gas and the third gas;

- utilizing the velocity gradient between the four annular zones to create a recirculation zone within a burner flame; and

- suppressing NO<sub>x</sub> formation and accelerating combustion by recirculation uncombusted coal and oxygen in the burner flame.

- 6. The method as recited in clause 5, further comprising swirling the second gas prior to reaching the burner flame.

- 7. The method as recited in clauses 5 or 6, further comprising swirling the carrier gas prior to combustion.

- 8. The method as recited in anyone of clauses 5 to 7, further comprising swirling the third gas prior to combustion.

- 9. The method as recited in anyone of clauses 5 to 8, further comprising swirling the first gas prior to combustion.

- 10. The method as recited in anyone of clauses 5 to 9, wherein the first gas comprises more than 21 percent oxygen.

- 11. The method as recited in anyone of clauses 5 to 10, wherein the second gas comprises more than 21 percent oxygen.

- 12. The method as recited in anyone of clauses 5 to 11, wherein the third gas comprises more than 21 percent oxygen.

- 13. A method of reducing NO<sub>x</sub> emissions in a pul-

verized coal burner comprising the steps of;  
 providing a burner having an axial zone concentrically surrounded by a first annular zone;  
 providing the axial zone with a first gas comprising oxygen, wherein the first gas exits the axial zone at a velocity between about 5000 ft/min and about 10,000 ft/min;  
 providing the first annular zone with a carrier gas comprising a pulverized coal, wherein the carrier gas exits the first annular zone at a velocity between about 3000 ft/min and about 5000 ft/min.

14. The method as recited in clause 13, further comprising;  
 providing a burner with a second annular zone concentrically surrounding the first annular zone and a third annular zone concentrically surrounding the second annular zone;  
 providing the burner with a second gas comprising oxygen, wherein the second gas exits the second annular zone at a velocity between about 3000 ft/min and about 4500 ft/min, and  
 providing the burner with a third gas comprising oxygen, wherein the third gas exits the third annular zone at a velocity between about 5500 ft/min and about 7500 ft/min.

15. The method as recited in clause 14, wherein the first gas exits the axial zone at a velocity between about 5500 ft/min and 7500 ft/min, and wherein the carrier gas exits the first annular zone at a velocity between about 3500 ft/min and 4500 ft/min.

16. The method as recited in clause 15, wherein the second gas exits the second annular zone at a velocity between about 3100 ft/min, and about 3900 ft/min, and wherein the third gas exits the third annular zone at a velocity between about 5700 ft/min and about 6700 ft/min.

17. The method as recited in clauses 15 or 16, further comprising the step of providing a burner flame with oxygen wherein about 20 percent to about 40 percent of the total oxygen is provided by the first gas through the axial zone, about 10 percent to about 30 percent of the total oxygen is provided by the second gas through the second annular zone, and about 40 percent to about 70 percent of the oxygen is provided by the third gas through the third annular zone.

18. The method as recited in clause 17, further comprising the step of swirling at least one of the group consisting of the first gas, the second gas, the third gas, and the carrier gas prior to reaching the burner flame.

19. The method as recited in clause 17, further comprising, the steps of combusting the pulverized coal

in the carrier gas stream from the inside of the stream with the first gas, combusting the pulverized coal in the carrier gas stream from the outside with the second gas and the third gas;  
 providing a means for creating a recirculation zone within the burner flame; and suppressing NOx formation and accelerating combustion by recirculation of uncombusted coal and oxygen in the burner flame.

20. The method as recited in clause 17, further comprising the step of utilizing a flow conditioning means for conditioning gas flow within at least one of the group consisting of the axial zone, the first annular zone, the second annular zone, and the third annular zone.

**[0048]** While the specific embodiments of the invention have been shown and described in detail to illustrate the application of the principles of the invention, it will be understood that the invention may be embodied otherwise as appreciated by one of ordinary skill in the art without departing from the scope of the present invention.

## Claims

1. A center air jet burner comprising:

an axial zone concentrically surrounded by a first annular zone, the first annular zone concentrically surrounded by a second annular zone, and the second annular zone concentrically surrounded by a third annular zone,  
 a feeder duct radially interposed between a portion of the first annular zone and the axial zone, wherein the feeder duct provides a gas comprising oxygen to the axial zone, and  
 a means for regulating flow of the gas through the feeder duct.

2. A burner as recited in claim 1, wherein the axial zone contains a flow conditioning device.

3. A burner as recited in claim 1 or claim 2, wherein the first annular zone contains a flow conditioning device.

4. A burner as recited in anyone of the preceding claims, wherein the first annular zone contains a means of providing more uniform coal distribution.

5. A burner as recited in anyone of the preceding claims, further comprising a means for providing the first annular zone with a combustible fuel.

6. A burner as recited in claim 1, further comprising a means for providing air to the second annular zone, and a means for providing air to the third annular

zone.

7. A burner as recited in claim 1 to 6, further comprising a vane in the second annular zone. 5
8. A burner as recited in anyone of claims 1 to 8, further comprising a vane in the third annular zone.
9. A burner as recited in claim 6, further comprising a means for regulating air flow to the second annular zone, and a means for regulating air flow to the third annular zone. 10
10. A burner as recited in anyone of the preceding claims, wherein a windbox is in fluid communication with the second annular zone and the third annular zone. 15
11. A burner as recited in claim 10, wherein a windbox is in fluid communication with the axial zone. 20
12. A burner as recited in anyone of the preceding claims, wherein the axial zone is in fluid communication with a primary air duct. 25
13. A burner as recited in anyone of the preceding claims, wherein an igniter resides within the axial zone.
14. A burner as recited in anyone of the preceding claims, further comprising a conduit concentrically surrounded by the axial zone. 30
15. A burner as recited in claim 14, wherein the conduit includes a means for radially dispersing a gas into the axial zone. 35
16. A burner as recited in claim 14 or 15, wherein the conduit includes a means for longitudinally dispersing a gas into the axial zone. 40

45

50

55

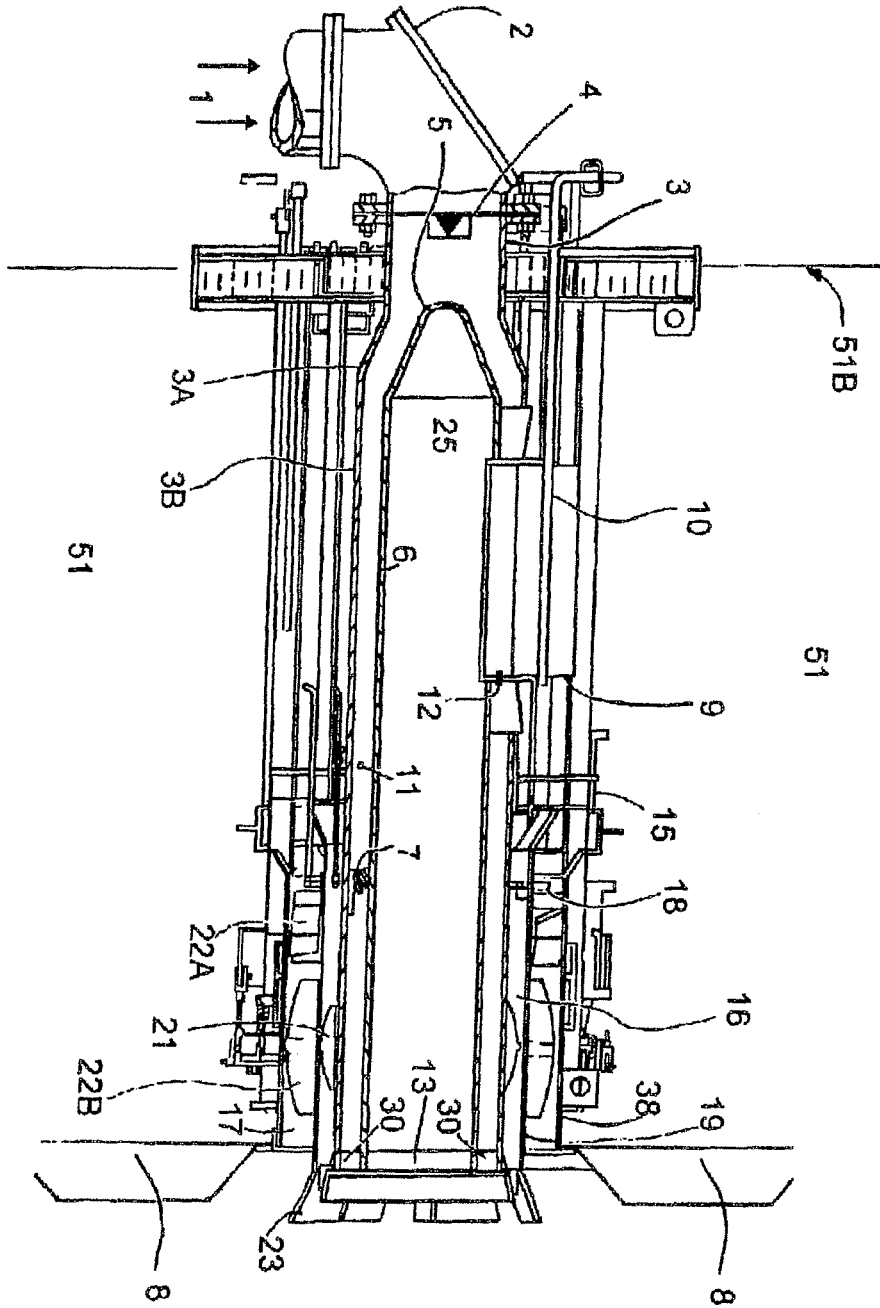


FIG. 1

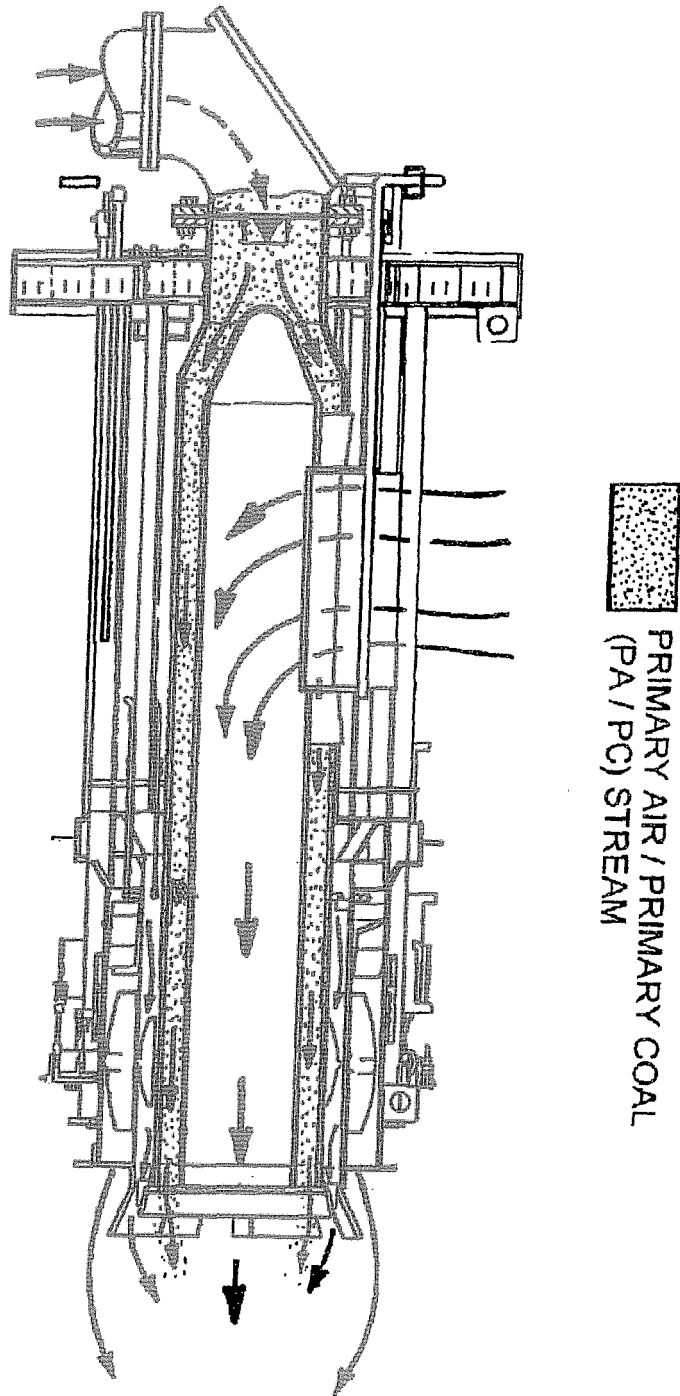


FIG. 2

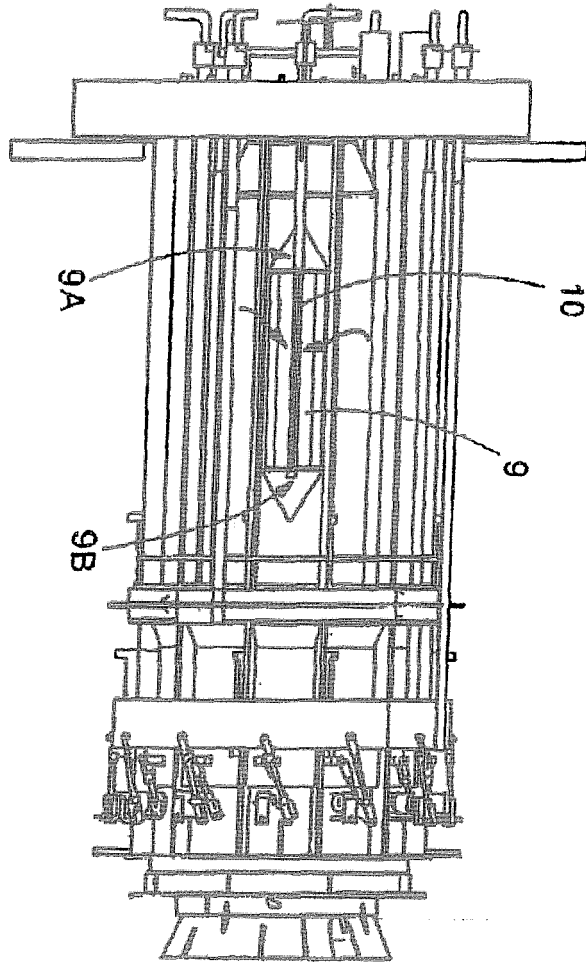


FIG. 3

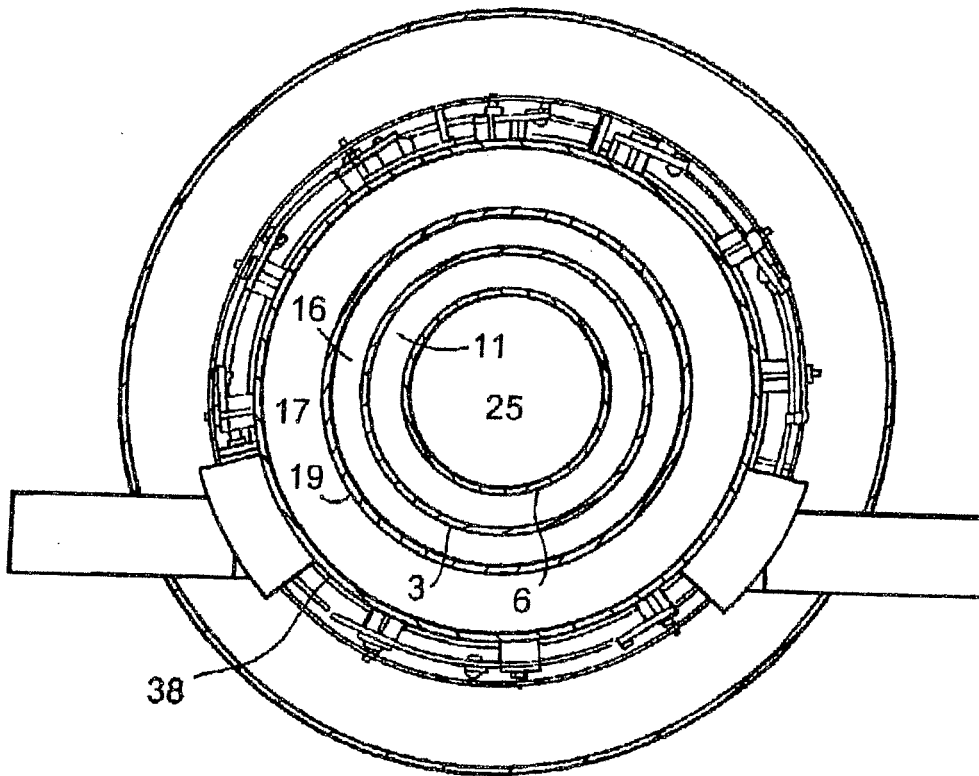


FIG. 4

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 5697306 A, LaRue [0008]
- US 5199355 A, LaRue [0008]