



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A23D 7/00		A1	(11) International Publication Number: WO 96/39044
			(43) International Publication Date: 12 December 1996 (12.12.96)
(21) International Application Number: PCT/US96/08933			(74) Agents: LILLIE, Raymond, J. et al.; Carella, Byrne, Bain, Gilfillan, Cecchi, Stewart & Olstein, 6 Becker Farm Road, Roseland, NJ 07068 (US).
(22) International Filing Date: 5 June 1996 (05.06.96)			
(30) Priority Data: 08/462,510 5 June 1995 (05.06.95)		US	(81) Designated States: AU, CA, JP, MX, NZ, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(60) Parent Application or Grant (63) Related by Continuation US 08/462,510 (CIP) Filed on 5 June 1995 (05.06.95)			Published <i>With international search report.</i>
(71) Applicant (for all designated States except US): THE DALLAS GROUP OF AMERICA, INC. [US/US]; Suite 103, Allen Center, Liberty Corner, NJ 07938 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): MUNSON, James, R. [US/US]; 436 Century Lane, Branchburg, NJ 08876 (US). BERTRAM, Bryan, L. [US/US]; 3608 Alonzo Smith Road, Georgetown, IN 47122 (US). CALDWELL, Joseph, D. [US/US]; 122 N. Bayly Avenue, Louisville, KY 40206 (US).			

(54) Title: TREATMENT OF COOKING OILS AND FATS WITH MAGNESIUM SILICATE AND ALKALI MATERIALS

(57) Abstract

A process for treating cooking oil or fat which comprises contacting cooking oil or fat with magnesium silicate and at least one alkali material, such as, for example, calcium hydroxide. The magnesium silicate and at least one alkali material are present in amounts effective to reduce the content of free fatty acids in the oil or fat and permit reuse of the oil or fat for cooking. Such method provides for improved extension of the life of the cooking oil employed in restaurant-type and industrial frying operations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**TREATMENT OF COOKING OILS AND FATS WITH
MAGNESIUM SILICATE AND ALKALI MATERIALS**

This application is a continuation-in-part of application Serial No. 08/462,510, filed June 5, 1995, the contents of which hereby are incorporated by reference.

This invention relates to the treatment of cooking oils and fats. More particularly, this invention relates to the treatment of cooking oils and fats to reduce the free fatty acid content thereof by contacting the cooking oils or fats with magnesium silicate and alkali materials such as calcium hydroxide or sodium bicarbonate.

Cooking oils and fats are employed in general for the cooking or frying of foods such as chicken, fish, potatoes, potato chips, vegetables, and pies. Such frying may take place in a restaurant wherein food is prepared for immediate consumption, or in an industrial frying operation where food is prepared in mass quantities for packaging, shipping, and future consumption.

In a typical restaurant frying operation, large quantities of edible cooking oils or fats are heated in vats to temperatures of from about 315°F to about 400°F or more, and the food is immersed in the oil or fat for cooking. During repeated use of the cooking oil or fat, the high cooking temperatures, in combination with water from the food being fried, cause the formation of free fatty acids (or

FFA). An increase in the FFA decreases the oil's smoke point and results in increasing smoke as the oil ages.

Industrial frying operations involve the frying of large amounts of food for delayed consumption. Often, this is a continuous operation with the food being carried through the hot oil via a conveyor.

Industrial fryers of meat and poultry must follow the guidelines of the FDA Food Safety and Inspection Service (FSIS) Meat and Poultry Inspection Manual. The following are excerpts from that manual:

Section 18.40 Frying (a) Meat

Length of time fats and oils may be used for deep fat frying varies with temperature, quality of new fat added daily, and fat treatment during use. Suitability of these fats for further use can be determined from degree of foaming during use or from color, odor, and flavor.

Fat or oil should be discarded when it foams over the vessel's side during cooking, or when its color becomes almost black as viewed through a colorless glass container.

Section 18.40 Frying (b) Poultry (5) Fat Acceptability

Used fat may be made satisfactory by filtering, adding fresh fat, and cleaning the equipment regularly.

Large amounts of sediment and free fatty acid content in excess of 2 percent are usual indications that frying fats are unwholesome and require reconditioning or replacement.

Most industrial fryers use the 2% free fatty acid (FFA) limit, or less if mandated by their customers, for poultry as their main specification for oil quality, regardless of the food being fried.

In addition to hydrolysis, which forms free fatty acids, there occurs oxidative degeneration of fats which results from contact of air with hot oil, thereby producing oxidized fatty acids (or OFA). Heating transforms the oxidized fatty acids into secondary and tertiary by-products

which may cause off-flavors and off-odors in the oil and fried food.

Caramelization also occurs during the use of oil over a period of time, resulting in a very dark color of the oil which, combined with other by-products, produces dark and unappealing fried foods.

Because of the cost resulting from the replacing of the cooking oils and fats after the use thereof, the food industries have searched for effective and economical ways to slow degradation of fats and oils in order to extend their usable life.

U.S. Patent No. 4,112,129, issued to Duensing, et al., discloses a composition comprised of diatomite, synthetic calcium silicate hydrate, and synthetic magnesium silicate hydrate may be employed for reclaiming used fats and oils.

U.S. Patent No. 4,681,768, issued to Mulflur, et al., discloses a process for treating used cooking oil or fat by contacting used cooking oil or fat with a high surface area amorphous synthetic magnesium silicate having a surface area of at least 300 square meters per gram.

Most industrial fryers use Silasorb (Celite Corporation, Denver, Colorado) which is a synthetic calcium silicate, as their filter medium because it is very effective in lowering free fatty acid concentration. Silasorb lowers the free fatty acid (FFA) concentration of the oil by a combination of adsorption and neutralization. The use of Silasorb, however, often darkens the oil.

In addition, the product of the neutralization of a fatty acid with an alkaline metal is a fatty acid soap. The amount of soap formed is dependent on the amount of alkaline metal present, and the initial percentage of free fatty acids in the oil. When the soap level is high, the oil foams. The use of Silasorb in order to lower the free fatty

acid concentration sometimes results in uncontrollable foaming.

It is therefore an object of the present invention to provide an improved procedure for removing free fatty acids from cooking oil or fat employed in restaurant frying operations or in industrial frying operations.

In accordance with an aspect of the present invention, there is provided a process for treating cooking oil or fat. The process comprises contacting cooking oil or fat with magnesium silicate and at least one alkali material selected from the group consisting of alkaline earth metal hydroxides; alkaline earth metal oxides; alkali metal carbonates; alkali metal bicarbonates; alkaline earth metal carbonates; and alkali metal silicates. The magnesium silicate and the at least one alkali material are present in amounts effective to reduce the content of free fatty acids in the cooking oil or fat, and extend the usable life of the oil or fat for cooking.

The magnesium silicate and the at least one alkali material are preferably employed in a composition or mixture; however, the materials may be separately added.

In a preferred embodiment, the ratio of magnesium silicate to alkali material used for treating the oil or fat is generally at least 1.8:1 preferably at least 9:1, and generally does not exceed 32:1, and in most cases does not exceed 19:1, all by weight. Thus, in a composition in a preferred embodiment, based on the two components, the magnesium silicate is present in the composition in an amount of from about 65 wt.% to about 97 wt.%, preferably from about 90 wt.% to about 95 wt.%.

In general, the magnesium silicate is a magnesium silicate which is acceptable as a filter aid in food processing applications. For example, the Food Chemical Codex, Third Edition, gives the following specifications for

a synthetic magnesium silicate which is acceptable in food processing and industrial frying operations:

Loss on Ignition	15% max (dry basis)
% MgO	15% min. (ignited basis)
% SiO ₂	67% min. (ignited basis)
Soluble salts	3% max.
Mole ratio MgO:SiO ₂	1:1.36 to 1:3.82

In one embodiment, the magnesium silicate is an amorphous synthetic magnesium silicate having a surface area of at least 300 square meters per gram, and preferably has a surface area from about 400 square meters per gram to about 700 square meters per gram, and more preferably has a surface area from about 400 square meters per gram to about 600 square meters per gram. In addition, such magnesium silicate is preferably employed as coarse particles, with at least 75%, and preferably at least 85% of the particles having a particle size which is greater than 400 mesh, and with no more than 15%, and preferably no more than 5%, all by weight, having a particle size greater than 40 mesh. In most cases, the average particle size of the magnesium silicate employed in accordance with the present invention is in the order of but not limited to 20-75 microns. It is to be understood, however, that the magnesium silicate may have a particle size different than the size described hereinabove. For example, the magnesium silicate may be used as a finely divided powder, i.e., 50% or more passes through a 325 mesh screen.

In addition, the hydrated magnesium silicate which is employed in accordance with a preferred embodiment of the present invention generally has a bulk density in the order of from 15-35 lbs./cu.ft., a pH of 7-10.8 (5% water suspension) and a mole ratio of MgO to SiO₂ of 1:1.8 to 1:4.

The following is a specification and typical value for a magnesium silicate which is employed in accordance with a preferred embodiment of the present invention:

TABLE

Parameter	Specification	Typical Value
Loss on Ignition at 900°C	15% max	12%
Mole Ratio MgO:SiO ₂	1:2.25 to 1:2.75	1:2.60
pH of 5% Water Suspension	9.5 ± 0.5	9.6
Soluble Salts % by wt.	3.0 max.	1.0%
<u>Sieve Analysis:</u>		
Surface Area (B.E.T.)	300 M ² /g min.	400

A representative example of such a synthetic magnesium silicate having a surface area of at least 300 square meters per gram is available as Magnesol[®] Polysorb 30/40, a product of the Dallas Group of America, Inc., Liberty Corner, N.J., and also is described in U.S. Patent No. 4,681,768.

In another embodiment, the magnesium silicate is an amorphous, hydrous, precipitated synthetic magnesium silicate which has been treated to reduce the pH thereof to less than about 9.0. As used herein, the term "precipitated" means that the amorphous hydrated precipitated synthetic magnesium silicate is produced as a result of precipitation formed upon the contact of a magnesium salt and a source of silicate in an aqueous medium.

For purposes of the present invention, the pH of the magnesium silicate is the pH of the magnesium silicate as measured in a 5% slurry of the magnesium silicate in water. The pH of the treated magnesium silicate in a 5% slurry preferably is from about 8.2 to about 8.9, and more preferably from about 8.5 to about 8.8. Examples of such a treated amorphous hydrous precipitated synthetic magnesium silicate are available as Magnesol[®] XL and Haze-Out[™], products of the Dallas Group of America, Inc., Liberty Corner, N.J., and also are described in U.S. Patent No. 5,006,356. Such

products have an average particle size of about 70μ and 30μ , respectively.

In yet another embodiment, the magnesium silicate is a magnesium silicate which has a surface area of from about 50 square meters per gram to about 150 square meters per gram. Preferably, such a magnesium silicate has a mole ratio of MgO to SiO₂ of from about 1:2.6 to about 1:3.4, and a pH (5% water suspension) of from about 9.5 to about 10.5. An example of such a magnesium silicate is available as Magnesol[®] HMR-LS, a product of the Dallas Group of America, Inc., Liberty Corner, N.J.

In another embodiment, the magnesium silicate may be in the form of talc.

It is to be understood, however, that the scope of the present invention is not to be limited to any specific type of magnesium silicate or method for the production thereof.

In one embodiment, the at least one alkali material is an alkaline earth metal hydroxide.

Preferably, the alkaline earth metal hydroxide is calcium hydroxide (Ca(OH)₂).

In another embodiment, the at least one alkali material is an alkaline earth metal oxide. Alkaline earth metal hydroxides which may be employed include, but are not limited to, magnesium oxide (MgO) and calcium oxide (CaO).

In another embodiment, the at least one alkali material is an alkali metal carbonate. Alkali metal carbonates which may be employed include, but are not limited to, sodium carbonate (Na₂CO₃).

In another embodiment, the at least one alkali material is an alkali metal bicarbonate. Alkali metal bicarbonates which may be employed include, but are not limited to, sodium bicarbonate (NaHCO₃), and potassium bicarbonate (KHCO₃). In a preferred embodiment, the alkali metal bicarbonate is sodium bicarbonate (NaHCO₃).

In another embodiment, the at least one alkali material is an alkaline earth metal carbonate. Alkaline earth metal carbonates which may be employed include, but are not limited to, calcium carbonate (CaCO_3).

In another embodiment, the at least one alkali material is an alkali metal silicate. Alkali metal silicates which may be employed include, but are not limited to, sodium metasilicate (Na_2SiO_3).

In another embodiment, the at least one alkali material is present in an amount of from about 3 wt.% to about 35 wt.%, preferably from about 5 wt.% to about 10 wt.%, with the remainder being magnesium silicate, based on the two components.

The magnesium silicate and the at least one alkali material employed in accordance with the present invention can be used to treat used cooking oil and/or fats in conjunction with any operation for filtering used cooking oil and fats.

The method of the present invention is applicable to continuous filtration systems in which used cooking oil is circulated continuously through filtration units and back to the frying vats and/or vat systems wherein one or more times a day, the contents of each frying vat are filtered through a batch type filter. The magnesium silicate and the at least one alkali material employed in accordance with the present invention may be employed both as a precoat and a body feed in either a continuous or batch filtration system.

In a conventional cooking apparatus, or in an industrial frying application, in general, at least 0.005 lb. of the composition, and preferably at least 0.01 lb. of the composition, is employed per pound of used cooking oil. In general, the amount of composition employed does not exceed 0.02 lb. per pound of used cooking oil.

The selection of an optimum amount will depend on but not be limited to the frequency of treatment and the

condition of the oil. The magnesium silicate and the at least one alkali material are used in an amount effective to reduce FFA or color or other contaminant levels so as to extend the period of use of the oil. The maximum amount will be determined by required oil quality, economics, and filtration flow properties in the operation. In general, the treatment is effected in a manner such that the cooking oil or fat is not cooled to a temperature below 160°F.

In one embodiment, after treatment with the magnesium silicate and the at least one alkali material, the treated oil may be combined with a conventional filter aid for subsequent filtration. It is to be understood, however, that in most cases the magnesium silicate and the at least one alkali material may be employed to treat the used cooking oil and, after such treatment, the oil is filtered without the addition of a conventional filter aid.

The magnesium silicate and the at least one alkali material employed in accordance with the present invention are capable of maintaining contaminant levels below the point of discard for an extended period of time. This is accomplished without producing other adverse effects in the oil, such as excessive discoloration or excessive foaming.

The present invention also is applicable to industrial frying operations, which are conducted as hereinabove described.

Applicants have found that, by contacting used cooking oil, in conventional restaurant-type filtration and frying systems or in industrial frying systems, with a combination of magnesium silicate and the at least one alkali material, one obtains an improved extension of the useful life of the cooking oil without affecting food quality adversely. Such treatment reduces the free fatty acid content of the oil without causing excessive discoloration or foaming. Food quality actually has been reported to improve with use.

The invention now will be described with respect to the drawings, wherein:

Figure 1 is a graph of the free fatty acid content over time of (i) an untreated cooking oil; (ii) a cooking oil treated with magnesium silicate and calcium hydroxide; (iii) a cooking oil treated with magnesium silicate; and (iv) a cooking oil treated with calcium silicate;

Figure 2 is a graph of the photometric color over time of the cooking oils described in Figure 1; and

Figure 3 is a graph of the titratable soap value (ppm) over time of the cooking oils described in Figure 1.

The invention now will be described with respect to the following examples; however, the scope of the present invention is not intended to be limited thereby.

In the following examples, initial and treated oils were analyzed by the official American Oil Chemists' Society methods for percent free fatty acids (Ca 5a-40), photometric color (Cc 13c-50), and titratable soap value (Cc 17-79) to determine such values and the changes in such values as a result of the treatments described below. Also in the following examples, PC-80 is an amorphous, hydrous, precipitated synthetic magnesium silicate which has been treated to reduce the pH thereof to less than about 9.0, said magnesium silicate having an average particle size of about 20 μ .

Example 1

In one set of experiments, a used cooking oil having a free fatty acid (FFA) content of 1.10% was treated at 150°C for 1 hour with the following blends of Magnesol®XL and alkali materials:

1. 65 wt. % Magnesol®XL and 35 wt. % MgO
2. 65 wt. % Magnesol®XL and 35 wt. % Na₂CO₃
3. 65 wt. % Magnesol®XL and 35 wt. % NaHCO₃.

The above blends are referred to as Blend 1, Blend 2, and Blend 3.

The Magnesol®XL was present in an amount of 1 wt. % based on the weight of the oil. The MgO, Na₂CO₃, or NaHCO₃ was present in an amount of 0.60g.

In another set of experiments, the oil was contacted at 150°C for 1 hour with 2 wt. %, based on the weight of the oil, of the following treatment blends; also referred to as Blends 4 through 15:

4. Silasorb alone.
5. 95 wt. % Magnesol®XL and 5 wt. % NaHCO₃.
6. 95 wt. % Magnesol®XL and 5 wt. % NaHCO₃.
7. 90 wt. % Magnesol®XL and 10 wt. % NaHCO₃.
8. 85 wt. % Magnesol®XL and 15 wt. % NaHCO₃.
9. 85 wt. % Magnesol®XL and 15 wt. % NaHCO₃.
10. 75 wt. % Magnesol®XL and 25 wt. % NaHCO₃.
11. 65 wt. % Magnesol®XL and 35 wt. % NaHCO₃.
12. 95 wt. % Magnesol®XL and 5 wt. % KHCO₃.
13. 90 wt. % Magnesol®XL and 10 wt. % KHCO₃.
14. 85 wt. % Magnesol®XL and 15 wt. % KHCO₃.
15. 75 wt. % Magnesol®XL and 25 wt. % KHCO₃.

Silasorb is a calcium silicate which has the following typical chemical analysis:

SiO₂ - 46.68 wt. %
CaO - 28.12 wt. %
Al₂O₃ - 2.0 wt. %
Fe₂O₃ - 1.0 wt. %
MgO - 0.6 wt. %
Na₂O+K₂O = 1.4 wt. %

Total loss on ignition - 15.0 wt. %

The changes in the % FFA and soap value are reported as the actual change in the value. The change in color is reported as a percent of the initial value. A negative sign indicates that the value increased. The results are given in Table I below.

Table I

<u>Blend</u>	<u>% FFA</u>	<u>FFA change</u>	<u>Color % change</u>	<u>Soap value change (ppm)</u>
Initial oil	1.10	---	---	---
1	0.95	0.15	14.3	-8
2	0.93	0.17	14.3	-50
3	0.20	0.90	-2.3	-645
4	0.74	0.36	-10.5	-510
5	0.79	0.31	21.3	-145
6	0.77	0.33	8.3	-326
7	0.69	0.41	2.5	-1750
8	0.43	0.67	2.3	-401
9	0.37	0.73	-18.9	-830
10	0.15	0.95	-5.1	-285
11	0.20	0.90	-2.3	-645
12	0.84	0.26	5.9	-123
13	0.79	0.31	4.1	-324
14	0.77	0.33	-0.7	-577
15	0.44	0.66	-146	-2680

Example 2

In one set of experiments, a cooking oil having an initial FFA content of 1.15% was treated at 150°C for 1 hour with 2 wt. %, based on the weight of the oil, of Silasorb alone (Blend 4), or one of the following absorbents, hereinafter referred to as Blend 16 and Blend 17:

16. 90 wt. % PC-80 and 10 wt. % CaO.
17. 90 wt. % PC-80 and 10 wt. % Ca(OH)₂.

In another experiment, a used cooking oil having a free fatty acid content of 1.04 wt. % was treated as hereinabove described with 2 wt. % Silasorb alone (Blend 4), or one of the following absorbents, hereinafter referred to as Blends 18 through 21:

18. 95 wt. % PC-80 and 5 wt. % Ca(OH)_2 .
19. 93 wt. % PC-80 and 7 wt. % Ca(OH)_2 .
20. 90 wt. % PC-80 and 10 wt. % Ca(OH)_2 .
21. 90 wt. % PC-80 and 10 wt. % CaO.

Free fatty acid values, changes in free fatty acid content, color changes, and soap value changes were determined as hereinabove described. The results are given in Table II below.

Table II

<u>Blend</u>	<u>% FFA</u>	<u>FFA change</u>	<u>Color % change</u>	<u>Soap value change (ppm)</u>
Initial oil	1.15	---	---	---
4	0.78	0.37	-10.6	-316
16	0.83	0.32	8.5	-82
17	0.68	0.47	13.9	-167
Initial oil	1.04	---	---	---
4	0.83	0.21	0	-150
18	0.80	0.24	19.9	-65
19	0.70	0.34	11.4	-416
20	0.69	0.35	21.3	-78
21	0.81	0.23	16.1	-92

The above results show that calcium hydroxide has a more positive effect than calcium oxide in lowering the FFA concentration, and in improving the color of the oil.

Example 3

In this example, four sets of 40 lbs. of chicken were fried per day in partially hydrogenated soybean oil in a 10 lb. capacity fryer. The oils were treated daily for one hour with 2 wt. %, based on the weight of the oil, of (i) Magnesol® 30/40; (ii) 95 wt. % PC-80 and 5 wt. % Ca(OH)_2 ; or (iii) Silasorb. A fourth oil (Control) was not treated. The

oils were treated before filtration. The tests for the control oil, the oil treated with Magnesol[®] 30/40, and the oil treated with 95 wt. % PC-80 and 5 wt. % Ca(OH)₂, were ended when the FFA content of the oil was over 2% by weight. The test of the oil treated with Silasorb ended when the oil began to foam uncontrollably. The untreated control oil was used for 5 days. The oil treated with PC-80 and Ca(OH)₂, was used for 14 days. The oil treated with Magnesol[®] 30/40 was used for 11 days. The oil treated with Silasorb was used for 10 days.

The oils were tested for % FFA content, photometric color, and titratable soap value (ppm). The % FFA content results are shown in Figure 1; the photometric color results are shown in Figure 2; and the titratable soap values are shown in Figure 3.

The results indicate that the blend of 95 wt. % PC-80 and 5 wt. % Ca(OH)₂, was superior to the other systems tested in all aspects of oil quality: days of frying, % FFA content, photometric color, and titratable soap value.

Example 4

Cooking oil obtained from a potato chip fryer, having an initial free fatty acid content of 0.55% and a color reading of 10.1 was contacted with (i) an adsorbent composition of 95 wt.% PC-80 and 5 wt.% calcium hydroxide or (ii) an adsorbent composition of 90 wt. % PC-80 and 10 wt. % sodium bicarbonate. The adsorbents were added to samples of the oil in an amount of 0.71% by weight of the oil, and remained in contact with the oil for 1 hour at 150°C. At the end of 1 hour, the percentage of free fatty acids, the amount of free fatty acids adsorbed (mg/gram of adsorbent), photometric color, and % color change were measured. The results are given in Table III below.

Table III

<u>Material</u>	<u>% FFA</u>	<u>FFA Adsorbed</u>	<u>Color</u>	<u>% color change</u>
Control				
(no adsorbent)	0.55	-	10.1	-
95% PC-80/5% Ca(OH) ₂	0.50	70	7.0	30.7
90% PC-80/10% NaHCO ₃	0.39	225	8.4	16.8

Example 5

Cooking oil obtained from a nut roaster, having an initial free fatty acid content of 0.45% and a color reading of 58.2 was contacted with (i) an adsorbent composition having 95 wt. % PC-80 and 5wt.% calcium hydroxide or (ii) an adsorbent having 90 wt.% PC-80 and 10% sodium bicarbonate. The adsorbents were added to samples of the oil in an amount of 2.0 % by weight of the oil, and remained in contact with the oil for 1 hour at 150°C. At the end of 1 hour, the percentage of free fatty acids, the amount of free fatty acids adsorbed (mg/gram of adsorbent), photometric color, and % color change were measured. The results are given in Table IV below.

Table IV

<u>Material</u>	<u>% FFA</u>	<u>FFA Adsorbed</u>	<u>Color</u>	<u>% color change</u>
Control				
(no adsorbent)	0.46	---	58.2	---
95% PC-80/5% Ca(OH) ₂	0.26	100	34.3	41.1
90% PC-80/10% NaHCO ₃	0.24	110	31.7	45.5

Example 6

Cooking oil obtained from a chicken patty fryer, having an initial free fatty acid content of 1.93% and a color reading of 32.6 was contacted with (i) an adsorbent composition having 95 wt. % PC-80 and 5 wt. % calcium hydroxide or (ii) an adsorbent composition having 90 wt% PC-80 and 10 wt. % sodium bicarbonate. The adsorbents were added to samples of the oil in an amount of 2.0% by weight of the oil, and remained in contact with the oil for 1 hour at 150°C. At the end of 1 hour, the percentage of free fatty acids, the amount of free fatty acids adsorbed (mg/gram of adsorbent), photometric color, and % color change were measured. The results are given in Table V below.

Table V

<u>Material</u>	<u>% FFA</u>	<u>FFA Adsorbed</u>	<u>Color</u>	<u>% color change</u>
Control				
(no adsorbent)	1.93	-	32.6	-
95% PC-80/5% $\text{Ca}(\text{OH})_2$	1.47	230	28.7	12.0
90% PC-80/10% NaHCO_3	1.46	235	27.5	15.6

Example 7

Cooking oil having an initial free fatty acid content of 1.41% and a color reading of 10.3 was contacted with (i) an adsorbent powder composition of magnesium silicate which is an amorphous hydrous precipitated synthetic magnesium silicate having a pH in a 5% slurry from about 8.2 to about 8.9 (Haze-Out); or (ii) an adsorbent composition having 95 wt. % PC-80 and 5% calcium hydroxide; or (iii) a composition having 93 wt. % PC-80 and 7 wt. % sodium bicarbonate. The adsorbents were added to samples of the oil in an amount of 2.0 wt. % by weight of the oil and remained in contact with the oil for 1 hour at 100°C. At the end of

1 hour, the percentage of free fatty acids, the amount of free fatty acids adsorbed (mg/gram of adsorbent), photometric color, and % color change were measured. The results are given in Table VI below.

Table VI

<u>Material</u>	<u>% FFA</u>	<u>FFA Adsorbed</u>	<u>Color</u>	<u>% color change</u>
Control				
(no adsorbent)	1.41	-	10.3	-
Haze-Out	1.19	110	8.5	17.5
95 wt. % PC- 80/5% Ca(OH) ₂	1.16	125	8.6	16.5
93% PC-80/7% NaHCO ₃	0.98	215	8.8	14.6

The present invention is particularly advantageous in that the useful life of cooking oil and/or fat (shortening), which has been used for the high temperature frying of foods, can be extended, thereby reducing the overall cost. The use of magnesium silicate and the at least one alkali material in accordance with the present invention maintains FFA levels below the disposal threshold, and filtration may be accomplished at high flow rates and with low pressure drops, whereby the magnesium silicate and the at least one alkali material may be employed in combination with commercial shortening filters, as well as industrial frying systems.

The above advantages, and other advantages, should be apparent to those skilled in the art from the teachings herein.

The disclosure of all patents, publications, including published patent applications, and database entries referenced in this specification are specifically incorporated by reference in their entirety to the same extent as if each such individual patent, publication and

database entry were specifically and individually indicated to be incorporated by reference.

Numerous modifications and variations of the present invention are possible in light of the above teachings and, therefore, within the scope of the appended claims, the invention may be practiced otherwise than as particularly described.

WHAT IS CLAIMED IS:

1. A process for treating cooking oil or fat, comprising:

contacting cooking oil or fat with (a) magnesium silicate and (b) at least one alkali material selected from the group consisting of alkaline earth metal hydroxides; alkaline earth metal oxides; alkali metal carbonates; alkali metal bicarbonates; alkaline earth metal carbonates; and alkali metal silicates, said magnesium silicate and said at least one alkali material being present in amounts effective to reduce the content of free fatty acids in the oil or fat and extend the usable life of the oil or fat for cooking.

2. The process of Claim 1 wherein the ratio of magnesium silicate to alkali material is at least 1.8:1 and no greater than 32:1, all by weight.

3. The process of Claim 1 wherein the ratio of magnesium silicate to alkali material is at least 9:1 and no greater than 19:1, all by weight.

4. The process of Claim 1 wherein said magnesium silicate has a surface area of at least 300 square meters per gram.

5. The process of Claim 4 wherein said magnesium silicate has a surface area of at least 400 to about 700 square meters per gram.

6. The process of Claim 4 wherein said magnesium silicate has a particle size such that at least 75% of the particles have a size greater than 400 mesh and no more than 15% have a particle size greater than 40 mesh.

7. The process of Claim 4 wherein said magnesium silicate has a particle size of from about 20 microns to about 75 microns.

8. The process of Claim 4 wherein said magnesium silicate has a bulk density of from about 25 to about 32 pounds per cubic foot.

9. The process of Claim 1 wherein said magnesium silicate is an amorphous hydrous precipitated synthetic magnesium silicate, said magnesium silicate having been treated to reduce the pH thereof to less than about 9.0.

10. The method of Claim 9 wherein said magnesium silicate has a pH in a 5% slurry of from about 8.2 to about 8.9.

11. The method of Claim 10 wherein said magnesium silicate has a pH in a 5% slurry of from about 8.5 to about 8.8.

12. The method of Claim 1 wherein said magnesium silicate has a surface area of from about 50 square meters per gram to about 150 square meters per gram.

13. The method of Claim 12 wherein said magnesium silicate has a mole ratio of MgO to SiO₂ of from about 1:2.6 to about 1:3.4 and a pH in a 5% water suspension of from about 9.5 to about 10.5.

14. The method of Claim 1 wherein said at least one alkali material is an alkaline earth metal hydroxide.

15. The method of Claim 14 wherein said alkaline earth metal hydroxide is calcium hydroxide.

16. The method of Claim 1 wherein said at least one alkali material is an alkali metal bicarbonate.

17. The method of Claim 16 wherein said alkali metal bicarbonate is sodium bicarbonate.

FIG. 1



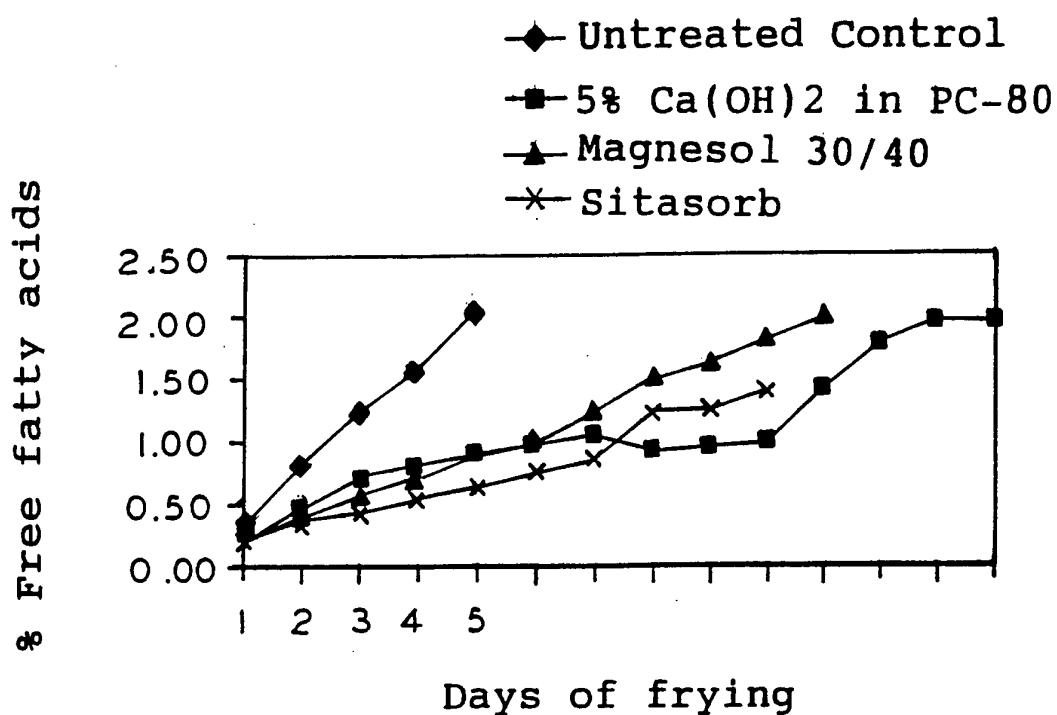


FIG. 2

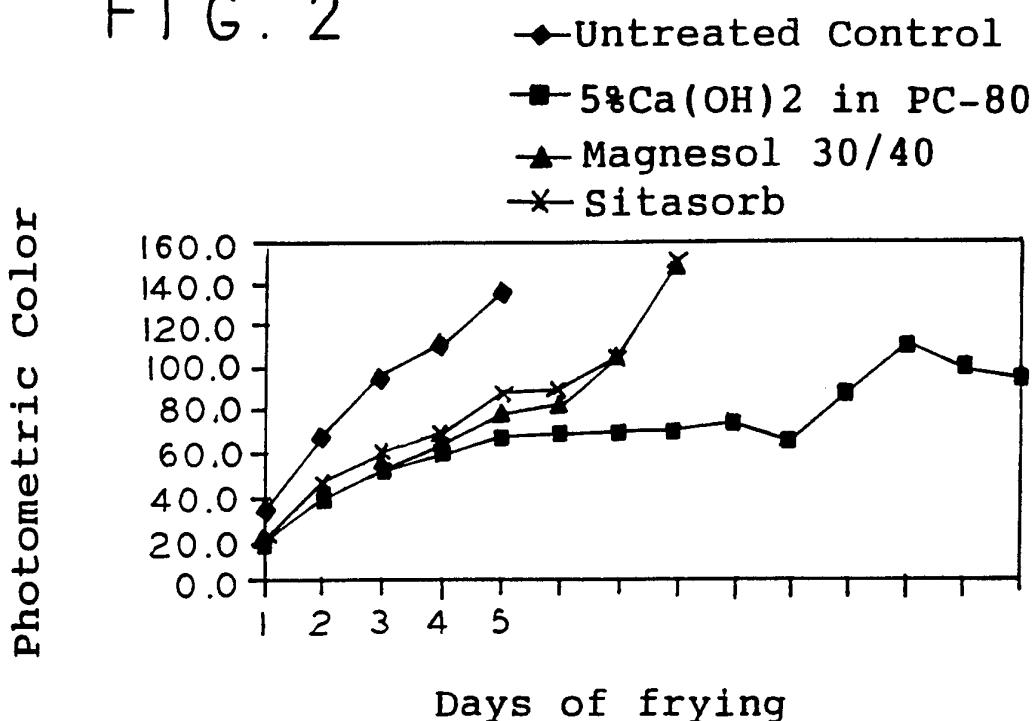

SUBSTITUTE SHEET (RULE 26)

FIG. 3

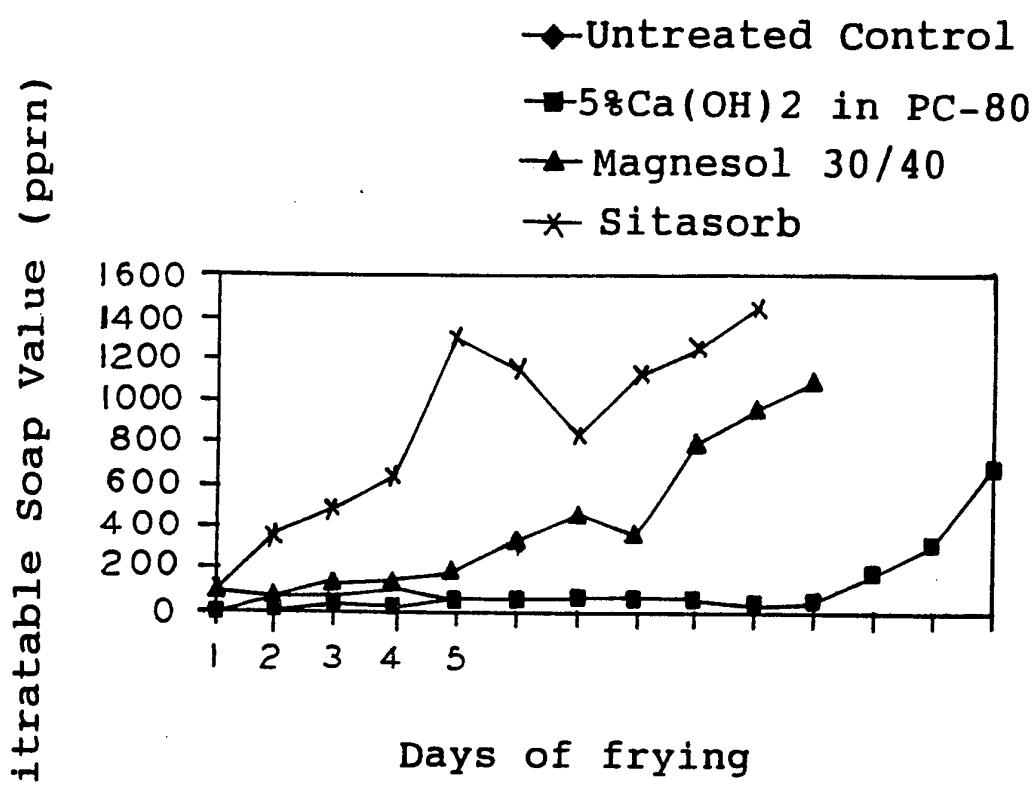

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/08933

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :A23D 7/00

US CL :426/423

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 426/423 , 330.6

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,681,768 (MULFLUR ET AL) 21 JULY 1987, column 2, lines 9-26	1-17
Y	US, A, 3,231,390 (HOOVER) 25 Jan 1966, column 5, lines 55-64	1-17

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search	Date of mailing of the international search report
17 JULY 1996	30 JUL 1996

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer <i>Debbie Thomas</i> CAROLYN PADEN Telephone No. (703) 308-3294
---	---