



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2691551 C 2015/12/22

(11)(21) **2 691 551**

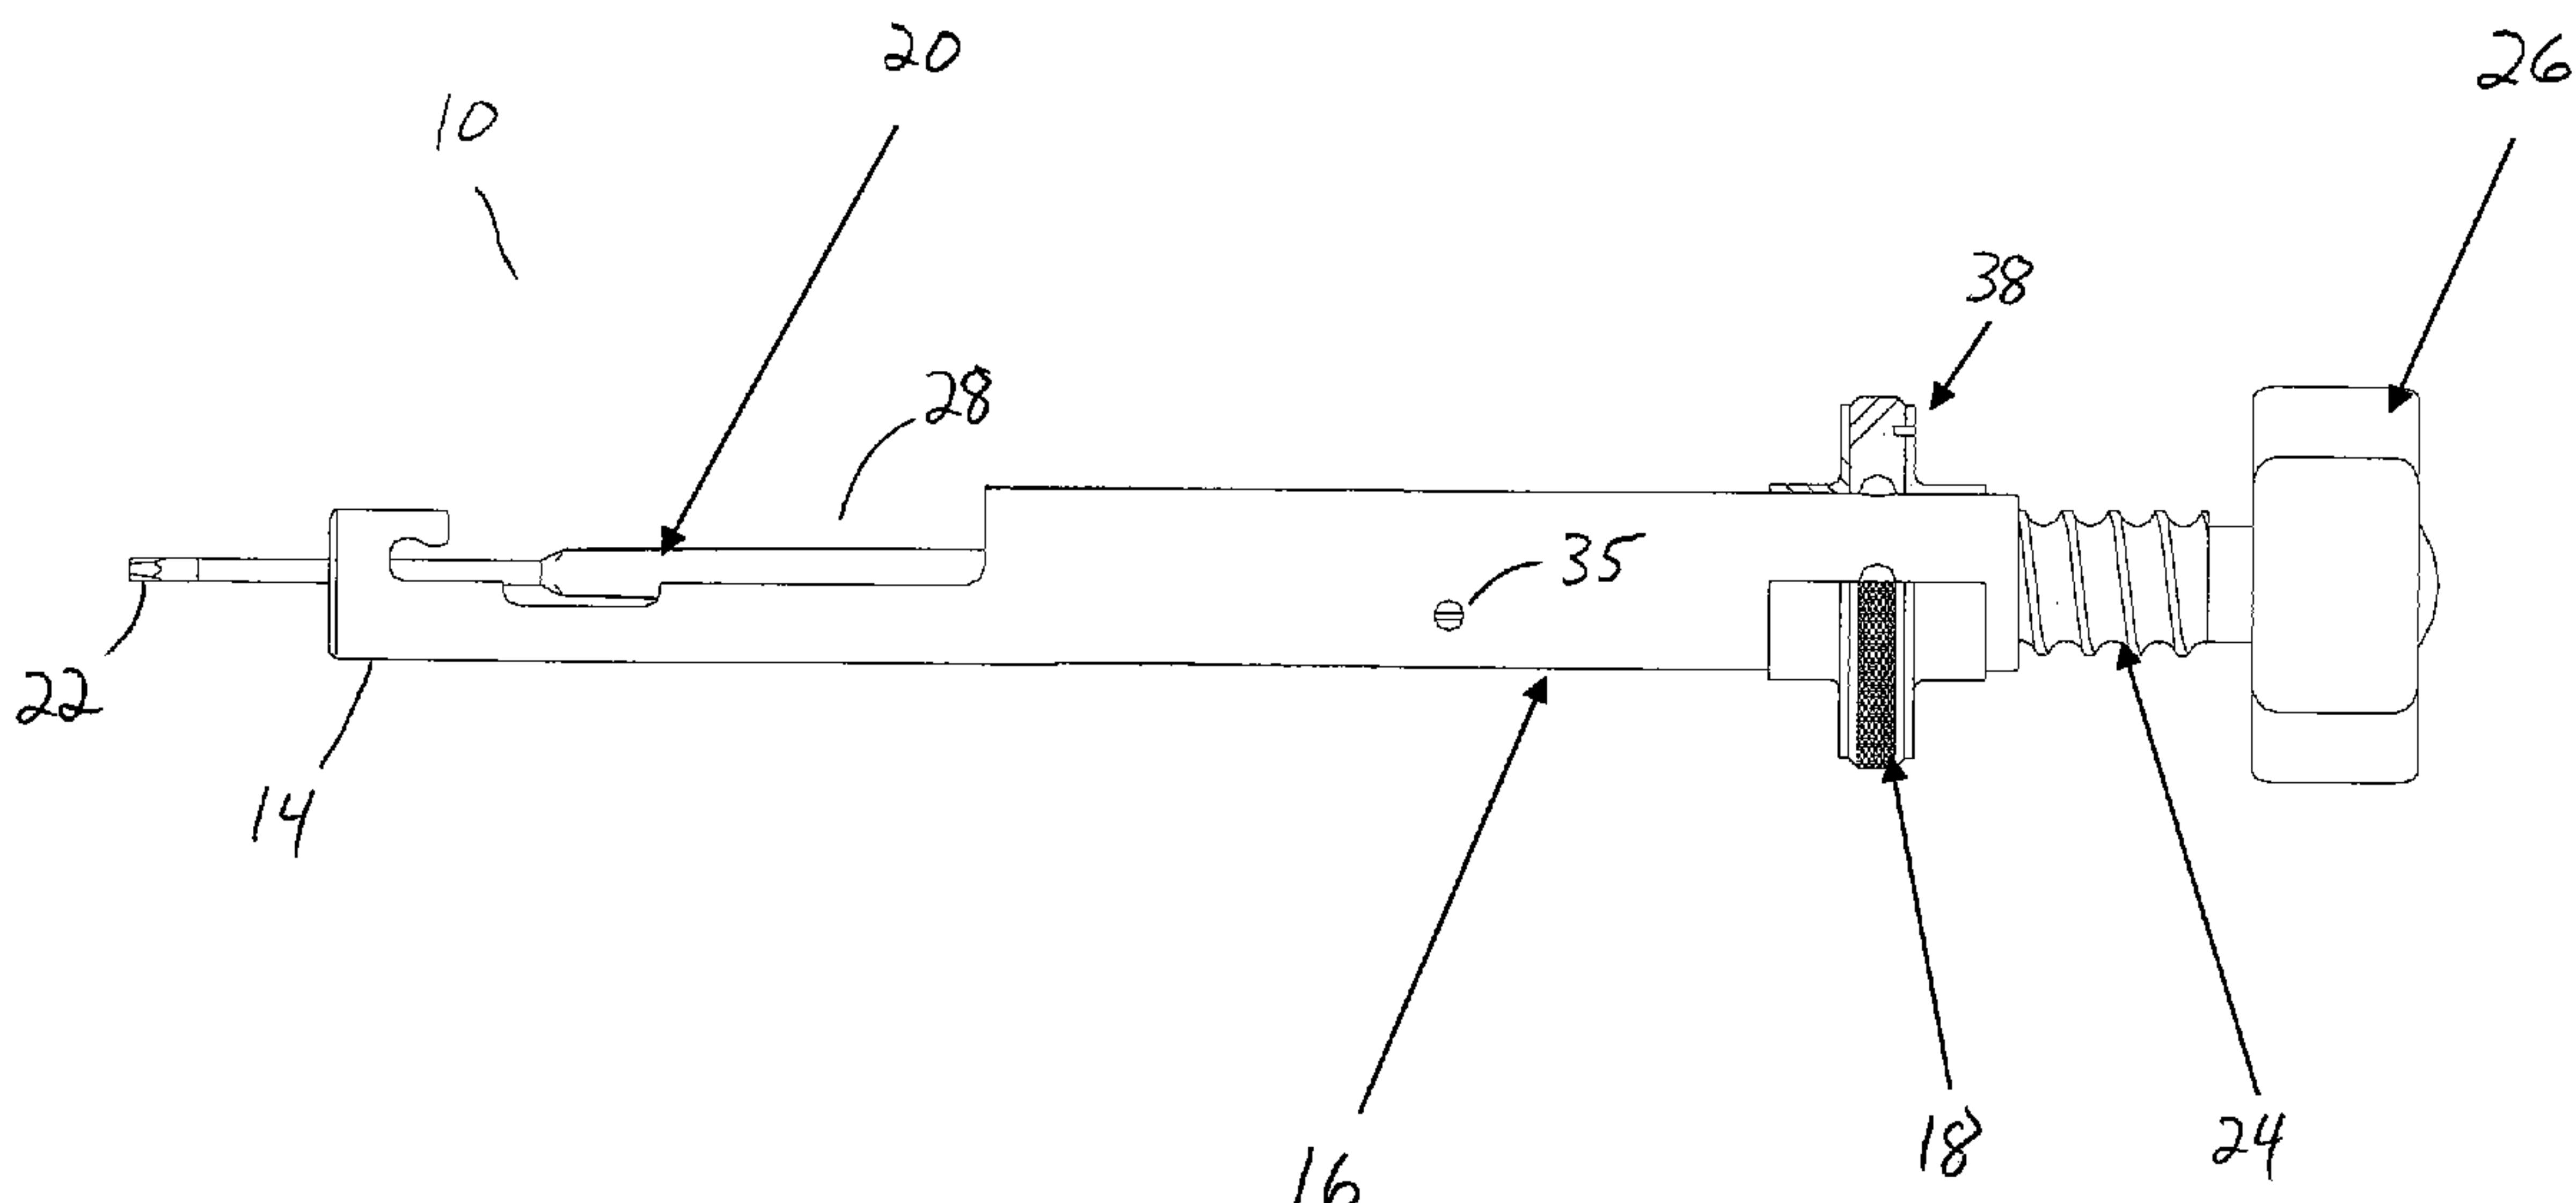
(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2008/10/30
(87) Date publication PCT/PCT Publication Date: 2009/05/07
(45) Date de délivrance/Issue Date: 2015/12/22
(85) Entrée phase nationale/National Entry: 2009/12/21
(86) N° demande PCT/PCT Application No.: US 2008/081679
(87) N° publication PCT/PCT Publication No.: 2009/058929
(30) Priorité/Priority: 2007/10/30 (US11/928,554)

(51) CI.Int./Int.Cl. **A61F 2/16** (2006.01)
(72) **Inventeurs/Inventors:**
DOWNER, DAVID A., US;
YAN, DENGZHU, US
(73) **Propriétaire/Owner:**
ALCON, INC., CH
(74) **Agent:** KIRBY EADES GALE BAKER

(54) Titre : **SYSTEME DE PLACEMENT DE LENTILLE**
(54) Title: **LENS DELIVERY SYSTEM**



(57) Abrégé/Abstract:

A lens delivery system handpiece having a threaded plunger rod with a ball lock ring. Locking the ring causes the plunger to be advanced by turning a thumbscrew or knob. Unlocking the ring allows the plunger to be advanced by pushing on the thumbscrew or knob in a manner similar to a syringe.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 May 2009 (07.05.2009)

PCT

(10) International Publication Number
WO 2009/058929 A1(51) International Patent Classification:
A61F 2/16 (2006.01)

(74) Agents: PREJEAN, Jonathan, E. et al.; Alcon Research, Ltd., IP Legal, Mail Code TB4-8, 6201 South Freeway, Fort Worth, TX 76134 (US).

(21) International Application Number:
PCT/US2008/081679

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 30 October 2008 (30.10.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/928,554 30 October 2007 (30.10.2007) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): ALCON, INC. [CH/CH]; Bosch 69, P.O. Box 62, CH-6331 Hunenberg (CH).

Published:

— with international search report

(54) Title: LENS DELIVERY SYSTEM

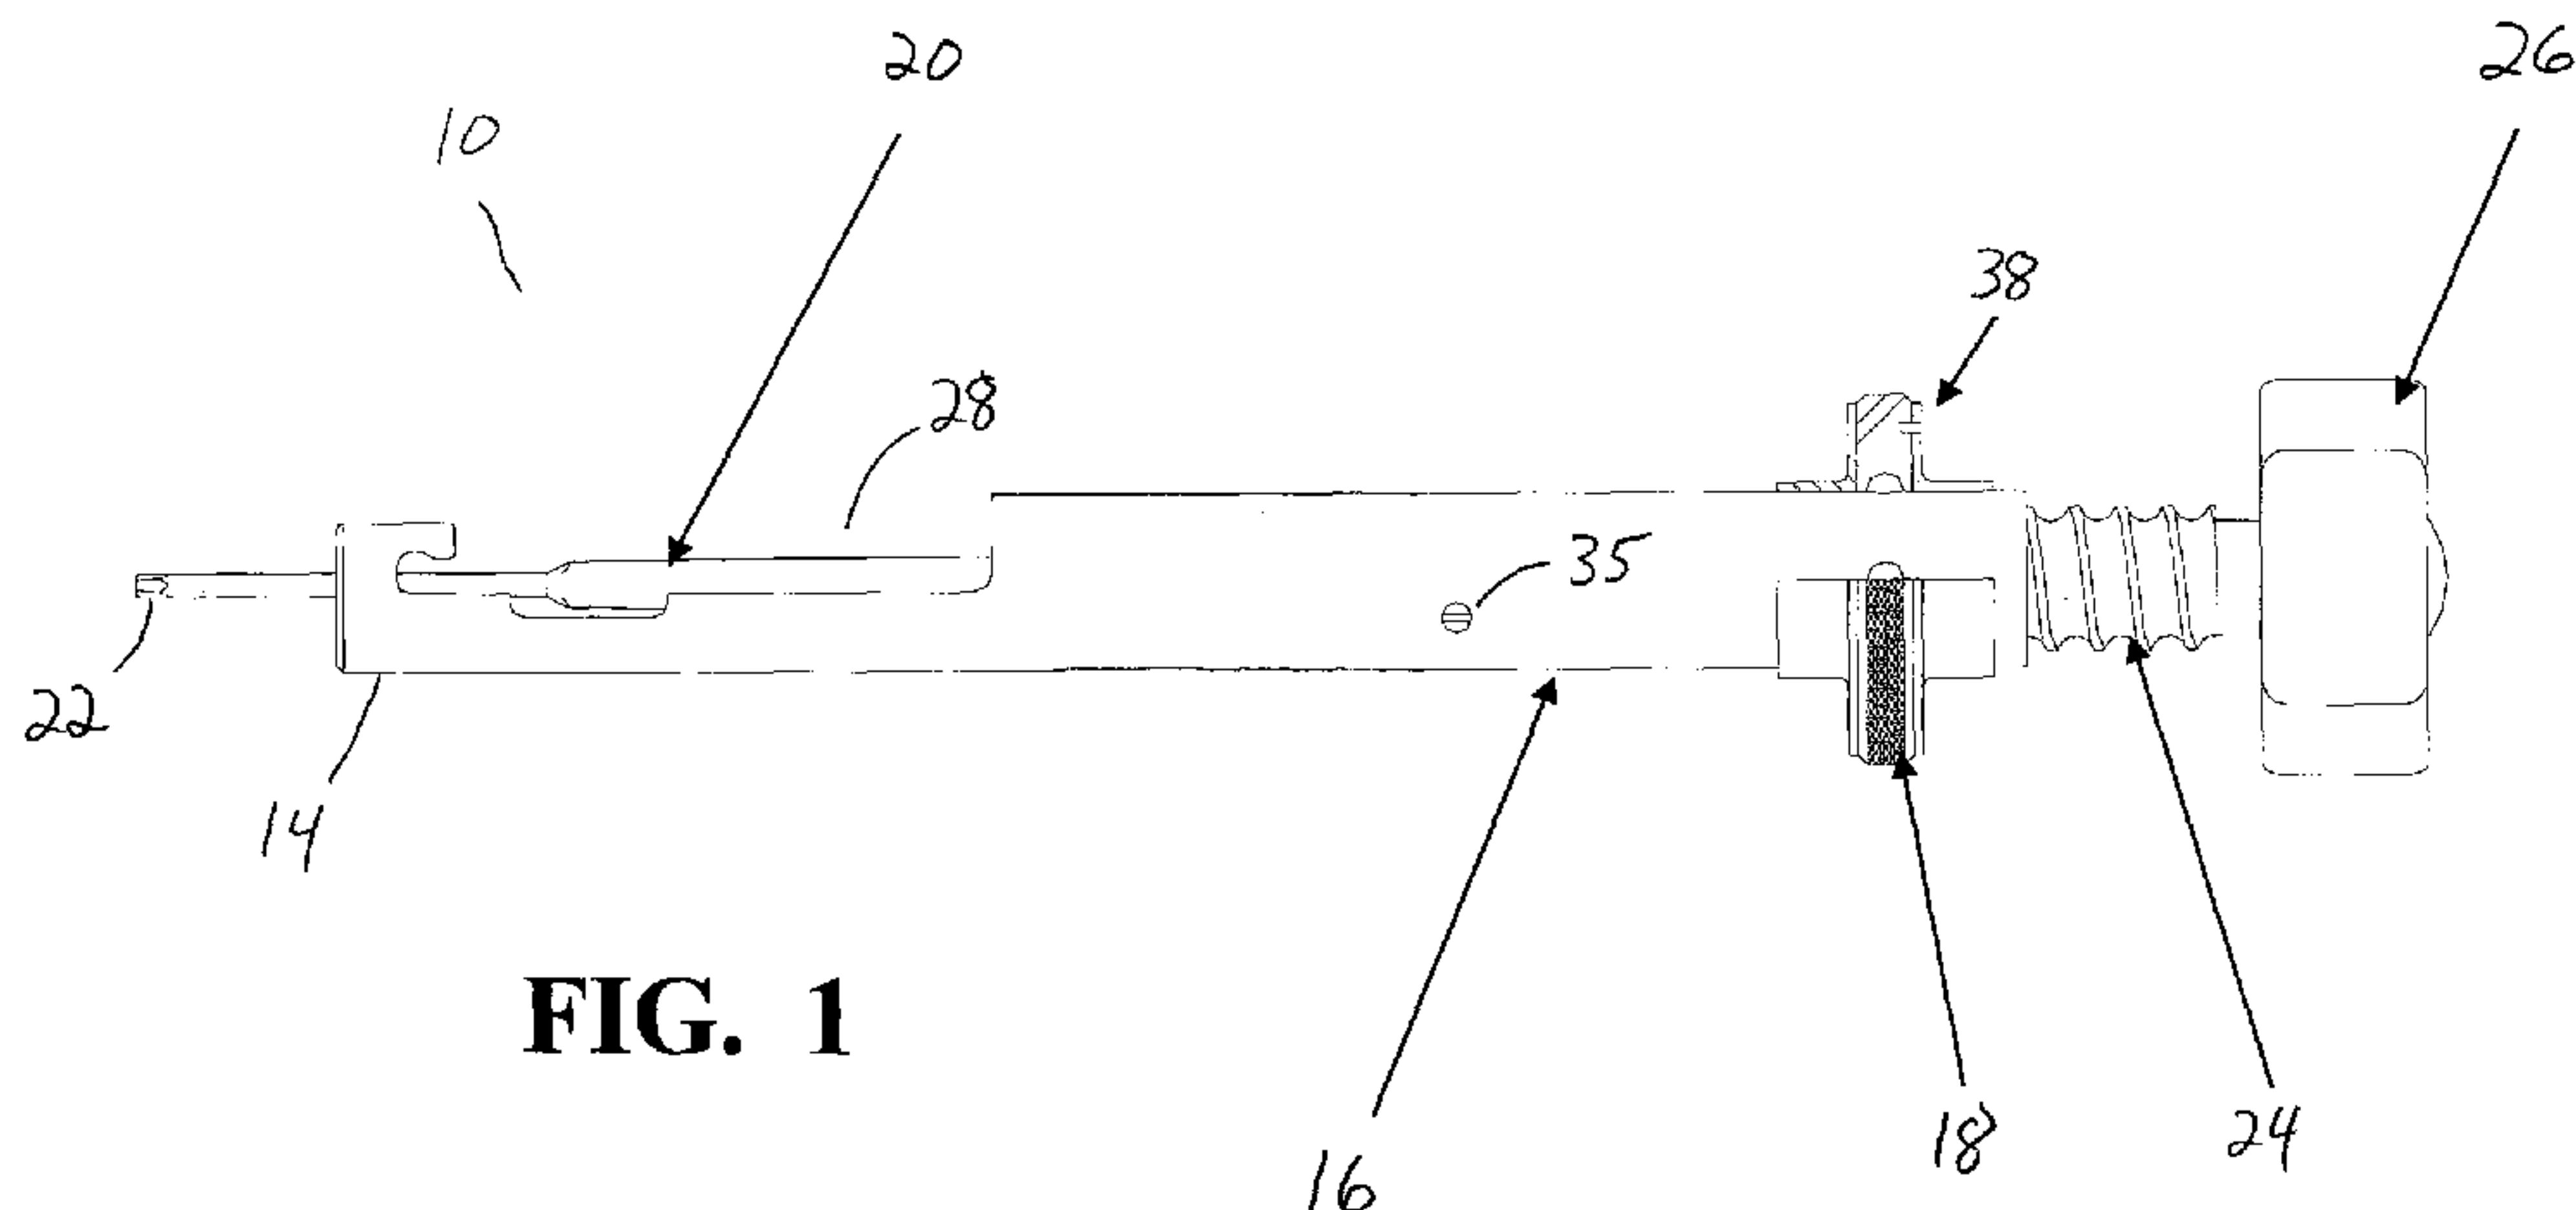


FIG. 1

(57) Abstract: A lens delivery system handpiece having a threaded plunger rod with a ball lock ring. Locking the ring causes the plunger to be advanced by turning a thumbscrew or knob. Unlocking the ring allows the plunger to be advanced by pushing on the thumbscrew or knob in a manner similar to a syringe.

WO 2009/058929 A1

LENS DELIVERY SYSTEM

This invention relates to intraocular lenses (IOLs) and more particularly to devices used to inject IOLs into an eye.

5

Background of the Invention

The human eye in its simplest terms functions to provide vision by transmitting and refracting light through a clear outer portion called the cornea, and further focusing 10 the image by way of the lens onto the retina at the back of the eye. The quality of the focused image depends on many factors including the size, shape and length of the eye, and the shape and transparency of the cornea and lens.

When trauma, age or disease cause the lens to become less transparent, vision 15 deteriorates because of the diminished light which can be transmitted to the retina. This deficiency in the lens of the eye is medically known as a cataract. The treatment for this condition is surgical removal of the lens and implantation of an artificial lens or IOL.

While early IOLs were made from hard plastic, such as polymethylmethacrylate 20 (PMMA), soft, foldable IOLs made from silicone, soft acrylics and hydrogels have become increasingly popular because of the ability to fold or roll these soft lenses and 25 insert them through a smaller incision. Several methods of rolling or folding the lenses are used. One popular method is an injector cartridge that folds the lenses and provides a relatively small diameter lumen through which the lens may be pushed into the eye, usually by a soft tip plunger. The most commonly used injector cartridge design is illustrated in U.S. Patent No. 4,681,102 (Bartell), and includes a split, longitudinally hinged cartridge. Similar designs are illustrated in U.S. Patent Nos. 5,494,484 and 5,499,987 (Feingold) and 5,616,148 and 5,620,450 (Eagles, et al.). In an attempt to avoid 30 the claims of U.S. Patent No. 4,681,102, several solid cartridges have been investigated, see for example U.S. Patent No. 5,275,604 (Rheinisch, et al.) and 5,653,715 (Reich, et al.).

The handpieces used with prior art cartridges generally push the lens through the 35 cartridge using a plunger. The plunger is either pushed by the user (similar to a syringe) or is threaded and is advanced by turning a thumbwheel. Surgeon preference generally dictates which style handpiece is used but it is advantageous that a single handpiece contain a mechanism that allows both types of movement.

Accordingly, a need continues to exist for a lens delivery system handpiece having a plunger that can be advanced by pushing or by turning of a thumbscrew.

Brief Summary of the Invention

The present invention improves upon prior art by providing a lens delivery system handpiece having a threaded plunger rod with a ball lock ring. Locking the ring causes 5 the plunger to be advanced by turning a thumbscrew or knob. Unlocking the ring allows the plunger to be advanced by pushing on the thumbscrew or knob in a manner similar to a syringe.

It is accordingly an object of the present invention to provide a lens delivery system having a handpiece with a locking ring.

10 It is a further object of the present invention to provide a lens delivery system having a handpiece with a plunger that can be advanced by pushing or turning a knob.

Other objectives, features and advantages of the present invention will become apparent with reference to the drawings, and the following description of the drawings and claims.

15

Brief Description of the Drawings

FIG. 1 is a side elevational view of the handpiece of the lens delivery system of the present invention.

20 FIG. 2 is a cross-sectional view of the ball lock ring of the handpiece illustrated in FIG. 1 showing the lock ring in the locked position.

FIG. 3 is a cross-sectional view of the ball lock ring of the handpiece illustrated in FIG. 1 showing the lock ring in the unlocked position.

25 FIG. 4 is a perspective view of a cartridge that may be used with the lens delivery system of the present invention.

FIG. 5 is a cross-section view of the handpiece of the lens delivery system of the present invention.

30

Detailed Description of the Invention

As best seen in FIGS. 1 and 4, lens delivery system 10 of the present invention generally includes cartridge 12 and handpiece 14. Handpiece 14 generally consists of barrel 16, ball lock ring 18 (shown in FIG. 1 in partial cross-section) and plunger rod 20.

As best seen in FIGS. 1 and 5, plunger rod 20 contains distal tip 22 and proximal end 23 which is rotationally journaled into grooved outer shaft 24 so that outer shaft 24 spins freely on proximal end 23 of plunger rod 20. Rigidly attached to outer shaft 24 is knob 26. Pin 35 fits against flat portion 37 of plunger rod 20 so that rotation of knob 26 and outer shaft 24 does not cause plunger rod 20 to rotate, but that plunger rod 20 may freely reciprocate within barrel 16. Barrel 16 contains notched portion 28 into which cartridge 12 is received so that tip 22 of plunger rod 20 reciprocates within bore 30 of cartridge 12.

As best seen in FIGS. 2 and 3, ball lock ring 18 contains a plurality of balls 34 sized to fit within groove 32 of outer shaft 24. Ring 18 also contains a plurality release angles 36 opposite groove 32 corresponding to the location of balls 34. As shown in FIG. 2, rotating ball lock ring 18 counter-clockwise forces balls 34 into groove 32 and prevents plunger rod 20 from being advanced by pushing on knob 26. Instead, turning of knob 26 causes balls 34 to ride within groove 32 of grooved outer shaft 24, thereby threadedly pushing or pulling on proximal end 23 of plunger rod and causing corresponding reciprocation of tip 22 of plunger rod 20 within bore 30 of cartridge 12. As best seen in FIG. 3, rotating ball lock ring 18 clockwise forces balls 34 out of groove 32 and allows plunger rod 20 to be advanced by pushing on knob 26. Index pin 38 and slot 40 prevent over-rotation of ball lock ring 18.

While certain embodiments of the present invention have been described above, these descriptions are given for purposes of illustration and explanation.

Claims:

1. An intraocular lens delivery system, comprising:
 - 5 a) a cartridge having a bore;
 - b) a handpiece, the handpiece having a notched portion for receiving the cartridge;
 - c) a plunger coaxially received in the handpiece, the plunger having a distal tip and a proximal end opposite the distal tip, the tip reciprocating within the bore of the cartridge when the cartridge is received in the notched portion of the handpiece;
 - 10 d) a grooved outer shaft received on the proximal end of the plunger, the grooved outer shaft having a knob rigidly attached thereon;
 - e) a ball lock ring rotationally mounted on the handpiece, the ball lock ring having a plurality of locking balls that ride within the groove of the outer shaft; and
 - f) a plurality of release angles in the ball lock ring corresponding to the locking balls, 15 the release angles alternatively forcing the locking balls into and out of the groove in the outer shaft in response to rotation of the ball lock ring as the knob is turned, wherein the plunger is slidably advanceable to a distalmost injection position of slidable advancement by pushing the knob when the locking balls are out of the groove and the plunger is threadedly advanceable to the distalmost injection position of slidable advancement by turning the knob 20 when the locking balls are in the groove allowing the intraocular lens to be selectively injected either by slidable or threaded advancement.
2. The lens delivery system of claim 1 wherein forcing the locking balls out of the groove in the outer shaft allows the plunger to be pushed within the handpiece.
- 25 3. The lens delivery system of claim 1 wherein rotation of the grooved outer shaft causes the plunger to reciprocate within the handpiece.

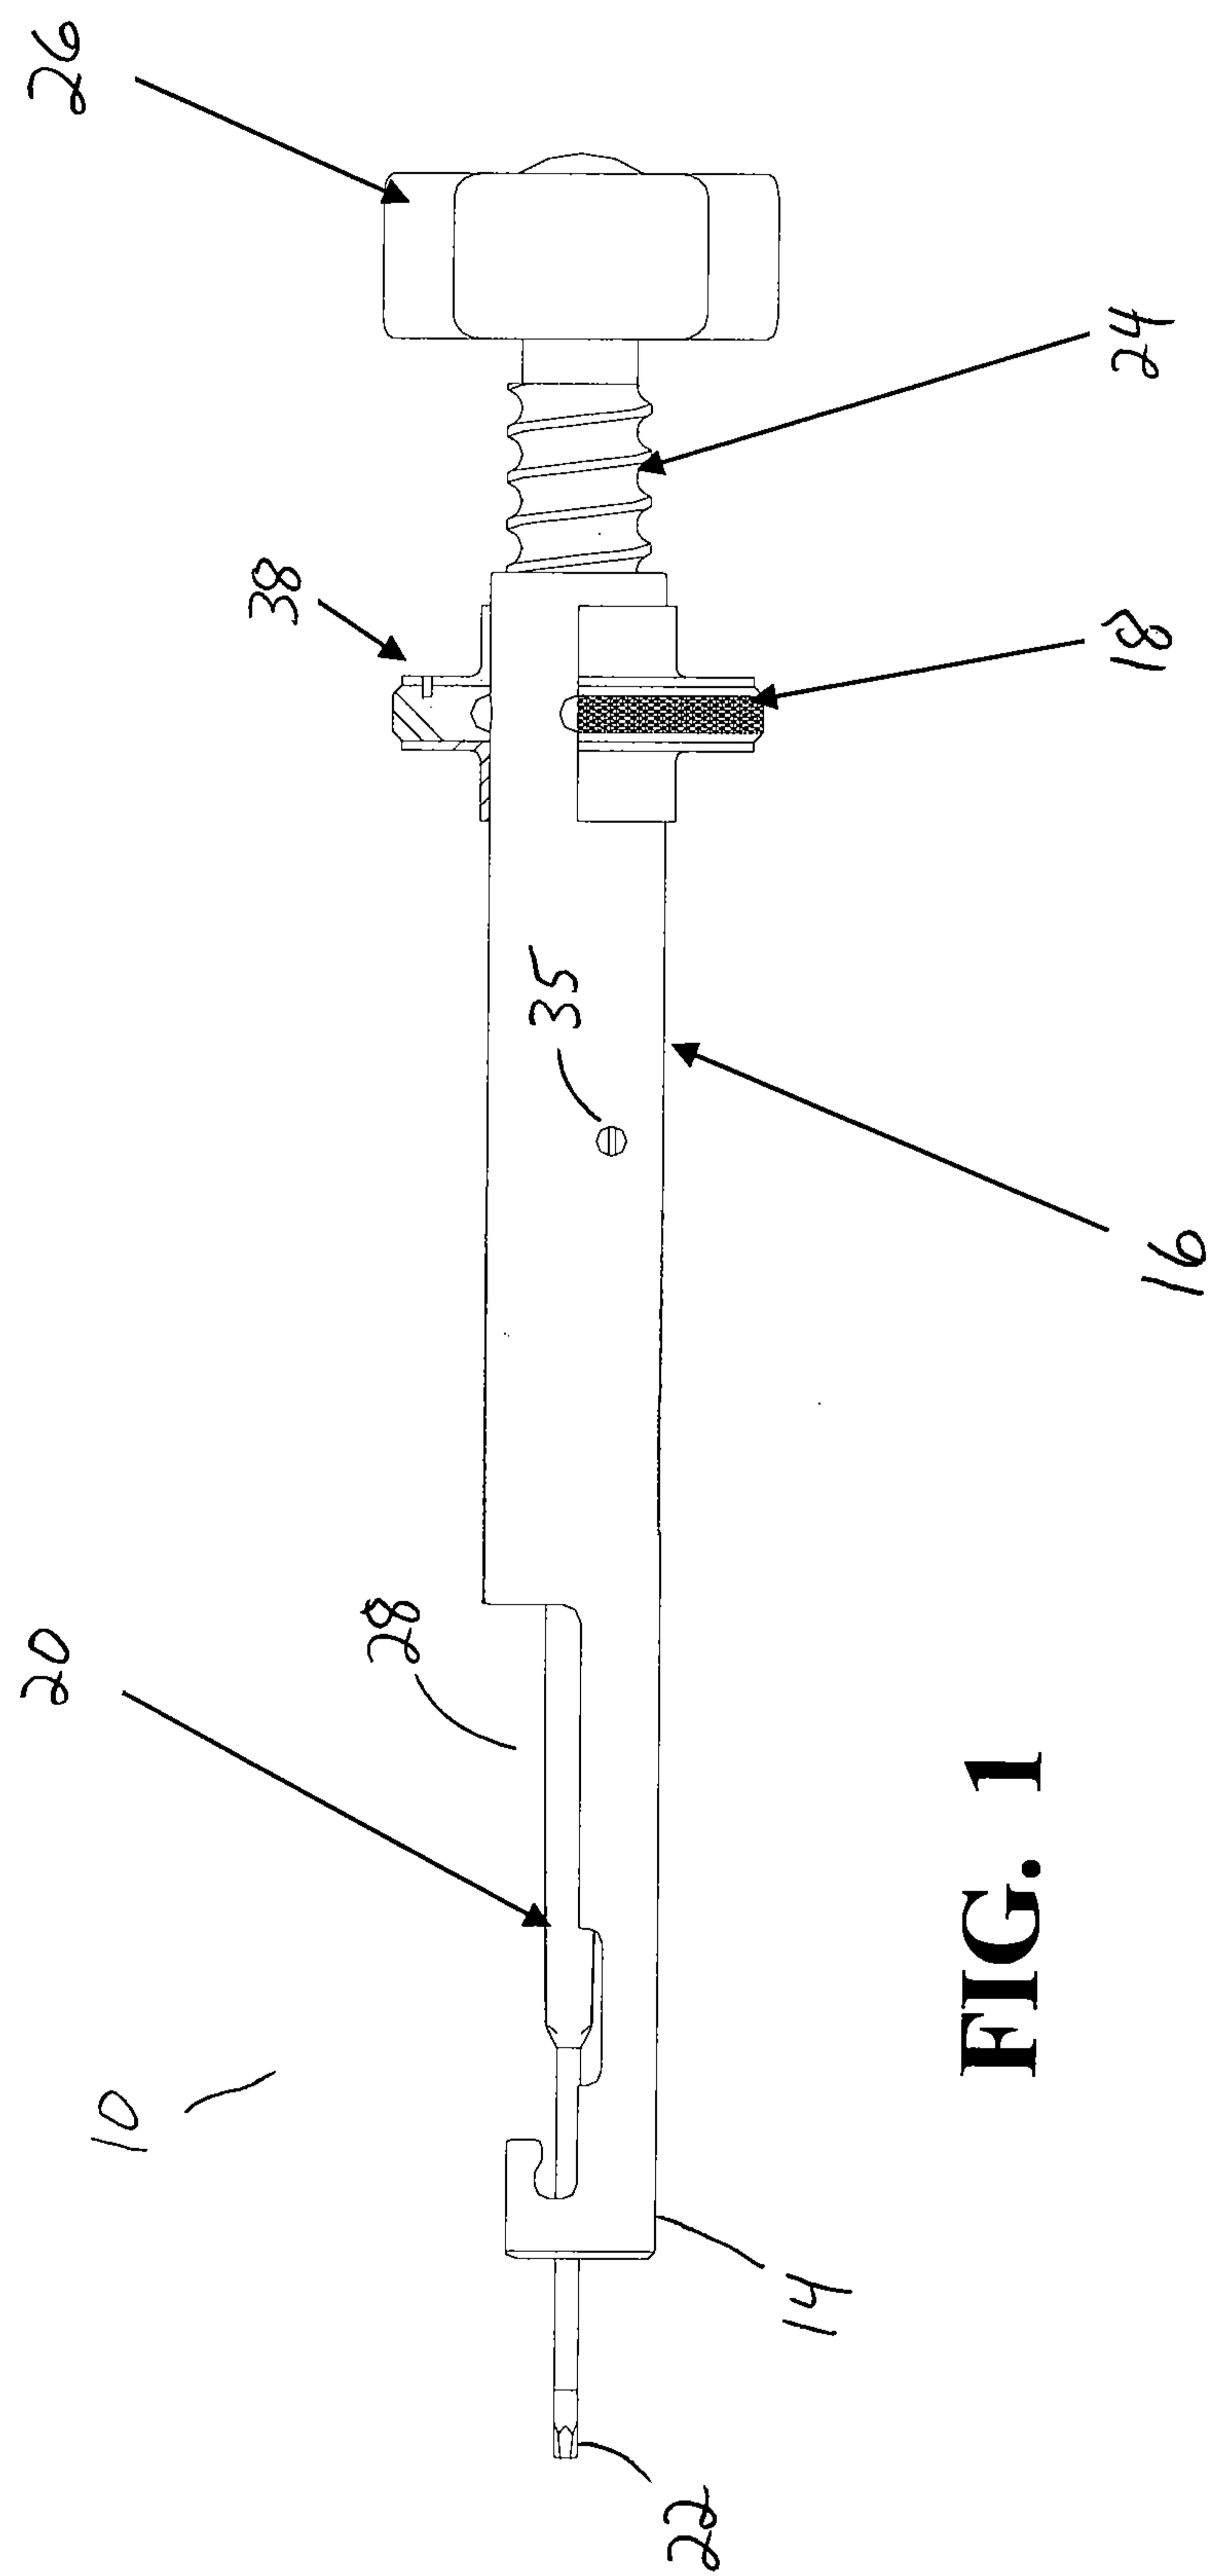


FIG. 1


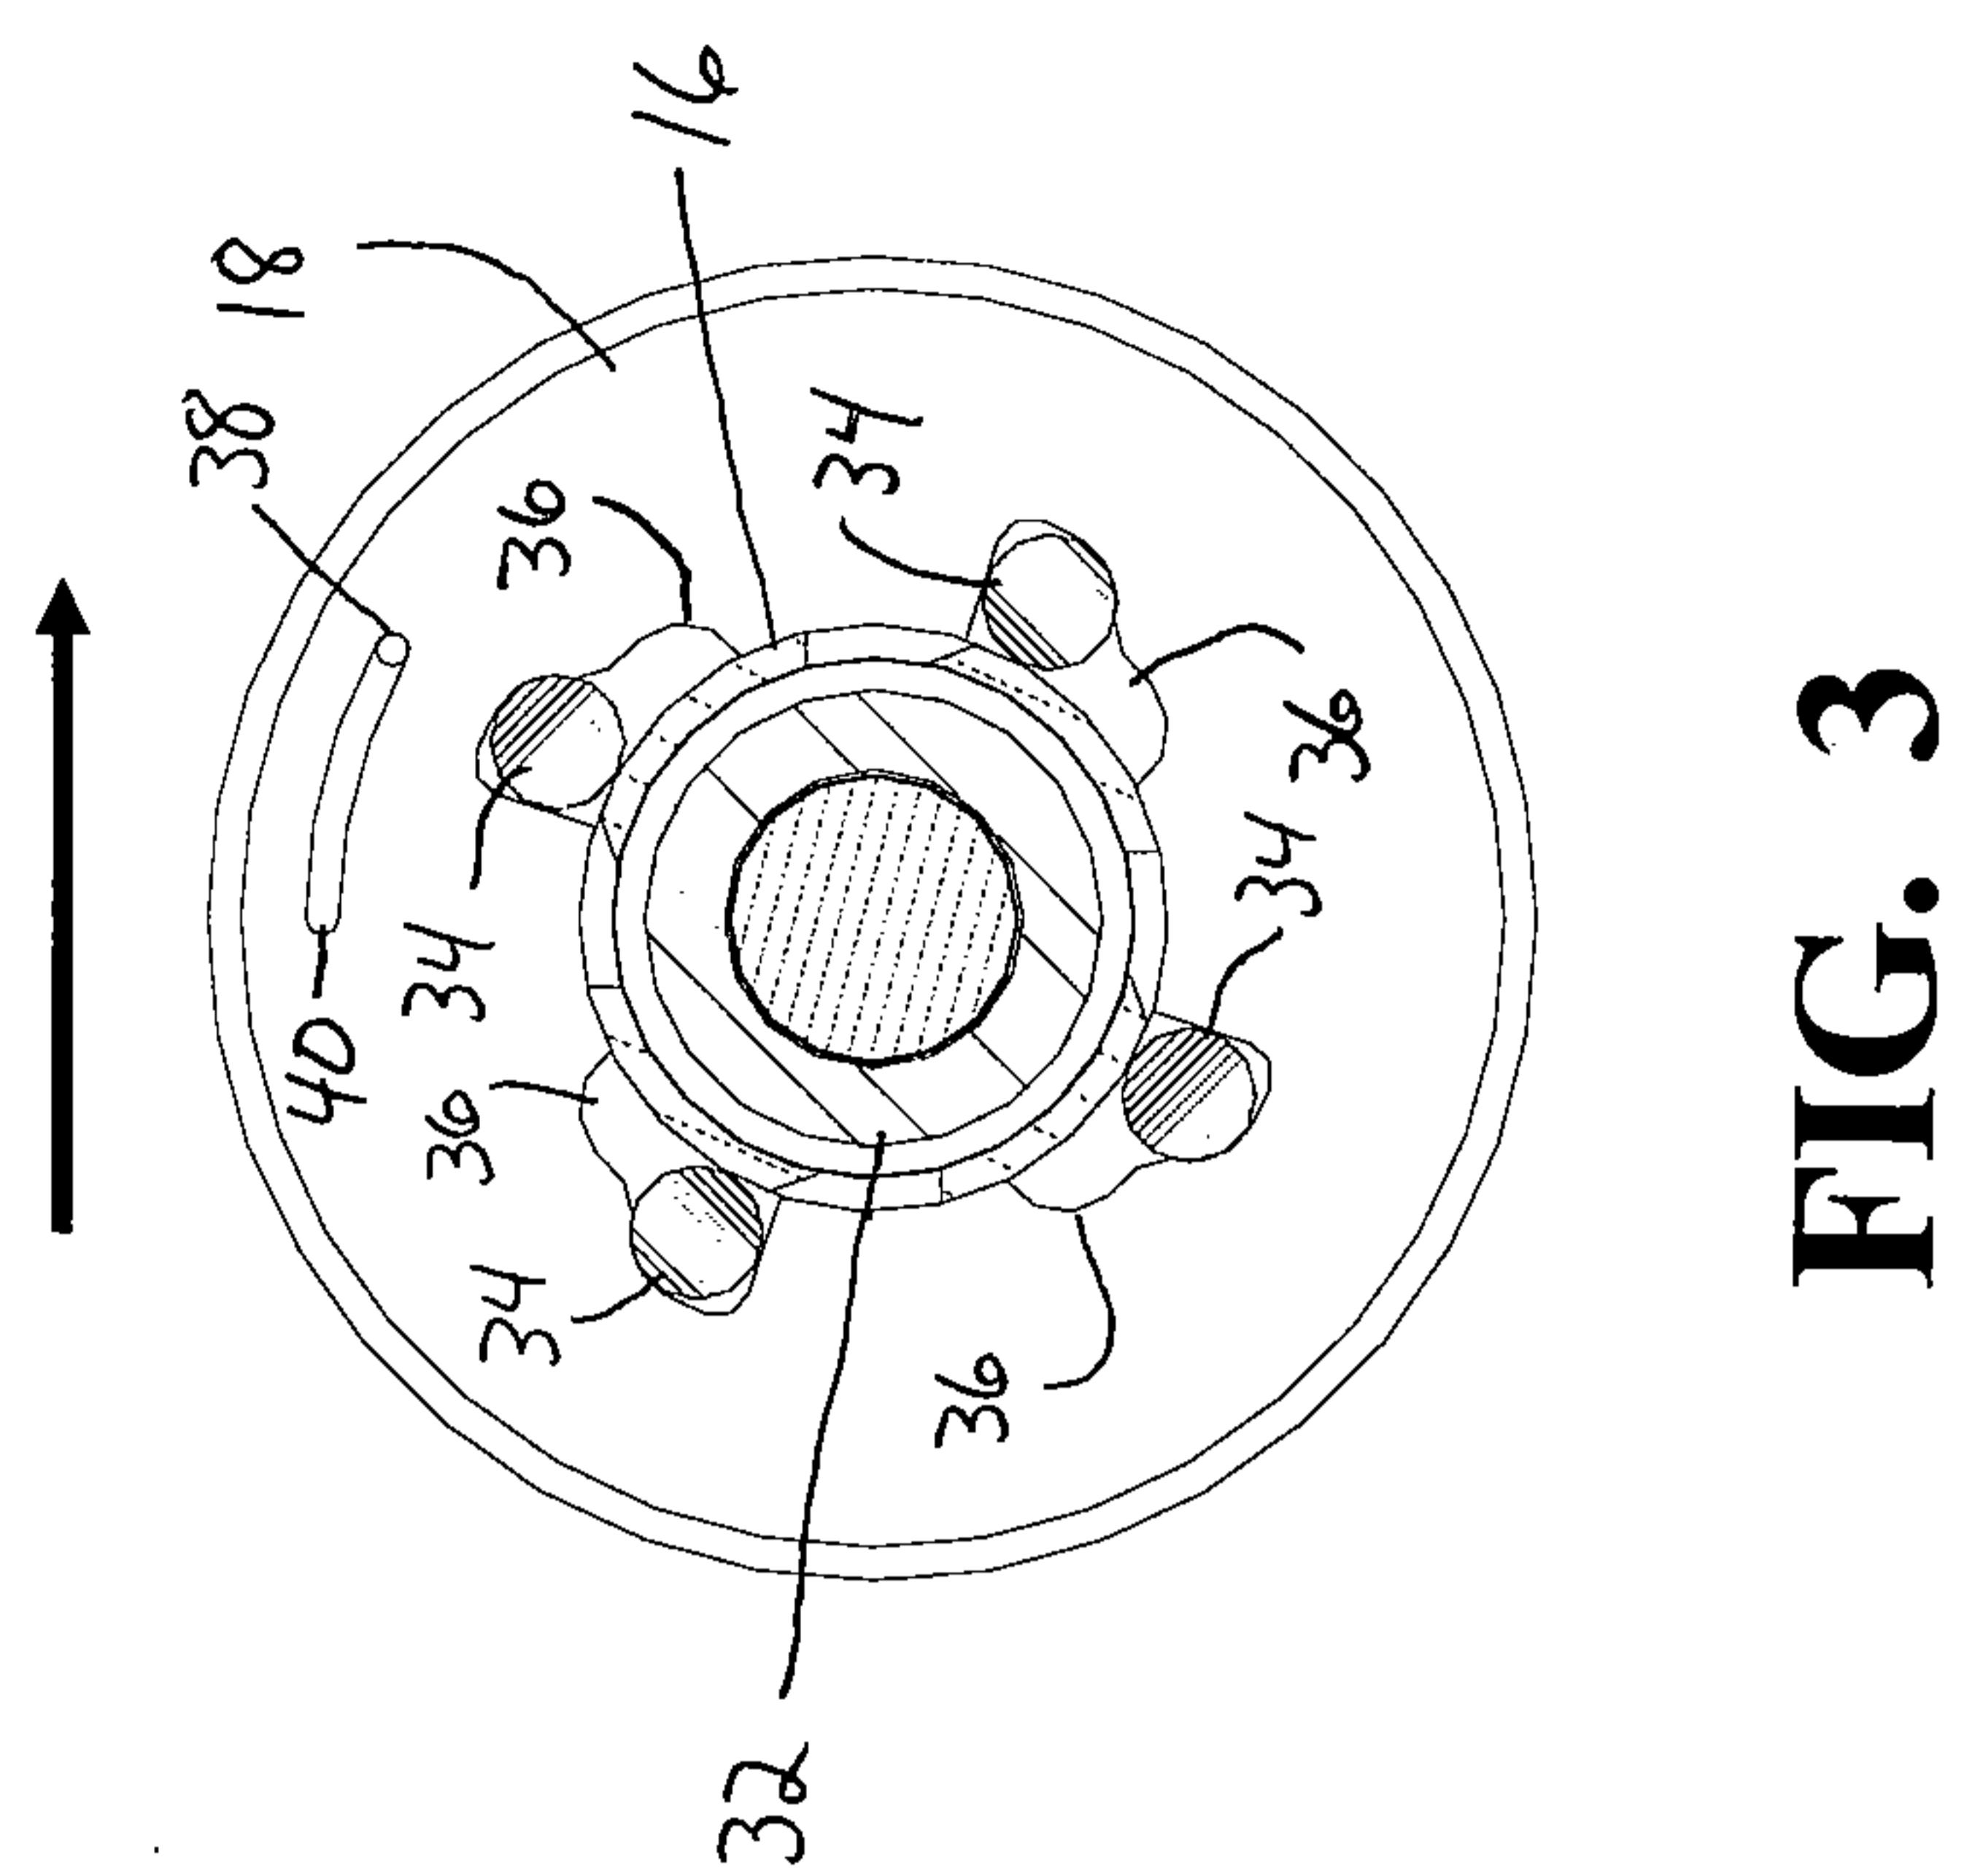
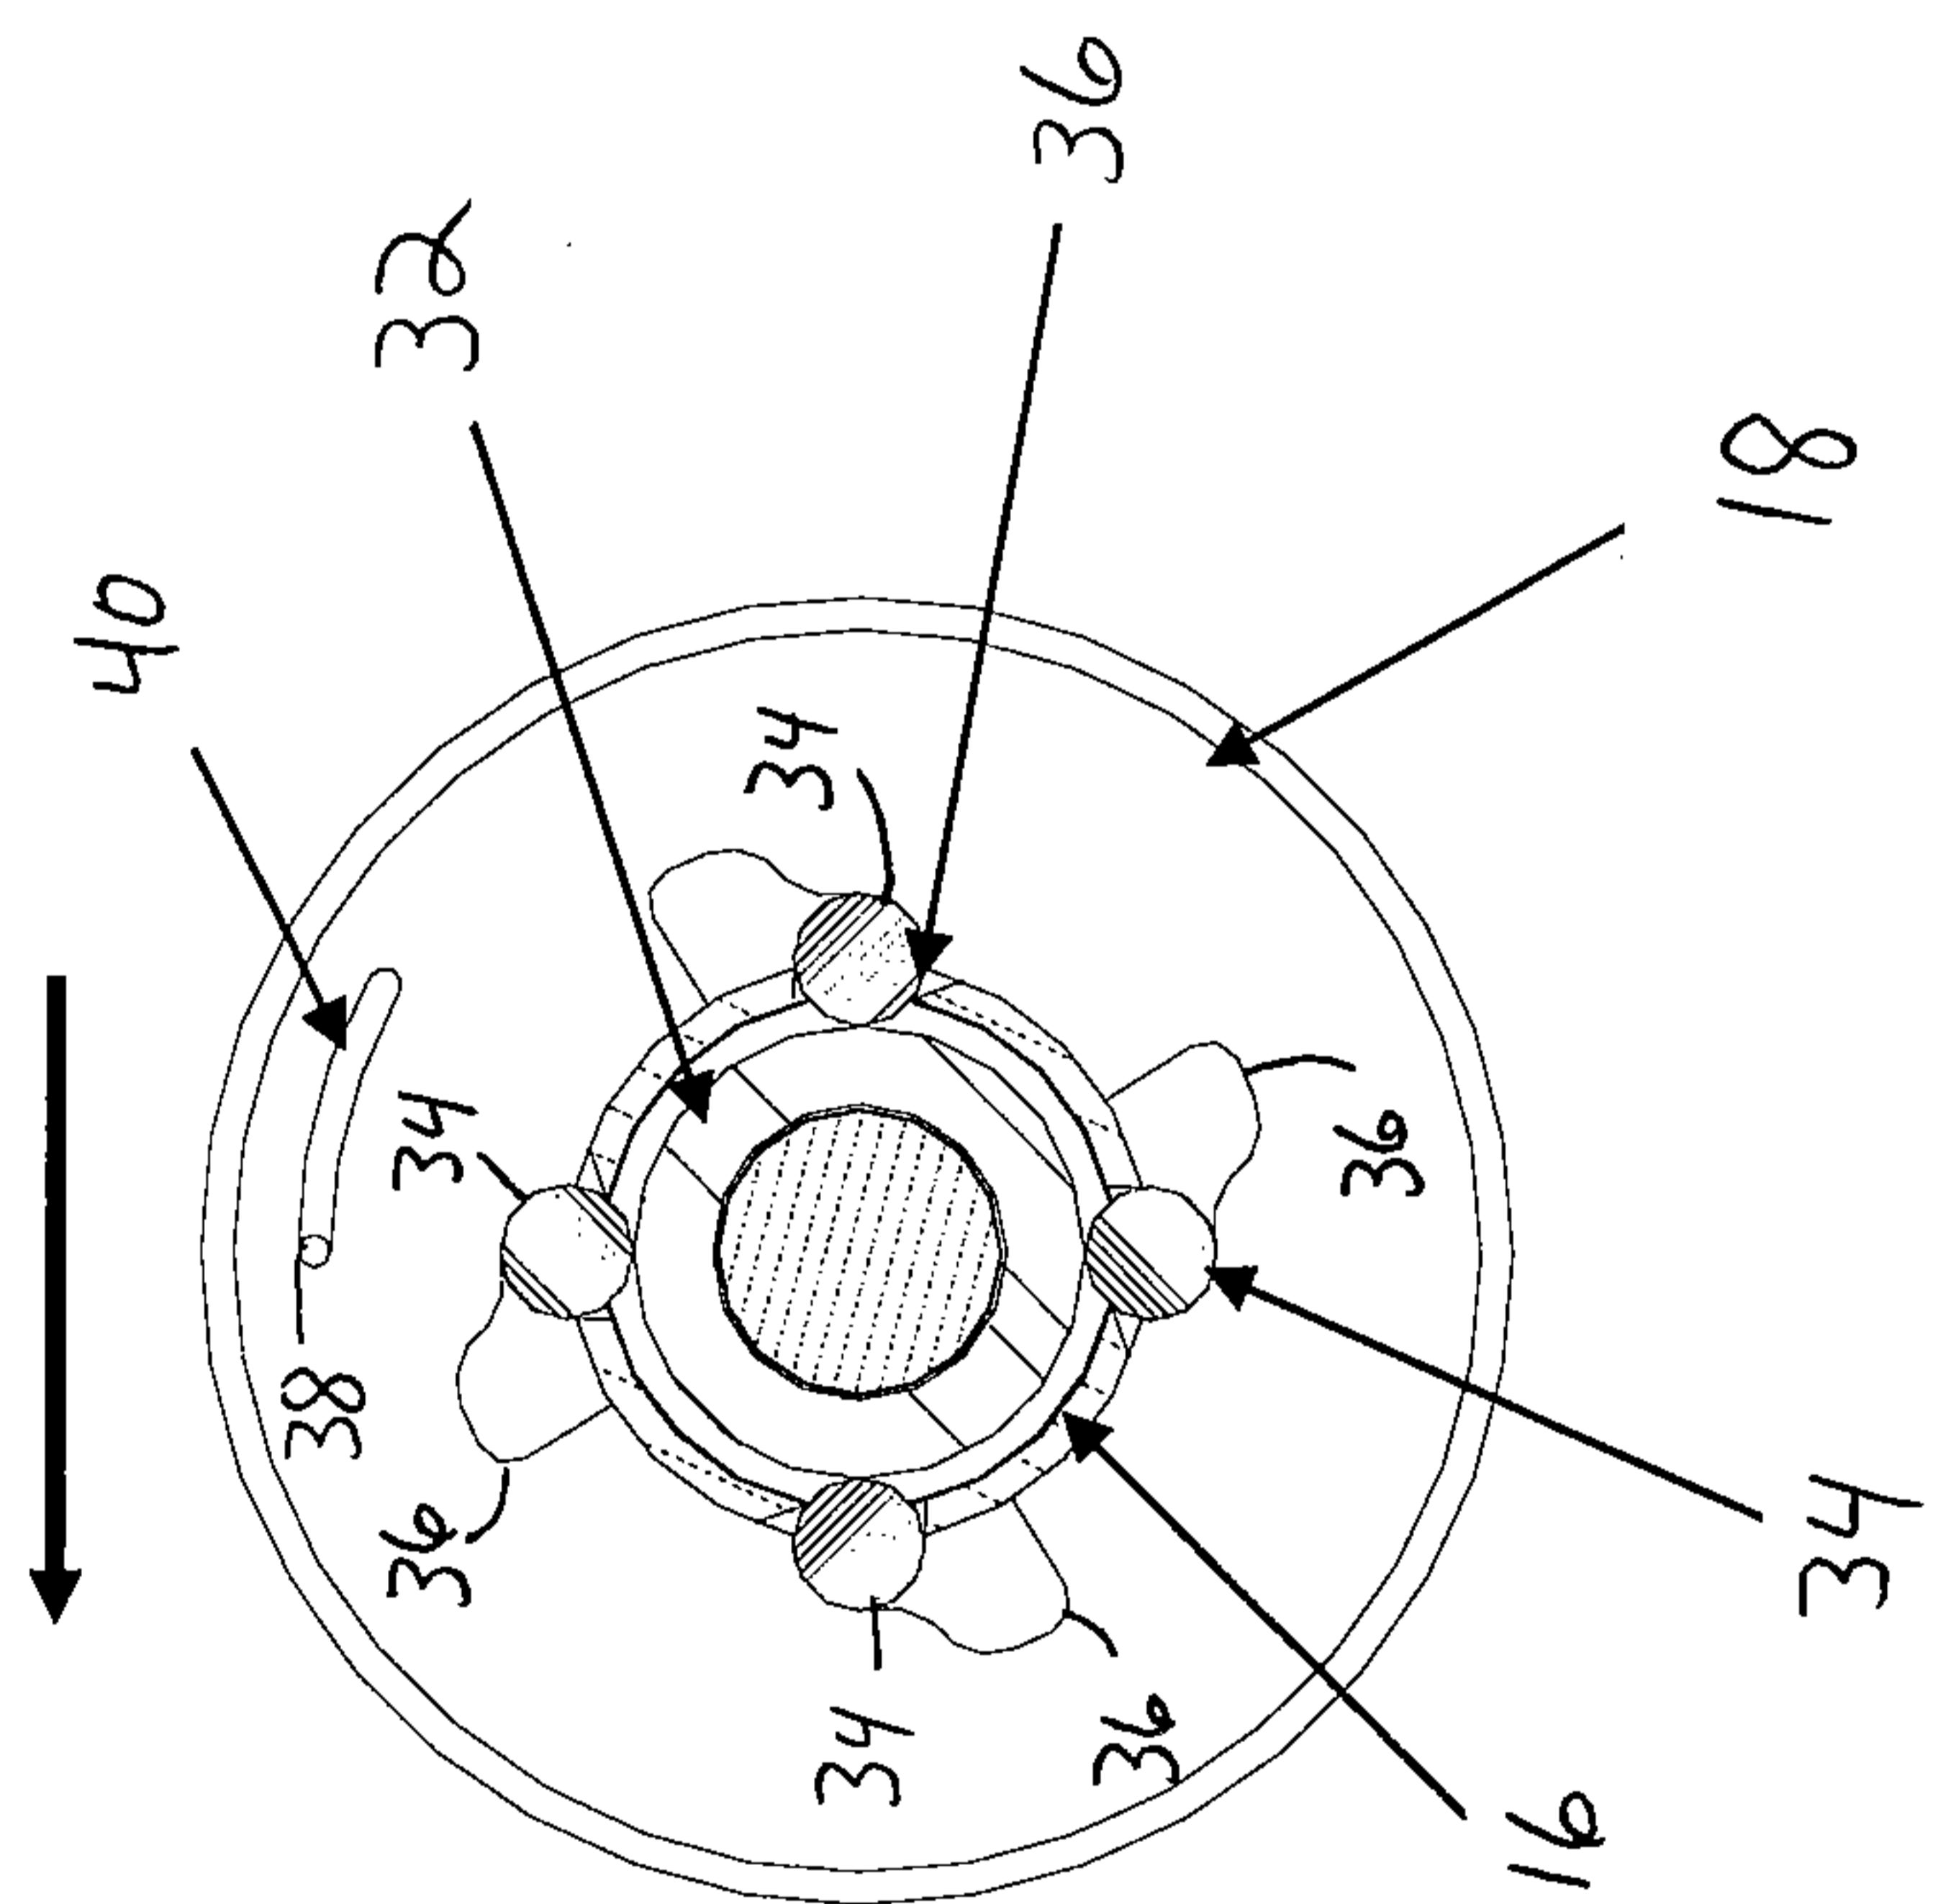
**FIG. 3****FIG. 2**

FIG. 4

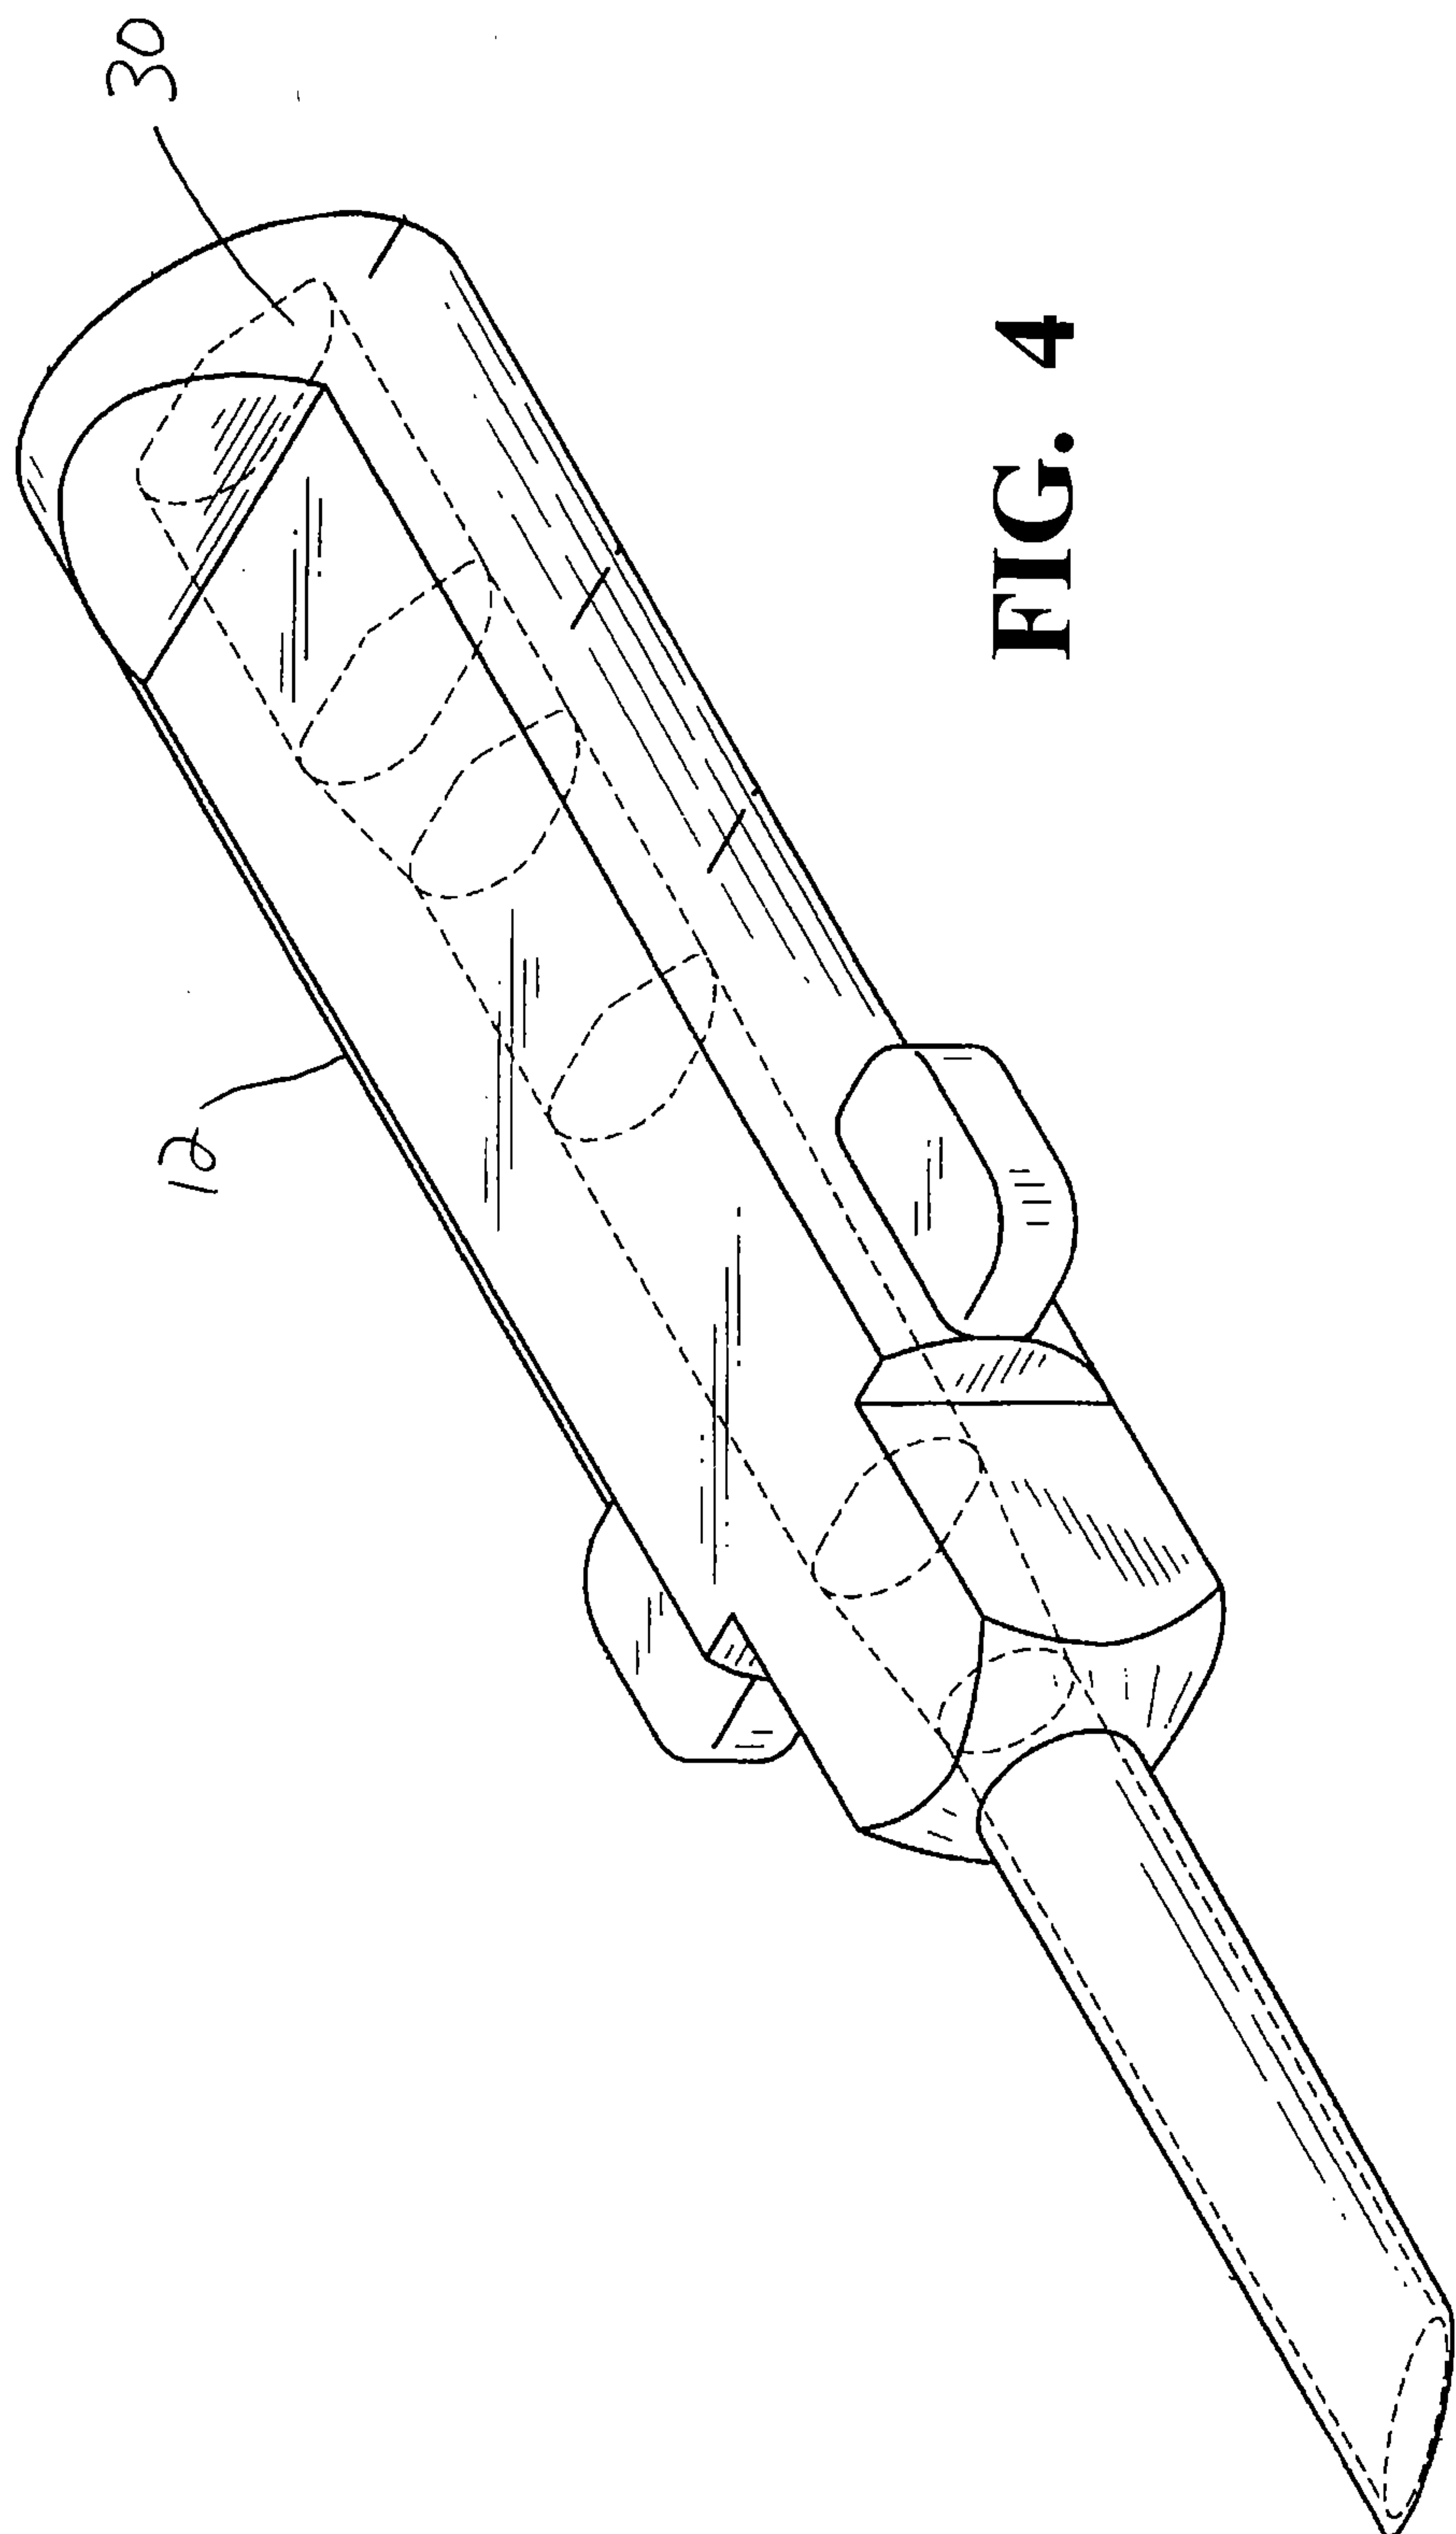

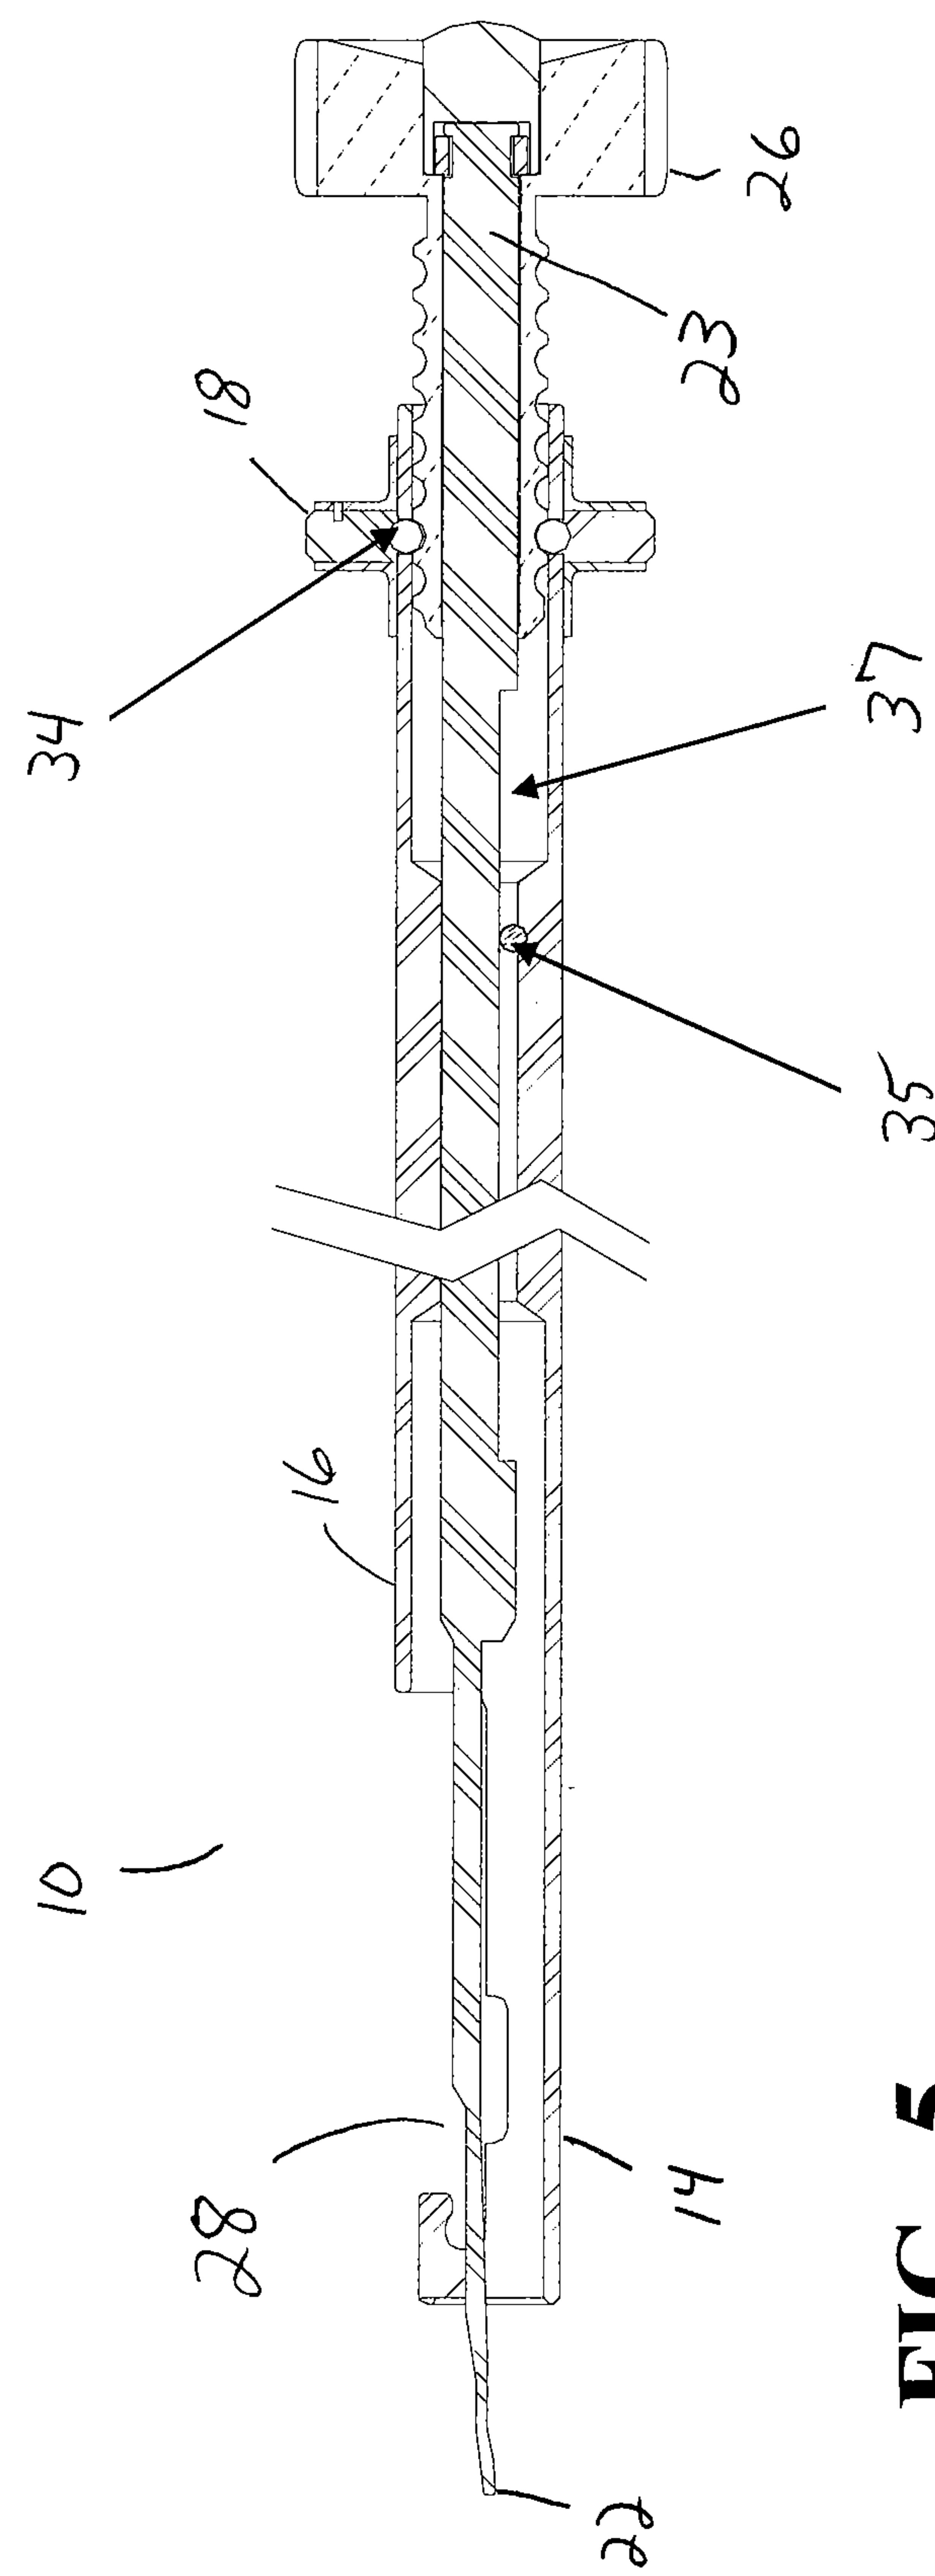


FIG. 5

