

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 February 2009 (12.02.2009)

PCT

(10) International Publication Number  
**WO 2009/019269 A1**

(51) International Patent Classification:

*F01L 1/24* (2006.01) *F01L 1/053* (2006.01)  
*F01L 1/18* (2006.01) *F01L 13/06* (2006.01)

(21) International Application Number:

PCT/EP2008/060274

(22) International Filing Date: 5 August 2008 (05.08.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

07425512.6 6 August 2007 (06.08.2007) EP

(71) Applicant (for all designated States except US): **IVECO S.P.A.** [IT/IT]; Via Puglia 35, I-10156 Torino (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MARIANO, Daniele** [IT/IT]; Corso Spezia 53, scala 4, I-10126 Torino

(IT). **BINDER, Mathias** [CH/CH]; Walhallastrasse 7, CH-9320 Arbon (CH).


(74) Agent: **BORSANO, Corrado**; NOTARBARTOLO & GERVASI S.p.A., Corso di Porta Vittoria 9, I-20122 Milan, (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: DEVICE FOR ACTUATING THE DECOMPRESSION ENGINE BRAKE IN AN INTERNAL COMBUSTION ENGINE PROVIDED WITH HYDRAULIC TAPPETS

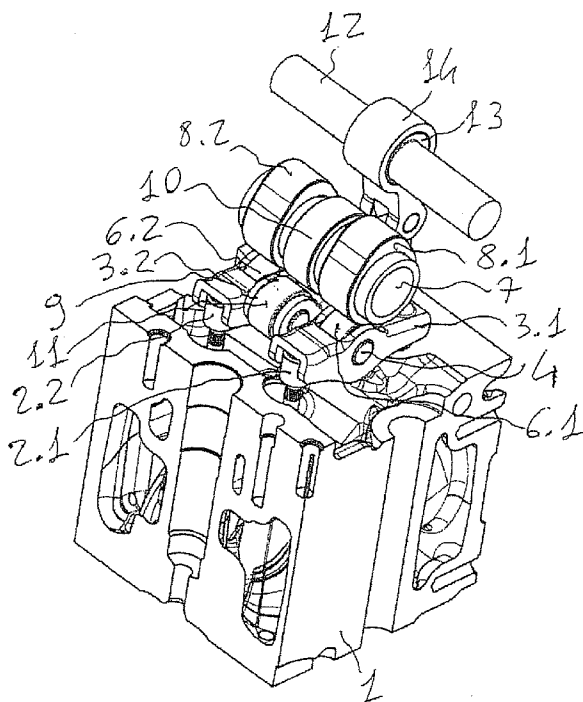

**FIG. 1**

(57) Abstract: A device for actuating the decompression engine brake in an internal combustion engine provided with hydraulic tappets is described, characterized by: an additional rocker arm (9) for each cylinder, pivoting about an axis (4) common to the rocker arms of the exhaust valves, and suitable to engage with a corresponding additional cam (10) arranged on the cam axis (7) of the cylinders; an actuator system for said additional rocker arm (9), for each cylinder. In the actuator system of said additional rocker arm (9) there is a piston (15) hinged to an end of said rocker arm, said piston (15) being in its turn moved hydraulically or by a mechanical system comprising an additional arm (12) controlled by eccentric cams (13).



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,  
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,  
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

**Published:**

— *with international search report*

**Declarations under Rule 4.17:**

— *as to applicant's entitlement to apply for and be granted a  
patent (Rule 4.17(ii))*

**DEVICE FOR ACTUATING THE DECOMPRESSION ENGINE BRAKE IN AN  
INTERNAL COMBUSTION ENGINE PROVIDED WITH HYDRAULIC TAPPETS**

FIELD OF THE INVENTION

The present invention relates to a device for actuating the  
5 engine brake in an internal combustion engine and, more  
specifically, to a device for actuating the decompression  
engine brake in an internal combustion engine provided with  
hydraulic tappets.

PRIOR ART

10 Systems are known in the prior art in which an additional  
exhaust valve or flap is added to increase the pressure,  
pressurize the engine and increase braking power.

However, such systems are inadequate for high power  
applications.

15 For applications involving high inertia loads, for example in  
the case of heavy goods vehicles, compression release engine  
braking systems are used, in which the exhaust valve(s)  
is(are) opened prematurely with respect to the piston motion.  
This is effected by additional openings of the exhaust valves  
20 by means of specific actuators.

For example an additional opening of the exhaust valves can  
be effected by means of an additional cam lift at the end of  
the compression stage, with a cam advance of approx. 70  
degrees.

25 Therefore the principle of braking the engine inertia is

based on the decompression in the combustion chamber during the compression stage stroke is already known in the art. Such systems use the energy accumulated in the form of pressure during the air compression cycle to "brake" the inertia or mass connected to the crankshaft.

Some of the decompression engine braking systems known in the art are used in engines provided with mechanical tappets. These however are more robust than hydraulic tappets, and also accept loads with a horizontal component, which simplifies the actuating mechanisms required to actuate the decompression.

Engines provided with hydraulic tappets however present an additional problem in that such tappets are more fragile than the mechanical ones.

In order to work, hydraulic tappets always require a minimum vertical load, which provides a constant (at least minimum) pressing force, otherwise they expand too much and risk being damaged.

Moreover, hydraulic tappets are able to withstand loads with a vertical component, but can only accept loads with a modest horizontal component. A horizontal component could cause permanent damage.

Therefore devices and/or actuators must be provided which increase the complexity of the mechanisms, and the problem arises of the need for solutions that are not excessively

complicated, bulky or expensive.

#### SUMMARY OF THE INVENTION

Therefore the aim of the present invention is to overcome the drawbacks and disadvantages of the prior art with a  
5 decompression braking device for an internal combustion engine provided with hydraulic tappets that is extremely simple to produce and thus highly reliable.

Another purpose of the present invention is to provide a decompression braking device for an internal combustion  
10 engine provided with hydraulic tappets, that is robust, of limited dimensions, requires little maintenance and represents a low cost solution.

The present invention relates to a device for actuating the compression release engine brake in an internal combustion  
15 engine, said combustion engine comprising: one or more cylinders in line each provided with one or more exhaust valves; respective rocker arms and hydraulic tappets being connected to said exhaust valves; said rocker arms being provided with a common axis for each cylinder; a cam axis for  
20 said one or more cylinders in line, characterized in that it comprises: at least one additional rocker arm for each cylinder, pivoting about said common axis and suitable to engage with a corresponding additional cam arranged on said cam axis; at least one actuator system for said additional  
25 rocker arm, for each cylinder. Moreover, the device according

to the present invention may advantageously comprise at least an additional shaft provided with one or more additional cams, suitable to determine the motion of said actuator system for each cylinder, so that in a first position of said additional shaft, said additional rocker arm does not come into contact with said one or more additional cams, and in a second position of said additional shaft said additional rocker arm comes into contact with said one or more additional cams to determine the actuation of said engine brake.

As an alternative, the device for actuating the compression release engine brake according to the present invention, may comprise, instead of said additional shaft provided with one or more additional cams, a hydraulic actuator system of the rocker arm, which exploits the oil pressure in the engine circuit.

In particular the present invention relates to a device for actuating the decompression engine brake in an internal combustion engine provided with hydraulic tappets, and the relative engine provided with said device, as described more fully in the claims, which are an integral part of this description.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be illustrated through the following detailed description of a preferred embodiment of

the decompression braking device in an internal combustion engine provided with hydraulic tappets according to the present invention, provided merely by way of example, with the help of the drawings attached hereto in which:

5 figures 1 to 4 are views from different angles of the part of the cylinder head comprising the device for actuating the engine brake object of this invention, according to a first embodiment comprising an actuator system of said additional rocker arm by using shaft and rocker arms;

10 figures 5 and 6 are front and rear perspective views of the device for actuating the engine brake object of this invention according to the first embodiment shown in the figures from 1 to 4;

figures 7 and 8 are side views of the part of the cylinder  
15 head comprising the device for actuating the engine brake object of this invention according to a first embodiment, respectively with the engine brake activated and deactivated;

figures 9 and 10 are respectively a rear and side cross-section perspective view of the part of the cylinder head  
20 comprising an alternative embodiment of the device for actuating the engine brake according to this invention;

figures 11 and 12 show lateral views of the cylinder head part comprising the device for actuating the engine brake object of this invention according to a third embodiment of  
25 the actuator system, respectively in case of activated engine

brake or deactivated engine brake.

In the drawings the same numbers and letters indicate the same parts and components.

#### DETAILED DESCRIPTION OF THE INVENTION

5 The drawings show a part of the engine block 1 comprising a cylinder of a known type provided with a couple of exhaust valves 2.1 and 2.2, which are joined to one end of respective rocker arms 3.1 and 3.2.

A couple of hydraulic tappets 5.1 and 5.2. are joined to the  
10 other end of the rocker arms.

The rocker arms can rotate about a common axis 4 that comprises respective rollers 6.1 and 6.2.

A cam axis 7 arranged in a conventional manner over the rollers 6.1 and 6.2 comprises specific eccentric cams 8.1 and  
15 8.2 for the normal opening/closing of the exhaust valves 2.1 and 2.2.

In the engine there are normally a given number of cylinders in line (not shown in the drawings), which have the cam axis 7 in common.

20 According to the invention the engine brake function is actuated as follows.

An additional element 9 with the function of a rocker arm (hereinafter referred to as the rocker arm) is inserted and pivots centrally about the same axis 4 that is common to the  
25 other two rocker arms 3.1 and 3.2, in an intermediate



position between the latter; a third cam with eccentric 10 is included on the existing common cam axis 7.

At one end of the rocker arm 9 (the end towards the exhaust valves) there is a roller 11, while the other end 17 of the rocker arm 9 (towards the hydraulic tappets) is joined to an actuator system. According to a first preferred embodiment of the device according to the present invention, said actuator system comprises an additional shaft 12, provided with a cam 13.

Therefore, according to such first preferred embodiment, in the actuator system an end of a connecting rod 14 is inserted on the cam 13 and the other end of said connecting rod pivots about the end of a piston (or pin) 15, which can slide inside an appropriate retaining housing (hole or recess) 16 in the engine block.

The end 17 of the rocker arm 9 pivots about the piston 15.

In operation, the additional shaft 12 can rotate and assume two different angular positions indicated by letters A and B in the drawings. Thanks to the eccentric cam 13, the connecting rod end 14 connected thereto can assume two corresponding positions in order to move the piston 15 to a raised position or a lowered position.

In the raised position of the piston 15 (angular position A of the axis 12, fig. 8) the rocker arm 9 rotates about the axis 4 so as to move the roller 11 away from the eccentric

cam 10. In this condition the eccentric cam 10 never comes into contact with the roller 11. In this way the engine brake function is always deactivated.

In the lowered position of the piston 15 (angular position B of the axis 12, fig. 7), the rocker arm 9 rotates about the axis 4 and moves the roller 11 so that it comes into contact with the eccentric cam 10. In this way the engine brake function is activated; in fact the eccentric cam 10 is able to actuate the rocker arm 9 and lower it so as to determine an additional opening of the exhaust valves 2.1 and 2.2, besides that determined by the eccentric cams 8.1 and 8.2 and by the rocker arms 3.1 and 3.2.

When the eccentric cam 10 is placed in an appropriate angular position, the additional opening of the exhaust valves 2.1 and 2.2 is effected in a given phase of the engine cycle, towards the end of the compression phase, with a cam advance of approx. 70 degrees with respect to the normal exhaust phase.

In the example of the embodiment described here there is a distance of approx. 80 degrees between the two angular positions A and B.

In the case of cylinders in line in the engine, the additional shaft 12 is preferably common to all the cylinders in line, and is actuated, for example, by means of a pneumatic actuator, to actuate the engine brake function, by

moving it from angular position A to angular position B.

According to a second preferred embodiment of the actuator system of the rocker arm 9 of the device according to the present invention, shown in particular in figures 9 and 10,  
5 instead of the connecting rod 14 and the piston 15, there is a cylinder arm and spring system, comprising:

- a supporting plate 20 arranged against the eccentric cam 13 of the shaft 12;
- a first shaped body 21 at the upper end of which said  
10 plate 20 is present, and at the other end of which a cavity 22 is present into which a spring 23 is inserted;
- a second cylindrical body 24 set in the head, the outer end of which enters the cavity 22 and engages with the contrast spring 23, which holds the plate 20 against the  
15 eccentric cam 13.

The end 17 of the rocker arm 9 pivots about the shaped body 21.

The two angular positions A and B of the eccentric cam 13 determine the lifting or lowering of the plate 20 and of the shaped body 21 contrasted by the spring 23, and the two  
20 consequent positions of the rocker arm 9 to actuate or deactivate the engine brake function. The form of the shaped body 21 is such as to adapt the relative positions of the axes of the second cylindrical body 24 and of the additional  
25 shaft 12, and guarantee the perfect sliding of the two bodies

21 and 24.

Also, according to a third preferred embodiment of the actuator system of the engine brake device according to the present invention, the rocker arm 9 is hydraulically  
5 controlled by exploiting the oil in pressure in the oil engine circuit.

In this case, as shown in figures 11 and 12, neither the additional shaft 12 nor the eccentric cams 13 are present, and the piston 15 is directly activated by the hydraulic  
10 circuit. The movement of the piston between a position A of deactivated engine brake, shown in figure 12, and a position B of activated engine brake shown in figure 11, corresponds to the movement of the additional rocker arm 9, as for the embodiments previously described, between a position wherein  
15 the roller 11 does not come into contact with the cam (figure 12, deactivated engine brake) and a position wherein the roller 11 comes into contact with the third cam 10 (figure 11. activated engine brake).

In this case, as said, the movement of the piston 15 between  
20 the position A and the position B is directly controlled by a hydraulic actuator system, this results in a further advantage because additional components such as the additional shaft 12 and the eccentric cam 13 are no longer necessary.

25 This last alternative embodiment of the hydraulic brake

device according to the present invention has therefore a particularly simple construction and installation, being also less bulky so that it can more easily housed in the cylinder head cover.

5 In the case of engines in which the cylinders have a single exhaust valve, the present invention can be adapted by introducing a few variations within the scope of the invention, for example using the axis 7 of the eccentric cams that control the opening of the exhaust valves, and the axis  
10 4 of the exhaust valve rocker arm, where a double rocker arm can be inserted on said axis 4, so as to "straddle" the one that is already normally present and control this additional opening phase, acting in exactly the same way as the rocker arm 9 described above.

15 In case of engines with more than one line of cylinders, for example two lines, a device of the type described above is fitted for each line of cylinders.

The decompression braking device according to the present invention has several advantages.

20 Firstly, the braking device according to the present invention is extremely simple to produce and highly reliable. It absorbs all horizontal loads, eliminating these on the hydraulic tappets, and uses the same axis as the existing tappets.

25 It introduces a single control axis that is easily installed

on the cylinder head, only requiring some slight variations to the production of existing engines, using space that is available on the cylinder head cover. It can be actuated by means of a single control and therefore takes up a limited  
5 amount of space, it is robust and requires little maintenance and is therefore a low cost solution.

Moreover the actuator can be of any suitable type; one advantage of the present invention is that it can be mounted on the outside of the engine and in particular on the tappet  
10 cover. This means there are no particular problems as regards the compatibility of the actuator with the environment in which it is installed, due for example to temperature, vibrations, the presence of oil.

The use of the engine braking device with hydraulic tappets  
15 according to the present invention avoids the need to adjust valve clearance during the engine's working life (maintenance free).

## CLAIMS

1. Device for actuating a decompression engine brake in an internal combustion engine, said internal combustion engine comprising:

5 one or more cylinders in line, each provided with one or more exhaust valves (2.1, 2.2);

respective rocker arms (3.1, 3.2) and hydraulic tappets (5.1, 5.2) connected to said exhaust valves;

said rocker arms (3.1, 3.2) being provided with a common axis  
10 (4) for each cylinder;

a cam axis (7) for said one or more cylinders in line, characterized in that it comprises:

- at least one additional rocker arm (9), for each cylinder, pivoting about said common axis (4) and suitable to engage  
15 with a corresponding additional cam (10) arranged on said cam axis (7);

- at least one actuator system for said additional rocker arm (9), for each cylinder suitable to move said rocker arm (9) between a first position wherein said rocker arm (9) is not engaged against said additional cam (10) thus  
20 determining a deactivated engine brake condition, and a second position wherein said rocker arm (9) is engaged against said additional cam (10) thus determining an activated engine brake condition;

25 2. Decompression braking device in an internal combustion

engine (1) according to claim 1, characterized in that said actuator system of said additional rocker arm (9) for each cylinder comprises at least an additional shaft (12) provided with one or more additional cams (13) suitable for determining the movement of said rocker arm (9) for each cylinder so that in a first position (A) of said additional shaft (12), said additional rocker arm (9) is in contact with said one or more additional cams (13) determining the activation of said engine brake.

3. Decompression braking device in an internal combustion engine (1) according to claim 2, characterized in that said additional shaft (12) is suitable to rotate and assume said first position (A) and said second position (B) as respective angular positions.

4. Decompression braking device in an internal combustion engine (1) according to one or more of the previous claims, characterized in that in the case of two exhaust valves (2.1, 2.2) for each cylinder, said at least one additional rocker arm (9) pivots about said common axis (4) in an intermediate position between said two exhaust valves (2.1, 2.2).

5. Decompression braking device in an internal combustion engine (1) according to one or more of the previous claims, characterized in that said additional rocker arm (9) engages with said additional cam (10) via a roller (11) arranged at a first end thereof, the other end (17) of the additional



rocker arm (9) pivoting about said actuator system.

6. Decompression braking device in an internal combustion engine (1) according to claim 5, characterized in that said actuator system comprises for each cylinder:

- 5       - a connecting rod (14) an end of which is inserted on said additional cam (13);
- a piston (or pin) (15) about which the end of said connecting rod opposite to said end pivots, said piston being able to slide inside a retaining housing (hole or
- 10       recess) (16) obtained in said engine, said other end (17) of the additional rocker arm (9) pivoting about said piston (15).

7. Decompression braking device in an internal combustion engine (1) according to claim 5, characterized in that said

15   actuator system comprises for each cylinder:

- a supporting plate (20) arranged against said additional cam (13);
- a first shaped body (21) at the upper end of which is said plate (20), and at the other end of which is a
- 20       cavity (22) into which a spring (23) is inserted;
- a second cylindrical body (24) set in the head of said engine, the outer end of which enters said cavity (22) and engages with said spring (23), said other end (17) of the additional rocker arm (9) pivoting about said

first shaped body (21).

8. Decompression braking device in an internal combustion engine (1) according to claim 5, characterized in that said actuator system comprises for each cylinder:

- 5 - a piston (15) hydraulically activated by the engine oil circuit, said other end (17) of the additional rocker arm (9) pivoting about said piston (15) and said piston able to move between a first position A of deactivated engine brake wherein said roller (11) placed in correspondence of said first end of said rocker arm (9) is disengaged by said additional cam (10), and a second position B of activated engine brake wherein said roller (11) is engaged against said additional cam (10).

9. Decompression braking device in a combustion engine (1) according to claim 7, characterized in that the form of said first shaped body (21) is such as to adapt the relative positions of the axes of said second cylindrical body (24) and of said additional shaft (12).

10. Decompression braking device in an internal combustion engine (1) according to one or more of the previous claims, characterized in that for each cylinder said additional cam (10) is arranged on said cam axis (7) at an angle such as to determine an additional opening of said exhaust valves (2.1, 2.2) in a given phase of the engine cycle, towards the end of the compression phase, with a cam advance of approx. 70

degrees with respect to the normal exhaust phase.

11. Decompression braking device in an internal combustion engine (1) according to one or more of the previous claims, characterized in that in the case of several cylinders in line, said additional shaft (12) is common to all the cylinders in line.

12. Internal combustion engine comprising a device for actuating the compression release engine brake according to any of the previous claims.



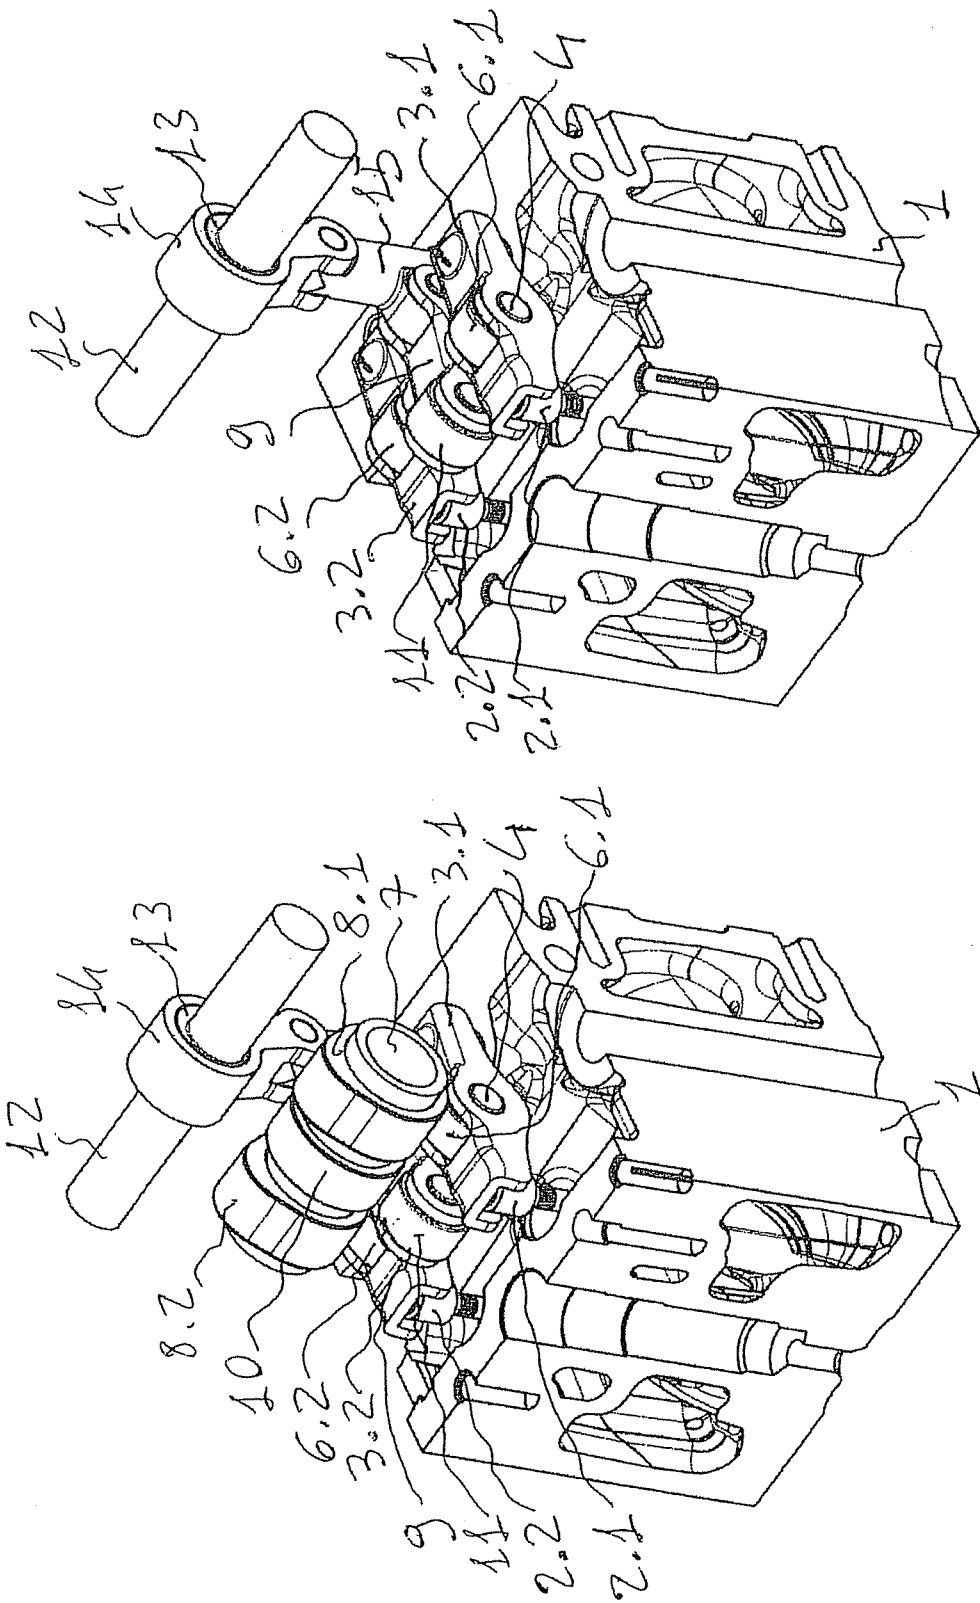


FIG. 1


FIG. 2

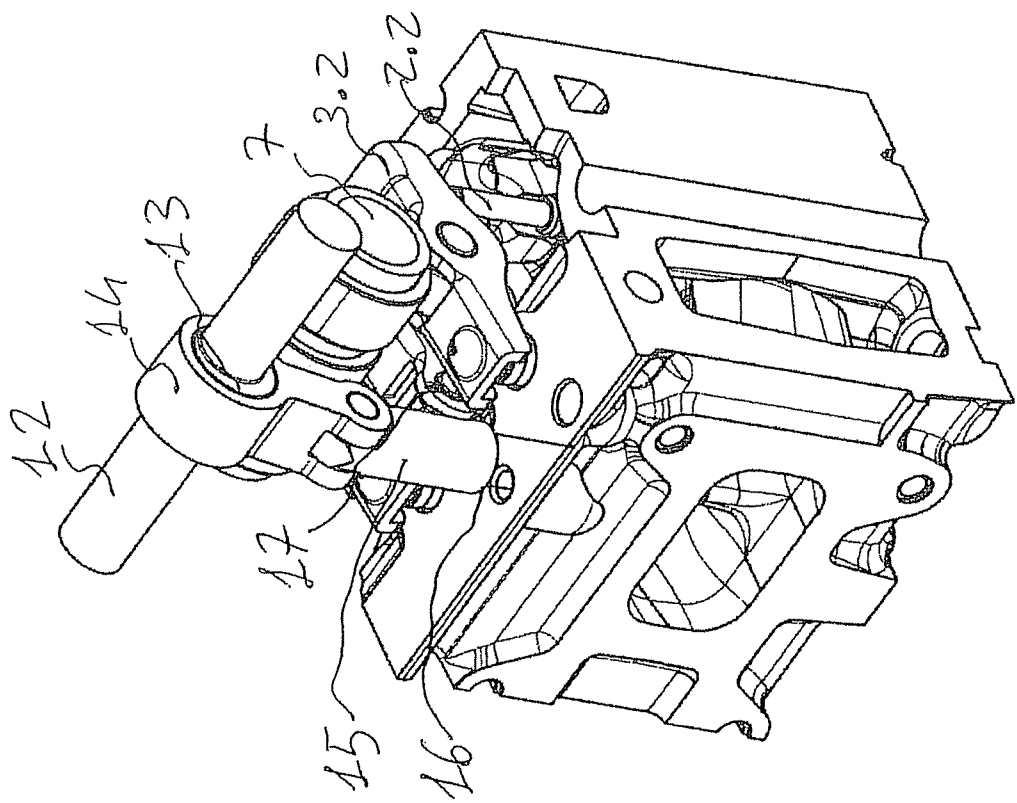


**FIG. 3**

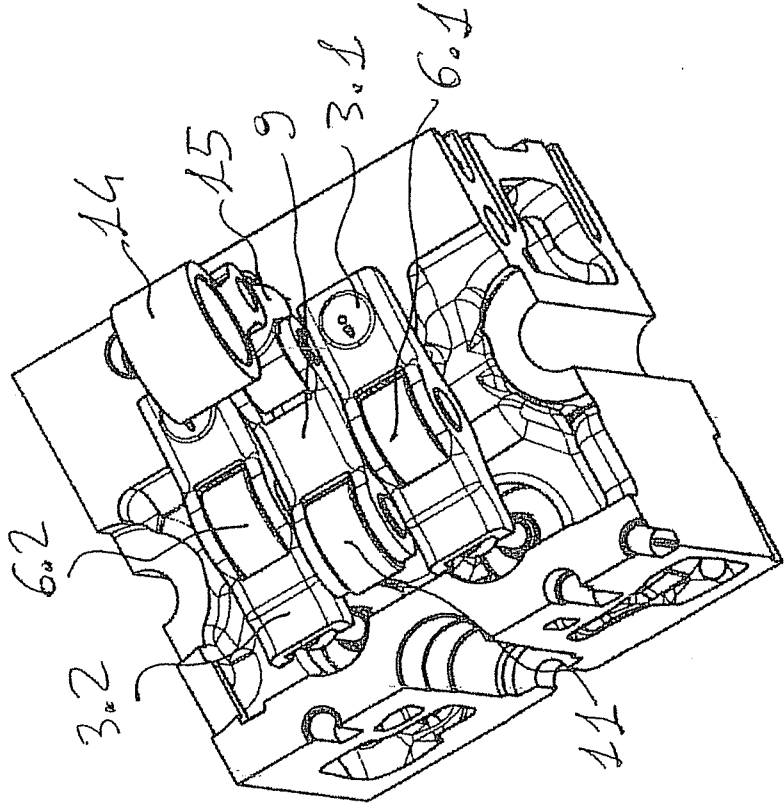

**FIG. 4**

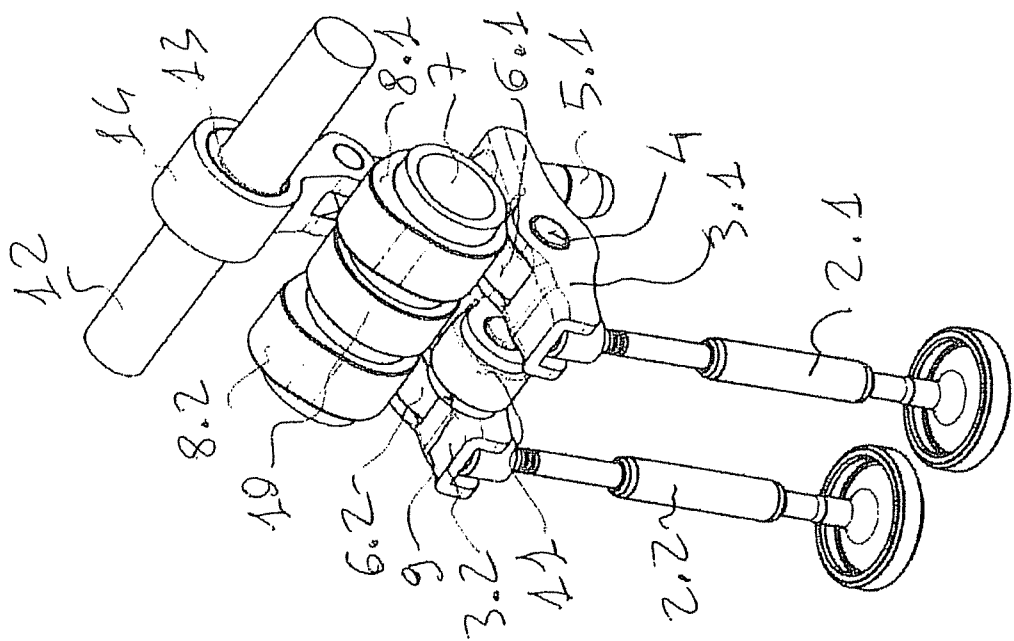

**FIG. 5**

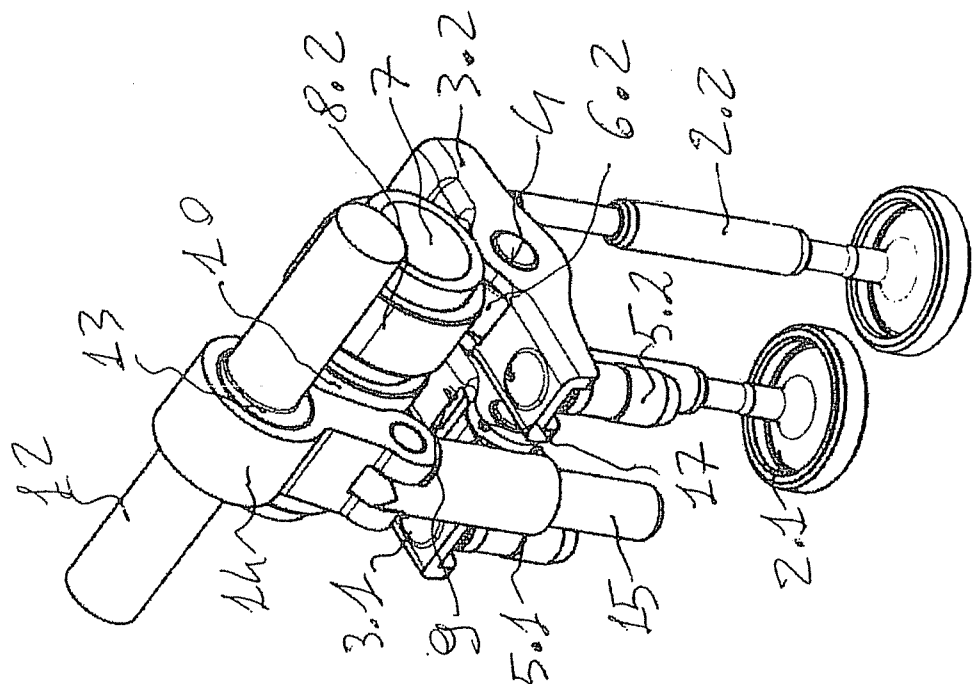

**FIG. 6**



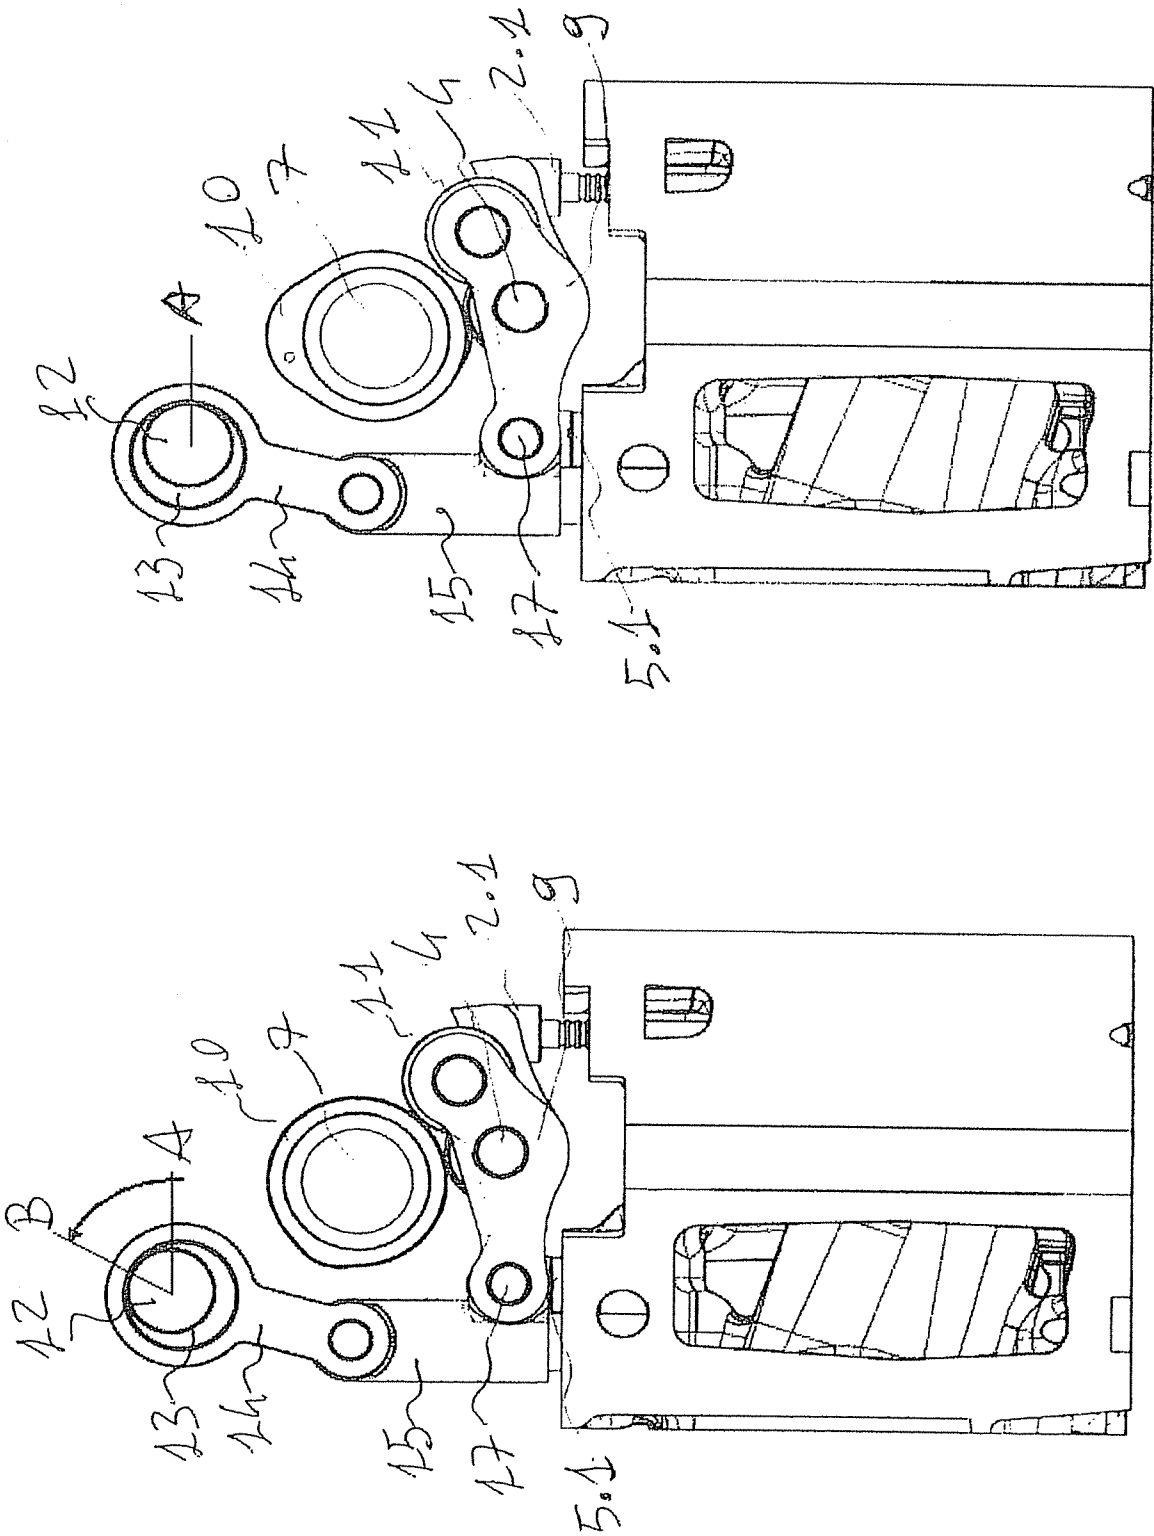


FIG. 7

FIG. 8

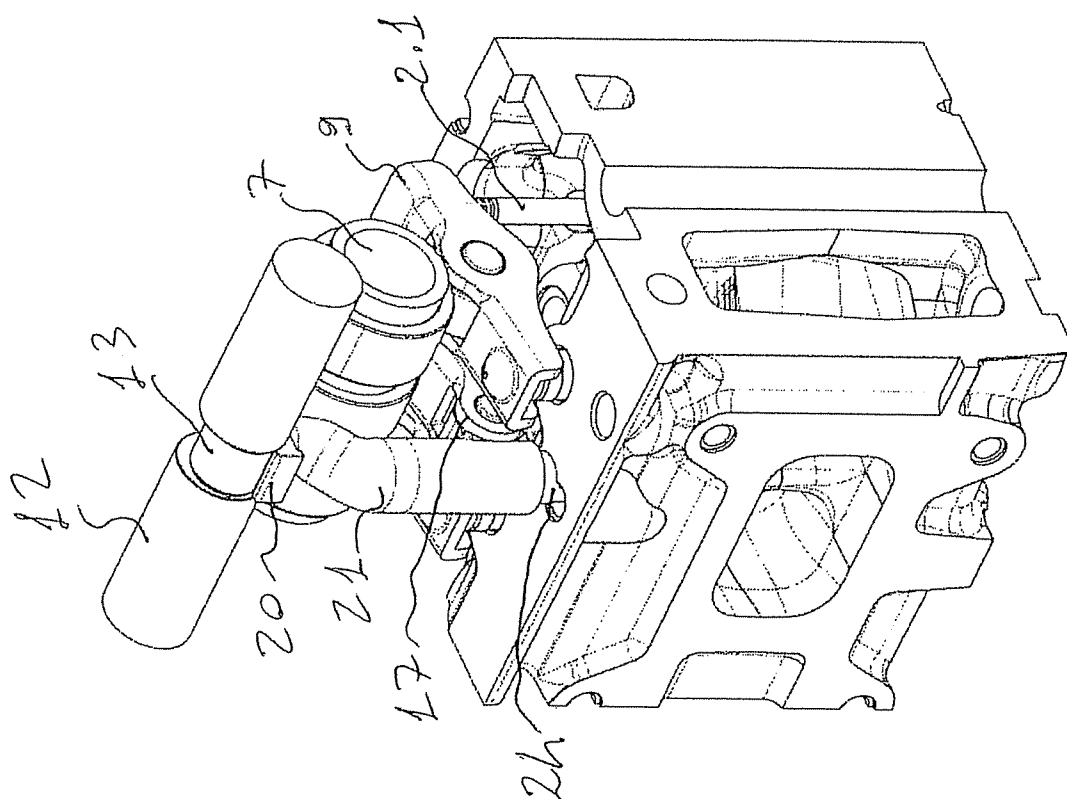

७५६

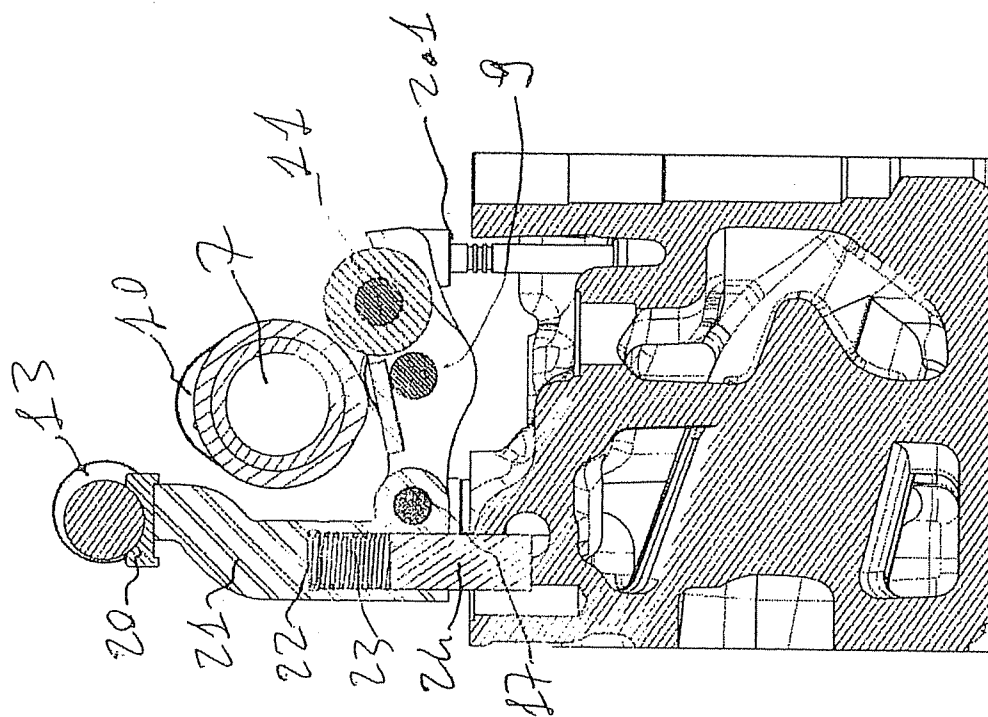

0751




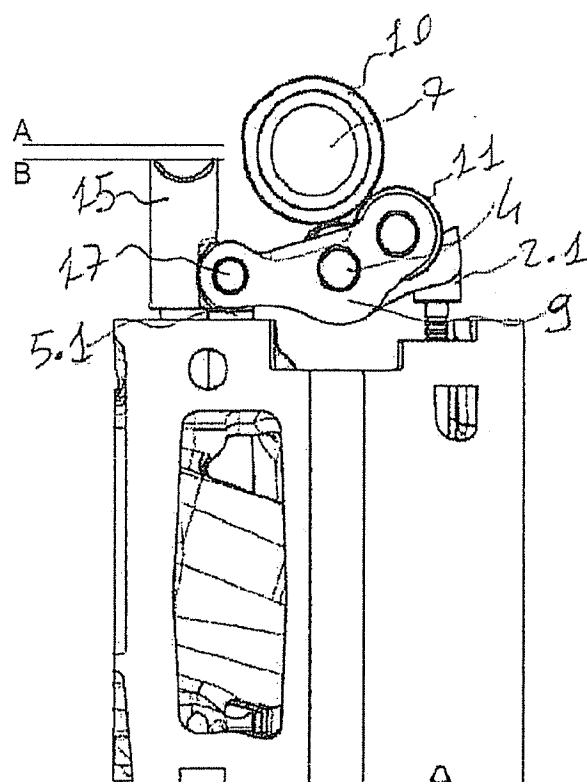


Fig. 11

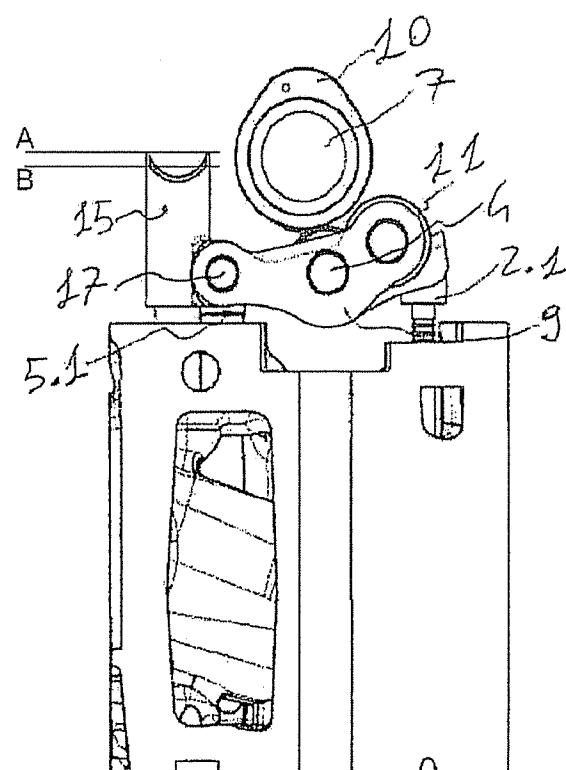

**Fig. 12**

# INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2008/060274

## A. CLASSIFICATION OF SUBJECT MATTER

INV. F01L1/24 F01L1/18 F01L1/053 F01L13/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                           | Relevant to claim No. |
|-----------|------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| A         | US 2006/005796 A1 (JANAK ROBB [US] ET AL)<br>12 January 2006 (2006-01-12)<br>the whole document                              | 1-12                  |
| A         | DE 40 25 569 C1 (MERCEDES-BENZ<br>AKTIENGESELLSCHAFT, 7000 STUTTGART, DE)<br>18 July 1991 (1991-07-18)<br>the whole document | 1-12                  |
| A         | US 4 711 210 A (REICHENBACH DEAN H [US])<br>8 December 1987 (1987-12-08)<br>the whole document                               | 1-12                  |

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

### \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

14 October 2008

Date of mailing of the international search report

24/10/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Paulson, Bo

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2008/060274

| Patent document<br>cited in search report |    | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|----|---------------------|----------------------------|---------------------|
| US 2006005796                             | A1 | 12-01-2006          | BR PI0510464 A             | 06-11-2007          |
|                                           |    |                     | CN 1985072 A               | 20-06-2007          |
|                                           |    |                     | EP 1761686 A2              | 14-03-2007          |
|                                           |    |                     | JP 2007536456 T            | 13-12-2007          |
|                                           |    |                     | KR 20070012536 A           | 25-01-2007          |
|                                           |    |                     | WO 2005107418 A2           | 17-11-2005          |
| DE 4025569                                | C1 | 18-07-1991          | NONE                       |                     |
| US 4711210                                | A  | 08-12-1987          | NONE                       |                     |