

(19)



(11)

EP 1 365 367 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.01.2007 Bulletin 2007/01

(51) Int Cl.:
G07F 17/32^(2006.01)

(21) Application number: **03253127.9**

(22) Date of filing: **19.05.2003**

(54) **Entertainment machines**

Unterhaltungsautomaten

Machines d'amusement

(84) Designated Contracting States:
NL

(30) Priority: **20.05.2002 GB 0211501**

(43) Date of publication of application:
26.11.2003 Bulletin 2003/48

(73) Proprietor: **Barcrest Development B.V.**
6461 EN Kerkrade (NL)

(72) Inventor: **Van Roosmalen, Peter**
6351 HT Bocholtz (NL)

(74) Representative: **Wilson Gunn**
5th Floor
Blackfriars House
The Parsonage
Manchester M3 2JA (GB)

(56) References cited:
EP-A- 0 907 136 WO-A-00/64545
US-A- 4 636 951 US-A- 4 880 237
US-A- 5 249 800 US-A- 5 326 104
US-A- 5 393 057 US-B1- 6 254 483

EP 1 365 367 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to player-operable entertainment machines, particularly coin-operated amusement with prizes (AWP) machines, such as "fruit" or "poker" machines of the kind operable for playing a game having a main play feature involving selection and display at a win zone of a combination of symbols with a main display device. As used herein the term coin is intended also to cover tokens, charge or credit cards or any other means of supplying credit or monetary value.

[0002] The main display device of a fruit machine may comprise multiple side-by-side actual or video-simulated reels which are rotatable about a common horizontal axis within a housing behind a window at the win zone. Each reel has a series of symbols at equally spaced positions around its periphery and the reels can be brought to rest with one symbol on each reel displayed through the window on a win line.

[0003] If the displayed combination of symbols constitutes a predetermined winning combination an award may be made available to the player.

[0004] Typically, on play of a game, which may be initiated by operation of a start button, the reels are set in rotation so as to step through the respective symbol series and are brought to rest after different respective numbers of steps, the numbers of steps being generated on a random or pseudo random basis by a control system of the machine.

[0005] Particularly where several machines are provided next to each other at the same premises there is the possibility of linking the machines so that play features are implemented together for the different machines and this can promote player interaction and consequently enhance interest and entertainment value.

[0006] Such an apparatus is disclosed in WO 0064545A, where slot machines are linked to a centrally linked machine which provides random numbers to the machines in a simulated dice-rolling wagering game. The random numbers produce outcomes which can be further influenced by player interaction in hold and re-roll commands.

[0007] It is also known to link machines in lottery gaming systems (EP 907136A) where a fixed number of pools of game plays can be provided by a master unit for purchase by a number of slave units.

[0008] Linking machines to control game parameters such as appearance and percentage payout by a main controller is disclosed in U.S. 6254483.

[0009] Furthermore, U.S. 5393057 discloses the linking of a primary game playing device to a secondary game playing device such as a bingo game, in which a player must qualify for participation in the bingo game by winning on the primary game.

[0010] Common implementation of symbol selection in the main play feature could be desirable to promote player interaction. However, in so far as this would result predictably in a common outcome for all machines this

could reduce variety and thereby adversely affect entertainment value.

[0011] An object of the invention is to provide for common implementation of symbol selection whilst enabling variety of operation to be maintained between machines.

[0012] According to one aspect of the invention therefore there is provided an assembly of linked entertainment machines each having a main display device which has a plurality of symbol series and is operable to select and display at least one symbol from each series determined by a selected magnitude of progression through the respective series and an award is made available at each machine, characterised by the provision of a common control device operable to select common magnitudes of progression for all said machines, wherein the main display device of each machine is operable to select and display said symbols in dependence on common said magnitudes of progression provided by said common control device, thereby centralising the selection of the magnitudes of progression and also in dependence on starting conditions of the symbol series of the respective machine, which cause the selected symbols at each machine to change for assessment of said selected symbols at each machine for determination of an award.

[0013] With this arrangement, in so far as the starting conditions of the symbol series may differ for the different machines, the symbol combinations selected may also differ notwithstanding the use of common magnitudes of progression.

[0014] Variety and entertainment value can therefore be maintained.

[0015] Progression through the series may be step-wise and the magnitudes of progression may constitute numbers of steps.

[0016] The starting conditions may constitute starting positions in the symbol series and in this case the magnitudes of progression may constitute number of steps, or 'offsets' from such starting positions.

[0017] Most preferably, the common control device provides a plurality of separately generated common magnitudes of progression, one for each symbol series of each machine, which magnitudes may be different from each other.

[0018] With regard to the starting conditions of each machine these may be determined by the end conditions, e.g. they may be the same as the end conditions, resulting from a previous operation of the main display device, e.g. from a previously played game, and the arrangement may be such that the common control device is operable to control symbol selection only for the (or each) machine which is in play in a common play mode and not for the (or each) machine which is not in play at all or at least in such a common play mode. Thus, if not all machines are in said common play mode the common control device will operate to progress through the symbol series of one (or some) of the machines leaving the symbol series of the (or each) other machine unchanged, or changed on a different basis, whereby in a next game, starting con-

ditions will differ for different machines.

[0019] The common play mode may apply unless overridden to each machine whenever that machine is operated e.g. by pressing a start button. That is, the common play mode may be the normal play mode of the machine.

[0020] Alternatively or additionally, the common play mode may be an optional mode selectable by the player, e.g. by operating a control such as a press button. When not selected the machine may be inoperable or may be operable separately from the common control device.

[0021] Alternatively or additionally the availability of the optional common play mode may be controlled automatically on any suitable random, pseudo random or predetermined basis.

[0022] There may be a common mode display means for each machine, or common to all machines, to indicate the availability of common mode play.

[0023] The common mode play may occur simultaneously for all pertaining machines, or on any other inter-related basis.

[0024] The common control device may be located within or on one of the machines or separately thereto.

[0025] The common control device may operate substantially solely to generate the said common magnitudes. Alternatively other functions such as conversion of the magnitudes to operations of the main display devices interpretation of selected symbol combinations, etc may also be centralised in the common control device.

[0026] The main display device of each machine may be an actual or simulated rotatable reel, and the machines may be of the fruit machine kind described hereinbefore.

[0027] The invention will now be described further by way of example only and with reference to the accompanying drawings in which:

Figure 1 is a schematic representation of one form of an assembly of machines according to the invention; and

Figure 2 is a block circuit diagram of the assembly.

[0028] Referring to the drawings, Figure 1 shows a number of linked entertainment machines of the fruit machine kind each of which has a floor-standing box shaped housing 4 having a front wall which includes upper and lower glass panels 5, 6, a number of operating buttons 7, 8, 9, a coin slot 10 and a payout opening 11.

[0029] Within the housing 2 there are three axially aligned reels 12 having say 16 symbols at regularly spaced positions around their peripheries. The reels 12 are axially rotatable and are drivably connected to respective stepper motors 13. The reels 12 are arranged behind a window 14 defined by a printed region of the lower glass panel 6. Each reel 12 can be arrested by the respective stepper motor 13 in any of 16 stopping positions in which one symbol is in precise registration with a horizontal win line 15 in the centre of the window 14 and two further symbols are visible above and below the

win line.

[0030] The stepper motors 13 are connected to a microprocessor-based control unit 16. This unit is also connected to a coin-mechanism 17, a payout mechanism 18 and the buttons 7, 8, 9.

[0031] In use, the player inserts coins into the coin mechanism 17 through the slot 10 sufficient to generate credit for one or more games. The amount of credit is shown on an LED or LCD display (not shown) and the machine is actuated so that a main game can now be played. The main game can commence after a start button 7 has been pressed and the reels 12 spin and then come to rest so as to select a combination of symbols displayed on the win line. The displayed symbol combination is assessed by the control unit 16 and a win indication is given in the event that the combination is of a predetermined winning nature.

[0032] The reels 12 rotate through different randomly (or pseudo-randomly) selected numbers of steps before coming to rest. The number of steps is computed for each reel 12 and a corresponding number of pulses is fed to the stepper motor 13 of that reel 12 so as to cause the reel 12 to be driven through the number of steps. The pulses then cease causing drive of the reel 12 to terminate whereupon rotation of the reel 12 is promptly arrested.

[0033] The stopping position of the reel 12, and hence the symbol displayed on the win line 15, is pre-known from: the known starting position of the reel 12 before rotation commences, the known sequence of symbols around the reel 12, and the computed number of steps. The resulting symbol combination for the three reels 12 is therefore known and the value of the award, if any, to be made available to the player is determined by comparison with a win table.

[0034] The operation so far described conventionally takes place under the control of the control unit 16.

[0035] In accordance with the illustrated embodiment the control units 16 of the respective machines are linked, e.g. by data cables 19 or the like, to a common central control device 20.

[0036] This device 20 conveniently may comprise, or be incorporated in, one of the control units 16 of one of the machines 1-3. However, alternatively it may comprise a separate device which may be mounted within or on one of the machines or at a separate location near to or remote from the machines. It is even possible to locate the control device 20 in a separate room or even in separate premises to the machines with an appropriate cable or wireless link between the device 20 and the machines 1-3.

[0037] This control device 20 centralises at least part of the above described operation, including the selection of the rotational steps for each reel 12 of each machine 1-3. That is, in relation to the above described three-reel machines, the control device 20 generates three numbers (usually successively larger numbers) say 12, 18, 22 and these numbers can be used for each machine,

when in a common play mode, to effect rotation of the three reels 12.

[0038] This number generation occurs, in play, when any one of the machines 1-3 is set in play in a common play mode, by pressing a common play mode selector button 9 instead of the usual start button 7. Operation of this button 7 transmits a signal to the central control device 20 which causes the central control device 20 to generate three numbers which are then supplied to that machine 1-3.

[0039] These numbers are supplied to all of the machines 1-3 for which the common play mode selector button 9 has been pressed.

[0040] All such machines 1-3 now operate simultaneously. That is the reels 12 of all machines 1-3 rotate simultaneously through the same numbers of steps, say 12, 18, 22.

[0041] In order to achieve simultaneous operation of the separately playable machines, there may be an alert and timing control, which may be implemented by the central control device 20, which may display a message on each machine, or on a separate display unit (not shown). This message, which may be provided by a digital display or print on a back-illuminated panel, may indicate that a common play game is available whereby a short period of time is allowed for players to press the selector buttons 9 and then play commences, at the end of the time period, or sooner if all selector buttons 9 or start buttons 7 for all machines have been pressed within the time period.

[0042] Any machine 1-3 which is not in the common play mode will not use the common numbers generated by the common control device 20 and may remain inoperable, or instead there may be provision for that machine to operate in the usual way using separately generated numbers which may be generated by the common control device 20 or the control unit 16 of that machine.

[0043] Thus, if all machines have 16 position reels 12 which all start in position No. 1, generation of numbers 12, 18, 22 will move the reels 12 of each machine at the same time, to positions 13, 3, 7, and each player will attain the same award, if any.

[0044] If any one machine 1-3 has not joined the common mode play the reels 12 of that machine may remain in position No. 1 or, if operated separately, may rotate to other positions.

[0045] At the next play option, if all machines join the common play mode, those machines which were in the common play mode in the previous game will now have different starting positions (e.g. 13, 3, 7) from the positions (e.g. 1, 1, 1) of any machine which did not join the common play mode. If therefore in this subsequent game the common numbers 6, 11, 16 are generated, the reels 12 of the former machines will all move to positions 4, 14, 7 whereas the reels of any latter machine will move to position 7, 12, 1.

[0046] Thus, even though a common number generator is used for all machines, the resulting symbol combi-

nations can differ due to changes in starting positions.

[0047] Accordingly, enhanced variety and hence entertainment value can be obtained in the context of linked machines.

5 [0048] It is of course to be understood that the invention is not intended to be restricted to the details of the above embodiment which are described by way of example only.

10 [0049] Thus for example, although the embodiment described utilises the selector button 9 to select common mode play, it is possible, and may be preferred to omit the button 9 whereby the normal mode of play is the common mode and is initiated simply by operation of the usual start button 7. Whilst all machines are played together
15 by pressing the start buttons, the reels will rotate through the same numbers of steps. If any machine is not played in any game its reels will not rotate in that game and will therefore get out of step with the other machines. When that machine is played again in a subsequent game it will
20 join the common game and its reels will rotate through the same number of steps as the other machines but now, being out of step, the outcome will differ. With this embodiment each machine only has the option of joining a common game, it cannot be operated in a separate
25 stand alone game.

Claims

- 30 1. An assembly of linked entertainment machines (1-3) each having a main display device (12) which has a plurality of symbol series and is operable to select and display at least one symbol from each series determined by a selected magnitude of progression through the respective series and an award is made
35 available at each machine, **characterised by** the provision of a common control device (20) operable to select common magnitudes of progression for all said machines (1-3), wherein the main display device (12) of each machine is operable to select and display said symbols in dependence on common said magnitudes of progression provided by said common control device (20), thereby centralising the selection of the magnitudes of progression and also in
40 dependence on starting conditions of the symbol series of the respective machine, which cause the selected symbols at each machine to change for assessment of said selected symbols at each machine for determination of an award.
- 50 2. An assembly according to claim 1 **characterised in that** progression through the series is stepwise and the magnitudes of progression constitute numbers of steps.
- 55 3. An assembly according to claim 1 or 2 **characterised in that** the starting conditions constitute starting positions in the symbol series.

4. An assembly according to any one of claims 1 to 3 **characterised in that** the common control device (20) provides a plurality of separately generated common magnitudes of progression, one for each symbol series of each machine (1-3). 5
5. An assembly according to any one of claims 1 to 4 **characterised in that** the starting conditions of each machine (1-3) are determined by end conditions resulting from a previous operation of the main display device (12). 10
6. An assembly according to any one of claims 1 to 5 **characterised in that** each machine (1-3) is operable in an optional common play mode wherein the common control device (20) is operable to control symbol selection only for the (or each) machine (1-3) which is in play in such mode. 15
7. An assembly according to any one of claims 1-5 **characterised in that** each machine is operable in a common play mode as a normal play mode of the machine (1-3) wherein the common control device (2) is operable to control symbol selection for the (or each) machine which is in play in normal play mode unless overridden whenever the machine (1-3) is operated. 20 25
8. An assembly according to claim 6 **characterised in that** the common play mode is an optional mode requiring selection by operation of a player control (9). 30
9. An assembly according to any one of claims 6 to 8 **characterised by** the provision of a common mode display means to indicate the availability of common mode play. 35
10. An assembly according to any one of claims 1 to 9 **characterised in that** the common control device (20) is located within one of the machines (1-3). 40
11. An assembly according to any one of claims 1 to 10 **characterised in that** the main display device (12) of each machine (1-3) displays actual or simulated rotatable reels. 45

Patentansprüche

1. Anordnung von miteinander in Verbindung stehenden Unterhaltungsgeräten (1-3), wobei jedes eine Hauptdisplayschaltung (12) hat, die eine Vielzahl von Symbolserien hat und die zum Auswählen und Anzeigen mindestens eines Symbols jeder Serie betreibbar ist, das durch eine ausgewählte Fortschrittsgröße durch die entsprechende Serie bestimmt ist, und wobei eine Prämie an jedem Gerät zur Verfügung

gestellt ist,

gekennzeichnet durch

die Bereitstellung einer gemeinsamen Steuerungseinrichtung (20), die zur Auswahl von gemeinsamen Fortschrittsgrößen für alle Geräte (1-3) betreibbar ist, wobei die Hauptdisplayschaltung (12) jedes Gerätes zum Auswählen und Anzeigen der Symbole in Abhängigkeit von den von der gemeinsamen Steuerungseinrichtung (20) bereitgestellten gemeinsamen Fortschrittsgrößen betreibbar ist, womit die Auswahl der Fortschrittsgrößen zentralisiert wird, und auch in Abhängigkeit von den Startbedingungen der Symbolserien des entsprechenden Gerätes, wobei die ausgewählten Symbole an jedem Gerät zur Bewertung der ausgewählten Symbole an jedem Gerät zur Bestimmung einer Prämie, geändert werden.

2. Anordnung nach Anspruch 1, **dadurch gekennzeichnet, dass** Fortschritt durch die Serien schrittweise ist und die Fortschrittsgrößen Anzahlen von Schritten bilden. 20
3. Anordnung nach einem der Ansprüche 1 oder 2, **dadurch gekennzeichnet, dass** die Startbedingungen Startpositionen in den Symbolserien darstellen. 25
4. Anordnung nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die gemeinsame Steuerungseinrichtung (20) eine Vielzahl von einzeln generierten gemeinsamen Fortschrittsgrößen zur Verfügung stellt, eine für jede Symbolserie jedes Gerätes (1-3). 30
5. Anordnung nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** die Startbedingungen jedes Gerätes (1-3) durch die aus einem vorangehenden Betrieb der Hauptdisplayschaltung (12) resultierenden Endbedingungen bestimmt sind. 35
6. Anordnung nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** jedes Gerät (1-3) in einem optionalen gemeinsamen Spielmodus betreibbar ist, wobei die gemeinsame Steuerungseinrichtung (20) zur Steuerung der Symbolauswahl nur für das (oder jedes) Gerät (1-3), das sich in einem solchen Spielmodus befindet, betreibbar ist. 40 45
7. Anordnung nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** jedes Gerät in einem gemeinsamen Spielmodus als einem normalen Spielmodus des Gerätes (1-3) betreibbar ist, wobei die gemeinsame Steuerungseinrichtung (20) zur Steuerung der Symbolauswahl nur für das (oder jedes) Gerät (1-3), das sich in einem solchen Spielmodus befindet, betreibbar ist. 50

rungseinrichtung (20) zur Steuerung der Symbolauswahl für das (oder jedes) Gerät, das in normalem Spielmodus in Betrieb ist, betreibbar ist, wenn nicht überschrieben, immer wenn die Maschine (1-3) betrieben wird.

8. Anordnung nach Anspruch 6, **dadurch gekennzeichnet, dass** der gemeinsame Spielmodus ein optionaler Modus ist, der eine Auswahl durch Bedienung einer Spielersteuerung (9) erfordert.
9. Anordnung nach einem der Ansprüche 6 bis 8, **gekennzeichnet durch** die Bereitstellung eines gemeinsamen Spielmodus-displaymittels, um die Verfügbarkeit des gemeinsamen Spielmodus anzuzeigen.
10. Anordnung nach einem der Ansprüche 1 bis 9, **dadurch gekennzeichnet, dass** die gemeinsame Steuerungseinrichtung (20) in einem der Geräte (1-3) angeordnet ist.
11. Anordnung nach einem der Ansprüche 1 bis 10, **dadurch gekennzeichnet, dass** die Hauptdisplayeinrichtung (12) jedes Gerätes (1-3) tatsächliche oder simulierte drehbare Rollen anzeigt.

Revendications

1. Système de machines de jeu (1 - 3) reliées comprenant chacune un dispositif d'affichage principal (12) qui possède plusieurs séries de symboles et qui peut être actionné de manière à choisir et à afficher au moins un symbole de chacune des séries que l'on détermine en fonction d'une magnitude choisie de progression à travers les séries respectives, une récompense étant disponible au niveau de chaque machine, **caractérisé en ce que** l'on utilise un dispositif de commande commun (20) pouvant être actionné de manière à choisir des magnitudes communes de progression pour toutes lesdites machines (1 - 3), et dans lequel le dispositif d'affichage principal (12) de chaque machine peut être actionné de manière à choisir et à afficher lesdits symboles en fonction desdites magnitudes communes de progression fournies par ledit dispositif de commande commun (20), centralisant ainsi la sélection des magnitudes de progression, ainsi qu'en fonction des conditions de départ des séries de symboles de la machine respective qui font que les symboles choisis au niveau de chaque machine changent afin de vérifier lesdits symboles choisis au niveau de chaque machine en vue de déterminer une récompense.
2. Système selon la revendication 1, **caractérisé en**

ce que la progression à travers les séries se fait par étapes et **en ce que** les magnitudes de progression représentent les nombres d'étapes.

3. Système selon la revendication 1 ou 2, **caractérisé en ce que** les conditions de départ représentent des positions de départ dans les séries de symboles.
4. Système selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** le dispositif de commande commun (20) fournit plusieurs magnitudes de progression communes et générées séparément, une pour chaque série de symboles de chaque machine (1 - 3).
5. Système selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** les conditions de départ de chaque machine (1 - 3) sont déterminées par des conditions finales issues du fonctionnement préalable du dispositif d'affichage principal (12).
6. Système selon l'une quelconque des revendications 1 à 5, **caractérisé en ce que** chaque machine (1 - 3) peut fonctionner selon un mode de jeu commun optionnel dans lequel le dispositif de commande commun (20) peut être actionné afin de commander la sélection de symboles uniquement pour la machine ou pour chacune des machines (1 - 3) qui se trouvent dans ce mode de jeu.
7. Système selon l'une quelconque des revendications 1 à 5, **caractérisé en ce que** chaque machine peut fonctionner en un mode de jeu commun consistant en un mode de jeu normal de la machine (1 - 3), le dispositif de commande commun (20) permettant de commander la sélection des symboles pour la machine ou pour chacune des machines se trouvant en mode de jeu normal à moins d'une reprise de commande à un quelconque moment du fonctionnement de la machine (1 - 3).
8. Système selon la revendication 6, **caractérisé en ce que** le mode de jeu commun consiste en un mode optionnel nécessitant une sélection par l'actionnement d'une commande de joueur (9).
9. Système selon l'une quelconque des revendications 6 à 8, **caractérisé en ce que** l'on utilise un moyen d'affichage de mode commun permettant d'indiquer la disponibilité du mode de jeu commun.
10. Système selon l'une quelconque des revendications 1 à 9, **caractérisé en ce que** le dispositif de commande commun (20) se situe dans une des machines (1 - 3).
11. Système selon l'une quelconque des revendications 1 à 10, **caractérisé en ce que** le dispositif d'afficha-

ge principal (12) de chaque machine (1 - 3) affiche
des rouleaux rotatifs réels ou simulés.

5

10

15

20

25

30

35

40

45

50

55

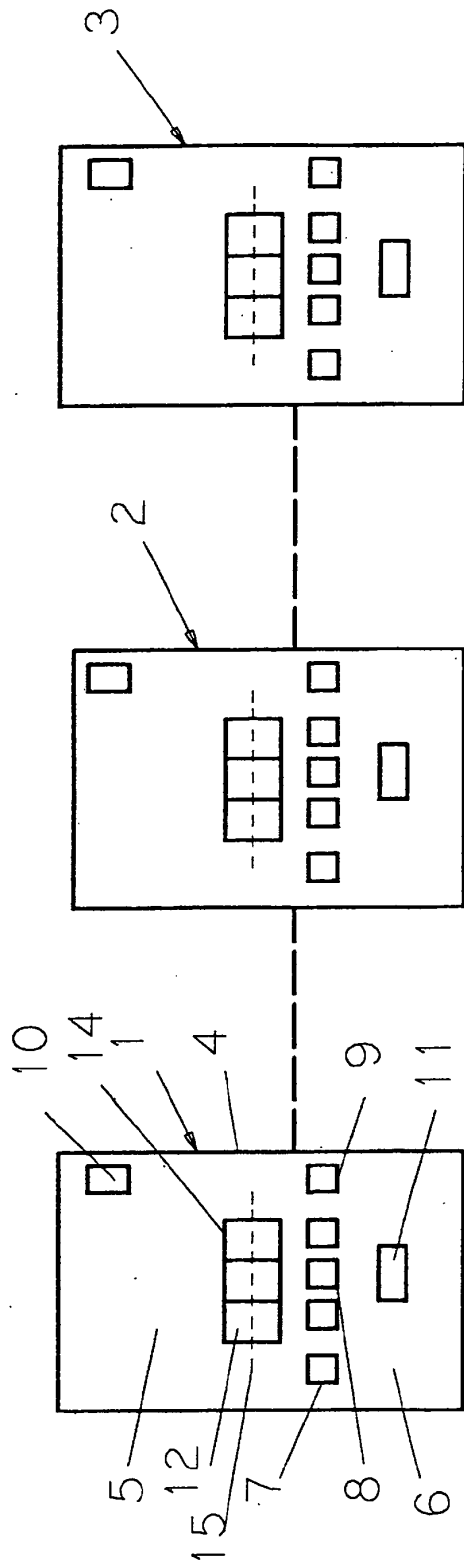


Fig 1

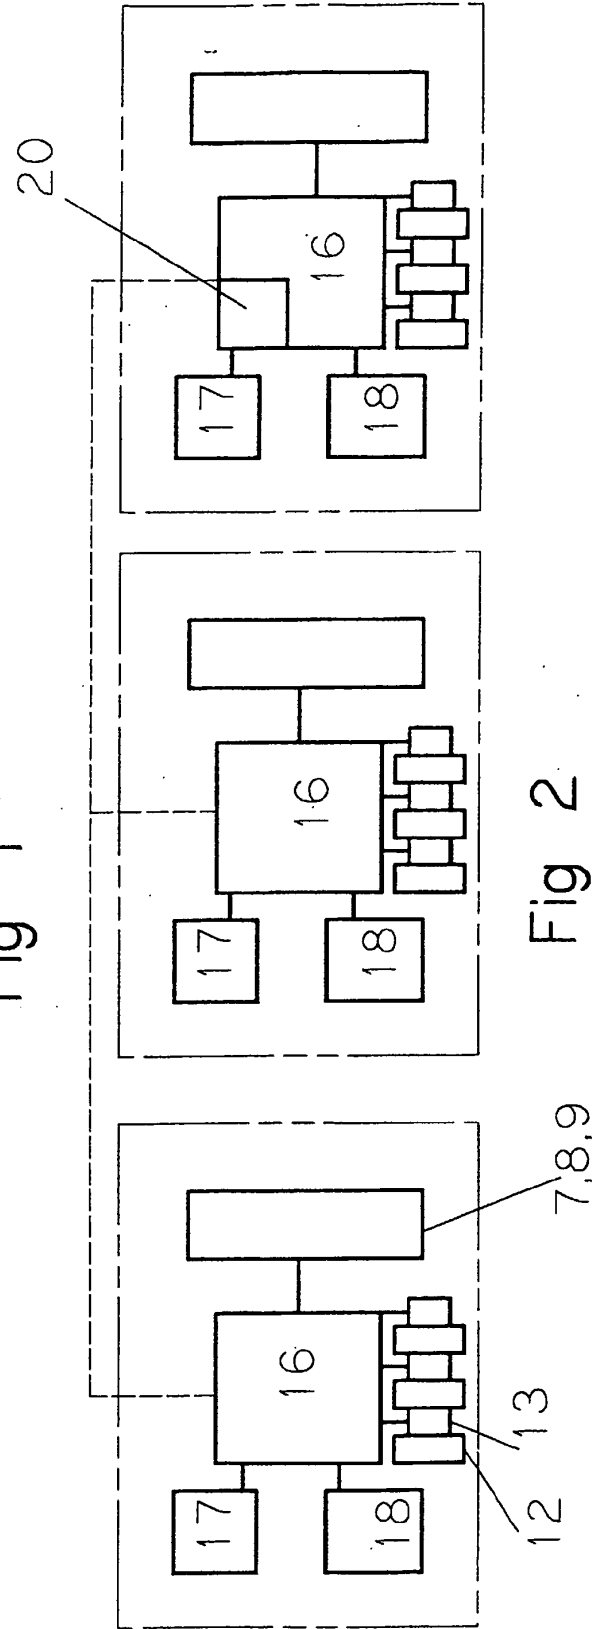


Fig 2