



(11)

EP 2 998 908 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.04.2017 Bulletin 2017/15

(51) Int Cl.:
G06M 7/02 ^(2006.01) **B07C 5/36** ^(2006.01)
F42B 33/00 ^(2006.01)

(21) Application number: **15185606.9**

(22) Date of filing: **17.09.2015**

(54) **FEED AND COUNT STATION FOR BUCKSHOT FOR HUNTING CARTRIDGES LOADED WITH LEAD SHOTS**

FÜTTERUNGS- UND ZÄHLSTATION FÜR SCHROT FÜR MIT BLEITSCHROT GELADEN
JAGDPATRONEN

STATION D'ALIMENTATION ET DE COMPTAGE POUR LES CHEVROTINES POUR CARTOUCHES
DE CHASSE, CHARGEES DE BILLES DE PLOMB

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **19.09.2014 IT CR20140021**

(43) Date of publication of application:
23.03.2016 Bulletin 2016/12

(73) Proprietor: **E.M.G. Srl
26010 Pozzaglio ed Uniti (CR) (IT)**

(72) Inventor: **GATTI, GIORGIO
26100 CREMONA (IT)**

(74) Representative: **Mari, Marco Giovanni et al
Ing. Mari & C. S.r.l.
Via Garibotti, 3
26100 Cremona (IT)**

(56) References cited:
GB-A- 190 723 226

EP 2 998 908 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention concerns the field of production lines and loading of lead shot cartridges, in particular those used for hunting, in shotguns.

[0002] More specifically, the invention relates to a feed and count station for buckshot for hunting cartridges for use in loading machines accessorized to receive the empty cartridges, fill them with the necessary internal components, including shot and buckshot, seal them and package them.

[0003] In lead shot cartridges, lead shot is inserted, classified according to the diameter of the single pellet, which can range from approximately 1 to 4 mm. The next size is buckshot, which can have larger diameters, from 4 to 9 mm approximately.

[0004] According to the known art, the feed and count stations for buckshot for hunting cartridges substantially comprise a support frame; feed means for a plurality of buckshot; at least one tubular slide having a main line of longitudinal extension, suitable for the regular canalization of said buckshot; at least one movable needle adapted to cooperate with said tubular slide, reversibly engaging a through hole in a wall of said slide, to select a precise quantity of said buckshot; and download and convey means of said precise quantity of said buckshot towards said cartridges.

[0005] GB23226A discloses an example of feed station for shotguns cartridges.

[0006] The tubular slide into which the buckshot is canalized normally has a circular section. Disadvantageously, although a section of the slide has a larger diameter than the theoretical diameter of the buckshot, considering a certain dimensional tolerance, it often happens that ovalized buckshot, not perfectly spherical or with small production deformations, totally occupies the slide, obstructing the passage thereof, and blocking the system of canalization of the buckshot towards the cartridges to be filled.

[0007] Said obstructions oblige the operators to stop the entire loading machine, dismantle at least partially the buckshot feed and count station and free the slide of the buckshot blocked by the jammed buckshot.

[0008] Disadvantageously, all these operations require a great deal of time, resulting in long production standstills of the machine, with consequent slowdowns and reductions in productivity, and cause economic losses.

[0009] Further disadvantages concern the difficulty of preparing the feed and count station to take account of changes in the dimension of the buckshot used for packaging the cartridges in production.

[0010] The diameter of the tubular slide must be chosen with extreme precision and depends essentially on the size of the buckshot. However, the same machine can be set up to produce cartridges containing buckshot of different diameters, and it is therefore necessary, when switching from one buckshot dimension to another, to

replace the entire tubular slide. This operation for replacement of the tubular slide also disadvantageously contributes to slowing down the production.

[0011] The invention aims to overcome these limits, producing a feed and count station for buckshot for cartridge loading machines that prevents the buckshot from becoming blocked, obstructing the tubular slide for the canalization of said buckshot in the direction of the cartridges to be filled, thus increasing the productivity of the entire loading machine.

[0012] A further object of the invention is to produce a universal feed and count station for buckshot, independent of the diameter of the buckshot itself, allowing quick easy set-up of said station to adapt to changes in the calibre of the buckshot to be inserted in cartridges suitable for prey of different sizes.

[0013] Said objects are achieved with a feed and count station for buck shots for hunting cartridges loaded with lead shots comprising:

- a support frame;
- feed means for a plurality of buckshot;
- at least one slide having a main line of longitudinal extension, suitable for the regular canalization of said buckshot;
- at least one movable needle adapted to cooperate with said at least one slide, reversibly engaging a through hole in a wall of said slide, to select a precise quantity of said buckshot;
- download and convey means of said precise quantity of said buckshot towards said cartridges,

at least one slide comprises a duct divided into two portions along a plane passing through said line of longitudinal extension and comprises regulating means adapted to regulate the mutual distance between said two portions.

[0014] Advantageously, said two portions of said duct have a plurality of flat faces.

[0015] In particular, each of said two portions of said duct has a V-shaped cross section, and said two portions of said duct define, in section, a passage area having rhomboidal shape.

[0016] According to a first aspect of the invention, a first portion of said duct is fixed and a second portion of said duct is movable.

[0017] According to further aspects of the invention, said regulating means comprise screws for stably fastening said movable portion to said fixed portion, and a plurality of spacers which are interchangeable according to the dimension of said buckshot, adapted to be inserted between one portion and the other portion of said duct.

[0018] In a particularly preferred variation of the invention, said feed and count station comprises a plurality of slides arranged parallel to one another along said plane having a substantially vertical arrangement.

[0019] In particular, said feed and count station comprises two planes of facing plates provided with V-shaped

grooves, adapted to define the two portions of the duct of each slide.

[0020] The main advantage of the invention consists in the fact that said at least one slide comprises a duct divided into two portions that can be spaced from each other: the regulation of their mutual distance prevents the ovalized buckshot, or buckshot with slight deformations, from becoming blocked along the slide, during its descent movement towards the cartridges, obstructing the slide and blocking the entire feed and count station.

[0021] The free lateral passage created between the two portions of the duct also allows the evacuation of particles or metal scrap, left as residues on the buckshot, which, if not correctly expelled, would obstruct the feed and count station, preventing correct counting of the buckshot.

[0022] Advantageously, the shape of the duct with flat face section reduces the resting and contact surface of the buckshot with the inner surface of the duct: this reduces the friction that can be generated between the parts, thus increasing the buckshot flow and descent speed, making the station more efficient.

[0023] A slide with duct having a passage cross section of substantially rhomboidal shape, where the contact points of the buckshot with the inner surface of the duct can be at the most four touching points, is particularly advantageous.

[0024] The regulating means, and in particular the interchangeable spacers, allow rapid and accurate set-up of the station at each change of calibre of the buckshot fed in, and guarantee maximum safety and stability of the machine and its components.

[0025] Furthermore, by optimizing the preparation times of the feed and count station, which are drastically reduced without the need to intervene on other components of the loading machine, production is significantly increased with consequent economic benefit.

[0026] The use of a plurality of spacers ensures maximum precision and maximum parallelism between the two portions of the duct of said slide.

[0027] The possibility of choosing between spacers having regulating functions due to their different thickness makes the feed and count station very flexible and adaptable to any market requirement, for cartridges containing buckshot with different calibres.

[0028] The geometry of the entire station, with the possibility of positioning several slides side by side, obtaining them on appropriately grooved channels of facing plates, makes the station more efficient, allowing the throughput to be doubled, tripled and even more, at the same time unifying the station set-up operations, with one single positioning of the regulating means.

[0029] The shape of the spacers, in cooperation with the grooved planes of facing plates which define the two portions of the duct of the slides, ensures that the slides are always perfectly aligned and correctly calibrated.

[0030] The advantages of the invention will become clearer below, where a preferred mode of embodiment

is described, by way of non-limiting example, and with the help of the figures where:

Figures 1-3 show, in section along a vertical plane and in an axonometric view, a feed and count station for buckshot for hunting cartridges loaded with lead shot according to the invention;

Figure 4 shows, in section along a horizontal plane, a detail of the station of Figure 1;

Figure 5 shows, in a partially exploded axonometric view, the station of Figure 1.

[0031] With reference to the Figures, a feed and count station 1 for buckshot 2 for hunting cartridges loaded with lead shot is illustrated for use in loading machines accessorized to receive the empty cartridges, fill them with the necessary internal components, seal them and package them.

[0032] Said feed and count station 1 comprises essentially a support frame 3; feed means 4 for a plurality of buckshot 2 provided with agitator means 14; at least one slide 5 comprising a duct having a line of longitudinal extension suitable for the canalization of said buckshot 2; at least one movable needle 6 adapted to cooperate with said at least one slide 5 to select a precise quantity of said buckshot 2; download and convey means 7 of said precise quantity of said buckshot 2 towards said cartridges (not illustrated).

[0033] In the embodiment of the invention illustrated in all the Figures, said feed and count station 1 comprises four slides 5, arranged parallel to one another on a substantially vertical plane Π passing through the respective longitudinal extension lines of the slides.

[0034] Each slide 5 comprises a duct divided into two portions 15, 25 separated along said longitudinal extension line, in the area of said plane Π .

[0035] As is particularly evident from the section of Figure 4, the portions 15, 25 of each duct belong to two grooved planes of two plates 35, 45 facing each other.

[0036] Said two portions 15, 25 have flat faces, obtained from the grooves of said plates 35, 45.

[0037] In the preferred embodiment illustrated, said portions 15, 25 have a V-shaped cross section such that, once they are facing each other, they define a duct with cross section for passage of the buckshot 2 having a substantially rhomboidal shape.

[0038] Said two portions 15, 25 are movable with respect to each other: in particular, a first portion 15 of each duct is fixed and a second portion 25 of said duct is movable.

[0039] Said ducts comprise regulating means adapted to regulate and determine the mutual distance between the corresponding two portions 15, 25.

[0040] Said regulating means comprise a plurality of interchangeable spacers 9, adapted to be inserted between said two grooved planes of said plates 35, 45 to maintain between them an adequate distance, defined according to the calibre of the infeed buckshot 2.

[0041] The spacers 9 have a thickness suitable for defining the desired distance between the two portions 15, 25 of each duct: at each change of calibre of the infeed buckshot 2, said distance must be modified and consequently further spacers 9 are used with appropriate thicknesses.

[0042] The plate 35 comprising the grooved plane acting as the fixed portion 15 of the slides 5 shaped as a duct comprises housing pins 11 adapted to retain said spacers 9 in a stable position.

[0043] To increase the stability and safety of the entire station 1, the two plates 35, 45 adapted to define the slides 5 with the respective grooved planes are also secured to each other, once the appropriate distance has been defined, by means of reversible fastening means, for example screws 8.

[0044] As illustrated in the exploded axonometric drawing of Figure 5, where the front plate 45 has been removed, each spacer 9 is shaped like a ring to fit stably on said housing pins 11, and its thickness is chosen appropriately according to the desired distance to be maintained between the two portions 15, 25 of the ducts of the slides 5, in particular between the two grooved planes belonging to the facing plates 35, 45.

[0045] For each slide 5 shaped as a duct, said station 1 comprises a needle 6, adapted to move reversibly transversally to the slide, being inserted inside it via appropriate slots 10.

[0046] Said needle 6 is associated with a carriage 12, free to move horizontally to allow insertion of the needle 6 into the slot 10 of the corresponding slide 5. The carriage 12 can also be positioned along the longitudinal extension direction of the slide.

[0047] Said carriage 12 cooperates with appropriate gauges 13 adapted to define the position of said needle 6: said position is chosen according to the desired number of buckshot 2 to be isolated and sent to each cartridge.

[0048] By varying the thickness of said gauges 13, the position of the carriage 12 to which the needle 6 is secured is raised or lowered.

[0049] Operation of the feed and count station 1, and the set-up method thereof at each change of calibre of the infeed buckshot 2, are as follows.

[0050] Firstly, the operator chooses a plurality of spacers 9, evaluating their thicknesses according to the calibre of the buckshot 2 to be counted and sent to the cartridges, and positions them on the appropriate housing pins 11 obtained on the plate 35 defining the fixed portions 15 of the ducts of the slides 5.

[0051] Once the spacers 9 have been positioned, the operator applies the movable plate 45, comprising its grooved plane, until it stops against the spacers 9, and stably fastens the two plates 35, 45 to each other by means of the screws 8.

[0052] The slides 5 are arranged to allow sliding of the buckshot 2 inside them, without the risk of obstructions or jamming.

[0053] Set-up of the feed and count station 1 requires very limited times, significantly speeding up and simplifying all the set-up operations of the entire loading machine.

[0054] The number of buckshot 2 to be distributed in each single cartridge are counted by means of said movable needles 6 which are inserted transversally in the slots 10 of the slides 5, isolating the chosen quantity of buckshot 2, stopping and retaining the upper column of buckshot and letting the "counted" buckshot drop towards the download means 7 and the cartridges to be filled.

[0055] To vary the quantity of buckshot 2 to be isolated, said gauges 13 are used adapted to move the carriage 12 and therefore the work position of the needles 6 along the axes of the slides 5.

[0056] Once the chosen quantity of buckshot 2 has been isolated, it is sent to the download means 7 and from the latter to the empty cartridges to be filled.

Claims

1. A feed and count station (1) for buckshot (2) for hunting cartridges loaded with lead shots comprising:

- a support frame (3);
- feed means (4) for a plurality of buckshot (2);
- at least one slide (5) having a main line of longitudinal extension suitable for the regular canalization of said buckshot (2);
- at least one movable needle (6) adapted to cooperate with said at least one slide (5), reversibly engaging a through hole in a wall of said slide (5), to select a precise quantity of said buckshot (2);
- download and convey means (7) of said precise quantity of said buckshot (2) towards said cartridges,

at least one slide comprises a duct divided into two portions (15, 25) along a plane (II) passing through said line of longitudinal extension and comprises regulating means (8, 9) adapted to regulate the mutual distance between said two portions (15, 25).

2. The feed and count station (1) according to claim 1, **characterized in that** said two portions (15, 25) of said duct have a plurality of flat faces.

3. The feed and count station (1) according to claim 2, **characterized in that** each of said two portions (15, 25) of said duct has a V-shaped cross section.

4. The feed and count station (1) according to claim 3, **characterized in that** said two portions (15, 25) of said duct define, in section, a passage area having rhomboidal shape.

5. The feed and count station (1) according to claim 1, **characterized in that** a first portion (15) of said duct is fixed and a second portion (25) of said duct is movable.
6. The feed and count station (1) according to claim 5, **characterized in that** said regulating means comprise screws (8) for stably fastening said movable portion (25) to said fixed portion (15).
7. The feed and count station (1) according to claim 1, **characterized in that** said regulating means comprise a plurality of spacers (9), which are interchangeable according to the dimension of said buckshot (2), adapted to be inserted between one portion and the other portion (15, 25) of said duct.
8. The feed and count station (1) according to claim 1, **characterized in that** it comprises a plurality of slides (5) arranged parallel to one another along said plane (II) having a substantially vertical arrangement.
9. The feed and count station (1) according to claim 8, **characterized in that** it comprises two plates faces (35, 45) facing each other, provided with V-shaped grooves, adapted to define the two portions (15, 25) of the duct of each slide.
10. A loading machine for hunting cartridges **characterized in that** it comprises a feed and count station (1) for buckshot (2) according to at least one of the preceding claims.

Patentansprüche

1. Eine Speise- und Zählstation (1) für Schrotkugeln (2) für Jagdpatronen, die mit Bleischrot geladen sind, umfassend:
 - ein Traggestell (3);
 - Speisevorrichtungen (4) für eine Vielzahl von Schrotkugeln (2);
 - mindestens eine Gleitschiene (5) mit einer Hauptlinie in Längsausdehnung, geeignet für die reguläre Kanalisierung der besagten Schrotkugeln (2);
 - mindestens eine bewegliche Nadel (6), angepasst, um mit der besagten zumindest einen Gleitschiene (5) zusammenzuarbeiten, wobei sie reversibel ein Durchgangsloch in einer Wand der besagten Gleitschiene (5) in Anspruch nimmt, um eine präzise Menge der besagten Schrotkugeln (2) auszuwählen;
 - Herunterladungs- und Transportvorrichtungen (7) dieser besagten präzisen Menge von Schrotkugeln (2) zu den besagten Patronen, mindes-

tens eine Gleitschiene umfasst eine Leitung, unterteilt in zwei Abschnitte (15, 25) längs einer Ebene (II), die durch die besagte Linie in Längsausdehnung verläuft, und umfasst Regulierungsvorrichtungen (8, 9), angepasst, um den gegenseitigen Abstand zwischen den besagten zwei Abschnitten (15, 25) zu regulieren.

2. Die Speise- und Zählstation (1) gemäß Anspruch 1, **gekennzeichnet dadurch, dass** die besagten zwei Abschnitte (15, 25) der besagten Leitung eine Vielzahl von flachen Flächen aufweisen.
3. Die Speise- und Zählstation (1) gemäß Anspruch 2, **gekennzeichnet dadurch, dass** jeder dieser besagten zwei Abschnitte (15, 25) der besagten Leitung einen V-förmigen Querschnitt aufweist.
4. Die Speise- und Zählstation (1) gemäß Anspruch 3, **gekennzeichnet dadurch, dass** die besagten zwei Abschnitte (15, 25) der besagten Leitung, im Querschnitt, einen Durchgangsbereich mit rautenförmiger Form definieren.
5. Die Speise- und Zählstation (1) gemäß Anspruch 1, **gekennzeichnet dadurch, dass** ein erster Abschnitt (15) der besagten Leitung fest ist und ein zweiter Abschnitt (25) der besagten Leitung beweglich ist.
6. Die Speise- und Zählstation (1) gemäß Anspruch 5, **gekennzeichnet dadurch, dass** die besagten Regulierungsvorrichtungen Schrauben (8) zur dauerhaften Befestigung des besagten beweglichen Abschnitts (25) an dem besagten festen Abschnitt (15) umfassen.
7. Die Speise- und Zählstation (1) gemäß Anspruch 1, **gekennzeichnet dadurch, dass** die besagten Regulierungsvorrichtungen eine Vielzahl von Abstandshaltern (9) umfassen, die austauschbar sind gemäß der Größe dieser Schrotkugeln (2), angepasst, um zwischen dem einen und dem anderen Abschnitt (15, 25) dieser Leitung eingefügt zu werden.
8. Die Speise- und Zählstation (1) gemäß Anspruch 1, **gekennzeichnet dadurch, dass** sie eine Vielzahl von Gleitschienen (5) umfasst, parallel zueinander angeordnet längs der besagten Ebene (II), die eine im Wesentlichen Vertikalanordnung aufweist.
9. Die Speise- und Zählstation (1) gemäß Anspruch 8, **gekennzeichnet dadurch, dass** sie zwei Plattenflächen (35, 45) umfasst, die einander gegenüberliegen, versehen mit V-förmigen Rillen, angepasst, um die zwei Abschnitte (15, 25) der Leitung jeder Gleitschiene zu definieren.

10. Eine Lademaschine für Jagdpatronen, **gekennzeichnet dadurch, dass** sie eine Speise- und Zählstation (1) für Schrotkugeln (2) gemäß zumindest einer der vorhergehenden Ansprüche umfasst.

Revendications

1. Station d'alimentation et de comptage (1) pour les chevrotines (2) pour cartouches de chasse chargées de billes de plomb comprenant :

- un cadre de support (3) ;
 - des moyens d'alimentation (4) pour une multitude de chevrotines (2) ;
 - au moins une glissière (5) ayant une ligne principale d'extension longitudinale adaptée à la canalisation régulière desdites chevrotines (2) ;
 - au moins une aiguille mobile (6) prévue pour coopérer avec au moins ladite glissière (5), qui s'engage de manière réversible à travers un trou dans une paroi de ladite glissière (5), pour sélectionner une quantité précise desdites chevrotines (2) ;
 - des moyens de déchargement et de transport (7) de ladite quantité précise de chevrotines (2) vers lesdites cartouches,
- au moins une glissière comprend un conduit divisé en deux portions (15, 25) le long d'un plan (II) passant à travers ladite ligne d'extension longitudinale et comprend des moyens de régulation (8, 9) prévus pour réguler la distance mutuelle entre lesdites deux portions (15, 25).

2. Station d'alimentation et de comptage (1) selon la revendication 1, **caractérisée par le fait que** lesdites deux portions (15, 25) dudit conduit ont une multitude de faces planes.

3. Station d'alimentation et de comptage (1) selon la revendication 2, **caractérisée par le fait que** chacune desdites deux portions (15, 25) dudit conduit possède une section transversale en V.

4. Station d'alimentation et de comptage (1) selon la revendication 3, **caractérisée par le fait que** lesdites deux portions (15, 25) dudit conduit définissent, en section, une zone de passage ayant une forme rhomboïdale.

5. Station d'alimentation et de comptage (1) selon la revendication 1, **caractérisée par le fait qu'**une première portion (15) dudit conduit est fixe et qu'une deuxième portion (25) dudit conduit est mobile.

6. Station d'alimentation et de comptage (1) selon la revendication 5, **caractérisée par le fait que** lesdits

moyens de régulation comprennent des vis (8) pour fixer de manière stable ladite portion mobile (25) à ladite portion fixe (15).

7. Station d'alimentation et de comptage (1) selon la revendication 1, **caractérisée par le fait que** lesdits moyens de régulation comprennent une multitude d'entretoises (9), qui sont interchangeables en fonction de la dimension desdites chevrotines (2), prévues pour être insérées entre une portion et l'autre portion (15, 25) dudit conduit.

8. Station d'alimentation et de comptage (1) selon la revendication 1, **caractérisée par le fait qu'**elle comprend une multitude de glissières (5) disposées en parallèle les unes par rapport aux autres le long dudit plan (II) ayant une disposition substantiellement verticale.

9. Station d'alimentation et de comptage (1) selon la revendication 1, **caractérisée par le fait qu'**elle comprend deux faces planes (35, 45) l'une en face de l'autre, dotées de rainures en V, prévues pour définir les deux portions (15, 25) du conduit de chaque glissière.

10. Machine de chargement pour cartouches de chasse **caractérisée par le fait qu'**elle comprend une station d'alimentation et de comptage (1) pour chevrotines (2) selon au moins l'une des revendications précédentes.

Fig. 1

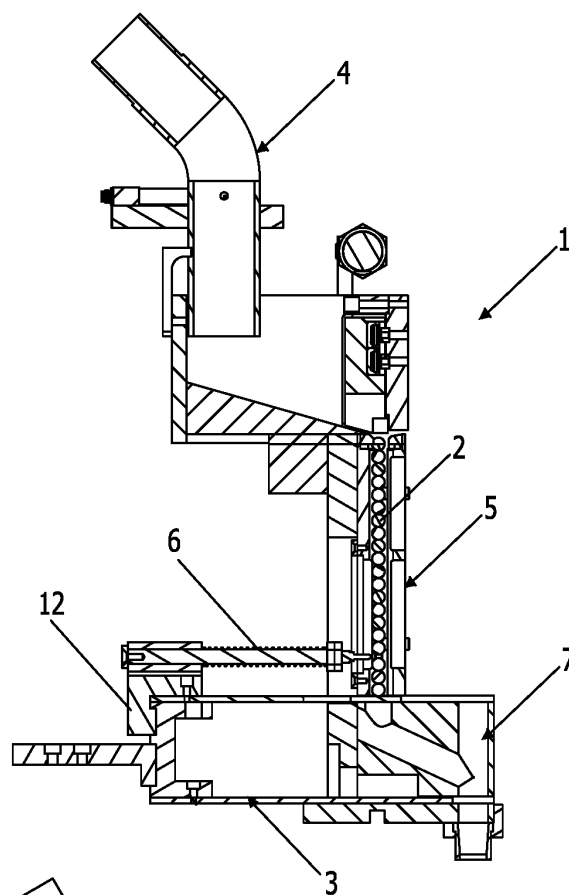


Fig. 2

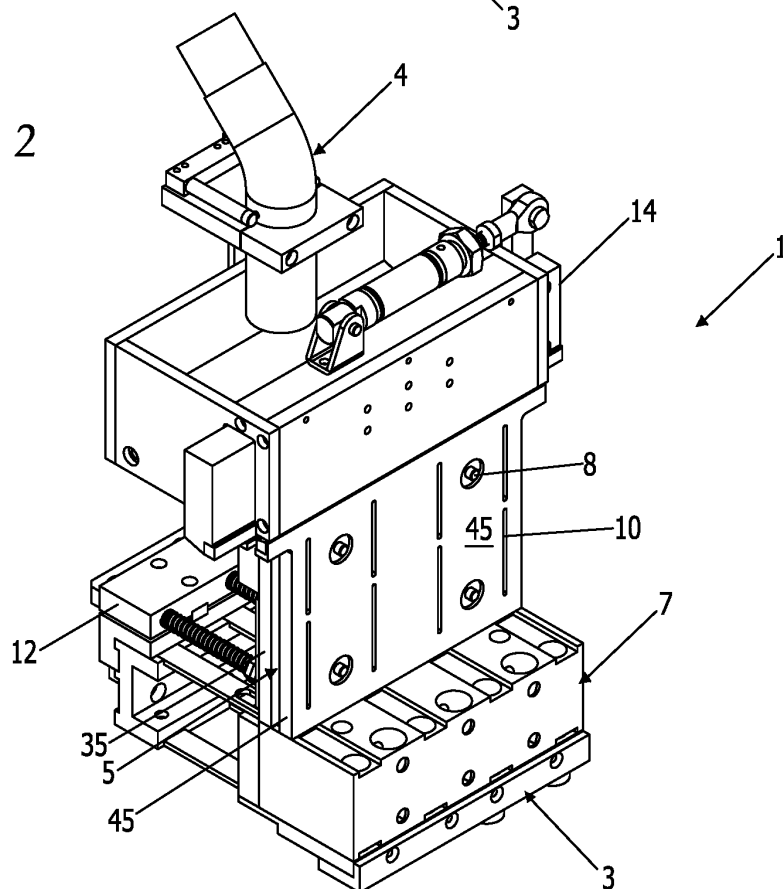


Fig. 3

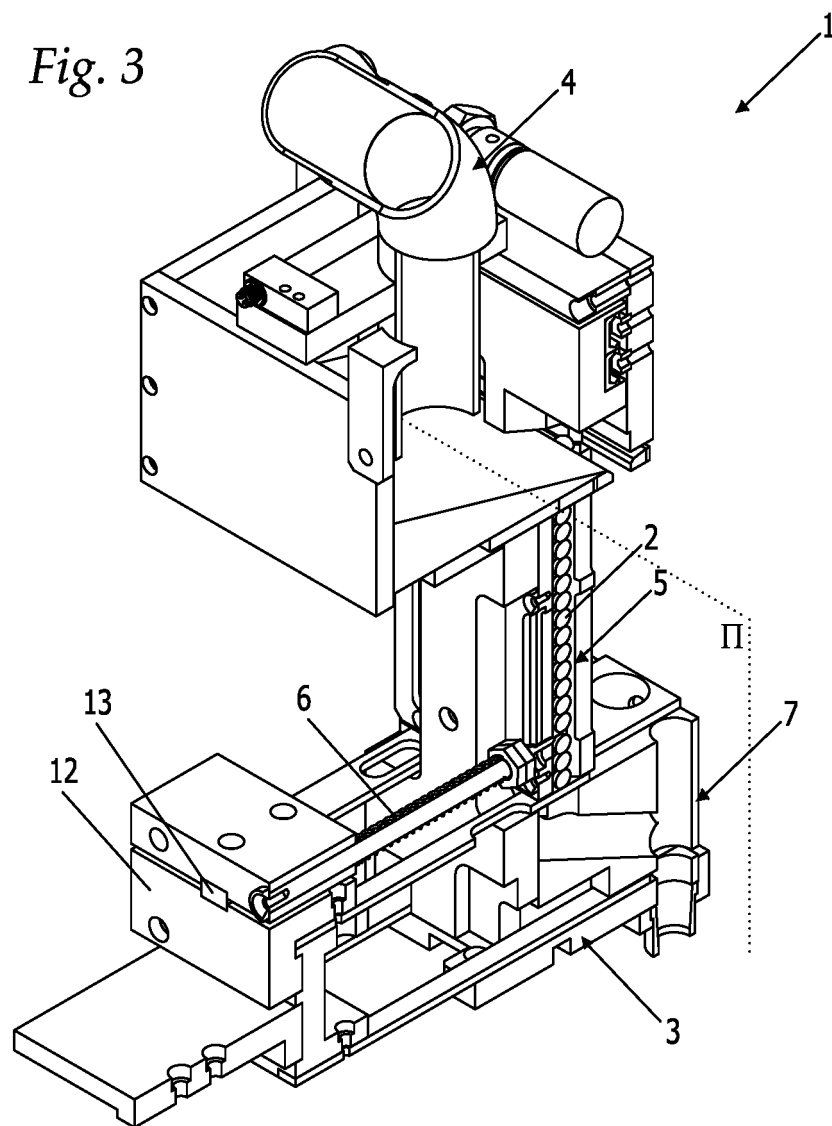


Fig. 4


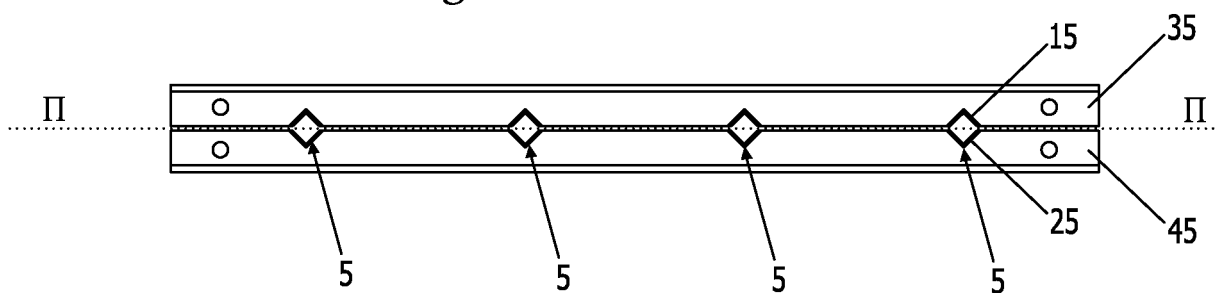


Fig. 5

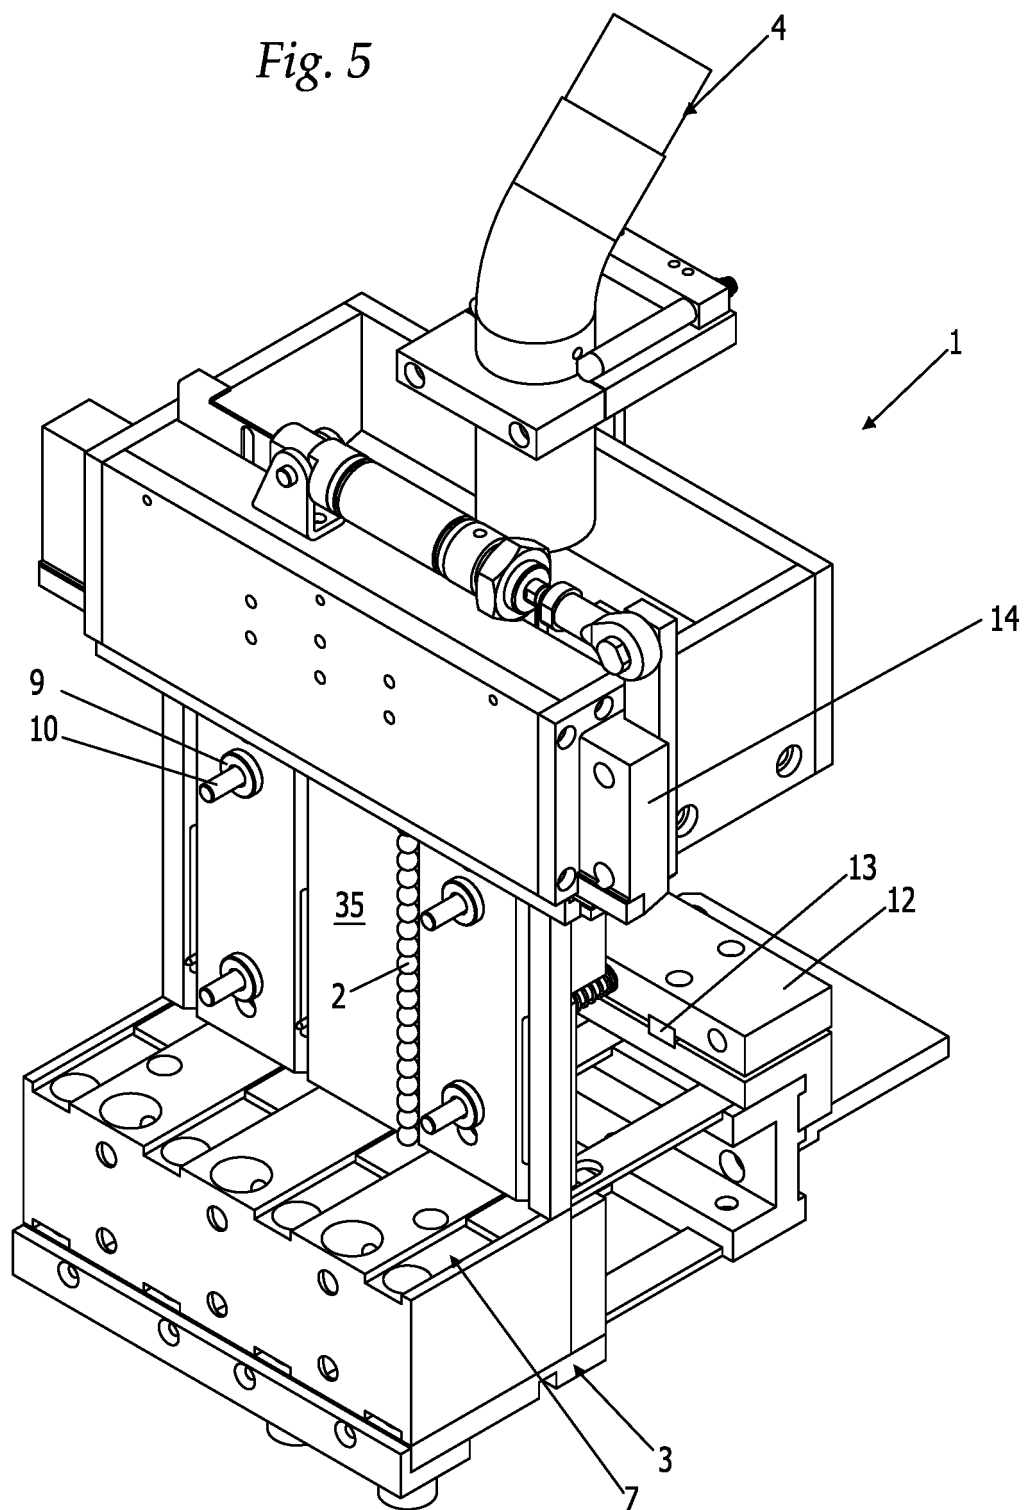

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 23226 A [0005]