




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>B67D 5/64</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/10910</b> (43) International Publication Date: 2 March 2000 (02.03.00)</p>
<p>(21) International Application Number: PCT/US99/18909 (22) International Filing Date: 18 August 1999 (18.08.99) (30) Priority Data: 60/097,403 21 August 1998 (21.08.98) US (71) Applicant (for all designated States except US): PHARMACIA &amp; UPJOHN COMPANY [US/US]; 7000 Portage Road, Kalamazoo, MI 49001 (US). (74) Agent: GOSKA, Matthew, L.; Van Dyke, Gardner, Linn &amp; Burkhart, LLP, P.O. Box 888695, Grand Rapids, MI 49588-8695 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: SPRAY BOTTLE GRIP

(57) Abstract

An ergonomically improved spray bottle grip includes a top wall (38) surrounded by a perimeter wall (48) that defines a first recess on the underside of the top wall. One or more shoulders (58) projecting inwardly from the perimeter wall (48) allow the first recess to receive a finger flange on the spray bottle (30) in a snap fit manner. A pair of arms (24) extend downwardly from the perimeter wall and terminate in a pair of finger grips (32).

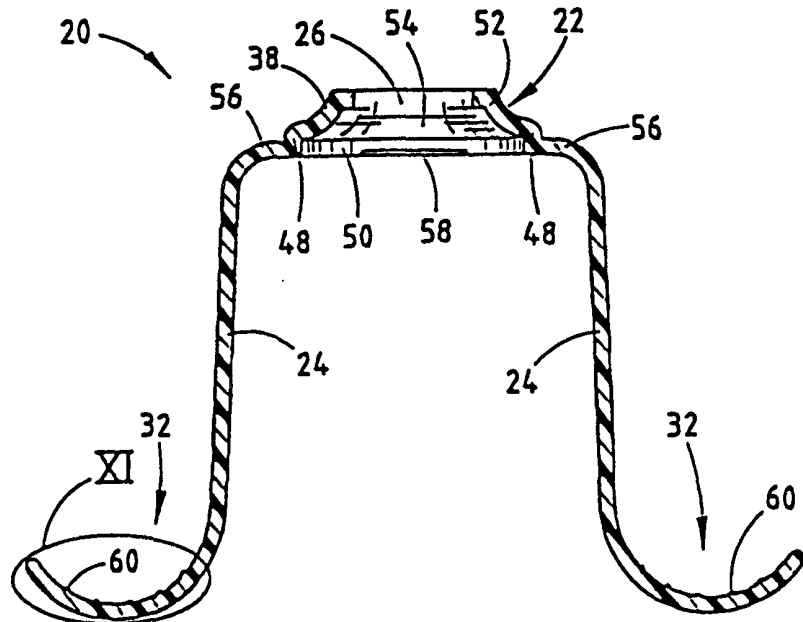

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SPRAY BOTTLE GRIPBACKGROUND OF THE INVENTION

This invention relates generally to spray bottles, and more particularly to a grip for use in conjunction with a spray bottle.

5           Spray bottles are available in a wide variety of shapes and sizes, and are used in a wide variety of applications. Some spray bottles have their contents pressurized, such as aerosol paint cans and the like, while other spray bottles have their contents expelled through a pump attached to the bottle, such as cleaning products and medicinal products. In the case of spray bottles containing liquid pharmaceutical products, it is often critical that a precise amount of the liquid  
10           pharmaceutical be dispensed each time the spray bottle is activated. Too much of the pharmaceutical product or drug may cause side effects, while too little of the drug may be ineffective. In the case of nasal spray bottles used for delivering a drug to a patient's nasal passageways, a precise amount of the drug is typically delivered by a pump mechanism that must be precisely activated. The pump is usually activated by the user placing his thumb under  
15           the bottom of the bottle, placing two of his fingers on opposite sides of a finger flange disposed towards the top end of the bottle, and then squeezing such that the bottle bottom and the finger flange are drawn toward one another. Such movement activates the pump and expels a portion of the bottle's contents.

          In order to expel only a selected amount of the drug out of the bottle, the movement of  
20           the finger flange is limited by a stop positioned on the pump at a measured distance below the rest position of the finger flange. While the stop prevents spraying too large of a dose of the drug, the stop does not ensure that a complete dose is delivered. To ensure a complete dose, the finger flange must be pressed down both completely and evenly against the stop. If the finger flange is pressed down unevenly, then one side of the flange will contact the stop before the  
25           other, which may cause the user to prematurely terminate the squeezing of the finger flange and thereby deliver an incomplete dose. Similarly, if one of the user's fingers should slip, an incomplete dose may be delivered. The proper use of the pump, therefore, requires correct positioning of the fingers on the finger flange and controlled, coordinated movement of the

finger flange. While these requirements may be easily met by most adults, however, people with Parkinson's disease or coordination difficulties, arthritics, stroke victims, or children all may find the proper use of a spray bottle difficult. A spray bottle that can be easily used by a wide variety of persons with varying physical conditions and of varying ages is, therefore,  
5 highly desirable.

### SUMMARY OF THE INVENTION

The present invention overcomes the above described difficulties and provides an ergonomic and user-friendly device for activating spray bottles that can be more easily used by a  
10 wide variety of different people with different physical capabilities.

A grip for a bottle according to one aspect of the present invention includes a top wall defining an aperture and surrounded by a perimeter wall. At least two arms are attached to the perimeter wall and extend downwardly from the perimeter wall. At the end of each of the arms is a finger grip. In operation, the nozzle of a spray bottle is inserted through the aperture defined  
15 in the top wall until the top wall contacts the finger flange on the bottle. Thereafter, the user presses down on each of the finger grips while holding the bottom of the bottle which thereby activates the pump.

A bottle grip according to another aspect of the present invention includes a top defining a closed aperture. The closed aperture is dimensioned to telescopingly receive the nozzle on the  
20 bottle such that the top abuts the flange on the bottle. At least two arms are attached to the top and extend downwardly therefrom. Each of the arms terminates in a finger grip at an end opposite the top.

According to another embodiment of the present invention, a bottle grip includes an extension member integrally attached to a reciprocating member on the spray bottle. Relative  
25 movement of the reciprocating member with respect to the spray bottle activates a pump on the spray bottle. The grip further includes arms attached to opposite sides of the extension member and extending downwardly from the extension member toward the bottom of the bottle. A finger gripping surface is defined on each of the arms at an end opposite the extension member.

In other embodiments, the bottle grip includes an extension wall attached to the top and  
30 extending outwardly from the top in a plane generally parallel to the top. The extension wall is disposed between the arms and the top. The perimeter wall defines a first recess on its underside

which includes a shoulder dimensioned to retain the finger flange on the bottle in the first recess with a snap fit. The aperture defined in the top may include a raised, annular lip surrounding the aperture. The underside of the lip defines a second recess which is dimensioned to conform to the shape of the nozzle of the bottle. The perimeter wall may also include a pair of long sides and a pair of short sides, with the extension walls extending outwardly from the long sides. Ribs or other frictional members may be defined on the finger grips to frictionally retain a user's fingers.

The bottle grip of the present invention improves the ease of use of spray bottles in several respects, especially for nasal spray bottles used for delivering predetermined doses of drugs. The finger grips provide a larger surface for gripping, and in one embodiment may be curved, thereby reducing the potential of a finger slipping. The finger grips also extend outwardly a greater distance from the pump than the finger flange, thereby making it easier for a user to press downwardly in an even fashion. Furthermore, the downwardly extending arms of the grip position the finger grips closer to the bottom of the medicine bottle, thereby enabling a person with a smaller hand to more easily use the device. The fingers are also positioned further away from the nozzle of the pump, thereby allowing a greater freedom of movement of the nozzle. These and other objects, benefits, and features of the present invention will be apparent to one skilled in the art, in light of the following specification when read in conjunction with the accompanying drawings.

20

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a grip according to one embodiment of the present invention;

Figure 2 is a front, elevational view of the grip of Figure 1 shown attached to a spray bottle;

25 Figure 3 is a front, elevational view of the grip shown attached to the spray bottle with the spray bottle in a compressed position;

Figure 4 is a plan view of the grip;

Figure 5 is a bottom view of the grip;

Figure 6 is a side, elevational view of the grip;

30 Figure 7 is a sectional, elevational view of the grip taken along the line VII-VII in Figure 6;

Figure 8 is a sectional, elevational view taken along the line VIII - VIII in Figure 4;

Figure 9 is an enlarged view of the area labeled IX in Figure 8;

Figure 10 is a sectional, plan view taken along the line X - X in Figure 6;

Figure 11 is an enlarged view of the area labeled XI in Figure 7;

5 Figure 12 is a fragmentary, perspective view of a bottle grip according a second embodiment of the present invention;

Figure 13 is a front, elevational view of the bottle grip of Figure 12; and

Figure 14 is a side, elevational view of the bottle grip of Figure 12.

### 10 DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention will now be described with reference to the accompanying drawings wherein like reference numerals correspond to like elements in the several drawings. A grip 20 according to one embodiment of the present invention is depicted in Figure 1. Grip 20 includes a top or cover 22 from which a pair of arms 24 downwardly depend. A generally  
15 circular, closed aperture 26 is defined in the center of cover 22. Aperture 26 has a diameter sufficient to telescopingly receive a nozzle 28 disposed on a spray bottle 30. A finger grip 32 is attached to each arm 24 at an end opposite cover 22. In operation, grip 20 is placed over a spray bottle 30 as shown in Figure 2. Nozzle 28 projects through closed aperture 26, and arms 24 extend downwardly along the length of bottle 30. In order to spray the contents of bottle 30 out  
20 of nozzle 28, a user places his or her thumb on a bottom 34 of bottle 30 and two fingers on finger grips 32 (Figure 3). Thereafter, the user exerts a downward force on finger grips 32 (see arrow A in Figure 2) by squeezing together his or her thumb and fingers. The downward movement in grip 20 activates a pump on spray bottle 30 by moving the finger grips toward the bottom of the bottle, and thereby emits a spray from a top 36 of nozzle 28 in a precisely  
25 measured dose.

Cover 22 includes a generally flat top wall 38 having a top surface 40 and a bottom surface 42 (Figs. 1-7). Bottom surface 42 contacts a finger flange on bottle 30 which is concealed from view in Figures 2 and 3. Top wall 38 is generally shaped the same as the shape of the finger flange of the bottle. In the disclosed embodiment, top 22 is generally oval shaped  
30 and includes a pair of long sides 44 and short or curved sides 46. A perimeter wall 48 is disposed around the edges of top wall 38 and extends downwardly from bottom surface 42.

Perimeter wall 48 is oriented generally perpendicular to top wall 38. Perimeter wall 48 and top wall 38 define, in combination, a first recess 50 that is dimensioned to snugly receive the finger flange on bottle 30 (Figure 7).

At least one shoulder 58 is defined on perimeter wall 48 and extends inwardly toward the bottle (Figs. 7-10). In the preferred embodiment, there are two shoulders 58a and 58b, each defined along short sides 46 of perimeter wall 48 (Fig. 10). Additional shoulders could be defined along long sides 44 of perimeter wall 48, or a continuous shoulder defined along the entire inner perimeter of perimeter wall 48 could be used. Shoulders 58 are positioned on perimeter wall 48 at a distance D below top wall 38 (Fig. 9). Distance D is slightly larger than the width of the finger flange on the bottle to allow the finger flange to fit between top wall 38 and shoulders 58. In the current embodiment, shoulders 58 extend along short sides 46 and terminate at both ends at termination points 59. The top surface of shoulder 58 slopes downwardly and defines an angle  $\theta$  with the inside surface of perimeter wall 48 (Fig. 9). In the current embodiment,  $\theta$  is  $145^\circ$ , although other angles can be used. Shoulders 58 allow grip 20 to be snap fit onto the finger flange on bottle 30. Grip 20 is made of a sufficiently flexible material to allow shoulders 58 to flex outwardly when the finger flange is inserted into first recess 50. Once the finger flange is received in first recess 50, shoulders 58 snap back to their unflexed position and releasably secure grip 20 on bottle 30. The dimensions of shoulders 58 can be varied, and are partially dependent upon the flexibility of the material used for grip 20 and the desired tightness of the resulting snap fit, as is known to one skilled in the art. In the current embodiment, both the height and width of shoulders 58 are on the order of several hundredths of an inch.

Top surface 40 of top wall 38 is generally flat except for an upwardly flared lip 52 generally surrounding the immediate circumference of aperture 26. Lip 52 extends upward from top surface 40 and defines a second recess 54 adjacent bottom surface 42. Second recess 54 is configured generally to correspond to the shape of the nozzle of the spray bottle. The positioning of the finger flange on the bottle in first recess 50 and the non-circular shape of recess 50 maintains grip 20 on the bottle and prevents rotation of grip 20 on the bottle when in use. A cap 53 (shown in phantom in Figs. 2 & 3) may be used with bottle 30 in between administering the contents of bottle 30. Cap 53 may be held on nozzle 28 in a snap fit manner by engaging an annular ridge 55 on nozzle 28 (Figs. 2 & 3). A plurality of shoulders (not

shown) are defined on the inside, lower end of cap 53 and resiliently snap into place below ridge 55 when cap 53 is snap fit over nozzle 28. When snapped onto nozzle 28, cap 53 therefore extends a short distance below ridge 55. In the preferred embodiment of grip 20, lip 52 extends upwardly from top surface 40 a limited distance such that there is sufficient space between the top of lip 52 and ridge 55 for the shoulders or cap 53 to engage ridge 55. In other words, lip 52 should be short enough to not interfere with the operation of cap 53, thereby allowing cap 53 to be placed over bottle 30 while grip 20 is attached to bottle 30.

An extension wall 56 is attached to each long side 44 of top 22. Extension walls 56 are oriented generally parallel to top wall 38 and in a slightly lower plane. Extension walls 56 are joined to arms 24 which extend downwardly from top wall 38. Arms 24 curl upwardly and outwardly towards their bottom end. The curled portion of arms 24 defines a finger grip or finger gripping surface 32. A plurality of ribs 62 are defined on finger grips 32 on the surface contacted by a user's fingers (Figs. 2, 7 and 11). Ribs 62 provide increased friction to help prevent a user's fingers from sliding off of finger grips 32. It will be understood, of course, that ribs 62 could be replaced by other functional members, such as bumps, grooves, or other friction enhancing configurations. An upward portion 60 of finger grip 32 ensures that a user's fingers do not easily slip off of finger grip 32. In the preferred embodiment, finger grips 32 extend outwardly a greater extent than the finger flange on bottle 30. The greater extension of finger grips 32 makes it easier for a user to exert balanced forces when pressing downward to activate the pump on the spray bottle.

When in use, grip 20 is placed over a spray bottle 30 by telescopingly inserting the nozzle 28 of the spray bottle into closed aperture 26. Grip 20 is pushed downwardly onto spray bottle 30 until top wall 38 contacts a finger flange on the spray bottle. The finger flange of spray bottle 30 preferably snaps into first recess 50 defined on bottom surface 42 of top wall 38. The snap fit, as described above, is accomplished by one or more shoulders. The user then places two fingers on top of finger grips 32 while simultaneously placing a thumb on the bottom of spray bottle 30 (Figure 3). Thereafter, the user squeezes down on finger grips 32 while pressing upward with his or her thumb, thereby moving the bottom of the bottle toward finger grips 32 and nozzle 28. This compression between the fingers and the thumb activates the pump on the spray bottle and thereby emits a measured dose or portion of the contents of the bottle.

In the preferred embodiment, grip 20 is made of a suitably strong plastic, preferably



polypropylene. The precise type of plastic can, of course, be varied and other materials besides plastic can be used in the present invention. By way of illustrative, but not exhaustive, examples, grip 20 can be made from metal, acrylics, nylon, or other materials. In the current embodiment, Montell 6331 polypropylene manufactured by Montell Polyolefin of Pasadena, Texas, is used.

Grip 20 provides a more ergonomic device and method for using a spray bottle, especially a spray bottle which is used to deliver a preselected amount of a drug or medicine. The upward portions 60 and ribs 62 of finger grip 32 help prevent slippage of a user's fingers while activating the spray bottle. With the use of grip 20, the distance between the user's fingers and thumb is reduced, thereby making it easier for people with small hands to use. Furthermore, finger grips 32 extend outwardly a greater distance from the central vertical axis of the bottle than does the finger flange on the bottle. This greater extension of finger grips 32 makes it easier for a user to evenly compress the pump on the spray bottle.

A grip 120 according to a second embodiment of the present invention is depicted in Figs. 12-14, wherein elements corresponding to like elements in grip 20 are labeled with the same numbers increased by one hundred. Grip 120 is integrally molded to bottle 130 and is not selectively detachable therefrom as is grip 20. Grip 120 includes an extension member 121 integrally attached to a reciprocating member 123 on bottle 130. Relative movement of reciprocating member 123 with respect to bottle 130 activates the pump on the bottle, thereby expelling a portion of the contents of the bottle. Extension member 121 is located on bottle 130 generally in the same position as the finger flange on bottle 30. A pair of arms 124 extend downwardly from extension member 121 along opposite sides of extension member 121. A finger gripping surface 132 is defined on each of arms 124. Finger grips 132 are defined on the ends of arms 124 and spaced from extension member 121. Finger grips 132 may include a plurality of ribs 162, or other frictional members, for providing increased frictional resistance to slipping of a user's fingers. Grip 120 is preferably manufactured from the same material as reciprocating member 123 on bottle 130, such as polypropylene, although other materials may be used. Currently, reciprocating member 123 on bottle 130 is manufactured from one of two polypropylene blends: (1) 99.5% Hoechst PPV 1780 Natural polypropylene and .5% Ferro White FA 5089L coloring agent available from Hoechst AG of Germany, and Ferro Corporation of Cleveland, Ohio, respectively; or (2) 75% Hostalen PPT 1070 S1 (M) Natural polypropylene

and 25% Hostalen PPR 1060 F (M) White 24 coloring agent, available from Hostalen GmbH of Germany. As noted, other types of materials could be used, including, but not limited to, nylon, acrylics, metal, or other types of plastics. Grip 130 operates in the same fashion as grip 20; namely, by pressing downward on finger gripping surfaces 132 while pushing the bottle upward, the spray bottle is activated. Grip 120 provides similar benefits and results as grip 20.

It will be understood that various modifications can be made to either embodiment of the present invention. For example, extension walls 56 could extend outward a greater distance such that finger grips 32 would extend inwardly, rather than outwardly. Finger grips 32 could also be modified to form a complete loop through which a user's fingers would be inserted.

Arms 24 and extension wall 56 could also be modified to extend out of short sides 46 on top 22 instead of long sides 44. With arms 24 and extension wall 56 extending out of short sides 46 on top 22, aperture 26 could be additionally modified to be partially open along one of long sides 44, thereby allowing grip 20 to be moved sideways over the bottle rather than over the tip of the nozzle. As yet another possible modification, arms 24 could be joined to each other forming a cylindrical housing that partially fits over the bottle. The foregoing modifications may be made to grip 20, grip 120, or both.

While the present invention has been described in terms of the preferred embodiments discussed in the above specification along with various modifications, it will be understood by one skilled in the art that the present invention is not limited to these particular preferred embodiments and variations, but includes any and all such modifications that are within the spirit and scope of the present invention as defined in the appended claims.

The embodiments of the present invention in which an exclusive property or privilege is claimed are defined as follows:

1. A grip for a bottle that includes a nozzle out of which the contents of the bottle are selectively expelled and a flange enabling the bottle to be pressed for expelling the contents through the nozzle, comprising:

- 5 a top wall defining an aperture, said aperture dimensioned to receive the nozzle on the bottle;
- a perimeter wall extending downwardly from said top wall around a perimeter of said top wall, said perimeter wall configured to snugly abut against the finger flange on the bottle;
- 10 at least two arms attached to said perimeter wall and extending downwardly from said perimeter wall; and
- a finger grip secured to each of said at least two arms at an end of said arms opposite said top wall.

2. The bottle grip of claim 1 wherein said finger grips are oriented facing away from each other.

3. The bottle grip of claim 1 wherein said arms are oriented generally perpendicular to said top wall.

4. The bottle grip of claim 1 further including an extension wall disposed between said perimeter wall and each of said arms, said extension wall oriented generally parallel to said top wall and generally perpendicular to said arms.

5. The bottle grip of claim 1 further including a raised, annular lip surrounding said aperture defined in said top wall.

6. The bottle grip of claim 1 wherein said finger grips extend outward from the bottle a greater distance than the finger flange.
7. The bottle grip of claim 1 wherein said perimeter wall further includes at least one shoulder extending inwardly from said perimeter wall towards the bottle, said shoulder dimensioned to secure said top wall and said perimeter wall on the bottle flange in a snap fitting manner.
8. The bottle grip of claim 1 wherein said finger grips are curved concavely upward.
9. The bottle grip of claim 1 wherein said perimeter wall includes two long sides and two short sides, and said at least two arms are attached to said perimeter wall along said long sides.
10. The bottle grip of claim 1 wherein said aperture defined in said top wall is a closed aperture.
11. The bottle grip of claim 1 further including a plurality of frictional members defined on each said finger grip, said frictional members adapted to help frictionally retain a user's fingers on said finger grips.
12. The bottle grip of claim 11 wherein said frictional members defined on each said finger grip are ribs.
13. For a bottle having a pump and a nozzle, the pump adapted to expel at least a portion of the contents of the bottle out of the nozzle when a compression force is applied between a bottom of the bottle and a finger flange adjacent the nozzle of the bottle, a grip, comprising:
  - a top wall having a top surface and a bottom surface, said bottom surface
  - 5 dimensioned to contact at least a portion of the finger flange on the bottle;
  - at least two arms extending from said bottom surface toward the bottom of said
  - bottle; and
  - a finger gripping surface attached to each of said arms at an end of said arms

opposite said top wall, said finger gripping surfaces facing away from the bottom of the bottle.

14. The grip of claim 13 further including a perimeter wall surrounding said top wall, said perimeter wall oriented generally perpendicular to said top wall and dimensioned to snugly abut the finger flange on the bottle.

15. The grip of claim 14 wherein said top wall defines an aperture dimensioned to receive the nozzle on the bottle.

16. The grip of claim 14 further including an extension wall disposed between said perimeter wall and each of said arms, said extension wall oriented generally perpendicular to said arms.

17. The grip of claim 16 wherein said perimeter wall is generally oval shaped having two short sides and two long sides, and said at least two arms are attached to said perimeter wall along said long sides.

18. The grip of claim 15 further including a raised, annular lip surrounding said aperture defined in said top wall, said raised annular lip configured to conform to a portion of the nozzle.

19. The grip of claim 14 wherein said perimeter wall further includes at least one shoulder extending inwardly from said perimeter wall towards the bottle, said shoulder dimensioned to secure said top wall and said perimeter wall on the bottle flange in a snap fitting manner.

20. The bottle grip of claim 19 wherein said perimeter wall includes at least two long sides and at least two short sides, said at least two arms are attached to said perimeter wall along said at least two long sides, and said at least one shoulder is disposed along one of said short sides of said perimeter wall.

21. The bottle grip of claim 13 further including a plurality of frictional members defined on each said finger gripping surface, said frictional members adapted to help frictionally retain a user's fingers on said finger gripping surfaces.

22. The bottle grip of claim 21 wherein said frictional members defined on each said finger gripping surface are ribs.

23. In a bottle having a pump and a nozzle, the pump adapted to expel at least a portion of the contents of the bottle out of the nozzle when a compression force is applied between a bottom of the bottle and a finger flange adjacent the nozzle of the bottle, a method for pumping out at least a portion of the contents of the bottle, comprising:

5 providing a top wall;

providing at least two arms attached to said top wall and extending away from said top wall;

providing a finger gripping surface at an end of each of said arms opposite said top wall;

10 placing said top wall over the nozzle of the bottle such that said top wall contacts the finger flange on the bottle and said arms extend toward the bottom of the bottle; and

squeezing each of said finger gripping surfaces and the bottom of the bottle to move the bottle bottom toward the nozzle.

24. The method of claim 23 further comprising providing a recess defined by a perimeter wall around a perimeter on said top wall, providing a shoulder along at least a portion of said perimeter wall, dimensioning said perimeter wall and said shoulder to provide a snap fit around the finger flange on the bottle, and snapping said top wall into said recess with a snap fit.

25. The method of claim 23 further comprising orienting said at least two arms generally parallel to each other.

26. A grip for a bottle that includes a nozzle out of which the contents of the bottle are selectively expelled and a flange enabling the bottle to be pressed for expelling the contents through the nozzle, comprising:

5 a top defining a closed aperture, said closed aperture dimensioned to telescopingly receive the nozzle such that said top abuts the flange on the bottle;

at least two arms attached to said top and extending downwardly from said top;  
and  
a finger grip secured to each of said at least two arms at an end of said arms  
opposite said top.

10

27. The bottle grip of claim 26 wherein said finger grips are oriented facing away from each other.

28. The bottle grip of claim 26 wherein said arms are oriented generally perpendicular to said top.

29. The bottle grip of claim 27 further including a perimeter wall defined around a perimeter of said top, said perimeter wall configured to snugly abut the flange on the bottle.

30 The bottle grip of claim 29 wherein said perimeter wall further includes at least one shoulder extending inwardly from said perimeter wall towards the bottle, said shoulder dimensioned to secure said top wall and said perimeter wall on the bottle flange in a snap fitting manner.

31. In a spray bottle having a pump that includes a reciprocating member wherein relative movement between the reciprocating member and the bottle causes the pump to expel at least a portion of the contents of the bottle, a grip comprising:

5 an extension member integrally connected to the reciprocating member, said extension member extending outwardly from the bottle in opposite directions and having opposite sides;

a pair of arms attached to opposite sides of said extension member, each said arm extending downwardly from said extension member and toward a bottom of the spray bottle  
10 from its respective side; and

a finger gripping surface defined on each said arm at an end of said arm spaced from said extension member.

32. The grip of claim 31 wherein said finger gripping surface further includes a plurality of frictional members defined thereon, said frictional members adapted to help frictionally retain a user's fingers on said finger gripping surfaces.

33. The grip of claim 32 wherein said frictional members defined on said finger gripping surfaces are ribs.

34. The grip of claim 29 wherein said finger gripping surface is curved concavely upwardly.



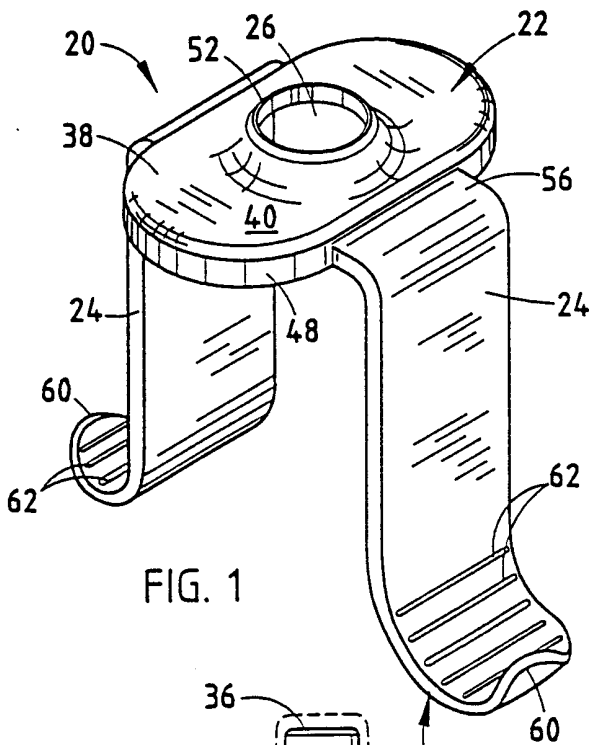


FIG. 1

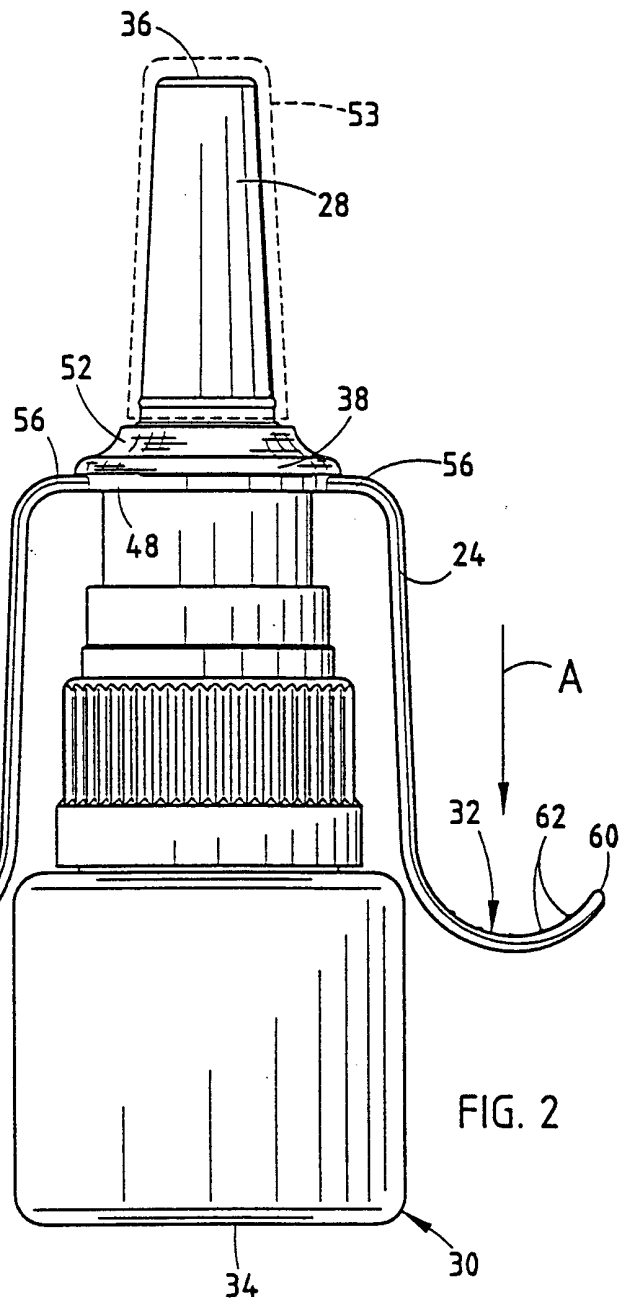


FIG. 2

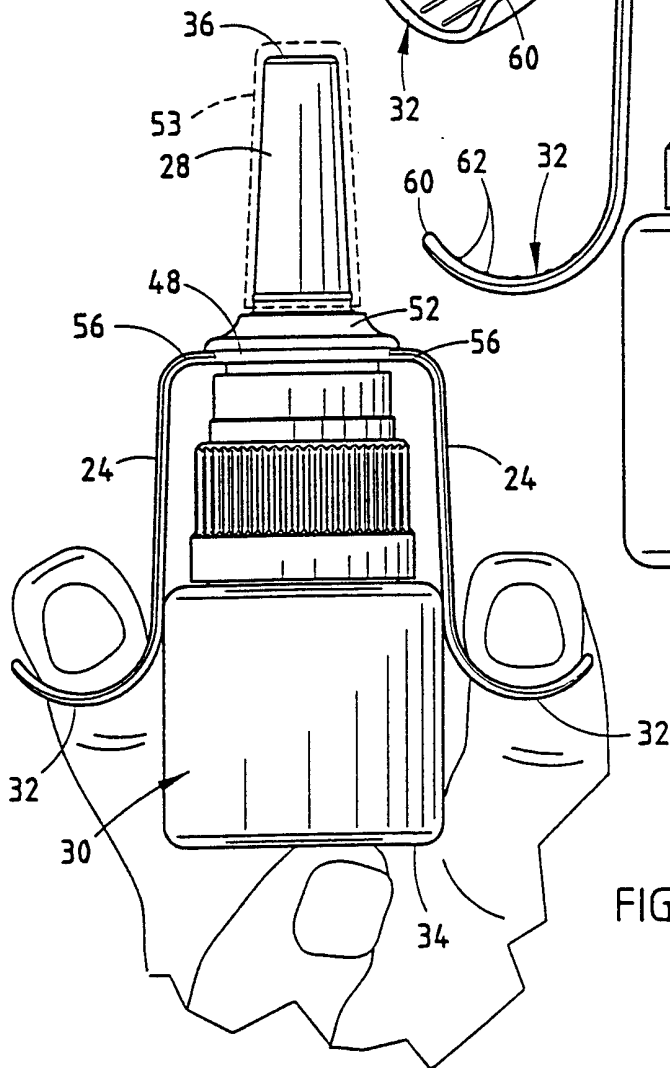


FIG. 3

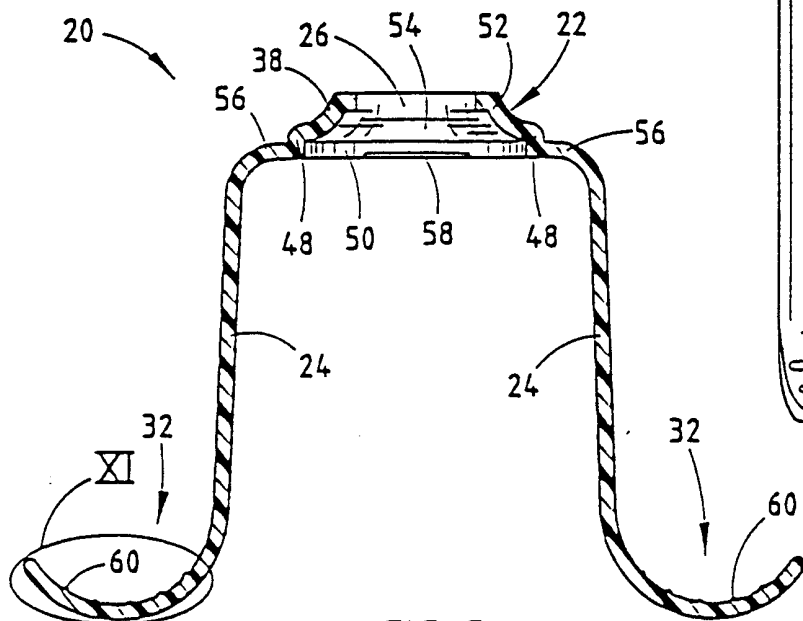
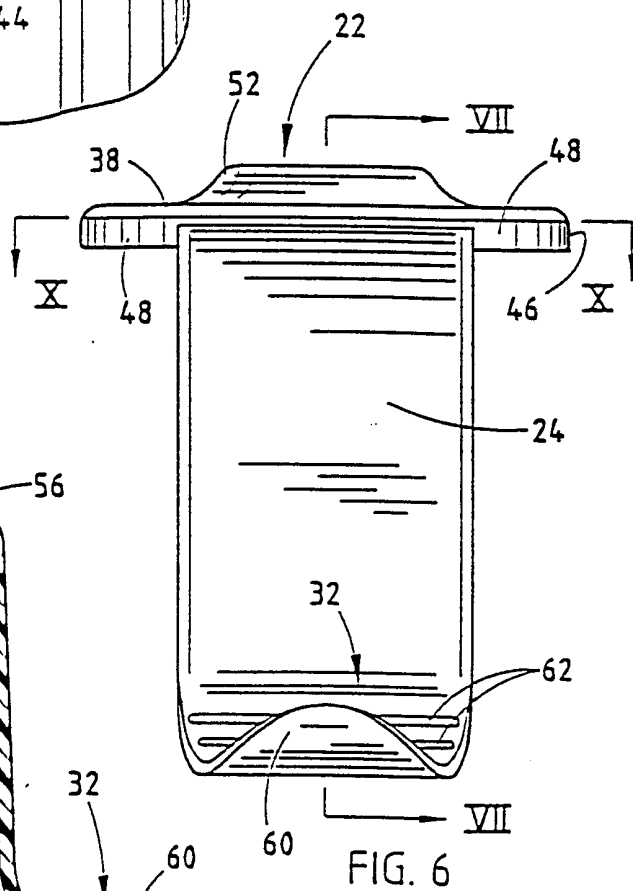
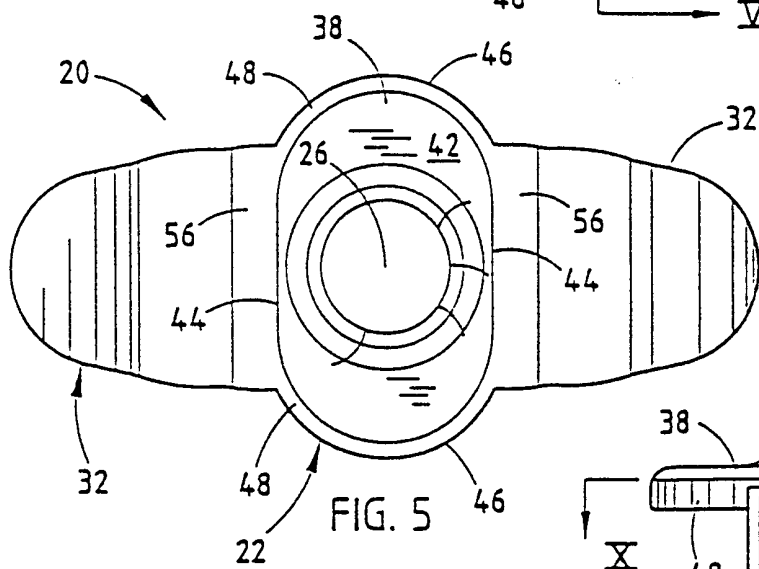
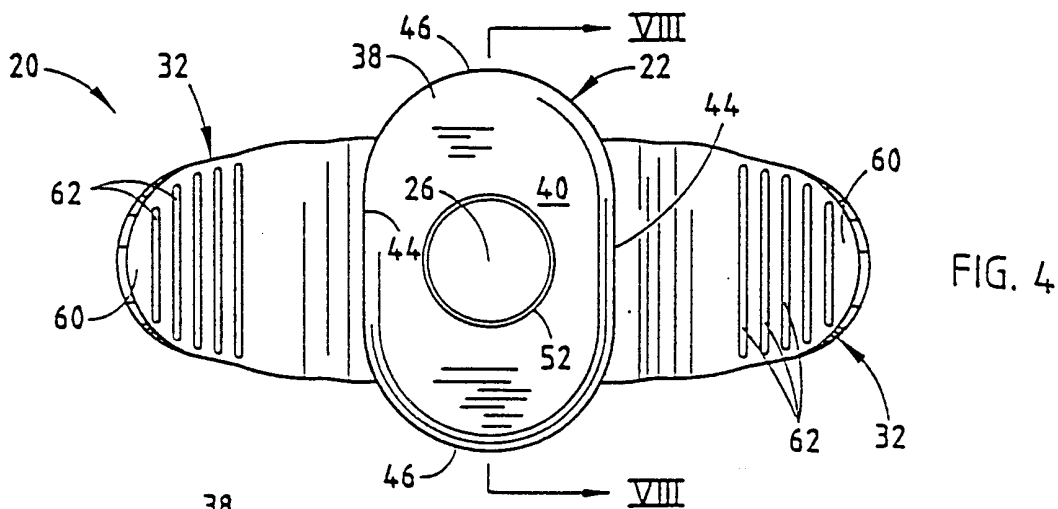


FIG. 7

FIG. 6

FIG. 4

FIG. 5

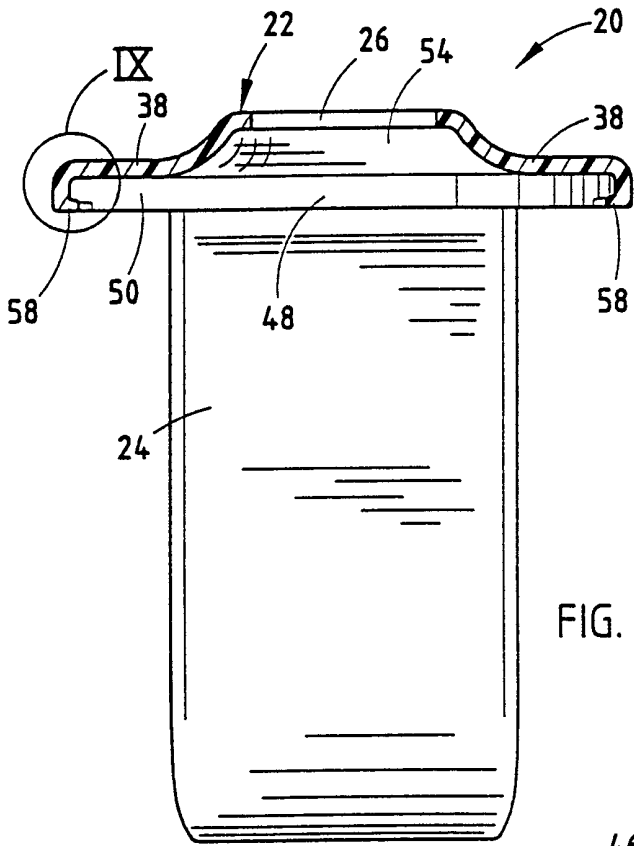


FIG. 8

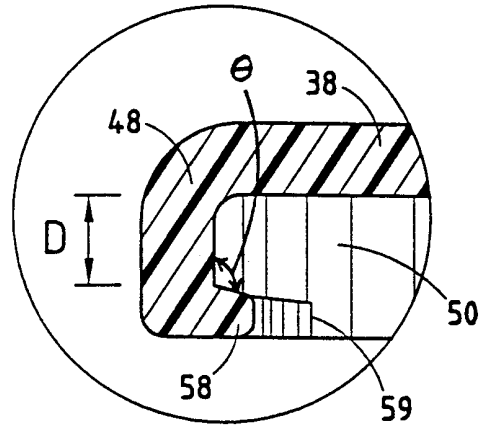


FIG. 9

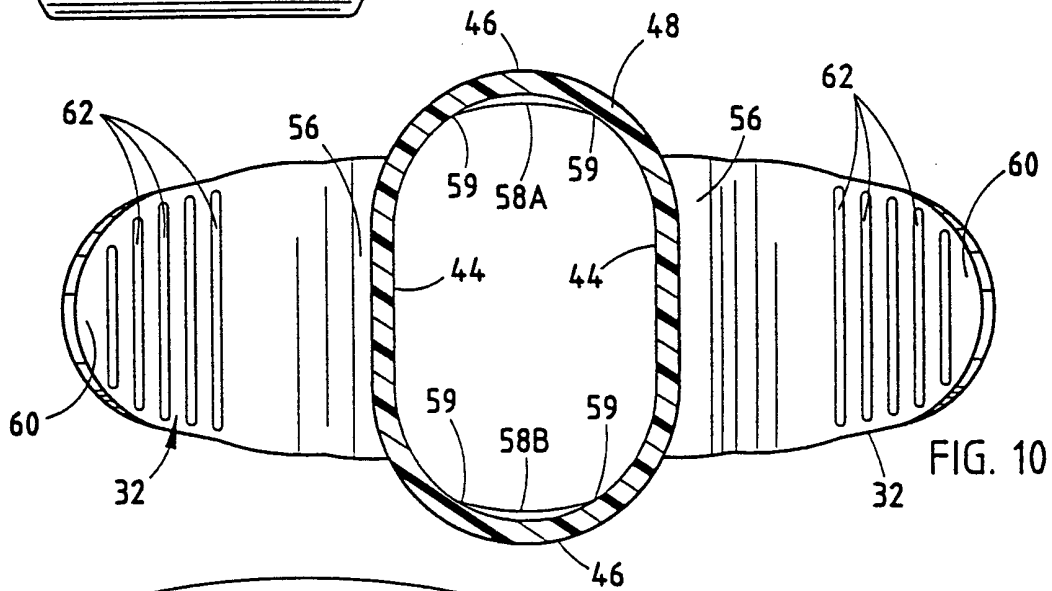


FIG. 10




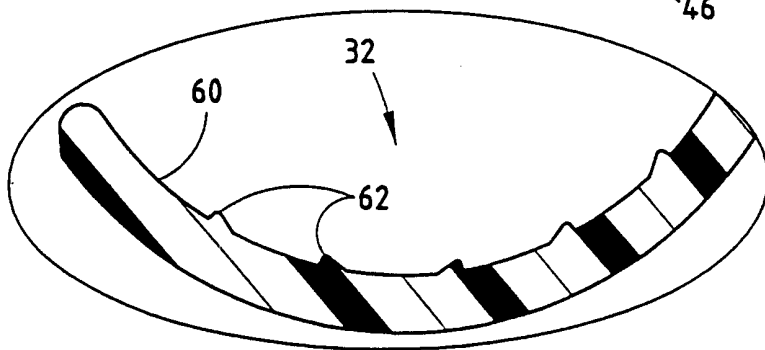


FIG. 11

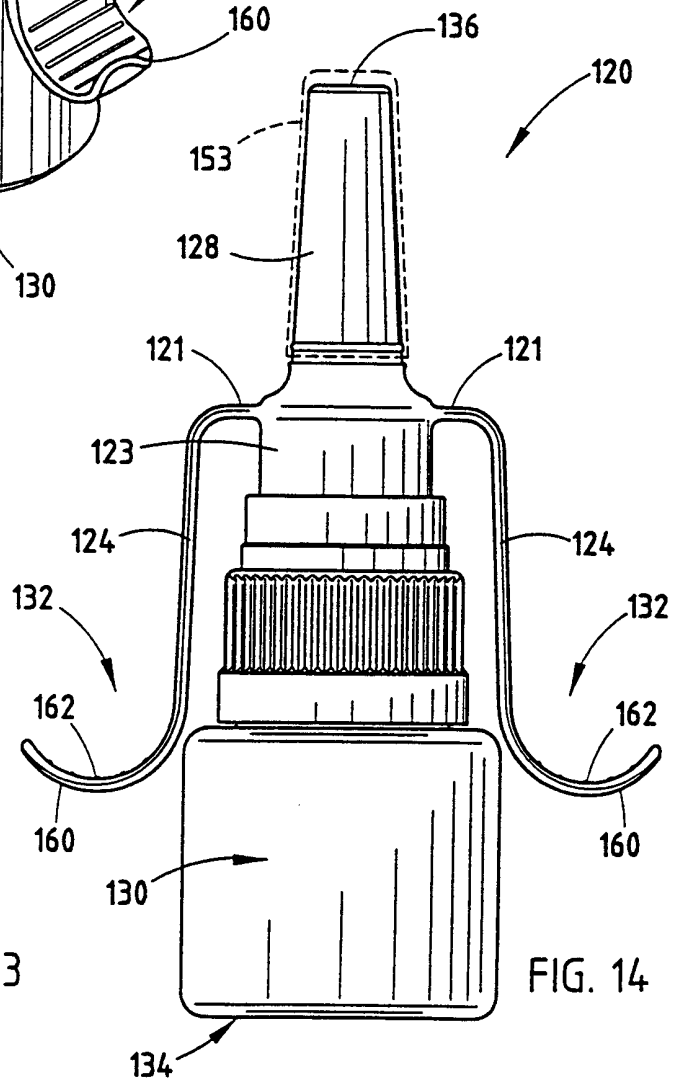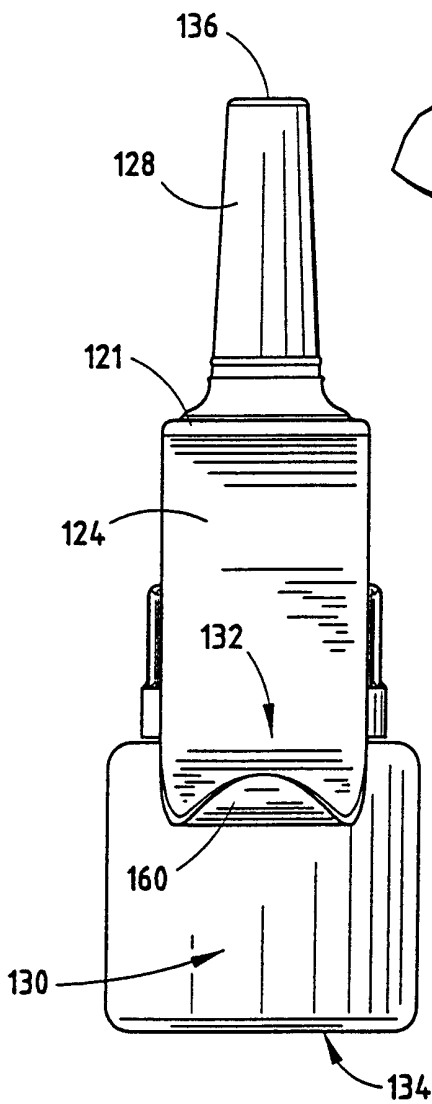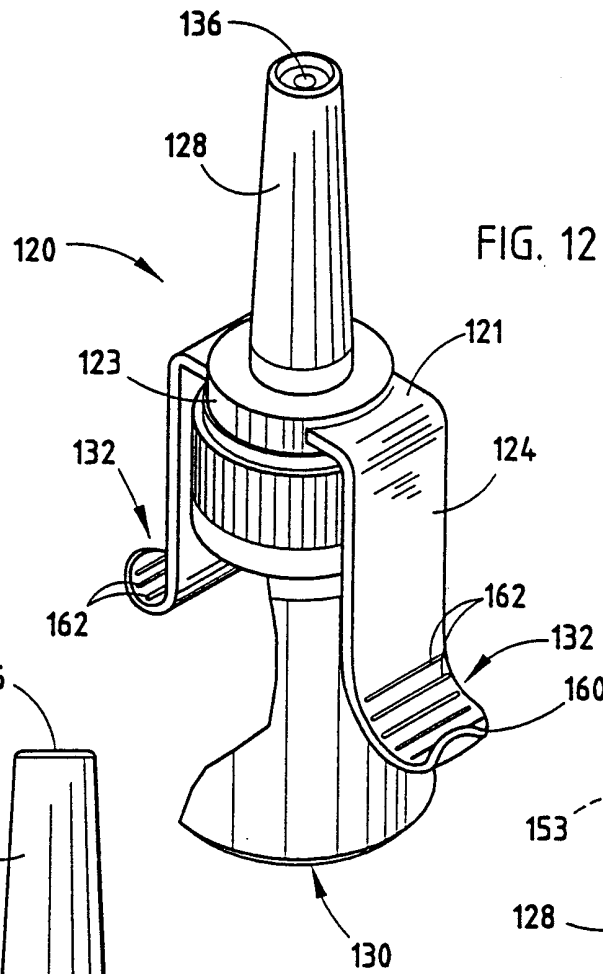

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/18909

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(6) :B67D 5/64 US CL : 222/162, 321.6, 321.7, 321.8, 321.9 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) U.S. : 222/162, 321.6, 321.7, 321.8, 321.9 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 5,341,993 A (HABER et al.) 30 August 1994, see the entire document.	13,21,23, 24,26-29, 31-33 ----- 34
A	US 5,450,983 A (STERN et al.) 19 September 1995, see the entire document.	1-34
A, P	US 5,836,922 A (HANSEN et al.) 17 November 1998, see the entire document.	1-34
A	US 1,641,003 A (LANG) 30 August 1927, see the entire document.	1-34
A	US 2,550,210 A (VANCE, JR.) 24 April 1951, see the entire document.	1-34
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* *A* *E* *L* *O* *P*	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier document published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	*T* *X* *Y* *&*
Date of the actual completion of the international search 08 NOVEMBER 1999		Date of mailing of the international search report <b>23 DEC 1999</b>
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer GREGORY L. HUSON <i>Diane Smith for</i> Telephone No. (703) 308-1115