

(51) International Patent Classification:
B41J 2/17 (2006.01)(21) International Application Number:
PCT/US2014/048838(22) International Filing Date:
30 July 2014 (30.07.2014)

(25) Filing Language: English

(26) Publication Language: English


(71) Applicant: **HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P.** [US/US]; 11445 Compaq Center Drive W., Houston, Texas 77070 (US).(72) Inventors: **WAGNER, Jeffrey, Allen**; Columbia Tech Center, 1115 SE 164th Ave, Vancouver, Washington 98683 (US). **TRIEBE, Sierra, Lynn**; Columbia Tech Center, 1115 SE 164th Ave, Vancouver, Washington 98683 (US). **MARTINEZ, Maria**; Cami de Can Graells, 1-21, E-08174 Sant Cugat del Valles (ES). **ASKELAND, Ronald, Albert**; Cami de Can Graells, 1-21, E-08174 Sant Cugat del Valles (ES).(74) Agents: **RIETH, Nathan, R.** et al.; Hewlett-Packard Company, Intellectual Property Administration, 3404 E. Har-

mony Road, Mail Stop 35, Fort Collins, Colorado 80528 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PREPARING A PRINTER CARTRIDGE FOR TRANSPORT

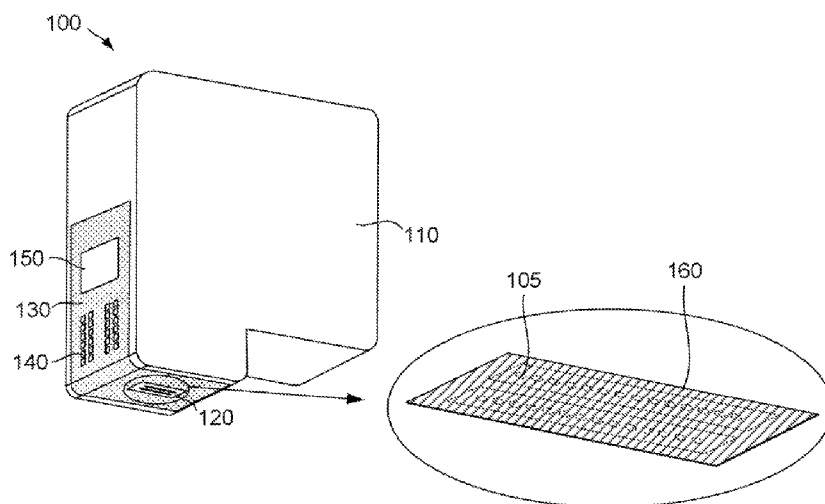**Fig. 1**

(57) Abstract: A method of preparing a printer cartridge for transport may comprise applying a volume of immiscible fluid to a nozzle bore of a printhead. A printer cartridge may comprise a volume of immiscible fluid deposited into a nozzle bore of a nozzle of the printhead and a layer of immiscible fluid applied over the nozzle bore opening. A printhead die may comprise a volume of immiscible fluid deposited into a nozzle bore of the die and a layer of immiscible fluid applied over the nozzle bore opening.

**Declarations under Rule 4.17:**

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

83958440

PREPARING A PRINTER CARTRIDGE FOR TRANSPORT

BACKGROUND

[0001] Inkjet printing devices comprise a printhead that includes a number of chambers. Each of these chambers includes an actuator that ejects an amount of fluid such as ink out of the chamber. The chamber is in fluid communication with a nozzle bore that ends in a nozzle orifice. The fluid is ejected out of the nozzle and onto a substrate to form an image

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] The accompanying drawings illustrate various examples of the principles described herein and are a part of the specification. The illustrated examples are given merely for illustration, and do not limit the scope of the claims.

[0003] Fig. 1 is a block diagram of a printer cartridge as it may appear during shipping according to one example of the principles described herein.

[0004] Fig. 2 is a side view block diagram of a printhead of a print cartridge according to one example of the principles described herein.

[0005] Fig. 3 is block diagram of the printhead of Fig. 2 showing a close up view of circle "A" shown in Fig. 2 according to one example of the principles described herein.

[0006] Fig. 4 is a flowchart showing a method of preparing a printer cartridge for transport according to one example of the principles described herein.

83958440

[0007] Throughout the drawings, identical reference numbers designate similar, but not necessarily identical, elements.

DETAILED DESCRIPTION

[0008] A printhead may comprise a number of nozzles. In one example, the nozzles may be grouped on a plate member, sliver or a number of dies with each die having a number of nozzles defined therein. These nozzles form a path via a nozzle bore to a firing chamber where an amount of fluid is kept in preparation for ejection from the nozzle. The firing chamber comprises a firing mechanism by which an amount of ink is ejected out of the nozzle when fired. An example of a firing mechanism may be a piezoelectric material or a resistor. Printheads may be fluidly coupled to a fluid source with both the printhead and fluid source being incorporated into a single cartridge. Jettable fluid may be distributed to the individual firing chambers and nozzles in preparation for ejection of the jettable fluid onto a substrate.

[0009] Such cartridges are packaged and transported to individual stores for a user to purchase and insert into a printer. During transportation changes in the cartridge and jettable fluid might occur reducing the out of box experience for the purchaser. Specifically, fluids such as inks comprising pigments have a tendency to "settle." In this case, heavier pigment particles fall downwards and out of solution. If the cartridge were shipped with the print die and its nozzles facing down, this pigment can come out of solution and agglomerate in the nozzle bores. This may cause additional processes to be initiated when the cartridge is placed in the printer such as additional flushing processes, priming processes and other pre-printing maintenance. Even further, this may use up relatively large amounts of fluid in the cartridge reducing the life of the cartridge.

[0010] The present specification discloses a method of preparing a printer cartridge for transport comprising applying a volume of immiscible fluid to a nozzle bore of a printhead. In one example, the immiscible fluid is an isoparaffin such as Isopar L™.

83958440

[0011] The present specification further discloses a printer cartridge comprising a volume of immiscible fluid deposited into a nozzle bore of a nozzle of the printhead and a layer of immiscible fluid applied over the nozzle bore opening. In one example, the immiscible fluid is an isoparaffin such as Isopar L™.

[0012] The present specification also discloses a printhead die comprising a volume of immiscible fluid deposited into a nozzle bore of the die and a layer of immiscible fluid applied over the nozzle bore opening. In one example, the immiscible fluid is an isoparaffin such as Isopar L™.

[0013] As used in the present specification and in the appended claims, the term "fluid" is meant to be understood broadly as any substance that continually deforms under an applied shear stress. In one example, a fluid may be a pharmaceutical. In another example, the fluid may be an ink. In another example, the fluid may be a liquid.

[0014] Also, as used in the present specification and in the appended claims, the term "printer" is meant to be understood broadly as any device capable of selectively placing a fluid onto a substrate. In one example the printer is an inkjet printer. In another example, the printer is a three-dimensional printer. In yet another example, the printer is a digital titration device.

[0015] Even still further, as used in the present specification and in the appended claims, the term "a number of" or similar language is meant to be understood broadly as any positive number comprising 1 to infinity; zero not being a number, but the absence of a number.

[0016] In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present systems and methods. It will be apparent, however, to one skilled in the art that the present apparatus, systems and methods may be practiced without these specific details. Reference in the specification to "an example" or similar language means that a particular feature, structure, or characteristic described in connection with that example is included as described, but may not be included in other examples.

83958440

[0017] Turning now to the figures, Fig. 1 shows a printer cartridge as it may appear during shipping according to one example of the principles described herein. The cartridge (100) comprises a fluid reservoir (110), a die (120), a flexible cable (130), conductive pads (140), and a memory chip (150). The flexible cable (130) is adhered to two sides of the cartridge (100) and contains traces that electrically connect the memory (150) and die (120) with the conductive pads (140).

[0018] The cartridge (100) may be installed into a cradle that is integral to the carriage of a printer. When the cartridge (100) is correctly installed, the conductive pads (140) are pressed against corresponding electrical contacts in the cradle, allowing the printer to communicate with, and control the electrical functions of, the cartridge (100). For example, the conductive pads (140) allow the printer to access and write to the fluid-jet memory chip (150).

[0019] The memory chip (150) may contain a variety of information including the type of fluid cartridge, the kind of fluid contained in the cartridge, an estimate of the amount of fluid remaining in the fluid reservoir (110), calibration data, error information, and other data. In one example, the memory chip (140) may comprise information regarding when the cartridge (100) should be maintained. As described herein, the maintenance may comprise applying a layer of immiscible fluid to the surface of the die (120). The printer can take appropriate action based on the information contained in the cartridge memory (140), such as notifying the user if the fluid supply is low or altering printing routines to maintain image quality. The cartridge memory (140) is shown as a separate element that is distinct from the die (120). However, according to one example, the die (120) may contain the memory in addition to the physical elements for dispensing the ink.

[0020] To create an image, the printer moves the carriage containing the cartridge over a piece of print medium or other substrate. At appropriate times, the printer sends electrical signals to the fluid-jet cartridge (100) via the electrical contacts in the cradle. The electrical signals pass through the conductive pads (140) and are routed through the flexible cable (130) to the die

83958440

(120). The die (120) then ejects a small droplet of fluid from the reservoir (110) onto the surface of the substrate. These droplets combine to form an image on the surface of the substrate.

[0021] The die (120) may comprise any number of nozzles (105) as shown in the detailed view of the die (120) shown in Fig. 1. In an example where the fluid is an ink, a first subset of nozzles (105) may eject a first color of ink while a second subset of nozzles (105) may eject a second color of ink. Additional groups of nozzles (105) may be reserved for additional colors of ink. Prior to shipping, an immiscible fluid (160) may be deposited onto the die (120). The immiscible fluid (160) may cover each nozzle (105) of the die (120) such that ambient air does not come in contact with the fluid located within the nozzles (105) or nozzle bore. In one example, the immiscible fluid (160) is deposited within and along the entire length of the nozzle bore. The immiscible fluid (160) may remain on the die (120) and within the nozzle bore throughout the delivery time and storage of the cartridge (100).

[0022] The immiscible fluid (160) may be formed such that the advantages described herein may be realized. In one example, the immiscible fluid (160) has a viscosity of 0.8 to 5 centipoise (cp) ($0.01\text{-}0.05\text{ kg}\cdot\text{m}^{-1}\cdot\text{s}^{-1}$). In another example, the immiscible fluid has a viscosity of 1 to 2 cp. In yet another example, the immiscible fluid has a viscosity of 1.5457cp.

[0023] In one example, the surface tension is 18-35mN/m. In yet another example, the immiscible fluid has a surface tension of 22-27 mN/m. In still another example, the surface tension is 25.1 mN/m. The surface tension of the immiscible fluid sufficiently wets the surface of the die (120). The immiscible fluid (160) may spread sufficiently over the die (120) but not be too far so as to subject any portion of the die (120) or the fluid in the cartridge (100) to exposure to ambient air and evaporation. The viscosity may also be low enough so as to not plug any of the nozzle bores before the eventual firing of fluid through the immiscible fluid layer.

[0024] In one example, the molecular weight of the immiscible fluid (160) is 130 to 300 g/mol. In another example, the immiscible fluid has a

83958440

molecular weight of 165 to 177 g/mol. In yet one example, the molecular weight of the immiscible fluid is 171 g/mol.

[0025] In one example, the immiscible fluid is soluble to 200 part per million (ppm) in 20° Celsius water. In one example, the density of the immiscible fluid at 10°C is 0.6 to 1.2 g/cm³. In another example, the density of the immiscible fluid at 10°C is 0.7 to 0.8 g/cm³. In yet another example, the density of the immiscible fluid at 15°C is 0.779 g/cm³.

[0026] In one example, the boiling point of the immiscible fluid is within environmental range while also being able to be ejected from the nozzle by, for example, a thermal-ink jet printer. In this example, the boiling point may be between 185 and 260 °C. In another example, the boiling point of the immiscible fluid is between 188°C to 192°C. In yet another example, the boiling point is 190°C.

[0027] In one example, the immiscible fluid is a paraffin liquid or an isoparaffin liquid such as Isopar™. In another example, the immiscible fluid may be Isopar™ J, Isopar™ K, Isopar™ L, Isopar™ M, Isopar™ P, polypropylene glycol (PPG), or combinations thereof. In one example, the immiscible fluid is Isopar™ L.

[0028] The immiscible fluid (160) is also formulated so that it does not react with the fluid of the cartridge (100) and present in the firing chambers connected to the nozzle bores and nozzles. Consequently, in the present specification and in the appended claims, the term "immiscible fluid" is meant to be understood broadly as any fluid that is incapable of mixing with another fluid. As such, in one example, the immiscible fluid forms a coating over the fluid present in the nozzle bore sealing the fluid in the immediate portions of the nozzle and nozzle bore interface. In another example, the characteristics of the immiscible fluid may allow the immiscible fluid to flow further into the nozzle bore and into the firing chamber. However, due to the surface tension properties of the immiscible fluid, the immiscible fluid will still form a seal over the fluid present in the firing chamber by adhering to the surface of the nozzle bore.

83958440

[0029] The immiscible fluid may be formatted such that it is also substantially non-evaporative or substantially nonvolatile such that it does not evaporate when subject to ambient air or temperatures. In one example, the immiscible fluid is less volatile as compared to the jettable fluid within the nozzles. In one example, the evaporation rate of the immiscible fluid is 6 with n-BuAc equal to 100.

[0030] Fig. 2 is a side view block diagram of a printhead of a print cartridge according to one example of the principles described herein. The examples of the printhead (200) here also comprises a printhead die (205). In this example, the die (205) is flush with the rest of the body of the printhead (200). In another example, the die (205) is not flush with the rest of the body of the printhead (200) and may either be set into the body or protrude out of the body. As described above, a layer of immiscible fluid (210) is applied to the surface of the die (205), printhead (200) or combinations thereof. The application of the layer of immiscible fluid (210) to the die (205) covers the individual nozzles preventing the fluid inside the nozzle bores and ejection chambers from evaporating. In one example, the layer of immiscible fluid may be allowed to flow further into the nozzle bore, displacing an amount of fluid present in the nozzle bore. This may be accomplished by creating back pressure in the firing chambers associated with the nozzle bores thereby drawing in an amount of immiscible fluid. The thickness of the layer of immiscible fluid (210), in one example, may be .5mm or less. In another example, the thickness of the layer of immiscible fluid (210) is 1 micron. . In another example, the thickness of the immiscible fluid layer does not prevent the nozzle from being able to eject an amount of jettable fluid out of the nozzle. Consequently, in one example, the thickness of the layer of immiscible fluid is not too thick so as to prevent ejection of the jettable fluid.

[0031] As briefly described above. The immiscible fluid prevents the fluid in each nozzle from evaporating. The evaporation of the fluid leaves an amount of non-evaporative substance behind. The non-evaporative substance of the jettable fluid may subsequently block the path of any non-evaporated jettable fluid. As a consequence, the nozzle, nozzle bore, and firing chamber

83958440

cannot eject an amount of jettable fluid thereby destroying its usefulness. The layer of immiscible fluid prevents this from happening during transportation and storage of the print cartridge (Fig. 1, 100).

[0032] Fig. 2 further comprises a circle "A." Fig. 3 is block diagram of the printhead of Fig. 2 showing a close up view of circle "A" shown in Fig. 2 according to one example of the principles described herein. The internal components of the printhead (300) are shown with dashed lines. These internal components comprise a nozzle bore (305) that fluidly connects the nozzle (310) to the firing chamber (315). The firing chamber (315) comprises a firing mechanism (320). The firing mechanism (320), in one example, may be a thermal resistor. In this example the thermal resistor would be electronically connected to a printing device's electrical source such that, upon instructions from the printer's processor, an electrical charge is passed through the resistor causing the resistor to heat up. The relatively quick increase in temperature causes the fluid to boil and be ejected out of the nozzle (310). In another example the firing mechanism (320) may be a piezoelectric material that is also coupled to an electrical source of the printer. The piezoelectric material, upon application of a current, expands causing fluid in the chamber (315) to be ejected through the nozzle bore (305) and out of the nozzle (310).

[0033] The printhead (300) further comprises a fluid supply line (325) that couples a fluid reservoir (Fig. 1, 110) to the fluid chamber (315). During manufacture of the cartridge (Fig. 1, 100) the fluid is supplied to the fluid supply line (325), fluid chamber (315), nozzle bore (305) and nozzle (310). Before shipping and packaging of the fluid cartridge (Fig. 1, 100) a layer of immiscible fluid (330) is applied to the surface of the printhead (300). As this is done, the immiscible fluid (330) is also made to go into the nozzle bore (305). In the example shown here, the immiscible fluid is made to extend all the way through the nozzle bore (305). In other examples, the immiscible fluid can be present into the firing chamber (315) or any distance from the surface of the printhead (300) and into the nozzle bore (305).

[0034] As described above, during production of the fluid cartridge (Fig. 1, 100), the cartridge (Fig. 1, 100) is filled with a fluid. This fluid is

83958440

distributed throughout the cartridge *(Fig. 1, 100) including through the number of fluid supply lines (325), the number of fluid chambers (315), the number of nozzle bores (305). When the fluid enters the nozzle bore (305), it may form a meniscus. After time, however, vibrations and other shipping events cause certain substances such as pigments to fall out of solution. Additionally, those vibrations and other shipping events may cause the meniscus to break allowing air to be ingested into the nozzle bore (305). Consequently, as air is allowed to enter the nozzle bore (305), fluid is forced out of the nozzles causing loss of fluid and spoiling of the print cartridge (Fig. 1, 100).

[0035] The presence of the immiscible fluid on the nozzles (310) and in the nozzle bores (305) provides a stronger seal or cap around the nozzles (310), as well as physically blocking the nozzle bore (305) from air coming in or fluid exiting. Specifically, because the meniscus cannot be broken, air cannot enter into the nozzle bore (305). Additionally, any particles that have come out of solution cannot subsequently block or coagulate within the nozzle bore (305). These advantages allow a cartridge to be transported and stored relatively longer periods of time without significant damage to the

[0036] Fig. 4 is a flowchart showing a method (400) of a method (400) of preparing a printer cartridge for transport according to one example of the principles described herein. The method (400) may begin with applying (405) a volume of immiscible fluid into a nozzle bore (Fig. 3, 305) of a printhead (Fig. 1, 100). As described above, the printer cartridge (Fig. 1, 100) may comprise a number of dies into which a number of nozzles are defined. The nozzles are the terminal ends of the nozzle bores (Fig. 3, 305). The application (405) of the immiscible fluid into the nozzle bores (Fig. 3, 305) may be accomplished a number of ways. In one example, the immiscible fluid may be forced into the nozzle bores (Fig. 3, 305) from the surface of the printhead during the application of the immiscible fluid to the surface of the printhead. In this example, a measured amount of immiscible fluid may be pressed against the surface of the printhead within a closed system. The force of the immiscible fluid into the nozzle bores (Fig. 3, 305) would push any fluid in the nozzle bores (Fig. 3, 305) back into the fluid chamber (Fig. 3, 315). In an alternative

83958440

example, the immiscible fluid may be forced into the nozzle bores (Fig. 3, 305) before the cartridge (Fig. 1, 100) is filled with fluid. In some examples the application (405) of the immiscible fluid may be accomplished by an immiscible fluid distribution system. The immiscible fluid distribution system may be a system that receives a fluid cartridge (Fig. 1, 100) and applies an amount of immiscible fluid to the surface of the printhead. In other examples of application (405) of immiscible fluid to the printhead, negative pressure may be applied to the conduits within the fluid cartridge (Fig. 1, 100) such that application of the negative pressure draws into the nozzle bores (Fig. 3, 305) an amount of immiscible fluid placed in contact with the surface of the printhead.

[0037] In one example, the method may continue with applying a layer of immiscible fluid over the openings of the nozzle bores (Fig. 3, 305). As described above the application of the layer of immiscible fluid may contribute to the capping or sealing the nozzle bores (Fig. 3, 305) and may further prevent ambient air from entering the nozzle bores (Fig. 3, 305). The application (410) of the layer of immiscible fluid may also be accomplished by a number of methods. In one example, the layer of immiscible fluid (Fig. 3, 330) may be applied by a roll on method using a number of rollers. In another example, the layer of immiscible fluid (Fig. 3, 330) may be applied by a spray on method. In yet another example, the layer of immiscible fluid may be applied (410) to the openings of the nozzle bores (Fig. 3, 305) through the use of a web-wipe and wiper; the web-wipe being impregnated with the immiscible liquid such that when the web-wipe is placed into contact with the nozzle plate of the printhead (140) the wiper squeegees out an amount of immiscible fluid onto the surface of the nozzle plate. In still another example, the layer of immiscible fluid may be applied (410) to the openings of the nozzle bores (Fig. 3, 305) through the use of wiper to spread or distribute an amount of immiscible fluid to the surface of the nozzle plate of the printhead.

[0038] The present method (400) may be accomplished through the use of a computer program product with the computer program product comprising a computer readable storage medium comprising computer usable program code embodied therewith. In this example, the computer usable

83958440

program code may comprise computer usable program code to, when executed by a processor, cause an immiscible fluid distribution system to apply (Fig. 4, 405) a volume of immiscible fluid into a nozzle bore of a printer die. The computer usable program code may further comprise computer usable program code to, when executed by a processor, cause an immiscible fluid distribution system to apply (Fig. 4, 405) a layer of immiscible fluid over the nozzle bore opening.

[0039] Aspects of the present system and method are described herein with reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems) and computer program products according to examples of the principles described herein. Each block of the flowchart illustrations and block diagrams, and combinations of blocks in the flowchart illustrations and block diagrams, may be implemented by computer usable program code. The computer usable program code may be provided to a processor of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the computer usable program code, when executed via the processor of the computer or other programmable data processing apparatus, implement the functions or acts specified in the flowchart and/or block diagram block or blocks. In one example, the computer usable program code may be embodied within a computer readable storage medium; the computer readable storage medium being part of the computer program product. In one example, the computer readable storage medium is a non-transitory computer readable medium.

[0040] The specification and figures describe a method of preparing a printer cartridge for transport. The method provides for applying an amount of immiscible fluid to a nozzle bore of a printer cartridge. Additionally, the method may comprise applying a layer of immiscible fluid to the surface of the printhead. This method may have a number of advantages, including preserving the functionality of the printhead and individual nozzles during transport and storage and before a purchaser uses the printer cartridge. As described above the vibrations and other shipping events may cause certain substances within the fluid contained in the printer cartridge to fall out of

83958440

solution. When this occurs, the nozzle bores in the printhead may be permanently damaged due to the accumulation of the substances in the nozzle bore. Additionally, the jarring of the printer cartridge during transportation may cause the meniscus created by the fluid stored in the printer cartridge to fail allowing an amount of air into the cartridge. This may further cause leaking of the cartridge fluid as well. The placement of the immiscible fluid in the nozzle bores and on the printhead prevents both from occurring. Additionally, the present systems and methods described herein allow for a printhead or print cartridge to be shipped with an amount of fluid such as ink present in the firing chambers and nozzle bores instead of shipping a dry printhead for an end consumer to fill with the fluid. Consequently, both time and ink are saved such that setup of a printer for printing is quickened. The present systems and methods further provides for the printhead to be shipped without a specific fluid added to the ejectable fluid in the printhead thereby saving costs in additional materials and increasing the quality of any printings.

[0041] The preceding description has been presented to illustrate and describe examples of the principles described. This description is not intended to be exhaustive or to limit these principles to any precise form disclosed. Many modifications and variations are possible in light of the above teaching.

83958440

CLAIMS

WHAT IS CLAIMED IS:

1. A method of preparing a printer cartridge for transport, comprising:
applying a volume of immiscible fluid to a nozzle bore of a printhead.
2. The method of claim 1, comprising applying a volume of immiscible fluid into a nozzle bore of a printhead and applying a layer of immiscible fluid over the nozzle bore opening.
2. The method of claim 1, in which the immiscible fluid is an isoparaffin.
3. The method of claim 1, in which the in which the immiscible fluid has a density of 0.6 to 1.2 g/cm³.
4. The method of claim 1, in which the immiscible fluid has a molecular weight of 130 to 300 g/mol.
5. The method of claim 1, in which the immiscible fluid has a viscosity of 0.8 to 5 centipoise.
6. The method of claim 1, in which the immiscible fluid is water soluble to 200 ppm at a water temperature of 20° C.
7. The method of claim 1, in which the immiscible fluid has a surface tension of 18 to 35 mN/m.
8. A printhead comprising:
a volume of immiscible fluid deposited into a nozzle bore of a nozzle of the printhead; and
a layer of immiscible fluid applied over the nozzle bore opening.

83958440

9. The printhead of claim 8, in which the immiscible fluid has a viscosity of 0.8 to 5 centipoise.

10. The printhead of claim 8, in which the in which the immiscible fluid has a density of 0.6 to 1.2 g/cm³.

11. The printhead of claim 8, in which the immiscible fluid has a surface tension of 18 to 35 mN/m.


12. The printhead of claim 8, in which the immiscible fluid has a molecular weight of 130 to 300 g/mol.

13. The printhead of claim 8, in which the immiscible fluid has a surface tension of 18 to 35 mN/m.

14. A printhead die comprising:
a volume of immiscible fluid deposited into a nozzle bore of the die; and
a layer of immiscible fluid applied over the nozzle bore opening.

15. The printhead die of claim 14, in which the immiscible fluid is an isoparaffin.

1/3

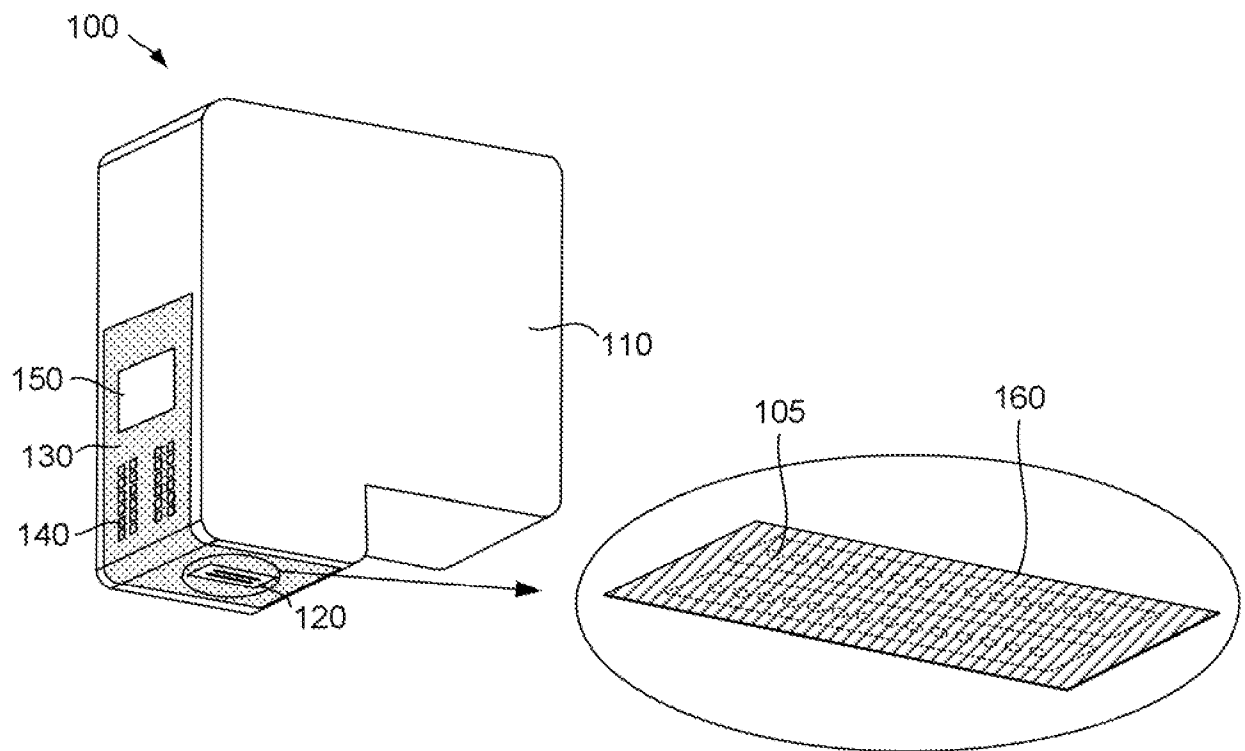**Fig. 1**

2/3

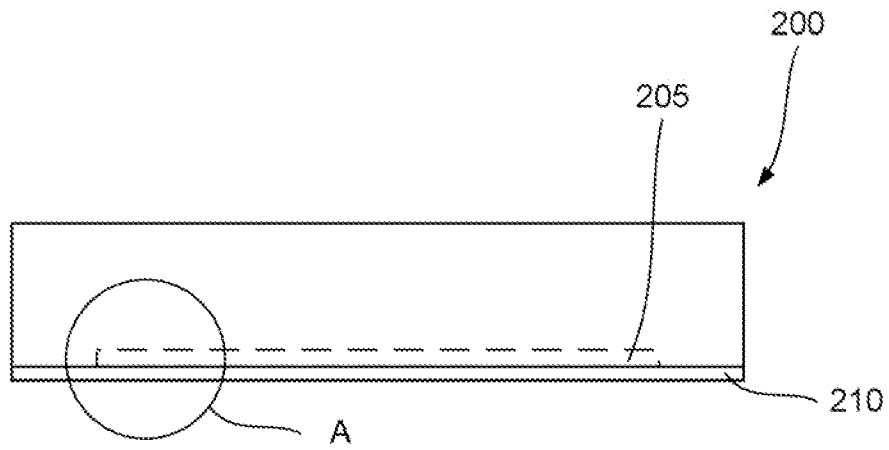


Fig. 2

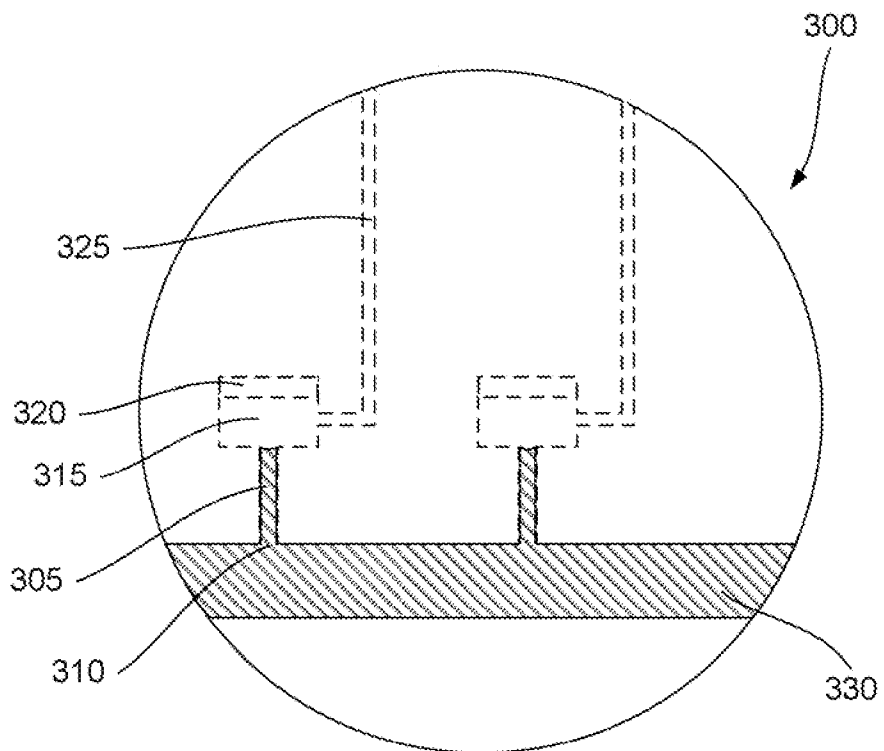
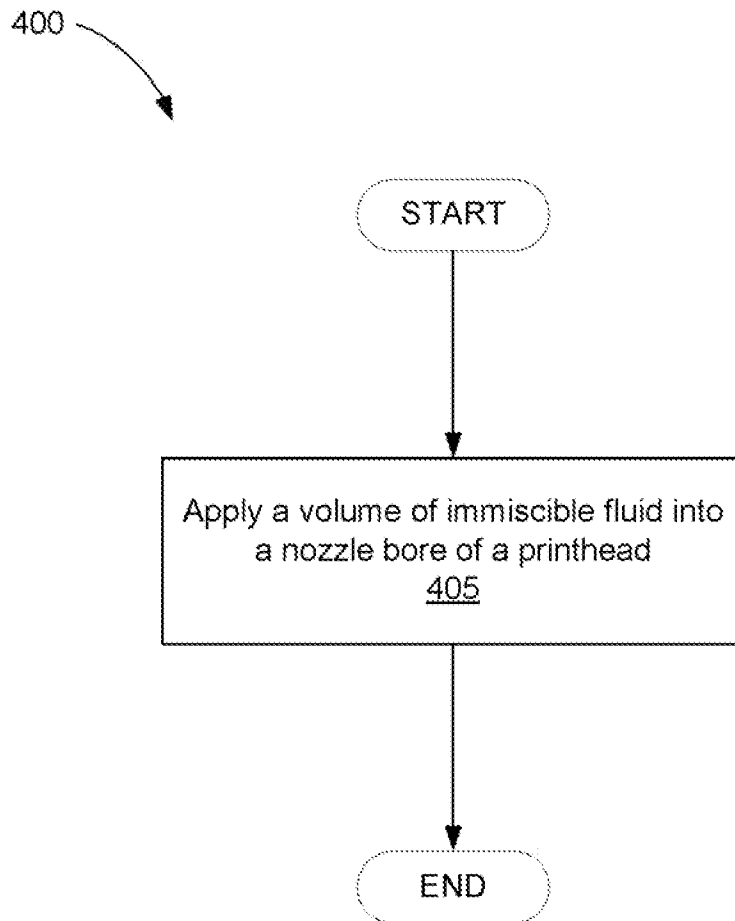


Fig. 3

3/3

**Fig. 4**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/048838**A. CLASSIFICATION OF SUBJECT MATTER****B41J 2/17(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B41J 2/17; B41J 2/14; B41J 2/165; B41J 2/04; B21D 53/76; B41J 2/18; B05B 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: immiscible, printer, printhead, nozzle, fluid, die, isoparaffin, layer, bore, opening

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002-0171705 A1 (RHOADS et al.) 21 November 2002 See paragraphs [0068], [0079]-[0088] and figures 1-10.	1,2,2(1),3-15
A	US 2009-0225134 A1 (TSUKADA, SATOSHI) 10 September 2009 See abstract, paragraphs [0082]-[0103], and figures 10A-12C.	1,2,2(1),3-15
A	US 2011-0310181 A1 (CURCIO et al.) 22 December 2011 See paragraphs [0020]-[0030], claims 1, 7, and figures 1-3.	1,2,2(1),3-15
A	US 2008-0273069 A1 (LANGFORD et al.) 06 November 2008 See abstract, claims 6-25, and figures 1-4.	1,2,2(1),3-15
A	US 2006-0152558 A1 (HOISINGTON, PAUL A.) 13 July 2006 See abstract, paragraphs [0020]-[0026], and figure 1.	1,2,2(1),3-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 April 2015 (27.04.2015)

Date of mailing of the international search report

28 April 2015 (28.04.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 7140

Authorized officer

KIM, Jin Ho

Telephone No. +82-42-481-8699



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/048838

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002-0171705 A1	21/11/2002	GB 2360016 A JP 03865901 B2 JP 10-138502 A KR 10-0523122 B1 US 5905514 A US 6913338 B2 US E040294 E1	12/09/2001 10/01/2007 26/05/1998 21/12/2005 18/05/1999 05/07/2005 06/05/2008
US 2009-0225134 A1	10/09/2009	JP 05024122 B2 JP 2009-208356 A US 7896461 B2	12/09/2012 17/09/2009 01/03/2011
US 2011-0310181 A1	22/12/2011	CN 102378691 A CN 102378691 B EP 2414162 A1 EP 2414162 A4 EP 2414162 B1 US 8596746 B2 WO 2010-114516 A1	14/03/2012 30/07/2014 08/02/2012 22/05/2013 15/10/2014 03/12/2013 07/10/2010
US 2008-0273069 A1	06/11/2008	US 2006-0187278 A1 US 7416293 B2 US 8002395 B2	24/08/2006 26/08/2008 23/08/2011
US 2006-0152558 A1	13/07/2006	CN 101189131 A0 CN 101189131 B EP 1841596 A2 EP 1841596 A4 JP 04885879 B2 JP 2008-526563 A KR 10-1273428 B1 KR 10-2007-0100343 A WO 2006-074280 A2 WO 2006-074280 A3	28/05/2008 04/05/2011 10/10/2007 31/03/2010 29/02/2012 24/07/2008 14/06/2013 10/10/2007 13/07/2006 09/08/2007