



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 693 641 A1**

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:
23.08.2006 Bulletin 2006/34

(51) Int Cl.:
F41H 11/02 (2006.01)

(21) Application number: **04721403.6**

(86) International application number:
PCT/RU2004/000103

(22) Date of filing: **17.03.2004**

(87) International publication number:
WO 2005/057122 (23.06.2005 Gazette 2005/25)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **10.12.2003 RU 2003135770**

(71) Applicant: **Zakrytoe Aktsionernoye Obschestvo
"STIVT"
Moscow, 127006 (RU)**



(72) Inventors:
• **KISLETSOV, Alexander Vasilyevich
Samara, 443010 (RU)**

• **SYGUROV, Peter Nikolaevich
Samarskaya obl., 446442 (RU)**
• **BUTUZOV, Vladimir Vasilyevich
Samara, 443110 (RU)**
• **VELIKANOV, Sergey Dmitrievich
Nizhnegorodskaya obl., 607189 (RU)**

(74) Representative: **Zellentin, Rüdiger et al
Patentanwälte
Zellentin & Partner
Zweibrückenstrasse 15
80331 München (DE)**

(54) **AUTOMATIC CONTROL METHOD AND SYSTEM**

(57) The invention relates to aircraft automatic control systems. Its use for providing flight safety of civil aircrafts allows to obtain the technical result in the form of reducing a probability of a missile hit on a civil aircraft and ensuring protection reliability in optical interference environment. This technical result is achieved in the method due to steps of: determining the fact of a missile launch; determining missile coordinates in every time moment; generating pulse periodic laser radiation, wherein a wavelength range of the laser radiation is within a sensitivity range of infrared seeker head, a power of the laser radiation exceeds the power of radiation of the aircraft engine in the sensitivity range of the infrared seeker head, and a pulse repetition frequency is close to typical operation frequency of the infrared seeker head; and sending the laser radiation to the point of presence of the missile in the given time moment. This result is ensured in the system by arranging at an aircraft and employing sensors of missile launch fact and coordinates, a transceiver having a turn drive and an optical channel which output is connected to a sensor of missile coordinates at a missile flight trajectory, an on-board calculator, and a laser radiation generator having an actuation device.

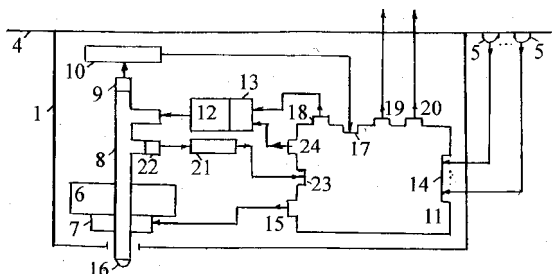

EP 1 693 641 A1

Description**Field of the Invention**

5 **[0001]** This invention relates to aircraft automatic control systems. The field of employment of present inventions is to provide flight safety of civil aircrafts.

Background of the Invention

10 **[0002]** In practice, various techniques are employed in order to solve the problem for providing flight safety of civil aircrafts from missile attacks:

1. The "elimination of missile launch place", where a locality is guarded and patrolled. However, this technique required great resources and could not guarantee the flight safety because of great area of "risk zone" (zone from which there is a possibility to hit a flying aircraft).

2. The "lowering trail temperature" technique is not effective. Missiles having infrared (IR) seeker heads react to heat energy and are guided to a jet aircraft because of high temperature of its engine and exhaust gases. It is possible to decrease a little an IR heat trail by means of pumping air additionally around an engine exhaust, which could decrease its temperature a little. But even such lowering is very ineffective protection means from modern missiles that find their targets in the case of low temperature of engine.

3. The "strengthening aircraft" technique is restricted in practice use. An exact place of missile hit into an aircraft is unpredictable. Weight and cost of modernization being expected in the case of mounting armour onto a whole aircraft are ultimately high. But when mounting armour only onto critical aircraft assemblies (such as engines, fuel tanks, cockpit, and electronics units), the most part of aircraft will remain still vulnerable for a missile.

4. The "false targets - flashes" technique could "muddle" a missile guiding device. It should be noted that such targets are expensive and danger. On launching they catch fire and discharge a great amount of IR energy, which could "guide a missile to a false trail". However, pyrotechnic targets could provoke a fire, if they fall down onto the earth prior to be burned out completely.

30 **[0003]** There are other techniques to protect civil aircrafts from missile with infrared self-guided heads of portable anti-aircraft missile complexes. (See, for example, GB 2309290 A, 23.07.1997; US 5249527 A, 05.10.1993; FR 2694804 A1, 18.02.1994; DE 3835887 A1, 03.05.1990). The most prospective among them are based on creating special radiation in a range of frequencies corresponding operation frequencies of systems that guide missiles to air targets. The purpose of such actions is often to wreck the process of guiding an infrared seeker head to an aircraft.

35 **[0004]** The closest in technical essence to the claimed method is a method for protecting aircrafts from missiles provided with seeker heads (see the Russian patent No. 2141094, 17.08.1998). In accordance with said known method, a holographic image of real source radiating electromagnetic waves preferably in the range of visible and infrared spectrum is formed in the space between an aircraft and the most probable direction of possible enemy missile attack. Sources radiating electromagnetic waves at other frequencies corresponding to operating frequencies of various systems for guiding missiles to air targets could also be used as a false target.

40 **[0005]** However, a state of space between an aircraft and the most probable direction of possible enemy missile attack depends in a great degree on weather condition. This is the reason that prevents to obtain a holographic image of such a quality that would ensure a high reliability of protection in optical interference conditions.

45 **[0006]** The closest in technical essence to the claimed system is a system of aircraft protection from missile provided with seeker heads, which is intended to perform the aforementioned known method (see the above Russian patent No. 2141094).

50 **[0007]** The unstable state of space between an aircraft and the most probable direction of possible enemy missile attack, which depends in a great degree on weather conditions, could be again indicated as the reason preventing to obtain a holographic image of such a quality that would ensure a high reliability of protection in optical interference conditions.

55 **[0008]** At the present time, the probability of using portable anti-aircraft missile complexes against a civil aircraft by terrorists is rather great. The portable anti-aircraft missile complexes employing missiles with infrared seeker heads are simple in use, requires minimal skill in treatment, and are set ready for action in less than three minutes. They are spread widely. There are approximately 500000 units of indicated complexes in the world. And although their most part are under a control of responsible state bodies, these complexes are still available at the black arm market at the price of several tens of thousands of USD. At the present time, portable anti-aircraft missile complexes employing missiles with infrared seeker heads are considered to take a part in an arsenal of some 27 terrorist and underground alignments. Moreover, this armour uses missiles, i.e., air vessels. An action range of many models of this arm is more than 6 km,

and using this arm it is possible to hit an aircraft flying at a height of more than 3 km. Hence, a civil aircraft, when flying up or landing, is under the threat of attack from an area of several hundred square kilometres. Thus, the problem of protecting civil aircrafts from the aforementioned arm is of extreme actuality at the present.

Summary of the Invention

[0009] Therefore, the object of the claimed invention is to reduce a probability of a missile hit to a civil aircraft and to ensure protection reliability in optical interference environment.

[0010] This problem is solved in a method for protecting a civil aircraft from missiles with seeker heads of portable anti-aircraft missile complexes in accordance with the present invention, the method comprising steps of: determining the fact of a missile launch; determining missile coordinates in every time moment; generating pulse periodic laser radiation, wherein a wavelength range of the laser radiation being within a sensitivity range of infrared seeker head, a power of the laser radiation exceeding the power of radiation of the aircraft engine in the sensitivity range of the infrared seeker head, and a pulse repetition frequency being close to typical operation frequencies of the infrared seeker heads; and sending the laser radiation to the point of presence of the missile in the given time moment.

[0011] An additional distinction of the method according to the present invention further comprises steps of: calculating coordinates of missile launch place; transmitting an information on the fact of the missile launch and on the coordinates of missile launch place to the earth safety flight providing system and aircraft objective control system.

[0012] One more distinction of the method according to the present invention further comprises steps of: receiving the laser radiation reflected from the infrared seeker head; defining, by the power level of this reflected laser radiation, the fact that the aircraft is attacked by a missile with just the infrared seeker head; defining, on lowering the power level of this reflected laser radiation, the fact of failure of guiding the infrared seeker head to the aircraft; thereafter, terminating the generation of the laser radiation; and transmitting the information on the fact of failure of guiding the missile to the earth safety flight providing system and aircraft objective control system.

[0013] The same problem is solved in a system for protecting a civil aircraft from missiles with seeker heads of portable anti-aircraft missile complexes in accordance with the present invention, the system comprising on board the civil aircraft being protected: sensors of the fact and coordinates of missile launch; a transceiver having a turn drive and an optical channel which output is connected to a sensor of missile coordinates at a missile flight trajectory; an on-board calculator; and a laser radiation generator having an actuation device, wherein the laser radiation generator being made of fluorine-hydrogen-deuterium type, the on-board calculator being configured to process signals from the sensors of the fact and coordinates of missile launch for calculating coordinates of a missile launch place and for providing a control signal to the turn drive of the transceiver in order for an optical channel of the transceiver to be directed to the launched missile, as well as to process signals from the sensor of missile coordinates at a missile flight trajectory for calculating missile coordinates in the given time moment and for providing an actuating signal to the actuation device of the laser radiation generator.

[0014] An additional distinction of the system according to the present invention is in that the on-board calculator is configured to transmit the information on the fact of the missile launch and on the coordinates of missile launch place to the earth safety flight providing system and aircraft objective control system.

[0015] Once more distinction of the system according to the present invention is in that the system further comprises a reflected laser radiation receiver connected to an additional output of the optical channel of transceiver and intended for providing signals to the on-board calculator which is further configured to define, by the power level of this reflected laser radiation, the fact that the aircraft being attacked by a missile with just the infrared seeker head, and to define, on lowering the power level of this reflected laser radiation, the fact of failure of guiding the infrared seeker head to the aircraft; to provide to the actuation device of the laser radiation generator an actuating signal which terminates the generation of the laser radiation, and to transmit the information on the fact of failure of guiding the missile to the earth safety flight providing system and aircraft objective control system.

[0016] One more distinction of the system according to the present invention is in that the sensors of the fact and coordinates of missile launch are sensors of the ultraviolet range.

[0017] Yet one more distinction of the system according to the present invention is in that the sensor of missile coordinates at a missile flight trajectory is a narrow-directed sensor of the ultraviolet range.

[0018] Finally, one more distinction of the system according to the present invention is in that the optical channel of the transceiver is further intended to transmit the radiation of the laser radiation generator towards the launched missile.

Brief Description of Drawings

[0019] The claimed invention is illustrated further with references to the accompanying drawing, where identical units and elements have the same numbers.

Detailed Description of Preferred Embodiments

[0020] The drawing shows schematically a situation of protecting a civil aircraft from missiles with seeker heads of portable anti-aircraft missile complexes and a structure of system for protecting a civil aircraft from missiles with seeker heads of portable anti-aircraft missile complexes.

[0021] The system 1 for protecting a civil aircraft (see the drawing) from missiles 2 with seeker heads of portable anti-aircraft missile complexes comprises, on board the civil aircraft 4 being protected: sensors 5 of the fact and coordinates of missile launch; a transceiver 6 having a turn drive 7 and an optical channel 8 which output 9 is connected to a sensor 10 of missile coordinates at a missile flight trajectory; an on-board calculator 11; and a laser radiation generator 12 having an actuation device 13. The first group inputs 14 of the on-board calculator 11 are connected to the outputs of sensors 5 of the fact and coordinates of missile launch in order to calculate the coordinates of missile launch place. The first output 15 of the on-board calculator 11 is connected to the turn drive 7 of the transceiver 6 in order to direct an input 16 of the optical channel 8 of the transceiver 6 to the launched missile 2. The output of the sensor 10 of missile coordinates at a missile flight trajectory is connected to the second input 17 of the on-board calculator 11. The second output 18 of the on-board calculator 11 is connected to the actuation device 13 of the laser radiation generator 12.

[0022] It is desirable to provide the on-board calculator 11 with the third 19 and fourth 20 outputs coupled with the aircraft objective control system ("black boxes" or flight recorders) and the aircraft system for communicating with the earth safety flight providing services, respectively, in order to transmit the information on the fact of the missile launch and on the coordinates of missile launch place to the aircraft objective control system and to the earth safety flight providing system.

[0023] It is desirable to provide the system 1 for protecting a civil aircraft 4 with a reflected laser radiation receiver 21 coupled with an additional output 22 of the optical channel 8 of the transceiver 6. The on-board calculator 11 is desirable to be made with a third output 23 coupled with the output of the reflected laser radiation receiver 21 in order further to define, by the power level of this laser radiation reflected from the seeker head 3 of the launched missile 2, the fact that the aircraft being attacked by a missile with just the infrared seeker head, and to define, on lowering the power level of this reflected laser radiation, the fact of failure of guiding the infrared seeker head to the aircraft. It is desirable to make the on-board calculator 11 with a fifth output 24 coupled with the actuation device 13 of the laser radiation generator 12 in order to provide a signal for terminating the generation of laser radiation to the actuation device 13 of the laser radiation generator 12.

[0024] It is desirable to connect the output of the laser radiation generator 12 with the optical channel 8 of the transceiver 6 in order to transmit the radiation of the laser radiation generator 12 towards the launched missile 2.

[0025] The method for protecting a civil aircraft from missiles with infrared seeker heads of portable anti-aircraft missile complexes in accordance with the present invention is realized in the presented system as follows.

[0026] A missile 2 with the infrared seeker head 3 could be launched to a civil aircraft 4 in the process of its flying. The sensors 5 of the fact and coordinates of missile launch, disposed at the civil aircraft 4 being protected, find out the ultraviolet radiation of the engine of missile 2 being started. Signals from these sensors are fed to the first group inputs 14 of the on-board calculator 11 for calculating the coordinates of missile launch place. The information on the fact of this launch and coordinates of missile launch place are transmitted from the on-board calculator 11 via its third 19 and fourth 20 outputs to the aircraft objective control system ("black boxes" or flight recorders) and to the aircraft system for communicating with the earth safety flight providing systems. Moreover, the control signal corresponding to the coordinates of missile launch is transmitted via the first output 15 of the on-board calculator 11 to the turn drive 7 of the transceiver 6 in order to direct the input 16 of the optical channel 8 of the transceiver 6 to the launched missile 2. Through this optical channel 8 the infrared radiation of the flying missile 2 comes to the sensor 10 of missile coordinates at a missile flight trajectory, which is the narrow-directed sensor of the infrared range, and as a result, an output signal of this sensor is formed. After processing the output signal of the sensor 10 of missile coordinates at a missile flight trajectory in the on-board calculator 11 the coordinates of the missile 2 in the given time moment are calculated.

[0027] The control signal corresponding to the coordinates of the missile 2 in the given time moment is transmitted via the first output 15 of the on-board calculator 11 to the turn drive 7 of the transceiver 6 in order to direct exactly the input 16 of the optical channel 8 of the transceiver 6 to the launched missile 2 (i.e., a precise guiding of the missile 2 at its trajectory is ensured by the system 1). Moreover, based on the result of processing the output signal of the sensor 10 of missile coordinates at a missile flight trajectory in the on-board calculator 11, an actuating signal is provided via the output 18 of the on-board calculator 11 to the activation device 13 of the laser radiation generator 12. The radiation from the laser radiation generator 12 is directed through the optical channel 8 of the transceiver 6 towards the launched missile 2. Since the laser radiation generator 12 is made of fluorine-hydrogen-deuterium type, then it forms a pulse periodic laser radiation having certain parameters: the laser radiation wavelength is within a sensitivity range of infrared seeker heads, and a power of laser radiation exceeds the power of radiation of the aircraft engine in the sensitivity range of the infrared seeker heads. A pulse repetition frequency is formed close to typical operation frequencies of the infrared seeker heads. As a result of laser radiation direct hit to the infrared seeker head 3 of the missile 2 a failure in guiding

the missile to the aircraft occurs. The missile flies past (or misses) the aircraft, thereafter the laser radiation generation is terminated and the information on the fact of failure of guiding the missile is transmitted to the earth safety flight providing system and aircraft objective control system.

[0028] The additional equipment of the system 1 for protecting an aircraft with the reflected laser radiation receiver 21 connected to the additional output 22 of the optical channel 8 of the transceiver 6 and intended to provide signals to the on-board calculator 11 (which is further configured to define, by the power level of the laser radiation reflected from the seeker head of the launched missile, the fact that the aircraft being attacked by a missile with just the infrared seeker head, and to define, on lowering the power level of the reflected laser radiation, the fact of failure of guiding the infrared seeker head to the aircraft) allows to output to the activation device 13 of the laser radiation generator 12 the signal for terminating the laser radiation generation, and to transmit the information on the fact of failure of guiding the missile to the earth safety flight providing system and aircraft objective control system.

[0029] As the sensors of the fact and coordinates of missile launch could be used the ultraviolet sensors produced since 2002 by DaimlerChrysler Aerospace AG, and as the sensor of missile coordinates at a missile flight trajectory could be used the sensor produced since 2002 by Bodenseewerk Geratetechnik GmbH. As the on-board calculator could be

used the known computer «Багет-83» ("Baget-83") produced in Russia since 1998. As the turn drive of the transceiver in order to direct the input of the optical channel, and as the reflected laser radiation receiver is employed the optical

circuit, receivers and drives utilized in the lidar produced by SPI International (see: Протопопов

В.В., Устинов Н.Д. Инфракрасные лазерные локационные системы. — Москва:

Военное издательство, 1987) (Protopopov V.V., Ustinov N.D. Infrared laser finding systems. — Moscow: Army publishing house, 1987. — in Russian). As the laser radiation generator could be used the known wideband

chemical laser («Квантовая электроника», Т. 18, № 2, 1991. — С. 186) ("Quantum electronics", vol. 18, No. 2, 1991. — P. 186. — in Russian).

Industrial Applicability

[0030] The present invention could be employed most successfully in the civil aviation.

Claims

1. A method for protecting a civil aircraft from missiles with seeker heads of portable anti-aircraft missile complexes, the method comprising steps of: determining the fact of a missile launch; determining missile coordinates in every time moment; generating pulse periodic laser radiation, wherein a wavelength range of the laser radiation being within a sensitivity range of infrared seeker head, a power of the laser radiation exceeding the power of radiation of the aircraft engine in the sensitivity range of the infrared seeker head, and a pulse repetition frequency being close to typical operation frequencies of the infrared seeker heads; and sending the laser radiation to the point of presence of the missile in the given time moment.



2. The method according to Claim 1, further comprising steps of: calculating coordinates of missile launch place; transmitting an information on the fact of the missile launch and on the coordinates of missile launch place to the earth safety flight providing system and aircraft objective control system.

3. The method according to Claim 1, further comprising steps of: receiving the laser radiation reflected from the infrared seeker head; defining, by the power level of this reflected laser radiation, the fact that the aircraft is attacked by a missile with just the infrared seeker head; defining, on lowering the power level of this reflected laser radiation, the fact of failure of guiding the infrared seeker head to the aircraft; thereafter, terminating the generation of the laser radiation; and transmitting the information on the fact of failure of guiding the missile to the earth safety flight providing system and aircraft objective control system.

4. A system for protecting a civil aircraft from missiles with seeker heads of portable anti-aircraft missile complexes, the system comprising, on board the civil aircraft being protected: sensors of the fact and coordinates of missile launch; a transceiver having a turn drive and an optical channel which output is connected to a sensor of missile coordinates at a missile flight trajectory; an on-board calculator; and a laser radiation generator having an actuation device; wherein the laser radiation generator being made of fluorine-hydrogen-deuterium type, the on-board calcu-

lator being configured to process signals from the sensors of the fact and coordinates of missile launch for calculating coordinates of a missile launch place and for providing a control signal to the turn drive of the transceiver in order for an optical channel of the transceiver to be directed to the launched missile, as well as to process signals from the sensor of missile coordinates at a missile flight trajectory for calculating missile coordinates in the given time moment and for providing an actuating signal to the actuation device of the laser radiation generator.

- 5
10
15
20
25
30
35
40
45
50
55
5. The system according to Claim 4, wherein the on-board calculator is configured to transmit the information on the fact of the missile launch and on the coordinates of missile launch place to the earth safety flight providing system and aircraft objective control system.
6. The system according to Claim 4, further comprising a reflected laser radiation receiver connected to an additional output of the optical channel of transceiver and intended for providing signals to the on-board calculator which is further configured to define, by the power level of this reflected laser radiation, the fact that the aircraft being attacked by a missile with just the infrared seeker head, and to define, on lowering the power level of this reflected laser radiation, the fact of failure of guiding the infrared seeker head to the aircraft; to provide to the actuation device of the laser radiation generator an actuating signal which terminates the generation of the laser radiation, and to transmit the information on the fact of failure of guiding the missile to the earth safety flight providing system and aircraft objective control system.
7. The system according to Claim 4, wherein the sensors of the fact and coordinates of missile launch are sensors of the ultraviolet range.
8. The system according to Claim 4, wherein the sensor of missile coordinates at a missile flight trajectory is a narrow-directed sensor of the ultraviolet range.
9. The system according to Claim 4, wherein the optical channel of the transceiver is further intended to transmit the radiation of the laser radiation generator towards the launched missile.

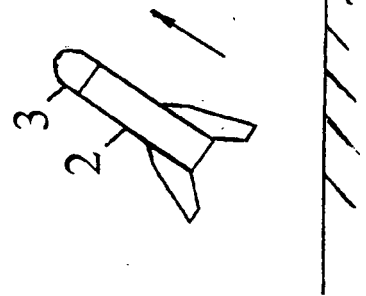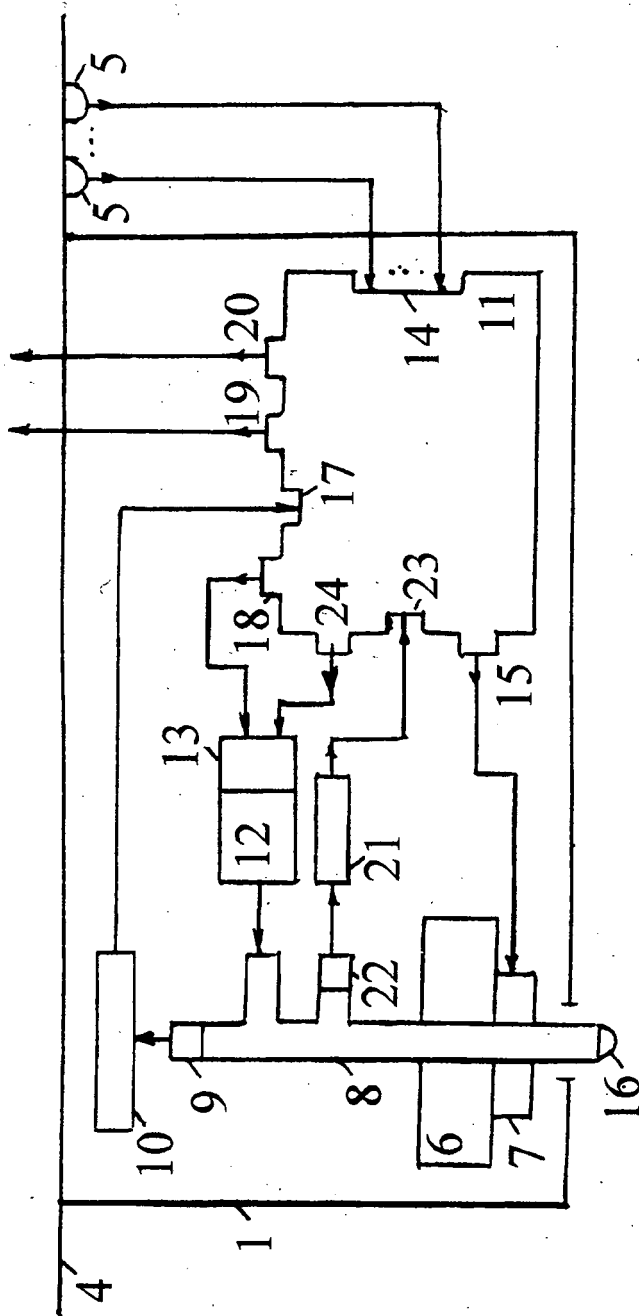

INTERNATIONAL SEARCH REPORT

International application No.
PCT/RU 2004/000103

A. CLASSIFICATION OF SUBJECT MATTER		
F41H 11/02		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) F41H 11/00, 11/02, 13/00, G01S 17/00, 17/02, 17/66, 17/74, 17/88, G05D 1/00, 1/12, G06F 165:00, B64D 1/00, 7/00		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	RU 2108678 C1 (ANTONOV OLEG EVGENIEVICH et al) 10/04.1998, the abstract	1-9
A	DE 4402855 A1 (DIEHL GMBH & CO) 03.08.1995, columns 3, 4 of the description, figure 3	1-9
A	RU 32259 U1 (OTKRYTOE AKTSIONERNOE OBSHESTVO "NAUCHNO- ISSEDOVATELSKY INSTITUT "ZENIT") 10.09.2003, page 3 of the description	1-9
A	RU 2191406 C1 (TOVARISHESTVO S OGRANICHENNOI OTVETSTVENNOSTJU "ASTRAM") 20.10.2002, column 25, paragraph 2 of the description	1-9
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search (10.08.2004)		Date of mailing of the international search report (16.09.2004)
Name and mailing address of the ISA/ RU		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)