



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2682414 C 2015/11/24

(11)(21) **2 682 414**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**


(86) Date de dépôt PCT/PCT Filing Date: 2008/03/31
(87) Date publication PCT/PCT Publication Date: 2008/10/09
(45) Date de délivrance/Issue Date: 2015/11/24
(85) Entrée phase nationale/National Entry: 2009/09/29
(86) N° demande PCT/PCT Application No.: NL 2008/000096
(87) N° publication PCT/PCT Publication No.: 2008/120976
(30) Priorité/Priority: 2007/03/30 (EP07105397.9)

(51) Cl.Int./Int.Cl. *A61K 8/26* (2006.01),
A61K 8/04 (2006.01), *A61Q 13/00* (2006.01),
A61Q 15/00 (2006.01), *A61Q 19/00* (2006.01),
A61Q 9/02 (2006.01)
(72) Inventeurs/Inventors:
DE BEER, ANDREW IWAN, NL;
CAMPBELL, STUART JOHN, NL
(73) Propriétaire/Owner:
COLGATE-PALMOLIVE EUROPE SARL, CH
(74) Agent: SMART & BIGGAR

(54) Titre : COMPOSITION COSMETIQUE COMPRENANT UN SEL D'ALUMINIUM
(54) Title: COSMETIC COMPOSITION COMPRISING AN ALUMINIUM SALT

(57) **Abrégé/Abstract:**

The present invention relates to a cosmetic composition, for instance a deodorant composition, comprising an at least partially dehydrated- aluminium sulphate salt and a carrier liquid. The invention further relates to a method for preparing a composition according to the invention, comprising combining a burnt aluminium salt with the carrier liquid.

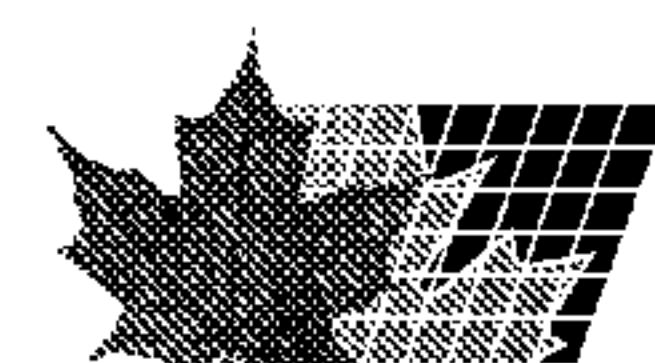

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2008 (09.10.2008)

PCT

(10) International Publication Number
WO 2008/120976 A1

(51) International Patent Classification:

A61Q 9/02 (2006.01) *A61Q 19/00* (2006.01)
A61Q 13/00 (2006.01) *A61K 8/04* (2006.01)
A61Q 15/00 (2006.01) *A61K 8/26* (2006.01)

(74) Agent: **HATZMANN, M., J.**; Johan de Wittlaan 7,
NL-2517 JR Den Haag (NL).

(21) International Application Number:

PCT/NL2008/000096

(22) International Filing Date: 31 March 2008 (31.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

07105397.9 30 March 2007 (30.03.2007) EP

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **SARA LEE/DE N.V.** [NL/NL]; Keulsekade 143, NL-3532 AA Utrecht (NL).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **DE BEER, Andrew Iwan** [NL/NL]; Hazerwoudestraat 91, NL-2729 CK Zoetermeer (NL). **CAMPBELL, Stuart, John** [GB/NL]; Groentelaan 108, NL-2292 AH Wieringen (NL).

Published:

— with international search report

(54) Title: COSMETIC COMPOSITION COMPRISING AN ALUMINIUM SALT

(57) Abstract: The present invention relates to a cosmetic composition, for instance a deodorant composition, comprising an at least partially dehydrated- aluminium sulphate salt and a carrier liquid. The invention further relates to a method for preparing a composition according to the invention, comprising combining a burnt aluminium salt with the carrier liquid.

WO 2008/120976 A1

Title: cosmetic composition comprising an aluminium salt

The invention relates to a cosmetic composition comprising an aluminium salt. The invention further relates to a method for preparing such a composition.

Aluminium salts may be used in cosmetic applications for several purposes. For instance, aluminium chlorides (hexahydrate) are used as antiperspirants. Alum (aluminium sulphate dodecahydrates) is used to reduce body odour in deodorants or as an astringent.

The inventors have found that in applications wherein an aluminium salt is used in a particulate form, agglomeration of the particles may result in a problem with respect to applying the composition. In particular, the agglomeration has been found detrimental to the flowing properties of particles comprising an aluminium salt.

More in particular, the agglomeration of the particles may cause at least a partial blocking of the outlet or outlets from a container from which the composition may be applied. Such problem may especially be prominent in case the outlet or outlets are relatively small, such as in containers provided with a spray dispenser (such as aerosol containers or pump spray containers) or containers wherein the outlet or outlets are narrow in at least one dimension, such as in roll-on applications.

Also, the agglomeration of particles may results in the formation of agglomerates of a size which can result in a unpleasant sensation or even a detrimental effect when applied to the body, e.g. when applied to the skin by hand.

It is an object of the present application to provide a novel cosmetic composition comprising an aluminium salt.

In particular it is an object of the invention to provide a novel cosmetic composition comprising such particles with good flowing properties.

One or more other objects which may be solved in accordance with the invention, will be apparent from the remainder of the description and/or the claims.

It has now been found that one or more problems underlying the invention are solved by providing a cosmetic composition comprising an aluminium salt in a specific form.

Accordingly, the present invention relates to a cosmetic composition comprising an at least partially dehydrated aluminium sulphate salt and usually a carrier liquid other than water.

It has been found that an at least partially dehydrated aluminium sulphate salt in a cosmetic composition (also comprising a carrier liquid, which usually is essentially water-free), shows good flowing properties.

Agglomeration of primary particles of the aluminium salt is generally avoided, or at least the agglomeration is such that a detrimental effect as a result of excessive agglomeration is generally avoided or at least reduced. In particular, at least a partial blocking of the outlet or outlets from a container from which the composition may be applied can be avoided or at least reduced. In an embodiment, the formation of agglomerates of a size which can result in a unpleasant sensation is avoided or at least reduced.

In particular, the salt in the composition has been found to have good free-flowing properties. The term "free-flowing" is used for a powdered material that is not sticky, and thus has no or hardly any tendency to agglomerate or to adhere to contact surfaces.

The composition may in particular be an aerosol, a gel, a paste or a liquid dispersion. When referred herein to a specific physical condition of the composition, such as gas, liquid, solid, gel, *etc.*, the condition of the composition at 25 °C and 1.0 bar is meant, unless specified otherwise.

The cosmetic composition may in particular be selected from the group of deodorants, antiperspirants, shaving compositions, after-shaves and perfumes.

The aluminium salt can in principle be selected from any sulphate salt suitable for use in a cosmetic composition. In particular, the salt may be selected from aluminium salts that –in fully hydrated form – can be represented by the formula $M^+_2SO_4 \cdot Al^{3+}_2(SO_4)_3 \cdot 24H_2O$, or – simplified – as:
5 $M^+Al^{3+}(SO_4)_2 \cdot 12H_2O$. Herein, M^+ is usually selected from the group of ammonium, alkali metal ions and combinations thereof. The alkali metal ions may in particular be selected from the group of sodium ions and potassium ions. In principle, a part of the M^+ ions may be formed by H^+ .

The aluminium salt is at least partially dehydrated, which means
10 that the water of hydration is less than in water-hydration-saturated aluminium salt crystals, *i.e.*, in the above formulae, at least partially dehydrated means to have less than 12 water molecules per Al^{3+} . Usually, the water of hydration saturation level of the salt is less than 90 mol %, in particular 87.5 mol % or less (on average up to 10 water molecules per Al^{3+} in
15 the above formulae).

For good (free-)flowing properties it is in particular preferred that the water of hydration saturation level of the salt is up to 75 mol % (on average up to 9 water molecules per Al^{3+} in the above formulae). More in particular, the water of hydration saturation level may be up to 50 mol % (on average up to
20 6 water molecules per Al^{3+} in the above formulae) or up to 25 mol % (on average up to 3 water molecules per Al^{3+} in the above formulae). It is envisaged that a low level of saturation may be advantageous in prolonging the storage stability of the cosmetic composition.

For practical reasons, some residual water of hydration may be
25 present, such as 1 mol % or more, 6.25 mol % or more (on average at least 1 water molecule per Al^{3+} in the above formulae) or 12.5 mol % or more (on average at least 2 water molecules per Al^{3+} in the above formulae).

In an embodiment the salt is anhydrous, which means in particular that the residual amount of water in the crystals of the salt is below the
30 detection level.

The amount of water of hydration in the aluminium salt and the level of saturation can be determined by drying the aluminium salt at 200°C till constant weight, the difference in weight loss is expressed as amount of water of hydration. The level of saturation may be calculated by comparing the weight loss against a fully hydration saturated aluminium salt.

In general, most or all of the aluminium salt is present as particles. As used herein, the term "particles" relates to a solid material (the aluminium salt) that is not molecularly dissolved in carrier liquid. The maximum desired size is determined to some extent to the type of cosmetic composition and/or the type of container from which the cosmetic composition is dispensed, when used.

In particular in view of avoiding at least partial blocking of an outlet of a container containing the composition (such as an aerosol) and/or for avoiding an unpleasant sensation, *e.g.* to the skin, when a composition (such as a stick or roll-on composition), it is preferred that at least 90 vol % of the salt, in particular at least 95 vol %, more in particular at least 99 vol % of the salt is present in the form of particles having a size of less than 200 μm , more preferably of less than 100 μm , even more preferably a size of less than 50 μm . Herein, particles are considered to have a size of less than 200 μm , less than 100 μm or less than 50 μm respectively, if the particles passes through a sieve having a mesh size of 200 μm , respectively 100 μm respectively 50 μm , in particular with a sieve according to DIN ISO 3310.

The lower limit for the size is not critical for, *e.g.* avoiding blocking. For practical reasons, usually at least 90 vol % of the salt may have a size of at least 1 μm .

The concentration of aluminium salt particles may be chosen within a wide range, depending upon intended the purpose for the composition or the application form (*e.g.* aerosol, stick or roll-on). Usually, the concentration is at least 0.2 wt. %, in particular at least 0.5 wt. %, preferably at least 1 wt. %, in particular at least 2 wt. %, more in particular at least 4 wt. %, based on total

liquid(s) and solid(s). Usually, the concentration is up to 75 wt. %, based on total liquid(s) and solid(s). For a highly homogenous distribution of the salt in the carrier liquid, the concentration usually is up to 50 wt. %, in particular up to 40 wt. %, more in particular up to 30 wt. %, based on total liquid(s) and solid(s).

The composition in general comprises a carrier liquid other than water. The carrier liquid is usually a non-aqueous liquid, and is preferably essentially free of water. In particular, a liquid is considered essentially free of water, if the water content is too low to cause visual agglomeration of the salt particles. More in particular, a liquid is considered essentially free of water if the water content of the liquid is less than 0.5 wt. %.

One or more essentially non-polar compounds are particular suitable for forming the carrier liquid, as in such compounds the aluminium salt typically remains substantially undissolved. In principle, it is possible though to provide a composition of the invention with one or more polar liquid compounds.

In a particularly preferred embodiment, the carrier liquid comprises at least one compound selected from the group of silicone oils and liquid organic compounds. (*i.e.* liquid at 25 °C).

The silicone oil may be volatile or non-volatile. As used herein, "volatile" refers to those materials which have a measurable vapour pressure at ambient conditions (25 °C). Such volatile silicone oils may be cyclic or linear. A description of various volatile silicone oils is found in Todd, *et al.*, "Volatile Silicone Fluids for Cosmetics", 91 Cosmetics and Toiletries, 27-32 (1976), incorporated by reference herein. Preferred volatile silicone oils include those having from about 3 to about 9 silicon atoms. Cyclic volatile silicones useful herein include cyclic dimethylsilicones, wherein the number of silicon atoms preferably is 3-7. Linear volatile silicone oils include those of the formula: $(\text{CH}_3)_3\text{Si}-\text{O}-[\text{Si}(\text{CH}_3)_2-\text{O}]_n-\text{Si}(\text{CH}_3)_3$, wherein n preferably is 1 to 7. Linear volatile silicones generally have viscosities of less than about 5 centistokes at

20184-427

6

25 °C, whereas the cyclic silicones generally have viscosities of less than about 10 centistokes. Examples of volatile silicone oils useful in the present invention include: Dow Corning 344, Dow Corning 345 and Dow Corning 200 (sold by Dow Corning Corporation); 7207 and 7158 (sold by General Electric Company);
5 and SWS-03314 (sold by SWS Silicones Corporation). In particular, good results have been achieved with cyclomethicone.

Non-volatile polyalkyl siloxanes useful herein include polydimethyl siloxanes with viscosities of from about 5 to about 100,000 centistokes at 25 °C. Such polyalkyl siloxanes include the VicasilTM series (sold by General Electric
10 Company) and the Dow Corning 200 series (sold by Dow Corning Corporation). Polyalkylaryl siloxanes include poly methylphenyl siloxanes having viscosities of from about 15 to about 65 centistokes at 25 °C. These are available, for example, as SF 1075 methylphenyl fluid (sold by General Electric Company) and 556 Cosmetic Grade Fluid (sold by Dow Corning Corporation). Useful
15 polyether siloxane copolymers include, for example, a polyoxyalkylene ether copolymer having a viscosity of about 1200 to 1500 centistokes at 25 °C. Such a fluid is available as SF-1066 organosilicone surfactant (sold by General Electric Company). Polysiloxane ethylene glycol ether copolymers are preferred copolymers for use in the present compositions.

20 In particular one or more liquid organic compounds may be selected from the group of liquid alkanes; esters, in particular selected from the group of alkyl esters, benzoate esters, fatty acid esters and fatty alcohol esters; hydrogenated polyalkenes; glycols; and ethers, in particular PPG-ethers.

Preferred liquid organic compounds include liquid compounds
25 selected from the group of isopropyl myristate, isopropylpalmitate, polyorganosilicones (e.g. phenyl-silicone), hexylene glycol, dipropylene glycol, ethanol, poly-lower alkoxylated cetyl alcohols, di-n-butylphthalate, diethyl sebacate, di-isopropyl adipate, neopentylglycol dihexanoate, hydrogenated polydecene, PPG-14 butyl ether, and o-ethyl, ethyl-carboxylmethyl phthalate,
30 including mixtures thereof.

The concentration of the carrier liquid, in particular the essentially non-polar liquid, may be chosen within a wide range, depending upon the intended purpose for the composition (*e.g.* deodorant or antiperspirant) or the application form (*e.g.* aerosol, stick or roll-on). Usually, the concentration is at least 25 wt. %. For a highly homogenous distribution of the salt in the carrier liquid, the carrier liquid concentration is preferably at least 50 wt. %, more preferably at least 60 wt. %, in particular at least 70 wt. %, more in particular at least 80 wt. %, based on total liquid(s) and solid(s). Usually, the concentration is up to 99.5 wt. %, preferably up to 98 wt. %, in particular up to 96 wt. %, more in particular up to 90 wt. %, based on total liquid(s) and solid(s).

The composition may further comprise one or more additives. The skilled person will generally be able to choose one or more suitable additives, depending upon the purpose for the composition or the application form, based on common general knowledge and the information disclosed herein.

In particular, the composition may comprise at least one additive selected from the group of fragrances; thickeners, in particular organic thickeners; gelling agents, in particular organic gelling agents; and free flowing agents, such as hectorite clay, silicagel.

In particular, an aerosol may benefit from the invention. The inventors have found that an aluminium salt that is not at least partially dehydrated very easily agglomerates in a carrier liquid for an aerosol, such that the outlet of a container comprising an aerosol comprising the salt is readily blocked by the agglomerates. Further, it is envisaged that a larger portion of the aluminium salt is actually available to be dispensed from the container, as – contrary to large agglomerates – the salt particles in a composition of the invention will generally remain small enough to be sprayed out of the container.

An aerosol according to the invention at least comprises an aluminium salt, a carrier liquid and a propellant. The propellant preferably is

a gas selected from propane, isobutane, n-butane and dimethylether. Other suitable propellants are known in the art, *e.g.* an inorganic gas or other gaseous organic compound.

In an aerosol of the invention the weight to weight ratio aluminium salt to carrier liquid usually is in the range of 0.5:99.5 to 50:50, in particular in the range of 10:90 to 50:50, more in particular in the range of 20:80 to 50:50. The propellant concentration in an aerosol of the invention is usually at least 50 wt. %, preferably at least 70 wt. %, in particular at least 75 wt. % based on the weight of the aerosol. The concentration is usually up to 99.5 wt. %, in particular up to 99.0 wt. %, more in particular up to 95 wt. %, based on total weight of the aerosol.

The aerosol may be present in any container suitable for holding an aerosol. Such containers are generally known in the art.

In a further advantageous embodiment, the cosmetic composition is a roll-on composition. Such a composition, usually is a liquid dispersion. Such a composition may suitably be provided in a container provided with a roller applicator.

In a further embodiment, the composition is a sprayable composition, in a container provided with a pump spray.

The invention further relates to a method for preparing a composition according to the invention, comprising combining an at least partially dehydrated aluminium salt, in particular a so called burnt aluminium salt, with the carrier liquid.

Heating (burning) a hydrated aluminium salt to a temperature at which at least part of the water of hydration is removed (evaporated) from the salt crystals is a convenient way of obtaining the at least partially dehydrated salt. Depending upon the specific salt and the desired degree of dehydration (percentage of full saturation with water of hydration) a temperature and duration may be chosen. Usually the aluminium salt is heated to a temperature above the flow temperature. A temperature of at least 60 °C is

usually sufficient to remove at least a portion (*e.g.* about 25 %) of the water of hydration. For a low saturation with hydration water and/or a fast dehydration time, the temperature usually is at least 90 °C, preferably at least 150 °C, at least 200 °C or at least 220 °C. For practical reasons the
5 temperature, usually is 500 °C or less, in particular 300 °C or less, more in particular 270 °C or less, or 250 °C or less.

The heating is continued to allow sufficient water to evaporate. When heating to a temperature above the flow temperature, preferably the heating is continued until the salt solidifies.

10 From the at least partially dehydrated salt, particles of a desired size are formed. This may suitably be accomplished by grinding or another technique.

If desired, salt particles of a suitable size can be selected, in particular by sieving.

15 Combining the salt with the carrier liquid and optional other ingredients can be accomplished in a conventional manner.

The invention will now be illustrated by the following examples.

Example 1

20

10 g burnt alum particles (particle size < 50 Micron) having about 7 wt. % residual water of hydration (on average less than 2 water molecules per Al^{3+}) or having about 36 wt. % residual water (on average about 9 water molecules per Al^{3+}) (were mixed with 60 g of cyclomethicone in a flask, sealed
25 and stored for 4 weeks at 45°C.

The same procedure was followed using alum that had not been dehydrated (*i.e.* having 12 water molecules per Al^{3+}).

After 4 weeks the mixtures were evaluated. It was found that the burnt alum particles had remained substantially unagglomerated, whereas the

particles of the fully hydrated particles had form large agglomerates and caking behaviour.

5

Example 2: aerosol composition

	Cyclomethicone	5-10 wt. %
	Burnt potassium aluminium sulfate	2-5 wt. %
	Disteardimonium hectorite	1-3 wt. %
10	Fragrance	0.5 – 1.5 wt. %
	Propellant (butane,propane)	qs.

Example 3: roll-on composition (antideodorant)

15

	Cyclomethicone	70 wt. %
	Disteardimonium Hectorite	3 wt. %
	Propylene carbonate	1 wt. %
	Burnt Potassium Aluminium sulfate	25 wt. %
20	Fragrance	1 wt. %

20184-427

11

An aspect of the invention discloses cosmetic composition comprising an at least partially dehydrated-aluminium sulphate salt and a carrier liquid, other than water, which carrier liquid is essentially free of water, wherein the water of hydration saturation level of the salt is less than 90 mol %.

- 5 An aspect of the invention discloses aerosol container, comprising the aerosol as defined above.

An aspect of the invention discloses container provided with a roller applicator, wherein the container comprises the composition as defined above.

- 10 An aspect of the invention discloses method for preparing a composition as defined above, comprising combining a burnt aluminium salt with the carrier liquid.

20184-427

12

CLAIMS:

1. Cosmetic composition comprising an at least partially dehydrated-aluminium sulphate salt and a carrier liquid, other than water, which carrier liquid is essentially free of water, wherein the water of hydration saturation level of the salt is less than 90 mol %.
- 5 2. Cosmetic composition according to claim 1, wherein the water of hydration saturation level of the salt is up to 75 mol %.
3. Cosmetic composition according to claim 2, wherein the water of hydration saturation level of the salt is up to 50 mol %.
4. Cosmetic composition according to claim 3, wherein the water of hydration
10 saturation level of the salt is up to 25 mol %.
5. Cosmetic composition according to any one of claims 1 to 4, wherein the salt is a potassium aluminium sulphate, an ammonium aluminium sulphate or a sodium aluminium sulphate.
6. Cosmetic composition according to any one of claims to 1 to 5, wherein the
15 carrier liquid is an non-polar liquid.
7. Cosmetic composition according to claim 6, wherein the carrier liquid is a liquid comprising one or more compounds selected from the group of silicone oils and liquid hydrocarbons, which are optionally substituted.
8. Cosmetic composition according to any one of claims 1 to 7, wherein the
20 composition is a deodorant, a shaving composition, an after-shave or a perfume.
9. Composition according to any one of claims 1 to 8, wherein at least 90 vol % of the salt is present in the form of particles having a size of less than 200 μm .
10. Composition according to claim 9, wherein at least 95 vol % of the salt is present in the form of particles having a size of less than 200 μm .

20184-427

13

11. Composition according to claim 10, wherein at least 99 vol % of the salt is present in the form of particles having a size of less than 200 μm .

12. Composition according to any one of claims 1 to 8, at least 90 vol % of the salt is present in the form of particles having a size of less than 50 μm .

5 13. Composition according to claim 12, wherein at least 95 vol % of the salt is present in the form of particles having a size of less than 50 μm .

14. Composition according to claim 13, wherein at least 99 vol % of the salt is present in the form of particles having a size of less than 50 μm .

10 15. Composition according to any one of claims 1 to 14, comprising at least one additive selected from the group of fragrances, thickeners, gelling agents and free flowing agents.

16. Composition according to any one of claims 1 to 15, wherein the composition is an aerosol.

15 17. Composition according to claim 16, wherein the aerosol comprises at least 50 wt. % gas based on total weight of the aerosol.

18. Composition according to claim 17, wherein the aerosol comprises 70 to 99 wt. % gas.

19. Composition according to claim 18, wherein the aerosol comprises 75 to 95 wt. % gas.

20 20. Aerosol container, comprising the aerosol according to claim 18 or 19.

21. Container provided with a roller applicator, wherein the container comprises the composition according to any one of claims 1 to 15.

20184-427

14

22. Method for preparing a composition according to any one of claims 1 to 15, comprising combining a burnt aluminium salt with the carrier liquid.

23. Method according to claim 22, wherein the burnt aluminium salt is obtained by heating hydrated aluminium salt to a temperature above 60°C.

5 24. Method according to claim 23, wherein the temperature is above 150°C.

25. Method according to claim 24, wherein the temperature is in the range of 200-300°C.

26. Cosmetic composition according to claim 1, wherein the composition is an aerosol cosmetic composition, wherein at least 90 vol % of the salt is present in the form of
10 particles having a size of less than 50 µm, and further comprising a propellant.

27. Cosmetic composition according to claim 1, wherein the composition is an aerosol cosmetic composition, wherein at least 90 vol % of the salt is present in the form of particles having a size of less than 50 µm, wherein the carrier liquid is a non-polar liquid comprising one or more compounds selected from the group of silicone oils and liquid
15 hydrocarbons, which are optionally substituted, wherein the water of hydration saturation level of the salt is up to 75 mol %, and further comprising a propellant.

28. Cosmetic composition according to claim 1, wherein the composition is an aerosol cosmetic composition, wherein at least 90 vol % of the salt is present in the form of particles having a size of less than 50 µm, wherein the carrier liquid is a non-polar liquid
20 comprising one or more compounds selected from the group of silicone oils and liquid hydrocarbons, which are optionally substituted, wherein the water of hydration saturation level of the salt up to 75 mol %, wherein the weight ratio of the aluminium sulphate salt to the carrier liquid is in the range of 0.5:99.5 to 50:50, and further comprising a propellant.

29. Cosmetic composition of claim 1, wherein the composition is an aerosol
25 cosmetic composition, wherein at least 90 vol % of the salt is present in the form of particles

20184-427

15

having a size of less than 50 μm , wherein the carrier liquid is a non-polar liquid comprising one or more silicone oils, wherein the water of hydration saturation level of the salt up to 75 mol %, wherein the weight ratio of the aluminium sulphate salt to the one or more silicone oils is in the range of 0.5:99.5 to 50:50, and further comprising a propellant.