




(86) Date de dépôt PCT/PCT Filing Date: 2008/03/24  
(87) Date publication PCT/PCT Publication Date: 2008/11/20  
(45) Date de délivrance/Issue Date: 2015/05/05  
(85) Entrée phase nationale/National Entry: 2009/10/15  
(86) N° demande PCT/PCT Application No.: US 2008/003823  
(87) N° publication PCT/PCT Publication No.: 2008/140654  
(30) Priorité/Priority: 2007/05/11 (US60/928,752)

(51) Cl.Int./Int.Cl. *B63B 35/08* (2006.01),  
*B63B 21/50* (2006.01), *B63H 25/02* (2006.01),  
*B63H 25/42* (2006.01)  
(72) Inventeur/Inventor:  
KOKKINIS, THEODORE, US  
(73) Propriétaire/Owner:  
EXXONMOBIL UPSTREAM RESEARCH COMPANY,  
US  
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : NAVIRE A ALIGNEMENT AUTOMATIQUE SUR LA DIRECTION DE DERIVE DES GLACES  
(54) Title: AUTOMATIC ICE-VANING SHIP

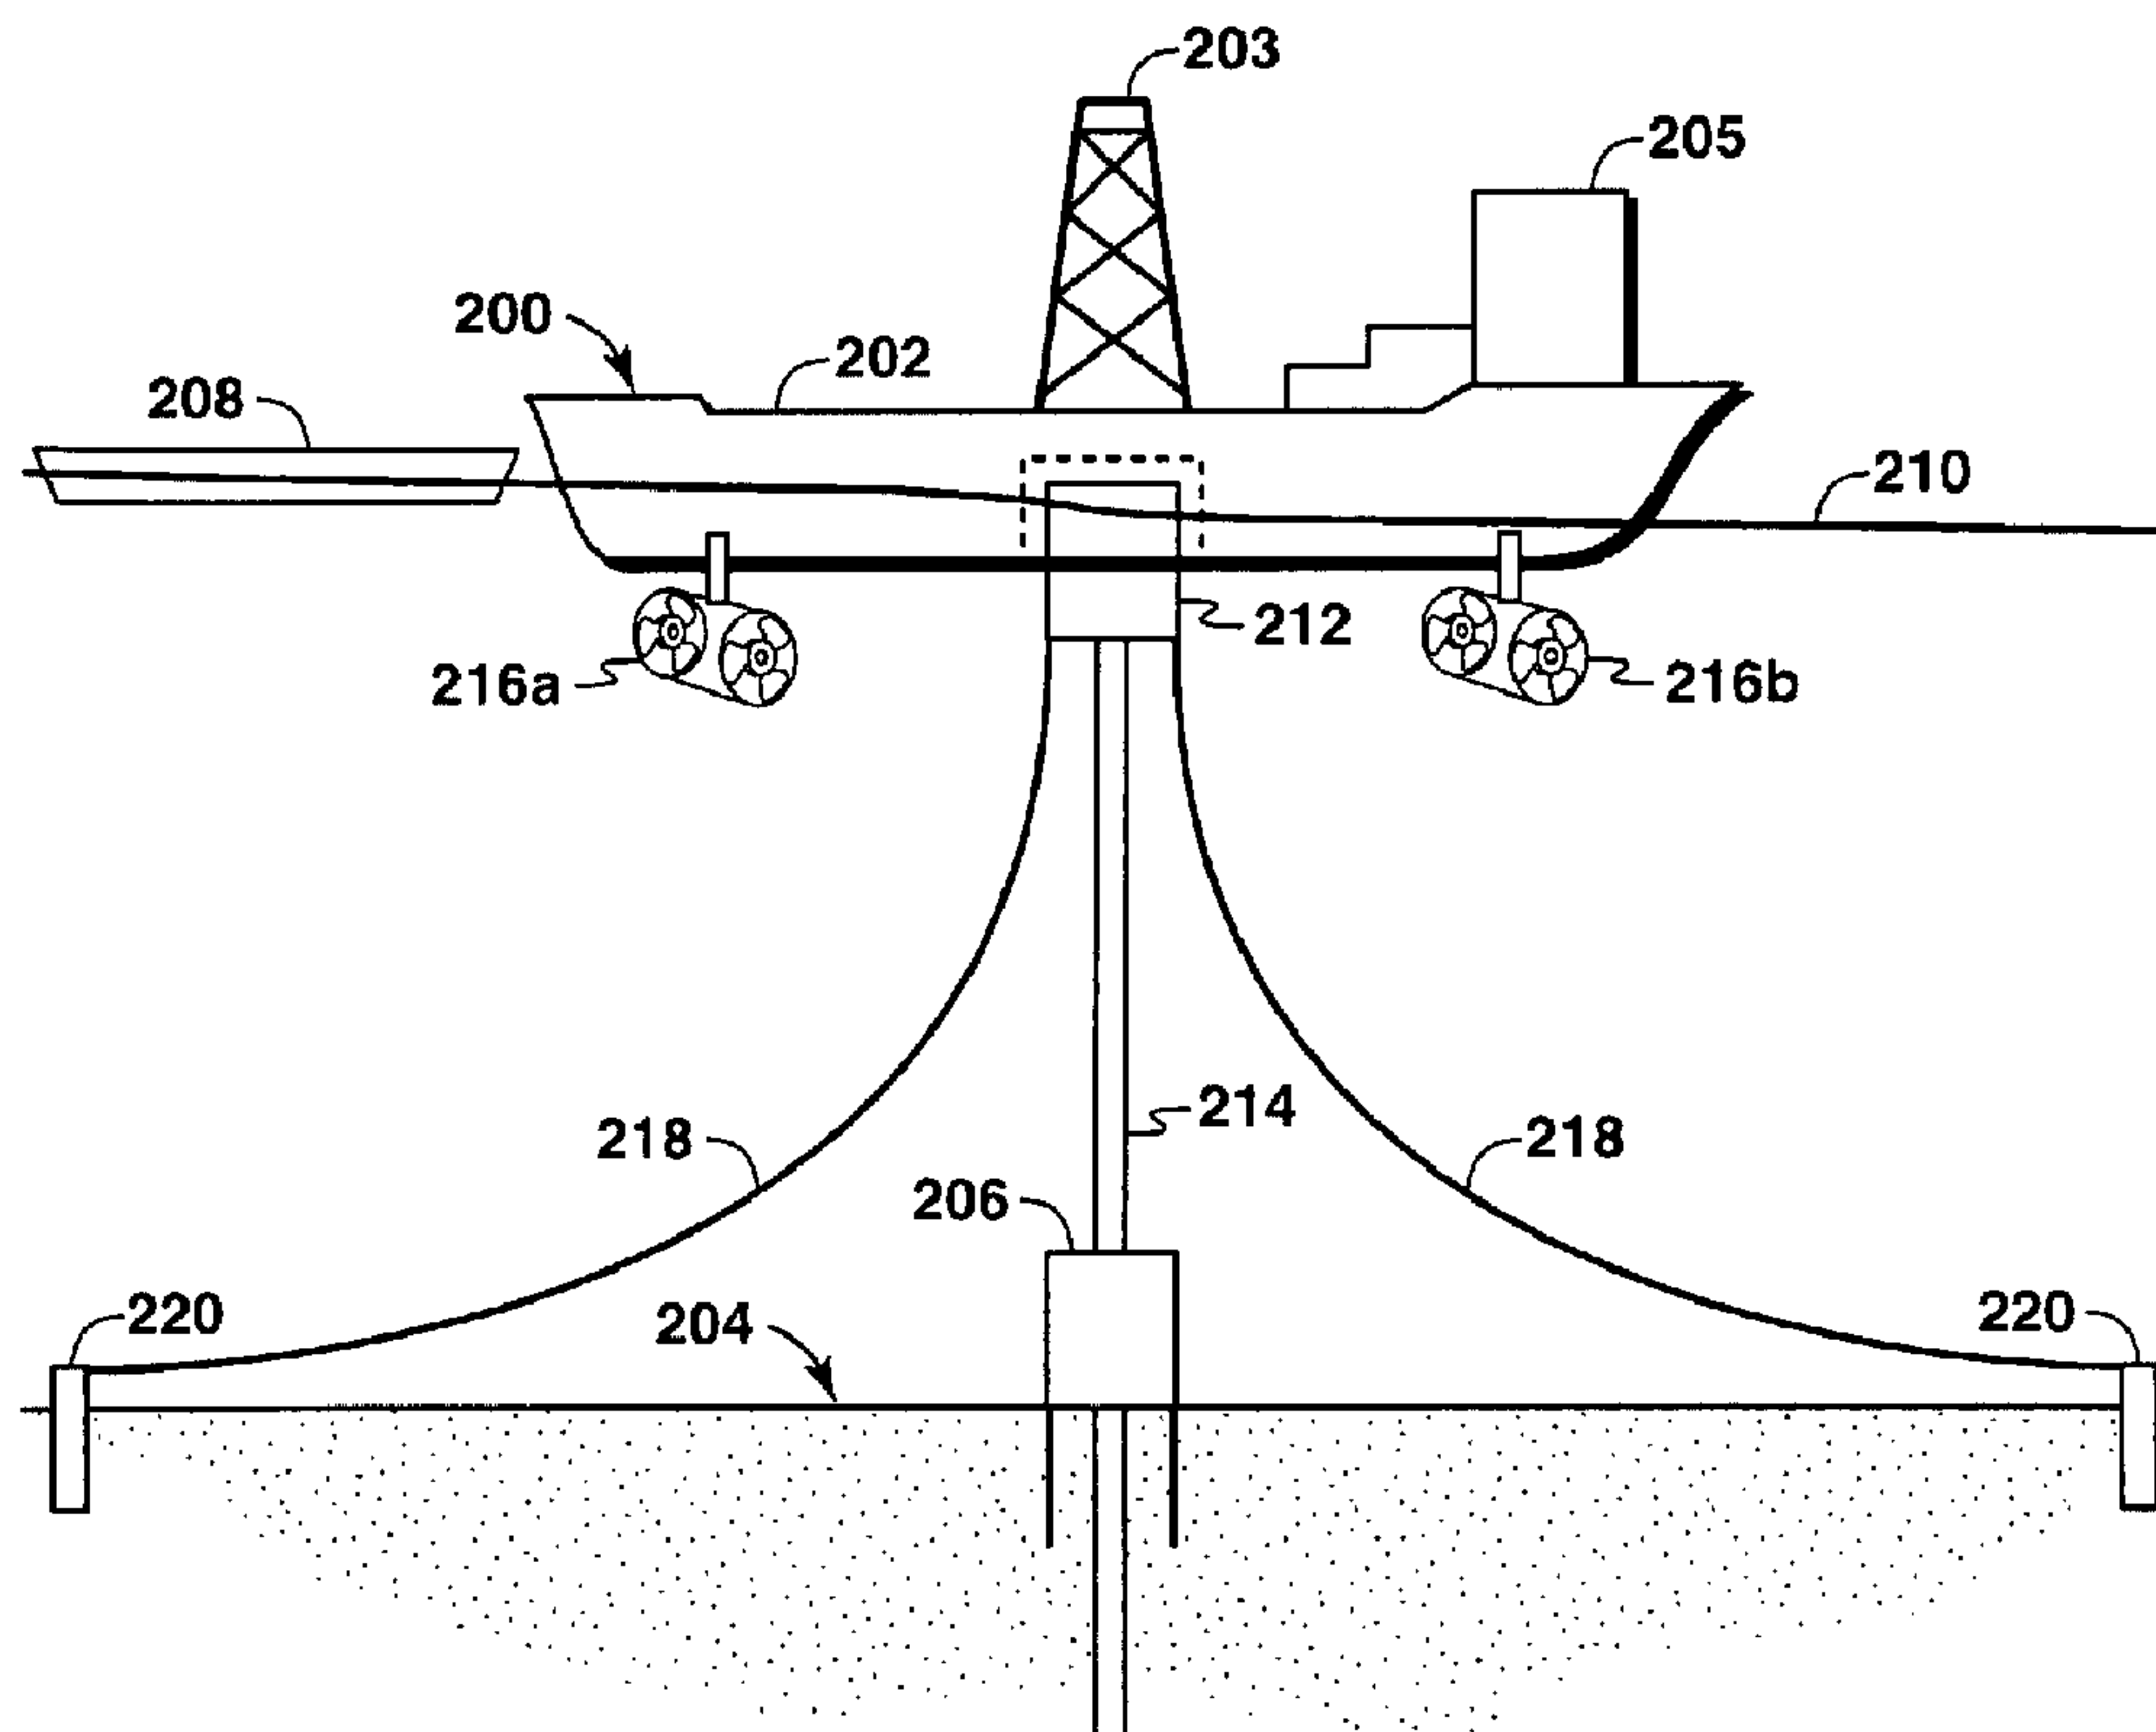

(57) Abrégé/Abstract:

The present invention discloses apparatuses, systems, and methods for operating a marine vessel, drilling subsea wells, and producing hydrocarbons therefrom. The marine vessel comprises at least two matching pairs of controlled azimuthing propulsion



(57) **Abrégé(suite)/Abstract(continued):**

devices to ice-vane the vessel in the event of a changing ice drift or other conditions and keep station in a body of water containing pack ice. In one embodiment, a matching pair of azimuthing propulsion devices are provided. In one embodiment, the propulsion devices share a single physical axis of rotation and in another each propulsion device has its own physical axis of rotation. In another embodiment, the azimuthing propulsion devices are controlled by an automatic control system with a feedback loop. In yet another embodiment, the vessel is substantially oblong having a centrally mounted turret with mooring lines capable of disconnecting from the vessel.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 November 2008 (20.11.2008)

PCT

(10) International Publication Number  
**WO 2008/140654 A1**

(51) International Patent Classification:  
**B63H 25/02** (2006.01)

(21) International Application Number:  
PCT/US2008/003823

(22) International Filing Date: 24 March 2008 (24.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/928,752 11 May 2007 (11.05.2007) US

(71) Applicant (for all designated States except US): **EXXON-MOBIL UPSTREAM RESEARCH COMPANY** [US/US]; P.O. Box 2189, Houston, TX 77252-2189 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KOKKINIS, Theodore** [US/US]; 4010 Tennyson, Houston, TX 77005 (US).

(74) Agents: **BROWN, Adam, P.** et al.; Exxonmobil Upstream Research Company, CORP-URC-SW342, P.O. Box 2189, Houston, TX 77252-2189 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

**Published:**

- with international search report
- with amended claims and statement

(54) Title: AUTOMATIC ICE-VANING SHIP

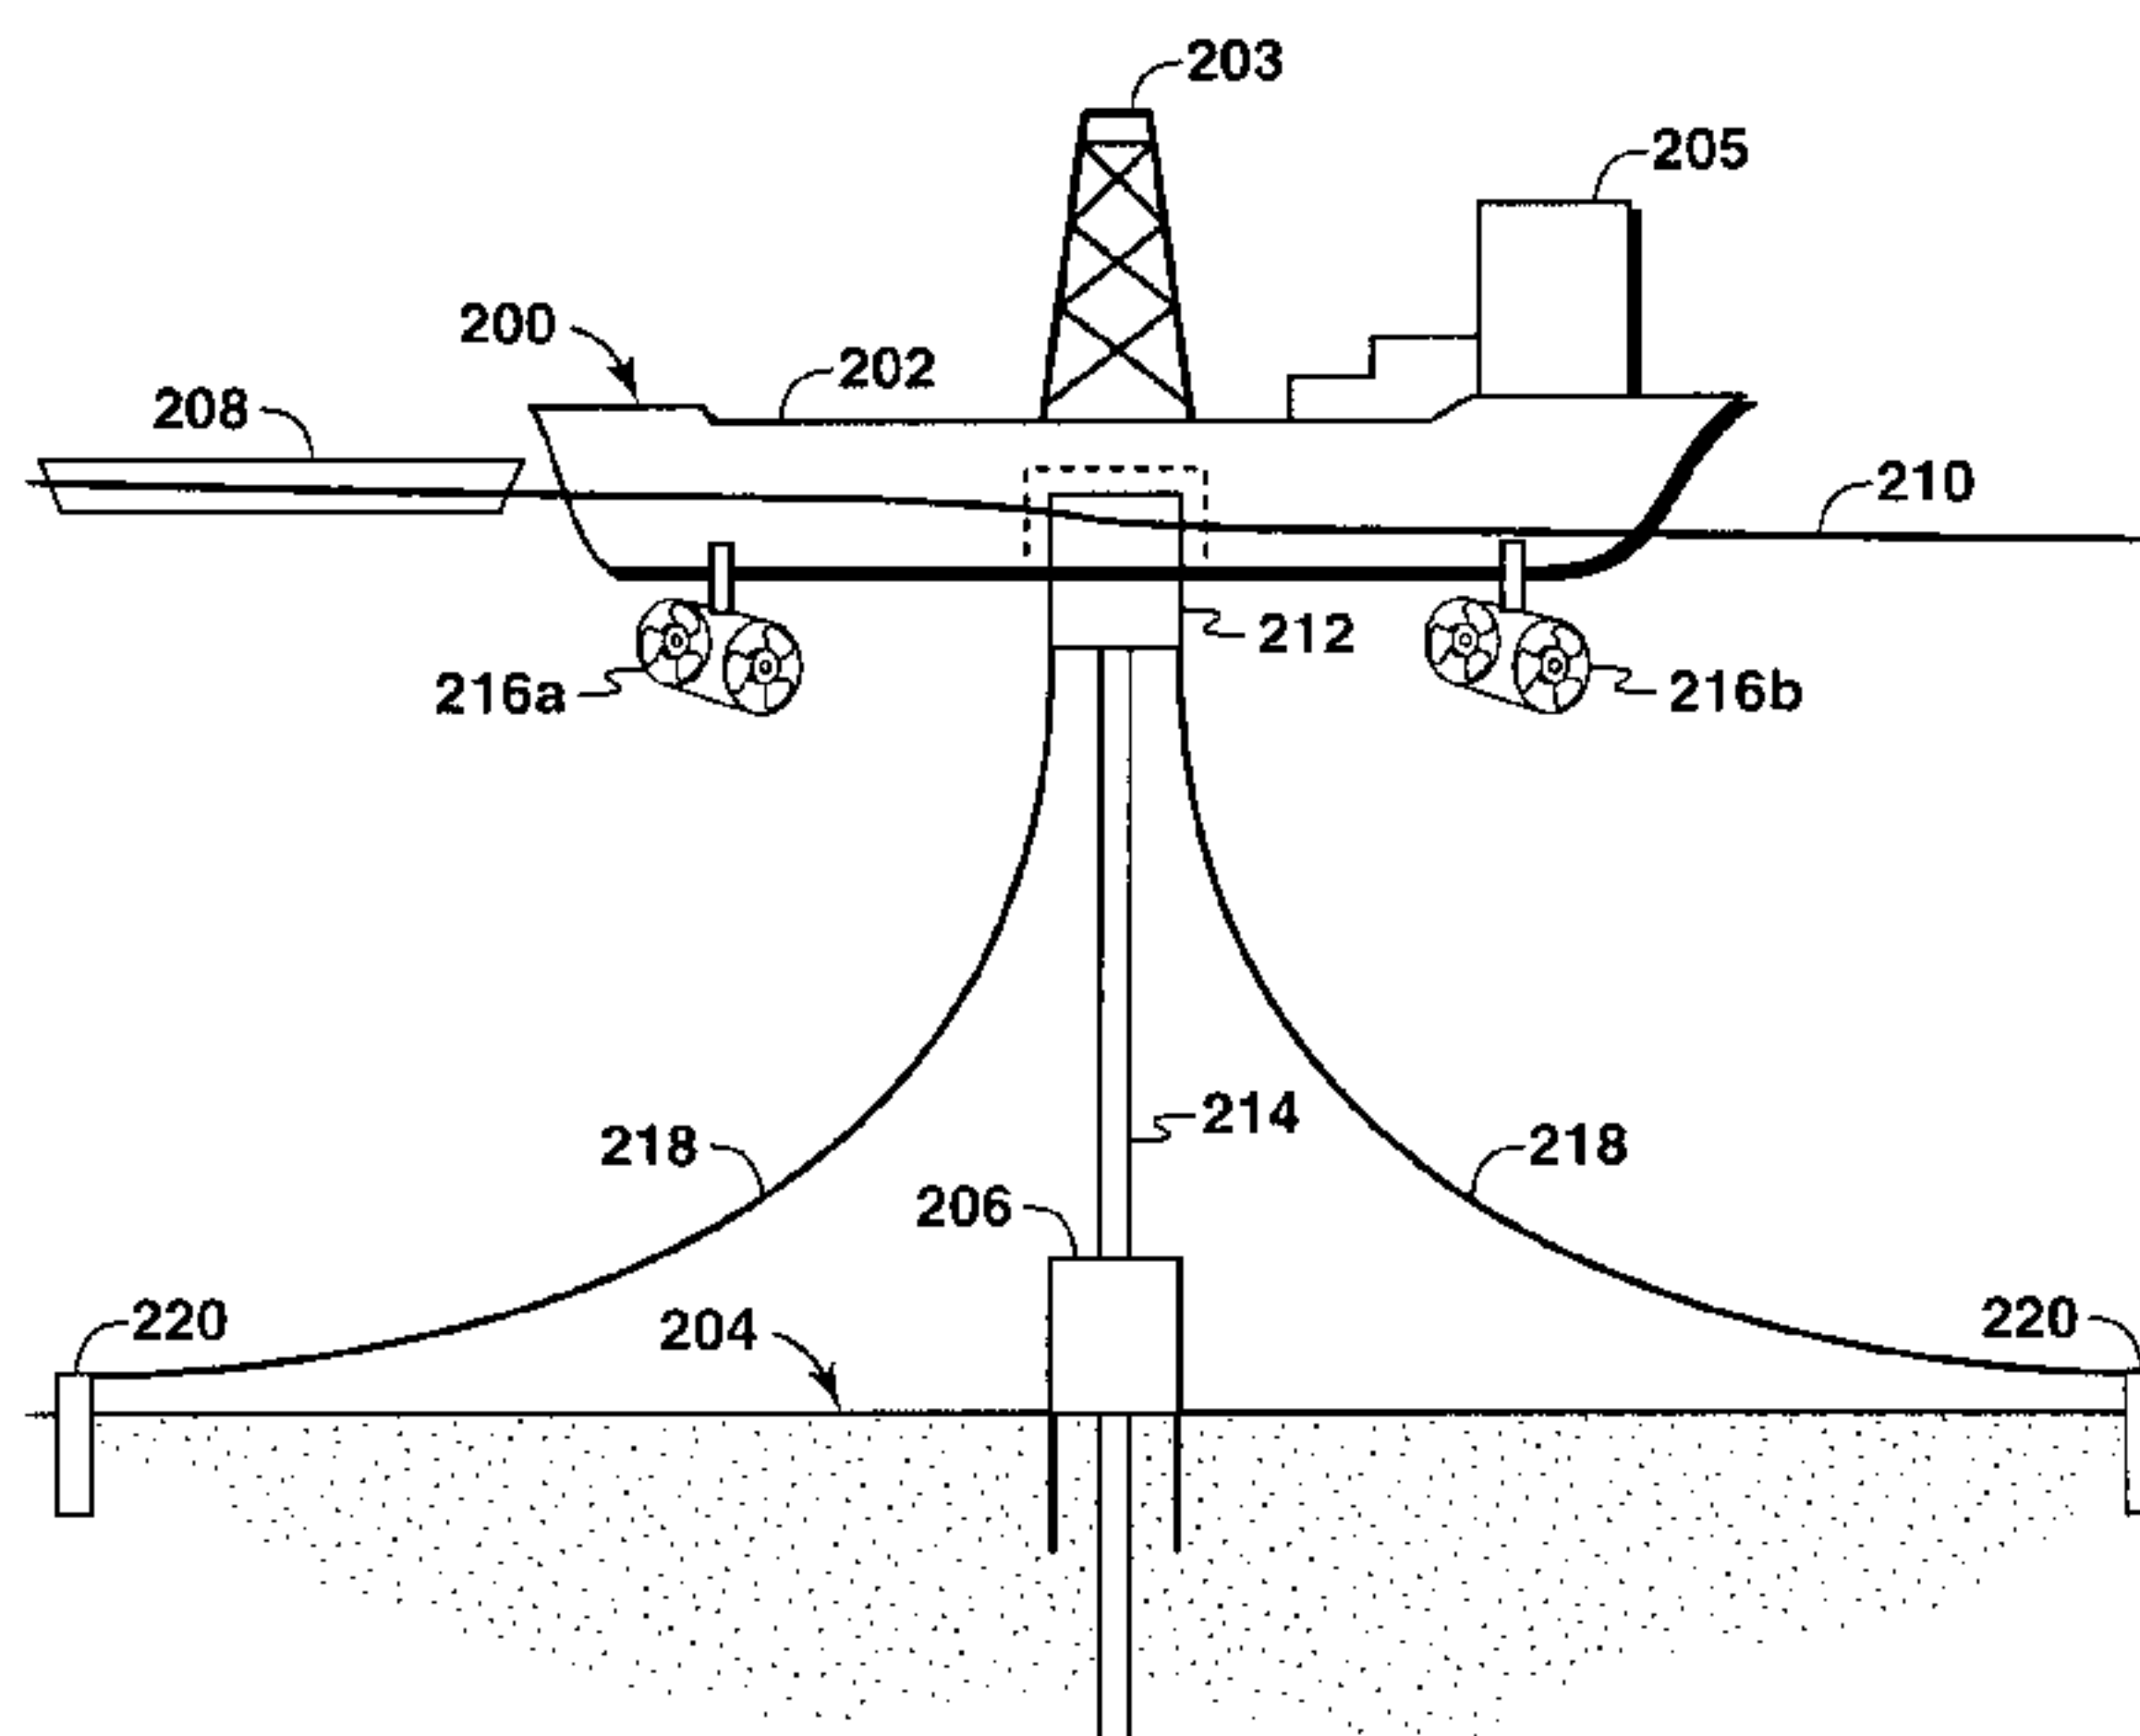


**FIG. 2A**

(57) **Abstract:** The present invention discloses apparatuses, systems, and methods for operating a marine vessel, drilling subsea wells, and producing hydrocarbons therefrom. The marine vessel comprises at least two matching pairs of controlled azimuthing propulsion devices to ice-vane the vessel in the event of a changing ice drift or other conditions and keep station in a body of water containing pack ice. In one embodiment, a matching pair of azimuthing propulsion devices are provided. In one embodiment, the propulsion devices share a single physical axis of rotation and in another each propulsion device has its own physical axis of rotation. In another embodiment, the azimuthing propulsion devices are controlled by an automatic control system with a feedback loop. In yet another embodiment, the vessel is substantially oblong having a centrally mounted turret with mooring lines capable of disconnecting from the vessel.

WO 2008/140654 A1

**AUTOMATIC ICE-VANING SHIP**

5

**FIELD OF THE INVENTION**

[0002] This invention relates generally to a method to enhance drilling and production operations from sub-sea wells. More particularly, this invention relates to a system, apparatus, and associated methods of operating a moored vessel in seas or oceans containing pack ice.

10

**BACKGROUND**

[0003] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present techniques. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present techniques. Accordingly, it should be understood that this section should be read in this  
15 light, and not necessarily as admissions of prior art.

[0004] Keeping station in drifting pack ice is a challenging task for an offshore platform. Bottom-founded platforms have been successfully developed for shallower water. In deeper water (notionally in water depth of 75 m or greater), however, bottom-founded platforms become impractical, and floating platforms need to be employed. Such floating platforms may keep  
20 station with the help of a mooring system consisting of several mooring lines made of steel (wire or chain) or synthetic materials. Drifting pack ice impacting the floating platform produces loads in the mooring lines. Such loads can become very high when the ice conditions are severe, leading to breakage of the lines.

[0005] A ship-shape vessel is attractive as a floating platform in drifting pack ice  
25 because: it has a large deck area, it has a large under-deck volume, and ice loads on it from drifting pack ice are relatively low when the vessel is aligned with the ice drift direction.

[0006] However, if the ice drift direction changes, a ship-shape vessel could be impacted by the drifting ice on the beam, resulting in significantly higher ice loads than when aligned with the ice drift direction. Such ice loads may exceed the capacity of even the strongest mooring  
30 systems that have been designed to date.

[0007] If the mooring system is attached to a turret about which the vessel may rotate in the ice, the vessel can eventually align itself with the new ice drift direction (ice-vane), and ice loads can reduce to the original, relatively low, levels. The problem is that pack ice may prevent

- 2 -

the rotation of the vessel about the turret. In order for the vessel to rotate, it breaks up and clears ice upstream near the bow and downstream near the stern. This can be a slow process, and while it is happening, mooring loads may significantly increase. To mitigate such increase in the loads, faster and easier break up and clearance of ice is preferred.

5 [0008] A variety of vessels have been designed and/or built to deal with the particular problems associated with subsea oil and gas drilling and production in areas having significant ice incursions. One example is an FPSO (Floating Production Storage and Offloading) in Terra Nova. The Terra Nova FPSO is a turret-moored vessel equipped with a thruster-assisted position mooring system in which the thrusters are automatically controlled. However, the design of the  
10 system is primarily driven by the harsh open-water wave and wind conditions at the Terra Nova site. The pack ice design condition for Terra Nova is very mild: 5/10ths ice coverage with 0.3 m ice thickness. The Terra Nova thruster system is, thus, not designed to break up and clear ice or facilitate the ice-vaning of the vessel. The vessel has 5 thrusters (2 at the bow and 3 at the stern) arranged to optimize station-keeping performance in high wave/wind conditions. Moreover, the  
15 automatic control system for the thrusters is designed for open water conditions, and does not have any functions for determining ice drift direction or commanding the thrusters to do what is necessary to align the vessel with changing ice drift direction. The vessel is intended to disconnect and leave the field in more severe pack ice conditions, should such conditions ever occur, or in case an iceberg gets too close to it.

20 [0009] One typical solution includes the use of other vessels called "support icebreakers" to break up and clear the ice in the areas necessary for the moored vessel to ice-vane. This is not a satisfactory solution, as it introduces considerable operational complexity and risk. The support icebreakers have to correctly identify the prevailing ice conditions and move through the ice repeatedly to break it up and clear it. On many occasions, they will have to accomplish this  
25 in close quarters with the moored vessel and under conditions of poor visibility and other adverse weather conditions (snow, high winds, etc.). Depending on the ice conditions, more than one icebreaker may need to be active in a particular area, which increases the risk for collision between icebreakers and also between an icebreaker and the moored vessel. Because of the uncertainty about the effectiveness of icebreaker operations, this type of solution usually also  
30 includes a capability to disconnect the mooring system to avoid breaking it, if the loads due to the ice exceed the capacity of the system. While the capability to disconnect mitigates the risk of breaking mooring lines, it introduces further operational complexity and risk, particularly if the

- 3 -

moored vessel has no propulsion and steering of its own. Failure to properly manage the vessel after disconnection may lead to collision and grounding.

[0010] Disclosed herein are several examples of vessels designed to solve some of the problems associated with sub-sea oil and gas drilling and production in arctic areas. Kvaerner Masa Yards in the 1990s developed a new type of ship for sailing in ice, named Double-Acting Tanker (DAT), which employs pulling azimuthing thrusters at the end of the ship that first meets the ice for propulsion (*see* K. Juurmaa, et al. *infra*. and U.S. Pat. No. 5,218,917). Aker-Finnyards in the 1990s built at least two multi-purpose icebreaker support vessels utilizing azimuthing thrusters, which utilize azimuthing thrusters for propulsion and maneuvering (*see* P. Lohi, et al. *infra*). Kvaerner Masa Yards in the 1990s proposed a triangular asymmetric icebreaker with three azimuthing thrusters, called the oblique icebreaker (*see* M. Arpiainen, et al. *infra*). The principle of operation is to use the entire side of the vessel to break ice, taking advantage of a special oblique hull form. By operating this way, the oblique icebreaker can break a much wider channel in the ice than ship-shape icebreakers for escorted ships to follow in. Den Norske Stats Oljeselskap has apparently developed a two-part ship for use in oil transport in arctic waters, which consists of a barge part containing a number of loading tanks and a propulsion part, which is adapted for breaking ice and has one or more azimuthing thrusters (U.S. Pat. No. 6,162,105). The propulsion part joins with the barge part for sailing through ice-covered waters (similar to a tug-barge used in open water). Upon arrival at a field location, the barge part connects to a submerged turret buoy, and the propulsion part separates from it. While the barge part is intended to ice-vane about the submerged turret buoy, it is not equipped with any active system to facilitate such ice vaning. Only the propulsion part has azimuthing thrusters.

[0011] The Canadian Marine Drilling Company (CANMAR) developed a series of ship-shape drillships, which they used for drilling operations in the Beaufort Sea. The drillships were primarily intended to drill in the open water season (summer), but to be able to withstand occasional incursions of drifting pack ice (*see* R. M. Hinkel, et al. *infra*). Frontier Drilling engaged Aker Arctic to conduct initial design and conceptual work for their turret-moored drillship Frontier Discoverer. This work includes development of a modified hull form and protection for the riser from the ice, but it does not include a special thruster arrangement or control system (*see* K. Bäckström *infra*).

[0012] Statoil and LMG Marin have developed a design for an Arctic DrillShip (ADS) with icebreaker features. The ADS has an icebreaker hull, ice cutters around the hull of the ship;

- 4 -

thrusters aft and forward and turret mooring for water depths from 50 meters (m) to 1,000 m (*see* J. Jorde *infra*, and Int'l Patent App. WO2007/089152). However, the Statoil design requires the development of new ice cutter technology and fails to consider problems of automatic control.

[0013] At a concept level, Sandwell, Inc. conducted a paper study in 1996-97 for Mobil  
5 and Texaco, in which Sandwell developed concepts for an in-ice Floating Production, Storage and Offloading Structure (*see* Sandwell *infra*). Two of the concepts developed involved a ship-shape hull: 1) a conventional "moveable" icebreaking FPSO, which had an efficient icebreaking hull, bow thrusters for improved maneuvering, and to enhance its ice clearance and station-keeping capabilities in ice and a disconnectable mooring. This FPSO was intended to operate  
10 with ice management support of two "very capable" icebreakers, supplemented at times by a third; and 2) an extreme "permanent" FPSO, that had a much more extreme icebreaking hull with large reamers for self-ice management, with a number of azimuthing thrusters for improved maneuvering, and to enhance its ice clearance and station-keeping capabilities in ice. This FPSO was intended to rely primarily on self-ice management, but Sandwell's system included one  
15 "capable" icebreaker, supplemented at times by a second. While the mooring system was intended to be permanently connected, the concept included disconnectability in extreme situations. This concept did not include matching thruster pairs, or automatic control of the thrusters.

[0014] Also at a concept level, Kulikov and Ruksha (U.S. Pat. App. No. 2006/0096513)  
20 proposed a single-point system for tankers to moor at an offshore terminal for the purpose of loading liquids, primarily oil, from an onshore tank farm in ice conditions. This system utilizes a combination loading hose-mooring line attached to a fixed structure at the seabed allowing 360 degree (°) rotation, and an icebreaker to lead the tanker through ice to the location of the offshore terminal, equipped with a guiding trunk that protects the loading hose from ice action. Although  
25 this system is claimed to offer "the possibility of roundabout turning," it includes no elements specifically designed to facilitate and accelerate ice-*vaning*. Furthermore, this system addressed the problem of only temporary mooring of tankers in ice for a short-duration operation, with the option of stopping the operation and disconnecting the mooring.

[0015] Accordingly, an apparatus, system, and method are needed that effectively breaks  
30 up and manages ice incursions on a turret-moored marine vessel, facilitates and accelerates ice-*vaning*, and is capable of keeping a relative position in pack ice conditions to mitigate the impact of ice on the vessel.

- 5 -

[0016] Related material may be found in at least: "Global Analysis of the Terra Nova FPSO Turret Mooring System," Paper 11914, Proceedings, Offshore Technology Conference, Houston, Texas, May 1-4, 2000; "Terra Nova Vessel Design and Construction," Paper 11920, Proceedings, Offshore Technology Conference, Houston, Texas, May 1-4, 2000; "Experience with Drilling Operations in the US Beaufort Sea," R. M. Hinkel, S.L. Thibodeau and A. Hippman, Paper 5685, Proceedings, Offshore Technology Conference, Houston, Texas, May 2-5, 1988; "An Arctic Drilling Campaign in Alaska," K. Bäckström, 2<sup>nd</sup> Annual Arctic Passion Seminar, Helsinki, Finland, March 15, 2007; "Arctic Drill Ship – For Year-Round Operations in Arctic Environments," J. Jorde, 9<sup>th</sup> Annual INTSOK Conference, Houston, Texas, March 27-28, 2007; "Revolutionary Oblique Icebreaker," M. Arpiainen, M. Baeckstroem and R-A. Suojanen, Proceedings, POAC 1999, Helsinki, Finland, August 23-27, 1999; "Mobil/Texaco In-Ice Floating Production, Storage and Offloading Structure Feasibility Study," report by Sandwell, Inc., Vancouver, BC, Canada, August 1997; "New Ice Breaking Tanker Concept for the Arctic (DAT)," K. Juurmaa, G. Wilkman and M. Baeckstroem, Proceedings, 13th International Conference on Port and Ocean Engineering under Arctic Conditions (POAC), Murmansk, Russia, August 15-18, 1995; "MSV Fennica, A Novel Icebreaker Concept," P. Lohi, H. Soininen and A. Keinonen, Proceedings, IceTech '94, Calgary, Alberta, Canada, 1994; Int'l Patent App. WO2007/089152; U.S. Patent App. 2006/0096513; U.S. Pat. Nos. 6,848,382; 6,799,528; 6,162,105; 5,218,917; and 4,747,359.

## SUMMARY

[0017] One embodiment of the present invention discloses a marine vessel. The marine vessel includes a hull, the hull being operatively connected to a mooring turret and at least a portion of the hull being configured to resist ice loads. The vessel further includes at least two matched pairs of azimuthing propulsion devices operatively engaging the hull, wherein each of the at least two matched pairs of propulsion devices are configured to provide a net force on the hull and clear ice away from the hull. A control system is also provided, which is operatively connected to the at least two matched pairs of azimuthing propulsion devices and configured to enable control of the marine vessel via the propulsion devices. The vessel may further be configured to ice-vane or keep station via the propulsion devices, the control system may be automatic, the hull may be ship-shaped, and the vessel may be one of a drillship, a floating production, storage, and offloading vessel (FPSO), a floating production of liquefied natural gas vessel (FLNG), a floating storage and regasification unit for LNG (FSRU), a gas-to-liquids

- 6 -

floating production, storage and offloading vessel (GTL), a gas-to-chemicals floating production, storage and offloading vessel (GTC), and a sailing LNG carrier.

[0018] Another embodiment of the present invention discloses a control system for a marine vessel. The control system includes at least two matched pairs of azimuthing propulsion devices operatively attached to the marine vessel, wherein each of the at least two matched pairs of propulsion devices are configured to provide a net force on the marine vessel and clear ice away from the marine vessel; a plurality of sensors operatively connected to the marine vessel configured to provide at least one input parameter; and a plurality of azimuthing propulsion device control commands, wherein the control system controls the plurality of azimuthing propulsion devices utilizing the azimuthing propulsion device control commands and the at least one input parameter. The control system may further be configured to ice-vane the vessel or keep station, may be automatic, and may include a feedback loop.

[0019] A third embodiment of the present invention discloses a method of producing hydrocarbons. The method includes positioning a vessel in a body of water having pack ice. The vessel includes a hull operatively connected to a mooring turret, wherein at least a portion of the hull is configured to resist ice loads; and at least two matched pairs of azimuthing propulsion devices operatively engaging the hull, wherein each of the at least two matched pairs of propulsion devices are configured to provide a net force on the hull and clear ice away from the hull. The method further includes operatively connecting the vessel to a subsea wellhead, wherein the subsea wellhead is configured to produce hydrocarbons, operating the vessel utilizing the at least two matched pairs of azimuthing propulsion devices, and receiving the hydrocarbons into the vessel.

[0020] A fourth embodiment of the present invention discloses a method of manufacturing a marine vessel. The method includes constructing a marine vessel, wherein the vessel comprises a hull operatively connected to a mooring turret, wherein at least a portion of the hull is configured to resist ice loads; and the vessel includes at least two matched pairs of azimuthing propulsion devices operatively engaging the hull, wherein each of the at least two matched pairs of propulsion devices are configured to provide a net force on the hull and clear ice away from the hull.

[0021] A fifth embodiment of the present invention discloses a method of drilling a subsea well. The method includes positioning a vessel in a body of water having pack ice. The vessel includes a hull operatively connected to a mooring turret, wherein at least a portion of the

- 7 -

hull is configured to resist ice loads; and at least two matched pairs of azimuthing propulsion devices operatively engaging the hull, wherein each of the at least two matched pairs of propulsion devices are configured to provide a net force on the hull and clear ice away from the hull. The drilling method further includes operatively connecting the vessel to a subsea wellhead, wherein the subsea wellhead is configured to enable the drilling of the subsea well; and operating the vessel utilizing the at least two matched pairs of azimuthing propulsion devices.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0022] The foregoing and other advantages of the present techniques may become apparent upon reviewing the following detailed description and drawings in which:

10 [0023] FIGs. 1A-1C illustrate exemplary environmental conditions and conventional vessel configurations;

[0024] FIGs. 2A-2E show side views and bottom views of illustrations of exemplary embodiments of the vessel of the present invention;

15 [0025] FIGs. 3A-3B illustrate an exemplary embodiment of methods and an apparatus of the present invention as shown in FIGs. 2A-2E including exemplary environmental conditions and responses; and

[0026] FIG. 4 illustrates an exemplary control system for use in combination with the propulsion devices of the vessel of FIGs. 2A-2E and 3A-3B and methods for using the same.

### **DETAILED DESCRIPTION**

20 [0027] In the following detailed description section, the specific embodiments of the present invention is described in connection with preferred embodiments. However, to the extent that the following description is specific to a particular embodiment or a particular use of the present invention, this is intended to be for exemplary purposes only and simply provides a description of the exemplary embodiments. Accordingly, the invention is not limited to the specific embodiments described below, but rather, it includes all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.

25 [0028] The term "ice-vaning" refers to the method of aligning of a turret-moored marine vessel having a substantially oblong hull shape with the prevailing ice drift direction, which may shift dynamically, either continuously or intermittently.

- 8 -

[0029] The term “station keeping” refers to the method of maintaining the position of a vessel in a body of water. If the vessel is in a body of water containing pack ice, the term “station keeping” includes mitigating the effect of ice on the vessel while maintaining position.

[0030] The term “azimuth” refers to the ability of a propulsion device (e.g. a thruster) or pair of propulsion devices to rotate about an axis. Preferably, the axis is substantially vertical with respect to the deck portion of the vessel and the rotation is preferably at least about 180 degrees ( $^{\circ}$ ), more preferably at least about  $270^{\circ}$ , or most preferably at least about  $360^{\circ}$  around the axis.

[0031] The phrase “matched pair of azimuthing propulsion devices” means that at least two propulsion devices form a functionally integrated pair rather than operating independently of each other. For example, the propulsion devices may be physically integrated, such as when both propulsion devices rotate about the same physical axis or the propulsion devices may be operationally integrated such as when the motions and actions of the two propulsion devices are connected by a control system and the actions of one propulsion device affect the actions of the other propulsion device. In some cases, the matched pair of azimuthing propulsion devices are both physically integrated and operationally integrated.

[0032] When referring to a hull, the term “ship-shape” means a hull with one dimension in the horizontal plane (length) significantly greater than the other dimension (breadth or beam).

[0033] In one embodiment of the present invention the apparatus includes a turret-moored marine vessel having an ice-breaking hull and azimuthing propulsion devices in matched pairs. Preferably, the propulsion devices in each matched pair azimuth or rotate about a vertical axis so that they substantially oppose each other.

[0034] In another embodiment of the present invention, the matched pairs of azimuthing propulsion devices are operatively connected to a control system to facilitate and accelerate ice-vaning and station keeping and in general for the purpose of reducing ice loads on the moored vessel. The control system may be automatic and include a feedback loop. This system, including the turret-moored vessel and its mooring system, may be referred to as the automatic ice-vaning ship (“AIS”).

[0035] In yet another embodiment of the present invention, the AIS is a turret-moored vessel intended to keep station at a particular location in drifting pack ice. The AIS may utilize a computerized system to detect the effect of changing ice drift direction on the mooring line loads,

- 9 -

and to generate appropriate commands for the propulsion devices to simultaneously break up and clear ice, rotate the vessel about the turret and reduce mooring line loads. The AIS may further comprise azimuthing propulsion devices in matched pairs, configured to break up ice around the vessel, clear ice in specific areas around the vessel, rotate the vessel to align it (or vane) with a change in ice drift direction, and resist ice loads in order to minimize mooring line loads.

[0036] Referring now to the drawings, FIGs. 1A-1C illustrate exemplary environmental conditions and conventional vessel configurations. FIG. 1A shows an exemplary configuration of a vessel **100** with a ship-shaped hull **102**, which is moored via a turret **104** and a plurality of mooring lines **106** and **106a**, wherein the vessel **100** is connected to a sub-sea well (not shown) via a production riser, drilling riser, or similar connection member (not shown). The vessel **100** is floating in drifting ice **108** and creating a channel **110** as the ice is broken up by the bow portion of the hull **102**. In this configuration, the greatest amount of tension is in the mooring line **106a** extending from the bow portion of the hull **102**. In this configuration, the ice-breaking shape and strength of the bow provides for relatively easy break-up of the ice resulting in relatively low loads on the mooring lines **106** and **106a**.

[0037] FIG. 1B illustrates the vessel **100** wherein the ice drift **108'** has changed direction. In this scenario, the ice incursion occurs along the long portion of the ship-shaped hull **102**, which provides a significantly larger surface area to impact the vessel **100**. When the ice impacts the flat, wide profile of the side of the hull **102**, it will generate a substantially larger force on the hull **102**, the turret **104**, mooring lines **106** and other equipment than the condition in FIG. 1A. As such, it is advantageous to rotate the vessel **100**. FIG. 1C illustrates the vessel **100** as it is attempting to rotate **122** around the turret **104**. However, the rotation **122** is resisted by forces **120** and **124** against the hull **102** caused by ice present near the hull **102** in those areas.

[0038] FIGs. 2A-2E show side views and bottom views of illustrations of exemplary embodiments of the vessel of the present invention. The vessel **200** comprises a hull **202**, which may be substantially oblong or ship-shaped, matched pairs of propulsion devices **216a** and **216b** (which may be referred to collectively as **216**), a drilling derrick **203**, above-deck facilities **205**, a mooring-turret **212** connected to at least one mooring line **218** with anchors **220**, and a drilling riser **214** connecting the vessel **200** to a subsea well head **206**. The apparatus **200** is floating in a body of water **210** over a sea-bed **204**, wherein pack ice **208** is floating in the water **210**. A variation of this exemplary embodiment, as shown in FIG. 2B, may not have a drilling derrick,

- 10 -

but may instead include one or more production risers **215**, possibly supported by underwater buoys **222**, connecting the vessel **200** to a subsea wellhead **206**.

[0039] One preferred exemplary embodiment shown in FIGs. 2A-2B and 2D-2E comprises a symmetric hull **202** with a centrally located turret **212**. Such an arrangement allows  
5 minimizing the amount of rotation (e.g. limiting the travel distance of the end-points of the hull **202**) needed to achieve alignment with any given ice drift direction. However, the present invention does not require a symmetric hull **202** or a centrally located turret **212**. In alternative embodiments, as shown for example in FIG. 2C, the turret **212** may be located anywhere along the length of the hull **202** to optimize the arrangement for the particular intended application or  
10 environment of the vessel **200**.

[0040] One exemplary embodiment of the present invention comprises a vessel **200** having a ship-shape hull **202**. The hull **202** is preferably ice-strengthened to resist ice loads caused by the ice conditions in which the vessel **200** is intended to operate. Exemplary applications include a drillship, as illustrated in FIG. 2A, comprising a vessel **200** for drilling  
15 offshore oil and gas wells in pack ice. In addition to the mooring lines **218**, the turret **212** of such a vessel **200** may include a drilling riser **214**. Another exemplary application is a vessel **200** for floating production, storage, and offloading (FPSO) of hydrocarbons (e.g. crude oil), as illustrated in FIG. 2B, in which the vessel **200** is configured to produce hydrocarbons from a subsea formation, then process, store and transfer the hydrocarbons. In addition to the mooring  
20 lines **218**, the turret **212** of such a vessel **200** may include a number of risers **215**, including production, water injection, gas re-injection, and possibly also oil and gas export risers **215**. Yet another exemplary application is a vessel **200** for floating production of liquefied natural gas (LNG) (not specifically illustrated), sometimes called an FLNG in which the vessel **200** is configured to liquefy the gas and store the resulting LNG into tanks either within or on top of the  
25 hull **202**. In addition to the mooring lines **218**, the turret **212** of such a vessel **200** may include a number of risers **215**, including production and water injection, and possibly also cryogenic fluid export. Still another exemplary application is a floating storage and regasification unit for LNG (not specifically illustrated), sometimes called an FSRU. In addition to the mooring lines **218**, the turret **212** of such a vessel **200** may include one or more cryogenic fluid import risers **215**, as  
30 well as one or more gas export risers **215**. Other applications of the vessel **200** may include a gas-to-liquids floating production, storage and offloading vessel (GTL), a gas-to-chemicals floating production, storage and offloading vessel (GTC), and a sailing LNG carrier. The size of the vessel **200** may vary according to application.

- 11 -

[0041] One preferred embodiment includes the propulsion devices **216** in matched pairs as illustrated in FIGs. 2A-2E. The matched pairs of azimuthing propulsion devices **216** are preferably configured to perform at least three functions: 1) break-up and clear ice in specific areas around the vessel **200**, 2) rotate the vessel **200** to align it with a change in ice drift direction, and 3) resist ice loads in order to minimize mooring line **218** loads. The propulsion devices **216** may also be capable of keeping station in a body of water **210** containing ice pack **208** and maneuvering the vessel **200** in both open water and pack ice. Although many configurations of matched pair azimuthing propulsion devices will work, a preferred configuration includes one pair of propulsion devices **216** at each end of the vessel **200**. Another exemplary embodiment may comprise a ship-shaped hull **202** having a mooring-turret **212** located two-thirds to three-quarters of the length of the hull **202** away from the stern portion, and having three pairs of azimuthing propulsion devices **216**, one pair **216** under the stern portion, one pair **216** under the bow portion, and one pair **216** approximately between the first two pairs.

[0042] In one exemplary embodiment, as illustrated in FIG. 2C, the vessel **200** comprises three propulsion device pairs **216a**, **216b**, and **216c**. Additional propulsion devices (not shown) may also be included that may be solitary and may not azimuth. Additional propulsion devices may be added without departing from the spirit and scope of the present invention.

[0043] In another exemplary embodiment, as illustrated in FIGs. 2D-2E showing the bottom of the hull **202**, the propulsion devices **216** may azimuth about different physical axes. The physical axes may be aligned as shown in FIG. 2D or offset along the length and width of the hull **202** as shown in FIG. 2E. The propulsion devices **216** may be any appropriate propulsion device, such as a propeller, a thruster, a propulsor, or a waterjet, so long as it is capable of propelling the vessel **200** and breaking up and clearing away ice. The size and numerosity of the propulsion devices **216** will depend on the design of the vessel **200** for each application, but should be sufficient to position the vessel **200** in an ice field, break-up expected ice, wash ice away from the vessel **200**, and resist ice loads to minimize mooring line **218** loads, as needed. Note that the propulsion device pairs **216** of the present invention may have a significantly different shape and size from the illustrated figure in accordance with engineering specifications and other design considerations. For example, the propulsion devices **216** may be any type of propeller (e.g. a controllable pitch, fixed pitch, and/or counter-thrusting propeller), thruster, propulsor, or water jet and may include features such as pitch control, tunnels for quieter operation, under water replacement, and retractability. Two exemplary propulsion devices are the AZIPOD® podded propulsor made by ABB and the MERMAID™ podded propulsor made

- 12 -

by KAMEWA™. Each of these systems comprises powerful (5-25 megawatts per propulsor) propulsors and would include two distinct pods on separate axes, but can be configured to operate as a matching pair in accordance with some embodiments of the present invention.

[0044] FIGs. 3A-3B illustrate an exemplary embodiment of methods and an apparatus of the present invention as shown in FIGs. 2A-2E including exemplary environmental conditions and responses. Accordingly, FIGs. 3A-3B may be best understood by concurrently viewing FIGs. 2A-2E. FIG. 3A shows an oblong vessel **200** having a centrally mounted turret-mooring system **212** with mooring lines **218** and two pairs of propulsion devices **216a** and **216b**. The vessel **200** is located in an ice field **300** with an ice drift having a first direction **302** and a second direction **304**. Also shown are the net moment **306** about the turret **212**, propulsion device forces **308a-308d**, and the net force opposing the ice drift **310**. FIG. 3B shows the vessel **200** in substantial alignment with the ice drift **304** after accomplishing an ice-vaning operation utilizing certain aspects of the present invention.

[0045] Referring to FIG. 3A, in one preferred embodiment of a method for ice-vaning, one of the propulsion devices in each matched pair **216a** or **216b** produces higher force **308a** and **308c** than the other propulsion devices **308b** and **308d**, respectively. As such, the propulsion device pairs **216a** and **216b** produce a net force resulting in a net moment **306** to rotate the vessel **200** about its turret **212** to align the vessel **200** with the changing ice drift direction **304**. During the rotation of the vessel **200**, the wash of the lower force propulsion devices **308b** and **308d** break up and clear the ice ahead of the advancing hull **202** of the vessel **200**. Additionally, the combined thrust of all propulsion devices **216** produces a net force **310** in a direction opposing the ice drift direction **304**, which is intended to reduce the loads resulting from the ice **300** on the mooring lines **218**. In this exemplary illustration, the net force **310** is obtained by the difference between the sum of the forces **308b** and **308c** and the sum of the forces **308a** and **308d** being a positive number. FIG. 3B illustrates station keeping of the vessel **200** after application of the disclosed exemplary maneuvering or ice-vaning method. The propulsion device pairs **216a** and **216b** are operating to reduce or negate the forces on the mooring lines **218** caused by the ice drift **304**, operating to break up ice as it approaches the bow portion of the vessel **200** and wash the ice away as it drifts by the stern portion of the vessel **200**.

[0046] Preferably, the number and capacity of the propulsion device pairs **216** is determined on the basis of the capability of the mooring system **212**, **218**, and of the ice conditions **300** in which the vessel **200** is operating. A sufficient number of propulsion device

- 13 -

pairs or sets 216 is included to have the desired redundancy, (e.g. to retain sufficient capability to maintain mooring loads and offsets within allowables following any single-point failure). The power generation and distribution system (not shown) of the present invention should have similar redundancy, (e.g. should be able to provide sufficient power to maintain mooring loads and offsets within allowables following any single point failure). In such a preferred exemplary embodiment, the vessel 200 may not require icebreaker support, thus eliminating the issues associated with icebreaker operations around the vessel 200, including collision hazards.

[0047] FIG. 4 illustrates an exemplary control loop for a control system 400 for use in combination with the propulsion devices 216 of the vessel 200 of FIGs. 2A-2E and 3A-3B. Accordingly, FIG. 4 may be best understood by concurrently viewing FIGs. 2A-2E and 3A-3B. FIG. 4 shows an exemplary control system 400 comprising an input 402, a controller 404, commands 406, the propulsion devices 216, output or response 408, and a feedback loop 410. The system 400 may further include sensors to measure output or response 408, and a user interface (not shown) to provide input 402 or control 404. The controller 404 may be manually operated or automatic and may include computer readable data or code and may be embodied in a software program. The connections between the sensors, the user interface, the controller 404 and the propulsion devices 216 may be wired or wireless. Note that the control system 400 may be fully automated or may include a combination of automated and manual controls.

[0048] In one preferred embodiment, the control system 400 is an automatic control system and includes a feedback loop 410 to provide inputs 402 as external conditions change, thereby allowing a user to enter an initial desired result 408 and allow the system 400 to make automatic adjustments or commands 406 until the initial desired result 408 is accomplished. This is preferable to a manual system requiring a user to monitor the system 400 for errors and make adjustments for errors. The system 400 may be designed as a standard feedback control loop, a pre-programmed control, a feed-forward control, and/or a prediction followed by control. See LEIGH, J.R., CONTROL THEORY, 2d Ed., The Institution of Electrical Engineers (2004).

[0049] In one preferred embodiment, the system 400 is configured to monitor the loads on each mooring line 218 to identify the ice drift direction 302, 304. Each mooring line 218 may be equipped with a device to measure the load in it (e.g. a load cell). The system 400 may further identify the ice drift direction 302, 304 using a model of the mooring system 212, 218 and the vessel 200. Qualitatively, the ice drift direction 302, 304 may be approximated by the direction

- 14 -

of the most loaded mooring lines **218**. By comparing the ice drift direction **302** or **304** to the heading of the vessel **200**, the system **400** may determine a preferred direction of rotation of the vessel **200**, to align with the changing ice drift direction **302** or **304**. The system **400** may then issue commands **406** to the thrusters **216** to produce a net moment **306** about the turret **212** to accomplish the rotation. The system **400** may also monitor the rate of rotation and heading of the vessel **200** via a sensing device. If the rate is slower than preferred, the system **400** may issue a command **406** to the propulsion devices **216** whose wash is used to break up and clear ice. The system **400** may also commensurately command **406** the other propulsion devices **216** to maintain the net moment **306** about the turret **212**. Also through monitoring of the mooring line **218** loads, the system **400** may determine how close these loads are to the allowable loads of the mooring lines **218** (defined as the breaking strength divided by a safety factor). If the loads are close to the allowable loads, the system **400** may command **406** the propulsion devices **216** to produce a net force **310** opposing the ice drift direction **302** or **304** to help reduce mooring line **218** loads. Other inputs **402** to the control system **400** may include temperature, precipitation, ice thickness, water salinity, horizontal orientation of the vessel **200**, and any other input useful for ice-  
vaning or station keeping the vessel **200**. The outputs **408** may include propulsion device **216** wash, net moment **306** about turret **212**, net force **310** opposing ice drift **302** or **304**, propulsion device **216** speed, vessel speed, load on a mooring line **218**, and any combination thereof.

[0050] In one exemplary embodiment, the system **400** may include an input parameter **402** such as, for example, feed-forward of wind loads (measured using anemometers or other wind sensors), the controller **404** may calculate the wind loads on the vessel **200** using a mathematical model, then command **406** the propulsion devices **216** to produce an output **408** such as a force and moment to counteract the wind force and moment. The sensors and other feedback devices may then provide input **402** to the system **400** after the force **408** is applied so the system **400** may make adjustments for the changing conditions and any possible errors encountered.

[0051] One exemplary embodiment includes mooring lines **218** (and other equipment connecting the vessel **200** to the seabed **204**), which are permanently attached to the vessel **200** via the turret **212**. However, the invention also includes an alternate embodiment comprising a vessel **200** with a turret **212** capable of disconnecting, which allows disconnection of the mooring lines **218** and other equipment (e.g. risers **214** or **215**), either for operational purposes or for minimizing the risk of damage to the mooring lines **218** and other equipment. In such embodiments, the automatic control system **400** includes modes for controlling the propulsion

- 15 -

devices **216** for sailing the vessel **200** through pack ice and/or open water, so that the movement of the vessel **200** remains under control, minimizing the risk of collision and/or grounding following disconnection.

5 [0052] Although the vessel **200** may operate in any sufficiently large body of water, it is preferable to operate the vessel **200** in bodies of water having drifting pack ice such as, for example, the Beaufort Sea, the Chukchi Sea, the Gulf of Finland, the Sea of Okhotsk, the Barents Sea, the Kara Sea, and other Russian Arctic seas.

10 [0053] While the present invention may be susceptible to various modifications and alternative forms, the exemplary embodiments discussed above have been shown only by way of example. However, it should again be understood that the invention is not intended to be limited to the particular embodiments disclosed herein. Indeed, the present invention includes all alternatives, modifications, and equivalents falling within the true spirit and scope of the invention as defined by the following appended claims.

**CLAIMS:**

1. A marine vessel, comprising:
  - a hull, wherein the hull is operatively connected to a mooring turret whereby the hull is rotatable about the mooring turret;
  - at least two matched pairs of azimuthing propulsion devices operatively engaging the hull, wherein the azimuthing propulsion devices in each matched pair substantially oppose each other and are independently operable; and
  - a control system operatively connected to the at least two matched pairs of azimuthing propulsion devices whereby the marine vessel is controlled via the propulsion devices,
  - wherein the control system via the propulsion devices performs at least one of ice-  
vaning the vessel and keeping the vessel at a station in a body of water containing pack ice,
  - wherein the control system via the at least two matched pairs of azimuthing propulsion devices (a) generates a net moment to rotate the vessel about the mooring turret to align the vessel with an instantaneous ice drift direction, (b) concurrently clears the ice ahead of the vessel hull as it rotates, and (c) generates a net force opposing the ice drift.
2. The vessel of claim 1, wherein the control system comprises a controller.
3. The vessel of claim 1 or 2, wherein the control system includes at least one input parameter.
4. The vessel of claim 3, wherein the input parameter is one of at least one mooring line load, vessel heading, vessel rotation, wind speed, and any combination thereof.
5. The vessel of any one of claims 1 to 4, wherein the control system comprises a feedback loop.
6. The vessel of any one of claims 1 to 5, wherein the matched pairs of azimuthing propulsion devices are at least one of propellers, water jets, and thrusters.

7. The vessel of any one of claims 1 to 6, further comprising three matched pairs of azimuthing propulsion devices.
8. The vessel of any one of claims 1 to 7, further comprising at least one additional propulsion device.
9. The vessel of any one of claims 1 to 8, wherein both azimuthing propulsion devices in each of the at least two matched pairs are configured to azimuth about a single axis.
10. The vessel of any one of claims 1 to 8, wherein the azimuthing propulsion devices in each of the at least two matched pairs are configured to azimuth each about a different axis.
11. The vessel of claim 10, wherein the axes are offset from each other along a length and width of the hull.
12. The vessel of any one of claims 1 to 11, further comprising a plurality of mooring lines operatively connected to the mooring turret at one end and anchored into a seabed at the other end.
13. The vessel of any one of claims 1 to 12, wherein the vessel is adapted and configured to enable the drilling of subsea wells.
14. The vessel of any one of claims 1 to 13, wherein the vessel is configured to produce hydrocarbons from a subsea formation.
15. The vessel of any one of claims 1 to 14, wherein the vessel is configured to do at least one of process, transfer, and store hydrocarbons.
16. The vessel of any one of claims 1 to 15, further comprising liquefied natural gas (LNG) tanks, wherein the vessel is configured to receive LNG from LNG carriers into the

tanks, transform at least a portion of the LNG to gaseous form and transfer the gas through a subsea pipeline to an onshore location.

17. The vessel of any one of claims 1 to 16, wherein the mooring turret is disconnectable.

18. The vessel of any one of claims 1 to 17, wherein the hull comprises a substantially oblong shape comprising a bow portion and a stern portion.

19. The vessel of claim 18, wherein at least one matched pair of azimuthing propulsion devices is positioned approximately under the bow portion of the hull and at least one matched pair of azimuthing propulsion devices is positioned approximately under the stern portion of the hull.

20. The vessel of claim 19 or 20, wherein the mooring turret is positioned approximately midway between the bow portion and the stern portion of the hull.

21. The vessel of claim 19 or 20, wherein the mooring turret is positioned at any portion of the hull between the bow portion and the stern portion.

22. The vessel of any one of claims 1 to 21, wherein the vessel is one of a drillship, a floating production, storage, and offloading vessel (FPSO), a floating production of liquefied natural gas vessel (FLNG), a floating storage and regasification unit for LNG (FSRU), a gas-to-liquids floating production, storage and offloading vessel (GTL), a gas-to-chemicals floating production, storage and offloading vessel (GTC), and a sailing LNG carrier.

23. A control system for a marine vessel, comprising:

at least two matched pairs of azimuthing propulsion devices operatively attached to the marine vessel having a hull, wherein the hull is operatively connected to a mooring turret whereby the hull is rotatable about the mooring turret, wherein the azimuthing propulsion devices in each matched pair substantially oppose each other and are independently operable;

a plurality of sensors operatively connected to the marine vessel configured to provide at least one input parameter; and

a plurality of azimuthing propulsion device control commands, wherein the control system controls the plurality of azimuthing propulsion devices utilizing the azimuthing propulsion device control commands and the at least one input parameter,

wherein the control system via the propulsion devices performs at least one of ice-vaning the vessel and keeping the vessel at a station in a body of water containing pack ice,

wherein the control system via the at least two matched pairs of azimuthing propulsion devices (a) generates a net moment to rotate the vessel about the mooring turret to align the vessel with an instantaneous ice drift direction, (b) concurrently clears the ice ahead of the vessel hull as it rotates, and (c) generates a net force opposing the ice drift.

24. The control system of claim 23, further comprising a feedback loop.

25. The control system of claim 23 or 24, wherein the at least one input parameter is selected from one of mooring line loads, vessel heading, vessel rate of rotation, wind speed, wind direction, and any combination thereof.

26. The control system of any one of claims 23 to 25, wherein the plurality of azimuthing propulsion devices control commands are selected from the group consisting of azimuth orientation, speed, thrust, vertical orientation, and any combination thereof.

27. The control system of any one of claims 23 to 26, further comprising a hull, wherein the hull is operatively connected to a mooring turret.

28. The control system of claim 27, comprising a plurality of mooring lines operatively connected to the mooring turret.

29. The control system of claim 28, wherein the hull is configured to withstand dynamic loads caused by ice impact

30. The control system of any one of claims 23 to 29, wherein the vessel is configured to produce hydrocarbons from a subsea formation.
31. The control system of any one of claims 23 to 30, wherein the vessel is configured to enable the drilling of subsea wells.
32. The control system of any one of claims 23 to 31, wherein the vessel further comprises liquefied natural gas (LNG) tanks, wherein the vessel is configured to receive LNG from LNG carriers into the tanks, transform at least a portion of the LNG to gaseous form and transfer the gas through a subsea pipeline to an onshore location.
33. A method of producing hydrocarbons, comprising:  
positioning a vessel in a body of water having pack ice, wherein the vessel comprises:  
a hull operatively connected to a mooring turret whereby the hull is rotatable about the mooring turret;  
at least two matched pairs of azimuthing propulsion devices operatively engaging the hull, wherein the azimuthing propulsion devices in each matched pair substantially oppose each other and are independently operable; and  
a control system operatively connected to the at least two matched pairs of azimuthing propulsion devices whereby the vessel is controlled via the propulsion devices;  
operatively connecting the vessel to a subsea wellhead;  
operating the vessel utilizing the at least two matched pairs of azimuthing propulsion devices to ice-vane the vessel and keep the vessel at a station in a body of water containing pack ice, wherein the control system via the at least two matched pairs of azimuthing propulsion devices (a) generates a net moment to rotate the vessel about the mooring turret to align the vessel with an instantaneous ice drift direction, (b) concurrently clears the ice ahead of the vessel hull as it rotates, and (c) generates a net force opposing the ice drift;  
producing hydrocarbons from the subsea wellhead; and

receiving the hydrocarbons into the vessel.

34. The method of claim 33, further comprising storing the hydrocarbons in the vessel.
35. The method of claim 33 or 34, further comprising transferring the hydrocarbons to a tanker.
36. The method of any one of claims 33 to 35, further comprising delivering the hydrocarbons to an onshore facility.
37. The method of any one of claims 33 to 36, wherein the vessel is within twenty miles of the subsea wellhead.
38. The method of any one of claims 33 to 37, wherein operating the vessel further comprises a control system, wherein the control system is configured to reposition the vessel utilizing the at least two pairs of azimuthing propulsion devices.
39. The method of claim 38, wherein the control system is configured to perform at least one of ice-venting the vessel and keeping the vessel at a station in a body of water containing pack ice.
40. The method of claim 39, the control system is an automatic control system and further comprises a feedback loop.
41. A method of drilling a subsea well, comprising:  
positioning a vessel in a body of water having pack ice, wherein the vessel comprises:  
a hull operatively connected to a mooring turret whereby the hull is  
rotatable about the mooring turret;

at least two matched pairs of azimuthing propulsion devices operatively engaging the hull, wherein the azimuthing propulsion devices in each matched pair substantially oppose each other and are independently operable; and

a control system operatively connected to the at least two matched pairs of azimuthing propulsion devices whereby the marine vessel is controlled via the propulsion devices, wherein the control system via the propulsion devices performs at least one of ice-venting the vessel and keeping the vessel at a station in a body of water containing pack ice, wherein the control system via the at least two matched pairs of azimuthing propulsion devices (a) generates a net moment to rotate the vessel about the mooring turret to align the vessel with an instantaneous ice drift direction, (b) concurrently clears the ice ahead of the vessel hull as it rotates, and (c) generates a net force opposing the ice drift;

operatively connecting the vessel to a subsea wellhead, wherein the subsea wellhead enables the drilling of the subsea well;

drilling the subsea well; and

operating the vessel utilizing the at least two matched pairs of azimuthing propulsion devices.

42. The method of claim 41, further comprising a control system, wherein the control system is configured to reposition the vessel utilizing the at least two pairs of azimuthing propulsion devices.

43. The method of claim 42, wherein the control system further comprises a feedback loop.

1/8

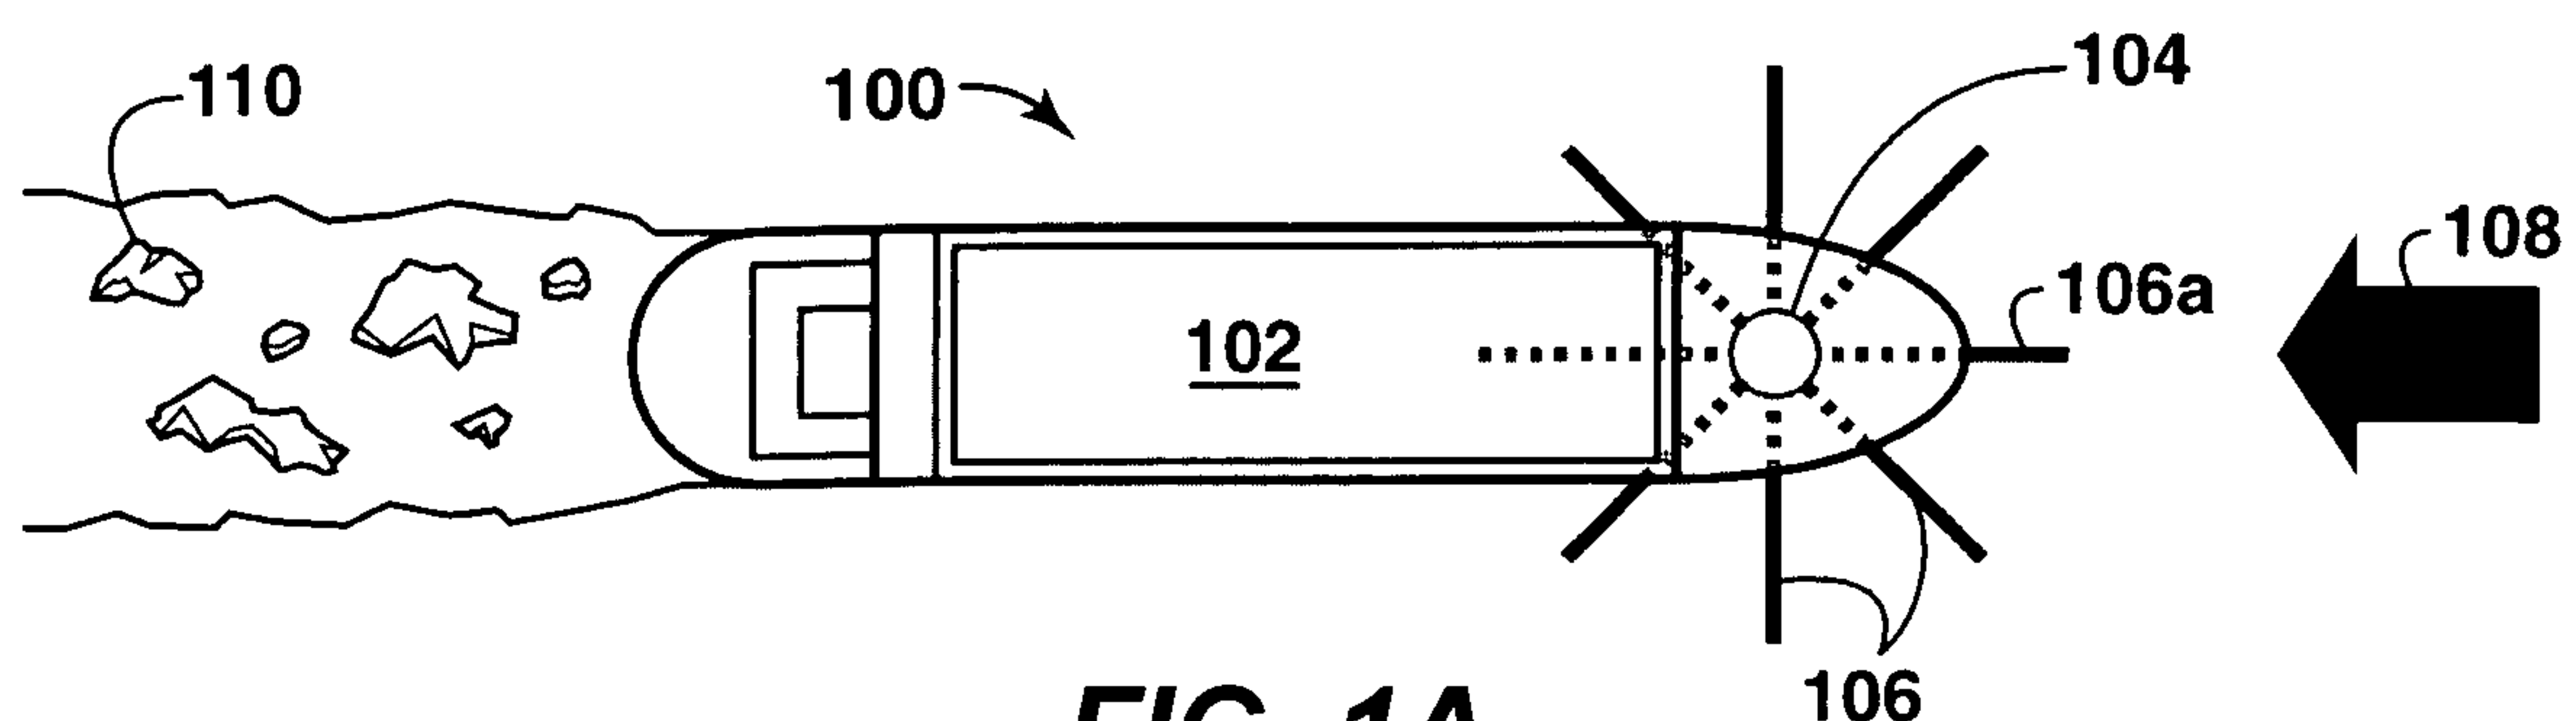


**FIG. 1A**  
(Prior Art)

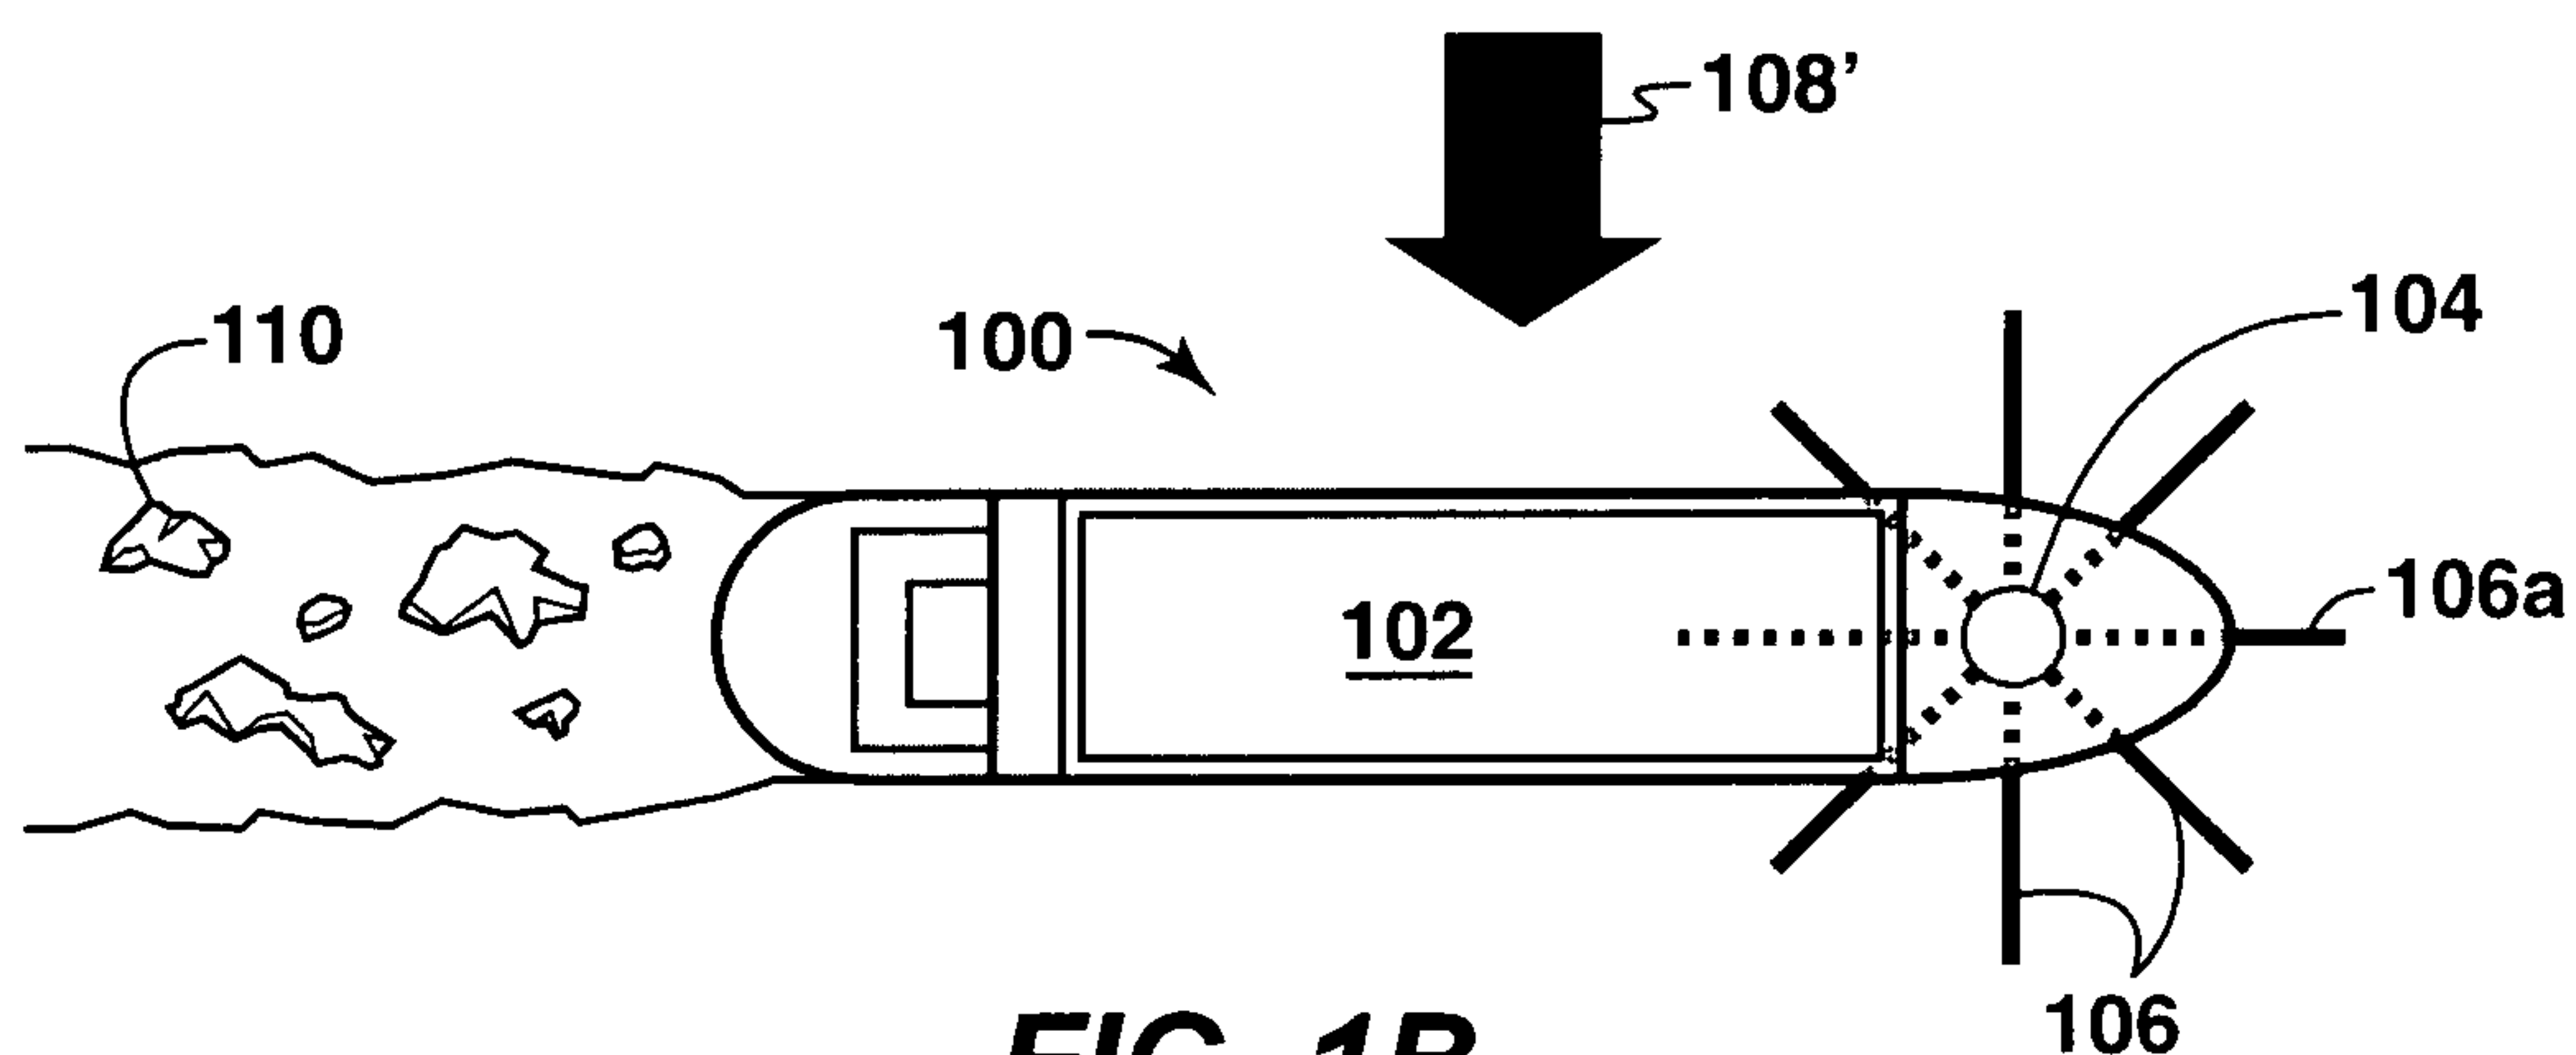


**FIG. 1B**  
(Prior Art)

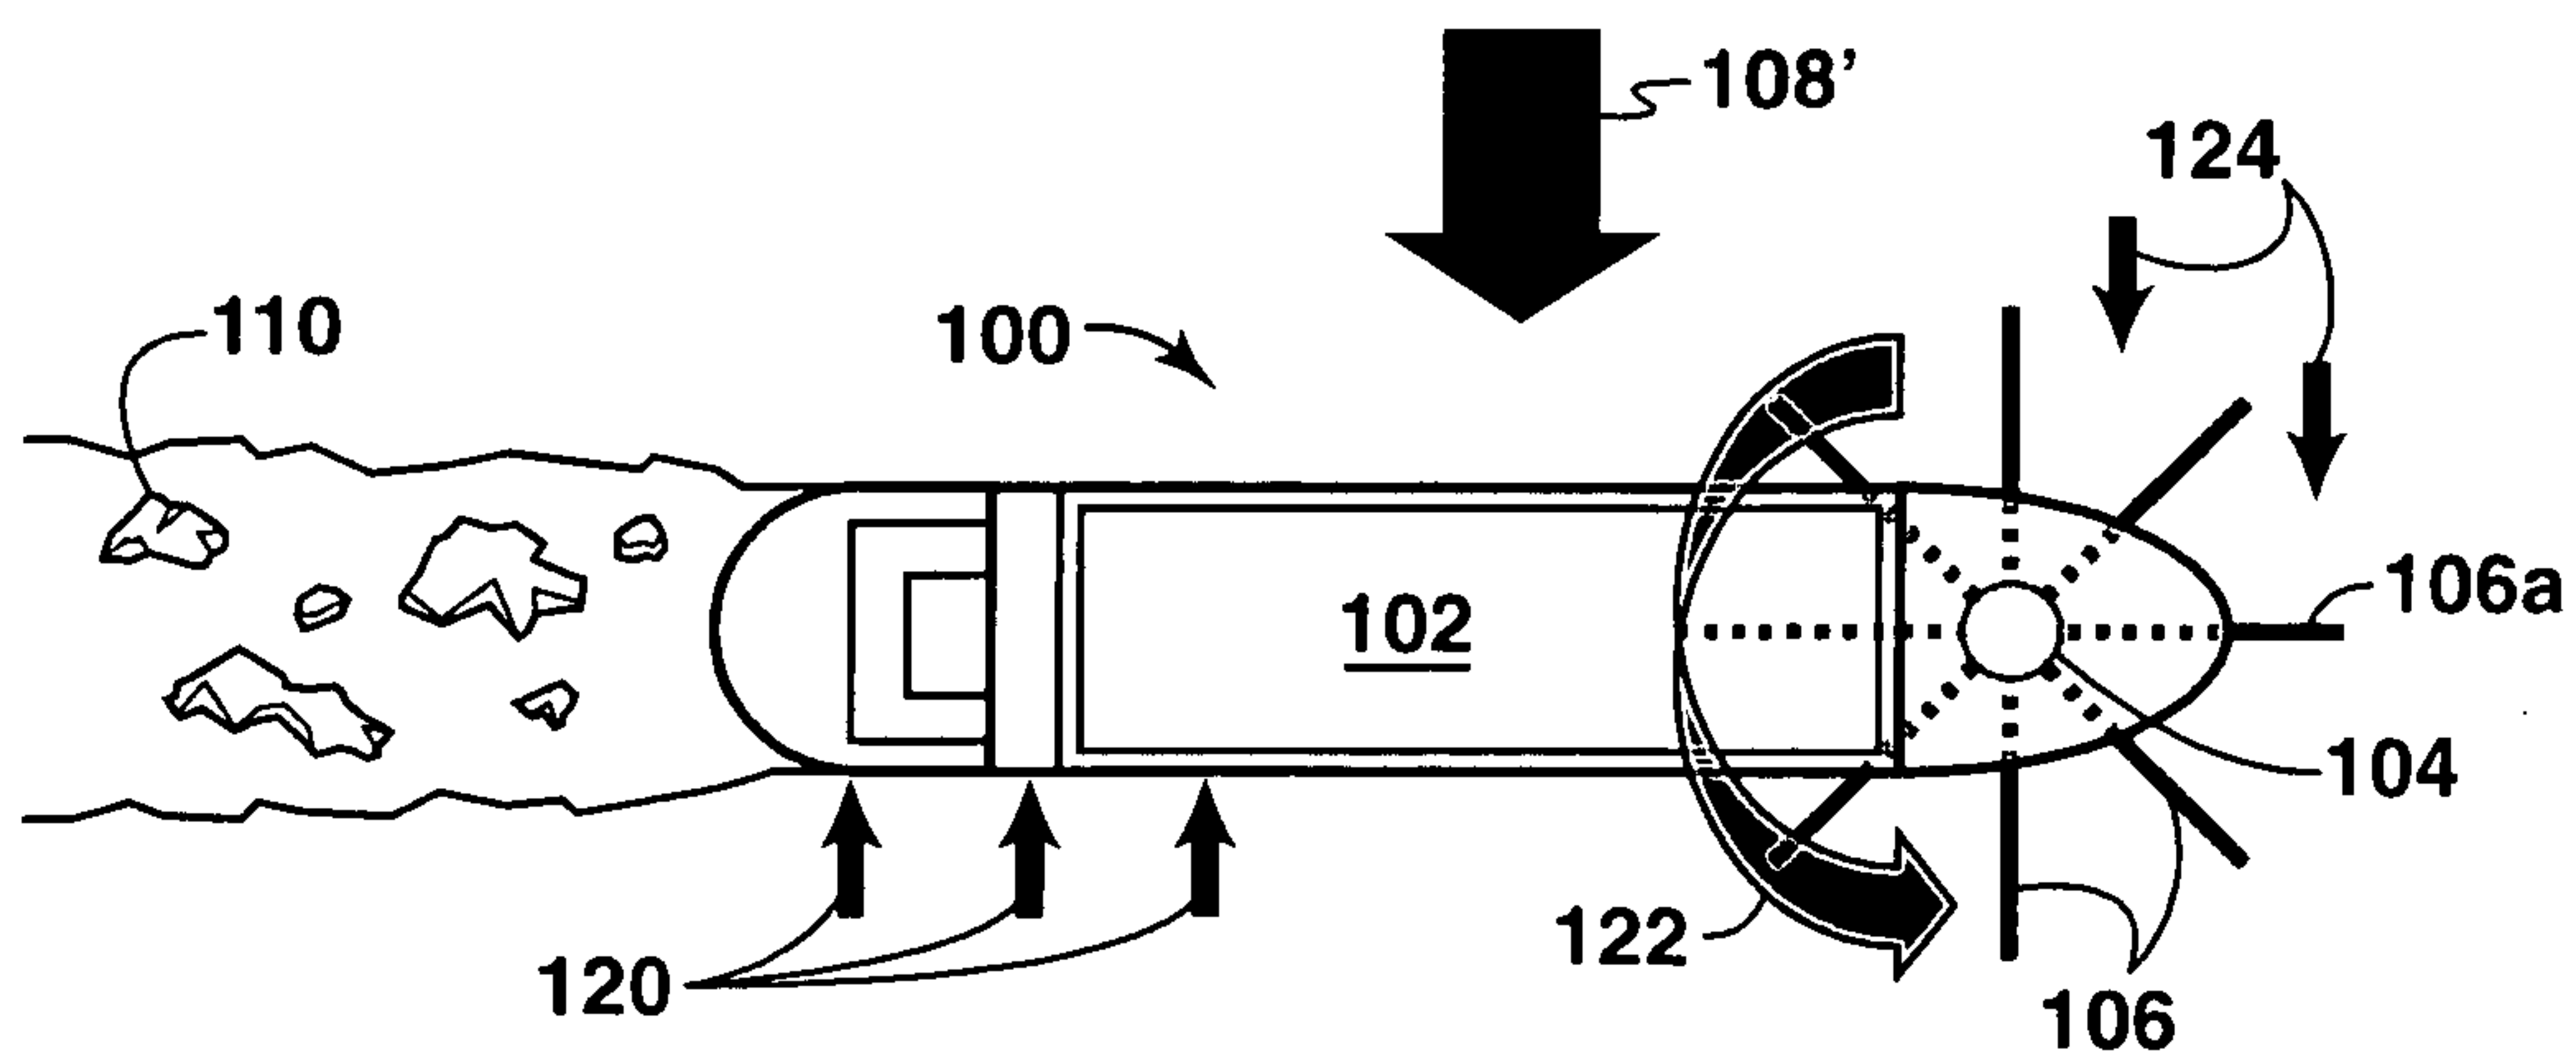
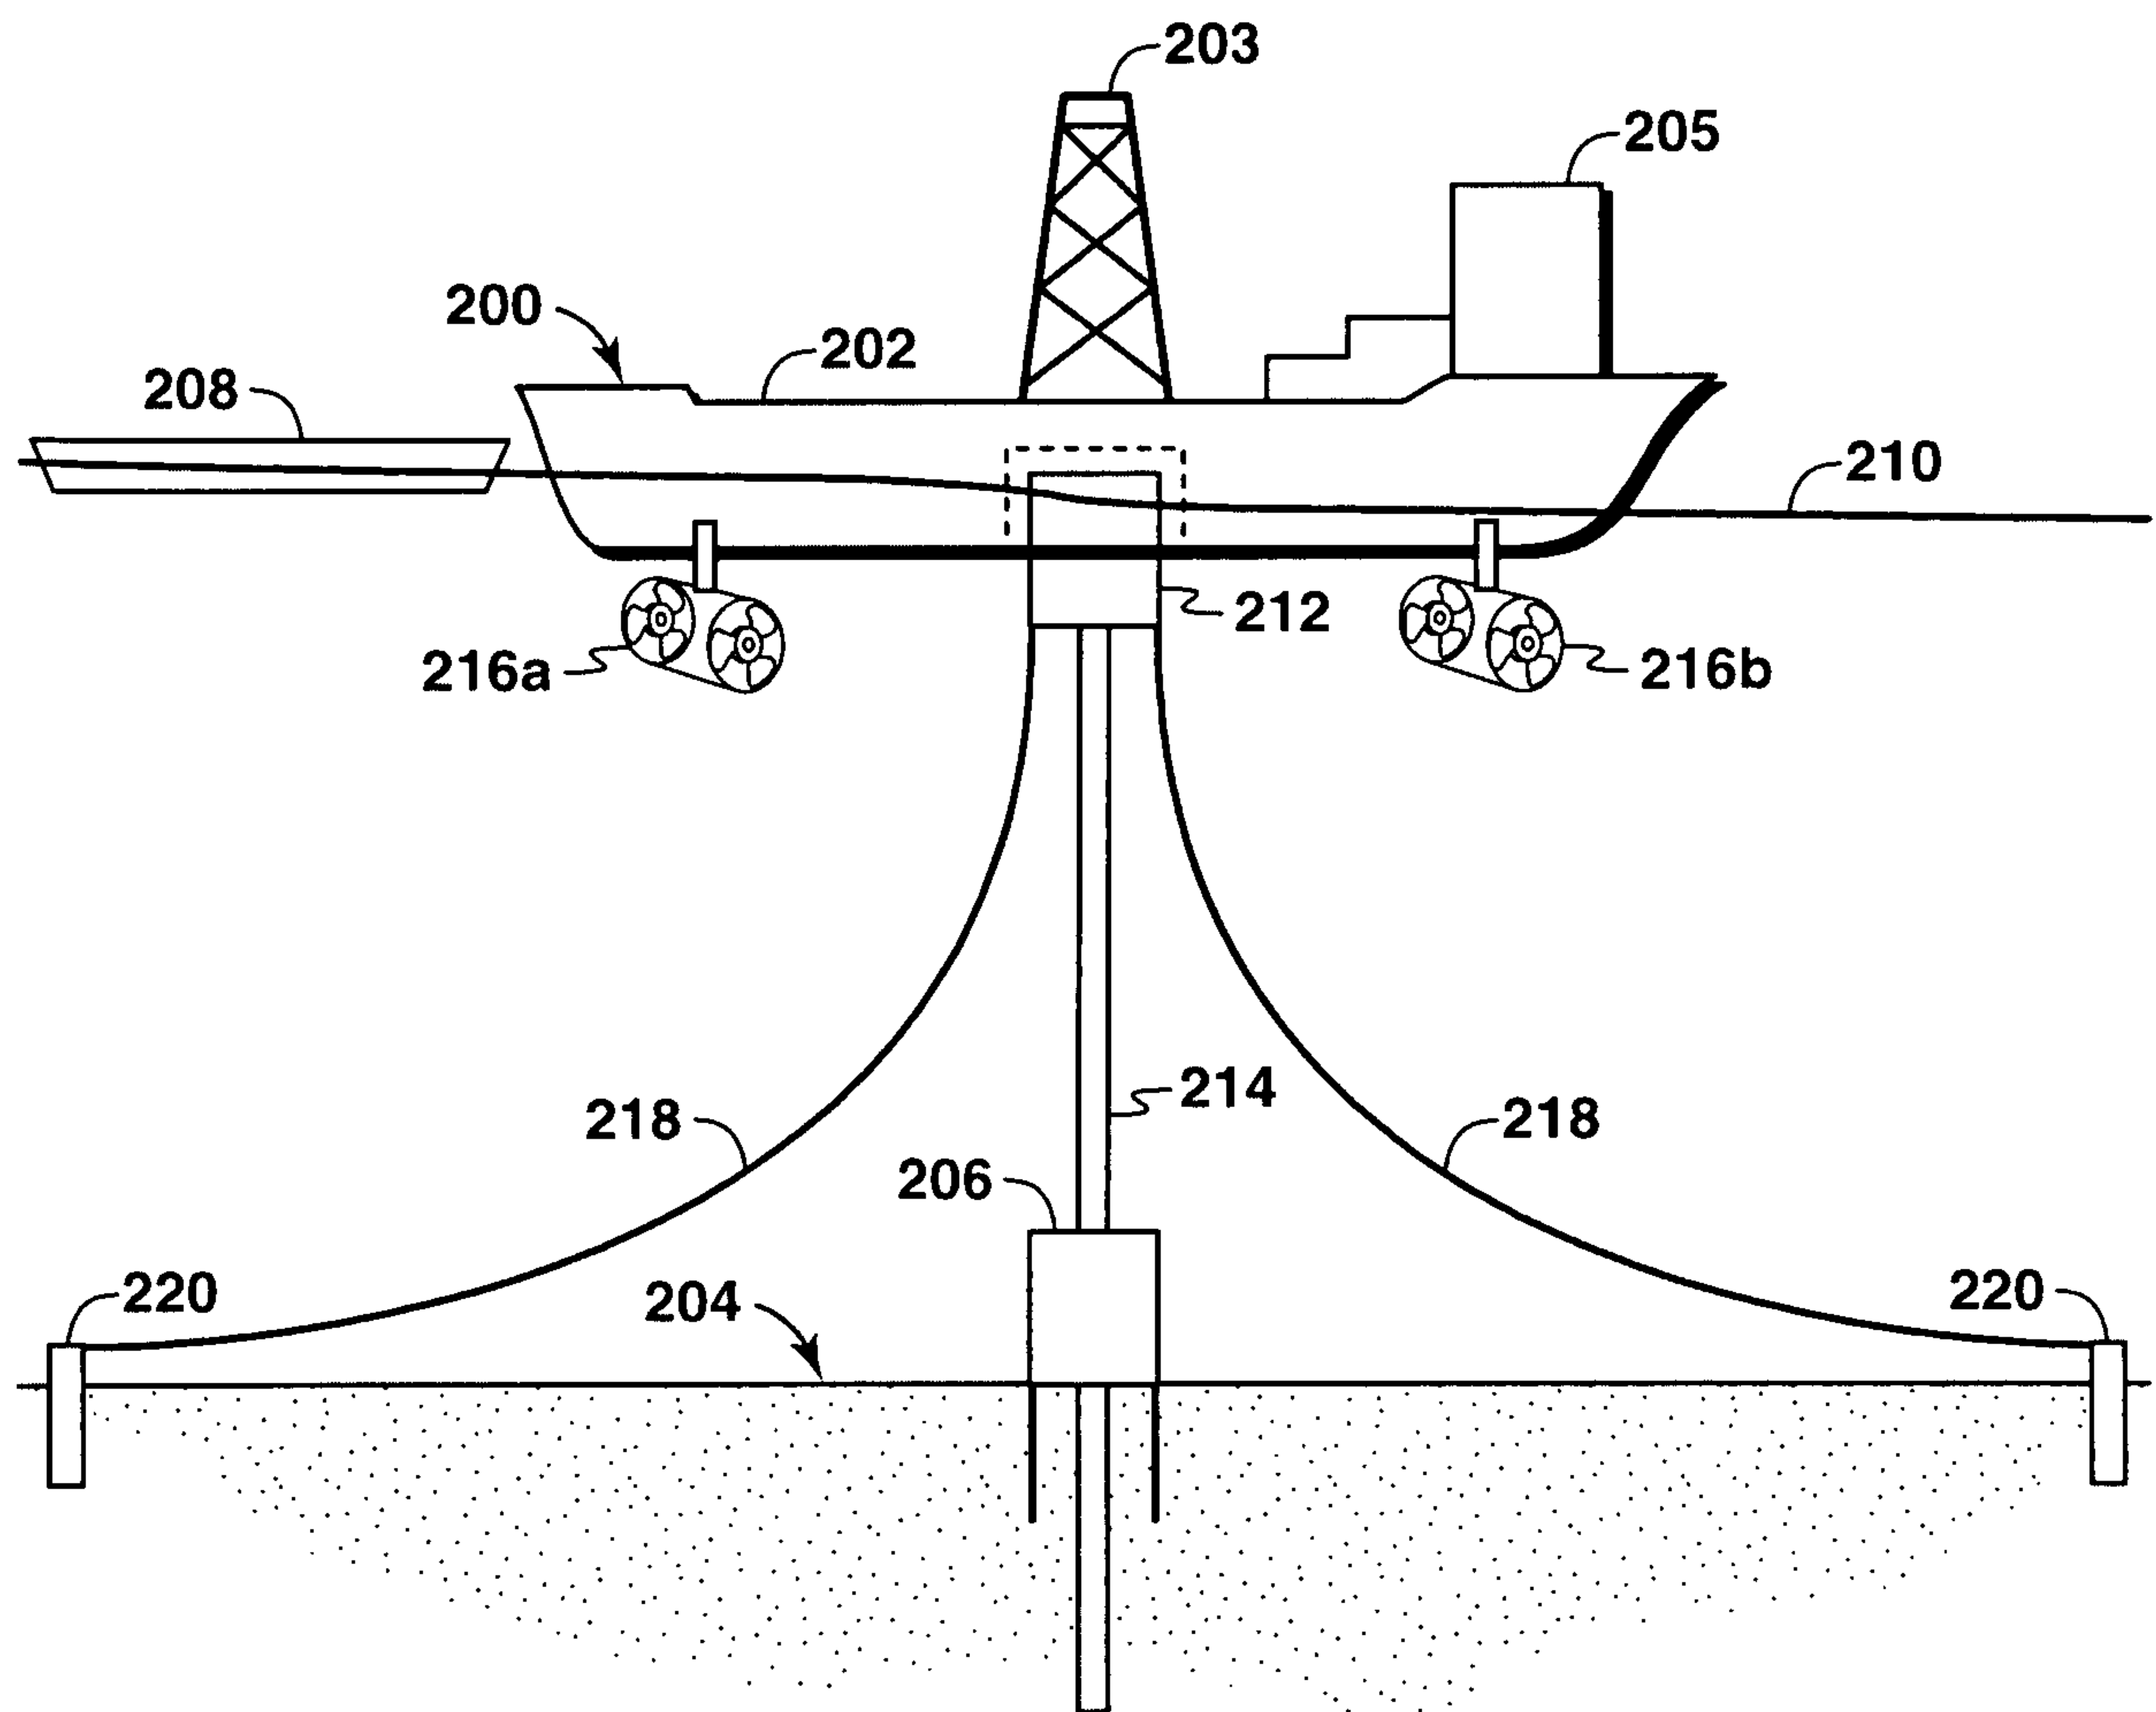
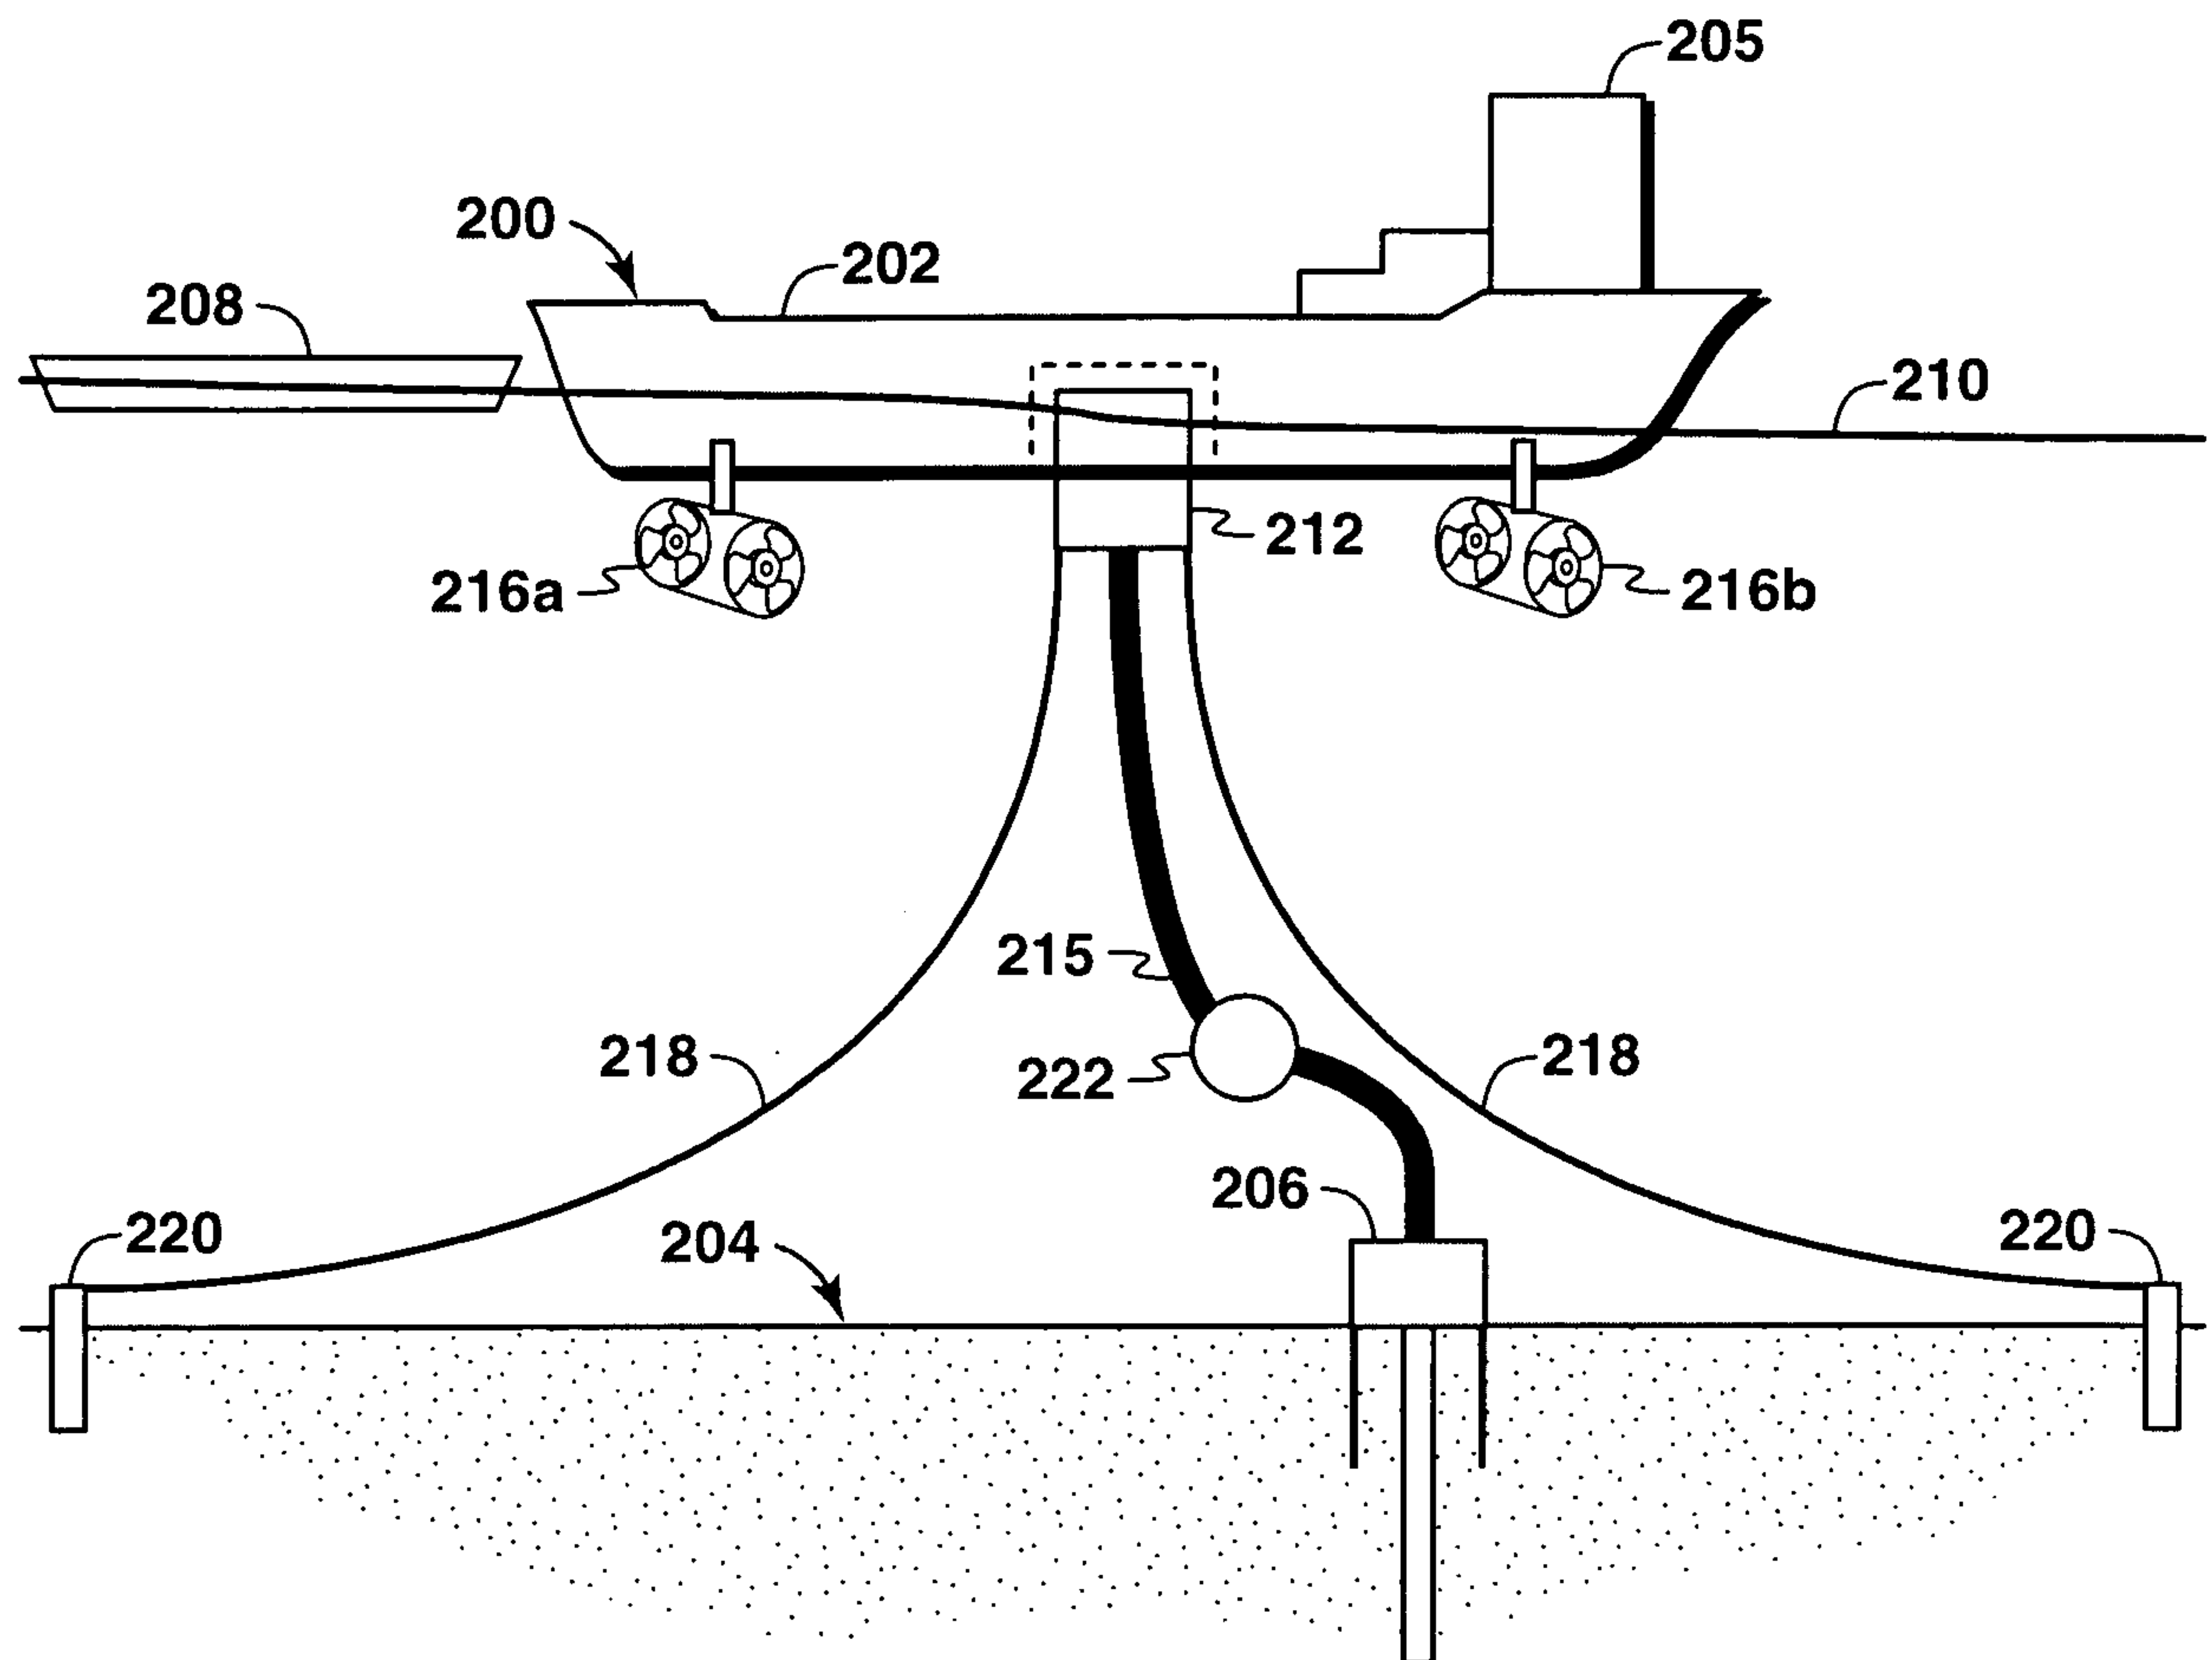
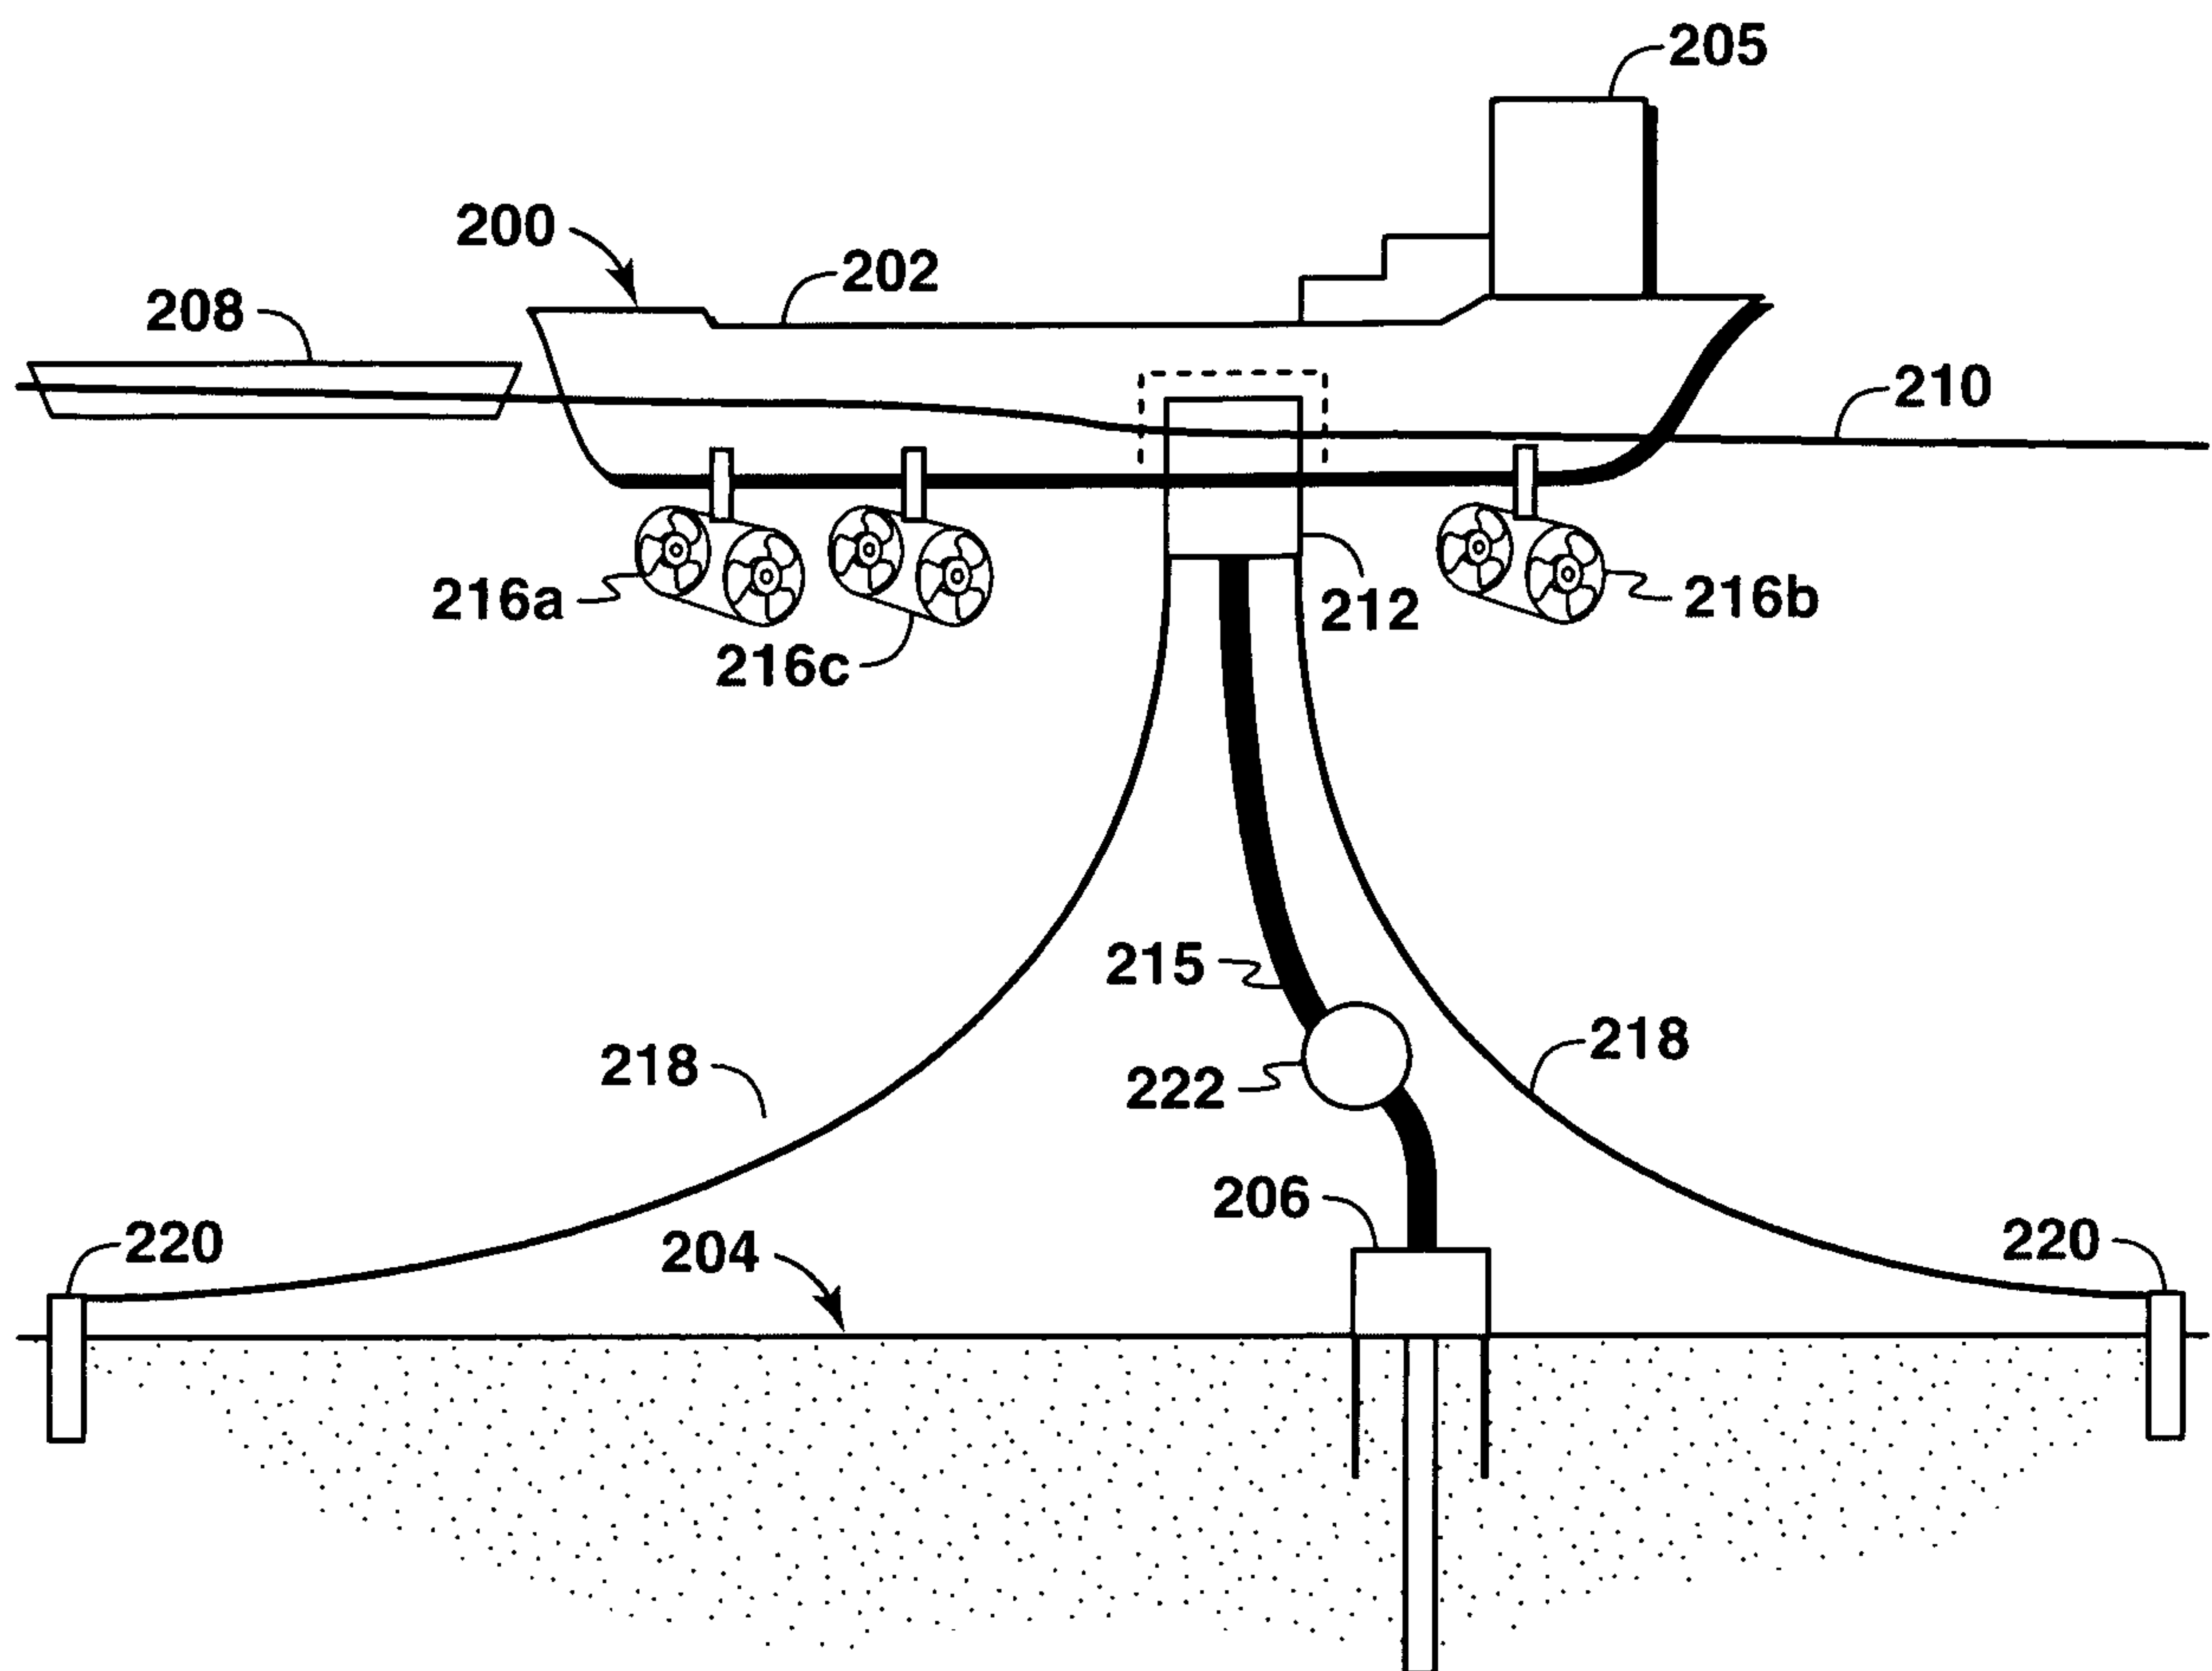
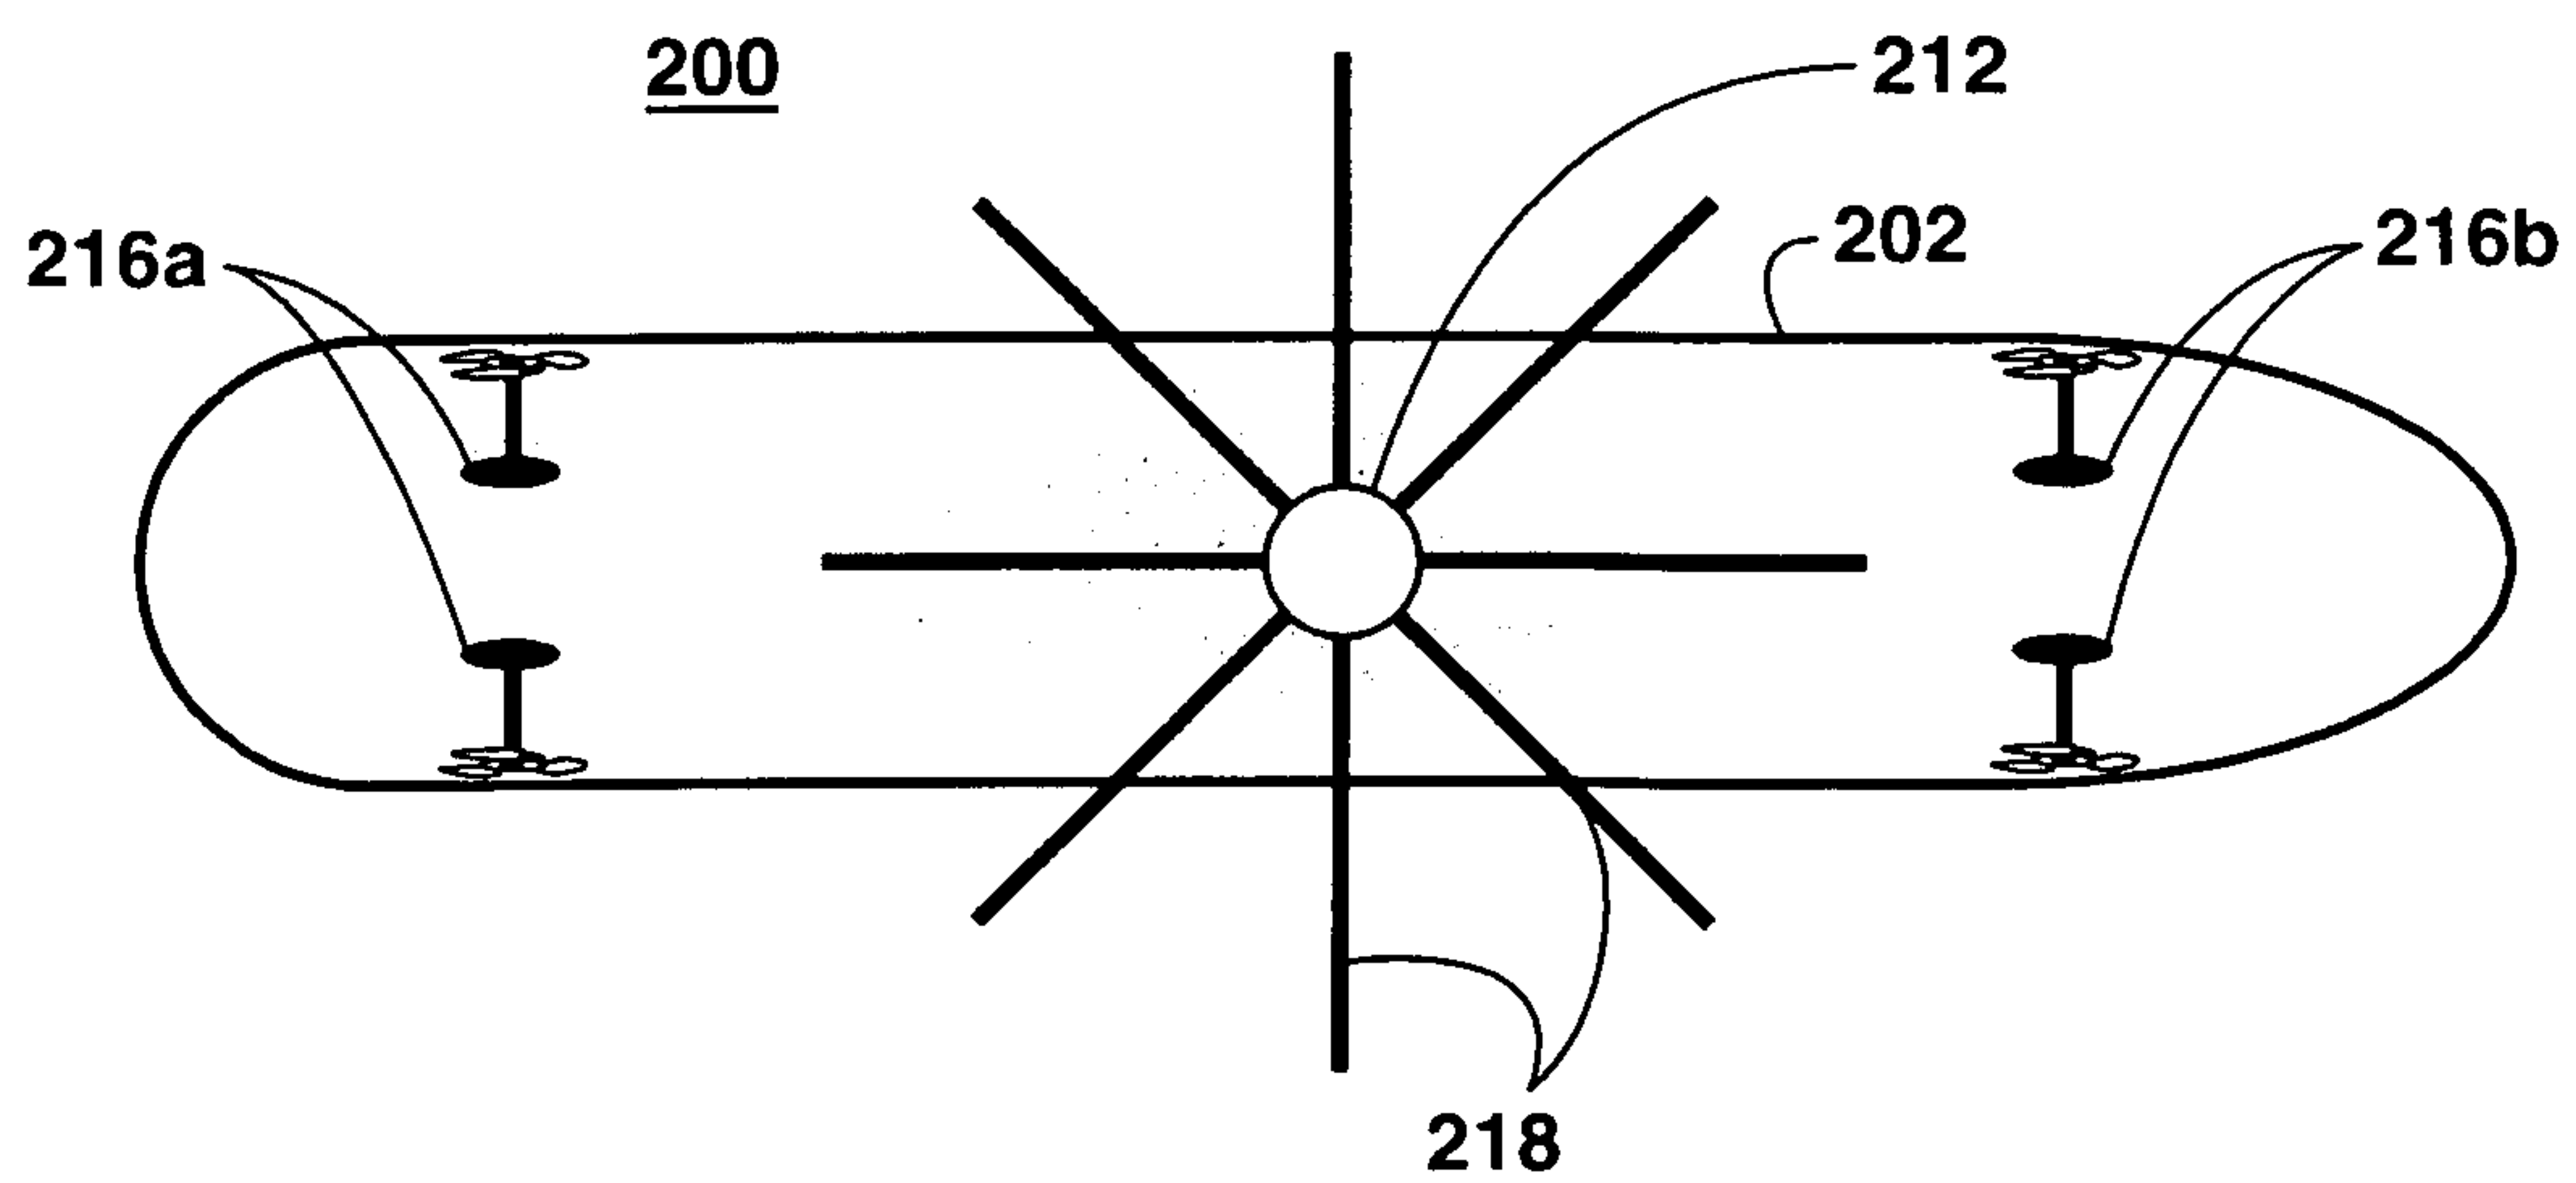
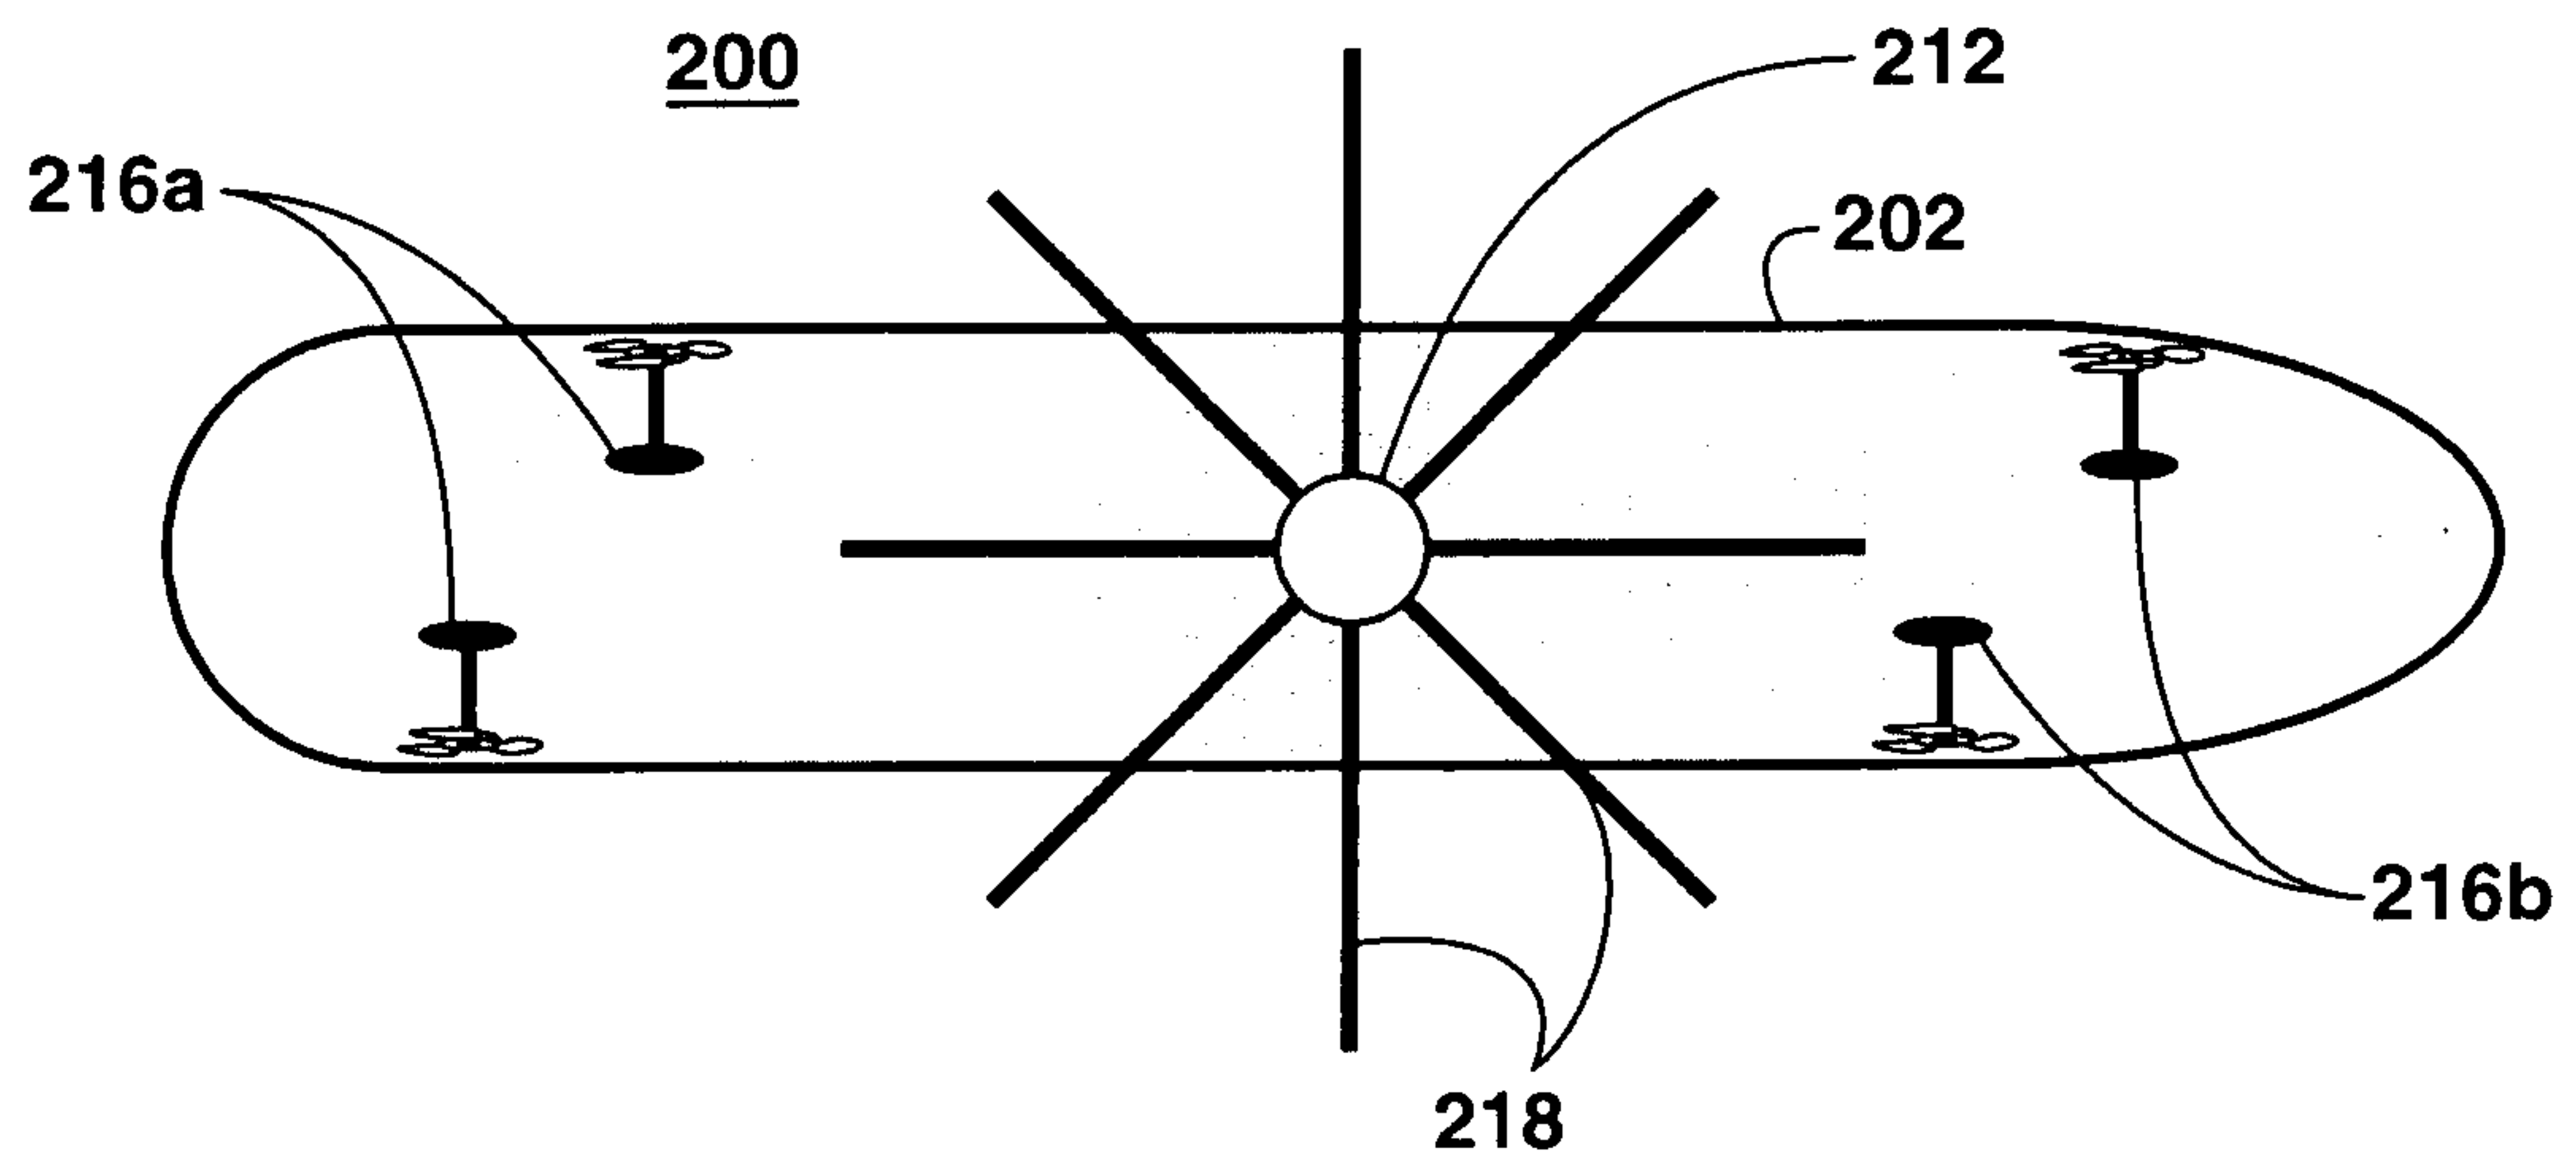


**FIG. 1C**  
(Prior Art)


**2/8****FIG. 2A**

**3/8****FIG. 2B**


**4/8****FIG. 2C****FIG. 2D**


**5/8****FIG. 2E**

6/8

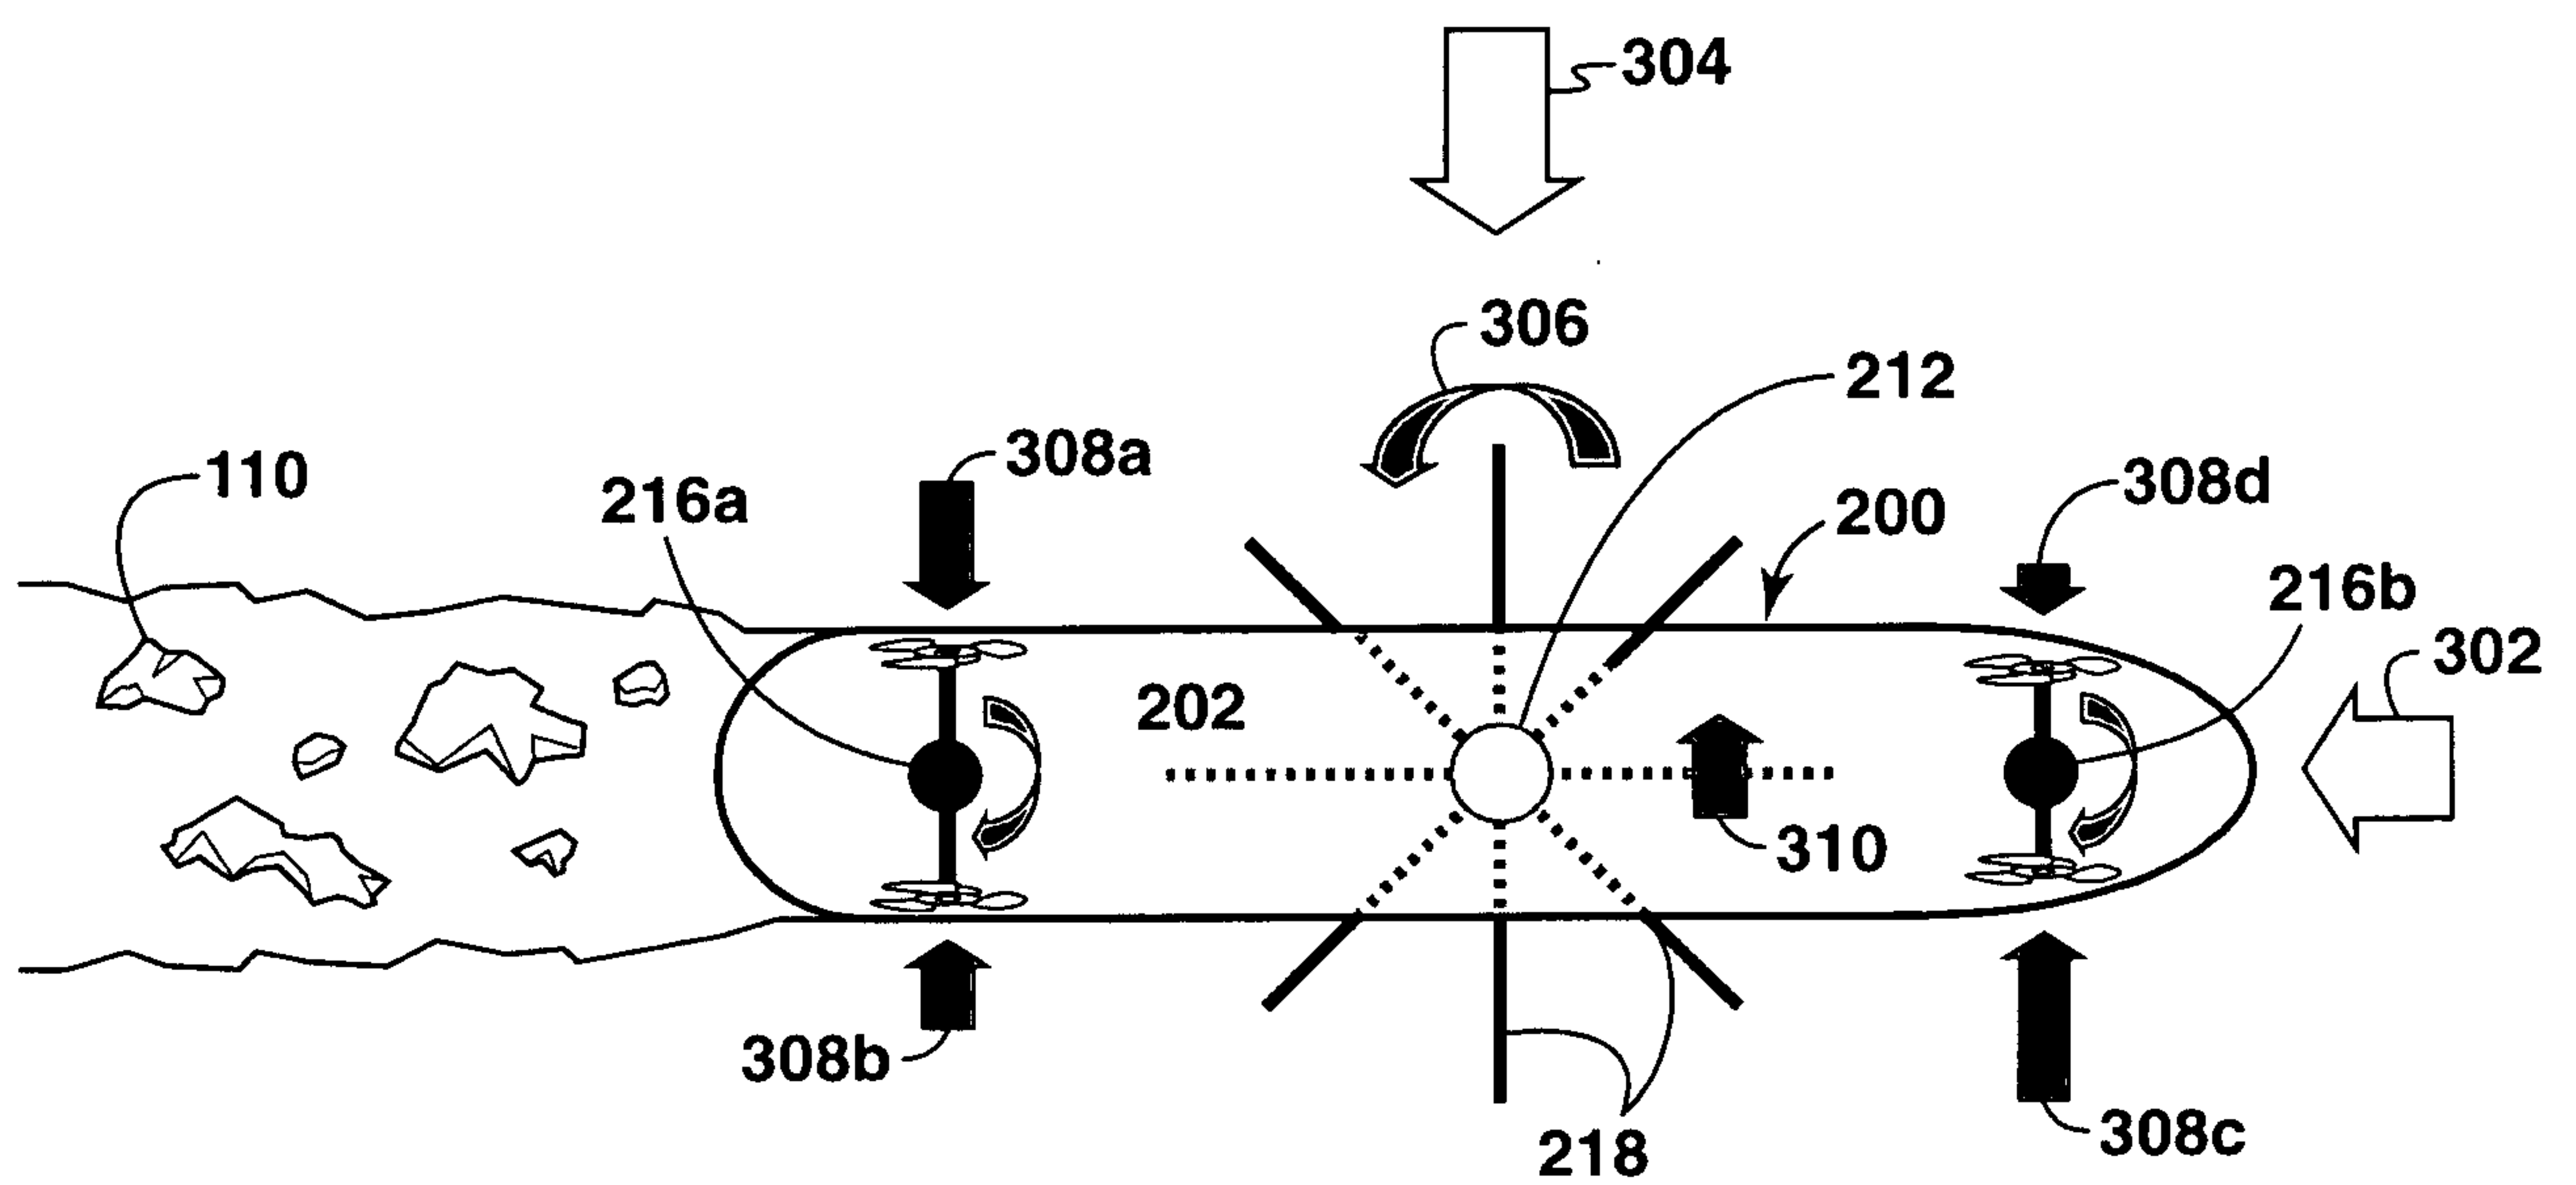**FIG. 3A**

7/8

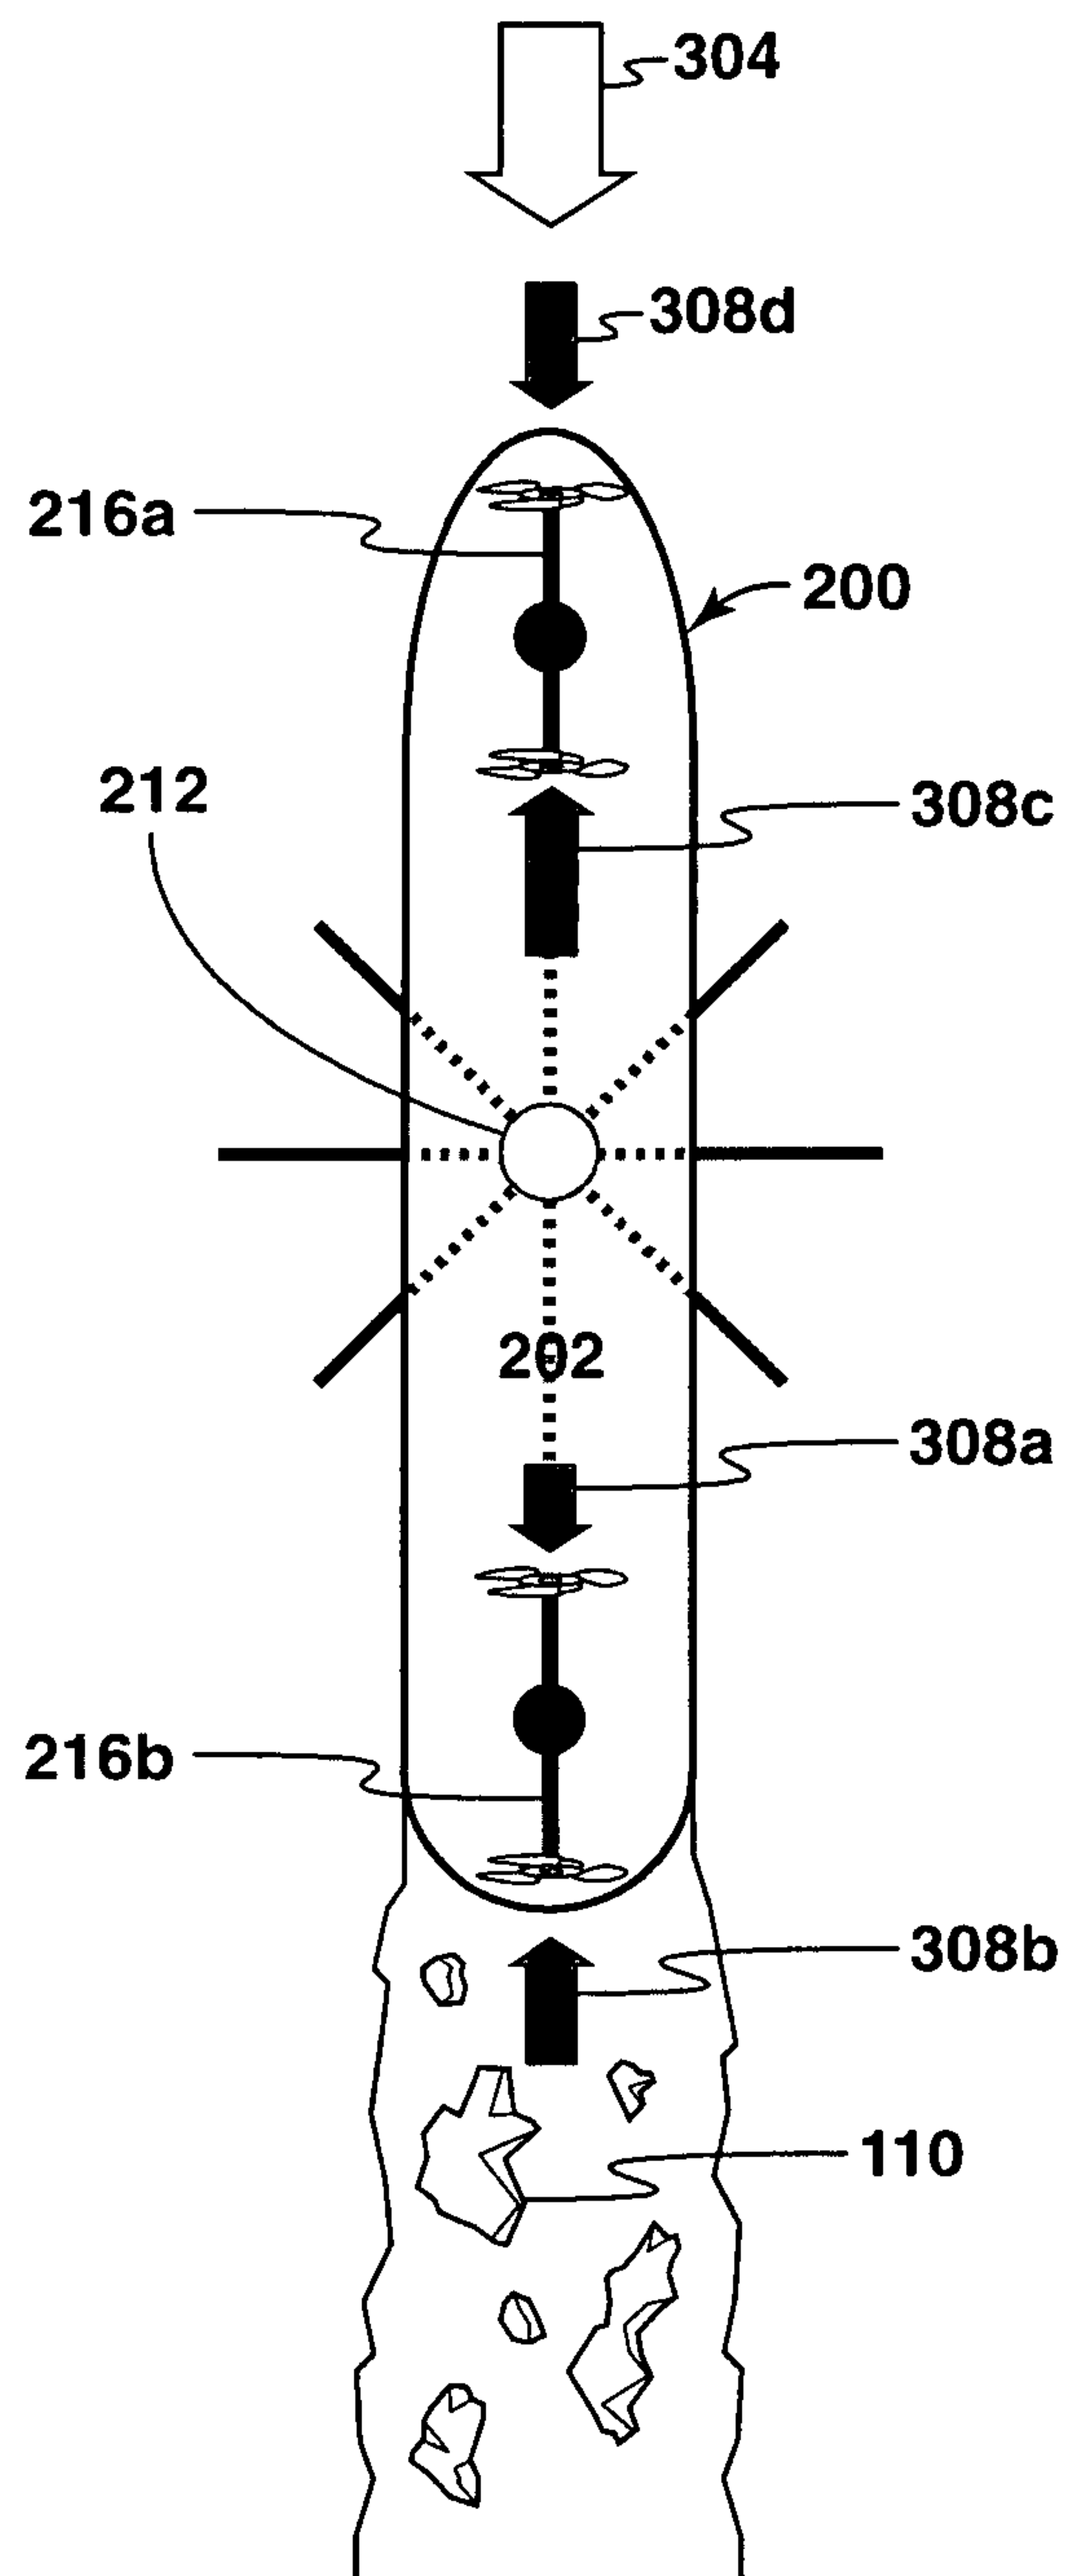**FIG. 3B**

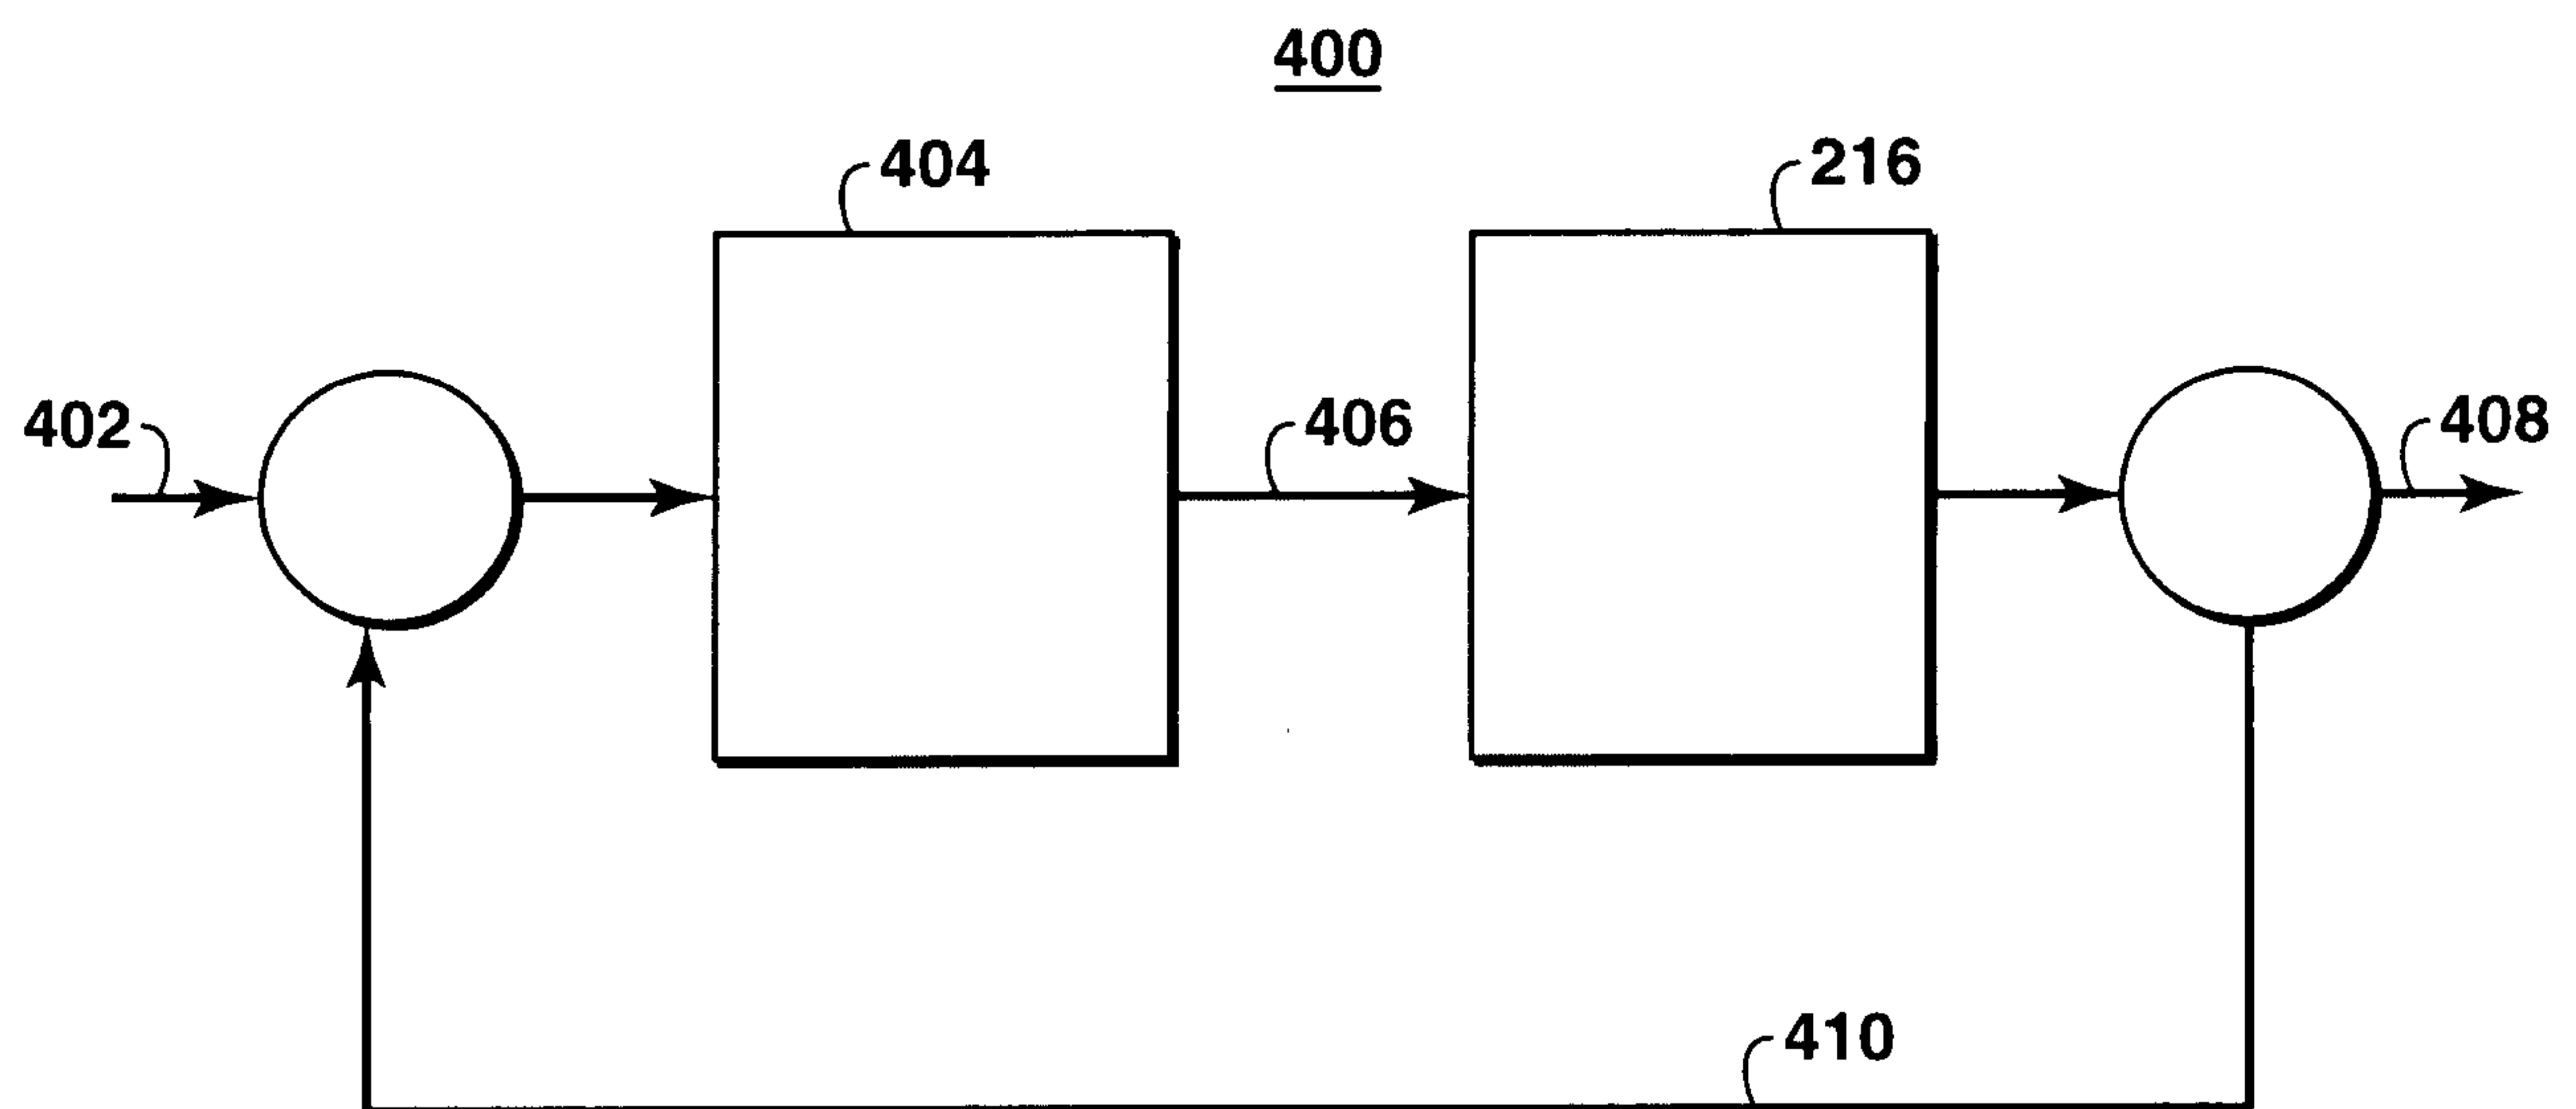**8/8****FIG. 4**

