

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 March 2005 (24.03.2005)

PCT

(10) International Publication Number
WO 2005/026596 A1

(51) International Patent Classification⁷: **F16K 11/22**,
F25B 49/04

(US). RYU, Jinsang [KR/KR]; 203-ho 382-dong, Soweol
Apt., Ogum-dong, Gumpo-si, Syunggi-do 382 (KR).

(21) International Application Number:
PCT/US2004/028320

(74) Agent: **OLDS, Theodore W.**; Carlson, Gaskey & Olds,
P.C., 400 West Maple Road, Suite 350, Birmingham, MI
48009 (US).

(22) International Filing Date:
1 September 2004 (01.09.2004)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/501,366 9 September 2003 (09.09.2003) US

(71) Applicant (for all designated States except US): **UNITED
TECHNOLOGIES CORPORATION** [US/US]; 1 Finan-
cial Plaza, Hartford, CT 06101 (US).

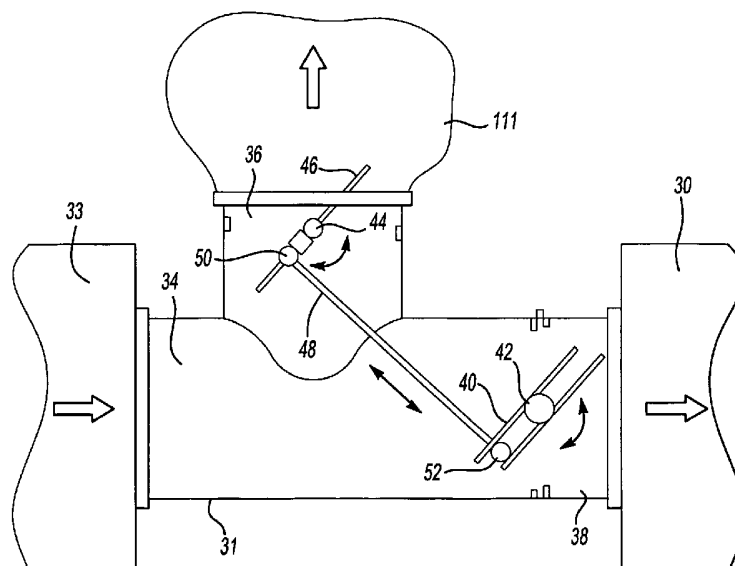
(72) Inventors; and

(75) Inventors/Applicants (for US only): **MARLER, Mark
E.** [US/US]; 72 Bidwell Street, Glastonbury, CT 06033
(US). **JUNG, Sunghan** [KR/US]; 6 Chelsea Road, South
Glastonbury, CT 06073 (US). **WAGNER, Timothy C.**
[US/US]; 562 Forbes Street, East Hartford, CT 06118

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: VALVE



(57) Abstract: A control for controlling the amount of heated fluid entering the inlet of the driving heat source for a refrigerant absorption cycle is controlled to vary the relative amount of heated fluid entering the driving heat source inlet, and being dumped to atmosphere. Preferably, a diverter valve is utilized such that a first valve body (40) communicates the flow into the driving heat source inlet, and moves in opposition to a second valve body (46) controlling the flow through the exhaust. The two valve bodies (40, 46) are preferably mechanically linked. Since the heated fluid is not allowed to enter the refrigerant absorption cycle as its drive heating source, no additional hardware and control for dumping excess heat is necessary within the refrigerant absorption cycle. A computer control preferably drives the first valve to a precise position and the linkage ensures the second valve is also received at a precise position.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

VALVE

RELATED APPLICATION

5 This application claims priority and benefit to provisional application 60/501,366 filed September 9, 2003, the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

10 This application relates to a controlled diverter valve for selectively controlling the flow of a heated fluid that is used as a driving heat source inlet for a refrigerant absorption cycle.

Refrigerant absorption cycles have been used for decades to provide a cooled or heated water source for environmental temperature control in buildings. As is
15 known, an absorber and an evaporator in a refrigerant absorption cycle selectively receives a concentrated absorption fluid, such as a LiBr solution, and a separate refrigerant (often water), respectively. The absorption fluid is selectively dropped onto separate tube sets in the absorber and absorbs the refrigerant vapor generated from the evaporator. A dilute solution, containing both the absorption fluid and the
20 refrigerant is then returned to a generator for generating a heated, concentrated absorption fluid. In the generator, a driving heat source drives the refrigerant vapor out of the mixed fluid. From the generator, the absorption fluid and removed refrigerant vapor are separately returned to the absorber and the evaporator, respectively. The aspects set forth above are a simplified description of a complex
25 system.

For various reasons, the demand for cooling capacity of the absorption refrigerant cycle changes over time. With this change in capacity, the amount of driving heat source needed by the system also needs to be changed. To date, the prior art has rejected heat by various control methods once the heat is already within
30 the cycle.

SUMMARY OF THE INVENTION

In a disclosed embodiment of this invention, a T connection is selectively connected to a heat source at one leg and to the inlet of a refrigerant absorption cycle driving heat source at a second leg. A third leg of the T directs the heated fluid from the heat source to a heat sink. The heat sink may be atmosphere, or could be a thermal/heat recovery device.

A diverter valve assembly used for flow control is positioned within the T and has two valve bodies. A first valve body selectively controls the flow of the heated fluid from the heat source as the driving heat source directly communicating with the generator. A second valve body selectively regulates flow of the heated fluid through the third leg and to the heat sink. A position control device drives the two valves to move in opposition relative to each other. That is, as the first valve moves to open, the second valve moves to close, and as the first valve moves to close, the second valve moves to open. In this manner, the control of the flow of the heated fluid through the T is precise, and controlled by the two valve bodies. In addition, the valve bodies minimize leakage of the driving heat source to atmosphere when the first valve is fully open, requesting 100 percent of the flow. Also, there are benefits in locating the flow control in this location. Since excess heat is not directed into the refrigerant absorption cycle, there is no need for additional hardware and controls to reject unwanted heat within the cycle.

Preferably, a computer-controlled motor drives a rotating shaft for driving the first valve body. A mechanical linkage preferably connects the first valve body to the second valve body such that the second valve body moves in opposition to the first valve body. A computer control may receive signals from a control for the absorption cycle, or it may itself be part of that control. At any rate, the position of the first valve body is defined by the control and is achieved precisely through the driving motor. The use of the mechanical linkage ensures that the second valve body is always moving in opposition to the movement of the first valve body. The linkage removes any need for separate synchronized actuators.

In one preferred embodiment, the mechanical linkage includes a lever fixed to rotate with the rotating shafts of both the first and second valves. These levers are pivotally connected to a linkage, such that upon rotation of the first valve body and

its first shaft, the associated lever also is moved. That lever then pulls the linkage that in turn pulls the lever associated with the second valve body such that the second valve body is also driven. While a particular linkage is disclosed in this application, other ways for synchronizing the two valve bodies such as belt drives, 5 synchronous electric motors, chain drives, etc. may be utilized.

In further features of this invention, the shafts for driving the valve body are mounted in bearings on opposed sides of the valve. Preferably, these bearings are mounted outwardly of the housing of the T. Further, the shafts preferably have a non-cylindrical cross-section at the areas received within the bearings. As a 10 preferred embodiment, the shaft may have a generally triangular cross-section with several small spaced areas in contact with the inner periphery of the bearing. In this manner, the heat transfer from the shaft to the bearing is reduced, allowing the use of lower cost bearings, and elimination of lubricants.

In a further feature, a cooling air blower communicates cooling air into the T 15 connection and adjacent to the first valve body, for both sealing, i.e. preventing hot fluid from flowing to the generator, and cooling the first valve body when the first valve is closed. A check valve is positioned on this cooling air line flow to prevent leaking of the driving heat source through the air seal blower, which would waste valuable heat.

20 These and other features of the present invention can be best understood from the following specification and drawings, the following of which is a brief description.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Figure 1 schematically shows a portion of a refrigerant absorption cycle.
Figure 2 shows a T connection receiving the inventive diverter valve.
Figure 3 is another view of the structure within the T connection.
Figure 4 is a further view of the T connection.
Figure 5 is an outside view of the T connection.
30 Figure 6 shows the cross-section of a shaft for driving a valve.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 shows a generator vessel 22 that is a portion of a refrigerant absorption cycle 20. A mixed absorption fluid and refrigerant is received at 24 in the generator vessel 22. A driving heat source 30 is directed into the vessel 22 and through the fluid 24. This driving heat source 30 boils off the refrigerant (water) creating a water vapor leaving through line 25. From line 25, the water vapor goes to a cooling tower at which its temperature is lowered. This lower temperature water is then directed into an evaporator within the refrigerant absorption cycle, and cools evaporator tubes for providing cooled water for use in a temperature control system.

The absorption fluid remaining in the vessel 22 is a high concentration absorption fluid such, e.g. high LiBr concentration and low refrigerant concentration. This high concentration fluid has a high affinity for absorbing the refrigerant vapor in the vessel. The high concentration absorption fluid is also directed into the evaporator, and passes over tubes that cool the absorption fluid. A screen initially separates the refrigerant and the absorption fluid in the evaporator. However, the high concentration absorption fluid absorbs refrigerant vapor back into its solution. This combined refrigerant and absorption fluid, or low concentration (diluted) solution, then returns through line 28 to the generator vessel 22. The driving heat source 30 leaves the vessel 22 through a return line. The above is a description of the system when utilized to provide cooling water, however, the system can also be operated to provide heated water. Modifications to provide the heated water are as known in the art.

It is known to provide the driving heat source to inlet 30 from another element within the environment in which the absorption refrigerant cycle is mounted. As examples, a micro-turbine, a furnace, fuel cells, energy generators, reciprocating machines, other types of turbines, an engine cooling cycle, various vehicles, chemical or manufacturing processes, or any other source of available heat may be utilized to supply the heat fluid as a driving heat source 30.

Figure 2 shows a T connection 31 selectively communicating such a heat source 33 at one leg 34 to the driving heat source inlet 30 for the refrigerant absorption cycle at another leg 38. Now, as known, a heated fluid is directed from

the source 33 into the leg 34, and may move through the leg 38 to become the refrigerant absorption cycle driving heat source 30.

5 The heat source 33 may be a micro-turbine, or any other known source of heat, and preferably one that is already in the environment that is to receive the refrigerant absorption cycle 20. As is known, refrigerant absorption cycles 20 often ultimately cool the cooler water (or heat the heating water) that is directed to various floors within a building to provide temperature control.

10 A third leg 36 regulates the heated fluid from the heat source 33 to a heat sink 111. The heat sink 111 is shown schematically, and may be a heat recovery device or simply a dump to atmosphere. A valve body 40 controls or allows flow from the leg 34 through leg 38. Valve body 40 is driven to rotate about a shaft 42. A second valve body 46 is driven to rotate about a shaft 44 and selectively blocks the leg 36, preventing loss of heated fluid due to leakage. As shown, a linkage 48 selectively connects pivot points 50 and 52 associated with the valve bodies 46 and 15 40, respectively. As can be better understood below, as the valve body 40 moves to close, the linkage will ensure the valve body 46 moves to open, and as the valve body 40 moves to open, the linkage ensures the valve body 46 moves to close. In this manner, the amount of heated fluid entering the leg 38 can be precisely controlled such that only a desired amount enters the driving heat source inlet 30. 20 The diverter valve prevents warm gas from flowing into the refrigerant absorption cycle while it is not being used for cooling or heating. In this manner, selective control of heat from the driving source is achieved in a simplified manner, and outside of the refrigerant absorption cycle 20.

25 While a particular mechanical connection between the valves is illustrated, other types of valve controls could be utilized within the scope of this invention. As an example, electronically controlled valves or other remotely controlled and mechanically unconnected valve sets can be utilized within the broad teachings of this invention.

30 As shown in Figure 3, a motor 58 is associated with a control 59 for driving the shaft 42. The motor 58 is preferably a precisely controlled electric motor that is able to achieve an infinite number of positions of the shaft 42 such that precise control of the relative amount of heated fluid entering the driving heat source inlet

30 is achieved. Since the heated fluid is not allowed to enter the refrigerant absorption cycle 20 through its drive heating source inlet 30, no control within the refrigerant absorption cycle for dumping excess heat is necessary. Rather, the heat is not delivered into the system, and the rejection of heat is thus simplified over the
5 prior art.

As is also shown in Figure 3, the linkage 48 connects levers 61 that rotate with the shafts 42 and 44. The shafts 42 and 44 are mounted within bearings 56 and 54, respectively. Notably, the bearings 54 and 56 are positioned on each side of their associated valve body 46 and 40, and outwardly of the T housing.

10 As further shown in Figure 3, a cooling air blower 60 communicates a cooling air through a line having a check valve 62 and into the body of the T connection 31.

As shown in Figure 4, an outlet 64 from the line receiving the cooling air flow communicates the cooling air to a position adjacent the valve 40. Typically,
15 cooling air is injected between the two blades of the valve body when the valve 40 is closed. Thru-holes 41 in shaft 42 allow the cooling to pass from an upper end of the valve 40 to a lower end.

As can be perhaps best seen in Figure 5, the linkage 48 pivots at pivot point 50 and 52 to drive the levers 61, and thus communicate rotation of one shaft 42 to
20 the second shaft 64. As can be appreciated, as the shaft 42 is driven to close its associated valve 40, the linkage 52, 48, 50, 61 drives the shaft 44 to move valve body 46 in opposition.

Figure 6 shows another feature of this invention. The shaft 44, and the shaft 42 (not shown) have an outer periphery with removed portions 66 and remaining
25 part cylindrical portions 67. Only part cylindrical portions 67 contact the inner periphery 68 of the bearing 54 (or 56). In this manner, heat built up in the shafts 42 and 44 will only be transferred to the inner periphery 68 over a very small area, limiting bearing temperature. Preferably, the percentage of contact area is between 10-65% of the total inner periphery 68.

30 Preferred embodiments of this invention has been disclosed, however, a worker of ordinary skill in this art would recognize that certain modifications would

come within the scope of this invention. For that reason, the following claims should be studied to determine the true scope and content of this invention.

CLAIMS

1. A control for a driving heat source inlet in an absorption refrigerant cycle comprising:
 - 5 a T connection, said T connection having a first leg to be connected to a source of heated fluid, and said T connection having a second leg to be connected to the inlet of a driving heat source for a refrigerant absorption cycle, a third leg of said T communicating said heated fluid to a heat sink; and
 - 10 a first and second valve body received within said T connection, said first valve body controlling the amount of heated fluid being directed through said second leg, and said second valve body controlling the amount of heated fluid being communicated through said third leg, a control for controlling movement of said first and second valve bodies such that they are generally moved in opposition to each other.
- 15 2. The control as set forth in Claim 1, wherein a computer control controls movement of a drive motor for driving at least a first shaft to control a position of said first valve body.
- 20 3. The control as set forth in Claim 2, wherein said first shaft drives said first valve body.
4. The control as set forth in Claim 2, wherein a mechanical connection connects said first and second valve bodies such that as one of said first and second
25 valve bodies is driven, the other of said first and second valve bodies is moved in opposition to said one of said first and second valve bodies.
5. The control as set forth in Claim 1, wherein each of said first and second valve bodies are driven to rotate on associated shafts, said shafts being mounted on
30 bearings on opposed sides of said valve bodies.

6. The control as set forth in Claim 5, wherein said bearings are positioned outwardly of said T connection.

7. The control as set forth in Claim 5, wherein an outer periphery of said shafts received within said bearings is non-cylindrical such that a contact area between said shaft and an inner periphery of said bearing is reduced

8. The control as set forth in Claim 7, wherein said contact area is between 10-65 percent of said inner periphery.

10

9. The control as set forth in Claim 1, wherein a blower supplies a cooling air flow into an interior of said T connection, with said blower having a check valve on a line between an outlet of said line entering into said T connection and said blower motor.

15

10. The control as set forth in Claim 1, wherein said heat sink is atmosphere.

11. The control as set forth in Claim 1, wherein said heat sink is a heat recovery system.

20

12. A refrigerant absorption cycle and heat source combination comprising:
an absorption refrigerant cycle having a driving heat source entering into a generator, said driving heat source having an inlet;

a source of heated fluid;

25 a T connection, said T connection having a first leg connected to said source of heated fluid, said T connection having a second leg connected to said driving heat source inlet, a third leg of said T communicating heated fluid to a heat sink; and

a valve body received within said T connection, said valve body being operable to control the amount of said heated fluid directed into said second leg and into said driving heat source inlet, and a control for controlling said valve to regulate the amount of said heated fluid delivered through said second leg to said driving heat source inlet.

30

13. The combination as set forth in Claim 12, wherein said valve includes first and second valves bodies received within said T connection, with a first valve controlling the amount of heated fluid directed through said second leg and to said driving heat source inlet, and a second valve controlling the amount of heated fluid communicating through said third leg.

14. The combination as set forth in Claim 13, wherein said first and second valve bodies are connected by said control to move in opposition to each other.

15. The combination as set forth in Claim 14, wherein said first and second valve bodies are mechanically linked.

16. The combination as set forth in Claim 12, wherein said heat sink is atmosphere.

17. The combination as set forth in Claim 12, wherein said heat sink is a heat recovery system.

18. A method of controlling a refrigerant absorption cycle comprising the steps of:

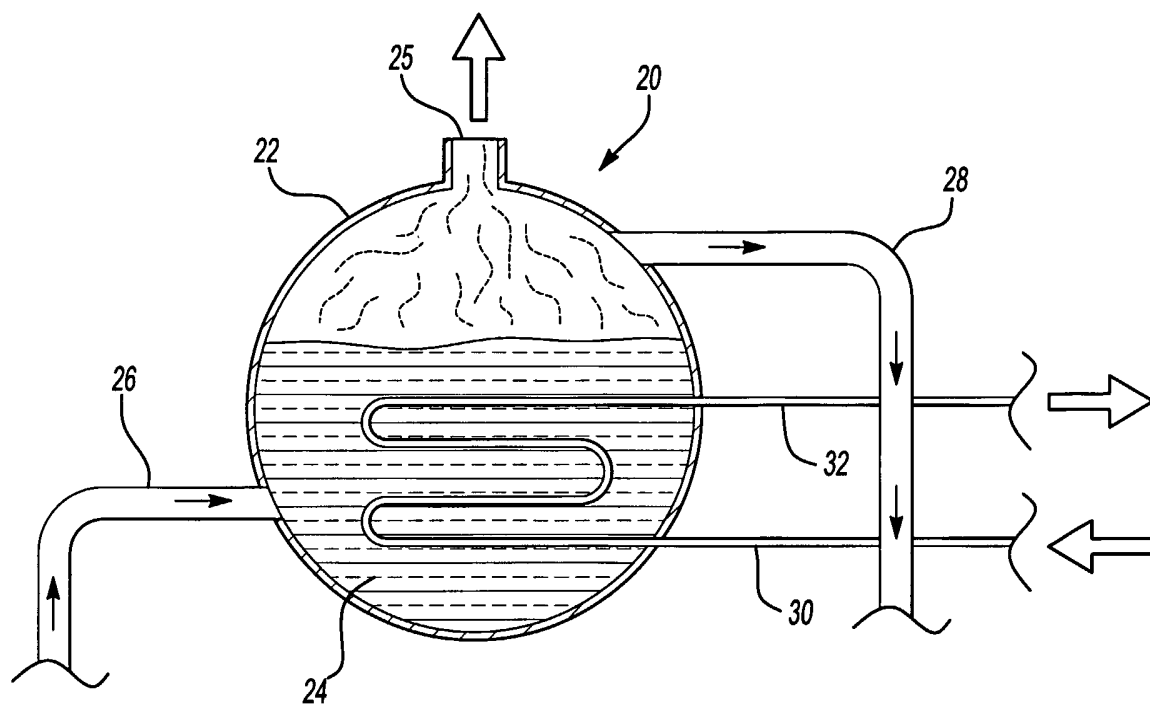
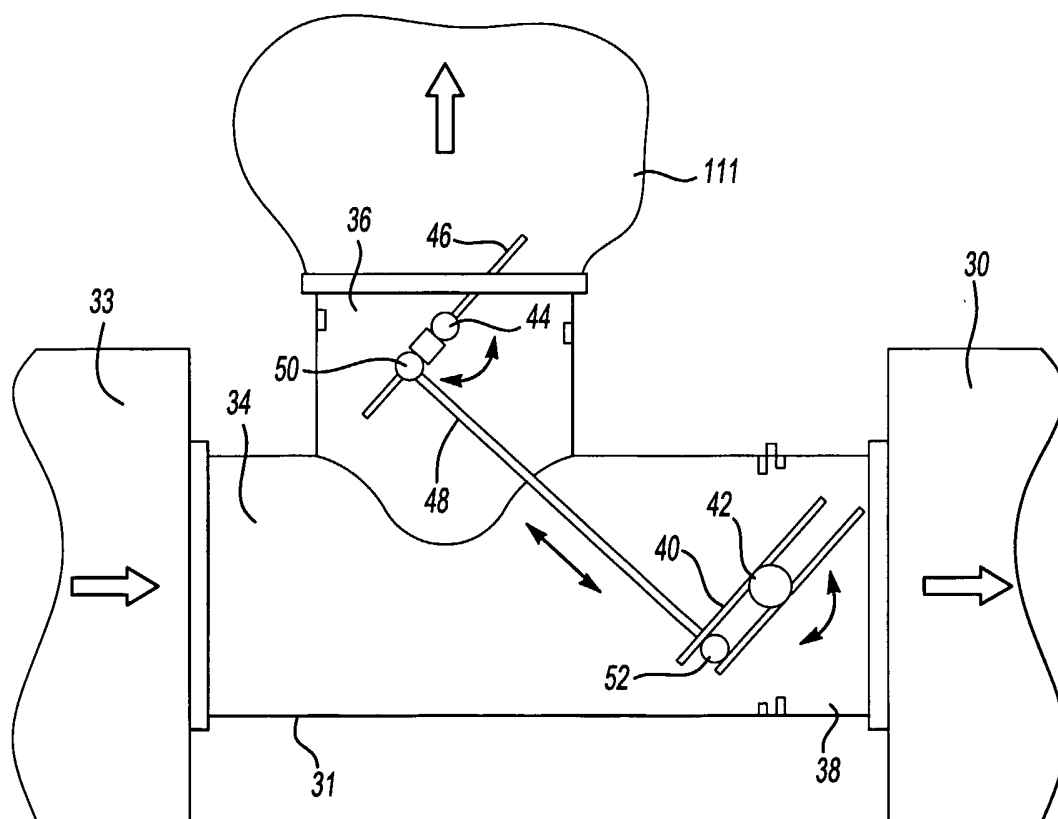
5 (1) providing a refrigerant absorption cycle, and providing an inlet to receive a driving heat source, said inlet being connected to a T connection, said T connection being provided with a first leg connected to a source of heated fluid, a second leg connected to said inlet of said refrigerant absorption cycle, and a third leg communicating said heated fluid to a heat sink, and providing a valve system within said T connection, said valve system controlling an amount of heated fluid directed through said second leg to said inlet of said refrigerant absorption cycle, and said
10 valve system including a control to regulate the amount of heated fluid directed through said second leg to said inlet of said refrigerant absorption cycle; and

(2) operating said refrigerant absorption cycle and supplying heated fluid to said inlet, and moving said valve system to reduce said flow of heated fluid to said refrigerant absorption cycle when less heat is desired at said refrigerant
15 absorption cycle.

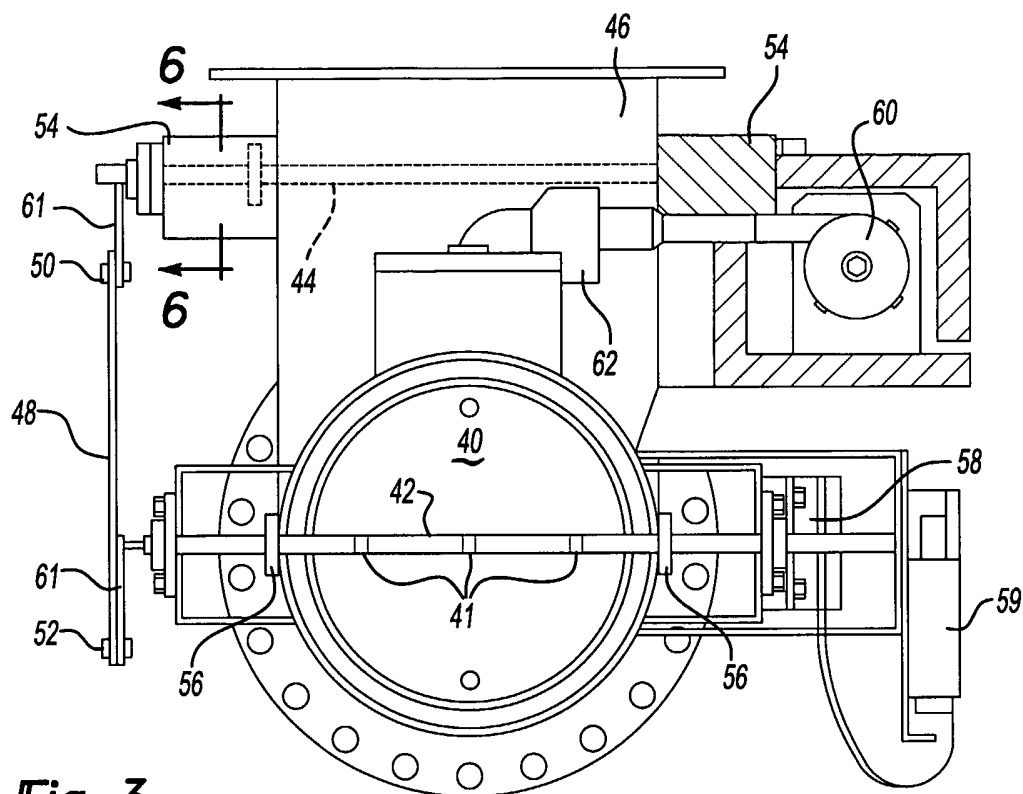
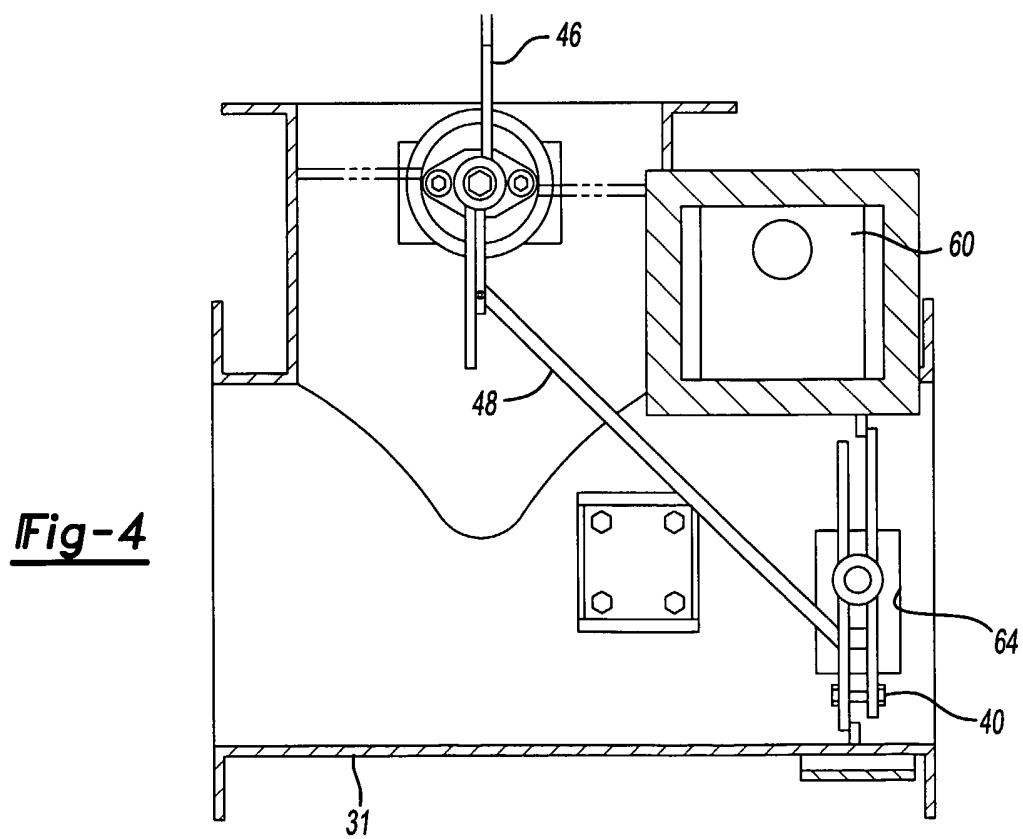
19. The method as set forth in claim 18, wherein said valve system also controlling a flow of said heated fluid through said third leg, and increasing said flow of said heated fluid through said third leg as said flow of said heated fluid
20 through said second leg is decreasing.

20. The method as set forth in claim 19, wherein separate valves are provided at said second leg and said third leg, and said separate valves being mechanically interconnected such that movement of one of said valves results in movement of the
25 other of said valves.

1/3

**Fig-1****Fig-2**

2/3

**Fig-3****Fig-4**

3/3

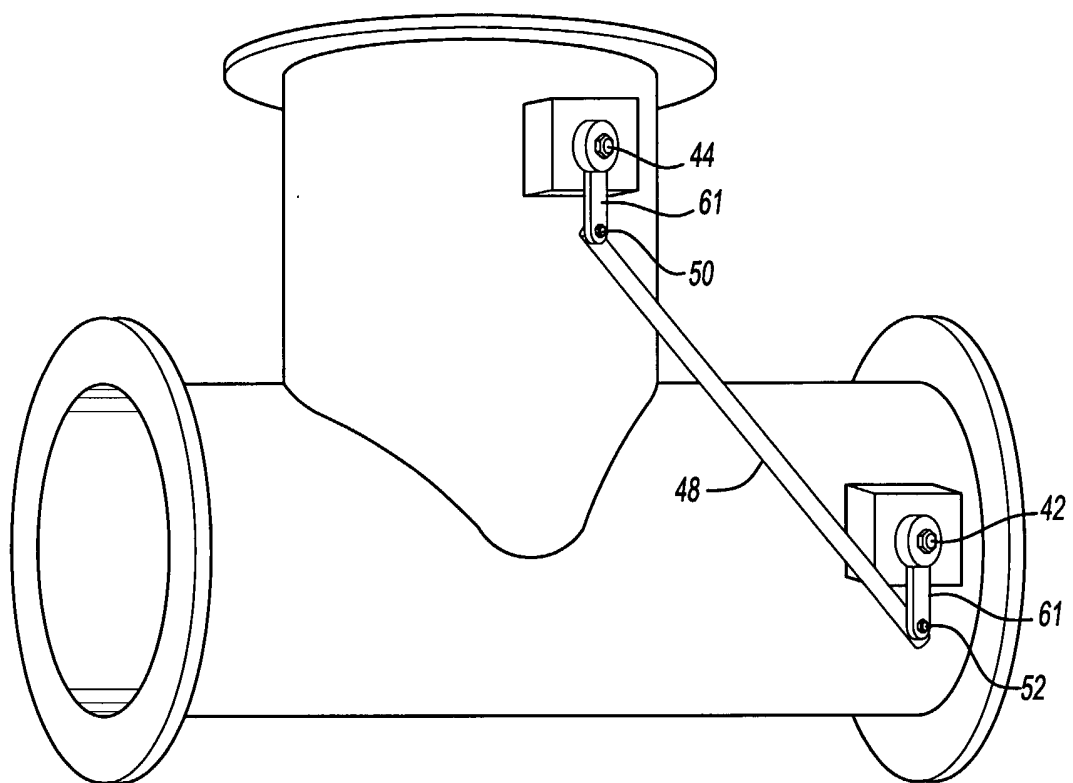


Fig-5

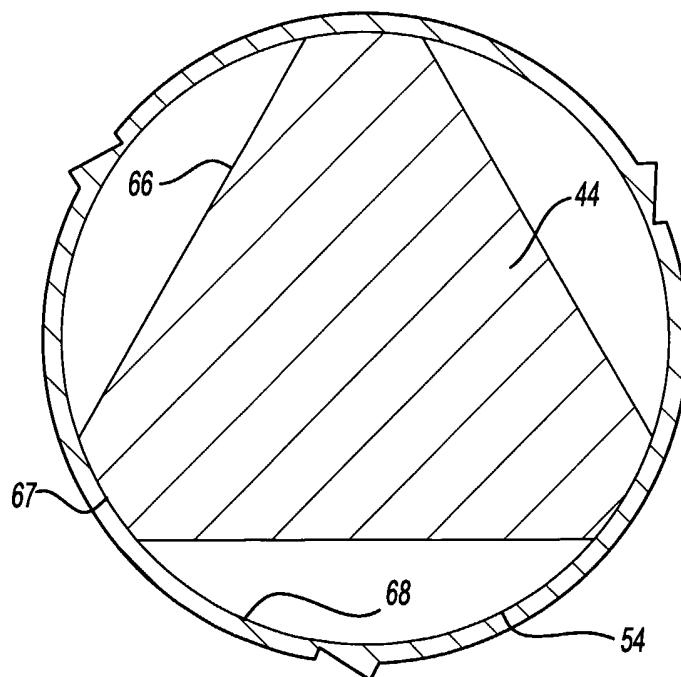


Fig-6

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/US2004/028320

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 F16K11/22 F25B49/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 F16K F25B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 499 691 C (SCHIFF UND MASCHB AKT GES DEUT) 12 June 1930 (1930-06-12) figure 1	1-11
X	US 2 383 861 A (HOPKINS DAVID W) 28 August 1945 (1945-08-28) figures 1-5	1-11
X	US 6 216 737 B1 (GEERS WILLIAM ET AL) 17 April 2001 (2001-04-17) abstract; figures 1-4	1-11
Y		13-17, 20
X	WO 02/086397 A (ARITA KAZUHEI ; OGAI MASATO (JP); YAZAKI CORP (JP); TONGU SHINJI (JP);) 31 October 2002 (2002-10-31) abstract; figure 6	12, 18, 19
Y		13-17, 20
	----- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

17 December 2004

Date of mailing of the international search report

14/01/2005

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Bilo, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/028320

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 178 267 A (YAZAKI CORP) 6 February 2002 (2002-02-06) abstract; figure 1 -----	12,18-20
A	US 4 388 812 A (CLARK SILAS W) 21 June 1983 (1983-06-21) abstract; figure 1 column 4, line 60 - column 5, line 9 -----	1-20
A	US 4 749 004 A (PEASH DOUGLAS E) 7 June 1988 (1988-06-07) figures 1,2 -----	1-20
A	DE 32 04 288 A (VAILLANT JOH GMBH & CO) 11 August 1983 (1983-08-11) figure 1 -----	1-20
A	DE 29 01 207 A (KIESELMANN GMBH) 24 July 1980 (1980-07-24) figures 1-8 -----	1,9
A	DE 28 03 818 A (NOCADO ARMATURENFAB GMBH & CO) 2 August 1979 (1979-08-02) figures 1-3 -----	1,9

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/US2004/028320

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 499691	C	12-06-1930	NONE	
US 2383861	A	28-08-1945	NONE	
US 6216737	B1	17-04-2001	NONE	
WO 02086397	A	31-10-2002	JP 2002286324 A EP 1373811 A1 WO 02086397 A1	03-10-2002 02-01-2004 31-10-2002
EP 1178267	A	06-02-2002	CN 1336529 A EP 1178267 A1 JP 2002115930 A US 2002023442 A1	20-02-2002 06-02-2002 19-04-2002 28-02-2002
US 4388812	A	21-06-1983	US 4285211 A	25-08-1981
US 4749004	A	07-06-1988	NONE	
DE 3204288	A	11-08-1983	DE 3204288 A1 DE 3207435 A1	11-08-1983 08-09-1983
DE 2901207	A	24-07-1980	DE 2901207 A1	24-07-1980
DE 2803818	A	02-08-1979	DE 2803818 A1	02-08-1979