

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2010282772 B2**

(54) Title
Base oil composition comprising oligomerized olefins

(51) International Patent Classification(s)
C10M 105/04 (2006.01) **C07C 2/22** (2006.01)

(21) Application No: **2010282772** (22) Date of Filing: **2010.08.04**

(87) WIPO No: **WO11/019564**

(30) Priority Data

(31) Number	(32) Date	(33) Country
12/538,752	2009.08.10	US

(43) Publication Date: **2011.02.17**

(44) Accepted Journal Date: **2014.05.22**

(71) Applicant(s)
Chevron U.S.A. Inc.

(72) Inventor(s)
Elomari, Saleh; Miller, Stephen J.

(74) Agent / Attorney
Freehills Patent Attorneys, Level 43 101 Collins Street, Melbourne, VIC, 3000

(56) Related Art
US 2009/0050521
US 4078010
US 4814540
US 4990709

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 February 2011 (17.02.2011)

(10) International Publication Number
WO 2011/019564 A4

(51) International Patent Classification:
C10M 105/04 (2006.01) C07C 2/22 (2006.01)

(21) International Application Number:
PCT/US2010/044410

(22) International Filing Date:
4 August 2010 (04.08.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/538,752 10 August 2009 (10.08.2009) US

(71) Applicant (for all designated States except US):
CHEVRON U.S.A. INC. [US/US]; 6001 Bollinger Canyon Road, San Ramon, CA 94583 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ELOMARI, Saleh** [US/US]; 905 Antiquity Drive, Fairfield, CA 94534 (US).
MILLER, Stephen, J. [US/US]; 520 45th Avenue, San Francisco, CA 94121 (US).

(74) Agents: **ABERNATHY, Susan, M.** et al.; Chevron Corporation, Law Department, Post Office Box 6006, San Ramon, CA 94583-0806 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(88) Date of publication of the international search report:
16 June 2011

Date of publication of the amended claims: 1 September 2011



WO 2011/019564 A4

(54) Title: BASE OIL COMPOSITION COMPRISING OLIGOMERIZED OLEFINS

(57) Abstract: We provide a base oil, comprising one or more oligomerized olefins, wherein the base oil has: a. a kinematic viscosity at 100 °C greater than 2.9 mm²/s; b. a viscosity index from 25 to 90; and c. a cloud point less than -55 °C. We provide a base oil made by oligomerizing propylene in an ionic liquid catalyst, where the base oil has a viscosity index from 25 to 90 and the base oil is colorless. We also provide a base oil made by oligomerizing an olefin feed comprising propylene in an acidic alkylpyridinium chloroaluminate ionic liquid, wherein the base oil has a viscosity index at 100 °C greater than 2.9 mm²/s, a viscosity index from 25 to 90, and a cloud point less than -55 °C.

21 Mar 2014

2010282772

BASE OIL COMPOSITION COMPRISING OLIGOMERIZED OLEFINS

FIELD OF THE INVENTION

5 This invention is directed to compositions of base oils having viscosity indexes from 25 to 90.

SUMMARY OF THE INVENTION

10 In one aspect of the invention there is provided a base oil, comprising one or more oligomerized olefins, wherein the base oil has: a kinematic viscosity at 100°C of 13 mm²/s or greater; a viscosity index from 25 to 90; and a cloud point less than -55°C.

15 In another aspect of the invention there is provided a base oil made by oligomerizing propylene in an ionic liquid catalyst, where the base oil has a kinematic viscosity at 100°C of 13 mm²/s or greater, viscosity index from 25 to 90 and the base oil is colorless.

20 In a further aspect of the invention there is provided a base oil made by oligomerizing an olefin feed comprising propylene in an acidic alkyl-pyridinium chloroaluminate ionic liquid, wherein the base oil has a kinematic viscosity at 100°C or 13 mm²/s or greater, a viscosity index from 25 to 90, and a cloud point less than -55°C.

25 There is disclosed herein a base oil, comprising one or more oligomerized olefins, wherein the base oil has:

21 Mar 2014

2010282772

- a. a kinematic viscosity at 100°C greater than 2.9 mm²/s;
- b. a viscosity index from 25 to 90; and
- c. a cloud point less than -55°C.

5

There is also disclosed herein a base oil made by oligomerizing propylene in an ionic liquid catalyst, where the base oil has a viscosity index from 25 to 90 and the base oil is colorless.

10

There is further disclosed herein a base oil made by oligomerizing an olefin feed comprising propylene in an acidic alkyl-pyridinium chloroaluminate ionic liquid, wherein the base oil has a viscosity index at 100°C greater than 2.9 mm²/s, a viscosity index from 25 to 90, and a cloud point less than -55°C.

15

Reference to any prior art in the specification is not, and should not be taken as, an acknowledgment, or any form of suggestion, that this prior art forms part of the common general knowledge in Australia or any other jurisdiction or that this prior art could reasonably be expected to be ascertained, understood and regarded as relevant by a person skilled in the art.

20

As used herein, except where the context requires otherwise, the term "comprise" and variations of the term, such as "comprising", "comprises" and "comprised", are not intended to exclude other additives, components, integers or steps.

25

DETAILED DESCRIPTION OF THE INVENTION

In the present application the term base oil is used to mean a lubricant component that can be used to produce a finished lubricant.

An olefin feed comprises at least one olefin. An olefin is an unsaturated aliphatic hydrocarbon. Propylene is an unsaturated organic compound having the chemical formula C_3H_6 . Propylene has one double bond.

The propylene may come from a number of sources, including: as a byproduct
5 from the steam cracking of liquid feedstocks such as propane, butane, gas condensates, naphtha and LPG; from off-gases produced in a FCC unit in a refinery; from propane dehydrogenation using a noble metal catalyst; and by metathesis. Propylene supplies are increasing and there is a demand for upgrading them into higher valued products, such as base oils.

10 FCC units use a fluidized catalyst system to facilitate catalyst and heat transfer between a reactor and a regenerator. Combustion of coke in the regenerator provides the heat necessary for the reactor. A good overview of examples of FCC units are described in "UOP Fluid Catalytic Cracking (FCC) and Related Processes", UOP 4523-7, June 2008; herein incorporated in its entirety.

15 New catalysts and octane additives are available that increase propylene production from a FCC unit. One example of an octane additive that increases propylene from a FCC unit is ZSM-5. Additionally metathesis may be combined with steam cracking, or added to a FCC unit, to boost propylene output. Metathesis units need access to large C4 streams that are free of isobutylene and butadiene.

20 Other processes that are used to improve propylene production are the Arco Chemical Superflex™ process; deep catalytic cracking (DCC) developed by Sinopec; olefins interconversion technology that uses a ZSM-5 zeolite catalyst to convert C4s, light pygas and light naphtha into propylene and ethylene using a catalyst bed that is either fluidized(MOI) or fixed. Methanol-to-olefins (MTO)
25 processes are flexible enough to allow for propylene production to increase to 45% of total output. Propylene output can be boosted further by integrating an olefin cracking process (OCP) with a MTO process. The OCP process takes the heavier olefins from a MTO unit and converts them into propylene. Propylene is also produced by conversion of methanol to propylene using a MTP process developed
30 by Lurgi and Statoil.

Oligomerizing

Oligomerizing is the combining of two or more organic molecules. The oligomerizing step forms an oligomer. Oligomerizing of two or more olefin molecules in the olefin feed results in the formation of an olefin oligomer that generally
5 comprises a long branched chain molecule with one remaining double bond. The oligomerizing is done using an ionic liquid catalyst in an ionic liquid oligomerization zone. The oligomerization conditions include temperatures between the melting point of the ionic liquid catalyst and its decomposition temperature. In one
10 embodiment, the oligomerization conditions include a temperature of from about 0 to about 150°C, such as from about 0 to about 100°C, or from about 10 to about 100°C, from about 0 to about 50°C, from about 40°C to 60°C, or at around 50°C.

The oligomerizing occurs in less than 5 hours, and in some embodiments can occur in less than 2 hours, or less than 1 hour. In one embodiment the oligomerizing
15 occurs between 5 minutes and 60 minutes, between 10 minutes and 45 minutes, or between 15 minutes and 30 minutes.

In one embodiment, the oligomerization zone does not comprise any transition metals from group 8-10.

In one embodiment the oligomerizing is done in the absence of any
20 isoparaffins.

In one embodiment the oligomerizing is done in the presence of one or more longer chain olefins.

Alkylating

25 The oligomer is optionally alkylated in the presence of an isoparaffin. The isoparaffin is a branched-chain version of a straight-chain (normal) saturated hydrocarbon. Examples of isoparaffins are isobutane, isopentane, isohexane, isoheptane, and other higher isoparaffins. Economics and availability can be the main
30 drivers of the isoparaffin selection. Lighter isoparaffins tend to be less expensive and more available due to their low gasoline blend value (due to their relatively high vapor pressure). Mixtures of isoparaffins can also be used. Mixtures such as C₄-C₅ isoparaffins can be used and may be advantaged because of reduced separation

costs. The isoparaffin may also comprise diluents such as normal paraffins. This can be a cost savings, by reducing the cost of separating isoparaffins from close boiling paraffins. Normal paraffins will tend to be unreactive diluents in the alkylating step. The isoparaffin may also be mixed with a pentene.

5 The alkylating is done using an ionic liquid catalyst in an ionic liquid alkylation zone. The set of alkylation conditions are selected to form an alkylated oligomeric product. The alkylation conditions include temperatures between the melting point of the ionic liquid catalyst and its decomposition temperature. In one embodiment the alkylation conditions include a temperature of from about 15 to about 200°C, such as
10 from about 20 to about 150°C, from about 25 to about 100°C, or from about 50 to 100°C.

 In one embodiment, a Brönsted acid such as HCl, a metal halide, an alkyl halide, or another component or mixture of components that directly or indirectly supplies protons is added to either or both the oligomerization zone or the alkylation
15 zone. Although not wishing to be limited by theory it is believed that the presence of a Brönsted acid such as HCl or other components that supplies protons greatly enhances the acidity and, thus, the activity of the ionic liquid catalyst.

Base Oil

20

 The base oil is recovered from either the oligomer product from the oligomerizing step, from the alkylated oligomeric product from the alkylating step or from the products of both the oligomerizing and alkylating steps. The base oil is easily separated from the ionic liquid catalyst phase by decanting. The kinematic
25 viscosity of the base oil can range from about 1.5 mm²/s to about 70 mm²/s at 100°C. In some embodiments, the base oil has a kinematic viscosity at 100°C of 2.9 mm²/s or greater, of 3 mm²/s or greater, of 8 mm²/s or greater, or of 10 mm²/s or greater. In some embodiments the base oil has a kinematic viscosity at 100°C of less than 50 mm²/s or less than 30 mm²/s. In one embodiment the base oil has a
30 kinematic viscosity at 100°C from 15 to 30 mm²/s.

 In some embodiments the base oil has a combination of properties including a kinematic viscosity at 100°C of 2.9 mm²/s or greater, a viscosity index(VI) from 25 to 90, and a cloud point less than -40°C. In other embodiments the base oil has a

combination of properties including having from 45 to 70 wt% hydrocarbons boiling at 900°F or higher, a viscosity index from 25 to 90, and a cloud point less than -25°C.

Kinematic viscosity is determined by ASTM D 445-06. Cloud Point is determined by ASTM D 2500-09. Viscosity index is determined by ASTM D 2270-04. Pour Point is determined by ASTM D 5950-02 (Reapproved 2007). ASTM test methods D 445-06, D 2500-09, D 2270-04, and D 5950-02 are incorporated by reference herein in their entirety.

The viscosity index of the base oil is generally less than 120. In some embodiments the viscosity index is less than 100, for example from 25 to 90, or from 35 to 80. In other embodiments the viscosity index is from 50 to 90, or from greater than 50 to 85.

In one embodiment, when the base oil has a low viscosity at a high temperature (i.e., low viscosity index) the base oil is especially suitable for blending into a transformer oil. The transformer oil is made by blending in one or more additives into the base oil. A base oil with a lower viscosity index helps the transformer oil blended with it to absorb the heat from transformer components such as windings, and bring the heat away faster. In the past naphthenic base oils with a viscosity index of about 45 or less had to be used in transformer oils for effective heat removal. Transformer operating temperatures can reach up to 80°C, up to 140°C, or even higher, and the transformer oils made from the base oil work well under these high operating temperatures.

The base oil has a low cloud point. In some embodiments the cloud point can be less than -25°C, less than -40°C, less than -45°C, less than -50°C, less than -55°C, or even less than -60°C. The base oil also has a low pour point, generally less than -10°C. In some embodiments the pour point can be from -20°C to -50°C.

In some embodiments the base oil is a bright stock. Bright stock is named for the SUS viscosity of the base oil at 210°F, and bright stock has a kinematic viscosity above 180 mm²/s at 40 °C, such as above 250 mm²/s at 40 °C, or possibly ranging from 500 to 1100 mm²/s at 40 °C.

In one embodiment the base oil has a broad boiling range. The boiling range of the base oils is generated by simulated distillation using SIMDIST. SIMDIST involves the use of ASTM D 6352-04 or ASTM D 2887-08 as appropriate. ASTM D 6352-04 and ASTM D 2887-08 are incorporated herein by reference in their entirety.

A broad boiling range is a difference between the T90 and T10 boiling points of at least 225°F by SIMDIST. In some embodiments the base oil has a difference between the T90 and T10 boiling points of at least 225°F, 250°F, 275°F, or 300°F. Because of the broad boiling range, the base oil may comprise two or more viscosity grades of base oil. A viscosity grade of base oil is base oil that differs from another viscosity grade of base oil by having a difference in kinematic viscosity at 100°C of at least 0.5 mm²/s. The different viscosity grades of base oil in the base oil recovered from one or both of the oligomerizing or alkylating steps may be separated by vacuum distillation. One of the different viscosity grades of base oil may be a distillate bottoms product.

In one embodiment the base oil comprises a significant wt% of hydrocarbons boiling at 900°F or higher. The level can be greater than 25 wt%, greater than 35 wt%, or from 45 to 70 wt%. Higher levels of hydrocarbons boiling at 900°F or higher are desired, as there are increasingly limited amounts of base oils with these properties, especially as Group I base oil plants are being shut down.

Tuning the Process

Sometimes there is an increased demand for one or more base oils having a selected kinematic viscosity. In one embodiment the set of alkylating conditions or oligomerizing conditions are tuned to optimize a yield of the base oil having a selected kinematic viscosity or a selected viscosity index. For example, by additionally including mixing one or more longer chain alpha olefins with the olefin feed, the viscosity index of the base oil is increased. A longer chain alpha olefin feed comprises C6+ olefins. For example, the longer chain alpha olefin can comprise a C6, a C7, a C8, a C9, a C10, a C11, a C12 or an even higher carbon number alpha olefin, or mixtures thereof. In one embodiment the one or more longer chain alpha olefins comprise a C6 to a C20 alpha olefin, a C6 to a C12 alpha olefin, or a mixture thereof.

In some embodiments, the higher the carbon number of the longer chain alpha olefin that is mixed with the olefin feed comprising a propylene, the higher the viscosity index of the base oil produced at the same degree of incorporation of the longer chain alpha olefin into the oligomer product. In some embodiments, the higher

the carbon number of the longer chain alpha olefin that is mixed with the olefin feed comprising a propylene, the lower the kinematic at 100°C of the base oil produced at the same degree of incorporation of the longer chain alpha olefin into the oligomer product.

5 Raising the temperature during the oligomerizing, in some embodiments, can produce a higher viscosity base oil.

 In some embodiments, the set of oligomerizing conditions or set of alkylating conditions are selected, or tuned, to optimize a yield of one of the two or more viscosity grades of base oil. For example the ratio of an isoparaffin to an olefin can
10 be adjusted up to favor more alkylation and less oligomerization, such that a yield of a lighter viscosity grade of base oil is increased. Alternatively, the amount of a Brönsted acid or other proton source in either the oligomerization zone or the alkylation zone may be adjusted up or down to optimize a yield of a base oil having a selected kinematic viscosity.

15 The alkylating optionally can occur under effectively the same conditions as the oligomerizing. This finding that alkylation and oligomerization reactions can occur using effectively the same ionic liquid catalyst system and optionally under similar or even the same conditions can be used to make a highly integrated, synergistic process resulting in a base oil with desired properties. Also in a particular
20 embodiment the alkylating and oligomerizing can occur simultaneously under the same conditions.

 In one embodiment the ionic liquid oligomerization zone, or the ionic liquid alkylation zone, comprises an acidic chloroaluminate ionic liquid catalyst.

 In some embodiments both the ionic liquid oligomerization and the ionic liquid
25 alkylation zones comprise an acidic chloroaluminate ionic liquid catalyst. In some embodiments, the same acidic chloroaluminate ionic liquid catalyst is used in both zones.

 The oligomerizing and the alkylating can be performed concurrently or separately. An advantage of combining the oligomerizing and alkylating is lower
30 capital and operating costs. An advantage of a 2 step process (oligomerizing followed by alkylating in a separate zone) is that the two separate reaction zones can be optimized independently. Thus the oligomerization conditions can be different than the alkylation conditions. Also the ionic liquid catalyst can be different in the

different zones. For instance, it may be preferable to make the alkylation zone more acidic than the oligomerization zone. This may involve the use of an entirely different ionic liquid catalyst in the two zones or one of the zones can be modified, for example, by the addition of a Brönsted acid to the alkylation zone.

5 In one embodiment, the ionic liquid catalysts used in the ionic liquid alkylation zone and in the ionic liquid oligomerization zone are the same. This helps save on catalyst costs, potential contamination issues, and provides synergy opportunities in the process.

10 Ionic Liquid Catalyst

 “Ionic liquids” are liquids whose make-up is comprised of ions as a combination of cations and anions. Ionic liquids are a class of compounds made up entirely of ions and are generally liquids at ambient and near ambient temperatures.
15 Ionic liquids tend to be liquids over a very wide temperature range, with some having a liquid range of up to 300°C or higher. Ionic liquids are generally non-volatile, with effectively no vapor pressure. Many are air and water stable, and can be good solvents for a wide variety of inorganic, organic, and polymeric materials.

 The most common ionic liquids are those prepared from organic-based
20 cations and inorganic or organic anions. The properties of ionic liquids can be tailored by varying the cation and anion pairing. Ionic liquids and some of their commercial applications are described, for example, in J. Chem. Tech. Biotechnol., 68:351-356 (1997); J. Phys. Condensed Matter, 5:(supp 34B):B99-B106 (1993); Chemical and Engineering News, Mar. 30, 1998, 32-37; J. Mater. Chem., *:2627-
25 2636 (1998); and Chem. Rev., 99:2071-2084 (1999), the contents of which are hereby incorporated by reference.

 Many ionic liquids are amine-based. Among the most common ionic liquids are those formed by reacting a nitrogen-containing heterocyclic ring (cyclic amines), or nitrogen-containing aromatic rings (aromatic amines), with an alkylating agent (for
30 example, an alkyl halide) to form a quaternary ammonium salt, followed by ion exchange with Lewis acids or halide salts, or by anionic metathesis reactions with the appropriate anion sources to introduce the desired counter anion to form ionic liquids.

Examples of suitable heteroaromatic rings include pyridine and its derivatives, imidazole and its derivatives, and pyrrole and its derivatives. These rings can be alkylated with varying alkylating agents to incorporate a broad range of alkyl groups on the nitrogen including straight, branched or cyclic C₁₋₂₀ alkyl group, but preferably
5 C₁₋₁₂ alkyl groups since alkyl groups larger than C₁-C₁₂ may produce undesirable solid products rather than ionic liquids. Pyridinium and imidazolium-based ionic liquids are perhaps the most commonly used ionic liquids. Other amine-based ionic liquids including cyclic and non-cyclic quaternary ammonium salts are frequently used. Phosphonium and sulphonium-based ionic liquids have also been used.

10 Anions which have been used in ionic liquids include chloroaluminate, bromoaluminate, gallium chloride, tetrafluoroborate, tetrachloroborate, hexafluorophosphate, nitrate, trifluoromethane sulfonate, methylsulfonate, p-toluenesulfonate, hexafluoroantimonate, hexafluoroarsenate, tetrachloroaluminate, tetrabromoaluminate, perchlorate, hydroxide anion, copper dichloride anion, iron
15 trichloride anion, antimony hexafluoride, copper dichloride anion, zinc trichloride anion, as well as various lanthanum, potassium, lithium, nickel, cobalt, manganese, and other metal ions.

The presence of the anion component of the ionic liquid catalyst should give the ionic liquid a Lewis or Franklin acidic character. Generally, the greater the mole
20 ratio of the anion component to the cation component, the greater is the acidity of the ionic liquid mixture.

In some embodiments, the ionic liquid catalysts are acidic haloaluminates, such as acidic chloroaluminate ionic liquid catalysts. To be effective at alkylation the ionic liquid catalyst is acidic.


25 In one embodiment the ionic liquid catalyst is a quaternary ammonium chloroaluminate ionic liquid having the general formula RR' R'' N H⁺ Al₂Cl₇⁻, wherein RR' and R'' are alkyl groups containing 1 to 12 carbons. Examples of quaternary ammonium chloroaluminate ionic liquid salts are an N-alkyl-pyridinium chloroaluminate, an N-alkyl-alkylpyridinium chloroaluminate, a pyridinium hydrogen
30 chloroaluminate, an alkyl pyridinium hydrogen chloroaluminate, a 1-butyl-pyridinium chloroaluminate, a di-alkyl- imidazolium chloroaluminate, a tetra-alkyl-ammonium chloroaluminate, a tri-alkyl-ammonium hydrogen chloroaluminate, or a mixture thereof.

In one embodiment, the acidic chloroaluminate ionic liquid catalyst is an acidic pyridinium chloroaluminate. Examples are alkyl-pyridinium chloroaluminates. In one embodiment, the acidic chloroaluminate ionic liquid catalyst is an alkyl-pyridinium chloroaluminate having a single linear alkyl group of 2 to 6 carbon atoms in length.

5 One particular acidic chloroaluminate ionic liquid catalyst that has proven effective is 1-butyl-pyridinium chloroaluminate.

For example, a typical reaction mixture to prepare n-butyl pyridinium chloroaluminate ionic liquid salt is shown below:

10

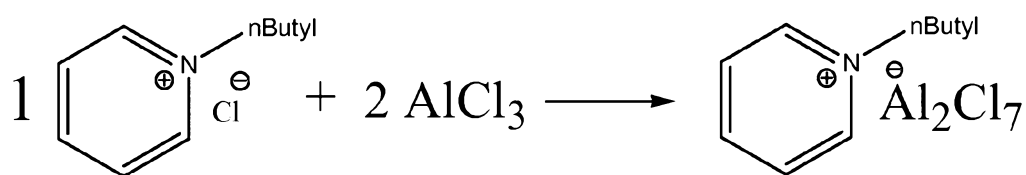

15

In an optional embodiment the base oil can be hydrogenated to decrease the concentration of olefins in the base oil and thus reduce the Bromine Number. After
20 hydrogenation, the base oil has a Bromine Number of less than 0.8, for example less than 0.5, less than 0.3, or less than 0.2.

Transformer Oil Additives

25 The base oils described herein, are blended with one or more additives to provide a transformer oil. When used, the one or more additives are present in an effective amount. The effective amount of additives or additives used in the transformer oil is that amount that imparts the desired property or properties. It is undesirable to include an amount of additives in excess of the effective amount. The
30 effective amount of additives is relatively small, generally less than 1.5 weight % of the transformer oil, preferably less than 1.0 weight %, as the transformer oils are very responsive to small amounts of additives.

The additives that may be used with transformer oils comprise pour point depressants, antioxidants, and metal deactivators (also known as metal passivators when they deactivate copper). A review of the different classes of lubricant base oil additives may be found in "Lubricants and Lubrication", edited by Theo Mang and
5 Wilfried Dresel, pp. 85-114.

Pour point depressants lower the pour point of oils by reducing the tendency of wax, suspended in the oils, to form crystals or a solid mass in the oils, thus preventing flow. Examples of useful pour point depressants are polymethacrylates; polyacrylates; polyacrylamides; condensation products of haloparaffin waxes and
10 aromatic compounds; vinyl carboxylate polymers; and terpolymers of dialkylfumarates, vinyl esters of fatty acids and alkyl vinyl ethers. Pour point depressants are disclosed in U.S. Pat. Nos. 4,880,553 and 4,753,745, which are incorporated herein by reference. The amount of pour point depressants added is preferably between about 0.01 to about 1.0 weight percent of the transformer oil.

Excellent oxidation stability is an important property for transformer oil.
15 Transformer oils without sufficient oxidation stability are oxidized under the influence of excessive temperature and oxygen, particularly in the presence of small metal particles, which act as catalysts. With time, the oxidation of the oil can result in sludge and deposits. In the worst case scenario, the oil canals in the equipment
20 become blocked and the equipment overheats, which further exacerbates oil oxidation. Oil oxidation may produce charged by-products, such as acids and hydroperoxides, which tend to reduce the insulating properties of the transformer oil. The transformer oils described herein generally have excellent oxidation stability without the addition of antioxidant. However, when additional oxidation stability is
25 desired, antioxidants may be added. Examples of antioxidants useful in the present invention are phenolics, aromatic amines, compounds containing sulfur and phosphorus, organosulfur compounds, organophosphorus compounds, and mixtures thereof. The amount of antioxidants added is preferably between about 0.001 to about 0.3 weight % of the transformer oil of the present invention.

30 Metal deactivators that passivate copper in combination with antioxidants show strong synergistic effects as they prevent the formation of copper ions, suppressing their behavior as pro-oxidants. Metal deactivators useful in transformer oils comprise triazoles, benzotriazoles, tolyltriazoles, and tolyltriazole derivatives. The amount of

metal deactivators added is preferably between about 0.005 to about 0.8 weight % of the transformer oil.

An example of an additive system that may be useful in transformer oil is disclosed in U.S. Pat. No. 6,083,889, incorporated herein by reference.

5 For the purposes of this specification and appended claims, unless otherwise indicated, all numbers expressing quantities, percentages or proportions, and other numerical values used in the specification and claims, are to be understood as being modified in all instances by the term "about." Furthermore, all ranges disclosed herein are inclusive of the endpoints and are independently combinable. Whenever
10 a numerical range with a lower limit and an upper limit are disclosed, any number falling within the range is also specifically disclosed.

Any term, abbreviation or shorthand not defined is understood to have the ordinary meaning used by a person skilled in the art at the time the application is filed. The singular forms "a," "an," and "the," include plural references unless
15 expressly and unequivocally limited to one instance.

All of the publications, patents and patent applications cited in this application are herein incorporated by reference in their entirety to the same extent as if the disclosure of each individual publication, patent application or patent was specifically and individually indicated to be incorporated by reference in its entirety.

20 This written description uses examples to disclose the invention, including the best mode, and also to enable any person skilled in the art to make and use the invention. Many modifications of the exemplary embodiments of the invention disclosed above will readily occur to those skilled in the art. Accordingly, the invention is to be construed as including all structure and methods that fall within the
25 scope of the appended claims.

EXAMPLES

Example 1: Oligomerization of Pure Propylene

30 A 300 cc autoclave was charged with 20 gm of ionic liquid catalyst (n-butylpyridinium heptachloroaluminate) and 20 gm n-hexane (as diluent) under nitrogen in a glove box. The autoclave was sealed and removed from the glove box and cooled in a dry ice bath and affixed to a propylene tank (>99% commercial grade) via an inlet that

allows the flow of propylene into the reactor where 100 gm of propylene was transferred to the reactor (autoclave). The reactor was affixed to an overhead stirrer. The reaction temperature was controlled by a thermocouple connected to a temperature control apparatus. Once everything was in place, the reaction began by slowly stirring the charge in the reactor at 0°C in a batch-style operation. The reaction was exothermic and the rise in temperature was quick and sudden. The rise in temperature was controlled by immersing the autoclave in an ice bath. The reaction temperature was kept at around 50°C. The pressure of the reaction began very high and decreased as the propylene was oligomerized. The reaction was allowed to proceed for 15-30 minutes. The reaction, then, was stopped and the reactor was allowed to cool to room temperature. The reaction was worked up by simply decanting off the organic layer (the products). The remaining ionic liquid phase was washed with hexane to remove all residual organics from the ionic liquid phase, and the wash was added to the original decant. The organic layer was then washed thoroughly with water and dried over anhydrous MgSO₄ and then filtered. The filtrate was concentrated on a rotary evaporator to remove hexane (used as solvent to extract oligomers from the catalyst). The heavy viscous colorless oil was then analyzed for boiling range, viscosity index, kinematic viscosity at 100°C and 40°C, pour point and cloud point. Colorless means that the base oil has <0.5 ASTM Color by ASTM D 1500-07. The products were analyzed for their boiling range by simulated distillation analysis. The reaction yields and propylene conversions varied depending on the duration of the run. The oligomers yielded ranges from 60->90 wt% depending on the length of the reaction. Table 1 summarizes the properties of propylene oligomerization products with pure propylene and in the presence of other olefins.

Example 2: Oligomerization of refinery propylene

Using the procedure described above, refinery propylene feed containing 77% propylene and 23% propane was oligomerized according to the procedure of example 1. The products and selectivity were identical for the oligomerization of the pure propylene where viscosity index, viscosity, and low temperature properties (cloud point and pour point) were very similar. The base oil was also colorless.

There was no indication that the presence of propane caused any problems for the oligomerization reaction.

Example 3: Oligomerization of propylene in the presence of 1-hexene

5

Using the procedure described in example 1, propylene (90 gm) was oligomerized in the presence of 1-hexene (12 gm). Once the autoclave was charged with the catalyst, it was cooled to -30C (dry ice bath) and 1-hexene was added to minimize oligomerization of 1-hexene before the addition of propylene. Then propylene was also added at this low temperature and the dry ice bath was removed. The reaction was allowed to proceed as described in example 1. The reaction afforded 72 gm of oligomers. See Table 1 for the properties of the oligomers.

Example 4: Oligomerization of propylene in the presence of 1-octene

15

Using the procedure described in example 3, propylene (90 gm) was oligomerized in the presence of 1-octene (15 gm). The reaction yielded 75 gm of oligomers. The properties of the oil are shown in Table 1.

Example 5: Oligomerization of propylene in the presence of 1-decene

20

Using the procedure described in example 3, propylene (90 gm) was oligomerized in the presence of 1-decene (20 gm). The reaction yielded 78 gm of oligomers. The properties of the oil are shown in Table 1.

25

Example 6: Oligomerization of propylene in the presence of 1-dodecene

Using the procedure described in example 3, propylene (80 gm) was oligomerized in the presence of 1-dodecene (20 gm). The reaction yielded 66 gm of oligomers. The properties of the oil are shown in Table 1.

30

Example 8: Oligomerization of propylene in the presence of C6-C12 olefinic mixture

Using the procedure described in example 3, propylene (90 gm) was oligomerized in the presence of 1-hexene (1.5 gm), 1-octene (2 gm), 1-decene (2.5 gm), and 1-dodecene (3 gm). The reaction yielded 64 gm of oligomers. The properties of the oil are shown in Table 1.

Table 1

	VI	Pour Point, °C	Cloud Point, °C.	KVis _{40C}	KVis _{100C}	Boiling Range, °F	900°F+, Wt%
Pure Propylene	50	-19	<-60	268	17	390-1300	55
Propylene/C3 (77:23)	48	-21	<-60	297	18	450-1330	60
Propylene/C6 [±] -C ¹²	55	-20	<-60	290	18	457-1330	59
Propylene/C6 [±]	55	-24	<-60	245	16	460-1315	57
Propylene/C8 [±]	65	-27	<-60	177	14	458-1354	55
Propylene/C10 [±]	70	-31	<-60	169	14	420-1291	62
Propylene/C12 [±]	78	-31	<-60	153	13	420-1260	62

Example 9

Oligomerization of Propylene

Oligomerization of propylene in the absence of isoparaffins or iso-olefins, was done by mixing the propylene with a 1-Butyl-pyridinium chloroaluminate ionic liquid catalyst and a small amount of HCl as a promoter. By adding a component that supplied protons, HCl, a base oil with a higher kinematic viscosity was produced. The amount of Brönsted acid needed for the reaction was very small, and can be in catalytic amounts ranging from 0.1 gram to 1 gm. The presence of ppm levels of water in the feed was sufficient to produce the required amounts of protons.

A bright stock oil with the properties summarized in Table 2 was produced.

Table 2

Kinematic Viscosity at 40°C, mm ² /s	572
Kinematic Viscosity at 100°C, mm ² /s	25
Viscosity Index	36
Pour Point, °C	-25
Cloud Point, °C	<-60

2010282772 21 Mar 2014

What is claimed is:

1. A base oil, comprising one or more oligomerized olefins, wherein the base oil has:

- a. a kinematic viscosity at 100°C of 13 mm²/s or greater;
- b. a viscosity index from 25 to 90; and
- c. a cloud point less than -55°C.

2. The base oil according to claim 1, additionally having from 45 to 70 wt% of hydrocarbons boiling at 900°F or higher.

3. The base oil according to any one the preceding claims, wherein the one or more oligomerized olefins comprise a propylene.

4. The base oil according to any one of the preceding claims, wherein the kinematic viscosity at 100°C is from 15 to 30 mm²/s.

5. The base oil according to any one of the preceding claims, wherein the cloud point is less than -60°C.

6. The base oil according to any one of the preceding claims, additionally having a pour point from -20 to -50°C.

7. The base oil according to claim 3, wherein the propylene is produced in a FCC unit.

8. The base oil according to any one of the preceding claims, wherein the one or more oligomerized olefins are made in an oligomerization zone comprising an ionic liquid catalyst.

2010282772
21 Mar 20142010282772
10

9. The base oil according to claim 8, wherein the ionic liquid catalyst is selected from the group of amine-based, phosphonium-based, sulphonium-based, and mixtures thereof.
- 5 10. The base oil of claim 8 or 9, wherein the ionic liquid catalyst is an acidic chloroaluminate.
11. The base oil of claim 10, wherein the ionic liquid catalyst is an alkyl-pyridinium chloroaluminate.
12. A base oil made by oligomerizing propylene in an ionic liquid catalyst, where the base oil has a kinematic viscosity at 100°C of 13 mm²/s or greater, viscosity index from 25 to 90 and the base oil is colorless.
- 15 13. The base oil of claim 12, wherein the base oil additionally has a kinematic viscosity at 100°C from 15 to 30 mm²/s.
14. The base oil of claim 12 or 13, wherein the base oil additionally has a cloud point less than -40°C.
- 20 15. The base oil of claim 14, wherein the cloud point is less than -50°C.
16. The base oil of claim 15, wherein the cloud point is less than -60°C.
- 25 17. A base oil made by oligomerizing an olefin feed comprising propylene in an acidic alkyl-pyridinium chloroaluminate ionic liquid, wherein the base oil has a kinematic viscosity at 100°C of 13 mm²/s, or greater, a viscosity index from 25 to 90, and a cloud point less than -55°C.
- 30 18. The base oil of any one of claims 1 to 11, wherein the base oil is colorless.
19. The base oil according to any one of the preceding claims, additionally comprising one or more additives to make a transformer oil.

2010282772 21 Mar 2014

20. The base oil of any one of the preceding claims, wherein the viscosity index is from 25 to 70.