



- (51) International Patent Classification:
B60P 1/44 (2006.01) *A61G 3/06* (2006.01)
- (21) International Application Number:
PCT/US2018/045496
- (22) International Filing Date:
07 August 2018 (07.08.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/541,803 07 August 2017 (07.08.2017) US
- (71) Applicant: **THE BRAUN CORPORATION** [US/US];
631 W. 11th Street, Winamac, IN 46996 (US).
- (72) Inventors: **KLINE, Justin**; 1251 Hazy Falls Blvd., West-
field, IN 46074 (US). **BETTCHER, Robert, E.**; 631 W.
11th Street, Winamac, IN 46996 (US).
- (72) Inventor: **BUDD, Alfred, Lewis** (*deceased*).
- (72) Inventors: **ACKERMAN, Jeff**; 15729 W. 65th Pl., Arva-
da, CO 80007 (US). **LI, Chih-wei**; 4649 Dogewood Ave.,
Seal Beach, CA 90740 (US). **ALLU, Sashank**; 12 Ross Ade
Drive, Apt. 1, West Lafayette, IN 47906 (US).

(74) Agent: **ROST, Stephen**; Taft Stettinius & Hollister LLP,
One Indiana Square, Suite 3500, Indianapolis, IN 46204
(US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) Title: MOVABLE BASEPLATE COVER AND INBOARD BARRIER GATE OF A LIFT SYSTEM FOR A MOTORIZED VEHICLE

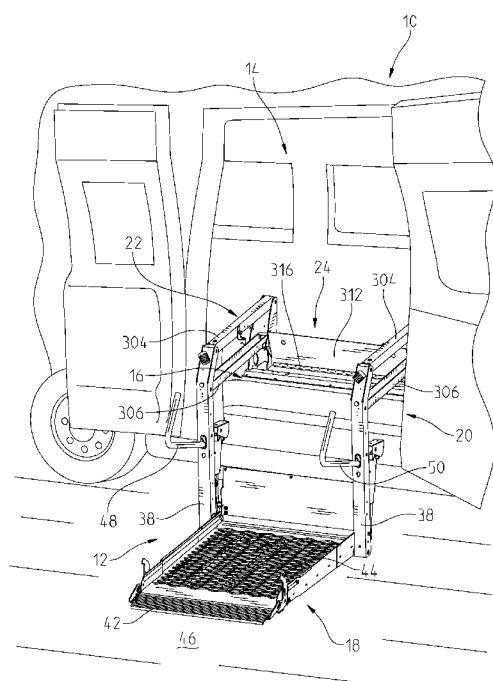


Fig. 1

(57) Abstract: A barrier configured to be located at a door a vehicle having a lift platform to enable an individual using a mobility device to exit and to enter an interior of the vehicle. The barrier includes a support base configured to be fixedly coupled to the vehicle. A first side and a second side each extend from the support base are spaced apart to define an access location for the individual using the mobility device. A barrier gate or a barrier plate include an entry position and a blocking position wherein, in at least one embodiment, movement of the lift platform moves the barrier plate from the entry position to the blocking position.

Published:

— *with international search report (Art. 21(3))*

**MOVABLE BASEPLATE COVER AND INBOARD BARRIER GATE OF A LIFT
SYSTEM FOR A MOTORIZED VEHICLE**

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Patent Application Serial No. 62/541,803, filed August 7, 2017, having the title “Movable Baseplate Cover and Inboard Barrier Gate of a Ramp System for a Motorized Vehicle”, the disclosure of which is incorporated herein by reference in its entirety.

FIELD OF THE DISCLOSURE

[0002] The present disclosure relates to a lift assembly for facilitating mobility-challenged individual's ascent to and descent from a structure, particularly, the present disclosure relates to retractable lifts used in motorized vehicles for efficient ingress and egress by wheelchair or scooter occupants.

BACKGROUND

[0003] Vehicles that provide transportation, such as taxis and the like, can be adapted for mobility-challenged individuals in order to provide such individuals the ability to travel in a manner similar to ambulatory passengers. Some of these vehicles have consisted of full-sized vans having an electrical or hydraulic powered wheelchair lift installed on the vehicle to assist wheelchair occupants into and out of the van. These lifts consisted of a horizontal platform that translates vertically to allow the wheelchair or scooter occupant easy access from ground level to the interior of the vehicle for transport. Other vehicles may have a ramp that can be electrically, hydraulically, or manually operated.

[0004] Some form of lift allows the wheelchair occupant to be transported from the ground external to the vehicle to the floor within the modified vehicle. The lift is typically stored in a vertical position in the rear or slide door entrance of the vehicle. To access the lift, the lift may be rotated outwardly about a pivot consisting of the lower end of the lift located approximately at the floor of the van, until the opposite end of the lift comes into contact with the ground.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The above-mentioned aspects of the present disclosure and the manner of obtaining them will become more apparent and the disclosure itself will be better understood by reference to the following description of the embodiments of the disclosure, taken in conjunction with the accompanying drawings, wherein:

[0006] FIG. 1 is a side view of a vehicle capable of transporting a mobility-challenged individual including a deployed lift system;

[0007] FIG. 2 is a rear perspective view of a lift system including a lift in a stowed vertical position before being deployed for moving a mobility-challenged individual;

[0008] FIG. 3 is a perspective view of a baseplate cover assembly of a lift system;

[0009] FIG. 4 is a side cross-sectional view of the lift system and baseplate cover assembly in a first position;

[0010] FIG. 5 is a side cross-sectional view of the lift system and baseplate cover assembly in a second position;

[0011] FIG. 6 is a side cross-sectional view of the lift system and baseplate cover assembly in a third position;

[0012] FIG. 7 is a side perspective view of a barrier gate in a stowed position of a lift system; and

[0013] FIG. 8 is another side perspective view of the barrier gate of FIG. 7; and

[0014] FIG. 9 is a perspective view of the barrier gate in the deployed position.

[0015] Corresponding reference numerals are used to indicate corresponding parts throughout the several views.

DETAILED DESCRIPTION

[0016] The embodiments of the present disclosure described below are not intended to be exhaustive or to limit the disclosure to the precise forms disclosed in the following detailed description. Rather, the embodiments are chosen and described so that others skilled in the art may appreciate and understand the principles and practices of the present disclosure.

[0017] Referring now to FIG. 1, a vehicle 10 adapted for transporting a mobility-challenged individual is shown. The vehicle 10 can be a van, taxi, bus, or any other type of vehicle capable of transporting a mobility-challenged individual. In FIG. 1, a side of the vehicle 10 is shown having a powered lift-gate 12 capable of being electrically, hydraulically, mechanically, or manually raised or lowered. The vehicle 10 includes an access opening 14 located on the side of the vehicle 10.

[0018] The lift 12 is mounted to a floor 16 of the vehicle 10. The parallelogram lift 10 comprises a platform assembly 18 (also referred to herein as the “lift platform”), coupled to a first parallelogram arm lifting assembly linkage 20 and a second parallelogram arm lifting assembly linkage 22. A vehicle mounting base assembly 24 includes a baseplate cover 312 and a support plate 316.

[0019] Each parallelogram arm lifting assembly 20 and 22 includes an upper arm 304, a lower arm 306, and an end link 38, which are coupled to the platform assembly 18. The platform assembly 18 is pivotally connected to the end links 38. In accordance with certain aspects herein, the vehicle lift 12 can employ a system or assembly of linkage members, such as arms, to move and synchronize extension and retraction of the platform assembly out of and into the vehicle 10. An end ramp 42 extending from an end of the platform 18 provides a transition from a ground plate 44 to the ground surface 46. A first arm rest 48 extends from one of the end links 38 and a second arm rest 50 extends from the other of the end link 38. While the lift 10 is at the ground level loading position of FIG. 1, the wheelchair user rolls onto the ground 46. Each end link 38 is provided with one of the arm rests 48 and 50 which are utilized by the wheelchair user as arm rests for auxiliary support during lifting. The arms 48 and 50 are pivotally connected to the end links 38 such that as the platform is caused to tilt upward during folding, the arms 48 and 50 pivot to a closed position as shown in FIG. 2.

[0020] FIG. 2 illustrates a rear perspective view of one embodiment of a lift assembly 300 of the lift 12 from a vantage point of inside the vehicle looking toward the outside of the vehicle. In this embodiment, the lift assembly is in a collapsed vertical position. FIGS. 3, 4, 5, and 6 illustrate further details of the lift 300.

[0021] Referring to the embodiment of FIGS. 2-6, the lift assembly 300 is disclosed. The lift assembly 300 includes a support base 332 that may be mounted to a floor of a vehicle via any

conventional means. The lift assembly 300 also includes a base 302 formed on opposite sides of one another to define an access location. The base 302 may be formed integrally with the support base 332, or it may be coupled thereto. In any event, a pair of arms is pivotally coupled to the base 302 for raising and lowering a lift. In FIG. 3, the pair of arms includes the first or upper arm 304 and the second or lower arm 306. The arms 304, 306 may be configured to be substantially parallel to one another. Moreover, the upper arm 304 may be pivotally coupled to the base 302 via a pin at a first pivot location 308, and the lower arm 306 may be pivotally coupled to the base 302 via a pin at a second pivot location 310.

[0022] As there is a base 302 and pair of arms on one side of the lift, there is also a base and pair of arms on the opposite side thereof. The pair of arms may be pivotally moved between a plurality of positions in order to move the lift (not shown) between a stowed position and a fully extended position.

[0023] The lift assembly 300 further includes the baseplate cover 312 as shown in FIGS. 2-6. The baseplate cover 312 may be a substantially flat structure with an angled portion 314 formed at an end of the cover 312 furthest from the interior of the vehicle. The angled portion 314 facilitates movement of a wheelchair or scooter, generally known as mobility devices, onto and off of the lift. Other types of mobility devices are contemplated.

[0024] The baseplate cover 312 may be disposed in a substantially flat orientation as shown in FIGS. 3 and 4. At an opposite end of the angled portion 314, however, is a pivot linkage 318 which defines a pivot axis. The baseplate cover 312 may pivot about the pivot axis via the pivot linkage 318. This is described below.

[0025] In addition to the baseplate cover 312, the lift assembly 300 further includes a support plate 316 which may be fixedly mounted to the support base 332. The support plate 316 does not pivot and is not coupled to the pivot linkage 318. Rather, the support plate 316 provides a substantially flat surface upon which a wheelchair or scooter may traverse along before coming into contact with the baseplate cover 312 when moving to the lift.

[0026] The baseplate cover 312 is shown as being substantially flat, but it also may include a pair of ears 320 at opposite sides thereof. The pair of ears 320 protrude to be substantially perpendicular to the rest of the baseplate cover 312. Each ear 320 is pivotally coupled via a pivot 324 to a link arm 322. The link arm 322 is a substantially flat structure that has a first end pivotally

coupled to the ear 320, and a second end that defines a slot 330 therein. Due to the size and length of the slot 330, the second end of the link arm 322 is wider than the first end.

[0027] The slot 330 may be partially arcuate. Alternatively, the slot 330 may be mostly straight. In any event, a pin 326 may be slidably disposed within the slot 330 as shown in FIGS. 3-6. The pin 326 may include a cap 328 or other structure for holding the pin 326 within the slot 330. In effect, the pin 326 may function as a pivot pin. The pin 326 may be coupled via a bracket 402 (FIG. 4) to the lower arm 306. Thus, as the lower arm 306 moves to raise and lower the lift, the pin 326 is free to slide within the slot 330.

[0028] As shown in FIGS. 3 and 4, the baseplate cover 312 is shown in its lowered position. As shown in FIG. 4, the baseplate cover 312 is disposed toward an exterior side 404 of the vehicle, whereas the support plate 316 is disposed toward an interior side 406 thereof. In addition, in this position, the lift may be in its stowed position or has not lowered to a position below the vehicle floor.

[0029] As the upper and lower arms 304, 306 are pivotally actuated by one or more actuators, the lift may be lowered to a ground or surface level that is below the entrance to the vehicle. Accordingly, as the lower arm 306 particularly pivots it induces movement of the link arm 322 which is again coupled thereto via the pin 326 and slot 330 arrangement. The pin 326 may begin to move within the slot 330 as the lower arm 306 pivots, an example of which is shown in FIG. 5. In FIG. 5, the pin 326 moves within the slot 330 and causes the link arm 322 to pivotally move the ear 320 of the baseplate cover 312 to rotate in a counterclockwise direction 502. As the ear 320 rotates in this direction, the baseplate cover 312 begins to pivot about the pivot linkage 318 in a counterclockwise direction 502 as well. In FIG. 5, the baseplate cover 312 is shown in an intermediate position 500 between its fully lowered position 400 and a fully raised position 600.

[0030] Once the lift is lowered to a ground or surface level, which in at least one instance, will be the furthest to which the lift may be lowered, the baseplate cover 312 is pivotally moved to its raised position 600 in FIG. 6. As shown, the baseplate cover 312 is disposed substantially vertically and at nearly a right angle to the support plate 316. See also FIG. 1. In other words, the baseplate cover 312 may be capable of being pivoted approximately 90° from its lowered position in FIG. 4 to its raised position in FIG. 6. Moreover, the baseplate cover 312 is capable of being moved to any position therebetween.

[0031] In the position of FIG. 6, the pin 326 may also reach an opposite end of the slot 330 defined in the link arm 322. In other words, the pin 326 may move the entire length of the slot between the lowered position 400 of FIG. 4 and the raised position 600 of FIG. 6. In another embodiment, however, it is possible the pin 326 does not traverse the entire slot 330 but may only travel along a portion thereof. In any event, as the lift is lowered and the pair of arms 304, 306 are pivotally actuated, the pin 326 may slide in the slot 330 defined in the link arm 322 thereby causing the link arm 322 to pivot the ear 320 and baseplate cover 312 about the pivot linkage 318 between a lowered position 400 and raised position 600.

[0032] As seen in FIG. 1 and FIG. 6, when the baseplate cover 312 is in the raised position, the baseplate cover 312 provides a barrier to prevent movement of an individual using a mobility device to move from the interior to the exterior of the vehicle 10. By moving the platform 42 to the ground position, the baseplate cover 312 is moved to the barrier position without further intervention by an individual and as such provides an additional degree of safety. As the platform 42 is moved from the ground position to a relatively horizontal position aligned with the floor 16 of the vehicle, the baseplate cover 312 returns to the planar position of FIG. 3 to enable the wheelchair to move from the platform 42 into the interior of the vehicle.

[0033] In another embodiment of the present disclosure, a lift assembly may be provided with another embodiment of a barrier gate assembly as described in FIGS. 7, 8, and 9. The barrier gate assembly may be provided for improved safety around a lift assembly that may be raised and lowered via the lift assembly. For example, the lift assembly may be accessed from a side or rear entry of a vehicle. The lift assembly may have a defined width to allow a wheelchair or scooter to enter or exit. Moreover, the lift assembly may be raised and lowered to allow a passenger of the wheelchair or scooter to be transported to or from the interior of the vehicle. With the lift assembly disposed in its lowered position such that the lift platform may be in contact with a ground surface, the barrier gate may be oriented to prevent another passenger inside the vehicle from being injured by slipping or falling out of the vehicle. The barrier gate assembly may provide additional advantages and benefits as described herein and known by one skilled in the art.

[0034] In FIG. 7, a portion of a lift assembly 700 is shown. It is worth noting that the lift platform assembly is not shown to allow for other features of the lift assembly 700 and a barrier gate assembly 702 to be more clearly illustrated. The lift assembly 700 may be any conventional

lift assembly known to the skilled artisan. For instance, the lift assembly 700 may include a first upper arm 704 and a second lower arm 706, similar to the pair of arms 304, 306 described previously. The upper arm 704 and lower arm 706 may be substantially parallel to one another, although this is not required for all embodiments. More importantly, this disclosure is not limited to the arms being parallel to one another. The upper arm 704 and lower arm 706 may be pivotally coupled to a base 708 via one or more pivot pins 714 which is further coupled or mounted to a support base 722.

[0035] The upper arm 704 and lower arm 706 may be pivotally actuated by one or more actuators (not shown). The one or more actuators may include an electric actuator, a mechanical actuator, a hydraulic actuator, an electro-mechanical actuator, or any other type of actuator. A motor or other power-generating device (not shown) may power the one or more actuators. Other means may be used to pivotally actuate or move the upper and lower arms, and this disclosure is not limited to any particular means for doing so.

[0036] The upper arm 704 and lower arm 706 may be operably controlled to raise and lower the lift platform to allow a passenger of a wheelchair or scooter to enter or exit the interior of the vehicle. This is similar to the embodiments previously described herein.

[0037] The barrier gate assembly 702 may include a plurality of brackets. As shown in FIG. 7, an upper bracket 710 may be coupled to the base 708 and defines a first slot 716. A lower bracket 712 may be coupled to the base 708 as well at a location below the upper bracket 710. The lower bracket 712 may also include a slot 718 defined therein. Each slot may receive a portion of the barrier gate assembly 702 in the deployed position (see FIG. 9).

[0038] The barrier gate assembly 702 further includes a barrier gate formed by a plurality of members. For example, as shown in FIGS. 7 and 8, the barrier gate may include a bottom gate member 734, a top gate member 736, an extension member 738, a side member 470 and a cross member 742. The extension member 738 may be slidably disposed and coupled within the top gate member 736. In FIGS. 7 and 8, the extension member 738 is shown retracted in the top member 736. In this position, the entire barrier gate is disposed in its stowed or folded position. In FIG. 9, however, the barrier gate is in its deployed or unfolded position. Here, the extension member 738 may be received within the slot 716 of the upper bracket 710.

[0039] The cross member 742 may be pivotally coupled to the extension member 738 via a pivot coupling 748. Due to this pivot coupling 748, the cross member 742 may pivot with respect to the extension member 738 between the folded position and unfolded position. The cross member 742 is coupled to the pivot coupling 748 at one end, and it is further coupled to the bottom gate member 734 via a separate pivot coupling 750 at an opposite end thereof. Thus, the cross member 742 is capable of pivoting with respect to the bottom gate member 734 as well as the extension member 738.

[0040] As shown in FIG. 9, the bottom gate member 734 is pivotally coupled at one end to the base 708 at one end, and in the unfolded position the opposite end thereof is received within the slot 718 of the lower bracket 712. In the unfolded position, the extension member 738 and bottom gate member 734 are received with the slots of the respective upper and lower brackets. This coupling of the gate to the brackets provides a firm coupling to maintain the gate in the upright, unfolded position of FIG. 9.

[0041] In FIGS. 7 and 8, the side gate member 740 is shown being pivotally coupled to the top gate member 736 via an upper pivot coupling 746 and to the bottom gate member 734 via a lower pivot coupling 744. In the folded position of FIGS. 7 and 8, the side gate member 740 may come into contact with and rest against a stopper 804. The stopper 804 may be formed as part of the base 708 and a support arm 732.

[0042] The support arm 732 further includes an upper portion that defines an opening or slot 730. This opening or slot 730 permits the top gate member 736 to pivot between its folded and unfolded positions. As shown in FIGS. 7 and 8, the top gate member 736 is disposed substantially perpendicular to the opening 730, whereas in FIG. 9 the top gate member 736 is disposed within the opening 730.

[0043] A support bracket 724 is shown in FIGS. 7 and 8 as being coupled to the base 708. The support bracket 724 defines an opening 726 similar to the opening 730 defined in the support arm 726. The support bracket 724 allows the bottom gate member 734 to pivot between its folded and unfolded positions.

[0044] The barrier gate assembly 702 further includes a latch 728 for releasably coupling the barrier gate in its folded position. The latch 728 may include a finger or tab 802 (FIG. 8) that may be received within an opening defined in the base 708. Upon releasing the finger or tab 802

from the opening, the barrier gate may be unfolded from its folded position. Moreover, when returning the barrier gate to its folded position, the latch 728 may be further coupled via inserting the tab 802 into the opening of the base 708 to couple or fasten the gate in its folded or stowed position.

[0045] As shown in FIGS. 7 and 8, one or more limit switches may be used to detect when the barrier gate is in its folded (stowed) position and unfolded (deployed) position. For example, a first limit switch or sensor 720 may be coupled to the lower bracket 712. The limit switch or sensor 720 may detect when the bottom gate member 734 is disposed in the slot 718 of the lower bracket 712.

[0046] A second limit switch or sensor 800 may be coupled to the base 708 or support bracket 724 as shown in FIG. 8. Here, the switch or sensor 800 may detect when the bottom gate member 734 is disposed in its folded or stowed position. The limit switches or sensors may be in electrical communication with a controller and provide an alert or signal to an operator of the vehicle regarding the position of the barrier gate. This provides additional safety to the vehicle, its occupants, and any individual positioned in a wheelchair or scooter being moved via a lift assembly.

[0047] While exemplary embodiments incorporating the principles of the present disclosure have been disclosed hereinabove, the present disclosure is not limited to the disclosed embodiments. Instead, this application is intended to cover any variations, uses, or adaptations of the disclosure using its general principles. For instance, in one embodiment, the barrier gate assembly 702 is incorporated into the lift assembly 300 and includes the baseplate cover 312 in combination with the barrier gate assembly. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this disclosure pertains and which fall within the limits of the appended claims.

CLAIMS:

1. A lift assembly for positioning a lift platform to enable an individual using a mobility device to exit and to enter an interior of a vehicle, the lift assembly comprising:

an arm support base fixedly coupled to the vehicle, wherein the arm support base includes a first side spaced from a second side to define an access location for the individual using the mobility device;

an arm rotatably coupled the arm support base, the arm assembly being coupled to the lift platform and configured to raise and to lower the lift platform;

a barrier rotatably coupled to the arm support base, wherein the barrier includes an entry position to permit movement of the individual through the access location and a blocking position to block movement of the individual through the access location.

2. The lift assembly of claim 1 further including a link arm having a first end rotatably coupled to the barrier and a second end slidably coupled to the arm, wherein rotation of the arm about the arm support base pivots the barrier from the entry position to the blocking position.

3. The lift assembly of claim 2 wherein the barrier includes a base plate extending across the access location and further comprising a support plate extending between the first side and the second side of the arm support base, wherein the base plate is rotatably coupled to the support plate and rotation of the arm about the arm support base rotates the base plate with respect to the support plate.

4. The lift assembly of claim 3 further comprising an ear fixedly coupled to the base plate, wherein the first end of the link arm is rotatably coupled to the ear and the second end of the arm includes a slot, and wherein a pin fixedly coupled to the arm moves through the slot during movement of the arm.

5. The lift assembly of claim 1 wherein the arm includes a generally vertical position with respect to a floor of the vehicle and a generally horizontal position with respect to the floor, wherein the

barrier is at the entry position when the arm is in the generally vertical position and the barrier is at the blocking position when the arm is in the generally horizontal position.

6. The lift assembly of claim 1 wherein the barrier includes: i) a top member having a first end and an extendable end, the first end pivotally coupled to the first side; and ii) a bottom member having a first end and a second free end, the first end pivotally coupled to the first side, wherein in a deployed position of the barrier, the extendable end extends from the first end of the top member and engages the second side and the free end engages the second side to block movement of the individual through the access location.

7. The lift assembly of claim 6 wherein the barrier includes a cross member pivotally coupled to the bottom member and pivotally coupled to the second extendable end, wherein the cross member moves the extendable end into engagement with second side during movement of the barrier from a stowed position to the deployed position.

8. The lift assembly of claim 7 further comprising a first sensor operatively connected to the second side of the arm support base, wherein the sensor is configured to detect engagement of one of the extendable end and the free end with the second side of the support arm to detect the deployed position of the barrier.

9. The lift assembly of claim 8 further comprising a second sensor operatively connected to the first side of the arm support base, wherein the second sensor is configured to detect a stowed position of the barrier.

10. A barrier configured to be located at a door of a vehicle having a lift platform configured to enable an individual using a mobility device to exit and to enter an interior of the vehicle, the barrier comprising:

- a support base configured to be fixedly coupled to the vehicle;

- a first side and second side each extending from the support base and being spaced apart to define an access location for the individual using the mobility device;

a top member having a first end and an extendable end, the first end pivotally coupled to the first side;

a bottom member having a first end and a second free end, the first end pivotally coupled to the first side, wherein in a deployed position of the barrier gate, the first extendable end extends from the first end of the top member and engages the second side and the second free end engages the second side to block movement of the individual from exiting the vehicle.

11. The barrier of claim 10 wherein the barrier gate includes a cross member pivotally coupled to the bottom member and pivotally coupled to the extendable end, wherein the cross member moves the extendable end into engagement with the second side during movement of the barrier gate from a stowed position to the deployed position.

12. The barrier of claim 11 further comprising a first sensor operatively connected to the second side of the arm support base, wherein the sensor is configured to detect engagement of one of the extendable end and the free end with the second side of the support arm to detect the deployed position of the barrier gate.

13. The barrier of claim 12 further comprising a second sensor operatively connected to the first side of the arm support base, wherein the second sensor is configured to detect a stowed position of the barrier gate.

14. A barrier configured to be located at a door of a vehicle having a lift platform coupled to at least one extendable arm rotatably coupled to a base defining an access location and located in the interior of the vehicle, the barrier comprising:

a barrier plate rotatably coupled to the base and to at least one of the one or more extendable arms, wherein the barrier plate includes an entry position to permit movement of the individual through the access location and a blocking position to block movement of the individual through the access location; and

a link arm operatively connected to the barrier plate and to the at least one extendable arm, wherein movement of the at least one extendable arm moves the link arm and in response thereto moves the barrier plate between the entry position and the blocking position.

15. The barrier of claim 14 wherein the link arm includes further includes a first end rotatably coupled to the barrier plate and a second end slidingly coupled to the at least one arm, wherein rotation of the at least one arm about the base pivots the barrier plate from the entry position to the blocking position.

16. The barrier of claim 15 further comprising a support plate extending across the access location, wherein the barrier plate is rotatably coupled to the support plate and rotation of the at least one arm about the base rotates the barrier plate with respect to the support plate from the entry position to the blocking position.

17. The barrier of claim 16 further comprising an ear fixedly coupled to the barrier plate, wherein the first end of the link arm is rotatably coupled to the ear and the second end of the link arm includes a slot, wherein the slot moves across the at least one arm during movement of the arm.

18. The barrier of claim 14 wherein in a generally vertical position of the at least one arm with respect to a floor of the vehicle, the barrier plate is located at the entry position and in a generally horizontal position with respect to the floor the barrier plate is located at the blocking position.

19. The barrier of claim 14 further comprising;

a barrier gate including a top member having a first end and an extendable end, the first end pivotally coupled to a first side of the base; and

a bottom member having a first end and a second free end, the first end pivotally coupled to the first side, wherein in a deployed position of the barrier gate, the extendable end extends from the first end of the top member and engages a second side of the base, and the second free end engages the second side to block movement of the individual from exiting the vehicle.

20. The barrier of claim 19 wherein the barrier gate includes a cross member pivotally coupled to the bottom member and pivotally coupled to the extendable end, wherein the cross member moves the extendable end into engagement with second side during movement of the barrier gate from a stowed position to the deployed position.

1/9

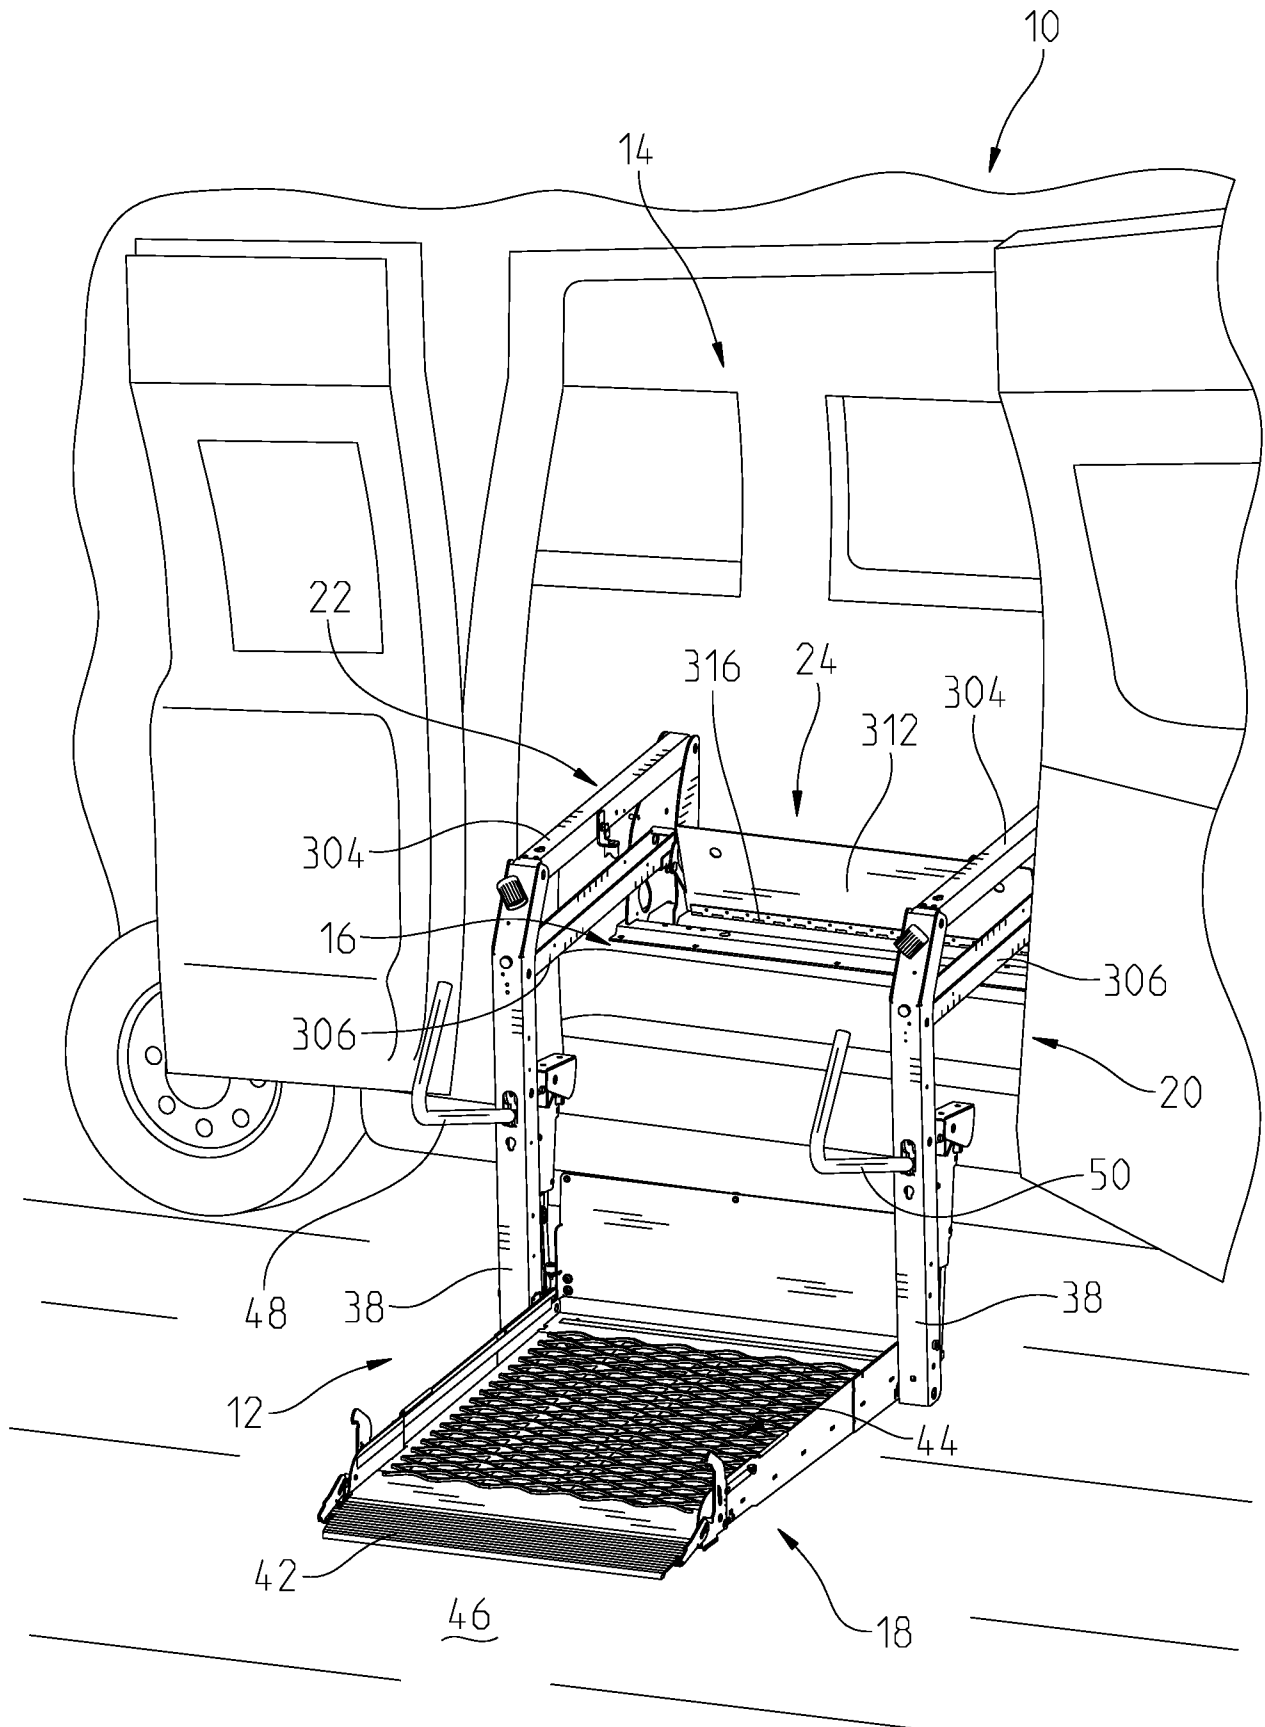


Fig. 1

2/9

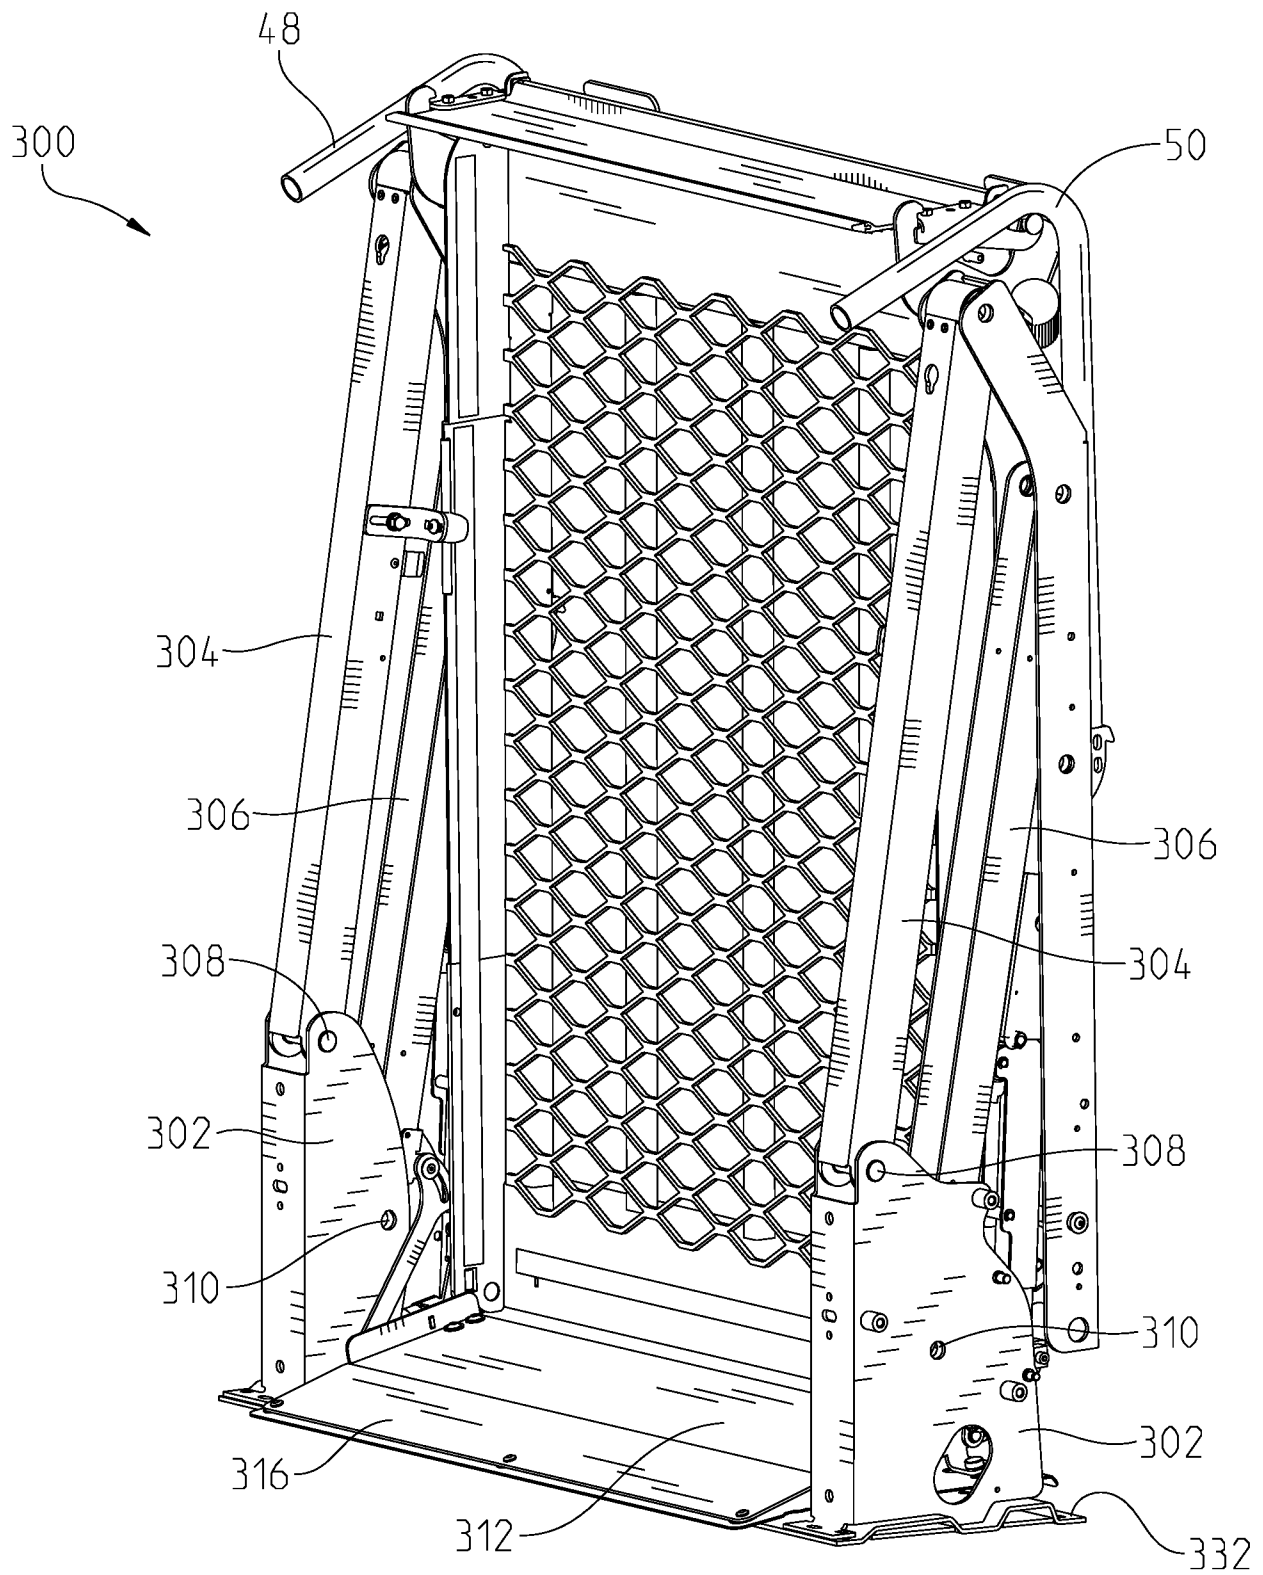


Fig. 2

3/9

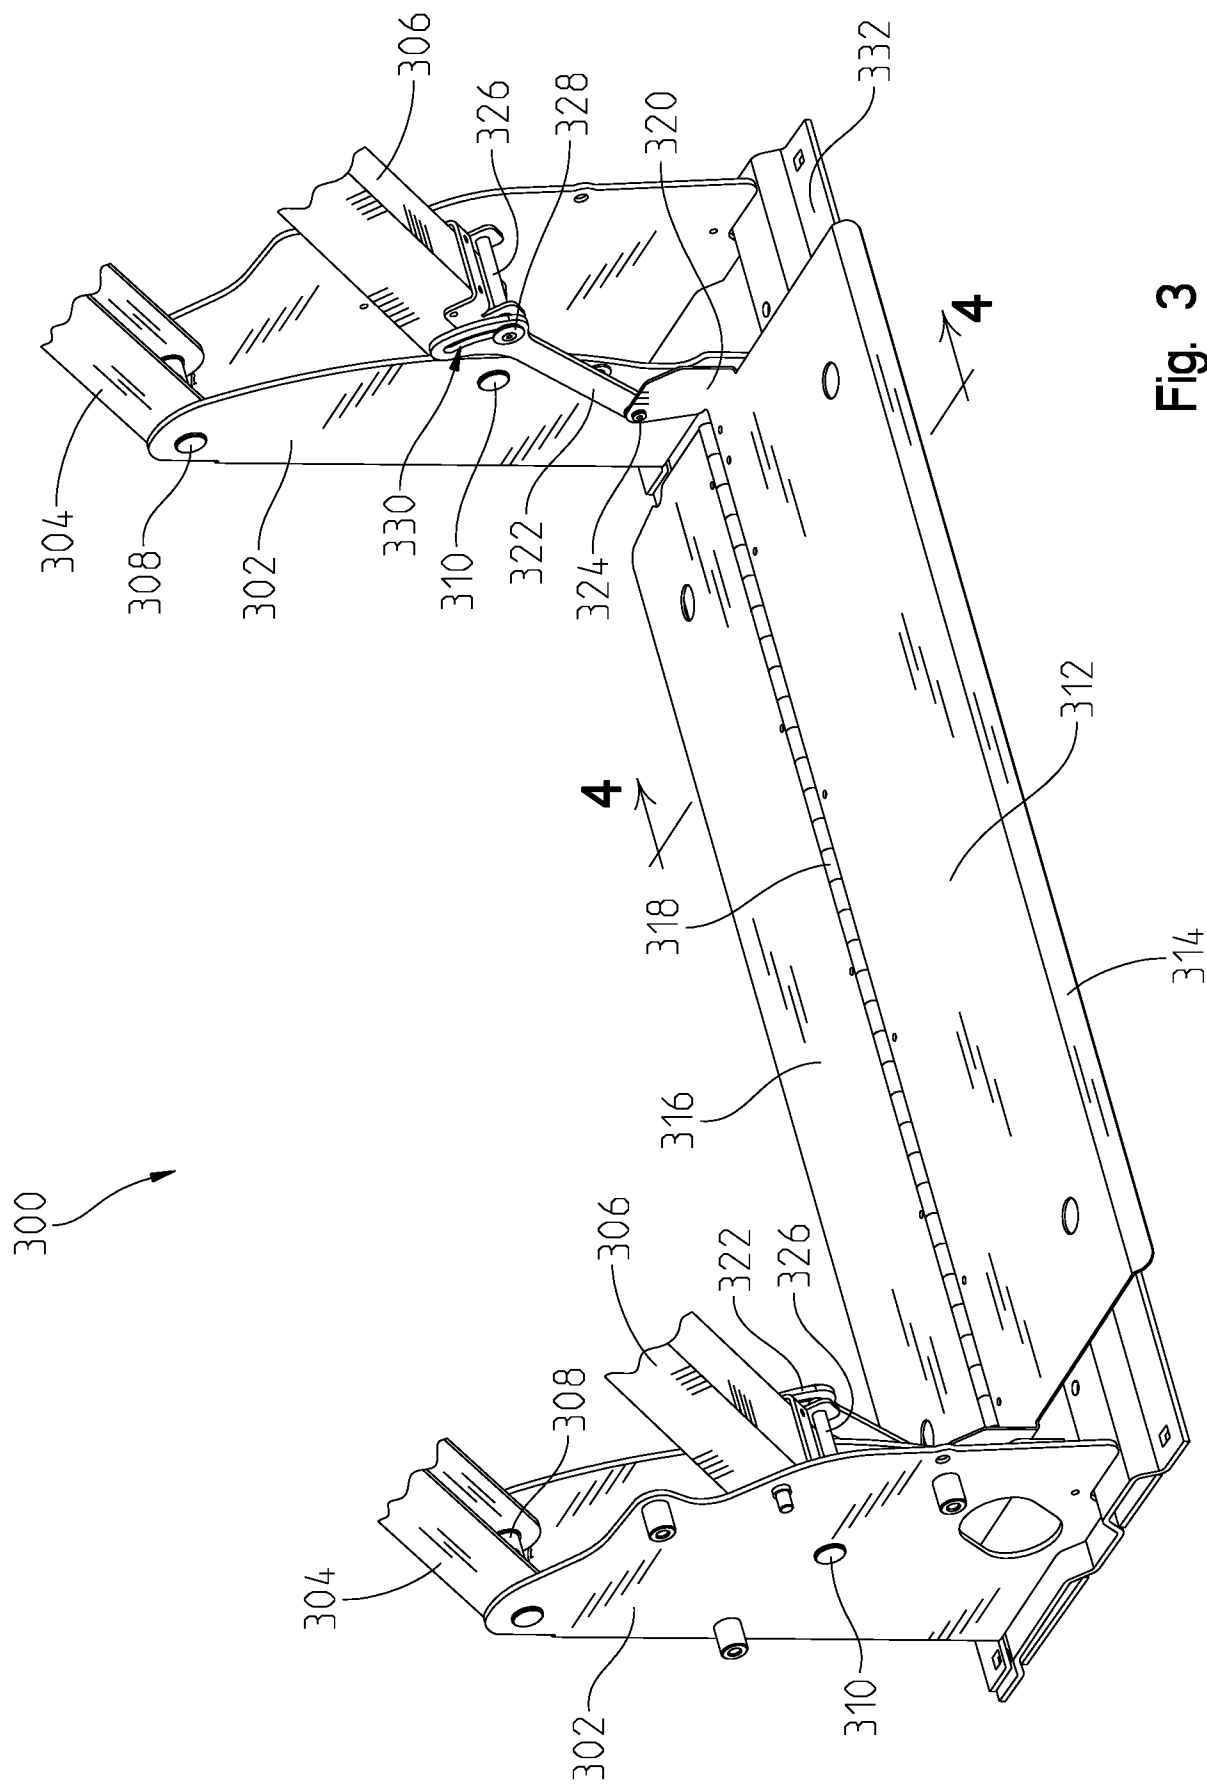


Fig. 3

4/9

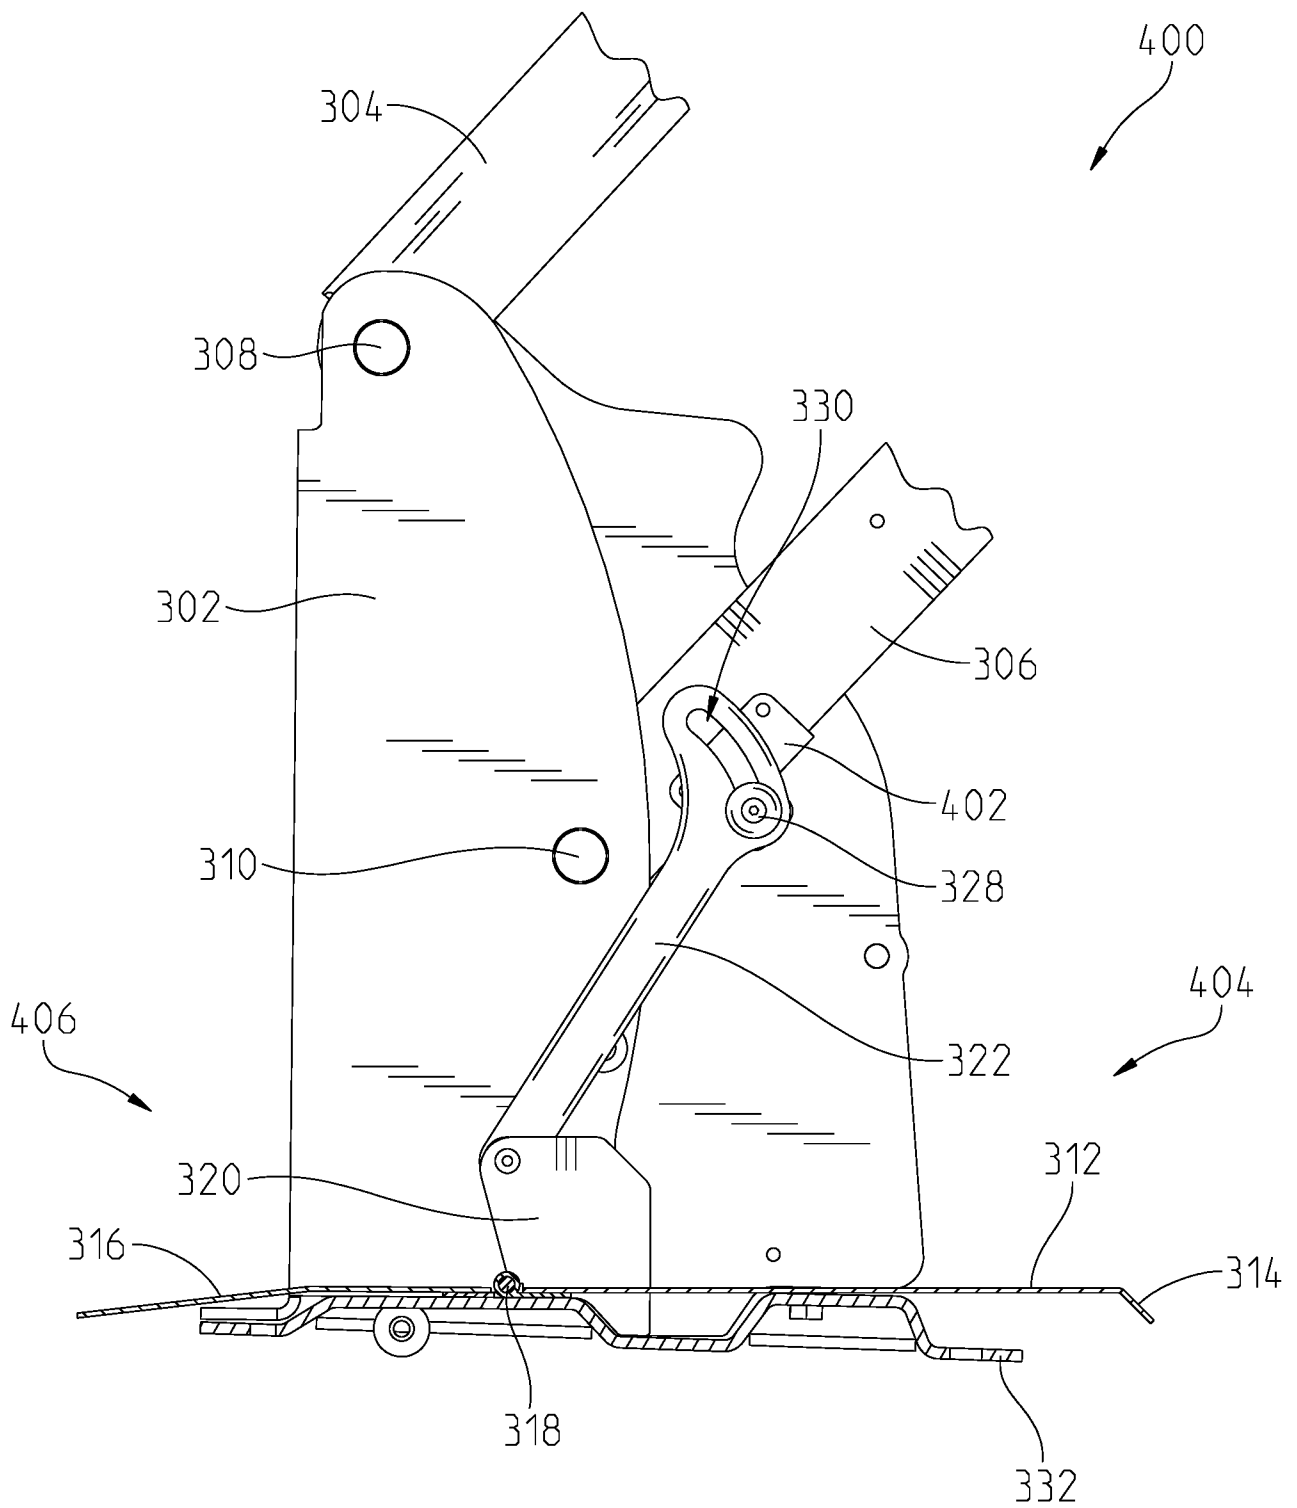


Fig. 4

5/9

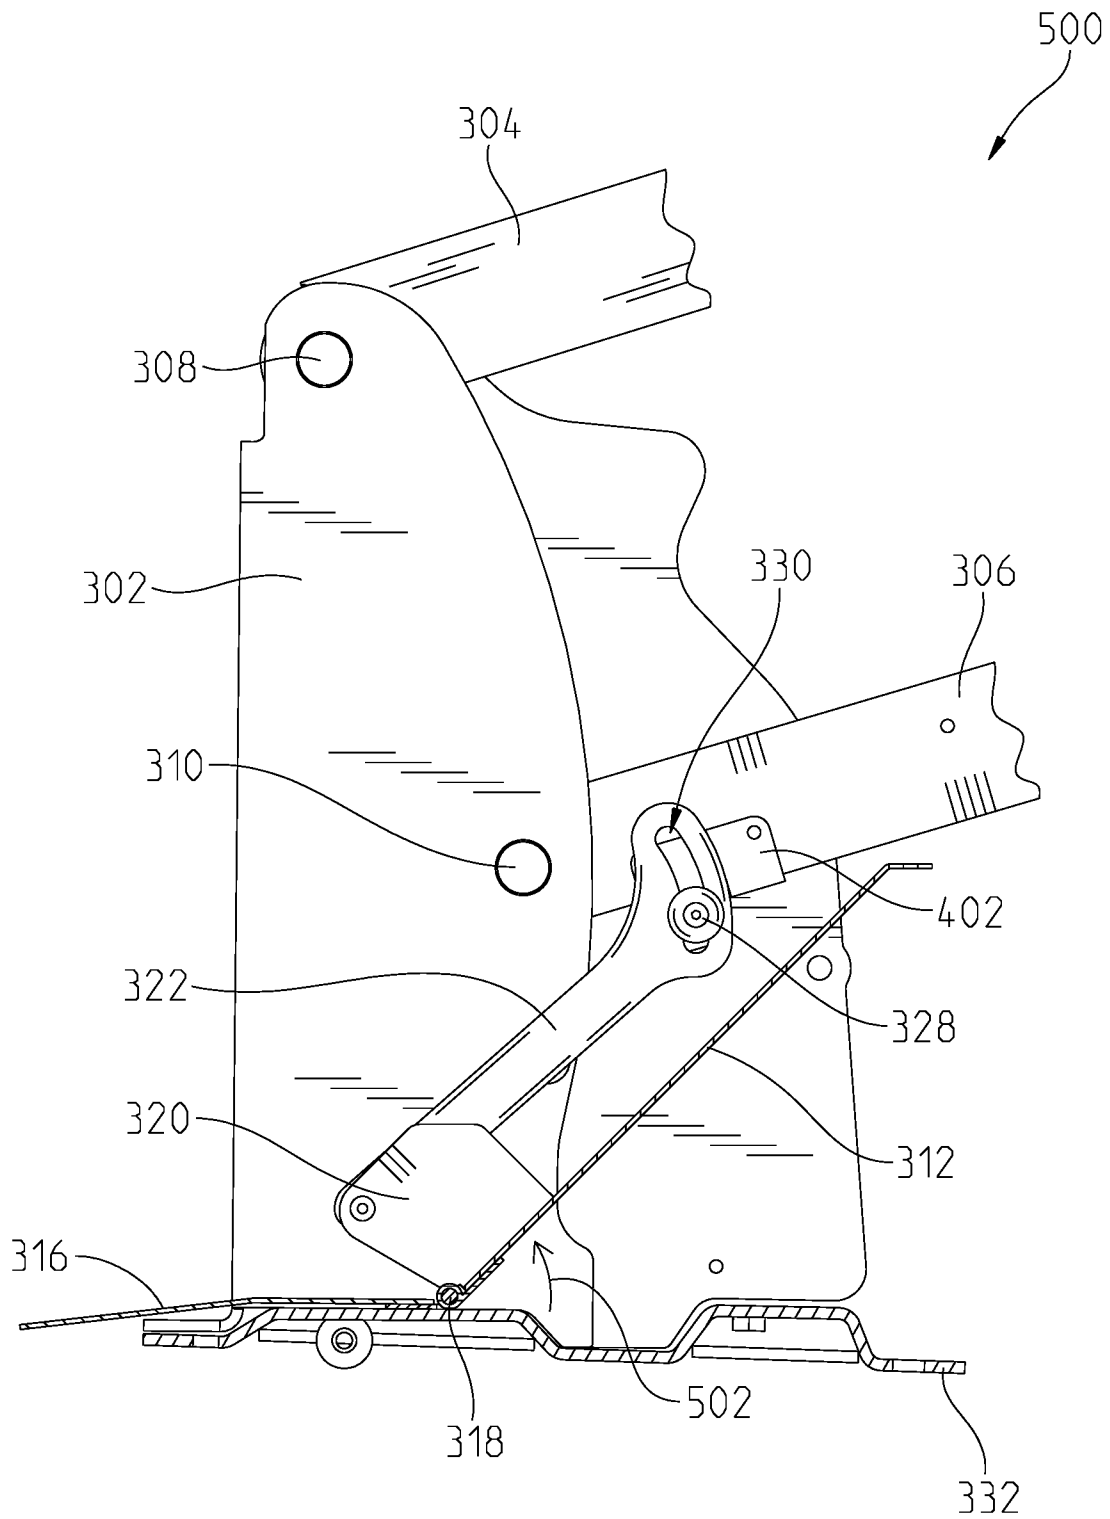


Fig. 5

6/9

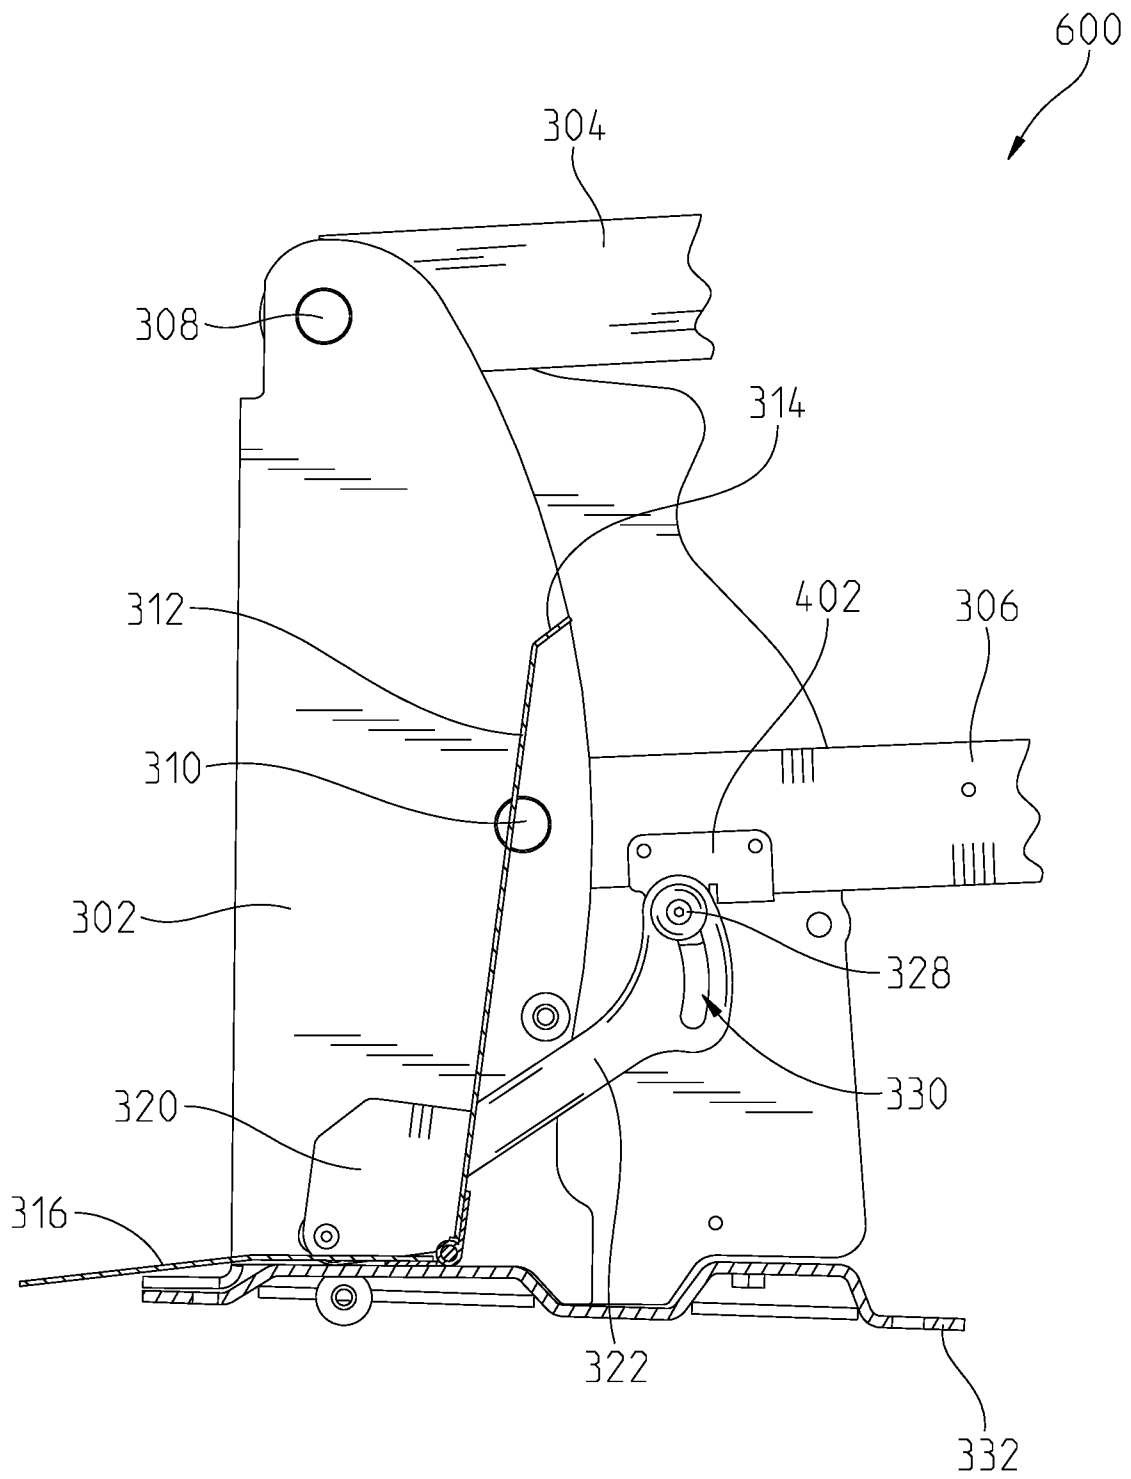


Fig. 6

7/9

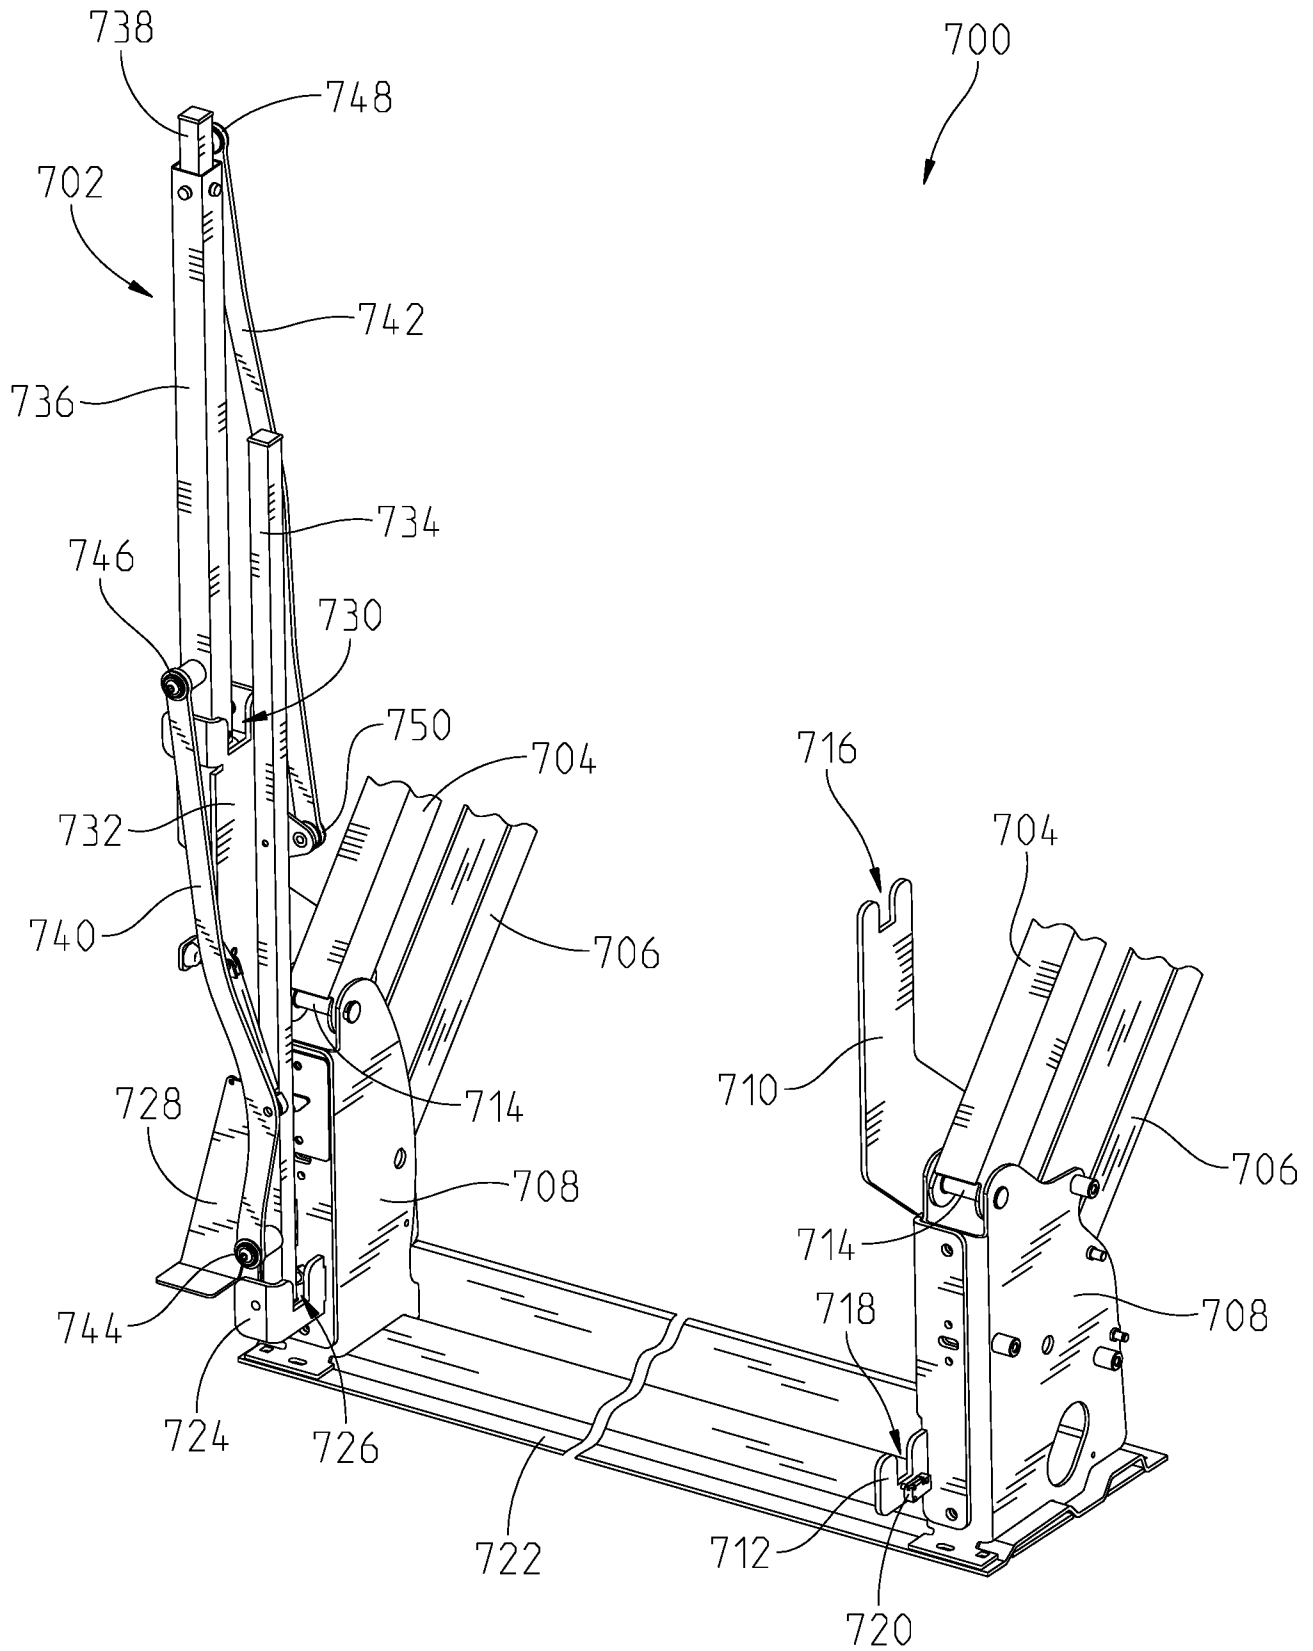


Fig. 7

8/9

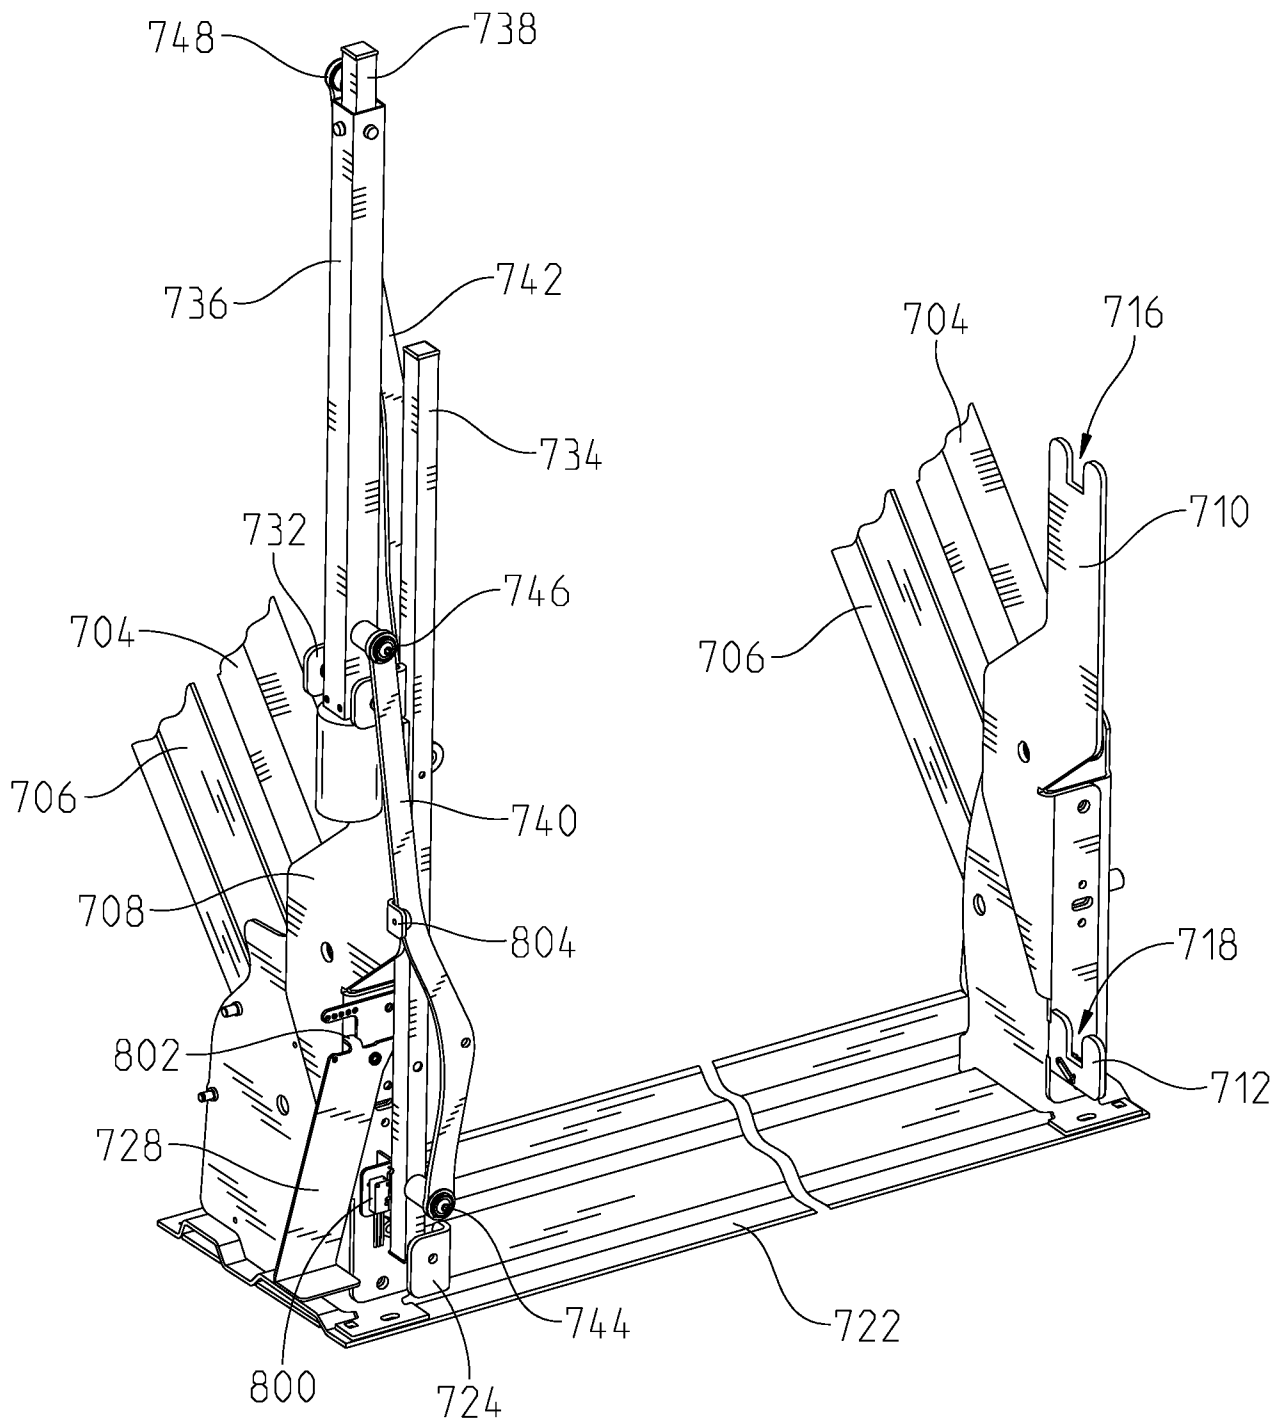


Fig. 8

9/9

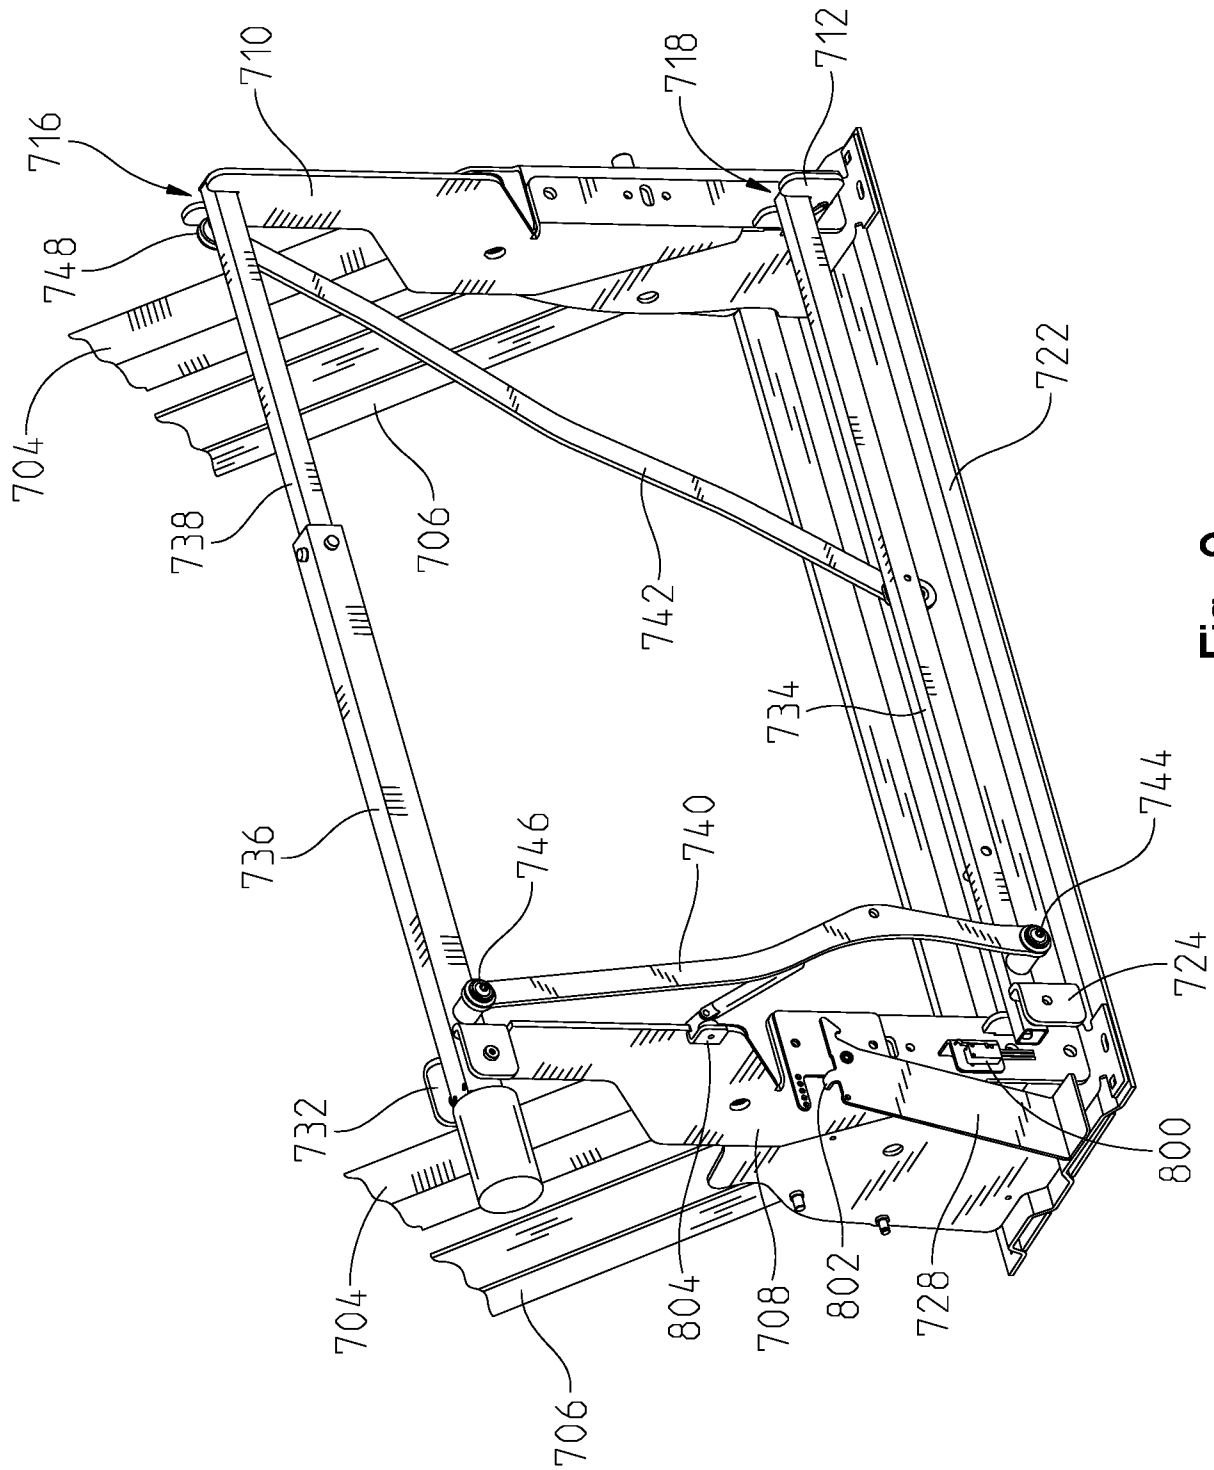


Fig. 9

A. CLASSIFICATION OF SUBJECT MATTER**B60P 1/44(2006.01)i, A61G 3/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B60P 1/44; A61G 3/06; A61G 3/08; B60P 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: lift, platform, vehicle, arm, rotate, barrier

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2004-0184906 A1 (DUPUY et al.) 23 September 2004 See paragraphs [0030]-[0043]; and figures 1-4.	1-20
Y	US 6585474 B1 (KAMEDA, FUJIO) 01 July 2003 See column 4, lines 17-28; and figure 1.	1-20
Y	WO 01-12120 A1 (VARTANIAN, ROGER) 22 February 2001 See page 27, lines 8-23; and figures 1a-1e.	6-13, 19-20
A	US 2014-0377047 A1 (AUTOLIFT S.R.L.) 25 December 2014 See paragraphs [0031]-[0064]; and figures 1-10.	1-20
A	US 2002-0187032 A1 (RICHARD et al.) 12 December 2002 See paragraphs [0074]-[0092]; and figures 1-12.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 November 2018 (27.11.2018)

Date of mailing of the international search report

27 November 2018 (27.11.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

PARK, Tae Wook

Telephone No. +82-42-481-3405



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/045496

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004-0184906 A1	23/09/2004	AT 340549 T	15/10/2006
		AU 2500899 A	11/11/1999
		AU 763605 B2	31/07/2003
		CA 2270446 A1	01/11/1999
		CA 2270446 C	08/07/2008
		CA 2270580 A1	01/11/1999
		CA 2270580 C	29/01/2008
		DE 69933332 T2	03/05/2007
		DK 0955029 T3	12/02/2007
		EP 0955029 A2	10/11/1999
		EP 0955029 A3	17/11/1999
		EP 0955029 B1	27/09/2006
		US 2001-0031195 A1	18/10/2001
		US 2003-0021666 A1	30/01/2003
		US 6065924 A	23/05/2000
		US 6238169 B1	29/05/2001
		US 6464447 B2	15/10/2002
		US 6739824 B2	25/05/2004
		US 7306422 B2	11/12/2007
US 6585474 B1	01/07/2003	AU 4100599 A	13/12/1999
		AU 767571 B2	13/11/2003
		DE 69936644 T2	10/04/2008
		DK 1079787 T3	03/12/2007
		EP 1079787 A1	07/03/2001
		EP 1079787 B1	25/07/2007
		ES 2292243 T3	01/03/2008
		JP 2002-516149 A	04/06/2002
		JP 4344816 B2	14/10/2009
		US 6379102 B1	30/04/2002
		WO 99-60976 A1	02/12/1999
WO 01-12120 A1	22/02/2001	AU 6538700 A	13/03/2001
		CA 2377750 A1	22/02/2001
		US 2002-0076313 A1	20/06/2002
		US 6309170 B1	30/10/2001
		US 6648579 B2	18/11/2003
US 2014-0377047 A1	25/12/2014	EP 2818148 A1	31/12/2014
		US 9974702 B2	22/05/2018
US 2002-0187032 A1	12/12/2002	US 7290975 B2	06/11/2007