

(43) International Publication Date
29 September 2016 (29.09.2016)(51) International Patent Classification:
G02B 27/48 (2006.01) *G02B 27/00* (2006.01)(21) International Application Number:
PCT/US2016/024218(22) International Filing Date:
25 March 2016 (25.03.2016)


(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/138,678 26 March 2015 (26.03.2015) US(71) Applicants: **KENT STATE UNIVERSITY** [US/US];
P.O. Box 5190, Kent, Ohio 44242 (US). **INTEL COR-
PORATION** [US/US]; 2200 Mission College Boulevard,
Santa Clara, CA 95054 (US).(72) Inventors: **CHENG, Hsien-Hui**; 1150 Ranchero Way,
Apt. 42, San Jose, CA 95117 (US). **BOS, Philip**; 6806
Windsor Road, Hudson, OH 44236 (US). **BHOWMIK,
Achintya**; 2200 Mission College Boulevard, Santa Clara,
CA 95054 (US).(74) Agent: **SIEG, Robert, M.**; Fay Sharpe LLP, The Halle
Building, 5th Floor, 1228 Euclid Avenue, Cleveland, OH
44115-1843 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LI, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COMPACT NON-MECHANICAL ZOOM LENS

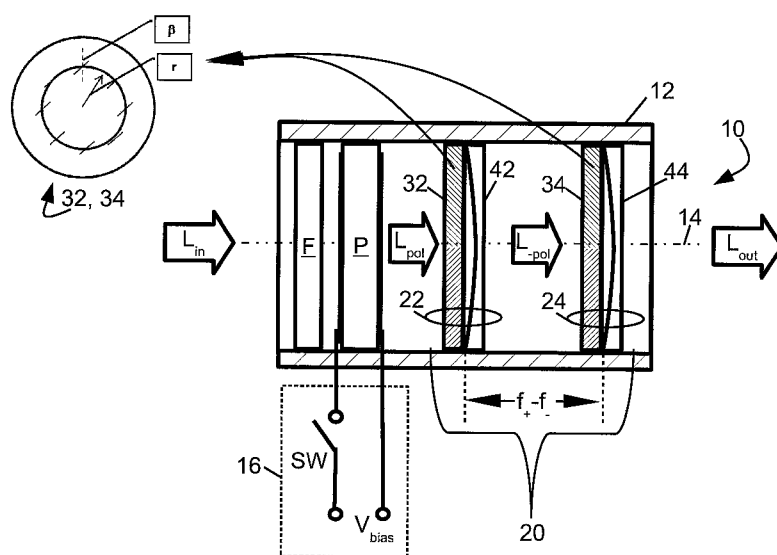**Fig. 1**

(57) Abstract: An optical magnification system comprises two Pancharatnam lenses, and provides a first magnification for left-hand circularly polarized light and a second magnification different from the first magnification for right-hand circularly polarized light. An optical magnification system comprises two lenses, each having different focal lengths for left-handed and right-handed circularly polarized light, respectively, and configured to provide a first magnification for left-handed circularly polarized light and a second magnification different from the first magnification for right-handed circularly polarized light.

Published:

— *with international search report (Art. 21(3))*

COMPACT NON-MECHANICAL ZOOM LENS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/138,678 filed March 26, 2015 and titled "COMPACT NON-MECHANICAL ZOOM LENS". U.S. Provisional Application No. 62/138,678 filed March 26, 2015 and titled "COMPACT NON-MECHANICAL ZOOM LENS" is incorporated herein by reference in its entirety.

BACKGROUND

[0002] The following relates to the optical device arts, optical lens arts, zoom lens arts, and related arts.

[0003] Adjustable zoom lenses find diverse applications, such as in machine vision inspection systems, computer vision systems used as input devices by computers, gaming consoles, mobile devices (cell phones, tablet computers, laptop computers), and other interactive electronic devices, and so forth. In a typical system, a monochromatic imaging device including a lens and a digital imaging array (e.g. CCD array, CMOS imaging array, or so forth) is provided along with an illuminator outputting at an infrared wavelength or other wavelength of interest for real-time image capture and processing. Monochromatic illumination is useful to avoid chromatic aberration or other chromatic distortion effects, but polychromatic illumination may also be used to obtain beneficial spectral information. In one approach, the imaging system employs a fixed-lens camera that captures the entire frame within the camera's field of view, and subsequent image processing is employed to isolate and identify a feature of interest of an object under inspection, or to isolate and recognize a user input action.

[0004] In such a system, the field of view must be large enough to ensure the object feature, user action of interest, or the like is captured in the image. However, providing a sufficiently large field of view may limit the spatial resolution. To avoid this limitation, an optical zoom can be provided. In this variant, the zoom is adjusted to provide a wide field of view. Image processing

is applied to the wide-field image to identify a feature of interest, which is then zoomed in and imaged at higher resolution.

[0005] However, mechanical zoom lens systems are typically bulky, and the zoom speed is limited by the mechanical response time of the zoom system. This can be problematic for systems that need to be made small, such as a user interface camera designed to fit into the bezel of a portable computer or mobile device, or in systems or devices needing high speed zoom adjustment.

BRIEF SUMMARY

[0006] In one illustrative embodiment, an optical magnification system includes a first composite lens comprising a first Pancharatnam lens and a first polarization-independent lens, and a second composite lens comprising a second Pancharatnam lens and a second polarization-independent lens. The first composite lens is arranged to output light into the second composite lens.

[0007] In another illustrative embodiment, a zoom system comprises an optical magnification system as set forth in the immediately preceding paragraph, and an electro-optic polarization element or sub-system configured to input circularly polarized light to the first composite lens of the optical magnification system. The electro-optic polarization element or sub-system is configured to electrically switch the circularly polarized light between left-handedness and right-handedness.

[0008] In another illustrative embodiment, an optical magnification system is disclosed. A first lens has a positive focal length f_+ for circularly polarized light of a first handedness and a negative focal length of magnitude f_- for circularly polarized light of a second handedness opposite the first handedness. A second lens has a positive focal length f_+ for circularly polarized light of the first handedness and a negative focal length of magnitude f_- for circularly polarized light of the second handedness. In the optical magnification system, the first lens is arranged to output into the second lens. In some embodiments of the optical magnification system, the first and second lenses are spaced apart by a distance $f_+ - f_-$. In some embodiments of the optical magnification system, the

first and second lenses each include a Pancharatnam lens. In some embodiments, the optical magnification system has no moving parts.

[0009] In another illustrative embodiment, a zoom apparatus comprises an optical magnification system as set forth in the immediately preceding paragraph, and an electro-optic polarization element or sub-system configured to input circularly polarized light to the first lens of the optical magnification system. The electro-optic polarization element or sub-system is configured to electrically switch the circularly polarized light between left-handedness and right-handedness. In some embodiments the zoom apparatus has a total thickness of 1.0 cm or less and has an f-number of 2 or lower. In some embodiments the zoom apparatus has a total thickness of 5.0 mm or less and has an f-number of 2 or lower.

[0010] In another illustrative embodiment, an optical magnification system comprises a first composite lens and a second composite lens. The first composite lens includes (i) a polarization-dependent lens that switches from a positive focal length for circularly polarized light of a first handedness to a negative focal length for circularly polarized light of a second handedness opposite the first handedness and (ii) a polarization-independent lens. The second composite lens includes (i) a polarization-dependent lens that switches from a positive focal length for circularly polarized light of the first handedness to a negative focal length for circularly polarized light of the second handedness and (ii) a polarization-independent lens. The first composite lens and the second composite lens are arranged in an optical train with the first composite lens and the second composite lens spaced apart such that the optical train provides a first magnification for circularly polarized light of the first handedness and a second magnification different from the first magnification for circularly polarized light of the second handedness.

[0011] In another illustrative embodiment, an optical magnification system comprises two Pancharatnam lenses. The optical magnification system provides a first magnification for left-hand circularly polarized light and a second magnification different from the first magnification for right-hand circularly

polarized light. In some embodiments of the optical magnification system, the first composite lens including a first Pancharatnam lens of the two Pancharatnam lenses and at least one additional lens that is not a Pancharatnam lens, and the second composite lens includes a second Pancharatnam lens of the two Pancharatnam lenses and at least one additional lens that is not a Pancharatnam lens.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIGURE 1 diagrammatically shows a side sectional view of a compact non-mechanical optical zoom package providing two electrically switchable zoom settings. The inset at upper left diagrammatically shows a plan view of a Pancharatnam lens, two of which are included in the illustrative optical zoom package of FIGURE 1.

[0013] FIGURE 2 diagrammatically shows the focal lengths of the two compound lenses in the two electrically switchable states: State 1 and State 2, of the compact non-mechanical optical zoom package of FIGURE 1.

[0014] FIGURES 3 and 4 diagrammatically show ray trace diagrams for State 1 (FIGURE 3) and State 2 (FIGURE 4) of a simulated embodiment of the non-mechanical optical zoom package of FIGURES 1 and 2.

[0015] FIGURE 5 shows a polarized microscope image of a Pancharatnam lens as described herein. FIGURES 5(a) and 5(b) show magnified regions of region (a) and region (b), respectively.

[0016] FIGURES 6(a), 6(b), and 6(c) illustrate an application of the optical zoom package of FIGURES 1 and 2 as an adjustable laser beam expander as described herein.

[0017] FIGURES 7(a), 7(b), and 7(c) illustrate an application of the optical zoom package of FIGURES 1 and 2 as an optical camera zoom system as described herein.

DETAILED DESCRIPTION

[0018] Disclosed herein are non-mechanical optical zoom systems that leverage certain characteristics of Pancharatnam phase lenses to achieve electrical switching of the optical zoom system between two (or more) zoom settings, e.g. between two different magnifications. Pancharatnam lenses provide focusing of circularly polarized light. The illustrative optical zoom systems leverage a particular property of Pancharatnam phase lenses, namely that the focal length of a Pancharatnam lens switches sign (i.e. switches between a positive focal length and a negative focal length of the same magnitude) when the sign of the circularly polarized light is switched between left-hand circular polarization and right-hand polarization (or, using a different nomenclature, between counter-clockwise circular polarization and clockwise circular polarization). This transformation from a positive lens to a negative lens based on the handedness of the circularly polarized input light, which is a property of the Pancharatnam lens, is advantageously leveraged by constructing a zoom lens system employing at least two Pancharatam lenses, optionally in conjunction with additional lenses, and performing electrical switching of the zoom setting by electrically switching the handedness of the input circularly polarized light. In the illustrative zoom systems, the Pancharatnam lens itself is a static, i.e. passive, device (although it is contemplated for the Pancharatnam to be an electro-optic device in which electrical lens bias is used to adjust the magnitude of the focal length of the Pancharatnam lens).

[0019] Advantageously, numerous optical configurations are known for producing circularly polarized light and for high-speed switching of the handedness of circularly polarized light – thus, the disclosed optical zoom systems provide low cost, high-speed-switchable zoom systems. As a further benefit, the Pancharatnam lens can be constructed as a thin film on the order of 1.5 micron thickness, and can be stacked with other lenses and combined with planar polarizer and phase retarder elements to construct a compact electrically

switchable zoom system in a low-profile (i.e. thin) package suitable for installation in confined spaces such as in the bezel of a mobile device.

[0020] With reference to FIGURE 1, in an illustrative embodiment a non-mechanical electrically switchable optical zoom apparatus or system **10** is housed in a tubular housing **12** (shown in side sectional view) defining a cylinder axis **14** which also is the optical axis **14** of the zoom system **10**. The illustrative tubular housing **12** is assumed to have a circular cross-section, but other cross-sectional shapes are contemplated (e.g. a square, hexagonal, or other cross-section). Input light (L_{in}) enters the tubular housing **12** of the illustrative zoom system **10** from the left, and output light (L_{out}) exits the tubular housing **12** of the zoom system **10** at the right. The input light (L_{in}) is optionally spectrally filtered, e.g. by a narrow bandpass filter **F**, to provide monochromatic light. Alternatively, if the input light (L_{in}) is already monochromatic, (for example, generated by a laser or semiconductor light emitting diode (LED) device, then the filter **F** may be omitted. In other variant embodiments, the filter may be placed elsewhere in the optical train, e.g. at the right end to spectrally filter the output light (L_{out}). It will be appreciated that in a practical optical system, the monochromatic light will have some finite FWHM that depends on the FWHM spectral characteristics of the filter **F**, laser, LED or the like. If the lenses of the zoom apparatus have low chromatic aberration then it is also contemplated to employ broadband or polychromatic light without spectral filtering.

[0021] The input light (L_{in}) is polarized by an electro-optic polarization element or sub-system **P**, which may take various configurations. In general, the input light (L_{in}) processed by the electro-optic polarization element or sub-system **P** should produce polarized light (L_{pol}) that is circularly polarized, and whose handedness of circular polarization can be switched between left handedness and right handedness by operation of a switching electrical bias source **16**. In the illustrative bias configuration **16**, an electrical bias voltage (V_{bias}) is selectively applied to the electro-optic polarization element or sub-system **P** by way of a switch **SW**, but other electrically switchable biasing arrangements are suitable. The electro-optic polarization element or sub-system

P can have various configurations (details not shown). In one configuration, the input light (L_{in}) is unpolarized and the polarization element or sub-system **P** comprises a linear polarizer and a switchable phase retarder that switchable between a $-\pi/2$ phase retardation and a $+\pi/2$ phase retardation by action of the switchable electrical biasing arrangement **16**. In another configuration, the input light (L_{in}) is already circularly polarized and the polarization element or sub-system **P** includes an electrically switchable $0 - \pi$ phase retarder. These are merely illustrative examples. It is also contemplated to place the polarization element or sub-system **P** elsewhere in the optical train, such as at the light output end to polarize the output light (L_{out}) in an arrangement sometimes referred to as an “analyzer” arrangement.

[0022] With continuing reference to FIGURE 1, the zoom apparatus **10** further includes an optical magnification train **20** including a first compound lens **22** and a second compound lens **24**. The first compound lens **22** includes a (first) Pancharatnam lens **32**, while the second compound lens **24** includes a (second) Pancharatnam lens **34**. In the illustrative embodiment, both Pancharatnam lenses **32**, **34** are identical and have the same “handedness” – in other words, one of the following holds: (1) both Pancharatnam lenses **32**, **34** operate as a positive lens for left-hand circularly polarized light and operate as a negative lens for right-hand circularly polarized light, or (2) both Pancharatnam lenses **32**, **34** operate as a negative lens for left-hand circularly polarized light and operate as a positive lens for right-hand circularly polarized light.

[0023] With reference to FIGURE 1 and with further reference to FIGURE 2, the illustrative optical magnification train **20** leverages another property of a Pancharatnam lens, namely that a Pancharatnam lens operates as a half-wave plate that reverses the handedness of the circularly polarized light. The impact of this on the optical magnification train **20** is best seen with reference to FIGURE 2, which depicts the optical magnification train **20** of the zoom apparatus **10** of FIGURE 1 in a “State 1” (FIGURE 2 top diagram) corresponding to one particular handedness of the circularly polarized input light (L_{pol}), and in a “State 2” (FIGURE 2 bottom diagram) corresponding to the opposite

handedness of the circularly polarized input light (L_{pol}). Since, as described with reference to FIGURE 1, the handedness of the circularly polarized input light (L_{pol}) can be switched by switching the bias applied to the polarization element or sub-system **P**, it follows that the optical magnification train can be switched between State 1 and State 2 merely by electrically switching the polarization element or sub-system **P** using the electrical bias source **16**.

[0024] State 1 is considered first. In the diagrammatic example of FIGURE 2, in State 1 the circularly polarized light (L_{pol}) has handedness such that the first Pancharatnam lens operates as a positive lens, and hence is indicated in FIGURE 2, top diagram, as Pancharatnam lens **32_P** (for State 1). The output light (L_{pol}) has opposite handedness from light (L_{pol}) due to the half-wave plate property of Pancharatnam lenses, so that the light (L_{pol}) of opposite handedness input to the second Pancharatnam lens causes the second Pancharatnam lens to operate as a negative lens, and hence is indicated in FIGURE 2, top diagram, as Pancharatnam lens **34_N** (for State 1).

[0025] State 2 is next considered. In the diagrammatic example of FIGURE 2, in State 2 the circularly polarized light (L_{pol}) has handedness such that the first Pancharatnam lens operates as a negative lens, and hence is indicated in FIGURE 2, bottom diagram, as Pancharatnam lens **32_N** (for State 2). The output light (L_{pol}) has opposite handedness from light (L_{pol}) due to the half-wave plate property of Pancharatnam lenses, so that the light (L_{pol}) of opposite handedness input to the second Pancharatnam lens causes the second Pancharatnam lens to operate as a positive lens, and hence is indicated in FIGURE 2, bottom diagram, as Pancharatnam lens **34_P** (for State 2).

[0026] With continuing reference to FIGURES 1 and 2, the first compound lens **22** further includes an additional lens **42**, while the second compound lens **24** includes an additional lens **44**. In the illustrative embodiment, both lenses **42**, **44** are identical, and are negative lenses. The negative lenses **42**, **44** may be plano-concave lenses (as shown in FIGURE 1; see also FIGURES 3 and 4), or alternatively may be bi-concave lenses (as diagrammatically shown in FIGURE 2). In other embodiments, the lenses **42**, **44** may be negative lenses of other

types, e.g. formed as electro-optic devices, e.g. liquid crystal-based lenses. The illustrative optical magnification train **20** has a Galilean telescope topology in which one (compound) lens is a positive lens and the other (compound) lens is a negative lens. Without loss of generality, the positive lens of the Galilean telescope topology is designated as having a positive focal length f_+ and the negative lens of the Galilean telescope topology is designated as having a negative focal length of magnitude f_- where in illustrative FIGURES 1 and 2 the inequality $f_+ > f_-$ holds. In the Galilean telescope topology, the positive and negative lenses are separated by a distance $f_+ - f_-$. As will be explained in more detail below, the disclosed compound lenses **22**, **24** are switchable between having positive focal length f_+ and negative focal length of magnitude f_- (or, written another way, focal length $-f_-$). As shown in FIGURES 1 and 2, the two compound lenses **22**, **24** are separated by the distance $f_+ - f_-$ in accordance with the illustrative Galilean telescope topology. An advantage of this topology is that the separation is reduced as compared with, by way of further example, an optical magnification train with an astronomical telescope topology made of two positive lenses separated by the sum of their focal lengths.

[0027] It should be noted that in the illustrative examples herein, each of the compound lenses **22**, **24** is analyzed mathematically using the “thin lens” approximation, which assumes that the separation between the constituent lenses (that is, between lenses **32**, **42** in compound lens **22**, and likewise between lenses **34**, **44** in compound lens **24**) can be neglected in the analysis. This is a good approximation to first order, especially when the constituent lenses **32**, **34**, **42**, **44** are thin, which is the case for typical Pancharatnam lenses which comprise 1.5 micron refractive layers, and may be the case for the lenses **42**, **44** if they are made thin using high refractive index optical materials. If greater precision is desired, the disclosed optical analyses can readily be refined using numerical (e.g. ray tracing) optical design software. A consequence of the “thin lens” approximation used herein is that the separation

between the compound lenses **22, 24** can be treated as equal to the separation between the Pancharatnam lenses **32, 34**, both being designated by $f_+ - f_-$.

[0028] As shown in FIGURE 1, the illustrative non-mechanical electrically switchable zoom lens **10** is constructed as a unitary package in which optical elements **F, P, 22, 24** are mounted with the compound lenses **22, 24** separated by $f_+ - f_-$. This unitary optical package **10** is therefore suitable for manufacture and sale as a discrete optical component. This is merely illustrative, and other configurations are contemplated, such as mounting the optical components directly into a mobile device bezel (without the tubular housing **12**). Various additional components may be added (e.g. optical fiber connections between components of the optical train, optical components bonded together with optical-grade light-transmissive spacers and/or adhesive (optionally thereby enabling unitary construction while omitting an exterior housing), and so forth (variants not illustrated). It is also contemplated to employ two or more instances of the optical magnification train **20** in series, possibly with different focal lengths f_+ and/or f_- for the different instances, to obtain more complex magnification effects and/or magnification that is switchable between more than two possible magnification (i.e. zoom) levels. Still further, while the Galilean telescope topology is illustrated in FIGURES 1 and 2 and is described in greater detail the following, the optical magnification train is contemplated to employ other magnification topologies such as an astronomical telescope topology with two positive (compound) lenses separated by the sum of the focal lengths. Such alternative magnification topologies may be readily designed by the skilled artisan to provide switchable magnification levels using teachings disclosed herein including leveraging the lens sign and half-wave plate characteristics of Pancharatnam lenses incorporated into the (compound) lenses of these alternative magnification topologies to provide switchable magnification.

[0029] In the following, some illustrative examples are given of Pancharatnam lenses suitable for use as the Pancharatnam lenses **32, 34**.

[0030] Pancharatnam phase optical elements provide high efficiency and can have a well-defined parabolic phase profile. See, e.g. Roux, "Geometric phase

lens,” J. Opt. Soc. Am. A vol. 23, pages 476-482, (2006); Marrucci et al., “Pancharatnam-Berry phase optical elements for wave front shaping in the visible domain: Switchable helical mode generation,” Appl. Phys. Lett. vol. 88, page 221102 (2006); Hasman et al., “Polarization dependent focusing lens by use of quantized Pancharatnam–Berry phase diffractive optics,” Appl. Phys. Lett. vol. 82, pages 328-330 (2003); Gorodetski, et al., “Optical properties of polarization-dependent geometric phase elements with partially polarized light,” Opt. Commun. vol. 266, pages 365–375 (2006). In an illustrative approach, the Pancharatnam lens is suitably fabricated using a polarization holography alignment technique. *See, e.g.* Escuti, et al., “Simplified spectropolarimetry using reactive mesogen polarization gratings,” Proc. SPIE. vol. 6302, page 630207, (2006); Escuti, and W. M. Jones, “Polarization independent switching with high contrast from a liquid crystal polarization grating,” SID Sym. Dig. Tech. Papers 37, 1443-1446 (2006); Escuti et al., “Polarization independent switching with high contrast from a liquid crystal polarization grating,” SID Sym. Dig. Tech. Papers vol. 37, pages 1443-1446 (2006); Crawford, et al., “Liquid-crystal diffraction gratings using polarization holography alignment techniques,” J. Appl. Phys. vol. 98, page 123102 (2005). In one specific approach, an alignment layer is patterned using a holographic exposure, followed by spin-on deposition of a liquid crystal material followed by polymerization in order to generate a half-wave plate having the Pancharatnam phase pattern. A Pancharatnam lens is compact, with the thickness typically being controlled by the thickness of substrate on which the thin active layer ($\sim 1.5 \mu\text{m}$) is coated. The active layer of a Pancharatnam lens typically comprises a continuous spiraling structure of the optic axis of a half wave retardation film. Advantageously, the Pancharatnam lens does not require greater thickness in order to achieve larger aperture size.

[0031] With reference back to FIGURE 1, and more particularly to the upper left inset which shows a plan view of the Pancharatnam lens **32** or the Pancharatnam lens **34** (the two lenses **32**, **34** are identical in the illustrative embodiment), the Pancharatnam lens is a half-wave retarder (i.e. half-wave plate) that has its optic axis in the plane of the film, with the azimuthal angle (β).

The angle β of the optic axis is spatially varying, such that the angle is proportional to the square of the radial position (r) as shown in FIGURE 1, upper left inset. Circularly polarized light entering the Pancharatnam lens exits as circularly polarized light with the opposite sign (for any location r). The device acts as a lens because the relative phase of the exiting circularly polarized light between two different r values is:

$$2\beta(r_1) - 2\beta(r_2) = 2\beta(r_1) \cdot (1 - (r_2 - r_1)^2) \quad (1)$$

See Honma et al., "Liquid-Crystal Fresnel Zone Plate Fabricated by Microrubbing," Jpn. J. Appl. Phys. vol. 44, pages 287–290 (2005). As already discussed, a Pancharatnam lens changes its sign (switches from a positive lens to a negative lens) when the handedness (i.e. sign) of circularly polarized input light changes. Additionally, the lens is a half-wave plate, so the handedness of the light changes sign after passing through the Pancharatnam lens.

[0032] The disclosed compact non-mechanical zoom lens designs disclosed herein are based on Pancharatnam phase lens, and the illustrative embodiment includes an optical magnification train **20** having a Galilean telescope configuration which combines a positive (i.e. converging) lens and a negative (i.e. diverging) lens. In the Galilean telescope topology, the positive (converging) lens serves as an objective lens, and the negative (diverging) lens serves as an eyepiece. In the optical magnification train **20**, these two lenses can be interchanged through a non-mechanical means (operating the bias source **16** in illustrative FIGURE 1) as further explained in the following. This allows the magnification of the zoom system **10** to be switchable between greater than one and less than one to realize the function of zooming in/out.

[0033] The layout of the optical magnification train **20** of FIGURES 1 and 2 includes the pair of identical composite lens **22**, **24** with each composite lens including the polarization independent lens **42**, **44** (which may, by way of illustration, be a conventional lens made of glass or another transparent material with a suitable refractive index), and the polarization controlled

Pancharatnam lens **32**, **34**. The two composite lenses **22**, **24** are switchable between being a positive lens with a focal length of f_+ and a negative lens with a focal length of $-f_-$ (where f_- is a positive value, i.e. the magnitude of the focal length of the negative lens). The distance between the two composite lenses **22**, **24** is $f_+ - f_-$.

[0034] With particular reference to FIGURE 2, in State 1 (top diagram) the left composite lens **22** is a positive lens with the focal length f_+ and the right composite lens **24** is a negative lens with the focal length of $-f_-$. In State 2 (bottom diagram) the left composite lens **22** is a negative lens with the focal length $-f_-$ and the right composite lens **24** is a positive lens with the focal length of f_+ . Switching between State 1 and State 2 is accomplished by changing the sign of the circularly polarized light (L_{pol}) entering the first composite lens **22**. This sign (i.e. handedness) change is suitably obtained using the polarization element or sub-system **P** (see FIGURE 1), which by way of example may comprise a circular polarizer at the input of the lens, followed by a switchable liquid crystal half-wave plate which can switch between having no retardation and having a half-wave retardation. Again, the order of the circular polarizer and the half-wave plate may be reversed, and/or various components of the polarization element or sub-system **P** may be located elsewhere along the optical train than where shown in FIGURE 1, or other configurations can be used). Advantageously, the second Pancharatnam lens **34** in the second composite lens **24** “automatically” has the appropriate opposite sign because light exiting the first Pancharatnam lens **32** has the opposite circular polarization as the input light (L_{pol}) due to the half-wave plate property of Pancharatnam lenses.

[0035] With continuing reference to FIGURE 2, the magnitude of zoom lens magnification in State 1 is $M_1 = f_+/f_-$ and the magnification in State 2 is $M_2 = f_-/f_+$ and so $M_1 = 1/M_2$. Therefore, the zoom ratio (Z) of the optical magnification train **20** is $Z = \frac{M_1}{M_2} = M_1^2$.

[0036] Next, a suitable configuration of composite lenses **22**, **24** to obtain the desired switchable focal lengths f_+ and $-f_-$ is considered. As the two composite

lenses **22**, **24** are identical in the embodiment of FIGURES 1 and 2, the following is described for the first composite lens **22**, and is equally applicable to the second composite lens **24**. Denote the magnitude of the focal length of the polarization-independent lens **42** as focal length f_g . This is a negative lens, so the polarization-independent lens **42** has focal length $-f_g$. Further denote the magnitude of the focal length of the Pancharatnam lens **32** as f_{pan} . The Pancharatnam lens **32** can be switched between being a positive lens with focal length f_{pan} and a negative lens with focal length $-f_{pan}$ by switching the handedness of the circularly polarized input light.

[0037] In general, the combined focal length f of a composite lens comprising two lenses with focal lengths f_1, f_2 is given (under the thin lens approximation) as $\frac{1}{f} = \frac{1}{f_1} + \frac{1}{f_2} \rightarrow f = \frac{f_1 f_2}{f_1 + f_2}$. Applying this for the focal lengths $-f_g$ and f_{pan} (where the Pancharatnam lens **32** is operating here as a positive lens, i.e. State 1 shown in FIGURE 2 top diagram) yields the positive focal length f_+ for the Galilean telescope topology:

$$f_+ = \frac{(-f_g)(f_{pan})}{-f_g + f_{pan}} = \frac{f_g f_{pan}}{f_g - f_{pan}} \quad (2)$$

Similarly, applying $\frac{1}{f} = \frac{1}{f_1} + \frac{1}{f_2} \rightarrow f = \frac{f_1 f_2}{f_1 + f_2}$ for the focal lengths $-f_g$ and $-f_{pan}$ (where the Pancharatnam lens **32** is operating here as a negative lens, i.e. State 2 shown in FIGURE 2 bottom diagram) yields the negative focal length $-f_-$ for the Galilean telescope topology:

$$-f_- = \frac{(-f_g)(-f_{pan})}{-f_g + (-f_{pan})} = \frac{-f_g f_{pan}}{f_g + f_{pan}} \rightarrow f_- = \frac{f_g f_{pan}}{f_g + f_{pan}} \quad (3)$$

The action required to change the focal length of the first composite lens **22** is to change the handedness of the input circularly polarized light (L_{pol}), which is equal to the effect of changing the sign of the focal length of the Pancharatnam

lens. This also automatically changes the focal length of the second composite lens **24** to the opposite sign from that of the first composite lens **22** due to the half-wave plate property of the first Pancharatnam lens **32**.

[0038] The magnification $M_1 = f_+/f_-$ in State 1 can then be written as:

$$M_1 = \frac{f_+}{f_-} = \frac{f_g f_{pan}}{f_g - f_{pan}} \times \frac{f_g + f_{pan}}{f_g f_{pan}} = \frac{f_g + f_{pan}}{f_g - f_{pan}} \quad (4)$$

and the magnification $M_2 = 1/M_1$ can be written as:

$$M_2 = \frac{f_g - f_{pan}}{f_g + f_{pan}} \quad (5)$$

[0039] Combining Expressions (2), (3), and (4) and the relationship of the zoom ratio Z to the magnification M_1 , i.e. $Z = M_1^2$, provides a measure of the distance $(f_+ - f_-)$ that limits the zoom lens as:

$$(f_+ - f_-) = \left(\frac{Z - 1}{2\sqrt{Z}} \right) f_{pan} \quad (6)$$

Expression (6) shows that a reduced focal length f_{pan} for the Pancharatnam lenses **32**, **34** enables the overall length $(f_+ - f_-)$ of the optical magnification train **20** to be reduced. An advantage of a Pancharatnam lens is that it is capable of having a large diameter while at the same time having a short focal length. Pancharatnam lenses can be designed with the ratio of the focal length to the diameter (known as the “f-number, or $f\#$ ”) being less than or equal to 2. In other words, $\frac{f_{pan}}{D} \leq 2$ where D is the diameter of the Pancharatnam lens. Writing this inequality as $f_{pan} \leq 2D$ and inserting into Expression (6) yields a design constraint:

$$(f_+ - f_-) \leq \left(\frac{Z-1}{\sqrt{Z}} \right) D \quad (7)$$

for the achievable case in which the f-number of the Pancharatnam lens is less than or equal to 2. By way of a numeric example, consider the case of a value of a design basis zoom ratio of $Z = 4$ and a design aperture defined by a diameter $D = 4 \text{ mm}$ for the Pancharatnam lenses **32**, **34**. Putting these values into Expression (7) yields $(f_+ - f_-) \leq \left(\frac{4-1}{\sqrt{4}} \right) (4 \text{ mm})$ so that $(f_+ - f_-) \leq 6 \text{ mm}$. As another numeric example, if the design parameters are zoom ratio $Z = 10$ and aperture (mainly controlled by Pancharatnam lens diameter) $D = 1.5 \text{ mm}$, then Expression (6) yields $(f_+ - f_-) \leq \left(\frac{10-1}{\sqrt{10}} \right) (1.5 \text{ mm})$ so that $(f_+ - f_-) \leq 4.3 \text{ mm}$. By comparison, a switchable zoom apparatus with an optical magnification train that employs conventional electro-optic liquid crystal lenses typically requires an optical magnification train of length 10 centimeters or longer.

[0040] To provide further illustration, a particular design is considered, in which the State 1 design-basis magnification is $M_1 = 2$. From Expression (4) it can be seen that this magnification is obtained for $f_g = 3f_{pan}$. Designating the length of the optical magnification train **20** as L_{zoom} , it follows from Expressions (2) and (3) that for the design basis $M_1 = 2$:

$$L_{zoom} = f_+ - f_- = \frac{f_g f_{pan}}{f_g - f_{pan}} - \frac{f_g f_{pan}}{f_g + f_{pan}} = \frac{(3f_{pan})(f_{pan})}{3f_{pan} + f_{pan}} = \frac{3f_{pan}}{4} \quad (8)$$

To provide a numerical example, further assume that the Pancharatnam lenses **32**, **34** each have focal length $f_{pan} = 8.5 \text{ mm}$, and select the polarization-independent lenses **42**, **44** to have focal length magnitude $f_g = 25 \text{ mm}$ about three times this value (approximately satisfying $f_g = 3f_{pan}$ to yield $M_1 = 2$). For these values, $f_+ = 12.9 \text{ mm}$ and $f_- = 6.34 \text{ mm}$, and the lens separation is therefore $f_+ - f_- = 6.56 \text{ mm}$. It will be appreciated that a quarter-wave or half-wave plate could be formed with a thin film of a few microns thickness (with

suitable electrodes for electrical switching) and a polarizer can also be constructed with a thin film configuration – thus, this example corresponds to an electrically switchable zoom apparatus with zoom ratio $M_1^2 = 4$ having a total thickness of well under 1 cm. More generally, the optical magnification train **20** may in some embodiments have a total thickness of less than or equal to 1.0 cm, and more preferably less than or equal to 5.0 mm, in combination with an f-number of 2.0 or lower. This low profile design is achievable, in part, because the Pancharatnam lenses **32**, **34** can be made thin, as the requisite thickness of the Pancharatnam lens does not increase with increasing aperture size. Additionally, the composite lenses **22**, **24** can be constructed as unitary compound lenses in which the polarization-independent lens **42**, **44** serves as one support substrate for the corresponding Pancharatnam lens layer. The thickness of the complete zoom apparatus **10** can be comparable, e.g. less than or equal to 1.0 cm, and more preferably less than or equal to 5.0 mm, because the ancillary (optional) spectral filtering **F** and polarization **P** components can be made thin. For example, the thickness of the active layer of a quarter- or half-wave plate is on the order of the wavelength of light in the material, or less, e.g. on the order of one micron or less for wavelengths in the visible spectrum. Moreover, these components **F**, **P** typically do not impact the f-number of the system, so that the f-number of the zoom apparatus **10** is controlled by the f-number of the optical magnification train **20**.

[0041] With reference to FIGURES 3 and 4, the foregoing numerical example was simulated using the Zemax™ optical design package (available from Zemax LLC, Redmond, WA, USA). In the simulation, the Pancharatnam lenses **32**, **34** were simulated as gradient index lenses, each simulated as directly coupled with an N-BK7 plano-concave lens serving as the lens **42**, **44**. The distance between the two composite lenses **22**, **24** was simulated as 6.5 mm. FIGURE 3 shows a ray trace diagram produced by the simulation of the system in State 1, where the input light (L_{pol}) was assumed to be of the polarization state to cause the left Pancharatnam lens **32** to be a positive lens and the right

Pancharatnam lens **34** to be negative lens. FIGURE 4 analogously shows a ray trace diagram produced by the simulation of the system in State 2.

[0042] A zoom apparatus with an optical magnification train conforming with the optical magnification train **20** described with reference to FIGURES 1 and 2 was actually constructed, and is described in the following.

[0043] With reference to FIGURES 5, 5(a), and 5(b), microscope images are presented of a single Pancharatnam lens of the type used in the actually constructed zoom apparatus. The imaged Pancharatnam lens has the thickness of half-wave plate at the 633 nm wavelength. FIGURE 5 shows an “overview” microscope image, FIGURE 5(a) shows a magnified image around the center of the lens (marked as region “(a)” in FIGURE 5), and FIGURE 5(b) shows a magnified image close to the edge of the lens (marked as region “(b)” in FIGURE 5). These microscope images were taken between crossed polarizers with a red color filter. The black rings correspond to the regions where the spiraling optics axis is aligned with the polarizer or analyzer. Therefore, the director angle β changes by 90 degrees between each dark ring. One pitch, meaning the director angle changes by 180 degrees, was measured to be about 2.2 μm in the edge area, which satisfies with the initial design. This Pancharatnam lens has a diameter of 5 mm and a focal length of 8.5 mm, which is the same parameters as were used in the simulation described with reference to FIGURES 3 and 4.

[0044] Based on the Zemax™ simulation described with reference to FIGURES 3 and 4, a zoom apparatus including the optical magnification train **20** of FIGURES 1 and 2 was constructed, using two Pancharatnam lenses of the type imaged in FIGURES 5, 5(a), and 5(b) as the Pancharatnam lenses **32**, **34** and two commercial N-BK7 plano-concave lenses as the polarization independent lenses **42**, **44**. Tests performed using this actually constructed zoom apparatus are reported in the following.

[0045] With reference to FIGURES 6(a), 6(b), and 6(c), the zooming function of the actually constructed zoom apparatus was tested using a red laser beam having a 2 mm diameter. This was a test of the use of the zoom apparatus as a

beam expander device with value -2 in State 1 and value +2 in State 2. In the tests photographed in FIGURES 6(a), 6(b), and 6(c), a laser was incident from right side of each photograph. FIGURE 6(a) shows the input beam with ~2 mm diameter without using the zoom lens. In other words, FIGURE 6(a) shows the unaltered laser beam. FIGURE 6(b) shows the output laser beam spot reduced to about 1mm in diameter using the zoom apparatus in State 1. FIGURE 6(c) shows the output laser beam spot expanded to about 4mm in diameter using the zoom apparatus in State 2.

[0046] With reference to FIGURES 7(a), 7(b), and 7(c), images are shown of a test object (1951 USAF test chart) acquired: without using the zoom apparatus (FIGURE 7(a)); with the zoom apparatus using left circular polarized light to obtain State 1 (FIGURE 7(b)); and with the zoom apparatus using right circular polarized light to obtain State 2 (FIGURE 7(c)). These experiments tested the image quality and zoom ratio of the actually constructed zoom apparatus device by using the 1951 USAF test chart under a microscope with the same objective lens (FIGURE 7(a)). The center area of test chart is observed through the lens with the red illumination light having opposite states of circular polarization as photographed in Figure 7(b) and 7(c), respectively. The magnitude of zoom lens magnification in State 1 (FIGURE 7(b)) is about 2 ×, while the magnitude of zoom lens magnification in State 2 (FIGURE 7(c)) is about 0.5 ×. Therefore, the zoom ratio Z is $\frac{M_1}{M_2} \sim 4$ as designed.

[0047] With reference back to FIGURE 1, it is again emphasized that the optical magnification train **20** is an entirely static (i.e. passive) system. There are no moving parts, and no electrical inputs for applying an electrical bias to the optical magnification train **20**. Rather, optical zoom switching is achieved by reversing handedness of the circularly polarized input light (L_{pol}), which in the illustrative example is done by switching the polarization element or sub-system **P** using the electrical bias source **16**. Other components or approaches for providing circularly polarized input light with reversible handedness may alternatively be used. Moreover, while the illustrative Galilean telescope configuration for the optical magnification train **20** advantageously provides a

low profile zoom apparatus due to the small composite lens separation ($f_+ - f_-$), other magnification train topologies are contemplated, such as an astronomical telescope configuration. Additionally or alternatively, it is contemplated to place two or more such magnification trains in series to obtain more obtainable switching states (i.e. more than two zoom settings) or to achieve other optical benefits that are conventionally obtainable by combining magnification systems.

[0048] In the illustrative embodiments, the first Pancharatnam lens **32** and the first polarization independent lens **42** are secured together to form a (first) compound lens unit defining the first composite lens **22**, and similarly the second Pancharatnam lens **34** and second polarization independent lens **44** are secured together to form a (second) compound lens unit defining the composite lens **24**. In variant embodiments, the composite lens **22** may have its constituent lenses **32**, **42** spaced apart from one another, and likewise the composite lens **24** may have its constituent lenses **34**, **44** spaced apart from one another. In such embodiments, the thin lens approximation likely will not apply to the composite lenses, but numerical analysis using optical ray tracing software or the like can be used to optimize the positioning of the constituent Pancharatnam and polarization-independent lenses to achieve switchable zoom in accordance with a particular optical design objective.

[0049] As a further variant, the polarization independent lenses **42**, **44** may themselves be constructed as compound lenses, or may comprise two or more lenses cooperatively providing the desired focal length. As previously mentioned, these lenses in general do not need to be negative lenses, and for example in an astronomical telescope magnification train configuration these lenses may be replaced by positive polarization-independent lenses.

[0050] As a further variant, it is contemplated to replace the illustrative static Pancharatnam lenses **32**, **34** and/or the static polarization-independent lenses **42**, **44** with electro-optic lenses so as to be able to adjust focal length f_{pan} and/or the focal length f_g , respectively. The skilled artisan can readily leverage such a modification, in combination with the consequent composite lens focal lengths of Expressions (2) and (3), in order to (for example) design a switchable

non-mechanical zoom apparatus having two switching states, but for which the specific zoom settings of one or both of those states is adjustable by adjusting the bias on the electro-optic lenses.

[0051] The disclosed optical magnification train **20** or variants as described herein or equivalents thereof may find application in any optical system that beneficially incorporates an electrically switchable, non-mechanical zoom apparatus. The disclosed optical magnification trains may be used in imaging systems to provide switchable objective focal length, in beam expander systems to provide adjustable beam expansion, and so forth.

[0052] It will be appreciated that various of the above-disclosed and other features and functions, or alternatives thereof, may be desirably combined into many other different systems or applications. It will be further appreciated that various presently unforeseen or unanticipated alternatives, modifications, variations or improvements therein may be subsequently made by those skilled in the art which are also intended to be encompassed by the following claims.

CLAIMS:

1. An optical magnification system comprising:
 - a first composite lens comprising a first Pancharatnam lens and a first polarization-independent lens; and
 - a second composite lens comprising a second Pancharatnam lens and a second polarization-independent lens;wherein the first composite lens is arranged to output light into the second composite lens.
2. The optical magnification system of claim 1 wherein the first composite lens and the second composite lens are identical lenses.
3. The optical magnification system of any one of claims 1-2 wherein:
 - the first composite lens has a positive focal length f_+ for circularly polarized light of a first handedness and a negative focal length of magnitude f_- for circularly polarized light of a second handedness opposite the first handedness; and
 - the second composite lens has the positive focal length f_+ for circularly polarized light of the first handedness and the negative focal length of magnitude f_- for circularly polarized light of the second handedness.
4. The optical magnification system of claim 3 wherein the first and second composite lenses are spaced apart by a distance $f_+ - f_-$.
5. The optical magnification system of any one of claims 1-4 wherein the optical magnification system is a static system that does not include any electrical or mechanical inputs.
6. The optical magnification system of any one of claims 1-5 wherein the optical magnification system has a total thickness of 1.0 cm or less and has an f-number of 2 or lower.

7. The optical magnification system of any one of claims 1-5 wherein the optical magnification system has a total thickness of 5.0 mm or less and has an f-number of 2 or lower.

8. A zoom system comprising:

an optical magnification system as set forth in any one of claims 1-7; and

an electro-optic polarization element or sub-system configured to input circularly polarized light to the first composite lens of the optical magnification system;

wherein the electro-optic polarization element or sub-system is configured to electrically switch the circularly polarized light between left-handedness and right-handedness.

9. The zoom system of claim 8 further comprising:

a spectral bandpass filter.

10. An optical magnification system comprising:

a first lens having a positive focal length f_+ for circularly polarized light of a first handedness and a negative focal length of magnitude f_- for circularly polarized light of a second handedness opposite the first handedness; and

a second lens having a positive focal length f_+ for circularly polarized light of the first handedness and a negative focal length of magnitude f_- for circularly polarized light of the second handedness;

wherein the first lens is arranged to output into the second lens.

11. The optical magnification system of claim 10 wherein the first and second lenses are spaced apart by a distance $f_+ - f_-$.

12. The optical magnification system of any one of claims 10-11 wherein:

the first lens includes a Pancharatnam lens; and

the second lens includes a Pancharatnam lens.

13. The optical magnification system of claim 12 wherein:

the first lens is a composite lens including at least one additional lens in addition to the Pancharatnam lens; and

the second lens is a composite lens including at least one additional lens in addition to the Pancharatnam lens.

14. The optical magnification system of claim 12 wherein:

the Pancharatnam lens of the first lens has focal length of magnitude f_{pan} ;

the Pancharatnam lens of the second lens has focal length of magnitude f_{pan} ;

the first lens further includes a polarization-independent lens having negative focal length of magnitude f_g ; and

the second lens further includes a polarization-independent lens having negative focal length of magnitude f_g .

15. The optical magnification system of claim 14 wherein:

the first lens is a composite lens in which the Pancharatnam lens and the polarization-independent lens are bonded together;

the second lens is a composite lens in which the Pancharatnam lens and the polarization-independent lens are bonded together; and

$$f_+ = \frac{f_g f_{pan}}{f_g - f_{pan}} \text{ and } f_- = \frac{f_g f_{pan}}{f_g + f_{pan}}.$$

16. The optical magnification system of any one of claims 10-15 wherein the optical magnification system has no moving parts.

17. The optical magnification system of any one of claims 10-16 wherein the optical magnification system has no electrical inputs for applying an electrical bias to the optical magnification train.

18. A zoom apparatus comprising:

an optical magnification system as set forth in any one of claims 10-17; and
an electro-optic polarization element or sub-system configured to input circularly polarized light to the first lens of the optical magnification system;

wherein the electro-optic polarization element or sub-system is configured to electrically switch the circularly polarized light between left-handedness and right-handedness.

19. The zoom apparatus of claim 18 further comprising:
a spectral bandpass filter.

20. The zoom apparatus of any one of claims 18-19 wherein the zoom apparatus has a total thickness of 1.0 cm or less and has an f-number of 2 or lower.

21. The optical magnification system of any one of claims 18-19 wherein the zoom apparatus has a total thickness of 5.0 mm or less and has an f-number of 2 or lower.

22. An optical magnification system comprising:
a first composite lens including (i) a polarization-dependent lens that switches from a positive focal length for circularly polarized light of a first handedness to a negative focal length for circularly polarized light of a second handedness opposite the first handedness and (ii) a polarization-independent lens; and

a second composite lens including (i) a polarization-dependent lens that switches from a positive focal length for circularly polarized light of the first handedness to a negative focal length for circularly polarized light of the second handedness and (ii) a polarization-independent lens;

wherein the first composite lens and the second composite lens are arranged in an optical train with the first composite lens and the second composite lens spaced apart such that the optical train provides a first magnification for circularly polarized light of the first handedness and a second magnification different from the first magnification for circularly polarized light of the second handedness.

23. An optical magnification system comprising two Pancharatnam lenses, the optical magnification system providing a first magnification for left-hand circularly polarized light and a second magnification different from the first magnification for right-hand circularly polarized light.

24. The optical magnification system of claim 23 comprising:

a first composite lens including a first Pancharatnam lens of the two Pancharatnam lenses and at least one additional lens that is not a Pancharatnam lens; and

a second composite lens including a second Pancharatnam lens of the two Pancharatnam lenses and at least one additional lens that is not a Pancharatnam lens.

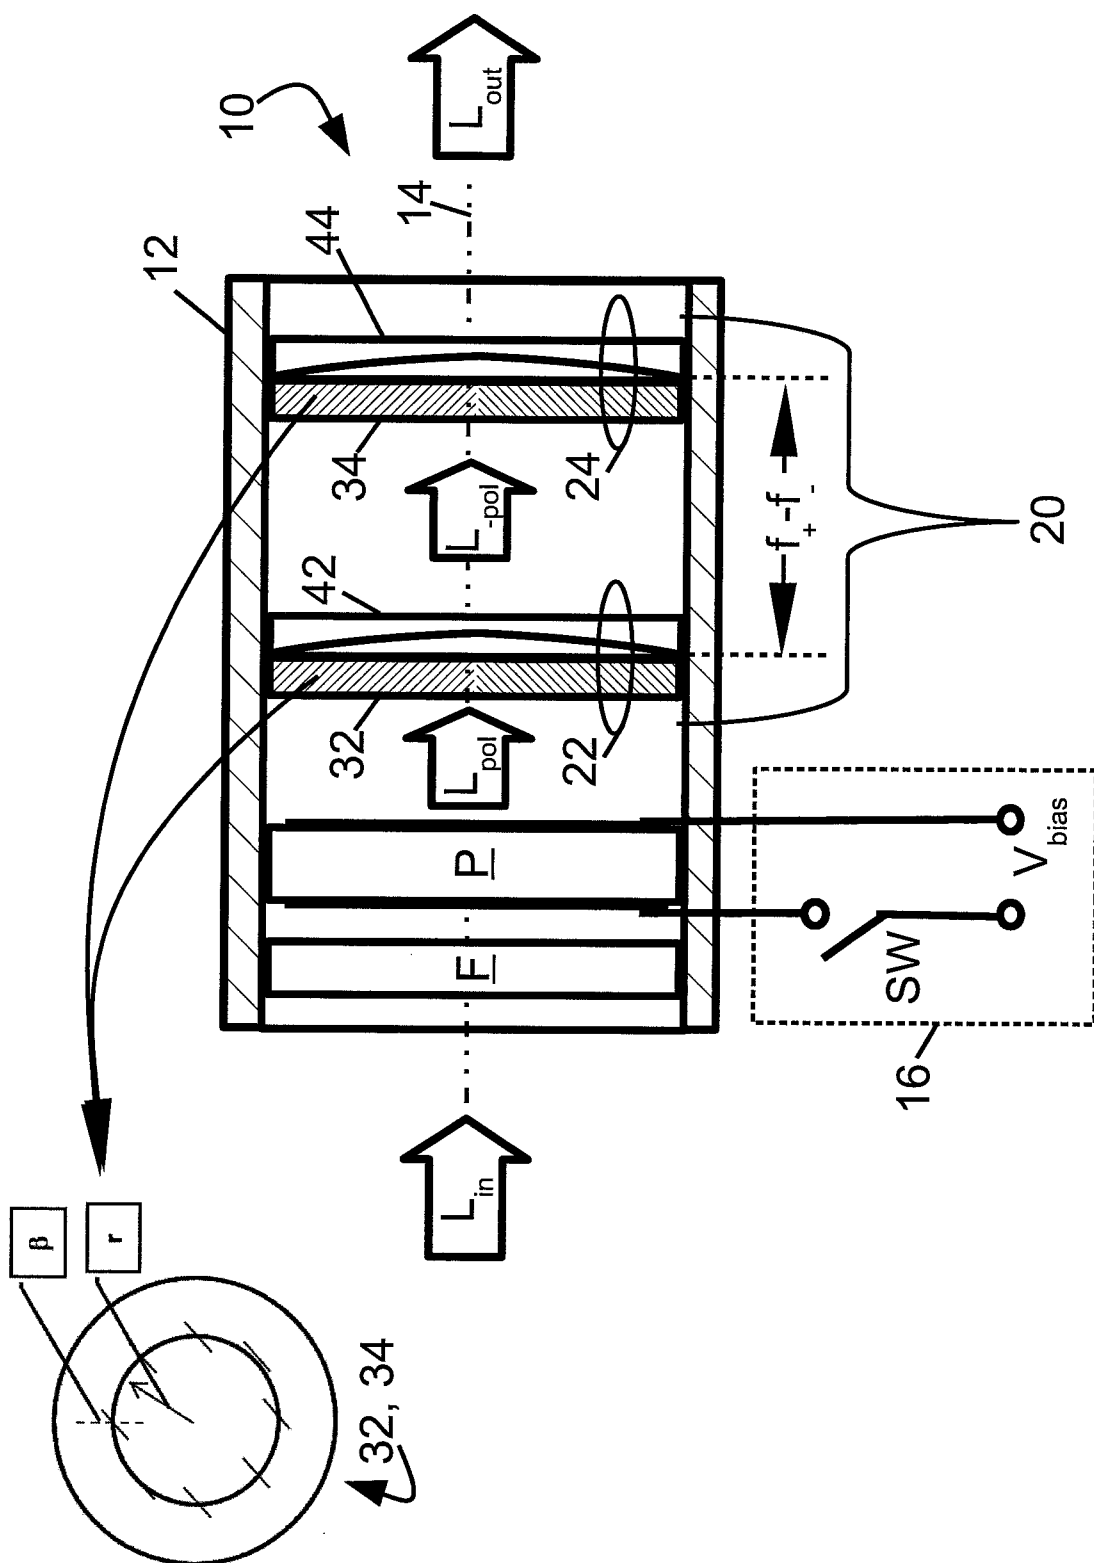


Fig. 1

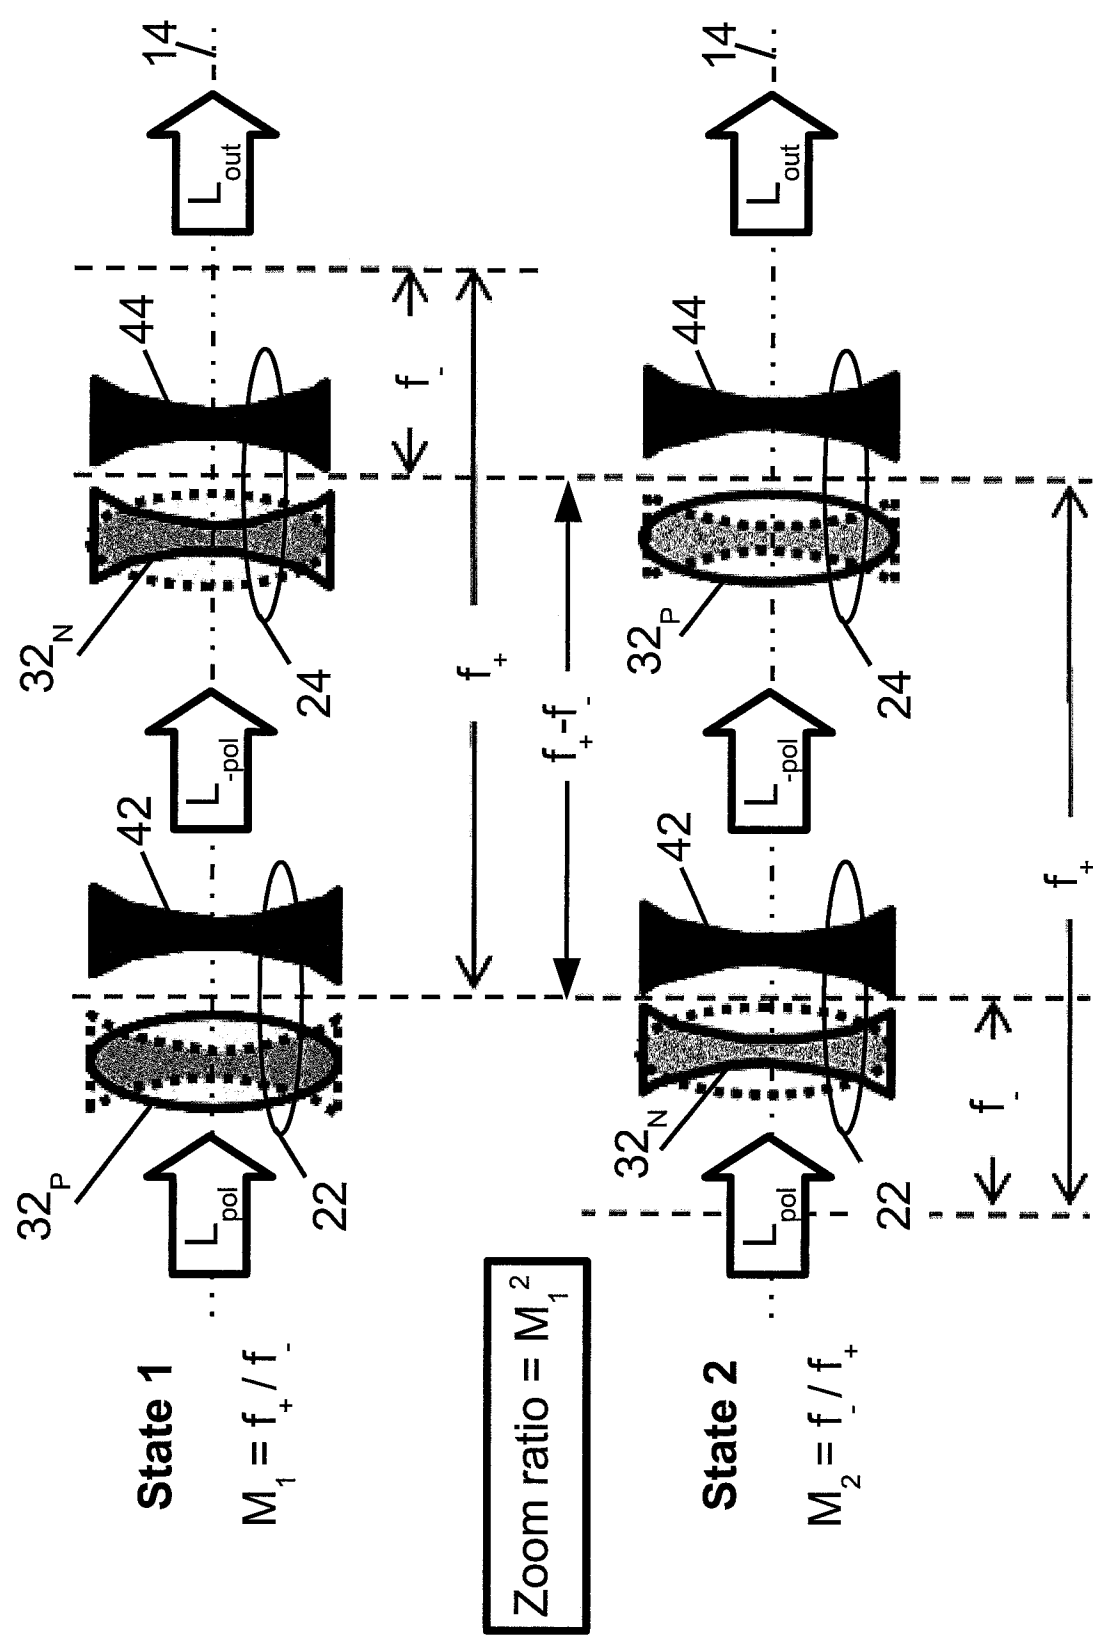


Fig. 2

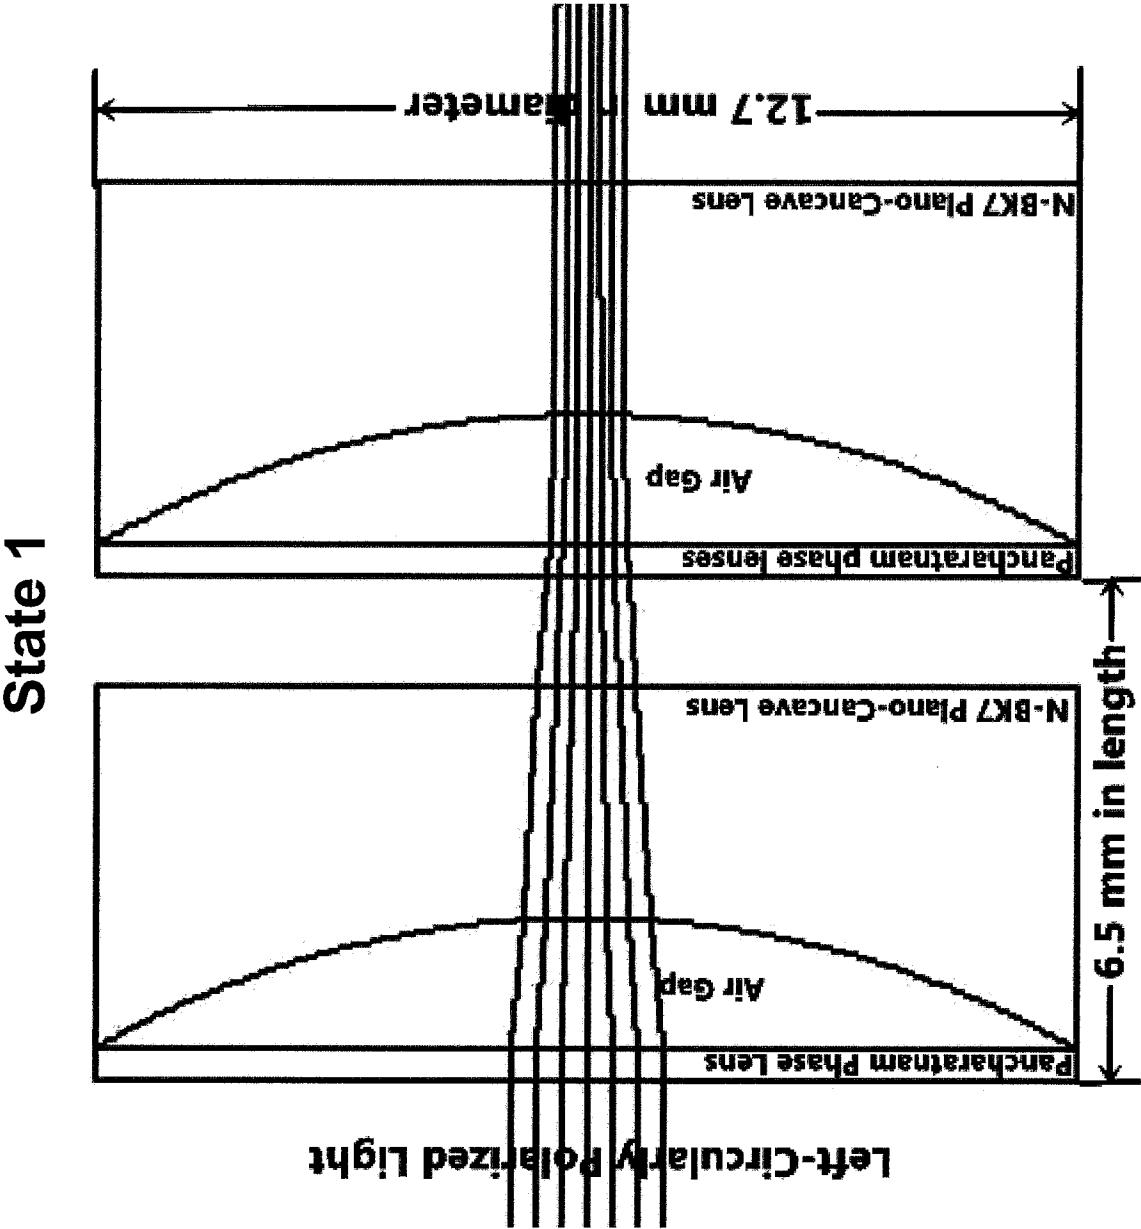


Fig. 3

State 2

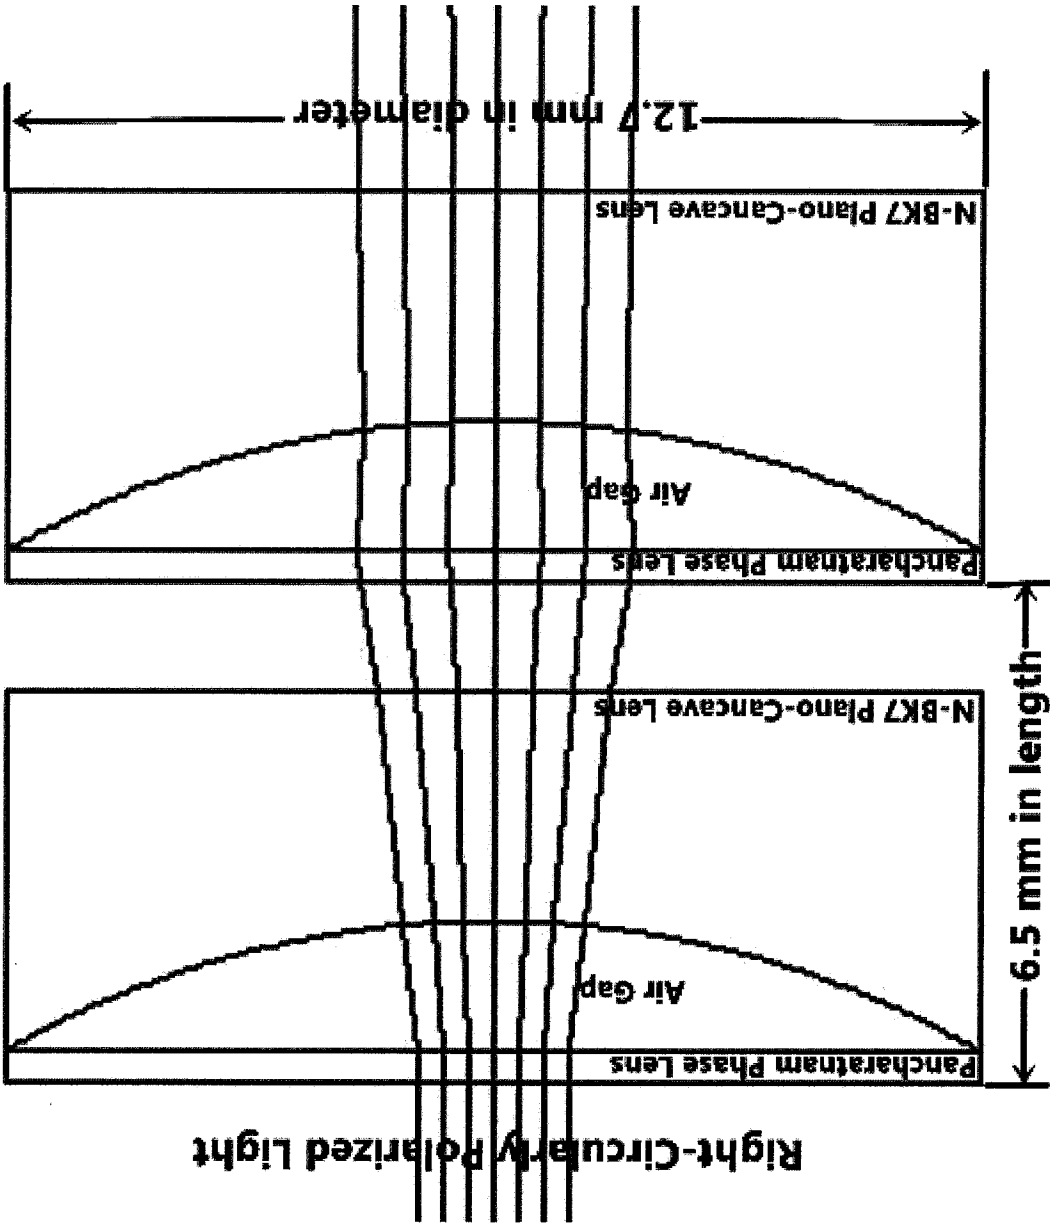


Fig. 4

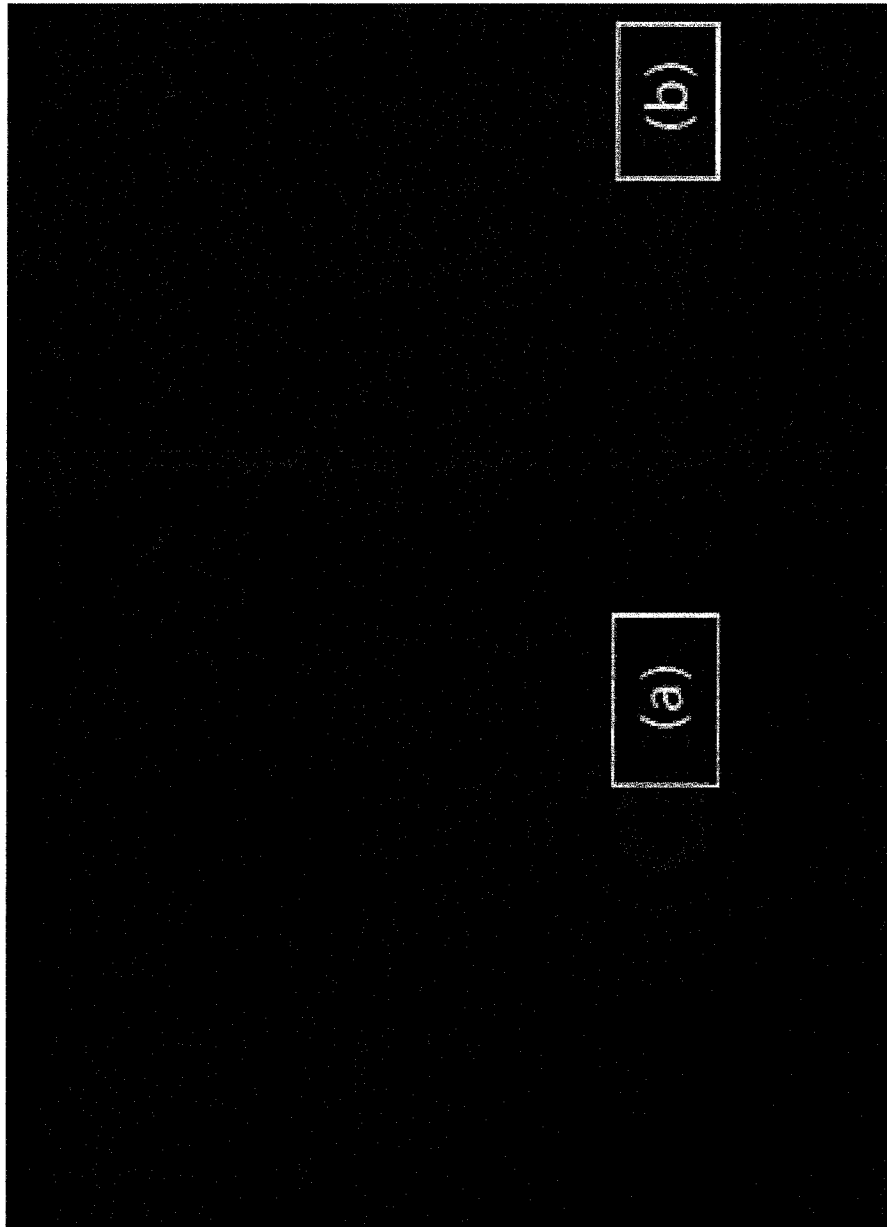


Fig. 5

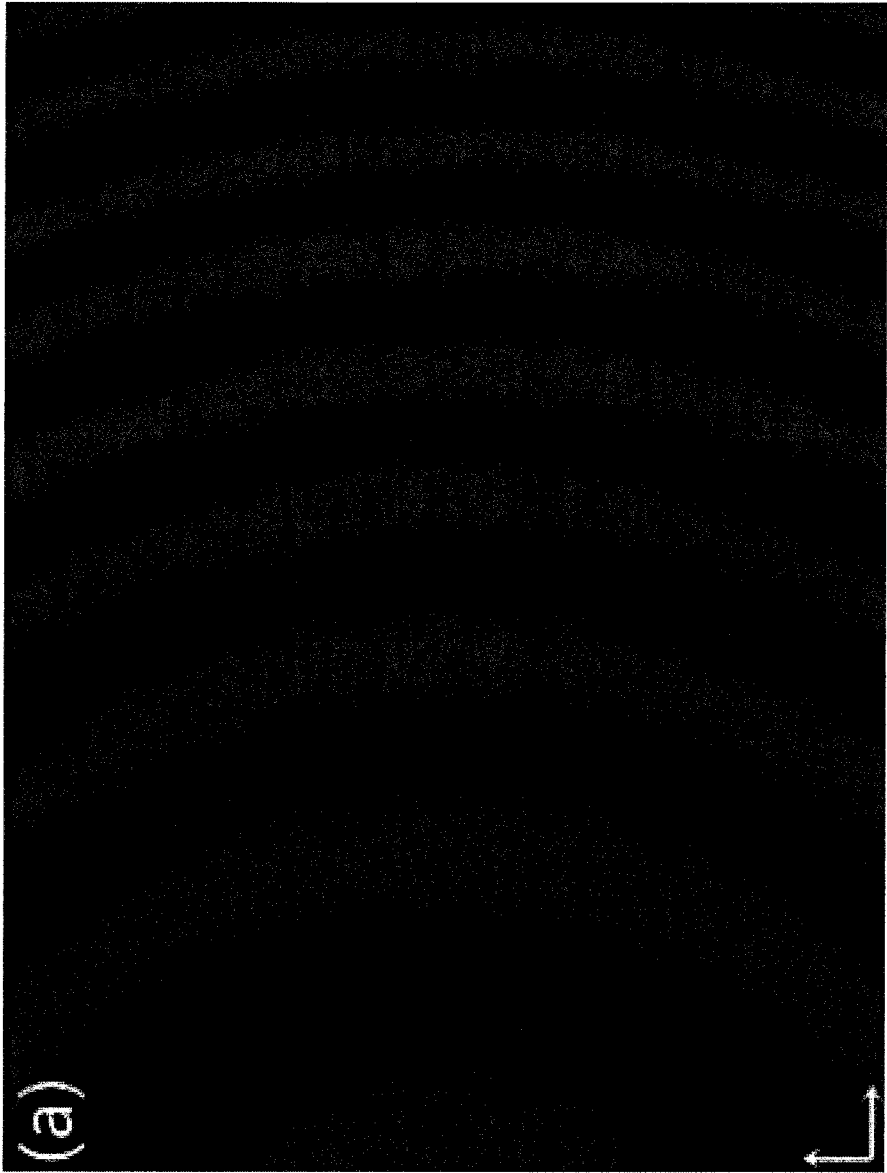
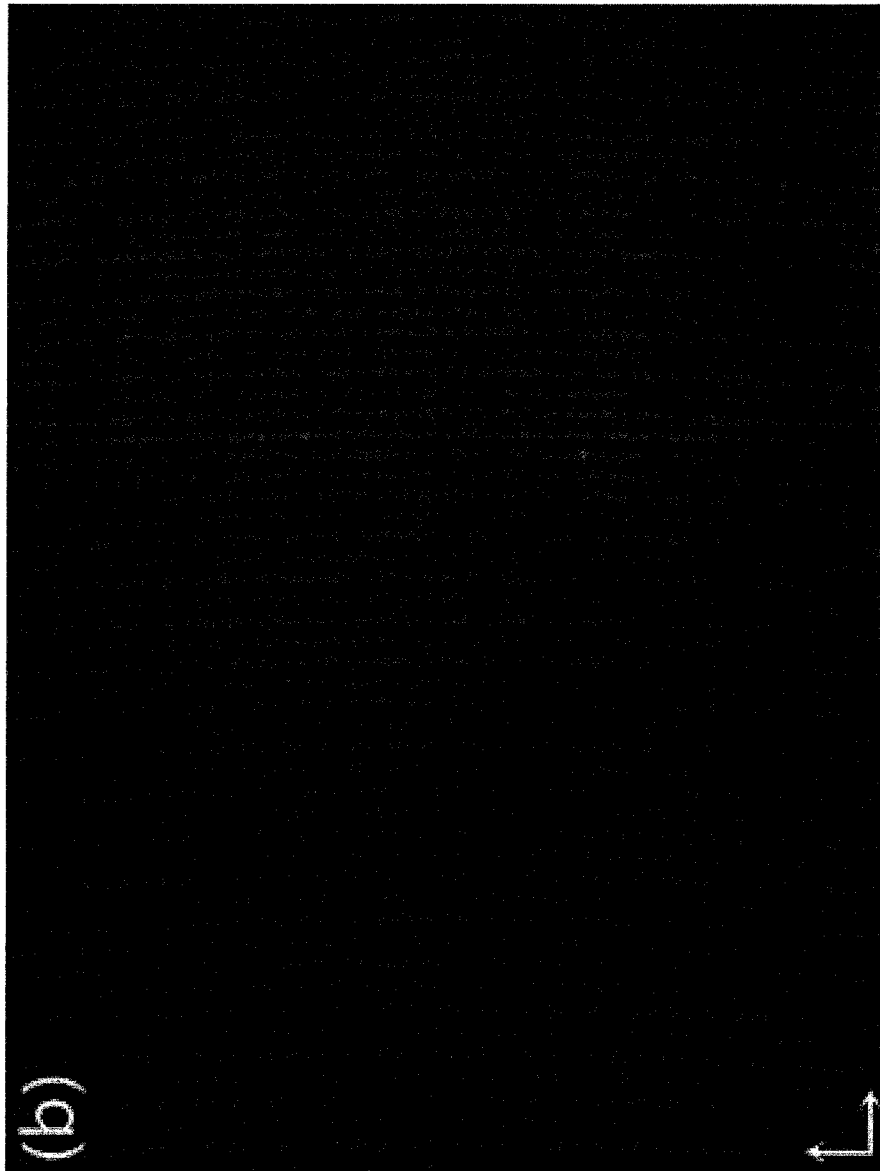


Fig. 5(a)

**Fig. 5(b)**

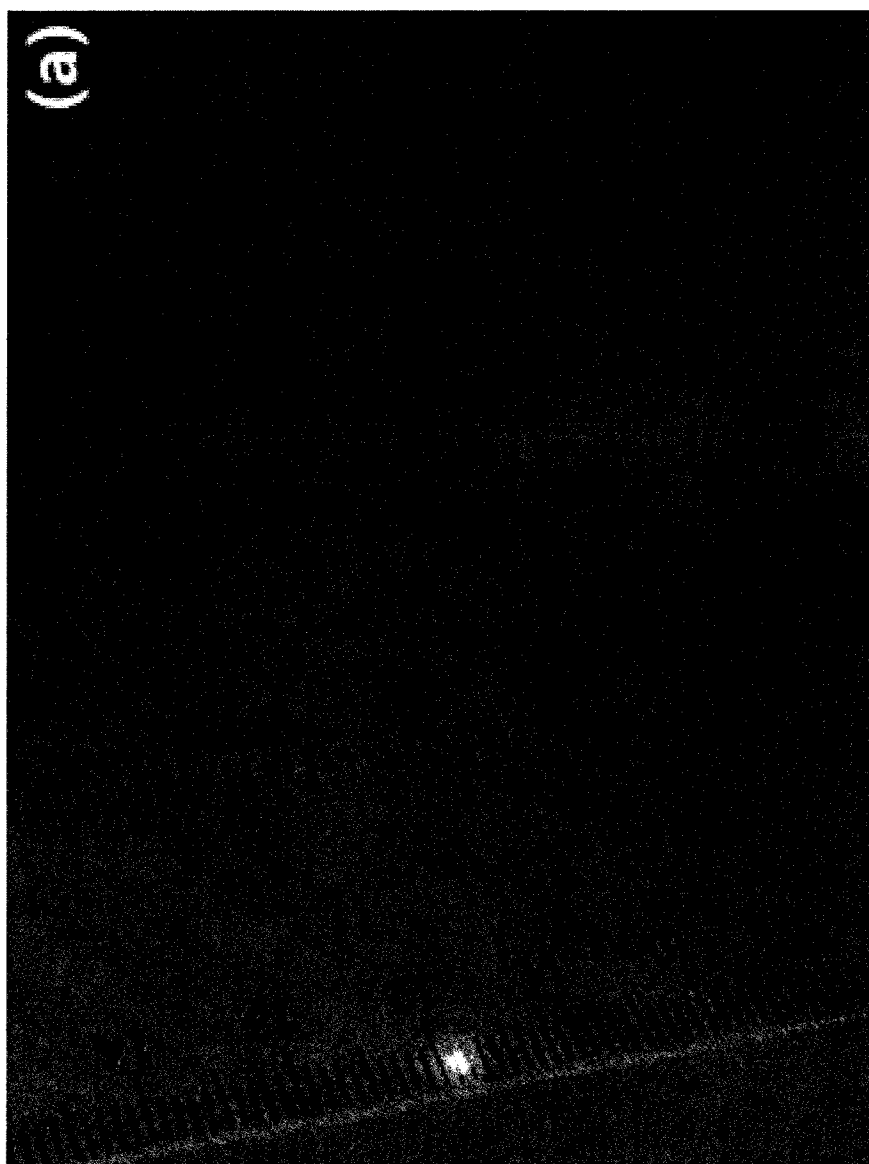


Fig. 6(a)



Fig. 6(b)



Fig. 6(c)

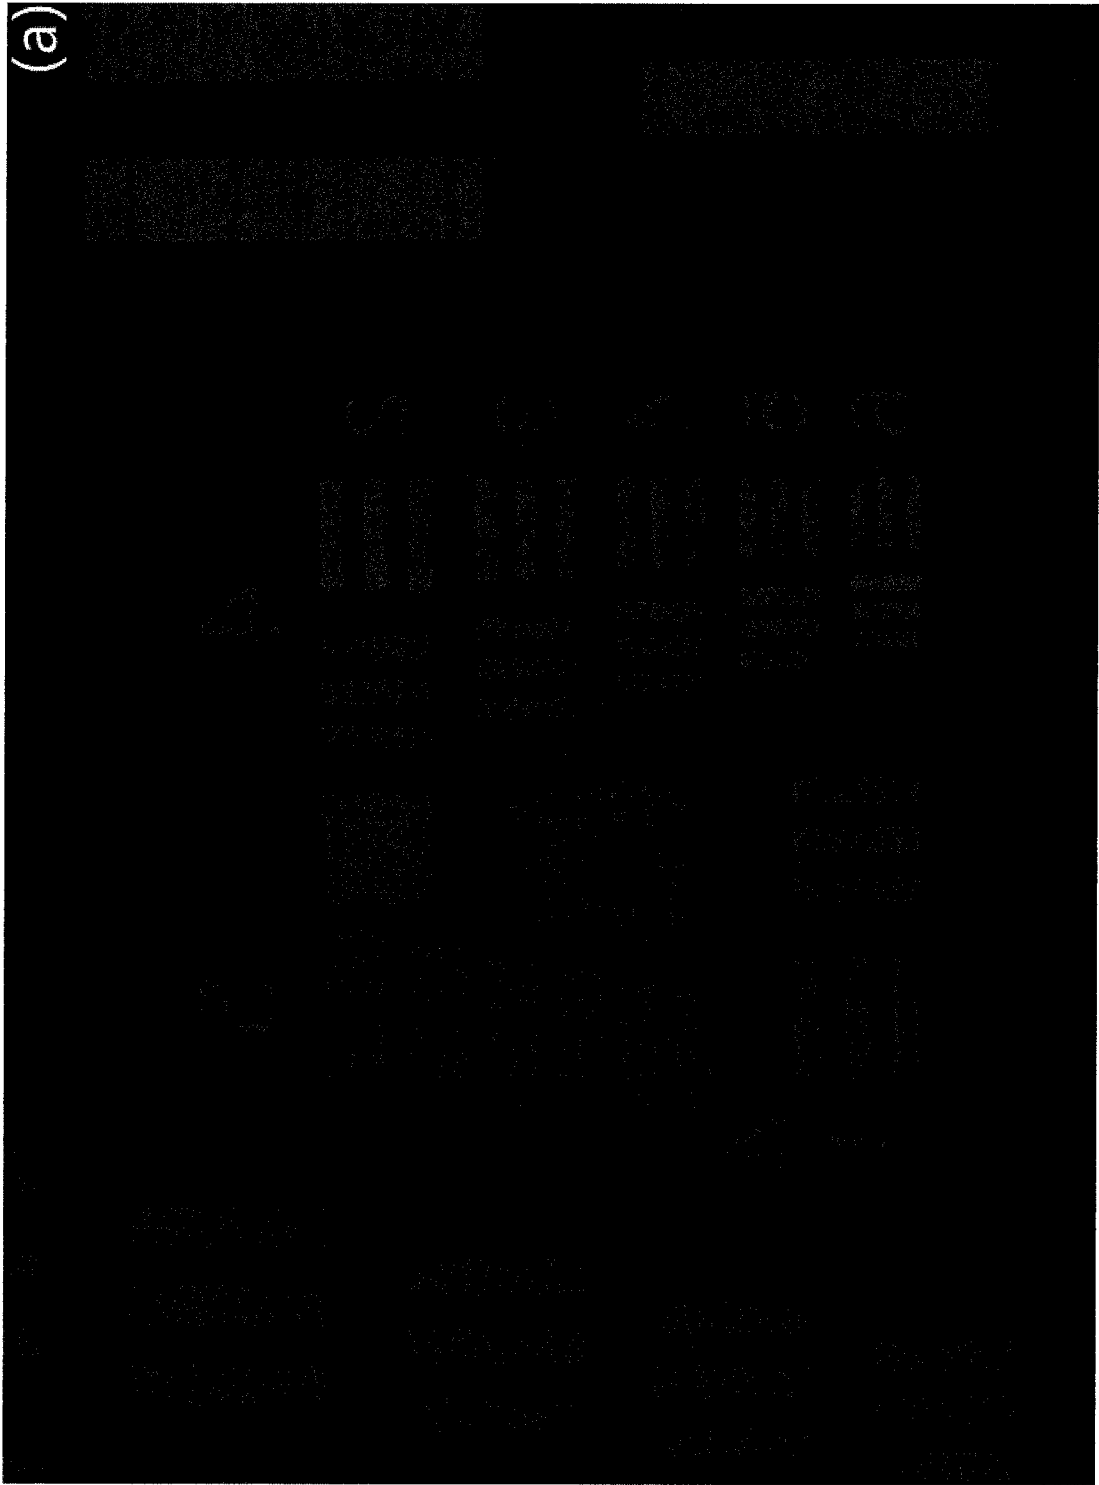


Fig. 7(a)

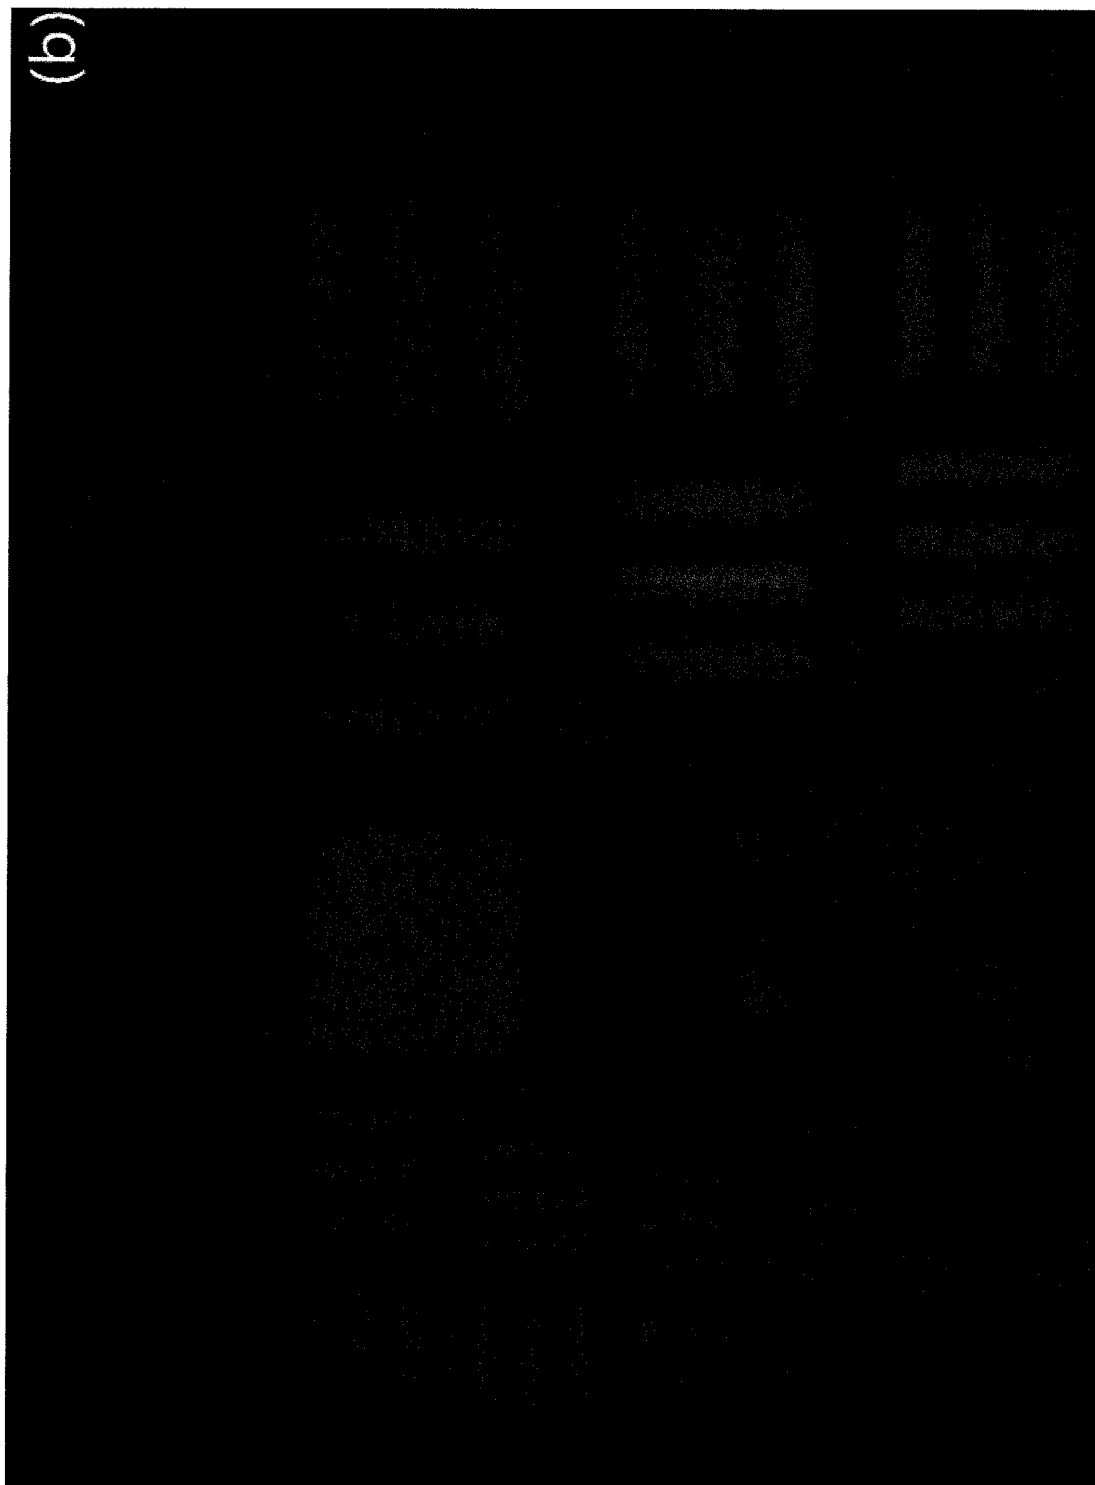


Fig. 7(b)

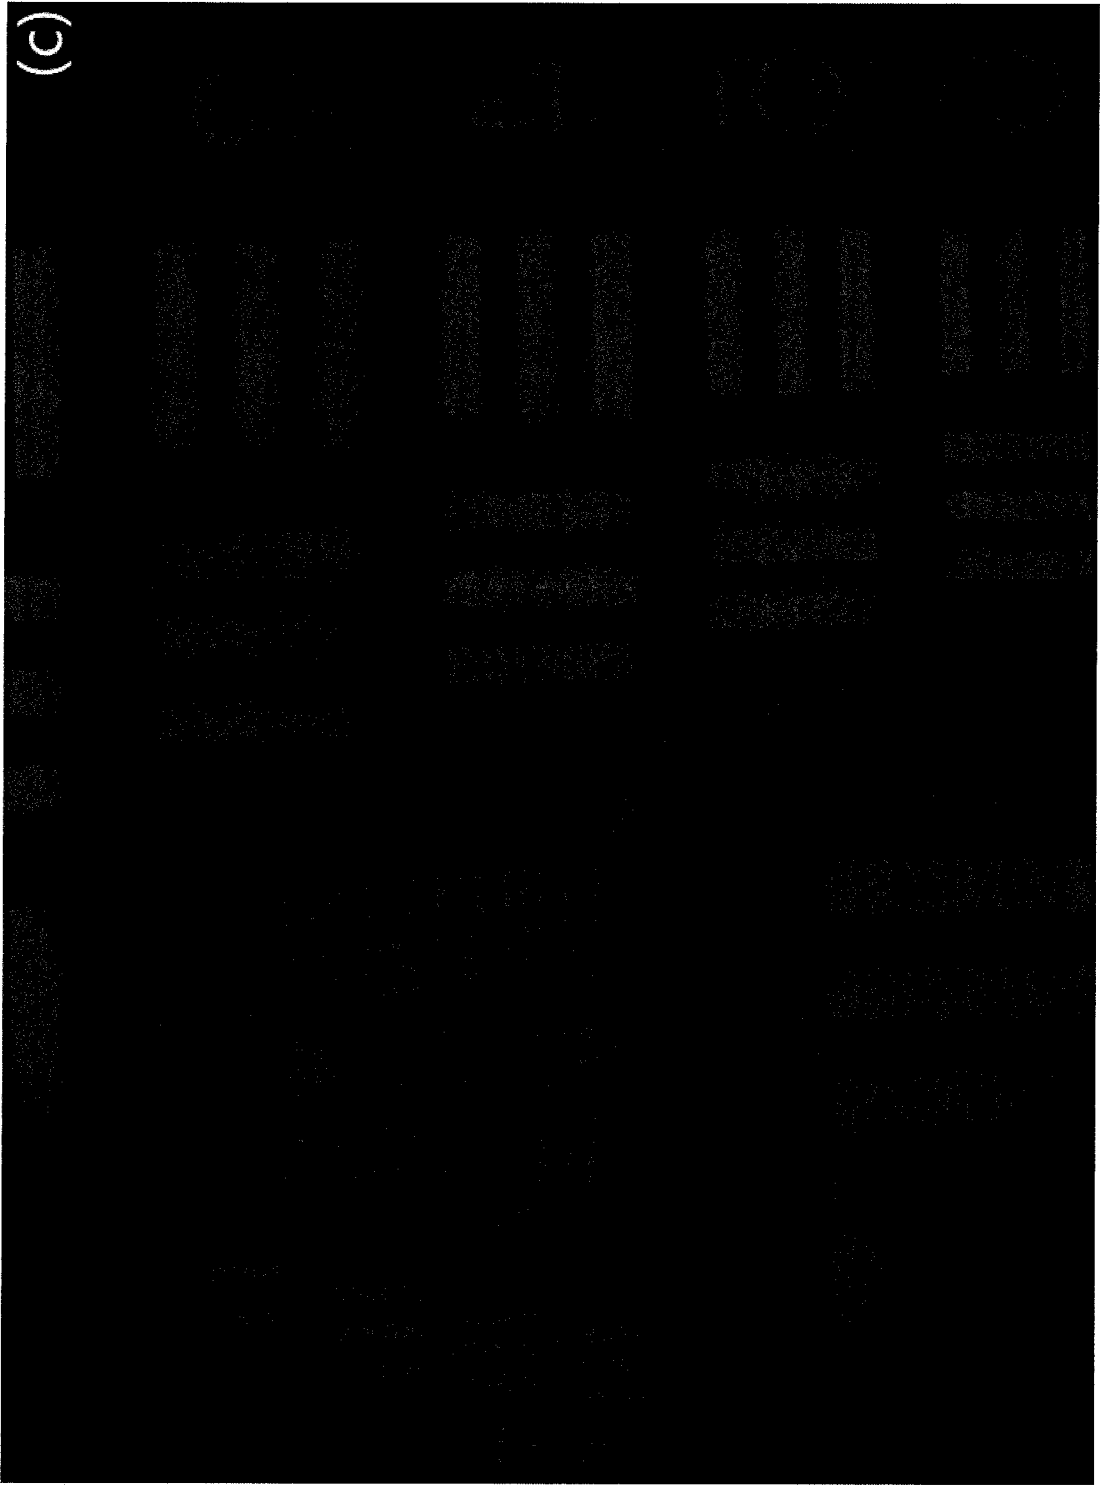


Fig. 7(c)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2016/024218

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G02B 27/48; G02B 27/00 (2016.01)

CPC - G02B 27/0037; G02B 27/0025 (2016.02)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - G02B 27/00; G02B 27/48; G02F 1/03 (2016.01)

CPC - G02B 27/0025; G02B 27/0037; G02B 27/0103 (2016.02)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC - 359/279 (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Patbase, Google Patents, Google

Search terms used: Pancharatnam lens, composite lens, magnification stack, polarization independent

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2012/0099413 A1 (SHARP) 26 April 2012 (26.04.2012) entire document	1-4, 10-15, 22-24
Y	US 2001/0000971 A1 (JOHNSON et al) 10 May 2001 (10.05.2001) entire document	1-4, 10-15, 22-24
A	US 2009/0141216 A1 (MARRUCCI) 04 June 2009 (04.06.2009) entire document	1-4, 10-15, 22-24
A	US 2009/0257106 A1 (TAN et al) 15 October 2009 (15.10.2009) entire document	1-4, 10-15, 22-24

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 May 2016

Date of mailing of the international search report

20 JUN 2016

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, VA 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2016/024218

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 5-9, 16-21
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.