



(86) Date de dépôt PCT/PCT Filing Date: 2007/05/30

(87) Date publication PCT/PCT Publication Date: 2007/12/06

(45) Date de délivrance/Issue Date: 2014/10/21

(85) Entrée phase nationale/National Entry: 2008/11/28

(86) N° demande PCT/PCT Application No.: IT 2007/000381

(87) N° publication PCT/PCT Publication No.: 2007/138640

(30) Priorité/Priority: 2006/06/01 (IT CH2006A000026)

(51) Cl.Int./Int.Cl. *B26D 7/18* (2006.01),
A24C 5/60 (2006.01), *A61F 13/00* (2006.01),
B26F 1/24 (2006.01), *B29C 59/00* (2006.01),
D04H 13/00 (2006.01)


(72) Inventeur/Inventor:
DI BERARDINO, FABIO, IT

(73) Propriétaire/Owner:
TEXOL S.R.L., IT

(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : MACHINE DESTINEE A LA PRODUCTION ET LA FABRICATION D'UN FILM ELASTIQUE DOUX AU TOUCHER, APPROPRIE AU DRAINAGE

(54) Title: A MACHINE UTILIZED FOR PRODUCING AND MANUFACTURING A RESILIENT FILM SOFT AT TOUCH, SUITABLE TO DRAINING USE

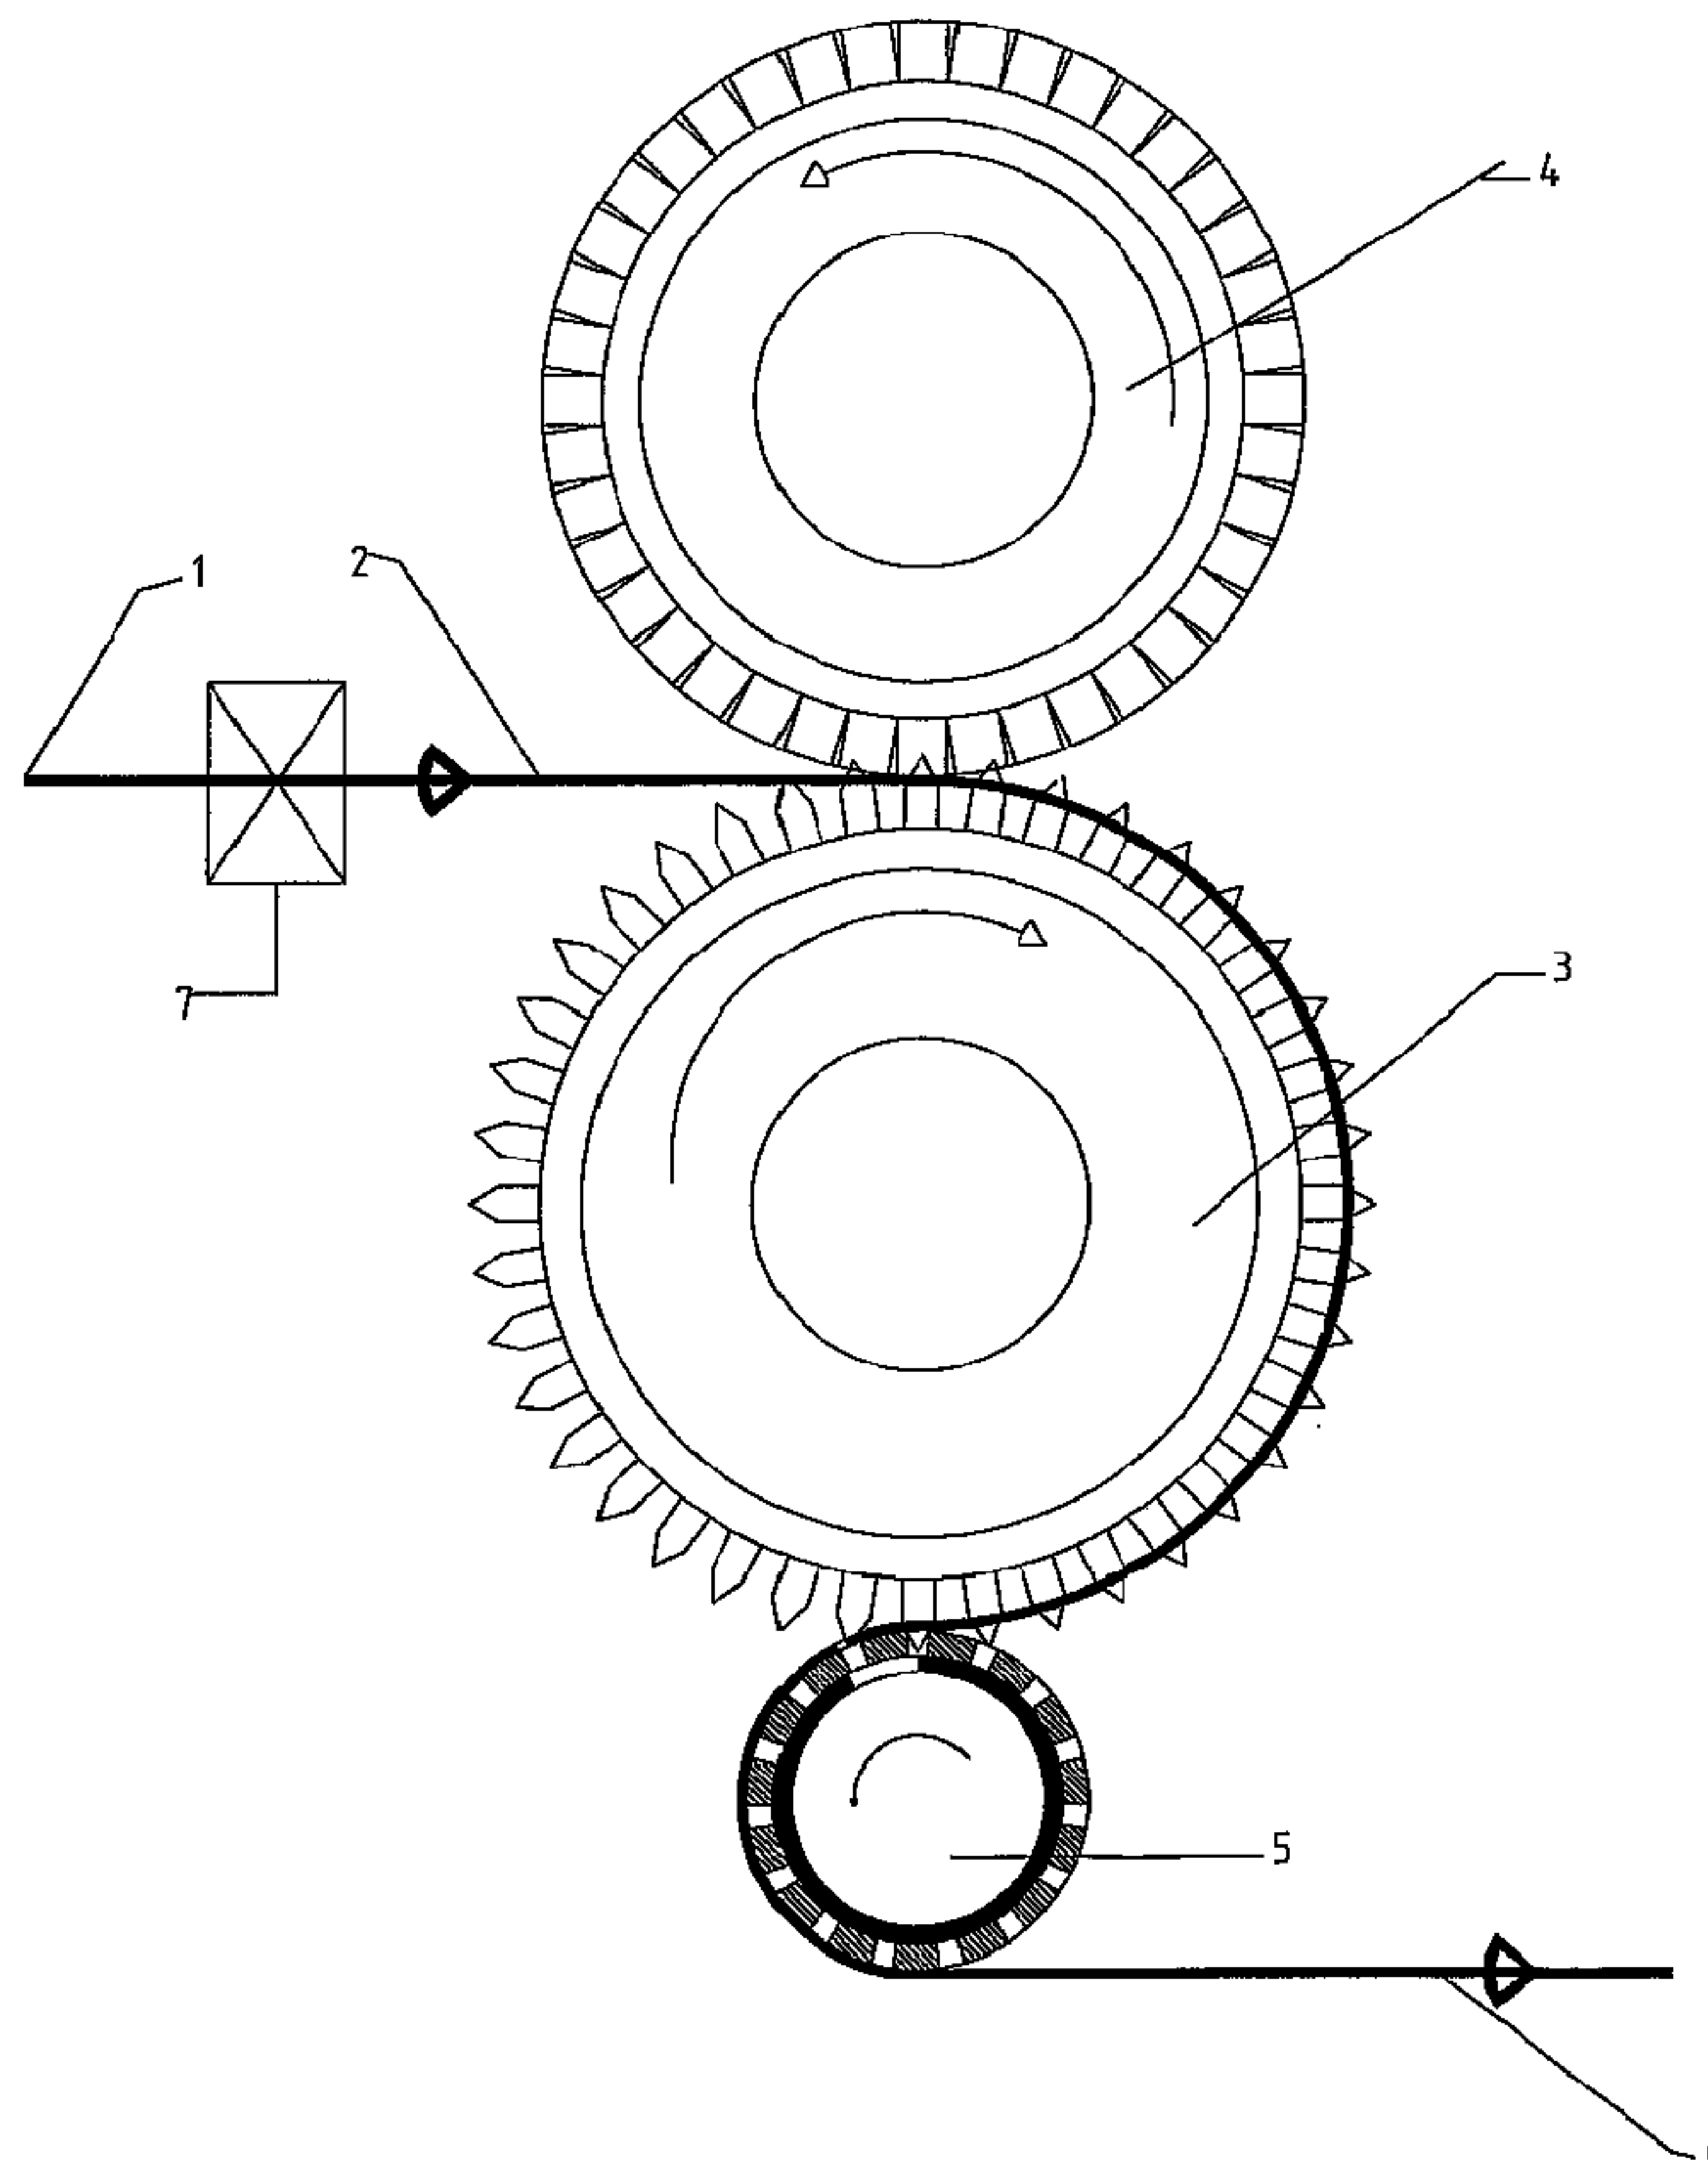

(57) Abrégé/Abstract:

A machine utilized for producing and manufacturing a film, soft at touch, resilient and suitable at draining use. A film produced by such a machine, presents, at least, on one surface an essentially continuous pattern of micro-funnels three-dimensional (3D)



(57) **Abrégé(suite)/Abstract(continued):**

directed in an essentially perpendicular way to the surface from which the micro-openings have origin. It presents also on the opposite surface a continuous pattern, composed by 3D macro-funnels directed in an essentially perpendicular way to the surface from which the macro-funnels have origin. The "micro-funnels" term, intend to describe a multitude of funnels non distinguishable by the human eye at a distance equal or higher than 450 mm. while the "macro funnels" term, intend to describe funnels clearly visible by the human eye at a distance higher than 450 mm.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 December 2007 (06.12.2007)

PCT

(10) International Publication Number
WO 2007/138640 A1

(51) International Patent Classification:

B26D 7/18 (2006.01) *A61F 13/00* (2006.01)
B26F 1/24 (2006.01) *B29C 59/00* (2006.01)
A24C 5/60 (2006.01) *D04H 13/00* (2006.01)

Fabio; Via Cento Croci N. 16, I-66010 Roccamontepiano (Chieti) (IT).

(74) Agent: **CLAUDIO ROSARIO CAFFE'**; Via Roma N. 138, I-65122 Pescara (IT).

(21) International Application Number:

PCT/IT2007/000381

(22) International Filing Date: 30 May 2007 (30.05.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

CH2006A000026 1 June 2006 (01.06.2006) IT


(71) Applicant (for all designated States except US): **TEXOL S.R.L.** [IT/IT]; Zona Industrial En. 356, I-65020 Alanno Scalo (Pescara) (IT).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: A MACHINE UTILIZED FOR PRODUCING AND MANUFACTURING A RESILIENT FILM SOFT AT TOUCH, SUITABLE TO DRAINING USE.

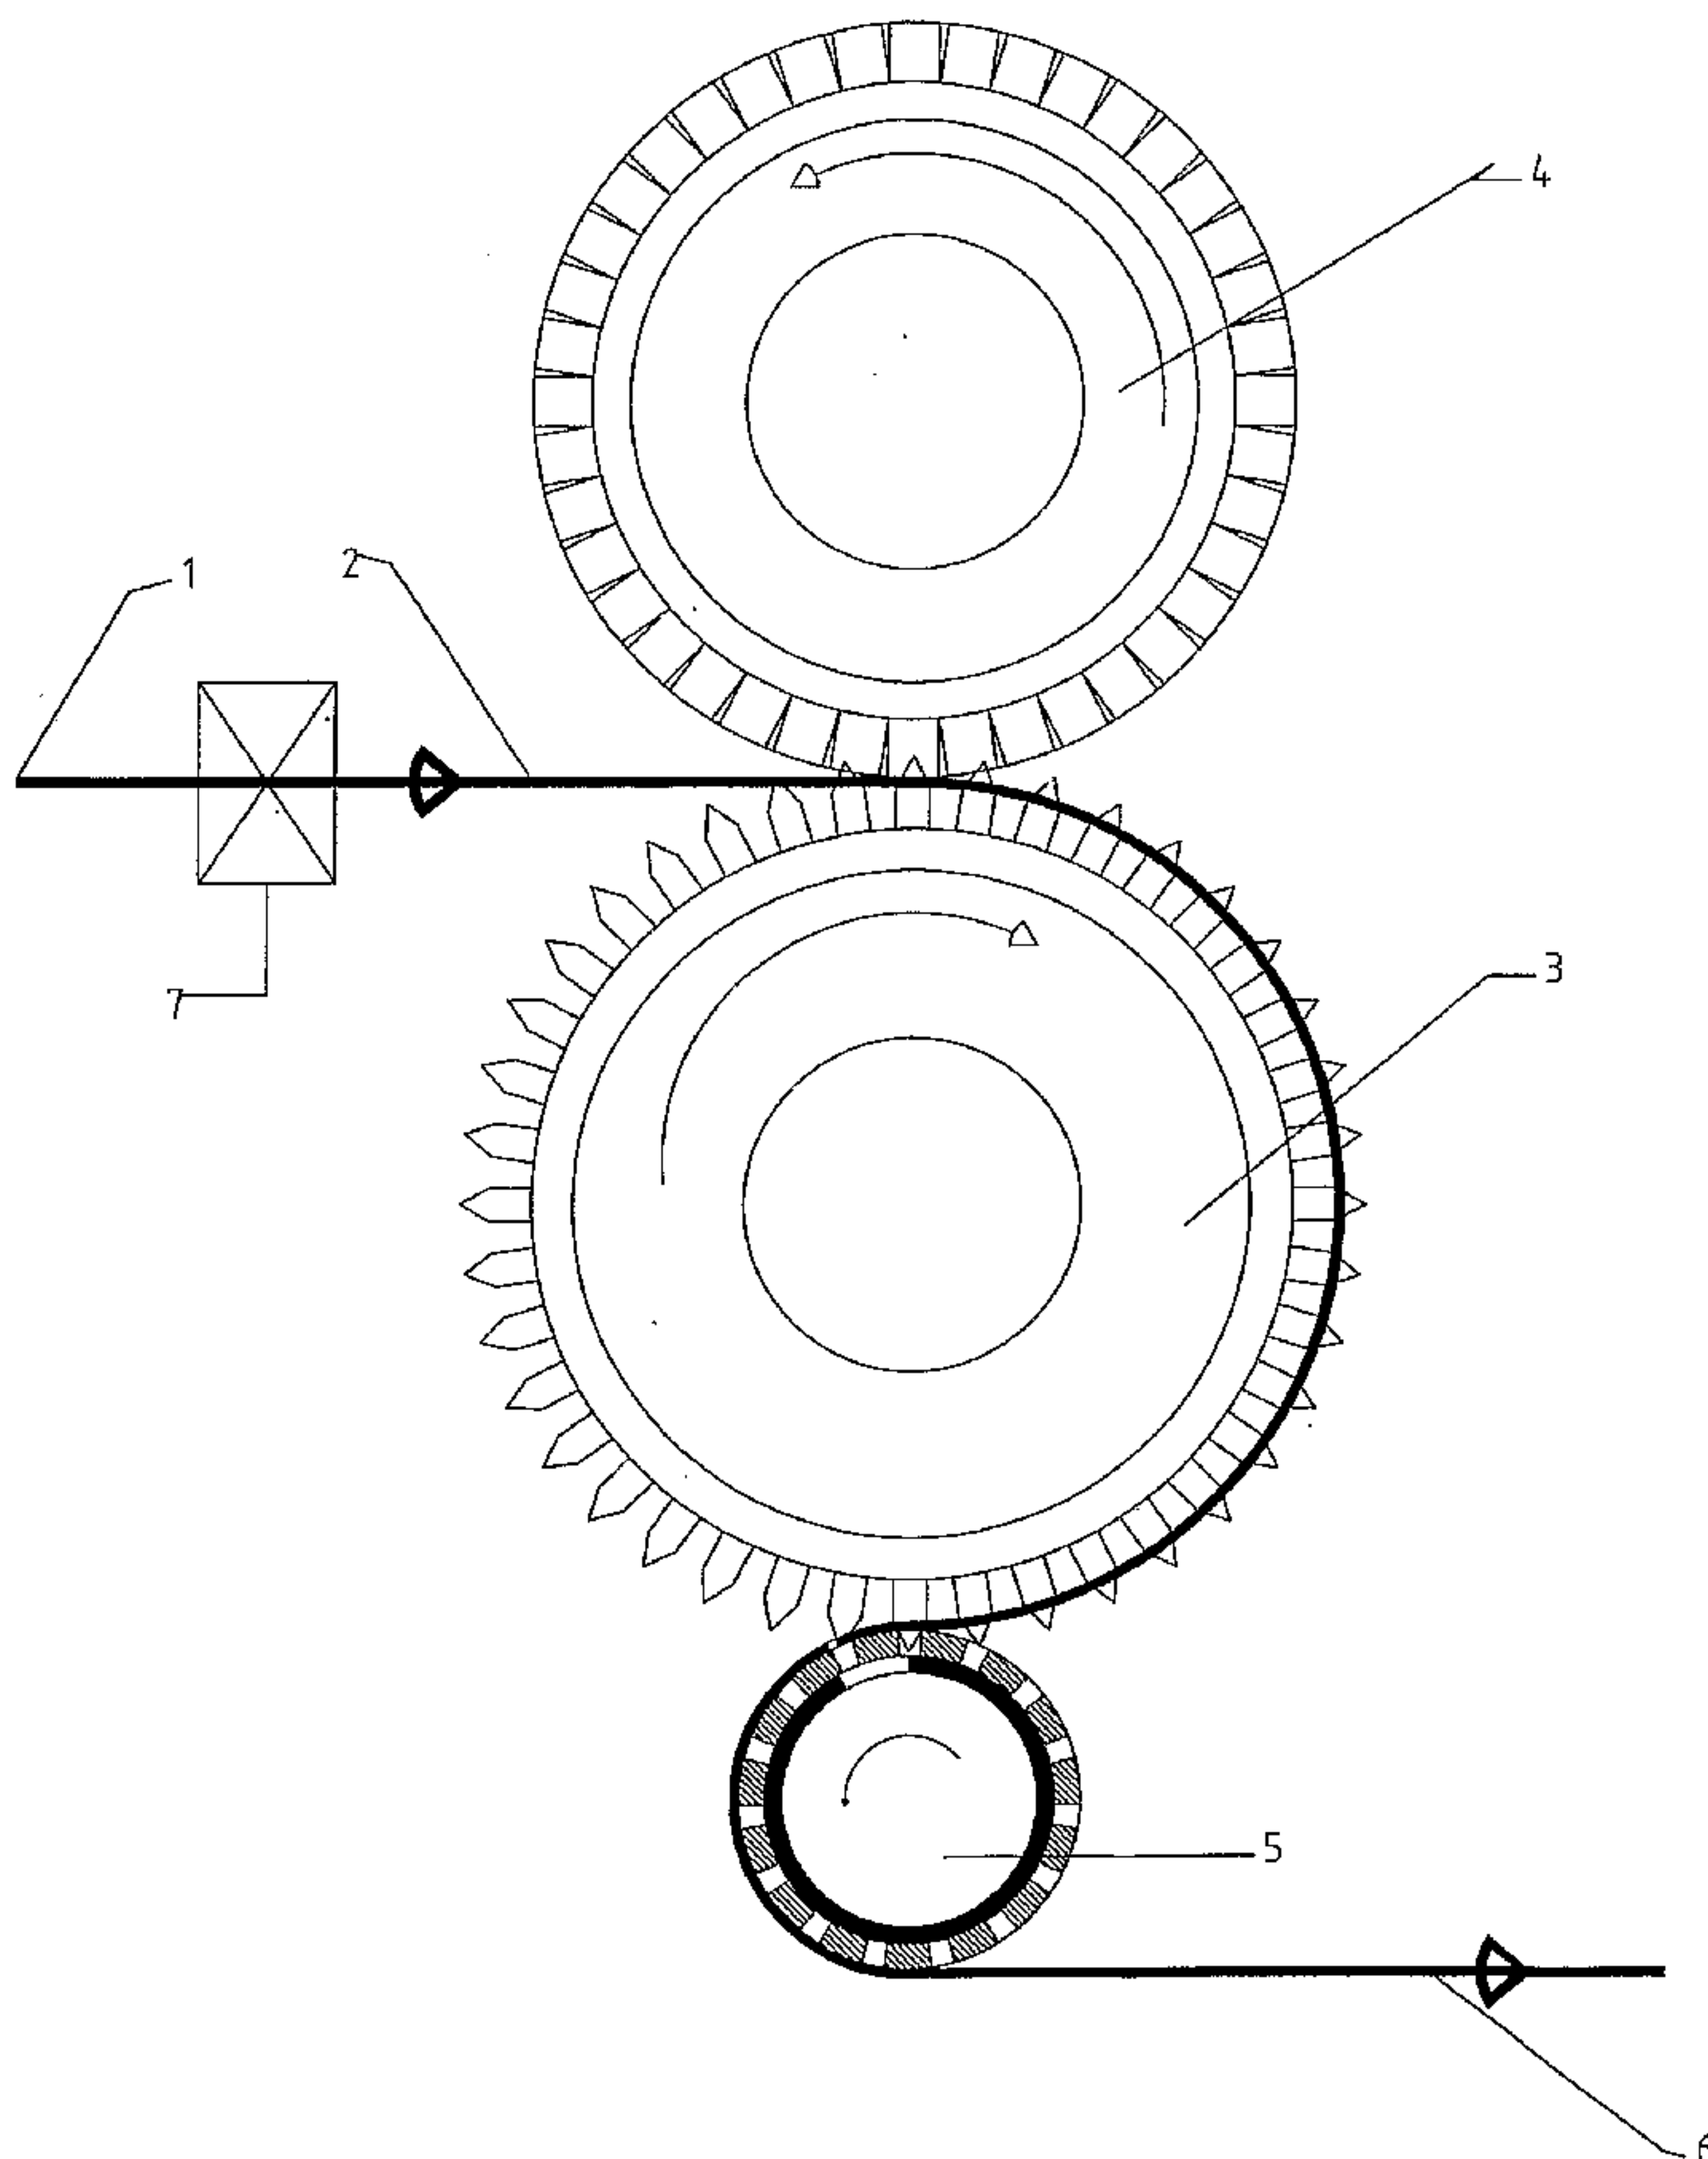

(57) Abstract: A machine utilized for producing and manufacturing a film, soft at touch, resilient and suitable at draining use. A film produced by such a machine, presents, at least, on one surface an essentially continuous pattern of micro-funnels three-dimensional (3D) directed in an essentially perpendicular way to the surface from which the micro-openings have origin. It presents also on the opposite surface a continuous pattern, composed by 3D macro-funnels directed in an essentially perpendicular way to the surface from which the macro-funnels have origin. The "micro-funnels" term, intend to describe a multitude of funnels non distinguishable by the human eye at a distance equal or higher than 450 mm. while the "macro funnels" term, intend to describe funnels clearly visible by the human eye at a distance higher than 450 mm.

WO 2007/138640 A1

WO 2007/138640 A1



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

**A MACHINE UTILIZED FOR PRODUCING AND
MANUFACTURING A RESILIENT FILM SOFT AT TOUCH,
SUITABLE TO DRAINING USE.**

DESCRIPTION

RELATED ART

There exists in the related art, disposable hygienic articles for women, such as absorbent pads, panty liners and internal tampons. It is known that many such articles have a side in contact with the consumer formed by a perforated film with three dimensional apertures. These apertures quickly collect body fluids while remaining dry and clean after the passage of the body fluids.

The disadvantage of such perforated films is the visual and tactile plastic sensation ,which is unpleasant to consumers.

It is therefore desirable to have available a three dimensional apertured film that is soft to the touch and has a similar appearance to a textile material, whilst maintaining the handling characteristics of the body fluids as per the above mentioned perforated films

Currently there exists the production of film with micro perforations .

There also exists production of films with a type of micro aperture in 3 dimensions which make the material soft to the touch .

These micro cones can be formed with pressurized water technology or by pneumatic vacuum forming. Both mentioned process are known art.

An improvement of the process and result has been obtained by applying a series of three dimensional apertured macro cones to the film containing micro perforations, which results in improved draining capabilities of the

product.

The construction of the macro cones must be such so as not to destroy the micro cones produced beforehand.

Such a result can be obtained in different ways.

In patent n. US 4.839.216, as in patent US 4.609.518, is taught the construction of non shaped macro holes on a film where micro apertures are already present, using a pressurised water technology.

Such a method does not thermoform the macro cones, so limiting the draining properties of the film.

In patent US 6.780.372, is taught a method for creating thermoformed macro holes whereby the film is locally treated in the thermoforming zone without heating the surrounding area of micro holes.

Whilst the technique of perforating with hot needles is known art, the disadvantage of the macro cones thermoforming process is the tendency to stiffen the film,

Also the film tends to stick to the needles creating difficulties in detachment .

In the application of Patent US 2.004.161.586, the problem of fused material rims made around the thermo fused cone is solved by interposing a layer of high melting material so as to avoid direct contact between the film and the hot needles.

The high melting material being mechanically more resistant compared to the film to be processed, greatly helps the detachment of the film from the hot needles.

The disadvantages of this last process is that the insertion of the mentioned

high melting material means an increase in the cost of the film and an unwanted increase in thickness.

SUMMARY OF INVENTION

The purpose of this invention is the manufacture of a film apertured three dimensionally, soft to the touch, resilient, and with a matt finish , suitable for the efficient correct handling of body fluids, that eliminates the above mentioned disadvantages of the film and the processes to obtain it.

Such a film shows, at least on one side, an almost continuous pattern of three dimensional micro cones, arranged according to an axis close to perpendicular to the surface from where the micro apertures have their origin.

On the opposite side, there is a continuous pattern composed of three dimensional macro cones arranged according to an axis close to perpendicular to the surface from where the macro cones have their origin, where the orientation of the mentioned micro cones and the macro cones are opposite.

The term “micro cones” refers to cones not discernible by human eye at a distance equal to or greater than 450mm while the term “macro cones” refers to cones clearly visible by human eye at a distance greater than 450mm.

Because the macro cones are thermoformed on thermoplastic film that already contains the micro cones ,the process can cause over-destruction of the micro cones . The technical problem to be solved is to thermoform the macro cones without damaging the micro cones previously made and at the same time maintain the softness of the obtained film.

Technical solutions available today allow a process to thermoform cones using hot needle technology, forcing the film to pass through a calander where, on one reel there are needles while on the other there are holes, each needles fits in the corresponding slot on the other reel, perforating and forcing the contact between needles and film so that thermoforming can occur.

Nevertheless, the time of contact between needles and film is very limited in order to avoid that the whole film reaches temperatures near the softening point, a condition which would prevent the detachment of the film from the needle reel.

Short contact times between needles and film require a higher needle temperature which will melt the thermoplastic film locally also after cooling, the thermoplastic film will harden creating an unpleasant effect to the touch.

Lower film gsm imposed by the market make the actual hot needle technologies not viable for the above mentioned reason.

DESCRIPTION OF DRAWINGS

Fig.1 shows schematically the travel of the micro perforated film between the hot needle calander and perforated reel for the thermoforming of the macro cones and between the hot needle calander and the vacuum reel for the detachment from the needles.

Fig.2 shows schematically the travel of the product through a series of grooved reels so as to obtain localised stretching

Fig.3 shows schematically the film with micro holes and macro holes

formed in opposite directions

TECHNICAL DESCRIPTION OF INVENTION

This document explains how to obtain thermoformed macro holes on a thermoplastic matrix where there already exists micro apertures, and to maintain the performance of collection and retention of the discharge of the body fluids and also achieving desirable tactile and visual properties, soft to the touch ,even distribution of holes and of a matt finish.

In order to avoid the localized over melting of the thermoplastic film it is necessary to work with temperatures lower than the melting point .To achieve correct formation of the holes it is necessary to work with temperatures above the softening point but substantially below the melting point thus it is necessary to have a much longer contact time between the needles and the film.

The formation of the cone happens by forcing the travel of the film between the needles of the first reel and the corresponding slots in the second reel. Once the cones are created, the film is left in contact with the needles for sufficient time to effect the correct thermo formation. This involves that the whole film reaches a temperature near to the softening point making the detachment of the film from the needles unfeasible with a simple pull because the cohesion force between the needles and the film is such as to ruin the material. This unwanted effect is even more enhanced by use of lower film gsm. To solve this problem a third perforated reel is used. This reel is composed of an external sleeve with holes distributed in such a way that during the rotation each slot engages with a corresponding needle.

The external sleeve rotates on a hollow fixed shaft. The hollow fixed shaft has an opening along its length wide enough to cover the contact area between the needles and the third perforated reel. A vacuum is formed inside the hollow fixed shaft which generates a pulling force at the base of the thermoformed cone such as to detach the film from the needles without incurring damage to the film.

Even though the thermoforming process has been slowed minimising the annealing of the film, it is impossible to completely eliminate some hardened or stiffened areas caused by the heating process.

To further minimise this hardening a further step has been developed whereby the film is passed through one or more grooved reels.

The film is appropriately stretched locally so as to break and soften the areas hardened in the thermoforming process especially around the macro cones.

Another method that the invention can employ to detach the thermoplastic film from the needles is by using electrostatic electricity, by which, instead of creating a depressurised area, can charge the film on the third perforated reel with electrostatic charge of opposite polarity, in such a way that an electrostatic force is generated at the base of the thermoformed cones this force detaches the film from the needles, in a way similar to the method described in the previous point.

The localised stretching system can have grooves in both axial or radial directions, therefore creating localised stretching in machine direction or in cross direction.

As can be seen in Fig.1, thermoplastic film n.1 (normally ldpe and lldpe

base) is extruded with cast technology.

The film still in a plastic condition is laid on a matrix 7 that has a variety of micro apertures with a density between 140 holes per sq.cm to 1024 holes per sq.cm and is immediately put under vacuum making the film implode and thus creating the three dimensional micro cones.

The film is left in contact with the matrix for enough time to elapse so that the temperature of the film changes to a temperature that allows the detachment of the film from the matrix.

Such formed film n.2 is now ready for the macro perforation.

Subsequently a reel 3 with needles, appropriately thermo regulated at a temperature near to the thermo forming temperature of the thermoplastic film is set to rotate and is synchronised with the pair of perforated reels 4 and 5 with a density of holes equal to the density of needles.

Both perforated reels can be thermo regulated.

The perforated reel 4 has the function of creating the three dimensional cone and can be substituted by a brush reel with high density of bristles.

Perforated reel 5 has the function of detaching the perforated film from the needles.

The micro perforated film is passed through the pair of reels 3, 4 creating the three dimensional macro apertures.

The film is then left in contact with the needles for the necessary time to achieve a correct thermoforming. Such a method allows much lower operating temperatures compared to known methods. In fact such a long contact time between film and needle allows operating temperatures of needles near to thermoforming ones or in any case lower than the fusion

temperature of the film, limiting the phenomenon of annealing which makes the film rough and wrinkled.

Increasing the contact time between the film and the needles limits the annealing effect on the film but unfortunately the whole film reaches a higher temperature making it difficult to detach the film from the needles.

The film in contact with the needles should maintain a temperatures preferably between approximately 50 and 60 degrees C;

It is known that low gsm films (15-30 gsm) at such high temperatures drastically lose their mechanical characteristics, so that the adhesion force between the needles and just formed macro holes can be such that it makes it unfeasible to detach the film using a force acting directly on the film as this would damage the film.

To achieve successful detachment without damaging the product it is desirable to apply the detaching force to the bottom of the macro holes.

The perforated reel 5 has a pneumatic vacuum chamber so to exert a light force on the base of the macro cones, during rotation, the force exerted by the pneumatic vacuum detaches the film from the needles without modifying the characteristics of the product.

Also the volume of air that crosses the de pressurised sector cools the macro cones just formed.

The film has been detached from the needles by vacuum and travels away from the vacuum aperture and thus free of any rollers.

The film 6, 206 has micro cones 207 produced by micro perforation and macro cones 208 produced by macro perforation.

The product is now passed through one or more pairs of reels 101, 102

grooved as indicated in Fig.2.

Film 103 is suitably stretched so to break eventual hardened areas by the thermo forming process especially around the macro cones.

Film 104 is ready to be cooled and winded.

CLAIMS

1. A procedure for obtaining thermoformed macro holes on a thermoplastic film already having micro holes, comprising the steps of:
 - 5 - making the thermoplastic film pass between a first reel with multiple needles on its surface and a second reel with multiple slots,
 - maintaining the thermoplastic film adhered to the reel carrying the needles and at a temperature close and above to the softening point and substantially below than the melting point of the film,
- 10 characterised in that it comprises
 - removing the thermoplastic film from contact with the reel carrying the needles via a third reel that is perforated on the surface, which will exert an adhesion strength on the thermoplastic film that is greater than the adhesion strength of the film to the reel incorporating the needles,
- 15 wherein the multiple needles of the first reel are coupled during rotation into the grooves of the second reel and in the perforations of the third reel.
2. A procedure for obtaining thermoformed macro holes on a thermoplastic film already having micro holes according to claim 1, characterised in that the thermoplastic film obtained is additionally passed through one or more
- 20 grooved reels, causing the thermoformed film to stretch and breaking the hardened areas around the conformed macro holes.
3. A procedure for obtaining thermoformed macro holes on a thermoplastic film already having micro holes according to claim 2, characterised in that the

thermoplastic film is made to pass through axial and/or radial grooves, achieving axial and/or radial stretching of the film.

4. A procedure for obtaining thermoformed macro holes on a thermoplastic film already having micro holes according to any one of claims 1 to 3, characterised in that the adhesion strength of the third reel on the thermoplastic film is performed using a vacuum.

5. A procedure for obtaining thermoformed macro holes on a thermoplastic film already having micro holes according to any one of claims 1 to 3, characterised in that the adhesion strength of the third reel on the thermoplastic film is performed by means of electrostatic electricity charged with opposite polarity to that of the third reel and the thermoplastic film.

6. A device for obtaining a thermoplastic film with macro holes from a film that already has micro holes, comprising a first reel with multiple needles on its surface and a second reel with multiple grooves that are coupled to one another during the rotation of the reels, characterised in that in order to remove the thermoplastic film from the reel with multiple needles on its surface, the device comprises a third reel with a perforated surface, wherein these perforations are coupled with the needles of the first reel during its rotation, wherein the third perforated reel uses a vacuum or electrostatic electricity in order to remove the thermoplastic film from the reel with the multiple needles.

7. A device for obtaining a thermoplastic film with macro holes that already has micro holes formed according to claim 6, characterised in that the third reel has:

- a fixed and hollow shaft with an opening along its entire length that is sufficiently wide to cover the contact area between the needles and the third perforated reel and inside of which a vacuum is formed; and
 - an outer jacket that rotates around the fixed and hollow shaft.
- 5 8. A device for obtaining a thermoplastic film with macro holes that already has micro holes formed according to claim 6 or 7, additionally characterised in that the device comprises one or more grooved reels that cause the thermoformed film to stretch, breaking the hardened areas around the conformed macro holes.
- 10 9. A device for obtaining a thermoplastic film with macro holes that already has micro holes formed according to claim 8, characterised in that the grooved reels are arranged as axial and/or radial reels that cause the film to stretch in an axial and/or radial direction.

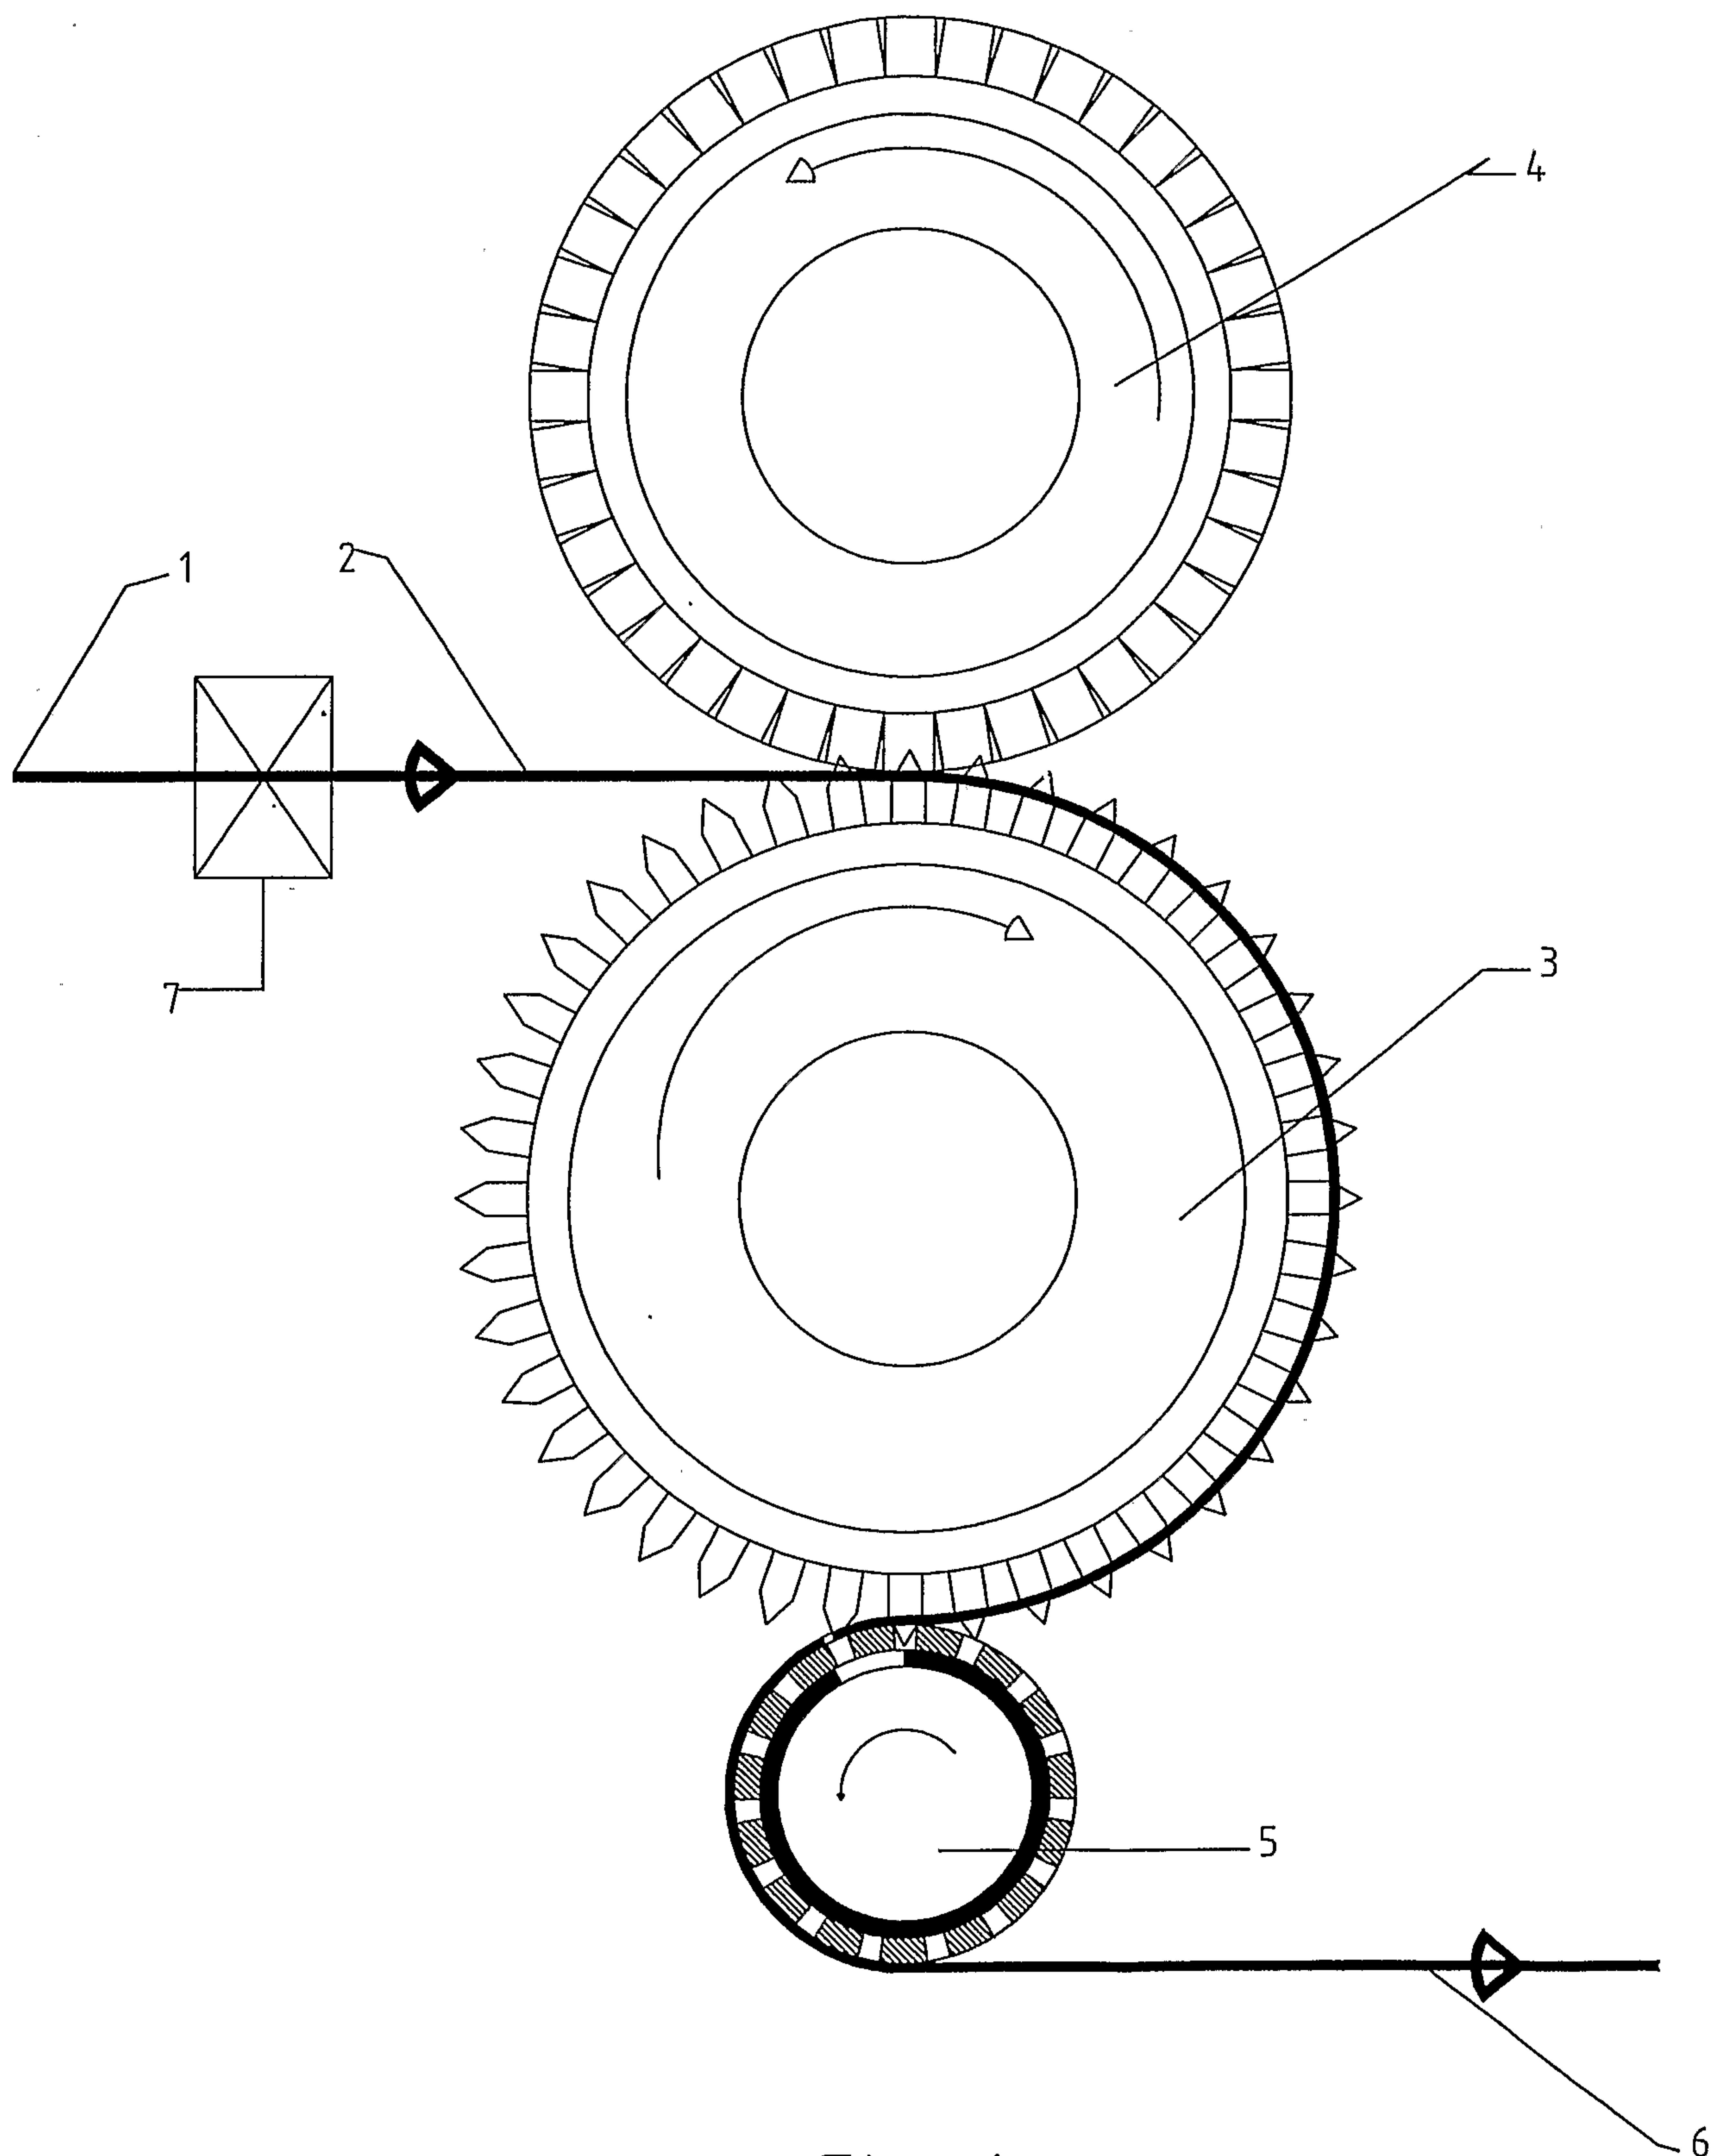


Fig. 1

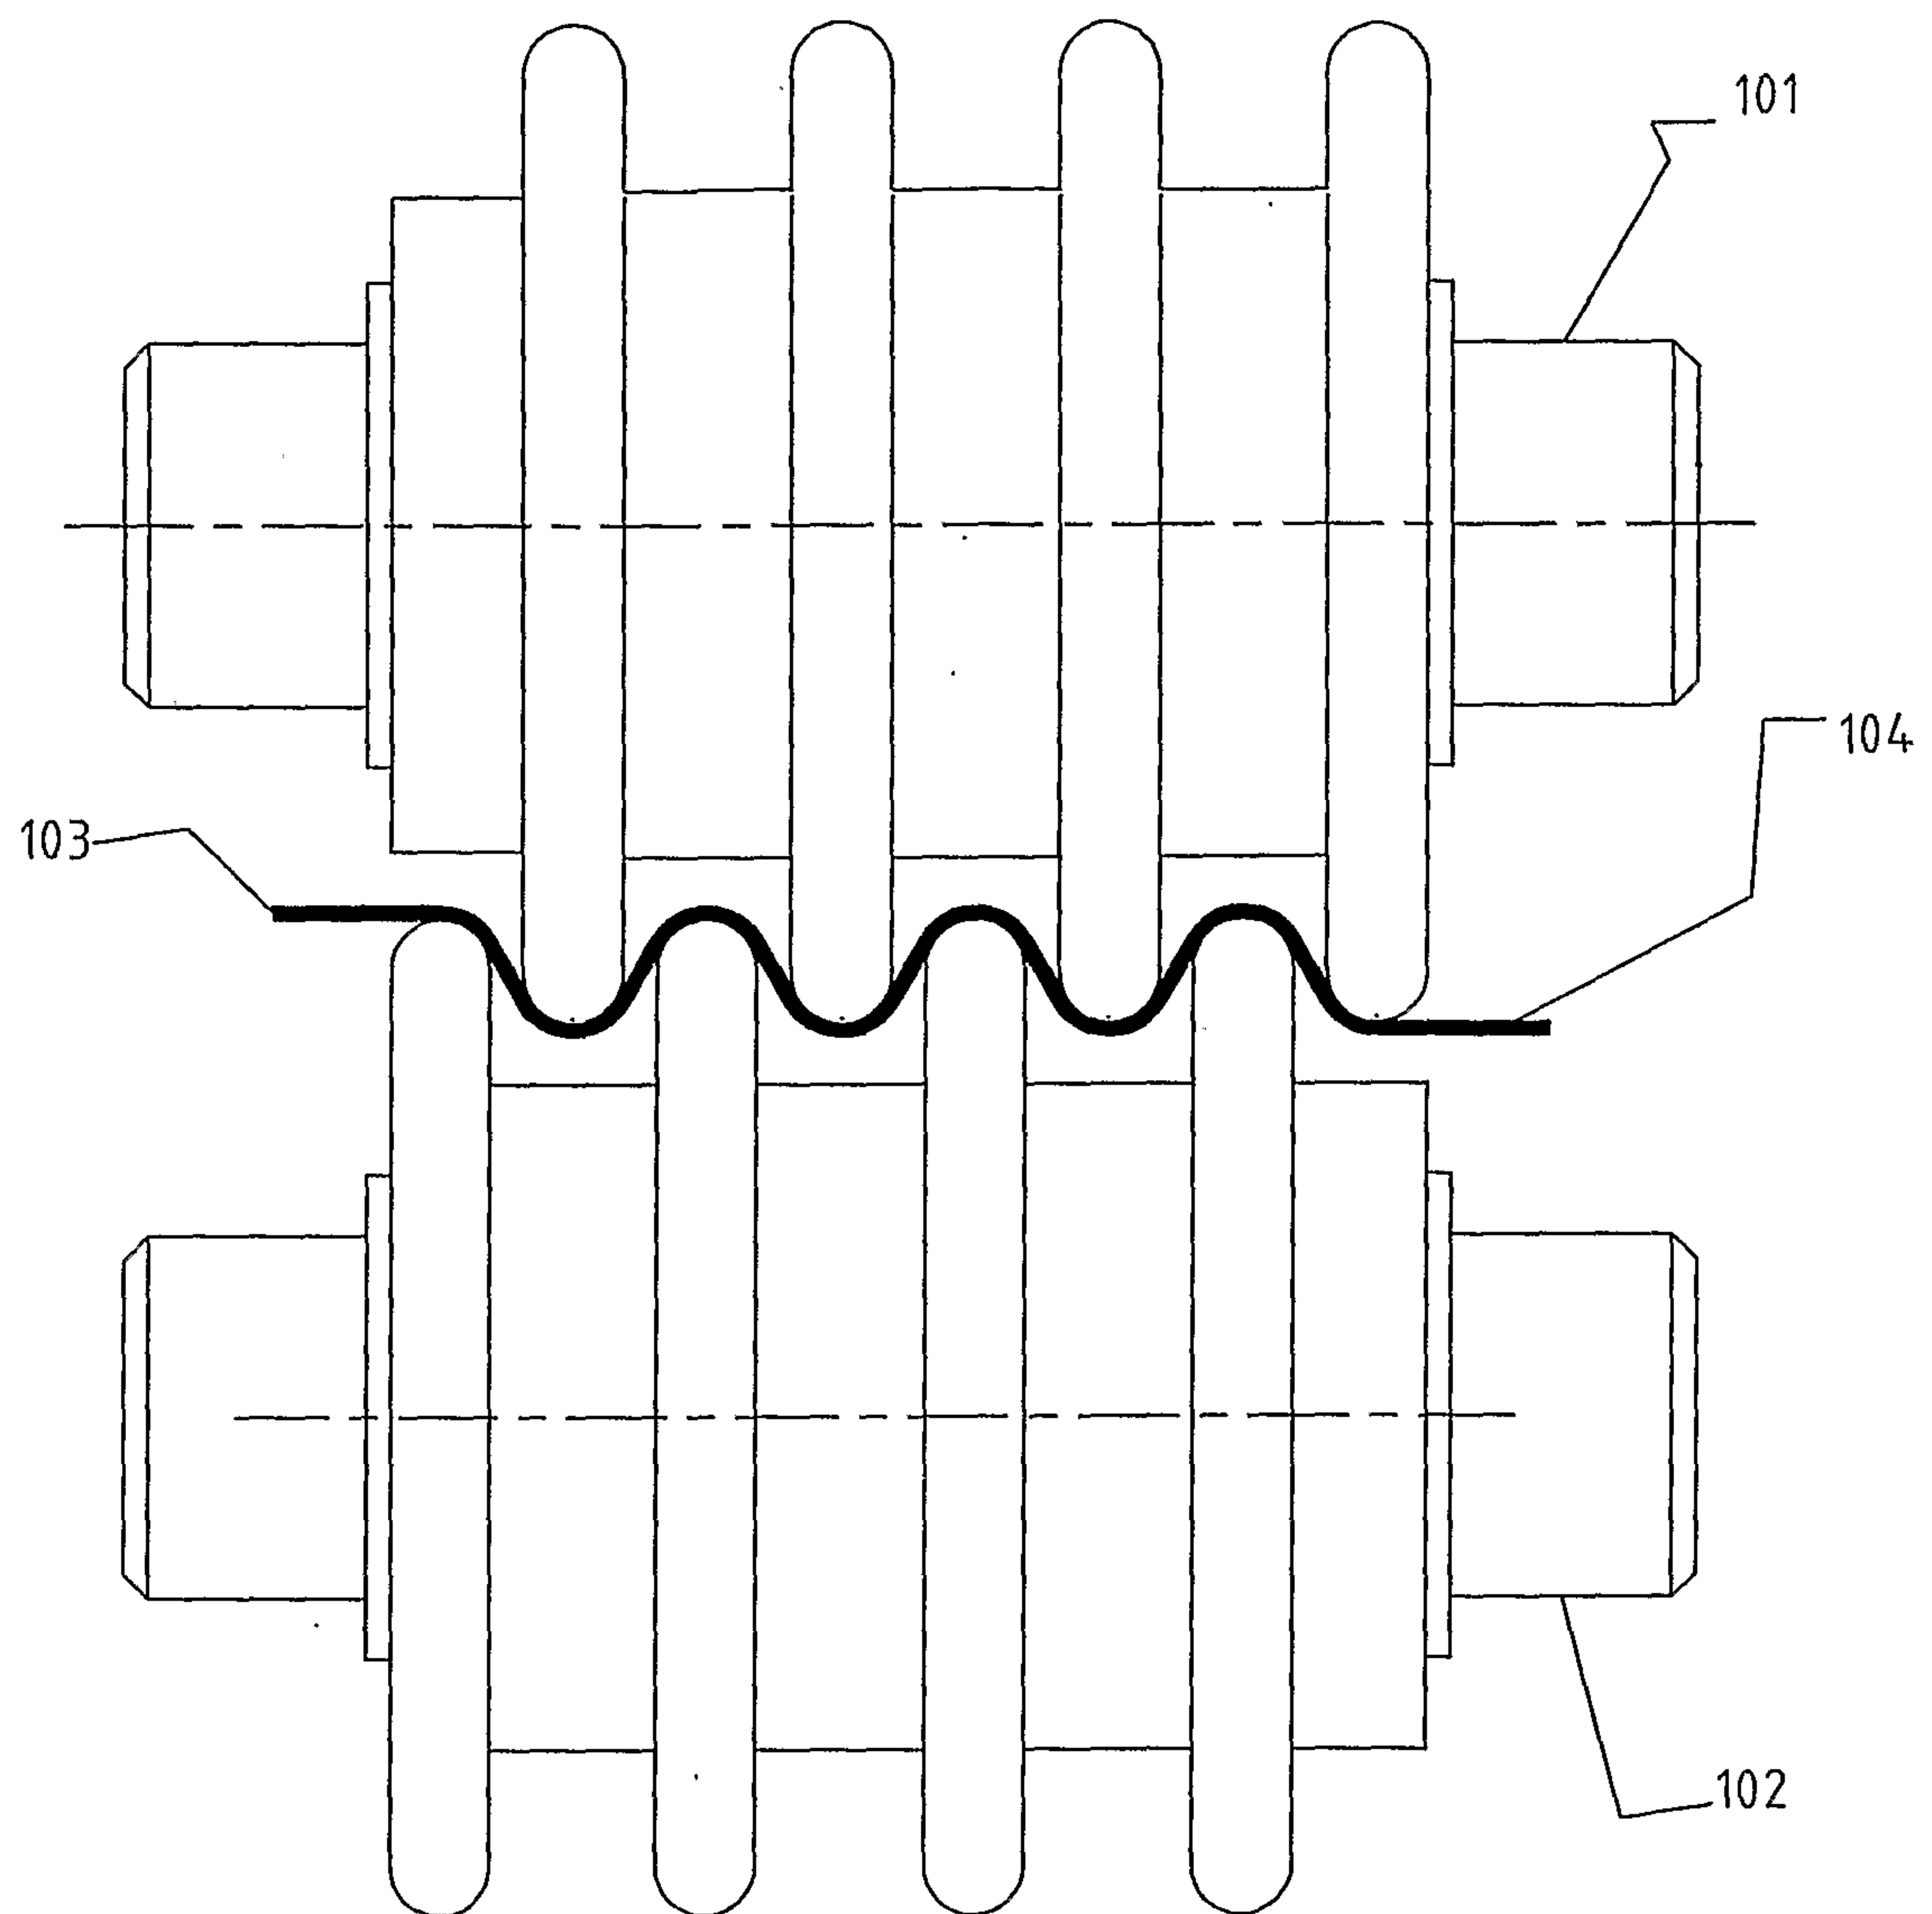


Fig. 2

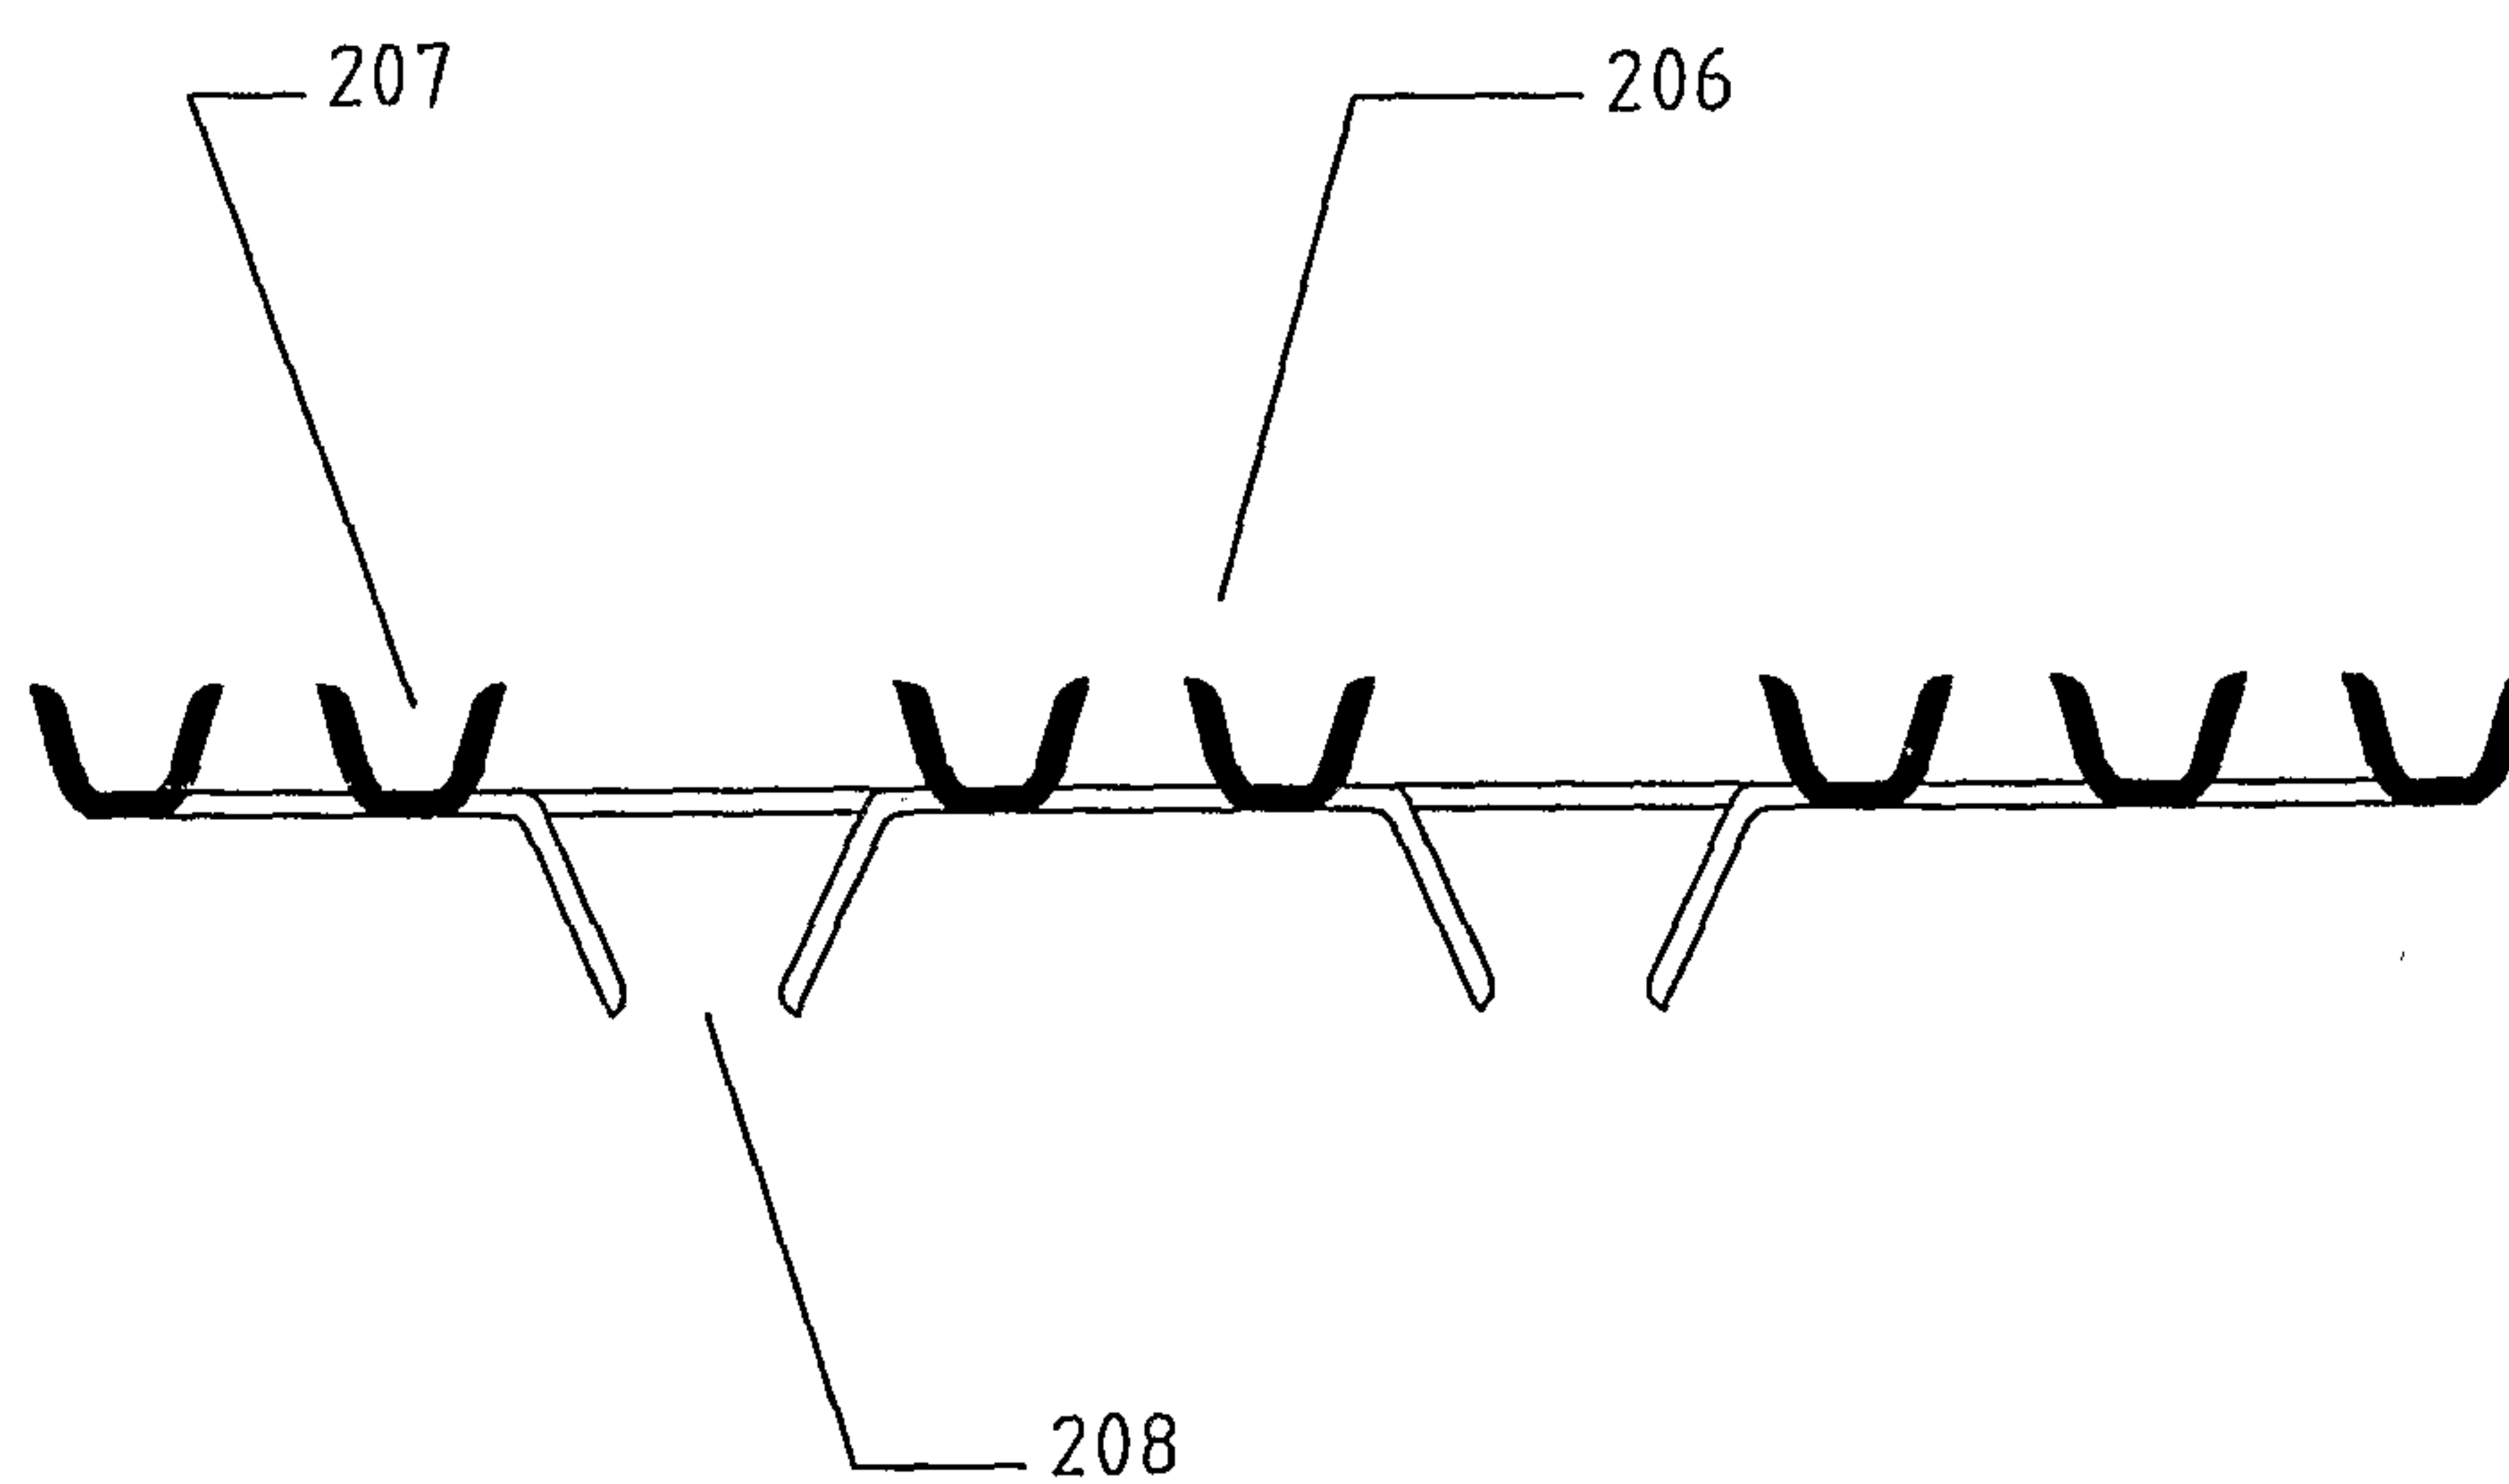


Fig. 3

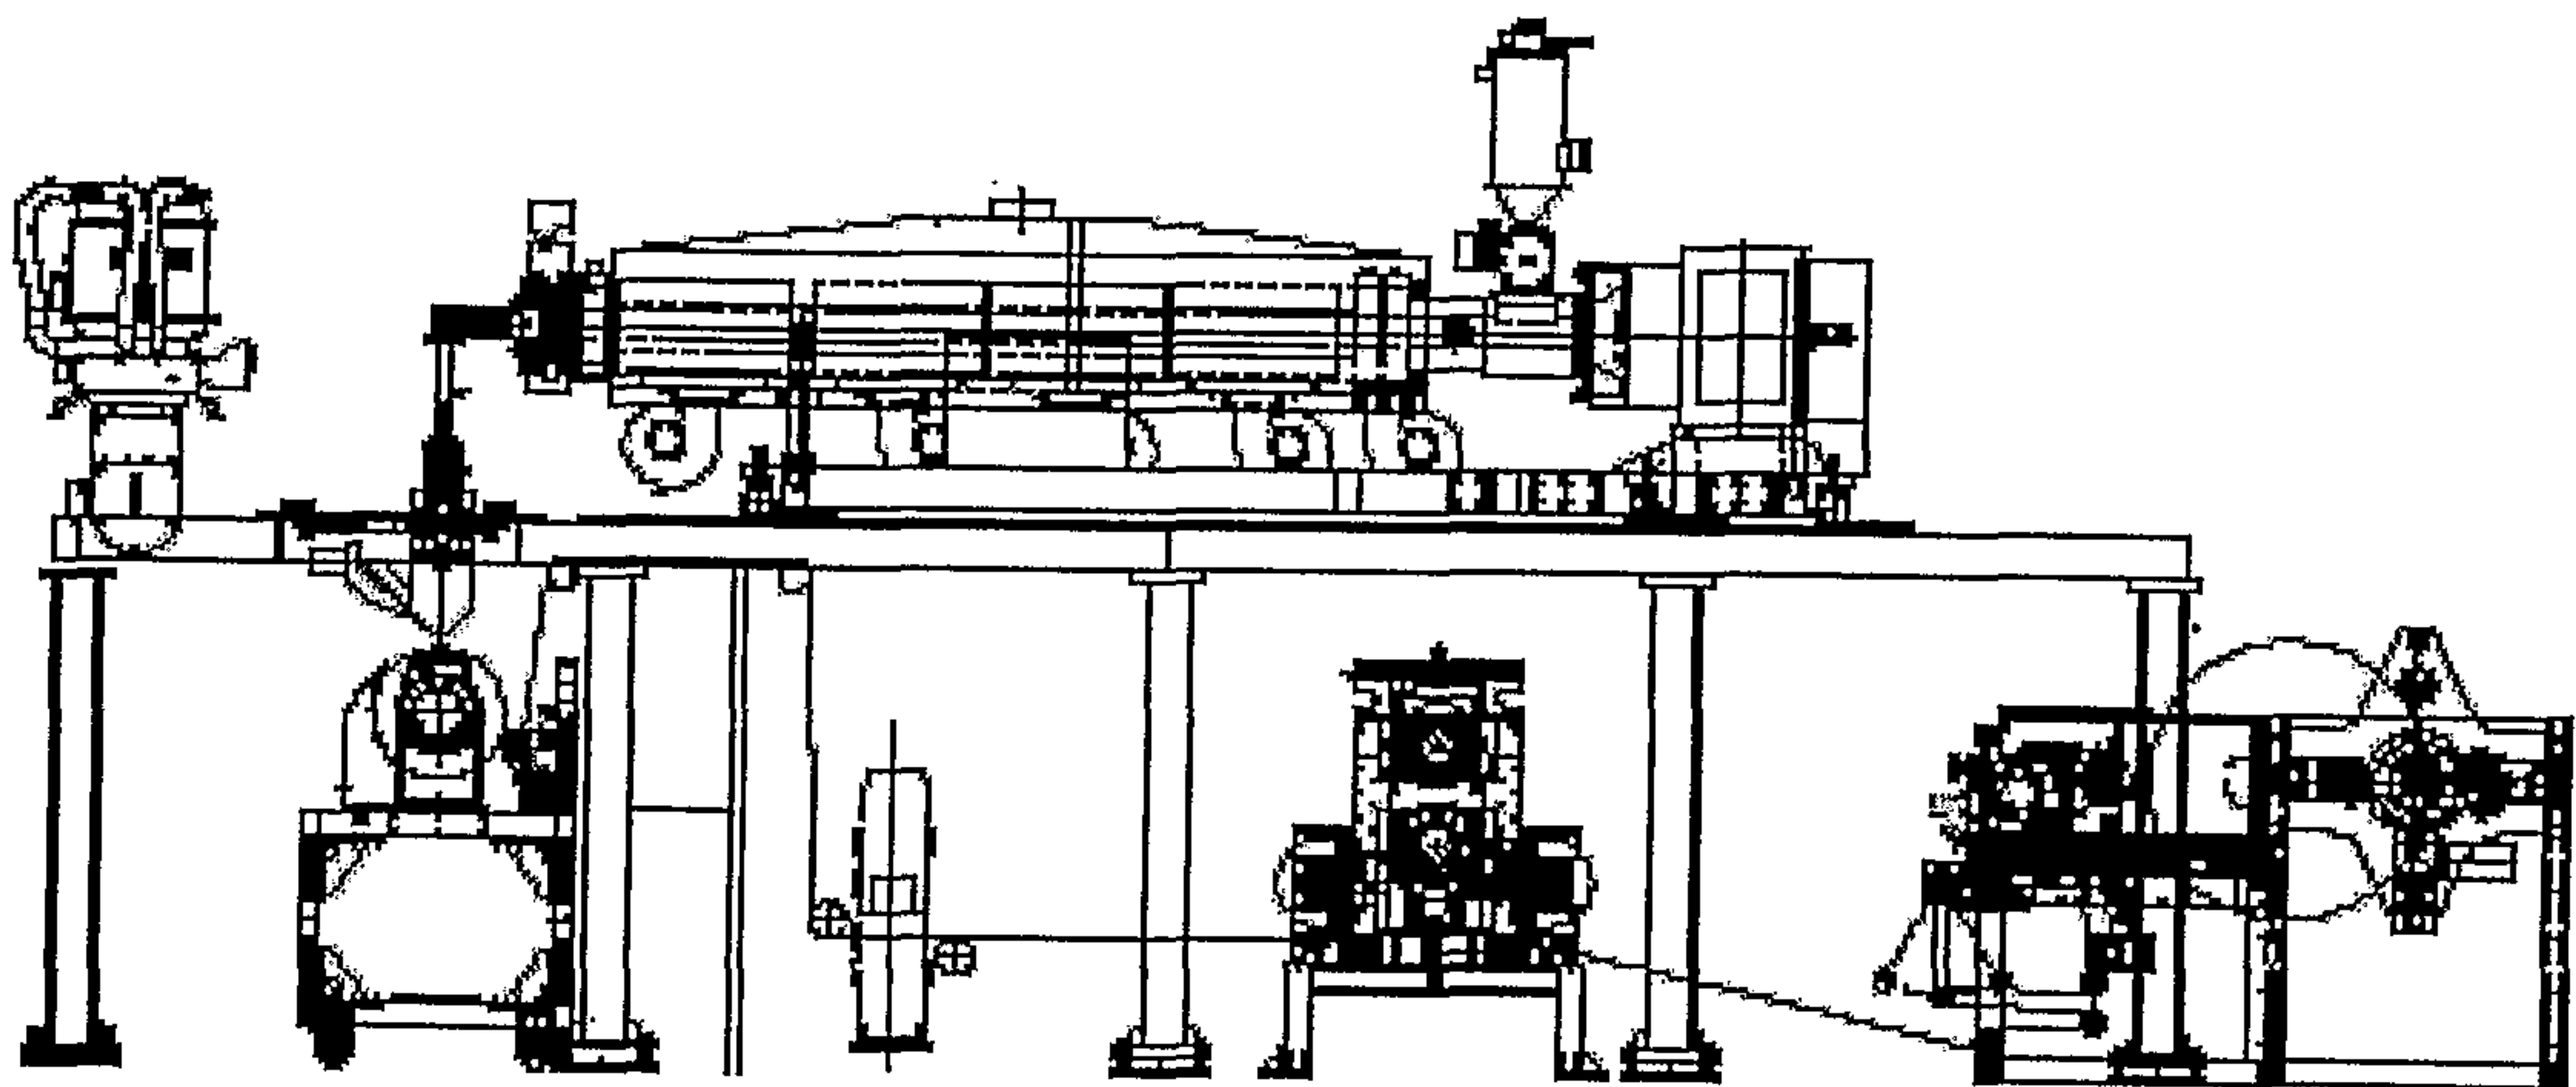


Fig. 4

