



Patent- og  
Varemærkestyrelsen

- 
- (51) Int.Cl.: **G06F 3/048 (2013.01)** **H04L 12/28 (2006.01)**
- (21) Ansøgningsnummer: **PA 2017 70401**
- (22) Indleveringsdato: **2017-05-29**
- (24) Løbedag: **2017-05-29**
- (41) Alm. tilgængelig: **2018-11-17**
- (45) Patentets meddelelse bkg. og publiceret den: **2019-02-13**
- (30) Prioritet:  
**2017-05-16 US 62/507,202**  
**2017-05-16 US 62/507,208**
- (73) Patenthaver:  
**Apple Inc., 1 Infinite Loop Cupertino 95014 CA California, USA**
- (72) Opfinder:  
**Patrick L. Coffman, 1, Infinite Loop, MS 302-2HI Cupertino 95014 CA California, USA**  
**David Chance Graham, c/o Apple Inc. 1, Infinite Loop Cupertino 95014 CA California, USA**  
**Cyrus D. Irani, c/o Apple Inc. 1, Infinite Loop Cupertino 95014 CA California, USA**  
**Fernando Albuquerque, 1 Infinite Loop Cupertino 95014 CA California, USA**  
**Taylor G. Carrigan, c/o Apple Inc. 1, Infinite Loop Cupertino 95014 CA California, USA**  
**Matthew J. Cielak, 1 Infinite Loop Cupertino 95014 CA California, USA**
- (74) Fuldmægtig:  
**COPA COPENHAGEN PATENTS K/S, Rosenørns Allé 1, 2. sal, 1970 Frederiksberg C, Danmark**
- (54) Titel: **METHODS AND INTERFACES FOR HOME MEDIA CONTROL**
- (56) Fremdragne publikationer:  
**US 2010/0299639 A1**  
**US 2011/0291971 A1**  
**US 2010/0321201 A1**  
**US 2013/0027289 A1**  
**US 2014/0181654 A1**  
**US 7571014 B1**
- (57) Sammendrag:  
**The present disclosure generally relates to interfaces and techniques for media playback on one or more devices. In accordance with some embodiments, an electronic device includes a display, one or more processors, and memory. The electronic device receives user input and, in response to receiving the user input, displays, on the display, a multi-device interface that includes: one or more indicators associated with a plurality of available playback devices that are connected to the device and available to initiate playback of media from the device, and a media playback status of the plurality of available playback devices.**

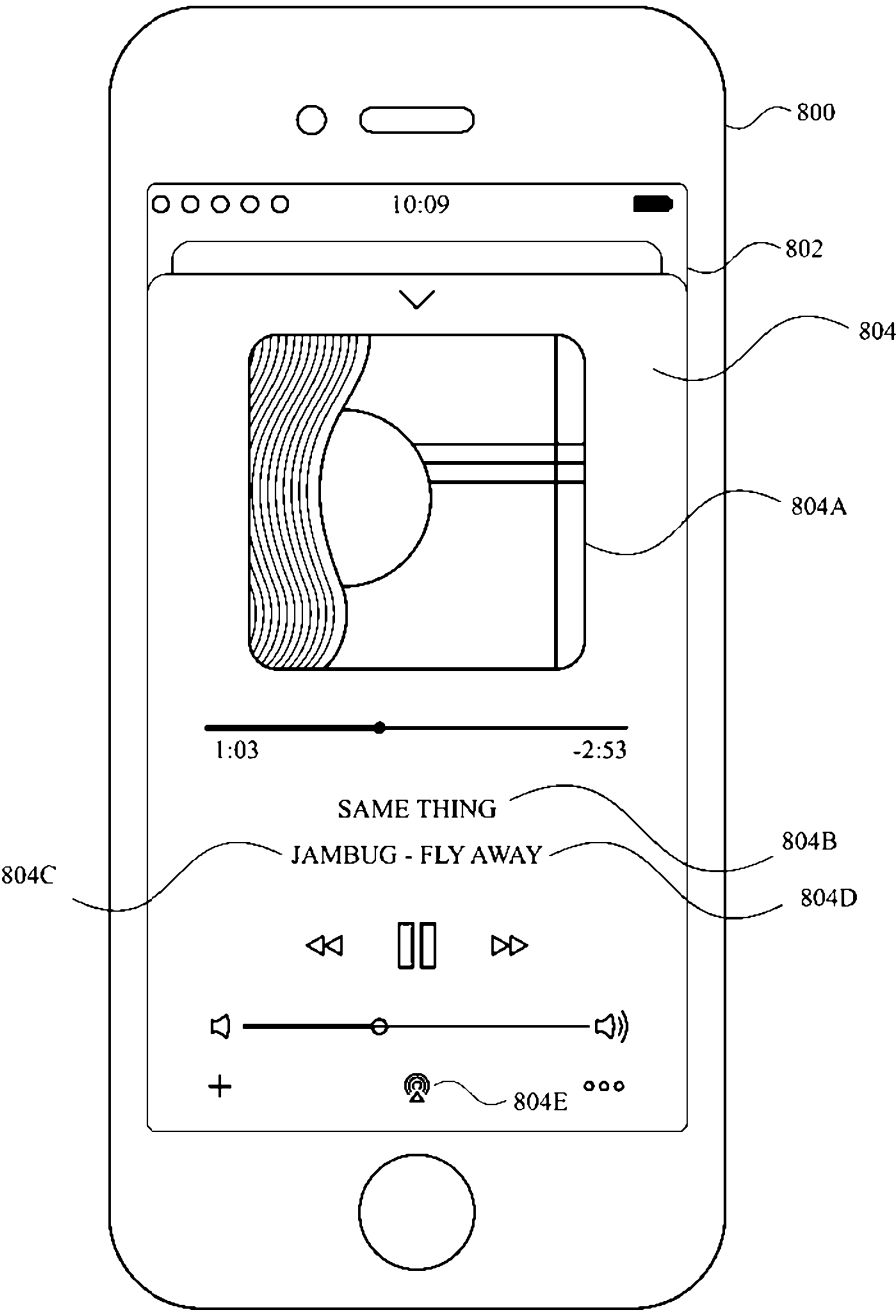


FIG. 8A

## METHODS AND INTERFACES FOR HOME MEDIA CONTROL

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application Serial No. 62/507,202 titled “METHODS AND INTERFACES FOR HOME MEDIA CONTROL” filed May 16, 2017, and U.S. Provisional Application Serial No. 62/507,208 titled “METHODS AND INTERFACES FOR HOME MEDIA CONTROL” filed May 16, 2017.

### FIELD

[0002] The present disclosure relates generally to computer user interfaces, and more specifically to techniques for managing media playback devices.

### BACKGROUND

[0003] The number of electronic devices, and particularly smart devices, in users’ homes continues to increase. These devices are increasingly being interconnected with each other, are increasingly more capable, and are performing more complex tasks. As such, these devices are increasingly expected to have thoughtfully-designed user interfaces. US 2011/0291971 A1 discloses a touch screen handheld device including a touch screen, which is connected to an internal network for controlling various types of devices.

### BRIEF SUMMARY

[0004] Some techniques for managing media playback devices using electronic devices, however, are generally cumbersome and inefficient. For example, some existing techniques use a complex and time-consuming user interface, which may include multiple key presses or keystrokes. Existing techniques require more time than necessary, wasting user time and device energy. This latter consideration is particularly important in battery-operated devices.

[0005] Accordingly, the present technique provides electronic devices with faster, more efficient methods and interfaces for managing media playback devices. Such methods and interfaces optionally complement or replace other methods for managing media playback devices. Such methods and interfaces reduce the cognitive burden on a user and produce a more

efficient human-machine interface. For battery-operated computing devices, such methods and interfaces conserve power and increase the time between battery charges. Such methods and interfaces can reduce the number of unnecessary, extraneous, or repetitive user inputs. Further, such methods and interfaces can reduce the battery usage by a display or speaker of an electronic device. The scope of the invention is defined by the claims. Additional non-claimed embodiments are described below and are examples of related techniques to help understand the claimed invention

**[0006]** In accordance with some embodiments, a method is performed at a device with a display. The method comprises: receiving a user input; and in response to receiving the user input, displaying, on the display, a multi-device interface that includes: one or more indicators associated with a plurality of available playback devices that are connected to the device and available to initiate playback of media from the device, and a media playback status of the plurality of available playback devices.

**[0007]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a display, the one or more programs including instructions for: receiving a user input; and in response to receiving the user input, displaying, on the display, a multi-device interface that includes: one or more indicators associated with a plurality of available playback devices that are connected to the device and available to initiate playback of media from the device, and a media playback status of the plurality of available playback devices.

**[0008]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a display; one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: receiving a user input; and in response to receiving the user input, displaying, on the display, a multi-device interface that includes: one or more indicators associated with a plurality of available playback devices that are connected to the device and available to initiate playback of media from the device, and a media playback status of the plurality of available playback devices.



**[0009]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a display; means for receiving a user input; and means for, responsive to receiving the user input, displaying, on the display, a multi-device interface that includes: one or more indicators associated with a plurality of available playback devices that are connected to the device and available to initiate playback of media from the device, and a media playback status of the plurality of available playback devices.

**[0010]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a display, the one or more programs including instructions for: receiving a user input; and in response to receiving the user input, displaying, on the display, a multi-device interface that includes: one or more indicators associated with a plurality of available playback devices that are connected to the device and available to initiate playback of media from the device, and a media playback status of the plurality of available playback devices.

**[0011]** In accordance with some embodiments, a method is performed at a device with a display. The method comprises: displaying, on the display, a first current media interface for the device, wherein the first current media interface includes: a representation of a first media item available for playback on the device, and a playback device selection affordance; receiving a first user input representing selection of the playback device selection affordance; in response to receiving the first user input, displaying, on the display, one or more affordances associated with a plurality of available playback devices connected to the device; receiving a second user input representing selection of the one or more affordances associated with the plurality of available playback devices; and in response to receiving the second user input, configuring the device to initiate playback on the plurality of available playback devices.

**[0012]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a display, the one or more programs including instructions for: displaying, on the display, a first current media interface for the device, wherein the first current media interface includes: a

representation of a first media item available for playback on the device, and a playback device selection affordance; receiving a first user input representing selection of the playback device selection affordance; in response to receiving the first user input, displaying, on the display, one or more affordances associated with a plurality of available playback devices connected to the device; receiving a second user input representing selection of the one or more affordances associated with the plurality of available playback devices; and in response to receiving the second user input, configuring the device to initiate playback on the plurality of available playback devices.

**[0013]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a display; one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: displaying, on the display, a first current media interface for the device, wherein the first current media interface includes: a representation of a first media item available for playback on the device, and a playback device selection affordance; receiving a first user input representing selection of the playback device selection affordance; in response to receiving the first user input, displaying, on the display, one or more affordances associated with a plurality of available playback devices connected to the device; receiving a second user input representing selection of the one or more affordances associated with the plurality of available playback devices; and in response to receiving the second user input, configuring the device to initiate playback on the plurality of available playback devices.

**[0014]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a display; means for displaying, on the display, a first current media interface for the device, wherein the first current media interface includes: a representation of a first media item available for playback on the device, and a playback device selection affordance; means for receiving a first user input representing selection of the playback device selection affordance; means for, responsive to receiving the first user input, displaying, on the display, one or more affordances associated with a plurality of available playback devices connected to the device; means for receiving a second user input representing selection of the one or more affordances associated with the plurality of available playback devices; and means

for, responsive to receiving the second user input, configuring the device to initiate playback on the plurality of available playback devices.

**[0015]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a display, the one or more programs including instructions for: displaying, on the display, a first current media interface for the device, wherein the first current media interface includes: a representation of a first media item available for playback on the device, and a playback device selection affordance; receiving a first user input representing selection of the playback device selection affordance; in response to receiving the first user input, displaying, on the display, one or more affordances associated with a plurality of available playback devices connected to the device; receiving a second user input representing selection of the one or more affordances associated with the plurality of available playback devices; and in response to receiving the second user input, configuring the device to initiate playback on the plurality of available playback devices.

**[0016]** In accordance with some embodiments, a method is performed at a first device. The method comprises: detecting an indication that a physical proximity between the first device and a second device satisfies a proximity condition, wherein the first device is connected to the second device via a communication link; in accordance with detecting the indication, audibly outputting an audio tone signal, wherein the audio tone signal is out-of-band to the communication link; subsequent to outputting the audio tone signal, determining whether a response audio tone signal from the second device has been received; in accordance with a determination that the response audio tone signal from the second device has been received, proceeding to a next step in a configuration process; and in accordance with a determination that the response audio tone signal from the second device has not been received, forgoing proceeding to the next step in the configuration process.

**[0017]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, the one

or more programs including instructions for: detecting an indication that a physical proximity between the first device and a second device satisfies a proximity condition, wherein the first device is connected to the second device via a communication link; in accordance with detecting the indication, audibly outputting an audio tone signal, wherein the audio tone signal is out-of-band to the communication link; subsequent to outputting the audio tone signal, determining whether a response audio tone signal from the second device has been received; in accordance with a determination that the response audio tone signal from the second device has been received, proceeding to a next step in a configuration process; and in accordance with a determination that the response audio tone signal from the second device has not been received, forgoing proceeding to the next step in the configuration process.

**[0018]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: detecting an indication that a physical proximity between the first device and a second device satisfies a proximity condition, wherein the first device is connected to the second device via a communication link; in accordance with detecting the indication, audibly outputting an audio tone signal, wherein the audio tone signal is out-of-band to the communication link; subsequent to outputting the audio tone signal, determining whether a response audio tone signal from the second device has been received; in accordance with a determination that the response audio tone signal from the second device has been received, proceeding to a next step in a configuration process; and in accordance with a determination that the response audio tone signal from the second device has not been received, forgoing proceeding to the next step in the configuration process.

**[0019]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: means for detecting an indication that a physical proximity between the first device and a second device satisfies a proximity condition, wherein the first device is connected to the second device via a communication link; means for, in accordance with detecting the indication, audibly outputting an audio tone signal, wherein the audio tone signal is out-of-band to the communication link; means for, subsequent to outputting the audio tone signal, determining whether a response audio tone signal from the second device has been

received; means for, in accordance with a determination that the response audio tone signal from the second device has been received, proceeding to a next step in a configuration process; and means for, in accordance with a determination that the response audio tone signal from the second device has not been received, forgoing proceeding to the next step in the configuration process.

**[0020]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, the one or more programs including instructions for: detecting an indication that a physical proximity between the first device and a second device satisfies a proximity condition, wherein the first device is connected to the second device via a communication link; in accordance with detecting the indication, audibly outputting an audio tone signal, wherein the audio tone signal is out-of-band to the communication link; subsequent to outputting the audio tone signal, determining whether a response audio tone signal from the second device has been received; in accordance with a determination that the response audio tone signal from the second device has been received, proceeding to a next step in a configuration process; and in accordance with a determination that the response audio tone signal from the second device has not been received, forgoing proceeding to the next step in the configuration process.

**[0021]** In accordance with some embodiments, a method is performed at a first device with a display. The method comprises: detecting, while connected to a second device, an indication that a physical proximity between the first device and the second device satisfies a proximity condition; and in accordance with detecting that the physical proximity satisfies the proximity condition, displaying, on the display, a media information interface.

**[0022]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a display, wherein the electronic device is a first device, the one or more programs including instructions for: detecting, while connected to a second device, an indication that a physical proximity between the first device and the second device satisfies a proximity condition; and in

accordance with detecting that the physical proximity satisfies the proximity condition, displaying, on the display, a media information interface.

**[0023]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a display; one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: detecting, while connected to a second device, an indication that a physical proximity between the electronic device and the second device satisfies a proximity condition; and in accordance with detecting that the physical proximity satisfies the proximity condition, displaying, on the display, a media information interface.

**[0024]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a display; means for detecting, while connected to a second device, an indication that a physical proximity between the electronic device and the second device satisfies a proximity condition; and means for in accordance with detecting that the physical proximity satisfies the proximity condition, displaying, on the display, a media information interface.

**[0025]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a display, wherein the electronic device is a first device, the one or more programs including instructions for: detecting, while connected to a second device, an indication that a physical proximity between the first device and the second device satisfies a proximity condition; and in accordance with detecting that the physical proximity satisfies the proximity condition, displaying, on the display, a media information interface.

**[0026]** In accordance with some embodiments, a method is performed at a device with a touch-sensitive surface. The method comprises: detecting a touch on the touch-sensitive surface; in response to detecting the touch on the touch-sensitive surface, determining whether the device is currently playing media; in accordance with a determination that the device is currently playing media: determining whether a location of the touch is within a first area of the touch-sensitive surface or within a second area of the touch-sensitive surface, wherein the first area and

the second area are non-overlapping; in accordance with a determination that the location of the touch is within the first area of the touch-sensitive surface, ceasing playing media; and in accordance with a determination that the location of the touch is within the second area of the touch-sensitive surface, adjusting a volume of the currently playing media; and in accordance with a determination that the device is not currently playing media, initiating playback of media.

**[0027]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a touch-sensitive surface, the one or more programs including instructions for: detecting a touch on the touch-sensitive surface; in response to detecting the touch on the touch-sensitive surface, determining whether the device is currently playing media; in accordance with a determination that the device is currently playing media: determining whether a location of the touch is within a first area of the touch-sensitive surface or within a second area of the touch-sensitive surface, wherein the first area and the second area are non-overlapping; in accordance with a determination that the location of the touch is within the first area of the touch-sensitive surface, ceasing playing media; and in accordance with a determination that the location of the touch is within the second area of the touch-sensitive surface, adjusting a volume of the currently playing media; and in accordance with a determination that the device is not currently playing media, initiating playback of media.

**[0028]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a touch-sensitive surface; one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: detecting a touch on the touch-sensitive surface; in response to detecting the touch on the touch-sensitive surface, determining whether the device is currently playing media; in accordance with a determination that the device is currently playing media: determining whether a location of the touch is within a first area of the touch-sensitive surface or within a second area of the touch-sensitive surface, wherein the first area and the second area are non-overlapping; in accordance with a determination that the location of the touch is within the first area of the touch-sensitive surface, ceasing playing media; and in accordance with a determination that the location of the touch is within the second area of the

touch-sensitive surface, adjusting a volume of the currently playing media; and in accordance with a determination that the device is not currently playing media, initiating playback of media.

**[0029]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a touch-sensitive surface; means for detecting a touch on the touch-sensitive surface; means for, responsive to detecting the touch on the touch-sensitive surface, determining whether the device is currently playing media; means for, in accordance with a determination that the device is currently playing media: determining whether a location of the touch is within a first area of the touch-sensitive surface or within a second area of the touch-sensitive surface, wherein the first area and the second area are non-overlapping; in accordance with a determination that the location of the touch is within the first area of the touch-sensitive surface, ceasing playing media; and in accordance with a determination that the location of the touch is within the second area of the touch-sensitive surface, adjusting a volume of the currently playing media; and means for, in accordance with a determination that the device is not currently playing media, initiating playback of media.

**[0030]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a touch-sensitive surface, the one or more programs including instructions for: detecting a touch on the touch-sensitive surface; in response to detecting the touch on the touch-sensitive surface, determining whether the device is currently playing media; in accordance with a determination that the device is currently playing media: determining whether a location of the touch is within a first area of the touch-sensitive surface or within a second area of the touch-sensitive surface, wherein the first area and the second area are non-overlapping; in accordance with a determination that the location of the touch is within the first area of the touch-sensitive surface, ceasing playing media; and in accordance with a determination that the location of the touch is within the second area of the touch-sensitive surface, adjusting a volume of the currently playing media; and in accordance with a determination that the device is not currently playing media, initiating playback of media.



**[0031]** In accordance with some embodiments, a method is performed at a first device. The method comprises: receiving a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the first device; adding the first media item to a playback queue; receiving a second request to queue a second media item for playback on the set of devices; adding the second media item to the playback queue; accessing the first media item from a first media streaming service; initiating playback of the first media item on the set of devices; accessing the second media item from a second media streaming service different than the first media streaming service; and initiating playback of the second media item on the set of devices.

**[0032]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device, the one or more programs including instructions for: receiving a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the first device; adding the first media item to a playback queue; receiving a second request to queue a second media item for playback on the set of devices; adding the second media item to the playback queue; accessing the first media item from a first media streaming service; initiating playback of the first media item on the set of devices; accessing the second media item from a second media streaming service different than the first media streaming service; and initiating playback of the second media item on the set of devices.

**[0033]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: receiving a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the electronic device; adding the first media item to a playback queue; receiving a second request to queue a second media item for playback on the set of devices; adding the second media item to the playback queue; accessing the first media item from a first media streaming service; initiating playback of the first media item on the set of devices; accessing the second media item from a second media streaming service different than

the first media streaming service; and initiating playback of the second media item on the set of devices.

**[0034]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: means for receiving a first request to queue a first media item for  
 5 playback on a set of devices, wherein the set of devices includes the electronic device; means for adding the first media item to a playback queue; means for receiving a second request to queue a second media item for playback on the set of devices; means for adding the second media item to the playback queue; means for accessing the first media item from a first media streaming service; means for initiating playback of the first media item on the set of devices; means for  
 10 accessing the second media item from a second media streaming service different than the first media streaming service; and means for initiating playback of the second media item on the set of devices.

**[0035]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more  
 15 programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device, the one or more programs including instructions for: receiving a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the first device; adding the first media item to a playback queue; receiving a second request to queue a second media item for playback on the set of devices; adding the  
 20 second media item to the playback queue; accessing the first media item from a first media streaming service; initiating playback of the first media item on the set of devices; accessing the second media item from a second media streaming service different than the first media streaming service; and initiating playback of the second media item on the set of devices.

**[0036]** In accordance with some embodiments, a method is performed at a first device. The  
 25 method comprises: receiving, from a second device associated with a first user, a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the first device; adding the first media item to a playback queue; receiving, from a third device associated with a second user, a second request to queue a second media item for playback on the set of devices, wherein the second user is different than the first; adding the second media item to

the playback queue; initiating playback of the first media item on the set of devices; and initiating playback of the second media item on the set of devices.

**[0037]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device, the one or more programs including instructions for: receiving, from a second device associated with a first user, a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the first device; adding the first media item to a playback queue; receiving, from a third device associated with a second user, a second request to queue a second media item for playback on the set of devices, wherein the second user is different than the first; adding the second media item to the playback queue; initiating playback of the first media item on the set of devices; and initiating playback of the second media item on the set of devices.

**[0038]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: receiving, from a second device associated with a first user, a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the electronic device; adding the first media item to a playback queue; receiving, from a third device associated with a second user, a second request to queue a second media item for playback on the set of devices, wherein the second user is different than the first; adding the second media item to the playback queue; initiating playback of the first media item on the set of devices; and initiating playback of the second media item on the set of devices.

**[0039]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: means for receiving, from a second device associated with a first user, a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the electronic device; means for adding the first media item to a playback queue; means for receiving, from a third device associated with a second user, a second request to queue a second media item for playback on the set of devices, wherein the second user is

different than the first; means for adding the second media item to the playback queue; means for initiating playback of the first media item on the set of devices; and means for initiating playback of the second media item on the set of devices.

**[0040]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device, the one or more programs including instructions for: receiving, from a second device associated with a first user, a first request to queue a first media item for playback on a set of devices, wherein the set of devices includes the first device; adding the first media item to a playback queue; receiving, from a third device associated with a second user, a second request to queue a second media item for playback on the set of devices, wherein the second user is different than the first; adding the second media item to the playback queue; initiating playback of the first media item on the set of devices; and initiating playback of the second media item on the set of devices.

**[0041]** In accordance with some embodiments, a method is performed at a first device with a display. The method comprises: detecting an audio tone signal indicative of a pairing handshake with a second device, wherein the first device is connected to the second device via a communication link, and wherein the audio tone signal is out-of-band to the communication link; in accordance with detecting the audio tone signal, initiating, on the first device, a configuration process for configuring the second device; during the configuration process, displaying, on the display, a configuration user interface that includes a prompt to select a location; receiving user input selection of a location; and in response to receiving the user input, configuring the second device to be associated with the location.

**[0042]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device with a display, wherein the electronic device is a first device, the one or more programs including instructions for: detecting an audio tone signal indicative of a pairing handshake with a second device, wherein the first device is connected to the second device via a communication link, and

wherein the audio tone signal is out-of-band to the communication link; in accordance with detecting the audio tone signal, initiating, on the first device, a configuration process for configuring the second device; during the configuration process, displaying, on the display, a configuration user interface that includes a prompt to select a location; receiving user input selection of a location; and in response to receiving the user input, configuring the second device to be associated with the location.

**[0043]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a display; one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: detecting an audio tone signal indicative of a pairing handshake with a second device, wherein the electronic device is connected to the second device via a communication link, and wherein the audio tone signal is out-of-band to the communication link; in accordance with detecting the audio tone signal, initiating, on the electronic device, a configuration process for configuring the second device; during the configuration process, displaying, on the display, a configuration user interface that includes a prompt to select a location; receiving user input selection of a location; and in response to receiving the user input, configuring the second device to be associated with the location.

**[0044]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: a display; means for detecting an audio tone signal indicative of a pairing handshake with a second device, wherein the electronic device is connected to the second device via a communication link, and wherein the audio tone signal is out-of-band to the communication link; means for, in accordance with detecting the audio tone signal, initiating, on the electronic device, a configuration process for configuring the second device; means for, during the configuration process, displaying, on the display, a configuration user interface that includes a prompt to select a location; means for receiving user input selection of a location; and means for, responsive to receiving the user input, configuring the second device to be associated with the location.

**[0045]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more

programs configured to be executed by one or more processors of an electronic device with a display, wherein the electronic device is a first device, the one or more programs including instructions for: detecting an audio tone signal indicative of a pairing handshake with a second device, wherein the first device is connected to the second device via a communication link, and  
 5 wherein the audio tone signal is out-of-band to the communication link; in accordance with detecting the audio tone signal, initiating, on the first device, a configuration process for configuring the second device; during the configuration process, displaying, on the display, a configuration user interface that includes a prompt to select a location; receiving user input selection of a location; and in response to receiving the user input, configuring the second device  
 10 to be associated with the location.

**[0046]** In accordance with some embodiments, a method is performed at a device. The method comprises: while outputting an audible signal from the device, detecting a user input voice command from a voice command source; in response to detecting the user input voice command, determining a spatial position of the voice command source relative to the device; and  
 15 while continuing to output the audible signal, adjusting the output of the audible signal based on the spatial position of the voice command source.

**[0047]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, the one  
 20 or more programs including instructions for: while outputting an audible signal from the device, detecting a user input voice command from a voice command source; in response to detecting the user input voice command, determining a spatial position of the voice command source relative to the device; and while continuing to output the audible signal, adjusting the output of the audible signal based on the spatial position of the voice command source.

**[0048]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: while outputting an audible signal from the device, detecting a user input voice command from a voice command source; in response to detecting the user input voice command,

determining a spatial position of the voice command source relative to the device; and while continuing to output the audible signal, adjusting the output of the audible signal based on the spatial position of the voice command source.

**[0049]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: means for, while outputting an audible signal from the device, detecting a user input voice command from a voice command source; means for, responsive to detecting the user input voice command, determining a spatial position of the voice command source relative to the device; and means for, while continuing to output the audible signal, adjusting the output of the audible signal based on the spatial position of the voice command source.

**[0050]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, the one or more programs including instructions for: while outputting an audible signal from the device, detecting a user input voice command from a voice command source; in response to detecting the user input voice command, determining a spatial position of the voice command source relative to the device; and while continuing to output the audible signal, adjusting the output of the audible signal based on the spatial position of the voice command source.

**[0051]** In accordance with some embodiments, a method is performed at a first device associated with a first user account. The method comprises: detecting that a second device associated with a second user account is connected to the first device, wherein the first user account is associated with a first media preference profile; wherein the second user account is associated with a second media preference profile different than the first media preference profile; and initiating playback of media based on the first media preference profile and the second media preference profile.

**[0052]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device associated with a first user account, wherein the first user

account is associated with a first media preference profile, the one or more programs including instructions for: detecting that a second device associated with a second user account is connected to the first device, wherein the second user account is associated with a second media preference profile different than the first media preference profile; and initiating playback of media based on the first media preference profile and the second media preference profile.

**[0053]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: detecting that a second device associated with a second user account is connected to the electronic device, wherein the electronic device is associated with a first user account, wherein the first user account is associated with a first media preference profile: wherein the second user account is associated with a second media preference profile different than the first media preference profile; and initiating playback of media based on the first media preference profile and the second media preference profile.

**[0054]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: means for detecting that a second device associated with a second user account is connected to the electronic device, wherein the electronic device is associated with a first user account, wherein the first user account is associated with a first media preference profile: wherein the second user account is associated with a second media preference profile different than the first media preference profile; and means for initiating playback of media based on the first media preference profile and the second media preference profile.

**[0055]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device associated with a first user account, wherein the first user account is associated with a first media preference profile, the one or more programs including instructions for: detecting that a second device associated with a second user account is connected to the first device, wherein the second user account is associated with a second media



preference profile different than the first media preference profile; and initiating playback of media based on the first media preference profile and the second media preference profile.

**[0056]** In accordance with some embodiments, a method is performed at a first device. The method comprises: receiving a request, from a third device, to initiate media playback on at least one device of a set of devices, wherein the set of devices comprises the first device and a second device, wherein the third device is not a member of the set of devices, and wherein the third device is connected to the first device; in response to receiving the request: in accordance with a determination that the third device has permission to initiate media playback on the at least one device of set of devices, initiating media playback on the set of devices; and in accordance with a determination that the third device does not have permission to initiate media playback on the at least one device of set of devices: transmitting a request for permission to the second device; and in response to receiving permission from the second device, initiating media playback on the at least one device of the set of devices.

**[0057]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device, the one or more programs including instructions for: receiving a request, from a third device, to initiate media playback on at least one device of a set of devices, wherein the set of devices comprises the first device and a second device, wherein the third device is not a member of the set of devices, and wherein the third device is connected to the first device; in response to receiving the request: in accordance with a determination that the third device has permission to initiate media playback on the at least one device of set of devices, initiating media playback on the set of devices; and in accordance with a determination that the third device does not have permission to initiate media playback on the at least one device of set of devices: transmitting a request for permission to the second device; and in response to receiving permission from the second device, initiating media playback on the at least one device of the set of devices.

**[0058]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more processors; and memory storing one or more programs

configured to be executed by the one or more processors, the one or more programs including instructions for: receiving a request, from a third device, to initiate media playback on at least one device of a set of devices, wherein the set of devices comprises the electronic device and a second device, wherein the third device is not a member of the set of devices, and wherein the third device is connected to the electronic device; in response to receiving the request: in accordance with a determination that the third device has permission to initiate media playback on the at least one device of set of devices, initiating media playback on the set of devices; and in accordance with a determination that the third device does not have permission to initiate media playback on the at least one device of set of devices: transmitting a request for permission to the second device; and in response to receiving permission from the second device, initiating media playback on the at least one device of the set of devices.

**[0059]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: means for receiving a request, from a third device, to initiate media playback on at least one device of a set of devices, wherein the set of devices comprises the electronic device and a second device, wherein the third device is not a member of the set of devices, and wherein the third device is connected to the electronic device; means for, responsive to receiving the request: in accordance with a determination that the third device has permission to initiate media playback on the at least one device of set of devices, initiating media playback on the set of devices; and in accordance with a determination that the third device does not have permission to initiate media playback on the at least one device of set of devices: transmitting a request for permission to the second device; and in response to receiving permission from the second device, initiating media playback on the at least one device of the set of devices.

**[0060]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device, the one or more programs including instructions for: receiving a request, from a third device, to initiate media playback on at least one device of a set of devices, wherein the set of devices comprises the first device and a second device, wherein the third device is not a member of the set of devices, and wherein the third device is connected to the first device; in response to receiving the request: in accordance with a determination that the

third device has permission to initiate media playback on the at least one device of set of devices, initiating media playback on the set of devices; and in accordance with a determination that the third device does not have permission to initiate media playback on the at least one device of set of devices: transmitting a request for permission to the second device; and in response to  
 5 receiving permission from the second device, initiating media playback on the at least one device of the set of devices.

**[0061]** In accordance with some embodiments, a method is performed at a first device associated with a user account. The method comprises: receiving user input representing a request to access data from the user account; in response to receiving the user input, determining  
 10 whether a physical positioning of the first device and a second device associated with the user account satisfies a permissive condition; in accordance with a determination that the physical positioning satisfies the permissive condition, providing the data from the user account through the first device; and in accordance with a determination that the physical positioning does not satisfy the permissive condition, forgoing providing the data from the user account through the  
 15 first device.

**[0062]** In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first electronic device associated with a user account, the one or more  
 20 programs including instructions for: receiving user input representing a request to access data from the user account; in response to receiving the user input, determining whether a physical positioning of the electronic device and a second device associated with the user account satisfies a permissive condition; in accordance with a determination that the physical positioning satisfies the permissive condition, providing the data from the user account through the electronic device;  
 25 and in accordance with a determination that the physical positioning does not satisfy the permissive condition, forgoing providing the data from the user account through the electronic device.

**[0063]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more processors; and memory storing one or more programs

configured to be executed by the one or more processors, the one or more programs including instructions for: receiving user input representing a request to access data from a user account, wherein the electronic device is associated with the user account; in response to receiving the user input, determining whether a physical positioning of the electronic device and a second  
 5 device associated with the user account satisfies a permissive condition; in accordance with a determination that the physical positioning satisfies the permissive condition, providing the data from the user account through the electronic device; and in accordance with a determination that the physical positioning does not satisfy the permissive condition, forgoing providing the data from the user account through the electronic device.

10 **[0064]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: means for receiving user input representing a request to access data from a user account, wherein the electronic device is associated with the user account; means for, responsive to receiving the user input, determining whether a physical positioning of the electronic device and a second device associated with the user account satisfies a permissive  
 15 condition; means for, in accordance with a determination that the physical positioning satisfies the permissive condition, providing the data from the user account through the electronic device; and means for, in accordance with a determination that the physical positioning does not satisfy the permissive condition, forgoing providing the data from the user account through the electronic device.

20 **[0065]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first electronic device associated with a user account, the one or more programs including instructions for: receiving user input representing a request to access data  
 25 from the user account; in response to receiving the user input, determining whether a physical positioning of the electronic device and a second device associated with the user account satisfies a permissive condition; in accordance with a determination that the physical positioning satisfies the permissive condition, providing the data from the user account through the electronic device; and in accordance with a determination that the physical positioning does not satisfy the

permissive condition, forgoing providing the data from the user account through the electronic device.

**[0066]** In accordance with some embodiments, a method is performed at a first device. The method comprises: receiving a command to initiate playback of media on a set of devices

5 comprising the first device and a second device; in response to receiving the command, initiating synchronized playback of the media on the set of devices, wherein the second device is designated as a primary device configured to coordinate the playback of the media on the set of devices, and wherein the first device is configured to be a designated heir to the primary device.

**[0067]** In accordance with some embodiments, a non-transitory computer-readable storage

10 medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device, the one or more programs including instructions for:

receiving a command to initiate playback of media on a set of devices comprising the first device and a second device; in response to receiving the command, initiating synchronized playback of  
15 the media on the set of devices, wherein the second device is designated as a primary device configured to coordinate the playback of the media on the set of devices, and wherein the first device is configured to be a designated heir to the primary device.

**[0068]** In accordance with some embodiments, an electronic device is described. The

electronic device comprises: one or more processors; and memory storing one or more programs

20 configured to be executed by the one or more processors, the one or more programs including instructions for: receiving a command to initiate playback of media on a set of devices

comprising the electronic device and a second device; in response to receiving the command, initiating synchronized playback of the media on the set of devices, wherein the second device is designated as a primary device configured to coordinate the playback of the media on the set of

25 devices, and wherein the electronic device is configured to be a designated heir to the primary device.

**[0069]** In accordance with some embodiments, an electronic device is described. The

electronic device comprises: means for receiving a command to initiate playback of media on a set of devices comprising the electronic device and a second device; means for, responsive to

receiving the command, initiating synchronized playback of the media on the set of devices, wherein the second device is designated as a primary device configured to coordinate the playback of the media on the set of devices, and wherein the electronic device is configured to be a designated heir to the primary device.

5   **[0070]**     In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device, the one or more programs including instructions for: receiving a command to initiate playback of media on a set of devices comprising the first device  
10   and a second device; in response to receiving the command, initiating synchronized playback of the media on the set of devices, wherein the second device is designated as a primary device configured to coordinate the playback of the media on the set of devices, and wherein the first device is configured to be a designated heir to the primary device.

**[0071]**     In accordance with some embodiments, a method is performed at a first device of a  
15   set of devices associated with a first user account. The method comprises: receiving an audible output trigger event; determining that a first user, associated with the first user account, is located within an audible output range of a device of the set of devices; in accordance with a determination that the first user is within the audible output range of the first device, and in accordance with an occurrence of the audible output trigger event, outputting an audible output;  
20   and in accordance with a determination that the first user is within the audible output range of a second device, and in accordance with an occurrence of the audible output trigger event, forgoing outputting the audible output.

**[0072]**     In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more  
25   programs configured to be executed by one or more processors of an electronic device, wherein the electronic device is a first device of a set of devices associated with a first user account, the one or more programs including instructions for: receiving an audible output trigger event; determining that a first user, associated with the first user account, is located within an audible output range of a device of the set of devices; in accordance with a determination that the first

user is within the audible output range of the first device, and in accordance with an occurrence of the audible output trigger event, outputting an audible output; and in accordance with a determination that the first user is within the audible output range of a second device, and in accordance with an occurrence of the audible output trigger event, forgoing outputting the

5 audible output.

**[0073]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: receiving an audible output trigger event; determining that a first user,

10 associated with a first user account, is located within an audible output range of a device of a set of devices associated with the first user account, wherein the electronic device is a first device of the set of devices; in accordance with a determination that the first user is within the audible output range of the first device, and in accordance with an occurrence of the audible output trigger event, outputting an audible output; and in accordance with a determination that the first

15 user is within the audible output range of a second device, and in accordance with an occurrence of the audible output trigger event, forgoing outputting the audible output.

**[0074]** In accordance with some embodiments, an electronic device is described. The electronic device comprises: means for receiving an audible output trigger event; means for determining that a first user, associated with a first user account, is located within an audible

20 output range of a device of a set of devices associated with the first user account, wherein the electronic device is a first device of the set of devices; means for, in accordance with a determination that the first user is within the audible output range of the first device, and in accordance with an occurrence of the audible output trigger event, outputting an audible output; and means for, in accordance with a determination that the first user is within the audible output

25 range of a second device, and in accordance with an occurrence of the audible output trigger event, forgoing outputting the audible output.

**[0075]** In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device, wherein

the electronic device is a first device of a set of devices associated with a first user account, the one or more programs including instructions for: receiving an audible output trigger event; determining that a first user, associated with the first user account, is located within an audible output range of a device of the set of devices; in accordance with a determination that the first user is within the audible output range of the first device, and in accordance with an occurrence of the audible output trigger event, outputting an audible output; and in accordance with a determination that the first user is within the audible output range of a second device, and in accordance with an occurrence of the audible output trigger event, forgoing outputting the audible output.

10 **[0076]** Executable instructions for performing these functions are, optionally, included in a non-transitory computer-readable storage medium or other computer program product configured for execution by one or more processors. Executable instructions for performing these functions are, optionally, included in a transitory computer-readable storage medium or other computer program product configured for execution by one or more processors.

15 **[0077]** Thus, devices are provided with faster, more efficient methods and interfaces for managing media playback devices, thereby increasing the effectiveness, efficiency, and user satisfaction with such devices. Such methods and interfaces may complement or replace other methods for managing media playback devices.

#### DESCRIPTION OF THE FIGURES

20 **[0078]** For a better understanding of the various described embodiments, reference should be made to the Description of Embodiments below, in conjunction with the following drawings in which like reference numerals refer to corresponding parts throughout the figures.

**[0079]** FIG. 1A is a block diagram illustrating a portable multifunction device with a touch-sensitive display in accordance with some embodiments.

25 **[0080]** FIG. 1B is a block diagram illustrating exemplary components for event handling in accordance with some embodiments.



**[0081]** FIG. 2 illustrates a portable multifunction device having a touch screen in accordance with some embodiments.

**[0082]** FIG. 3 is a block diagram of an exemplary multifunction device with a display and a touch-sensitive surface in accordance with some embodiments.

5 **[0083]** FIG. 4A illustrates an exemplary user interface for a menu of applications on a portable multifunction device in accordance with some embodiments.

**[0084]** FIG. 4B illustrates an exemplary user interface for a multifunction device with a touch-sensitive surface that is separate from the display in accordance with some embodiments.

10 **[0085]** FIG. 5A illustrates a personal electronic device in accordance with some embodiments.

**[0086]** FIG. 5B is a block diagram illustrating a personal electronic device in accordance with some embodiments.

**[0087]** FIGS. 5C-5D illustrate exemplary components of a personal electronic device having a touch-sensitive display and intensity sensors in accordance with some embodiments.

15 **[0088]** FIGS. 5E-5H illustrate exemplary components and user interfaces of a personal electronic device in accordance with some embodiments.

**[0089]** FIG. 5I illustrates an electronic device in accordance with some embodiments.

**[0090]** FIG. 5J is a block diagram illustrating an electronic device in accordance with some embodiments.

20 **[0091]** FIGS. 6A-6AR illustrate exemplary techniques and user interfaces for playing back media in accordance with some embodiments.

**[0092]** FIG. 7 is a flow diagram illustrating a process for playing back media in accordance with some embodiments.

**[0093]** FIGS. 8A-8P illustrate exemplary techniques and user interfaces for playing back media in accordance with some embodiments.

**[0094]** FIG. 9 is a flow diagram illustrating a process for playing back media in accordance with some embodiments.

5 **[0095]** FIGS. 10A-10O illustrate exemplary techniques and user interfaces for in accordance with some embodiments.

**[0096]** FIG. 11 is a flow diagram illustrating a process for displaying content in accordance with some embodiments.

10 **[0097]** FIGS. 12A-12AM illustrate exemplary techniques and user interfaces for viewing media information in accordance with some embodiments.

**[0098]** FIG. 13 is a flow diagram illustrating a process for viewing media information in accordance with some embodiments.

**[0099]** FIGS. 14A-14T illustrate exemplary techniques and user interfaces for controlling an electronic device in accordance with some embodiments.

15 **[0100]** FIG. 15 is a flow diagram illustrating a process for controlling an electronic device in accordance with some embodiments.

**[0101]** FIGS. 16A-16P illustrate exemplary techniques and user interfaces for managing a playback queue in accordance with some embodiments.

20 **[0102]** FIG. 17 is a flow diagram illustrating a process for managing a playback queue in accordance with some embodiments.

**[0103]** FIG. 18 is a flow diagram illustrating a process for managing a playback queue in accordance with some embodiments.

**[0104]** FIGS. 19A-19P illustrate exemplary techniques and user interfaces for configuring an electronic device in accordance with some embodiments.

**[0105]** FIG. 20 is a flow diagram illustrating a process for configuring an electronic device in accordance with some embodiments.

**[0106]** FIGS. 21A-21I illustrate exemplary techniques and user interfaces for adjusting an audible output of an electronic device in accordance with some embodiments.

5 **[0107]** FIG. 22 is a flow diagram illustrating a process for adjusting an audible output of an electronic device in accordance with some embodiments.

**[0108]** FIGS. 23A-23K illustrate exemplary techniques and user interfaces for managing a playback queue in accordance with some embodiments.

10 **[0109]** FIG. 24 is a flow diagram illustrating a process for managing a playback queue in accordance with some embodiments.

**[0110]** FIGS. 25A-25I illustrate exemplary techniques and user interfaces for playing back media in accordance with some embodiments.

**[0111]** FIG. 26 is a flow diagram illustrating a process for playing back media in accordance with some embodiments.

15 **[0112]** FIGS. 27A-27E illustrate exemplary techniques and user interfaces for providing access to an electronic device in accordance with some embodiments.

**[0113]** FIG. 28 is a flow diagram illustrating a process for providing access to an electronic device in accordance with some embodiments.

20 **[0114]** FIGS. 29A-29I illustrate exemplary techniques and user interfaces for managing media playback in accordance with some embodiments.

**[0115]** FIG. 30 is a flow diagram illustrating a process for managing media playback in accordance with some embodiments.

**[0116]** FIGS. 31A-31N illustrate exemplary techniques and user interfaces for providing output in accordance with some embodiments.

[0117] FIG. 32 is a flow diagram illustrating a process for providing output in accordance with some embodiments.

## DESCRIPTION OF EMBODIMENTS

[0118] The following description sets forth exemplary methods, parameters, and the like. It should be recognized, however, that such description is not intended as a limitation on the scope of the present disclosure but is instead provided as a description of exemplary embodiments.

[0119] There is a need for electronic devices that provide efficient methods and interfaces for managing media playback devices. For example, methods and techniques for transferring playback between devices are described below. Such techniques can reduce the cognitive burden on a user who accesses event notifications, thereby enhancing productivity. Further, such techniques can reduce processor and battery power otherwise wasted on redundant user inputs.

[0120] Below, FIGS. 1A-1B, 2, 3, 4A-4B, and 5A-5H provide a description of exemplary devices for performing the techniques for managing event notifications. FIGS. 6A-6AR illustrate exemplary techniques and user interfaces for playing back media in accordance with some embodiments. FIG. 7 is a flow diagram illustrating a process for playing back media in accordance with some embodiments. The user interfaces in FIGS. 6A-6AR are used to illustrate the processes described below, including the processes in FIGS. 7. FIGS. 8A-8P illustrate exemplary techniques and user interfaces for playing back media in accordance with some embodiments. FIG. 9 is a flow diagram illustrating a process for playing back media in accordance with some embodiments. The user interfaces in FIGS. 8A-8P are used to illustrate the processes described below, including the processes in FIGS. 9. FIGS. 10A-10O illustrate exemplary techniques and user interfaces for in accordance with some embodiments. FIG. 11 is a flow diagram illustrating a process for displaying content in accordance with some embodiments. The user interfaces in FIGS. 10A-10O are used to illustrate the processes described below, including the processes in FIGS. 11. FIGS. 12A-12AM illustrate exemplary techniques and user interfaces for viewing media information in accordance with some embodiments. FIG. 13 is a flow diagram illustrating a process for viewing media information in accordance with some embodiments. The user interfaces in FIGS. 12A-12AM are used to illustrate the processes described below, including the processes in FIGS. 13. FIGS. 14A-14T illustrate exemplary

techniques and user interfaces for controlling an electronic device in accordance with some embodiments. FIG. 15 is a flow diagram illustrating a process for controlling an electronic device in accordance with some embodiments. The user interfaces in FIGS. 14A-14T are used to illustrate the processes described below, including the processes in FIGS. 15. FIGS. 16A-16P illustrate exemplary techniques and user interfaces for managing a playback queue in accordance with some embodiments. FIG. 17 is a flow diagram illustrating a process for managing a playback queue in accordance with some embodiments. FIG. 18 is a flow diagram illustrating a process for managing a playback queue in accordance with some embodiments. The user interfaces in FIGS. 16A-16P are used to illustrate the processes described below, including the processes in FIGS. 17 and 18. FIGS. 19A-19P illustrate exemplary techniques and user interfaces for configuring an electronic device in accordance with some embodiments. FIG. 20 is a flow diagram illustrating a process for configuring an electronic device in accordance with some embodiments. The user interfaces in FIGS. 19A-19P are used to illustrate the processes described below, including the processes in FIGS. 20. FIGS. 21A-21I illustrate exemplary techniques and user interfaces for adjusting an audible output of an electronic device in accordance with some embodiments. FIG. 22 is a flow diagram illustrating a process for adjusting an audible output of an electronic device in accordance with some embodiments. The user interfaces in FIGS. 21A-21I are used to illustrate the processes described below, including the processes in FIGS. 22. FIGS. 23A-23K illustrate exemplary techniques and user interfaces for managing a playback queue in accordance with some embodiments. FIG. 24 is a flow diagram illustrating a process for managing a playback queue in accordance with some embodiments. The user interfaces in FIGS. 23A-23K are used to illustrate the processes described below, including the processes in FIGS. 24. FIGS. 25A-25I illustrate exemplary techniques and user interfaces for playing back media in accordance with some embodiments. FIG. 26 is a flow diagram illustrating a process for playing back media in accordance with some embodiments. The user interfaces in FIGS. 25A-25I are used to illustrate the processes described below, including the processes in FIGS. 26. FIGS. 27A-27E illustrate exemplary techniques and user interfaces for providing access to an electronic device in accordance with some embodiments. FIG. 28 is a flow diagram illustrating a process for providing access to an electronic device in accordance with some embodiments. The user interfaces in FIGS. 27A-27E are used to illustrate the processes described below, including the processes in FIGS. 28. FIGS.

29A-29I illustrate exemplary techniques and user interfaces for managing media playback in accordance with some embodiments. FIG. 30 is a flow diagram illustrating a process for managing media playback in accordance with some embodiments. The user interfaces in FIGS. 29A-29I are used to illustrate the processes described below, including the processes in FIGS.

5 30. FIGS. 31A-31N illustrate exemplary techniques and user interfaces for providing output in accordance with some embodiments. FIG. 32 is a flow diagram illustrating a process for providing output in accordance with some embodiments. The user interfaces in FIGS. 31A-31N are used to illustrate the processes described below, including the processes in FIGS. 32.

10 **[0121]** Although the following description uses terms “first,” “second,” etc. to describe various elements, these elements should not be limited by the terms. These terms are only used to distinguish one element from another. For example, a first touch could be termed a second touch, and, similarly, a second touch could be termed a first touch, without departing from the scope of the various described embodiments. The first touch and the second touch are both touches, but they are not the same touch.

15 **[0122]** The terminology used in the description of the various described embodiments herein is for the purpose of describing particular embodiments only and is not intended to be limiting. As used in the description of the various described embodiments and the appended claims, the singular forms “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that the term “and/or” as used  
 20 herein refers to and encompasses any and all possible combinations of one or more of the associated listed items. It will be further understood that the terms “includes,” “including,” “comprises,” and/or “comprising,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements,  
 25 components, and/or groups thereof.

**[0123]** The term “if” is, optionally, construed to mean “when” or “upon” or “in response to determining” or “in response to detecting,” depending on the context. Similarly, the phrase “if it is determined” or “if [a stated condition or event] is detected” is, optionally, construed to mean

“upon determining” or “in response to determining” or “upon detecting [the stated condition or event]” or “in response to detecting [the stated condition or event],” depending on the context.

**[0124]** Embodiments of electronic devices, user interfaces for such devices, and associated processes for using such devices are described. In some embodiments, the device is a portable communications device, such as a mobile telephone, that also contains other functions, such as PDA and/or music player functions. Exemplary embodiments of portable multifunction devices include, without limitation, the iPhone®, iPod Touch®, and iPad® devices from Apple Inc. of Cupertino, California. Other portable electronic devices, such as laptops or tablet computers with touch-sensitive surfaces (e.g., touch screen displays and/or touchpads), are, optionally, used.

It should also be understood that, in some embodiments, the device is not a portable communications device, but is a desktop computer with a touch-sensitive surface (e.g., a touch screen display and/or a touchpad).

**[0125]** In the discussion that follows, an electronic device that includes a display and a touch-sensitive surface is described. It should be understood, however, that the electronic device optionally includes one or more other physical user-interface devices, such as a physical keyboard, a mouse, and/or a joystick.

**[0126]** The device typically supports a variety of applications, such as one or more of the following: a drawing application, a presentation application, a word processing application, a website creation application, a disk authoring application, a spreadsheet application, a gaming application, a telephone application, a video conferencing application, an e-mail application, an instant messaging application, a workout support application, a photo management application, a digital camera application, a digital video camera application, a web browsing application, a digital music player application, and/or a digital video player application.

**[0127]** The various applications that are executed on the device optionally use at least one common physical user-interface device, such as the touch-sensitive surface. One or more functions of the touch-sensitive surface as well as corresponding information displayed on the device are, optionally, adjusted and/or varied from one application to the next and/or within a respective application. In this way, a common physical architecture (such as the touch-sensitive

surface) of the device optionally supports the variety of applications with user interfaces that are intuitive and transparent to the user.

**[0128]** Attention is now directed toward embodiments of portable devices with touch-sensitive displays. FIG. 1A is a block diagram illustrating portable multifunction device 100 with touch-sensitive display system 112 in accordance with some embodiments. Touch-sensitive display 112 is sometimes called a “touch screen” for convenience and is sometimes known as or called a “touch-sensitive display system.” Device 100 includes memory 102 (which optionally includes one or more computer-readable storage mediums), memory controller 122, one or more processing units (CPUs) 120, peripherals interface 118, RF circuitry 108, audio circuitry 110, speaker 111, microphone 113, input/output (I/O) subsystem 106, other input control devices 116, and external port 124. Device 100 optionally includes one or more optical sensors 164. Device 100 optionally includes one or more contact intensity sensors 165 for detecting intensity of contacts on device 100 (e.g., a touch-sensitive surface such as touch-sensitive display system 112 of device 100). Device 100 optionally includes one or more tactile output generators 167 for generating tactile outputs on device 100 (e.g., generating tactile outputs on a touch-sensitive surface such as touch-sensitive display system 112 of device 100 or touchpad 355 of device 300). These components optionally communicate over one or more communication buses or signal lines 103.

**[0129]** As used in the specification and claims, the term “intensity” of a contact on a touch-sensitive surface refers to the force or pressure (force per unit area) of a contact (e.g., a finger contact) on the touch-sensitive surface, or to a substitute (proxy) for the force or pressure of a contact on the touch-sensitive surface. The intensity of a contact has a range of values that includes at least four distinct values and more typically includes hundreds of distinct values (e.g., at least 256). Intensity of a contact is, optionally, determined (or measured) using various approaches and various sensors or combinations of sensors. For example, one or more force sensors underneath or adjacent to the touch-sensitive surface are, optionally, used to measure force at various points on the touch-sensitive surface. In some implementations, force measurements from multiple force sensors are combined (e.g., a weighted average) to determine an estimated force of a contact. Similarly, a pressure-sensitive tip of a stylus is, optionally, used to determine a pressure of the stylus on the touch-sensitive surface. Alternatively, the size of the



contact area detected on the touch-sensitive surface and/or changes thereto, the capacitance of the touch-sensitive surface proximate to the contact and/or changes thereto, and/or the resistance of the touch-sensitive surface proximate to the contact and/or changes thereto are, optionally, used as a substitute for the force or pressure of the contact on the touch-sensitive surface. In some implementations, the substitute measurements for contact force or pressure are used directly to determine whether an intensity threshold has been exceeded (e.g., the intensity threshold is described in units corresponding to the substitute measurements). In some implementations, the substitute measurements for contact force or pressure are converted to an estimated force or pressure, and the estimated force or pressure is used to determine whether an intensity threshold has been exceeded (e.g., the intensity threshold is a pressure threshold measured in units of pressure). Using the intensity of a contact as an attribute of a user input allows for user access to additional device functionality that may otherwise not be accessible by the user on a reduced-size device with limited real estate for displaying affordances (e.g., on a touch-sensitive display) and/or receiving user input (e.g., via a touch-sensitive display, a touch-sensitive surface, or a physical/mechanical control such as a knob or a button).

**[0130]** As used in the specification and claims, the term “tactile output” refers to physical displacement of a device relative to a previous position of the device, physical displacement of a component (e.g., a touch-sensitive surface) of a device relative to another component (e.g., housing) of the device, or displacement of the component relative to a center of mass of the device that will be detected by a user with the user’s sense of touch. For example, in situations where the device or the component of the device is in contact with a surface of a user that is sensitive to touch (e.g., a finger, palm, or other part of a user’s hand), the tactile output generated by the physical displacement will be interpreted by the user as a tactile sensation corresponding to a perceived change in physical characteristics of the device or the component of the device. For example, movement of a touch-sensitive surface (e.g., a touch-sensitive display or trackpad) is, optionally, interpreted by the user as a “down click” or “up click” of a physical actuator button. In some cases, a user will feel a tactile sensation such as an “down click” or “up click” even when there is no movement of a physical actuator button associated with the touch-sensitive surface that is physically pressed (e.g., displaced) by the user’s movements. As another example, movement of the touch-sensitive surface is, optionally, interpreted or sensed by the user as “roughness” of the touch-sensitive surface, even when there is no change in smoothness

of the touch-sensitive surface. While such interpretations of touch by a user will be subject to the individualized sensory perceptions of the user, there are many sensory perceptions of touch that are common to a large majority of users. Thus, when a tactile output is described as corresponding to a particular sensory perception of a user (e.g., an “up click,” a “down click,” “roughness”), unless otherwise stated, the generated tactile output corresponds to physical displacement of the device or a component thereof that will generate the described sensory perception for a typical (or average) user.

**[0131]** It should be appreciated that device 100 is only one example of a portable multifunction device, and that device 100 optionally has more or fewer components than shown, optionally combines two or more components, or optionally has a different configuration or arrangement of the components. The various components shown in FIG. 1A are implemented in hardware, software, or a combination of both hardware and software, including one or more signal processing and/or application-specific integrated circuits.

**[0132]** Memory 102 optionally includes high-speed random access memory and optionally also includes non-volatile memory, such as one or more magnetic disk storage devices, flash memory devices, or other non-volatile solid-state memory devices. Memory controller 122 optionally controls access to memory 102 by other components of device 100.

**[0133]** Peripherals interface 118 can be used to couple input and output peripherals of the device to CPU 120 and memory 102. The one or more processors 120 run or execute various software programs and/or sets of instructions stored in memory 102 to perform various functions for device 100 and to process data. In some embodiments, peripherals interface 118, CPU 120, and memory controller 122 are, optionally, implemented on a single chip, such as chip 104. In some other embodiments, they are, optionally, implemented on separate chips.

**[0134]** RF (radio frequency) circuitry 108 receives and sends RF signals, also called electromagnetic signals. RF circuitry 108 converts electrical signals to/from electromagnetic signals and communicates with communications networks and other communications devices via the electromagnetic signals. RF circuitry 108 optionally includes well-known circuitry for performing these functions, including but not limited to an antenna system, an RF transceiver, one or more amplifiers, a tuner, one or more oscillators, a digital signal processor, a CODEC

chipset, a subscriber identity module (SIM) card, memory, and so forth. RF circuitry 108 optionally communicates with networks, such as the Internet, also referred to as the World Wide Web (WWW), an intranet and/or a wireless network, such as a cellular telephone network, a wireless local area network (LAN) and/or a metropolitan area network (MAN), and other devices by wireless communication. The RF circuitry 108 optionally includes well-known circuitry for detecting near field communication (NFC) fields, such as by a short-range communication radio. The wireless communication optionally uses any of a plurality of communications standards, protocols, and technologies, including but not limited to Global System for Mobile Communications (GSM), Enhanced Data GSM Environment (EDGE), high-speed downlink packet access (HSDPA), high-speed uplink packet access (HSUPA), Evolution, Data-Only (EV-DO), HSPA, HSPA+, Dual-Cell HSPA (DC-HSPDA), long term evolution (LTE), near field communication (NFC), wideband code division multiple access (W-CDMA), code division multiple access (CDMA), time division multiple access (TDMA), Bluetooth, Bluetooth Low Energy (BTLE), Wireless Fidelity (Wi-Fi) (e.g., IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, and/or IEEE 802.11ac), voice over Internet Protocol (VoIP), Wi-MAX, a protocol for e-mail (e.g., Internet message access protocol (IMAP) and/or post office protocol (POP)), instant messaging (e.g., extensible messaging and presence protocol (XMPP), Session Initiation Protocol for Instant Messaging and Presence Leveraging Extensions (SIMPLE), Instant Messaging and Presence Service (IMPS)), and/or Short Message Service (SMS), or any other suitable communication protocol, including communication protocols not yet developed as of the filing date of this document.

**[0135]** Audio circuitry 110, speaker 111, and microphone 113 provide an audio interface between a user and device 100. Audio circuitry 110 receives audio data from peripherals interface 118, converts the audio data to an electrical signal, and transmits the electrical signal to speaker 111. Speaker 111 converts the electrical signal to human-audible sound waves. Audio circuitry 110 also receives electrical signals converted by microphone 113 from sound waves. Audio circuitry 110 converts the electrical signal to audio data and transmits the audio data to peripherals interface 118 for processing. Audio data is, optionally, retrieved from and/or transmitted to memory 102 and/or RF circuitry 108 by peripherals interface 118. In some embodiments, audio circuitry 110 also includes a headset jack (e.g., 212, FIG. 2). The headset jack provides an interface between audio circuitry 110 and removable audio input/output

peripherals, such as output-only headphones or a headset with both output (e.g., a headphone for one or both ears) and input (e.g., a microphone).

**[0136]** I/O subsystem 106 couples input/output peripherals on device 100, such as touch screen 112 and other input control devices 116, to peripherals interface 118. I/O subsystem 106 optionally includes display controller 156, optical sensor controller 158, intensity sensor controller 159, haptic feedback controller 161, and one or more input controllers 160 for other input or control devices. The one or more input controllers 160 receive/send electrical signals from/to other input control devices 116. The other input control devices 116 optionally include physical buttons (e.g., push buttons, rocker buttons, etc.), dials, slider switches, joysticks, click wheels, and so forth. In some alternate embodiments, input controller(s) 160 are, optionally, coupled to any (or none) of the following: a keyboard, an infrared port, a USB port, and a pointer device such as a mouse. The one or more buttons (e.g., 208, FIG. 2) optionally include an up/down button for volume control of speaker 111 and/or microphone 113. The one or more buttons optionally include a push button (e.g., 206, FIG. 2).

**[0137]** A quick press of the push button optionally disengages a lock of touch screen 112 or optionally begins a process that uses gestures on the touch screen to unlock the device, as described in U.S. Patent Application 11/322,549, “Unlocking a Device by Performing Gestures on an Unlock Image,” filed December 23, 2005, U.S. Pat. No. 7,657,849. A longer press of the push button (e.g., 206) optionally turns power to device 100 on or off. The functionality of one or more of the buttons are, optionally, user-customizable. Touch screen 112 is used to implement virtual or soft buttons and one or more soft keyboards.

**[0138]** Touch-sensitive display 112 provides an input interface and an output interface between the device and a user. Display controller 156 receives and/or sends electrical signals from/to touch screen 112. Touch screen 112 displays visual output to the user. The visual output optionally includes graphics, text, icons, video, and any combination thereof (collectively termed “graphics”). In some embodiments, some or all of the visual output optionally corresponds to user-interface objects.

**[0139]** Touch screen 112 has a touch-sensitive surface, sensor, or set of sensors that accepts input from the user based on haptic and/or tactile contact. Touch screen 112 and display

controller 156 (along with any associated modules and/or sets of instructions in memory 102) detect contact (and any movement or breaking of the contact) on touch screen 112 and convert the detected contact into interaction with user-interface objects (e.g., one or more soft keys, icons, web pages, or images) that are displayed on touch screen 112. In an exemplary embodiment, a point of contact between touch screen 112 and the user corresponds to a finger of the user.

**[0140]** Touch screen 112 optionally uses LCD (liquid crystal display) technology, LPD (light emitting polymer display) technology, or LED (light emitting diode) technology, although other display technologies are used in other embodiments. Touch screen 112 and display controller 156 optionally detect contact and any movement or breaking thereof using any of a plurality of touch sensing technologies now known or later developed, including but not limited to capacitive, resistive, infrared, and surface acoustic wave technologies, as well as other proximity sensor arrays or other elements for determining one or more points of contact with touch screen 112. In an exemplary embodiment, projected mutual capacitance sensing technology is used, such as that found in the iPhone® and iPod Touch® from Apple Inc. of Cupertino, California.

**[0141]** A touch-sensitive display in some embodiments of touch screen 112 is, optionally, analogous to the multi-touch sensitive touchpads described in the following U.S. Patents: 6,323,846 (Westerman et al.), 6,570,557 (Westerman et al.), and/or 6,677,932 (Westerman), and/or U.S. Patent Publication 2002/0015024A1. However, touch screen 112 displays visual output from device 100, whereas touch-sensitive touchpads do not provide visual output.

**[0142]** A touch-sensitive display in some embodiments of touch screen 112 is described in the following applications: (1) U.S. Patent Application No. 11/381,313, “Multipoint Touch Surface Controller,” filed May 2, 2006; (2) U.S. Patent Application No. 10/840,862, “Multipoint Touchscreen,” filed May 6, 2004; (3) U.S. Patent Application No. 10/903,964, “Gestures For Touch Sensitive Input Devices,” filed July 30, 2004; (4) U.S. Patent Application No. 11/048,264, “Gestures For Touch Sensitive Input Devices,” filed January 31, 2005; (5) U.S. Patent Application No. 11/038,590, “Mode-Based Graphical User Interfaces For Touch Sensitive Input Devices,” filed January 18, 2005; (6) U.S. Patent Application No. 11/228,758, “Virtual Input Device Placement On A Touch Screen User Interface,” filed September 16, 2005; (7) U.S. Patent

Application No. 11/228,700, "Operation Of A Computer With A Touch Screen Interface," filed September 16, 2005; (8) U.S. Patent Application No. 11/228,737, "Activating Virtual Keys Of A Touch-Screen Virtual Keyboard," filed September 16, 2005; and (9) U.S. Patent Application No. 11/367,749, "Multi-Functional Hand-Held Device," filed March 3, 2006.

5   **[0143]**     Touch screen 112 optionally has a video resolution in excess of 100 dpi. In some embodiments, the touch screen has a video resolution of approximately 160 dpi. The user optionally makes contact with touch screen 112 using any suitable object or appendage, such as a stylus, a finger, and so forth. In some embodiments, the user interface is designed to work primarily with finger-based contacts and gestures, which can be less precise than stylus-based  
10   input due to the larger area of contact of a finger on the touch screen. In some embodiments, the device translates the rough finger-based input into a precise pointer/cursor position or command for performing the actions desired by the user.

**[0144]**     In some embodiments, in addition to the touch screen, device 100 optionally includes a touchpad (not shown) for activating or deactivating particular functions. In some  
15   embodiments, the touchpad is a touch-sensitive area of the device that, unlike the touch screen, does not display visual output. The touchpad is, optionally, a touch-sensitive surface that is separate from touch screen 112 or an extension of the touch-sensitive surface formed by the touch screen.

**[0145]**     Device 100 also includes power system 162 for powering the various components.  
20   Power system 162 optionally includes a power management system, one or more power sources (e.g., battery, alternating current (AC)), a recharging system, a power failure detection circuit, a power converter or inverter, a power status indicator (e.g., a light-emitting diode (LED)) and any other components associated with the generation, management and distribution of power in portable devices.

25   **[0146]**     Device 100 optionally also includes one or more optical sensors 164. FIG. 1A shows an optical sensor coupled to optical sensor controller 158 in I/O subsystem 106. Optical sensor 164 optionally includes charge-coupled device (CCD) or complementary metal-oxide semiconductor (CMOS) phototransistors. Optical sensor 164 receives light from the environment, projected through one or more lenses, and converts the light to data representing an

image. In conjunction with imaging module 143 (also called a camera module), optical sensor 164 optionally captures still images or video. In some embodiments, an optical sensor is located on the back of device 100, opposite touch screen display 112 on the front of the device so that the touch screen display is enabled for use as a viewfinder for still and/or video image acquisition. In some embodiments, an optical sensor is located on the front of the device so that the user's image is, optionally, obtained for video conferencing while the user views the other video conference participants on the touch screen display. In some embodiments, the position of optical sensor 164 can be changed by the user (e.g., by rotating the lens and the sensor in the device housing) so that a single optical sensor 164 is used along with the touch screen display for both video conferencing and still and/or video image acquisition.

**[0147]** Device 100 optionally also includes one or more contact intensity sensors 165. FIG. 1A shows a contact intensity sensor coupled to intensity sensor controller 159 in I/O subsystem 106. Contact intensity sensor 165 optionally includes one or more piezoresistive strain gauges, capacitive force sensors, electric force sensors, piezoelectric force sensors, optical force sensors, capacitive touch-sensitive surfaces, or other intensity sensors (e.g., sensors used to measure the force (or pressure) of a contact on a touch-sensitive surface). Contact intensity sensor 165 receives contact intensity information (e.g., pressure information or a proxy for pressure information) from the environment. In some embodiments, at least one contact intensity sensor is collocated with, or proximate to, a touch-sensitive surface (e.g., touch-sensitive display system 112). In some embodiments, at least one contact intensity sensor is located on the back of device 100, opposite touch screen display 112, which is located on the front of device 100.

**[0148]** Device 100 optionally also includes one or more proximity sensors 166. FIG. 1A shows proximity sensor 166 coupled to peripherals interface 118. Alternately, proximity sensor 166 is, optionally, coupled to input controller 160 in I/O subsystem 106. Proximity sensor 166 optionally performs as described in U.S. Patent Application Nos. 11/241,839, "Proximity Detector In Handheld Device"; 11/240,788, "Proximity Detector In Handheld Device"; 11/620,702, "Using Ambient Light Sensor To Augment Proximity Sensor Output"; 11/586,862, "Automated Response To And Sensing Of User Activity In Portable Devices"; and 11/638,251, "Methods And Systems For Automatic Configuration Of Peripherals". In some embodiments,

the proximity sensor turns off and disables touch screen 112 when the multifunction device is placed near the user's ear (e.g., when the user is making a phone call).

**[0149]** Device 100 optionally also includes one or more tactile output generators 167.

FIG. 1A shows a tactile output generator coupled to haptic feedback controller 161 in I/O

5 subsystem 106. Tactile output generator 167 optionally includes one or more electroacoustic devices such as speakers or other audio components and/or electromechanical devices that convert energy into linear motion such as a motor, solenoid, electroactive polymer, piezoelectric actuator, electrostatic actuator, or other tactile output generating component (e.g., a component that converts electrical signals into tactile outputs on the device). Contact intensity sensor 165  
10 receives tactile feedback generation instructions from haptic feedback module 133 and generates tactile outputs on device 100 that are capable of being sensed by a user of device 100. In some embodiments, at least one tactile output generator is collocated with, or proximate to, a touch-sensitive surface (e.g., touch-sensitive display system 112) and, optionally, generates a tactile output by moving the touch-sensitive surface vertically (e.g., in/out of a surface of device 100) or  
15 laterally (e.g., back and forth in the same plane as a surface of device 100). In some embodiments, at least one tactile output generator sensor is located on the back of device 100, opposite touch screen display 112, which is located on the front of device 100.

**[0150]** Device 100 optionally also includes one or more accelerometers 168. FIG. 1A shows accelerometer 168 coupled to peripherals interface 118. Alternately, accelerometer 168 is,

20 optionally, coupled to an input controller 160 in I/O subsystem 106. Accelerometer 168 optionally performs as described in U.S. Patent Publication No. 20050190059, "Acceleration-based Theft Detection System for Portable Electronic Devices," and U.S. Patent Publication No. 20060017692, "Methods And Apparatuses For Operating A Portable Device Based On An Accelerometer". In some embodiments, information is displayed on the touch screen display in a  
25 portrait view or a landscape view based on an analysis of data received from the one or more accelerometers. Device 100 optionally includes, in addition to accelerometer(s) 168, a magnetometer (not shown) and a GPS (or GLONASS or other global navigation system) receiver (not shown) for obtaining information concerning the location and orientation (e.g., portrait or landscape) of device 100.



**[0151]** In some embodiments, the software components stored in memory 102 include operating system 126, communication module (or set of instructions) 128, contact/motion module (or set of instructions) 130, graphics module (or set of instructions) 132, text input module (or set of instructions) 134, Global Positioning System (GPS) module (or set of instructions) 135, and applications (or sets of instructions) 136. Furthermore, in some embodiments, memory 102 (FIG. 1A) or 370 (FIG. 3) stores device/global internal state 157, as shown in FIGS. 1A and 3. Device/global internal state 157 includes one or more of: active application state, indicating which applications, if any, are currently active; display state, indicating what applications, views or other information occupy various regions of touch screen display 112; sensor state, including information obtained from the device's various sensors and input control devices 116; and location information concerning the device's location and/or attitude.

**[0152]** Operating system 126 (e.g., Darwin, RTXC, LINUX, UNIX, OS X, iOS, WINDOWS, or an embedded operating system such as VxWorks) includes various software components and/or drivers for controlling and managing general system tasks (e.g., memory management, storage device control, power management, etc.) and facilitates communication between various hardware and software components.

**[0153]** Communication module 128 facilitates communication with other devices over one or more external ports 124 and also includes various software components for handling data received by RF circuitry 108 and/or external port 124. External port 124 (e.g., Universal Serial Bus (USB), FIREWIRE, etc.) is adapted for coupling directly to other devices or indirectly over a network (e.g., the Internet, wireless LAN, etc.). In some embodiments, the external port is a multi-pin (e.g., 30-pin) connector that is the same as, or similar to and/or compatible with, the 30-pin connector used on iPod® (trademark of Apple Inc.) devices.

**[0154]** Contact/motion module 130 optionally detects contact with touch screen 112 (in conjunction with display controller 156) and other touch-sensitive devices (e.g., a touchpad or physical click wheel). Contact/motion module 130 includes various software components for performing various operations related to detection of contact, such as determining if contact has occurred (e.g., detecting a finger-down event), determining an intensity of the contact (e.g., the

force or pressure of the contact or a substitute for the force or pressure of the contact), determining if there is movement of the contact and tracking the movement across the touch-sensitive surface (e.g., detecting one or more finger-dragging events), and determining if the contact has ceased (e.g., detecting a finger-up event or a break in contact). Contact/motion module 130 receives contact data from the touch-sensitive surface. Determining movement of the point of contact, which is represented by a series of contact data, optionally includes determining speed (magnitude), velocity (magnitude and direction), and/or an acceleration (a change in magnitude and/or direction) of the point of contact. These operations are, optionally, applied to single contacts (e.g., one finger contacts) or to multiple simultaneous contacts (e.g., “multitouch”/multiple finger contacts). In some embodiments, contact/motion module 130 and display controller 156 detect contact on a touchpad.

**[0155]** In some embodiments, contact/motion module 130 uses a set of one or more intensity thresholds to determine whether an operation has been performed by a user (e.g., to determine whether a user has “clicked” on an icon). In some embodiments, at least a subset of the intensity thresholds are determined in accordance with software parameters (e.g., the intensity thresholds are not determined by the activation thresholds of particular physical actuators and can be adjusted without changing the physical hardware of device 100). For example, a mouse “click” threshold of a trackpad or touch screen display can be set to any of a large range of predefined threshold values without changing the trackpad or touch screen display hardware. Additionally, in some implementations, a user of the device is provided with software settings for adjusting one or more of the set of intensity thresholds (e.g., by adjusting individual intensity thresholds and/or by adjusting a plurality of intensity thresholds at once with a system-level click “intensity” parameter).

**[0156]** Contact/motion module 130 optionally detects a gesture input by a user. Different gestures on the touch-sensitive surface have different contact patterns (e.g., different motions, timings, and/or intensities of detected contacts). Thus, a gesture is, optionally, detected by detecting a particular contact pattern. For example, detecting a finger tap gesture includes detecting a finger-down event followed by detecting a finger-up (liftoff) event at the same position (or substantially the same position) as the finger-down event (e.g., at the position of an icon). As another example, detecting a finger swipe gesture on the touch-sensitive surface

includes detecting a finger-down event followed by detecting one or more finger-dragging events, and subsequently followed by detecting a finger-up (liftoff) event.

**[0157]** Graphics module 132 includes various known software components for rendering and displaying graphics on touch screen 112 or other display, including components for changing the visual impact (e.g., brightness, transparency, saturation, contrast, or other visual property) of graphics that are displayed. As used herein, the term “graphics” includes any object that can be displayed to a user, including, without limitation, text, web pages, icons (such as user-interface objects including soft keys), digital images, videos, animations, and the like.

**[0158]** In some embodiments, graphics module 132 stores data representing graphics to be used. Each graphic is, optionally, assigned a corresponding code. Graphics module 132 receives, from applications etc., one or more codes specifying graphics to be displayed along with, if necessary, coordinate data and other graphic property data, and then generates screen image data to output to display controller 156.

**[0159]** Haptic feedback module 133 includes various software components for generating instructions used by tactile output generator(s) 167 to produce tactile outputs at one or more locations on device 100 in response to user interactions with device 100.

**[0160]** Text input module 134, which is, optionally, a component of graphics module 132, provides soft keyboards for entering text in various applications (e.g., contacts 137, e-mail 140, IM 141, browser 147, and any other application that needs text input).

**[0161]** GPS module 135 determines the location of the device and provides this information for use in various applications (e.g., to telephone 138 for use in location-based dialing; to camera 143 as picture/video metadata; and to applications that provide location-based services such as weather widgets, local yellow page widgets, and map/navigation widgets).

**[0162]** Applications 136 optionally include the following modules (or sets of instructions), or a subset or superset thereof:

- Contacts module 137 (sometimes called an address book or contact list);

- Telephone module 138;
- Video conference module 139;
- E-mail client module 140;
- Instant messaging (IM) module 141;
- 5 • Workout support module 142;
- Camera module 143 for still and/or video images;
- Image management module 144;
- Video player module;
- Music player module;
- 10 • Browser module 147;
- Calendar module 148;
- Widget modules 149, which optionally include one or more of: weather widget 149-1, stocks widget 149-2, calculator widget 149-3, alarm clock widget 149-4, dictionary widget 149-5, and other widgets obtained by the user, as well as user-created widgets
- 15 149-6;
- Widget creator module 150 for making user-created widgets 149-6;
- Search module 151;
- Video and music player module 152, which merges video player module and music player module;
- 20 • Notes module 153;
- Map module 154; and/or

- Online video module 155.

**[0163]** Examples of other applications 136 that are, optionally, stored in memory 102 include other word processing applications, other image editing applications, drawing applications, presentation applications, JAVA-enabled applications, encryption, digital rights management, voice recognition, and voice replication.

**[0164]** In conjunction with touch screen 112, display controller 156, contact/motion module 130, graphics module 132, and text input module 134, contacts module 137 are, optionally, used to manage an address book or contact list (e.g., stored in application internal state 192 of contacts module 137 in memory 102 or memory 370), including: adding name(s) to the address book; deleting name(s) from the address book; associating telephone number(s), e-mail address(es), physical address(es) or other information with a name; associating an image with a name; categorizing and sorting names; providing telephone numbers or e-mail addresses to initiate and/or facilitate communications by telephone 138, video conference module 139, e-mail 140, or IM 141; and so forth.

**[0165]** In conjunction with RF circuitry 108, audio circuitry 110, speaker 111, microphone 113, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, and text input module 134, telephone module 138 are optionally, used to enter a sequence of characters corresponding to a telephone number, access one or more telephone numbers in contacts module 137, modify a telephone number that has been entered, dial a respective telephone number, conduct a conversation, and disconnect or hang up when the conversation is completed. As noted above, the wireless communication optionally uses any of a plurality of communications standards, protocols, and technologies.

**[0166]** In conjunction with RF circuitry 108, audio circuitry 110, speaker 111, microphone 113, touch screen 112, display controller 156, optical sensor 164, optical sensor controller 158, contact/motion module 130, graphics module 132, text input module 134, contacts module 137, and telephone module 138, video conference module 139 includes executable instructions to initiate, conduct, and terminate a video conference between a user and one or more other participants in accordance with user instructions.

**[0167]** In conjunction with RF circuitry 108, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, and text input module 134, e-mail client module 140 includes executable instructions to create, send, receive, and manage e-mail in response to user instructions. In conjunction with image management module 144, e-mail client module 140 makes it very easy to create and send e-mails with still or video images taken with camera module 143.

**[0168]** In conjunction with RF circuitry 108, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, and text input module 134, the instant messaging module 141 includes executable instructions to enter a sequence of characters corresponding to an instant message, to modify previously entered characters, to transmit a respective instant message (for example, using a Short Message Service (SMS) or Multimedia Message Service (MMS) protocol for telephony-based instant messages or using XMPP, SIMPLE, or IMPS for Internet-based instant messages), to receive instant messages, and to view received instant messages. In some embodiments, transmitted and/or received instant messages optionally include graphics, photos, audio files, video files and/or other attachments as are supported in an MMS and/or an Enhanced Messaging Service (EMS). As used herein, “instant messaging” refers to both telephony-based messages (e.g., messages sent using SMS or MMS) and Internet-based messages (e.g., messages sent using XMPP, SIMPLE, or IMPS).

**[0169]** In conjunction with RF circuitry 108, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, text input module 134, GPS module 135, map module 154, and music player module, workout support module 142 includes executable instructions to create workouts (e.g., with time, distance, and/or calorie burning goals); communicate with workout sensors (sports devices); receive workout sensor data; calibrate sensors used to monitor a workout; select and play music for a workout; and display, store, and transmit workout data.

**[0170]** In conjunction with touch screen 112, display controller 156, optical sensor(s) 164, optical sensor controller 158, contact/motion module 130, graphics module 132, and image management module 144, camera module 143 includes executable instructions to capture still

images or video (including a video stream) and store them into memory 102, modify characteristics of a still image or video, or delete a still image or video from memory 102.

**[0171]** In conjunction with touch screen 112, display controller 156, contact/motion module 130, graphics module 132, text input module 134, and camera module 143, image management module 144 includes executable instructions to arrange, modify (e.g., edit), or otherwise  
5 manipulate, label, delete, present (e.g., in a digital slide show or album), and store still and/or video images.

**[0172]** In conjunction with RF circuitry 108, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, and text input module 134, browser module  
10 147 includes executable instructions to browse the Internet in accordance with user instructions, including searching, linking to, receiving, and displaying web pages or portions thereof, as well as attachments and other files linked to web pages.

**[0173]** In conjunction with RF circuitry 108, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, text input module 134, e-mail client module  
15 140, and browser module 147, calendar module 148 includes executable instructions to create, display, modify, and store calendars and data associated with calendars (e.g., calendar entries, to-do lists, etc.) in accordance with user instructions.

**[0174]** In conjunction with RF circuitry 108, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, text input module 134, and browser module  
20 147, widget modules 149 are mini-applications that are, optionally, downloaded and used by a user (e.g., weather widget 149-1, stocks widget 149-2, calculator widget 149-3, alarm clock widget 149-4, and dictionary widget 149-5) or created by the user (e.g., user-created widget 149-6). In some embodiments, a widget includes an HTML (Hypertext Markup Language) file, a CSS (Cascading Style Sheets) file, and a JavaScript file. In some embodiments, a widget  
25 includes an XML (Extensible Markup Language) file and a JavaScript file (e.g., Yahoo! Widgets).

**[0175]** In conjunction with RF circuitry 108, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, text input module 134, and browser module

147, the widget creator module 150 are, optionally, used by a user to create widgets (e.g., turning a user-specified portion of a web page into a widget).

**[0176]** In conjunction with touch screen 112, display controller 156, contact/motion module 130, graphics module 132, and text input module 134, search module 151 includes executable instructions to search for text, music, sound, image, video, and/or other files in memory 102 that match one or more search criteria (e.g., one or more user-specified search terms) in accordance with user instructions.

**[0177]** In conjunction with touch screen 112, display controller 156, contact/motion module 130, graphics module 132, audio circuitry 110, speaker 111, RF circuitry 108, and browser module 147, video and music player module 152 includes executable instructions that allow the user to download and play back recorded music and other sound files stored in one or more file formats, such as MP3 or AAC files, and executable instructions to display, present, or otherwise play back videos (e.g., on touch screen 112 or on an external, connected display via external port 124). In some embodiments, device 100 optionally includes the functionality of an MP3 player, such as an iPod (trademark of Apple Inc.).

**[0178]** In conjunction with touch screen 112, display controller 156, contact/motion module 130, graphics module 132, and text input module 134, notes module 153 includes executable instructions to create and manage notes, to-do lists, and the like in accordance with user instructions.

**[0179]** In conjunction with RF circuitry 108, touch screen 112, display controller 156, contact/motion module 130, graphics module 132, text input module 134, GPS module 135, and browser module 147, map module 154 are, optionally, used to receive, display, modify, and store maps and data associated with maps (e.g., driving directions, data on stores and other points of interest at or near a particular location, and other location-based data) in accordance with user instructions.

**[0180]** In conjunction with touch screen 112, display controller 156, contact/motion module 130, graphics module 132, audio circuitry 110, speaker 111, RF circuitry 108, text input module 134, e-mail client module 140, and browser module 147, online video module 155 includes



instructions that allow the user to access, browse, receive (e.g., by streaming and/or download), play back (e.g., on the touch screen or on an external, connected display via external port 124), send an e-mail with a link to a particular online video, and otherwise manage online videos in one or more file formats, such as H.264. In some embodiments, instant messaging module 141, rather than e-mail client module 140, is used to send a link to a particular online video.

Additional description of the online video application can be found in U.S. Provisional Patent Application No. 60/936,562, "Portable Multifunction Device, Method, and Graphical User Interface for Playing Online Videos," filed June 20, 2007, and U.S. Patent Application No. 11/968,067, "Portable Multifunction Device, Method, and Graphical User Interface for Playing Online Videos," filed December 31, 2007.

**[0181]** Each of the above-identified modules and applications corresponds to a set of executable instructions for performing one or more functions described above and the methods described in this application (e.g., the computer-implemented methods and other information processing methods described herein). These modules (e.g., sets of instructions) need not be implemented as separate software programs, procedures, or modules, and thus various subsets of these modules are, optionally, combined or otherwise rearranged in various embodiments. For example, video player module is, optionally, combined with music player module into a single module (e.g., video and music player module 152, FIG. 1A). In some embodiments, memory 102 optionally stores a subset of the modules and data structures identified above. Furthermore, memory 102 optionally stores additional modules and data structures not described above.

**[0182]** In some embodiments, device 100 is a device where operation of a predefined set of functions on the device is performed exclusively through a touch screen and/or a touchpad. By using a touch screen and/or a touchpad as the primary input control device for operation of device 100, the number of physical input control devices (such as push buttons, dials, and the like) on device 100 is, optionally, reduced.

**[0183]** The predefined set of functions that are performed exclusively through a touch screen and/or a touchpad optionally include navigation between user interfaces. In some embodiments, the touchpad, when touched by the user, navigates device 100 to a main, home, or root menu from any user interface that is displayed on device 100. In such embodiments, a "menu button"

is implemented using a touchpad. In some other embodiments, the menu button is a physical push button or other physical input control device instead of a touchpad.

**[0184]** FIG. 1B is a block diagram illustrating exemplary components for event handling in accordance with some embodiments. In some embodiments, memory 102 (FIG. 1A) or 370 (FIG. 3) includes event sorter 170 (e.g., in operating system 126) and a respective application 136-1 (e.g., any of the aforementioned applications 137-151, 155, 380-390).

**[0185]** Event sorter 170 receives event information and determines the application 136-1 and application view 191 of application 136-1 to which to deliver the event information. Event sorter 170 includes event monitor 171 and event dispatcher module 174. In some embodiments, application 136-1 includes application internal state 192, which indicates the current application view(s) displayed on touch-sensitive display 112 when the application is active or executing. In some embodiments, device/global internal state 157 is used by event sorter 170 to determine which application(s) is (are) currently active, and application internal state 192 is used by event sorter 170 to determine application views 191 to which to deliver event information.

**[0186]** In some embodiments, application internal state 192 includes additional information, such as one or more of: resume information to be used when application 136-1 resumes execution, user interface state information that indicates information being displayed or that is ready for display by application 136-1, a state queue for enabling the user to go back to a prior state or view of application 136-1, and a redo/undo queue of previous actions taken by the user.

**[0187]** Event monitor 171 receives event information from peripherals interface 118. Event information includes information about a sub-event (e.g., a user touch on touch-sensitive display 112, as part of a multi-touch gesture). Peripherals interface 118 transmits information it receives from I/O subsystem 106 or a sensor, such as proximity sensor 166, accelerometer(s) 168, and/or microphone 113 (through audio circuitry 110). Information that peripherals interface 118 receives from I/O subsystem 106 includes information from touch-sensitive display 112 or a touch-sensitive surface.

**[0188]** In some embodiments, event monitor 171 sends requests to the peripherals interface 118 at predetermined intervals. In response, peripherals interface 118 transmits event

information. In other embodiments, peripherals interface 118 transmits event information only when there is a significant event (e.g., receiving an input above a predetermined noise threshold and/or for more than a predetermined duration).

**[0189]** In some embodiments, event sorter 170 also includes a hit view determination module 172 and/or an active event recognizer determination module 173.

**[0190]** Hit view determination module 172 provides software procedures for determining where a sub-event has taken place within one or more views when touch-sensitive display 112 displays more than one view. Views are made up of controls and other elements that a user can see on the display.

**[0191]** Another aspect of the user interface associated with an application is a set of views, sometimes herein called application views or user interface windows, in which information is displayed and touch-based gestures occur. The application views (of a respective application) in which a touch is detected optionally correspond to programmatic levels within a programmatic or view hierarchy of the application. For example, the lowest level view in which a touch is detected is, optionally, called the hit view, and the set of events that are recognized as proper inputs are, optionally, determined based, at least in part, on the hit view of the initial touch that begins a touch-based gesture.

**[0192]** Hit view determination module 172 receives information related to sub-events of a touch-based gesture. When an application has multiple views organized in a hierarchy, hit view determination module 172 identifies a hit view as the lowest view in the hierarchy which should handle the sub-event. In most circumstances, the hit view is the lowest level view in which an initiating sub-event occurs (e.g., the first sub-event in the sequence of sub-events that form an event or potential event). Once the hit view is identified by the hit view determination module 172, the hit view typically receives all sub-events related to the same touch or input source for which it was identified as the hit view.

**[0193]** Active event recognizer determination module 173 determines which view or views within a view hierarchy should receive a particular sequence of sub-events. In some embodiments, active event recognizer determination module 173 determines that only the hit

view should receive a particular sequence of sub-events. In other embodiments, active event recognizer determination module 173 determines that all views that include the physical location of a sub-event are actively involved views, and therefore determines that all actively involved views should receive a particular sequence of sub-events. In other embodiments, even if touch sub-events were entirely confined to the area associated with one particular view, views higher in the hierarchy would still remain as actively involved views.

**[0194]** Event dispatcher module 174 dispatches the event information to an event recognizer (e.g., event recognizer 180). In embodiments including active event recognizer determination module 173, event dispatcher module 174 delivers the event information to an event recognizer determined by active event recognizer determination module 173. In some embodiments, event dispatcher module 174 stores in an event queue the event information, which is retrieved by a respective event receiver 182.

**[0195]** In some embodiments, operating system 126 includes event sorter 170. Alternatively, application 136-1 includes event sorter 170. In yet other embodiments, event sorter 170 is a stand-alone module, or a part of another module stored in memory 102, such as contact/motion module 130.

**[0196]** In some embodiments, application 136-1 includes a plurality of event handlers 190 and one or more application views 191, each of which includes instructions for handling touch events that occur within a respective view of the application's user interface. Each application view 191 of the application 136-1 includes one or more event recognizers 180. Typically, a respective application view 191 includes a plurality of event recognizers 180. In other embodiments, one or more of event recognizers 180 are part of a separate module, such as a user interface kit (not shown) or a higher level object from which application 136-1 inherits methods and other properties. In some embodiments, a respective event handler 190 includes one or more of: data updater 176, object updater 177, GUI updater 178, and/or event data 179 received from event sorter 170. Event handler 190 optionally utilizes or calls data updater 176, object updater 177, or GUI updater 178 to update the application internal state 192. Alternatively, one or more of the application views 191 include one or more respective event handlers 190. Also, in some

embodiments, one or more of data updater 176, object updater 177, and GUI updater 178 are included in a respective application view 191.

**[0197]** A respective event recognizer 180 receives event information (e.g., event data 179) from event sorter 170 and identifies an event from the event information. Event recognizer 180 includes event receiver 182 and event comparator 184. In some embodiments, event recognizer 180 also includes at least a subset of: metadata 183, and event delivery instructions 188 (which optionally include sub-event delivery instructions).

**[0198]** Event receiver 182 receives event information from event sorter 170. The event information includes information about a sub-event, for example, a touch or a touch movement.

Depending on the sub-event, the event information also includes additional information, such as location of the sub-event. When the sub-event concerns motion of a touch, the event information optionally also includes speed and direction of the sub-event. In some embodiments, events include rotation of the device from one orientation to another (e.g., from a portrait orientation to a landscape orientation, or vice versa), and the event information includes corresponding information about the current orientation (also called device attitude) of the device.

**[0199]** Event comparator 184 compares the event information to predefined event or sub-event definitions and, based on the comparison, determines an event or sub-event, or determines or updates the state of an event or sub-event. In some embodiments, event comparator 184 includes event definitions 186. Event definitions 186 contain definitions of events (e.g., predefined sequences of sub-events), for example, event 1 (187-1), event 2 (187-2), and others.

In some embodiments, sub-events in an event (187) include, for example, touch begin, touch end, touch movement, touch cancellation, and multiple touching. In one example, the definition for event 1 (187-1) is a double tap on a displayed object. The double tap, for example, comprises a first touch (touch begin) on the displayed object for a predetermined phase, a first liftoff (touch end) for a predetermined phase, a second touch (touch begin) on the displayed object for a predetermined phase, and a second liftoff (touch end) for a predetermined phase. In another example, the definition for event 2 (187-2) is a dragging on a displayed object. The dragging, for example, comprises a touch (or contact) on the displayed object for a predetermined phase, a movement of the touch across touch-sensitive display 112, and liftoff of the touch (touch end).

In some embodiments, the event also includes information for one or more associated event handlers 190.

**[0200]** In some embodiments, event definition 187 includes a definition of an event for a respective user-interface object. In some embodiments, event comparator 184 performs a hit test to determine which user-interface object is associated with a sub-event. For example, in an application view in which three user-interface objects are displayed on touch-sensitive display 112, when a touch is detected on touch-sensitive display 112, event comparator 184 performs a hit test to determine which of the three user-interface objects is associated with the touch (sub-event). If each displayed object is associated with a respective event handler 190, the event comparator uses the result of the hit test to determine which event handler 190 should be activated. For example, event comparator 184 selects an event handler associated with the sub-event and the object triggering the hit test.

**[0201]** In some embodiments, the definition for a respective event (187) also includes delayed actions that delay delivery of the event information until after it has been determined whether the sequence of sub-events does or does not correspond to the event recognizer's event type.

**[0202]** When a respective event recognizer 180 determines that the series of sub-events do not match any of the events in event definitions 186, the respective event recognizer 180 enters an event impossible, event failed, or event ended state, after which it disregards subsequent sub-events of the touch-based gesture. In this situation, other event recognizers, if any, that remain active for the hit view continue to track and process sub-events of an ongoing touch-based gesture.

**[0203]** In some embodiments, a respective event recognizer 180 includes metadata 183 with configurable properties, flags, and/or lists that indicate how the event delivery system should perform sub-event delivery to actively involved event recognizers. In some embodiments, metadata 183 includes configurable properties, flags, and/or lists that indicate how event recognizers interact, or are enabled to interact, with one another. In some embodiments, metadata 183 includes configurable properties, flags, and/or lists that indicate whether sub-events are delivered to varying levels in the view or programmatic hierarchy.

**[0204]** In some embodiments, a respective event recognizer 180 activates event handler 190 associated with an event when one or more particular sub-events of an event are recognized. In some embodiments, a respective event recognizer 180 delivers event information associated with the event to event handler 190. Activating an event handler 190 is distinct from sending (and  
5 deferred sending) sub-events to a respective hit view. In some embodiments, event recognizer 180 throws a flag associated with the recognized event, and event handler 190 associated with the flag catches the flag and performs a predefined process.

**[0205]** In some embodiments, event delivery instructions 188 include sub-event delivery instructions that deliver event information about a sub-event without activating an event handler.  
10 Instead, the sub-event delivery instructions deliver event information to event handlers associated with the series of sub-events or to actively involved views. Event handlers associated with the series of sub-events or with actively involved views receive the event information and perform a predetermined process.

**[0206]** In some embodiments, data updater 176 creates and updates data used in application  
15 136-1. For example, data updater 176 updates the telephone number used in contacts module 137, or stores a video file used in video player module. In some embodiments, object updater 177 creates and updates objects used in application 136-1. For example, object updater 177 creates a new user-interface object or updates the position of a user-interface object. GUI updater 178 updates the GUI. For example, GUI updater 178 prepares display information and  
20 sends it to graphics module 132 for display on a touch-sensitive display.

**[0207]** In some embodiments, event handler(s) 190 includes or has access to data updater 176, object updater 177, and GUI updater 178. In some embodiments, data updater 176, object updater 177, and GUI updater 178 are included in a single module of a respective application 136-1 or application view 191. In other embodiments, they are included in two or more software  
25 modules.

**[0208]** It shall be understood that the foregoing discussion regarding event handling of user touches on touch-sensitive displays also applies to other forms of user inputs to operate multifunction devices 100 with input devices, not all of which are initiated on touch screens. For example, mouse movement and mouse button presses, optionally coordinated with single or

multiple keyboard presses or holds; contact movements such as taps, drags, scrolls, etc. on touchpads; pen stylus inputs; movement of the device; oral instructions; detected eye movements; biometric inputs; and/or any combination thereof are optionally utilized as inputs corresponding to sub-events which define an event to be recognized.

5   **[0209]**     FIG. 2 illustrates a portable multifunction device 100 having a touch screen 112 in accordance with some embodiments. The touch screen optionally displays one or more graphics within user interface (UI) 200. In this embodiment, as well as others described below, a user is enabled to select one or more of the graphics by making a gesture on the graphics, for example, with one or more fingers 202 (not drawn to scale in the figure) or one or more styluses 203 (not  
10   drawn to scale in the figure). In some embodiments, selection of one or more graphics occurs when the user breaks contact with the one or more graphics. In some embodiments, the gesture optionally includes one or more taps, one or more swipes (from left to right, right to left, upward and/or downward), and/or a rolling of a finger (from right to left, left to right, upward and/or downward) that has made contact with device 100. In some implementations or circumstances,  
15   inadvertent contact with a graphic does not select the graphic. For example, a swipe gesture that sweeps over an application icon optionally does not select the corresponding application when the gesture corresponding to selection is a tap.

**[0210]**     Device 100 optionally also include one or more physical buttons, such as “home” or menu button 204. As described previously, menu button 204 is, optionally, used to navigate to  
20   any application 136 in a set of applications that are, optionally, executed on device 100. Alternatively, in some embodiments, the menu button is implemented as a soft key in a GUI displayed on touch screen 112.

**[0211]**     In some embodiments, device 100 includes touch screen 112, menu button 204, push button 206 for powering the device on/off and locking the device, volume adjustment button(s)  
25   208, subscriber identity module (SIM) card slot 210, headset jack 212, and docking/charging external port 124. Push button 206 is, optionally, used to turn the power on/off on the device by depressing the button and holding the button in the depressed state for a predefined time interval; to lock the device by depressing the button and releasing the button before the predefined time interval has elapsed; and/or to unlock the device or initiate an unlock process. In an alternative



embodiment, device 100 also accepts verbal input for activation or deactivation of some functions through microphone 113. Device 100 also, optionally, includes one or more contact intensity sensors 165 for detecting intensity of contacts on touch screen 112 and/or one or more tactile output generators 167 for generating tactile outputs for a user of device 100.

5   **[0212]**   FIG. 3 is a block diagram of an exemplary multifunction device with a display and a touch-sensitive surface in accordance with some embodiments. Device 300 need not be portable. In some embodiments, device 300 is a laptop computer, a desktop computer, a tablet computer, a multimedia player device, a navigation device, an educational device (such as a child's learning toy), a gaming system, or a control device (e.g., a home or industrial controller). Device 300

10 typically includes one or more processing units (CPUs) 310, one or more network or other communications interfaces 360, memory 370, and one or more communication buses 320 for interconnecting these components. Communication buses 320 optionally include circuitry (sometimes called a chipset) that interconnects and controls communications between system components. Device 300 includes input/output (I/O) interface 330 comprising display 340,

15 which is typically a touch screen display. I/O interface 330 also optionally includes a keyboard and/or mouse (or other pointing device) 350 and touchpad 355, tactile output generator 357 for generating tactile outputs on device 300 (e.g., similar to tactile output generator(s) 167 described above with reference to FIG. 1A), sensors 359 (e.g., optical, acceleration, proximity, touch-sensitive, and/or contact intensity sensors similar to contact intensity sensor(s) 165 described

20 above with reference to FIG. 1A). Memory 370 includes high-speed random access memory, such as DRAM, SRAM, DDR RAM, or other random access solid state memory devices; and optionally includes non-volatile memory, such as one or more magnetic disk storage devices, optical disk storage devices, flash memory devices, or other non-volatile solid state storage devices. Memory 370 optionally includes one or more storage devices remotely located from

25 CPU(s) 310. In some embodiments, memory 370 stores programs, modules, and data structures analogous to the programs, modules, and data structures stored in memory 102 of portable multifunction device 100 (FIG. 1A), or a subset thereof. Furthermore, memory 370 optionally stores additional programs, modules, and data structures not present in memory 102 of portable multifunction device 100. For example, memory 370 of device 300 optionally stores drawing

30 module 380, presentation module 382, word processing module 384, website creation module

386, disk authoring module 388, and/or spreadsheet module 390, while memory 102 of portable multifunction device 100 (FIG. 1A) optionally does not store these modules.

**[0213]** Each of the above-identified elements in FIG. 3 is, optionally, stored in one or more of the previously mentioned memory devices. Each of the above-identified modules corresponds to a set of instructions for performing a function described above. The above-identified modules or programs (e.g., sets of instructions) need not be implemented as separate software programs, procedures, or modules, and thus various subsets of these modules are, optionally, combined or otherwise rearranged in various embodiments. In some embodiments, memory 370 optionally stores a subset of the modules and data structures identified above. Furthermore, memory 370 optionally stores additional modules and data structures not described above.

**[0214]** Attention is now directed towards embodiments of user interfaces that are, optionally, implemented on, for example, portable multifunction device 100.

**[0215]** FIG. 4A illustrates an exemplary user interface for a menu of applications on portable multifunction device 100 in accordance with some embodiments. Similar user interfaces are, optionally, implemented on device 300. In some embodiments, user interface 400 includes the following elements, or a subset or superset thereof:

- Signal strength indicator(s) 402 for wireless communication(s), such as cellular and Wi-Fi signals;
- Time 404;
- Bluetooth indicator 405;
- Battery status indicator 406;
- Tray 408 with icons for frequently used applications, such as:
  - Icon 416 for telephone module 138, labeled “Phone,” which optionally includes an indicator 414 of the number of missed calls or voicemail messages;

- Icon 418 for e-mail client module 140, labeled “Mail,” which optionally includes an indicator 410 of the number of unread e-mails;
  - Icon 420 for browser module 147, labeled “Browser;” and
  - Icon 422 for video and music player module 152, also referred to as iPod (trademark of Apple Inc.) module 152, labeled “iPod;” and
- 5
- Icons for other applications, such as:
    - Icon 424 for IM module 141, labeled “Messages;”
    - Icon 426 for calendar module 148, labeled “Calendar;”
    - Icon 428 for image management module 144, labeled “Photos;”
    - Icon 430 for camera module 143, labeled “Camera;”
    - Icon 432 for online video module 155, labeled “Online Video;”
    - Icon 434 for stocks widget 149-2, labeled “Stocks;”
    - Icon 436 for map module 154, labeled “Maps;”
    - Icon 438 for weather widget 149-1, labeled “Weather;”
    - Icon 440 for alarm clock widget 149-4, labeled “Clock;”
    - Icon 442 for workout support module 142, labeled “Workout Support;”
    - Icon 444 for notes module 153, labeled “Notes;” and
    - Icon 446 for a settings application or module, labeled “Settings,” which provides access to settings for device 100 and its various applications 136.
- 10
- 15
- 20 **[0216]** It should be noted that the icon labels illustrated in FIG. 4A are merely exemplary. For example, icon 422 for video and music player module 152 is labeled “Music” or “Music Player.” Other labels are, optionally, used for various application icons. In some embodiments, a label for a respective application icon includes a name of an application corresponding to the respective application icon. In some embodiments, a label for a particular application icon is
- 25 distinct from a name of an application corresponding to the particular application icon.

**[0217]** FIG. 4B illustrates an exemplary user interface on a device (e.g., device 300, FIG. 3) with a touch-sensitive surface 451 (e.g., a tablet or touchpad 355, FIG. 3) that is separate from the display 450 (e.g., touch screen display 112). Device 300 also, optionally, includes one or more contact intensity sensors (e.g., one or more of sensors 359) for detecting intensity of contacts on touch-sensitive surface 451 and/or one or more tactile output generators 357 for generating tactile outputs for a user of device 300.

**[0218]** Although some of the examples that follow will be given with reference to inputs on touch screen display 112 (where the touch-sensitive surface and the display are combined), in some embodiments, the device detects inputs on a touch-sensitive surface that is separate from the display, as shown in FIG. 4B. In some embodiments, the touch-sensitive surface (e.g., 451 in FIG. 4B) has a primary axis (e.g., 452 in FIG. 4B) that corresponds to a primary axis (e.g., 453 in FIG. 4B) on the display (e.g., 450). In accordance with these embodiments, the device detects contacts (e.g., 460 and 462 in FIG. 4B) with the touch-sensitive surface 451 at locations that correspond to respective locations on the display (e.g., in FIG. 4B, 460 corresponds to 468 and 462 corresponds to 470). In this way, user inputs (e.g., contacts 460 and 462, and movements thereof) detected by the device on the touch-sensitive surface (e.g., 451 in FIG. 4B) are used by the device to manipulate the user interface on the display (e.g., 450 in FIG. 4B) of the multifunction device when the touch-sensitive surface is separate from the display. It should be understood that similar methods are, optionally, used for other user interfaces described herein.

**[0219]** Additionally, while the following examples are given primarily with reference to finger inputs (e.g., finger contacts, finger tap gestures, finger swipe gestures), it should be understood that, in some embodiments, one or more of the finger inputs are replaced with input from another input device (e.g., a mouse-based input or stylus input). For example, a swipe gesture is, optionally, replaced with a mouse click (e.g., instead of a contact) followed by movement of the cursor along the path of the swipe (e.g., instead of movement of the contact). As another example, a tap gesture is, optionally, replaced with a mouse click while the cursor is located over the location of the tap gesture (e.g., instead of detection of the contact followed by ceasing to detect the contact). Similarly, when multiple user inputs are simultaneously detected, it should be understood that multiple computer mice are, optionally, used simultaneously, or a mouse and finger contacts are, optionally, used simultaneously.

[0220] FIG. 5A illustrates exemplary personal electronic device 500. Device 500 includes body 502. In some embodiments, device 500 can include some or all of the features described with respect to devices 100 and 300 (e.g., FIGS. 1A-4B). In some embodiments, device 500 has touch-sensitive display screen 504, hereafter touch screen 504. Alternatively, or in addition to touch screen 504, device 500 has a display and a touch-sensitive surface. As with devices 100 and 300, in some embodiments, touch screen 504 (or the touch-sensitive surface) optionally includes one or more intensity sensors for detecting intensity of contacts (e.g., touches) being applied. The one or more intensity sensors of touch screen 504 (or the touch-sensitive surface) can provide output data that represents the intensity of touches. The user interface of device 500 can respond to touches based on their intensity, meaning that touches of different intensities can invoke different user interface operations on device 500.

[0221] Exemplary techniques for detecting and processing touch intensity are found, for example, in related applications: International Patent Application Serial No. PCT/US2013/040061, titled “Device, Method, and Graphical User Interface for Displaying User Interface Objects Corresponding to an Application,” filed May 8, 2013, published as WIPO Publication No. WO/2013/169849, and International Patent Application Serial No. PCT/US2013/069483, titled “Device, Method, and Graphical User Interface for Transitioning Between Touch Input to Display Output Relationships,” filed November 11, 2013, published as WIPO Publication No. WO/2014/105276.

[0222] In some embodiments, device 500 has one or more input mechanisms 506 and 508. Input mechanisms 506 and 508, if included, can be physical. Examples of physical input mechanisms include push buttons and rotatable mechanisms. In some embodiments, device 500 has one or more attachment mechanisms. Such attachment mechanisms, if included, can permit attachment of device 500 with, for example, hats, eyewear, earrings, necklaces, shirts, jackets, bracelets, watch straps, chains, trousers, belts, shoes, purses, backpacks, and so forth. These attachment mechanisms permit device 500 to be worn by a user.

[0223] FIG. 5B depicts exemplary personal electronic device 500. In some embodiments, device 500 can include some or all of the components described with respect to FIGS. 1A, 1B, and 3. Device 500 has bus 512 that operatively couples I/O section 514 with one or more

computer processors 516 and memory 518. I/O section 514 can be connected to display 504, which can have touch-sensitive component 522 and, optionally, intensity sensor 524 (e.g., contact intensity sensor). In addition, I/O section 514 can be connected with communication unit 530 for receiving application and operating system data, using Wi-Fi, Bluetooth, near field communication (NFC), cellular, and/or other wireless communication techniques. Device 500 can include input mechanisms 506 and/or 508. Input mechanism 506 is, optionally, a rotatable input device or a depressible and rotatable input device, for example. Input mechanism 508 is, optionally, a button, in some examples.

**[0224]** Input mechanism 508 is, optionally, a microphone, in some examples. Personal electronic device 500 optionally includes various sensors, such as GPS sensor 532, accelerometer 534, directional sensor 540 (e.g., compass), gyroscope 536, motion sensor 538, and/or a combination thereof, all of which can be operatively connected to I/O section 514.

**[0225]** Memory 518 of personal electronic device 500 can include one or more non-transitory computer-readable storage mediums, for storing computer-executable instructions, which, when executed by one or more computer processors 516, for example, can cause the computer processors to perform the techniques described below, including processes 700, 900, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 (FIGS. 7, 9, 11, 13, 15, 17, 18, 20, 22, 24, 26, 28, 30, and 32). A computer-readable storage medium can be any medium that can tangibly contain or store computer-executable instructions for use by or in connection with the instruction execution system, apparatus, or device. In some examples, the storage medium is a transitory computer-readable storage medium. In some examples, the storage medium is a non-transitory computer-readable storage medium. The non-transitory computer-readable storage medium can include, but is not limited to, magnetic, optical, and/or semiconductor storages. Examples of such storage include magnetic disks, optical discs based on CD, DVD, or Blu-ray technologies, as well as persistent solid-state memory such as flash, solid-state drives, and the like. Personal electronic device 500 is not limited to the components and configuration of FIG. 5B, but can include other or additional components in multiple configurations.

**[0226]** As used here, the term “affordance” refers to a user-interactive graphical user interface object that is, optionally, displayed on the display screen of devices 100, 300, and/or 500 (FIGS. 1A, 3, and 5A-5B). For example, an image (e.g., icon), a button, and text (e.g., hyperlink) each optionally constitute an affordance.

5 **[0227]** As used herein, the term “focus selector” refers to an input element that indicates a current part of a user interface with which a user is interacting. In some implementations that include a cursor or other location marker, the cursor acts as a “focus selector” so that when an input (e.g., a press input) is detected on a touch-sensitive surface (e.g., touchpad 355 in FIG. 3 or touch-sensitive surface 451 in FIG. 4B) while the cursor is over a particular user interface  
 10 element (e.g., a button, window, slider, or other user interface element), the particular user interface element is adjusted in accordance with the detected input. In some implementations that include a touch screen display (e.g., touch-sensitive display system 112 in FIG. 1A or touch screen 112 in FIG. 4A) that enables direct interaction with user interface elements on the touch screen display, a detected contact on the touch screen acts as a “focus selector” so that when an  
 15 input (e.g., a press input by the contact) is detected on the touch screen display at a location of a particular user interface element (e.g., a button, window, slider, or other user interface element), the particular user interface element is adjusted in accordance with the detected input. In some implementations, focus is moved from one region of a user interface to another region of the user interface without corresponding movement of a cursor or movement of a contact on a touch  
 20 screen display (e.g., by using a tab key or arrow keys to move focus from one button to another button); in these implementations, the focus selector moves in accordance with movement of focus between different regions of the user interface. Without regard to the specific form taken by the focus selector, the focus selector is generally the user interface element (or contact on a touch screen display) that is controlled by the user so as to communicate the user’s intended  
 25 interaction with the user interface (e.g., by indicating, to the device, the element of the user interface with which the user is intending to interact). For example, the location of a focus selector (e.g., a cursor, a contact, or a selection box) over a respective button while a press input is detected on the touch-sensitive surface (e.g., a touchpad or touch screen) will indicate that the user is intending to activate the respective button (as opposed to other user interface elements  
 30 shown on a display of the device).

[0228] As used in the specification and claims, the term “characteristic intensity” of a contact refers to a characteristic of the contact based on one or more intensities of the contact. In some embodiments, the characteristic intensity is based on multiple intensity samples. The characteristic intensity is, optionally, based on a predefined number of intensity samples, or a set of intensity samples collected during a predetermined time period (e.g., 0.05, 0.1, 0.2, 0.5, 1, 2, 5, 10 seconds) relative to a predefined event (e.g., after detecting the contact, prior to detecting liftoff of the contact, before or after detecting a start of movement of the contact, prior to detecting an end of the contact, before or after detecting an increase in intensity of the contact, and/or before or after detecting a decrease in intensity of the contact). A characteristic intensity of a contact is, optionally, based on one or more of: a maximum value of the intensities of the contact, a mean value of the intensities of the contact, an average value of the intensities of the contact, a top 10 percentile value of the intensities of the contact, a value at the half maximum of the intensities of the contact, a value at the 90 percent maximum of the intensities of the contact, or the like. In some embodiments, the duration of the contact is used in determining the characteristic intensity (e.g., when the characteristic intensity is an average of the intensity of the contact over time). In some embodiments, the characteristic intensity is compared to a set of one or more intensity thresholds to determine whether an operation has been performed by a user. For example, the set of one or more intensity thresholds optionally includes a first intensity threshold and a second intensity threshold. In this example, a contact with a characteristic intensity that does not exceed the first threshold results in a first operation, a contact with a characteristic intensity that exceeds the first intensity threshold and does not exceed the second intensity threshold results in a second operation, and a contact with a characteristic intensity that exceeds the second threshold results in a third operation. In some embodiments, a comparison between the characteristic intensity and one or more thresholds is used to determine whether or not to perform one or more operations (e.g., whether to perform a respective operation or forgo performing the respective operation), rather than being used to determine whether to perform a first operation or a second operation.

[0229] FIG. 5C illustrates detecting a plurality of contacts 552A-552E on touch-sensitive display screen 504 with a plurality of intensity sensors 524A-524D. FIG. 5C additionally includes intensity diagrams that show the current intensity measurements of the intensity sensors 524A-524D relative to units of intensity. In this example, the intensity measurements of



intensity sensors 524A and 524D are each 9 units of intensity, and the intensity measurements of intensity sensors 524B and 524C are each 7 units of intensity. In some implementations, an aggregate intensity is the sum of the intensity measurements of the plurality of intensity sensors 524A-524D, which in this example is 32 intensity units. In some embodiments, each contact is assigned a respective intensity that is a portion of the aggregate intensity. FIG. 5D illustrates assigning the aggregate intensity to contacts 552A-552E based on their distance from the center of force 554. In this example, each of contacts 552A, 552B, and 552E are assigned an intensity of contact of 8 intensity units of the aggregate intensity, and each of contacts 552C and 552D are assigned an intensity of contact of 4 intensity units of the aggregate intensity. More generally, in some implementations, each contact  $j$  is assigned a respective intensity  $I_j$  that is a portion of the aggregate intensity,  $A$ , in accordance with a predefined mathematical function,  $I_j = A \cdot (D_j / \sum D_i)$ , where  $D_j$  is the distance of the respective contact  $j$  to the center of force, and  $\sum D_i$  is the sum of the distances of all the respective contacts (e.g.,  $i=1$  to last) to the center of force. The operations described with reference to FIGS. 5C-5D can be performed using an electronic device similar or identical to device 100, 300, or 500. In some embodiments, a characteristic intensity of a contact is based on one or more intensities of the contact. In some embodiments, the intensity sensors are used to determine a single characteristic intensity (e.g., a single characteristic intensity of a single contact). It should be noted that the intensity diagrams are not part of a displayed user interface, but are included in FIGS. 5C-5D to aid the reader.

**[0230]** In some embodiments, a portion of a gesture is identified for purposes of determining a characteristic intensity. For example, a touch-sensitive surface optionally receives a continuous swipe contact transitioning from a start location and reaching an end location, at which point the intensity of the contact increases. In this example, the characteristic intensity of the contact at the end location is, optionally, based on only a portion of the continuous swipe contact, and not the entire swipe contact (e.g., only the portion of the swipe contact at the end location). In some embodiments, a smoothing algorithm is, optionally, applied to the intensities of the swipe contact prior to determining the characteristic intensity of the contact. For example, the smoothing algorithm optionally includes one or more of: an unweighted sliding-average smoothing algorithm, a triangular smoothing algorithm, a median filter smoothing algorithm, and/or an exponential smoothing algorithm. In some circumstances, these smoothing algorithms

eliminate narrow spikes or dips in the intensities of the swipe contact for purposes of determining a characteristic intensity.

[0231] The intensity of a contact on the touch-sensitive surface is, optionally, characterized relative to one or more intensity thresholds, such as a contact-detection intensity threshold, a light press intensity threshold, a deep press intensity threshold, and/or one or more other intensity thresholds. In some embodiments, the light press intensity threshold corresponds to an intensity at which the device will perform operations typically associated with clicking a button of a physical mouse or a trackpad. In some embodiments, the deep press intensity threshold corresponds to an intensity at which the device will perform operations that are different from operations typically associated with clicking a button of a physical mouse or a trackpad. In some embodiments, when a contact is detected with a characteristic intensity below the light press intensity threshold (e.g., and above a nominal contact-detection intensity threshold below which the contact is no longer detected), the device will move a focus selector in accordance with movement of the contact on the touch-sensitive surface without performing an operation associated with the light press intensity threshold or the deep press intensity threshold. Generally, unless otherwise stated, these intensity thresholds are consistent between different sets of user interface figures.

[0232] An increase of characteristic intensity of the contact from an intensity below the light press intensity threshold to an intensity between the light press intensity threshold and the deep press intensity threshold is sometimes referred to as a “light press” input. An increase of characteristic intensity of the contact from an intensity below the deep press intensity threshold to an intensity above the deep press intensity threshold is sometimes referred to as a “deep press” input. An increase of characteristic intensity of the contact from an intensity below the contact-detection intensity threshold to an intensity between the contact-detection intensity threshold and the light press intensity threshold is sometimes referred to as detecting the contact on the touch-surface. A decrease of characteristic intensity of the contact from an intensity above the contact-detection intensity threshold to an intensity below the contact-detection intensity threshold is sometimes referred to as detecting liftoff of the contact from the touch-surface. In some embodiments, the contact-detection intensity threshold is zero. In some embodiments, the contact-detection intensity threshold is greater than zero.

[0233] In some embodiments described herein, one or more operations are performed in response to detecting a gesture that includes a respective press input or in response to detecting the respective press input performed with a respective contact (or a plurality of contacts), where the respective press input is detected based at least in part on detecting an increase in intensity of the contact (or plurality of contacts) above a press-input intensity threshold. In some 5 embodiments, the respective operation is performed in response to detecting the increase in intensity of the respective contact above the press-input intensity threshold (e.g., a “down stroke” of the respective press input). In some embodiments, the press input includes an increase in intensity of the respective contact above the press-input intensity threshold and a subsequent 10 decrease in intensity of the contact below the press-input intensity threshold, and the respective operation is performed in response to detecting the subsequent decrease in intensity of the respective contact below the press-input threshold (e.g., an “up stroke” of the respective press input).

[0234] FIGS. 5E-5H illustrate detection of a gesture that includes a press input that 15 corresponds to an increase in intensity of a contact 562 from an intensity below a light press intensity threshold (e.g., “IT<sub>L</sub>”) in FIG. 5E, to an intensity above a deep press intensity threshold (e.g., “IT<sub>D</sub>”) in FIG. 5H. The gesture performed with contact 562 is detected on touch-sensitive surface 560 while cursor 576 is displayed over application icon 572B corresponding to App 2, on a displayed user interface 570 that includes application icons 572A-572D displayed in predefined 20 region 574. In some embodiments, the gesture is detected on touch-sensitive display 504. The intensity sensors detect the intensity of contacts on touch-sensitive surface 560. The device determines that the intensity of contact 562 peaked above the deep press intensity threshold (e.g., “IT<sub>D</sub>”). Contact 562 is maintained on touch-sensitive surface 560. In response to the detection of the gesture, and in accordance with contact 562 having an intensity that goes above the deep 25 press intensity threshold (e.g., “IT<sub>D</sub>”) during the gesture, reduced-scale representations 578A-578C (e.g., thumbnails) of recently opened documents for App 2 are displayed, as shown in FIGS. 5F-5H. In some embodiments, the intensity, which is compared to the one or more intensity thresholds, is the characteristic intensity of a contact. It should be noted that the intensity diagram for contact 562 is not part of a displayed user interface, but is included in 30 FIGS. 5E-5H to aid the reader.

[0235] In some embodiments, the display of representations 578A-578C includes an animation. For example, representation 578A is initially displayed in proximity of application icon 572B, as shown in FIG. 5F. As the animation proceeds, representation 578A moves upward and representation 578B is displayed in proximity of application icon 572B, as shown in FIG.

5 5G. Then, representations 578A moves upward, 578B moves upward toward representation 578A, and representation 578C is displayed in proximity of application icon 572B, as shown in FIG. 5H. Representations 578A-578C form an array above icon 572B. In some embodiments, the animation progresses in accordance with an intensity of contact 562, as shown in FIGS. 5F-5G, where the representations 578A-578C appear and move upwards as the intensity of contact  
10 562 increases toward the deep press intensity threshold (e.g., “IT<sub>D</sub>”). In some embodiments, the intensity, on which the progress of the animation is based, is the characteristic intensity of the contact. The operations described with reference to FIGS. 5E-5H can be performed using an electronic device similar or identical to device 100, 300, or 500.

[0236] In some embodiments, the device employs intensity hysteresis to avoid accidental  
15 inputs sometimes termed “jitter,” where the device defines or selects a hysteresis intensity threshold with a predefined relationship to the press-input intensity threshold (e.g., the hysteresis intensity threshold is X intensity units lower than the press-input intensity threshold or the hysteresis intensity threshold is 75%, 90%, or some reasonable proportion of the press-input intensity threshold). Thus, in some embodiments, the press input includes an increase in  
20 intensity of the respective contact above the press-input intensity threshold and a subsequent decrease in intensity of the contact below the hysteresis intensity threshold that corresponds to the press-input intensity threshold, and the respective operation is performed in response to detecting the subsequent decrease in intensity of the respective contact below the hysteresis intensity threshold (e.g., an “up stroke” of the respective press input). Similarly, in some  
25 embodiments, the press input is detected only when the device detects an increase in intensity of the contact from an intensity at or below the hysteresis intensity threshold to an intensity at or above the press-input intensity threshold and, optionally, a subsequent decrease in intensity of the contact to an intensity at or below the hysteresis intensity, and the respective operation is performed in response to detecting the press input (e.g., the increase in intensity of the contact or  
30 the decrease in intensity of the contact, depending on the circumstances).

[0237] For ease of explanation, the descriptions of operations performed in response to a press input associated with a press-input intensity threshold or in response to a gesture including the press input are, optionally, triggered in response to detecting either: an increase in intensity of a contact above the press-input intensity threshold, an increase in intensity of a contact from an intensity below the hysteresis intensity threshold to an intensity above the press-input intensity threshold, a decrease in intensity of the contact below the press-input intensity threshold, and/or a decrease in intensity of the contact below the hysteresis intensity threshold corresponding to the press-input intensity threshold. Additionally, in examples where an operation is described as being performed in response to detecting a decrease in intensity of a contact below the press-input intensity threshold, the operation is, optionally, performed in response to detecting a decrease in intensity of the contact below a hysteresis intensity threshold corresponding to, and lower than, the press-input intensity threshold.

[0238] FIG. 5I illustrates exemplary electronic device 580. Device 580 includes body 580A. In some embodiments, device 580 can include some or all of the features described with respect to devices 100, 300, and 500 (e.g., FIGS. 1A-5B). In some embodiments, device 580 has one or more speakers 580B (concealed in body 580A), one or more microphones 580C, one or more touch-sensitive surfaces 580D, and one or more displays 580E. Alternatively, or in addition to a display and touch-sensitive surface 580D, the device has a touch-sensitive display (also referred to as a touchscreen). As with devices 100, 300, and 500, in some embodiments, touch-sensitive surface 580D (or the touch screen) optionally includes one or more intensity sensors for detecting intensity of contacts (e.g., touches) being applied. The one or more intensity sensors of touch-sensitive surface 580D (or the touchscreen) can provide output data that represents the intensity of touches. The user interface of device 580 can respond to touches based on their intensity, meaning that touches of different intensities can invoke different user interface operations on device 580. In some embodiments, the one or more displays 580E are one or more light-emitting diodes (LEDs). For example, a display can be a single LED, an LED cluster (e.g., a red, a green, and a blue LED), a plurality of discrete LEDs, a plurality of discrete LED clusters, or other arrangement of one or more LEDs. For example, the display 580E can be an array of nine discrete LED clusters arranged in a circular shape (e.g., a ring). In some examples, the one or more displays are comprised of one or more of another type of light-emitting elements.

**[0239]** FIG. 5J depicts exemplary personal electronic device 580. In some embodiments, device 580 can include some or all of the components described with respect to FIGS. 1A, 1B, 3, and 5A-5B. Device 580 has bus 592 that operatively couples I/O section 594 with one or more computer processors 596 and memory 598. I/O section 594 can be connected to display 582, which can have touch-sensitive component 584 and, optionally, intensity sensor 585 (e.g., contact intensity sensor). In some embodiments, touch-sensitive component 584 is a separate component than display 582. In addition, I/O section 594 can be connected with communication unit 590 for receiving application and operating system data, using Wi-Fi, Bluetooth, near field communication (NFC), cellular, and/or other wireless communication techniques. Device 580 can include input mechanisms 588. Input mechanism 588 is, optionally, a button, in some examples. Input mechanism 588 is, optionally, a microphone, in some examples. Input mechanism 588 is, optionally, a plurality of microphones (e.g., a microphone array).

**[0240]** Electronic device 580 includes speaker 586 for outputting audio. Device 580 can include audio circuitry (e.g., in I/O section 594) that receives audio data, converts the audio data to an electrical signal, and transmits the electrical signal to speaker 586. Speaker 586 converts the electrical signal to human-audible sound waves. The audio circuitry (e.g., in I/O section 594) also receives electrical signals converted by a microphone (e.g., input mechanism 588) from sound waves. The audio circuitry (e.g., in I/O section 594) converts the electrical signal to audio data. Audio data is, optionally, retrieved from and/or transmitted to memory 598 and/or RF circuitry (e.g., in communication unit 590) by I/O section 594.

**[0241]** Memory 598 of personal electronic device 580 can include one or more non-transitory computer-readable storage mediums, for storing computer-executable instructions, which, when executed by one or more computer processors 596, for example, can cause the computer processors to perform the techniques described below, including processes 700, 900, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 (FIGS. 7, 9, 11, 13, 15, 17, 18, 20, 22, 24, 26, 28, 30, and 32). A computer-readable storage medium can be any medium that can tangibly contain or store computer-executable instructions for use by or in connection with the instruction execution system, apparatus, or device. In some examples, the storage medium is a transitory computer-readable storage medium. In some examples, the storage medium is a non-transitory computer-readable storage medium. The non-transitory

computer-readable storage medium can include, but is not limited to, magnetic, optical, and/or semiconductor storages. Examples of such storage include magnetic disks, optical discs based on CD, DVD, or Blu-ray technologies, as well as persistent solid-state memory such as flash, solid-state drives, and the like. Personal electronic device 580 is not limited to the components and configuration of FIG. 5J, but can include other or additional components in multiple configurations.

**[0242]** As used herein, an “installed application” refers to a software application that has been downloaded onto an electronic device (e.g., devices 100, 300, and/or 500) and is ready to be launched (e.g., become opened) on the device. In some embodiments, a downloaded application becomes an installed application by way of an installation program that extracts program portions from a downloaded package and integrates the extracted portions with the operating system of the computer system.

**[0243]** As used herein, the terms “open application” or “executing application” refer to a software application with retained state information (e.g., as part of device/global internal state 157 and/or application internal state 192). An open or executing application is, optionally, any one of the following types of applications:

- an active application, which is currently displayed on a display screen of the device that the application is being used on;
- a background application (or background processes), which is not currently displayed, but one or more processes for the application are being processed by one or more processors; and
- a suspended or hibernated application, which is not running, but has state information that is stored in memory (volatile and non-volatile, respectively) and that can be used to resume execution of the application.

**[0244]** As used herein, the term “closed application” refers to software applications without retained state information (e.g., state information for closed applications is not stored in a memory of the device). Accordingly, closing an application includes stopping and/or removing application processes for the application and removing state information for the application from

the memory of the device. Generally, opening a second application while in a first application does not close the first application. When the second application is displayed and the first application ceases to be displayed, the first application becomes a background application.

**[0245]** Attention is now directed towards embodiments of user interfaces (“UI”) and associated processes that are implemented on an electronic device, such as portable multifunction device 100, device 300, or device 500.

**[0246]** FIGS. 6A-6AR illustrate exemplary user interfaces for accessing media playback status of a plurality of available playback devices, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 7.

**[0247]** FIGS. 6A-6B illustrate exemplary user interfaces for managing and controlling a group of devices. In some embodiments, the group of devices includes devices that are placed throughout a user’s home to perform various functions. Such functions can include controlling smart devices (e.g., light bulbs, thermostats, media devices), configuring home automation, and controlling home entertainment.

**[0248]** FIG. 6A depicts home summary screen 601 (on display 602 of device 600), which represents an exemplary interface for a home control application (also referred to as a “device management application”) executing on device 600. In some embodiments, device 600 includes one or more features of device 100, 300, or 500. An example of a home control application is “Home” (by Apple Inc., of Cupertino, California, USA). The home summary screen 601 includes scenes (e.g., pre-configured collection of settings for one more home devices) that have been stored, as well as an indication of devices in the user’s home (also referred to as “home devices” or the like). The home devices are represented by indicators 601A-601C. Indicator 601A corresponds to the device named “Smart Speaker 1” in the room “Living Room”. Indicator 601B corresponds to the device named “Smart Speaker 2” in the room “Kitchen”. Indicator 601C corresponds to the device named “Smart Bulb” in the room “Bedroom”. Exemplary interfaces and techniques for a home control application described in U.S. Patent Application 62/349,057, “User Interface for Managing Controllable External Devices,” filed June 12, 2016.



[0249] FIG. 6A also depicts exemplary home configuration screen 603, which illustrates an exemplary interface for managing configuration settings associated with the home devices

represented in home summary screen 601. In some examples, device 600 displays home configuration screen 603 in response to user input selection of affordance 601D at home

summary screen 601. At home configuration screen 603, a user can edit the name of the home (“Home” in this example), edit the members of a home (e.g., Users 1, 2, and 3 in this example),

include notes to other members, among other functions. As can be seen, the “Home” in this

example includes three members, User 1 (represented by indicator 603A), User 2 (represented by indicator 603B), and User 3 (represented by indicator 603C). In some examples, Users 1-3

represent users that live in the location that physically includes the home devices, collectively referred to as the “Home”. Thus, Users 1-3 are members of the home. Being a member of a

home (or other location), in some examples, provides the users with permission to control

devices associated with the home. The users can control the home devices using one or more personal devices associated with at least one of the users. In some examples, a device is

associated with a user when it is logged into an account associated with (e.g., owned by) the

user. For example, devices that are logged into one or more user accounts associated with

exemplary Users 1-3 described above are associated with at least one user, and specifically, at

least one user of the Home (e.g., home devices).

[0250] FIG. 6B depicts exemplary user interfaces of a portable electronic device 600.

Device home screen 605, displayed on display 602, is an exemplary default home screen of

device 600. Device home screen 605 includes affordances associated with applications stored on the device. For example, affordance 605A corresponds to a music application. Selection of

affordance 605A, in some examples, causes the device to display a user interface of the

corresponding music application. FIG. 6B also depicts exemplary user input 604, received by

device 600 while displaying screen 603. In this example, user input 604 is a swipe gesture (e.g., touch input followed by a drag) on a touch-sensitive display 602 of device 600. In the example

depicted in FIG. 6B, the user input 604 is a swipe gesture from an edge of the touch-sensitive

display 602. In some embodiments, user input 604 is an arcuate swipe gesture. For example, an arcuate swipe gesture is a gesture that includes both a horizontal component (e.g., x-direction)

and a vertical component (e.g., y-direction) that satisfy arcuate criteria. For instance, user input

604 can be a touch and drag on a touch-sensitive surface that traces the form of a quarter-circle. In response to input 604, device 600 displays a Control Center interface (e.g., FIG. 6C and 6D).

**[0251]** FIG. 6C illustrates an exemplary control center interface. Control center interface 606 includes various affordances for controlling various functions and/or components of device 600. In the example depicted, control center interface 606 includes exemplary illustrations of: a media control interface 606A, a volume control interface 606C, a screen brightness control interface 606D, a camera affordance 606E, a calculator affordance 606F, a timer affordance 606G, a flashlight affordance 606H, a wireless media streaming affordance 606I, a screen rotation lock affordance 606J, a do not disturb affordance 606K, wireless antenna control interface 606L. Exemplary media control interface 606A includes media playback controls 606M (e.g., previous track, pause/play, next track) and a device selection affordance 606B. Exemplary wireless antenna control affordances 606L includes an affordance 606N for toggling (e.g., turning on and turning off) a Wi-Fi function of device 600.

**[0252]** FIG. 6D illustrates another exemplary Control Center interface 606 when device 600 is playing back media through an external device. As shown in FIG. 6D, the device selection affordance 606B includes an indication that the media that is currently being played back (e.g., the song track “Same Thing” by the artist “Jambug”) is being played back through an external device (or devices) named “AirPods”. Thus, the media control interface 606A indicates the media currently being played (otherwise referred to as being played back, currently playing back, or the like) as well as the device on which the audio output is being routed. In this case, the audio output is generated by wireless personal earbuds ( “AirPods” by Apple Inc. of Cupertino, California USA). FIG. 6D also shows volume control affordance 606C including an indicator 606M representative of the “AirPods” device, indicating that the volume control affordance 606C can be used to adjust the volume of the audio output of the external device “AirPods”.

**[0253]** FIG. 6E illustrates the exemplary Control Center interface, as shown in FIG. 6C, but with a user input 608A on device selection affordance 606B. In some embodiments, device 600 displays a multi-device interface (e.g., as shown in FIG. 6J) in response to receiving user input 608A. For example, user input 608A is a touch on the device selection affordance (e.g., also referred to as a “tap” or a “press”).

**[0254]** FIG. 6F illustrates the exemplary Control Center interface, as shown in FIG. 6C, but with a user input 608B at a location on the media control interface 606A. In some embodiments, device 600 displays a multi-device interface (e.g., as shown in FIG. 6J) in response to receiving user input 608B. In some examples, user input 608B is a deep press (e.g., a touch having a characteristic intensity that meets an intensity-dependent criteria). In some examples, an intensity-dependent criteria is whether a characteristic intensity of a touch exceeds a threshold intensity. In some examples, user input 608B is a tap and hold (e.g., a touch input that is continuously detected on a touch-sensitive surface of device 600 for greater than a threshold length of time). In some examples, the user input 608B (e.g., whether a deep press, or a tap and hold input) can be received at any location (e.g., completely or partially within) on media control interface 606A. For example, in response to receiving the user input 606B on a playback control affordance (e.g., 606M), the device 600 performs an operation different than it would had the user input been a tap (e.g., the device 600 performs a second operation, rather than a playback control operation such as pausing playback).

**[0255]** FIG. 6G illustrates an exemplary expanded media control interface for a device. In some embodiments, device 600 displays expanded media control interface 609 of FIG. 6G in response to receiving user input 608B. As shown, the expanded media control interface 609 includes an indicator 609A representing media that is currently being played back on the device 600. In this example, the device 600 is named “iPhone” and is currently playing the media track “Same Thing” by the artist “Jambug”. Indicator 609A includes a graphic to the left of the track name, representing an album cover associated with the media track. The graphic included in the indicator 609A, in some examples, can be any graphic that is associated with a media track or that can otherwise provide a visual representation of the currently playing media. For example, other appropriate graphic indicators include, but are not limited to, an artist photo, an album cover, a movie cover, a movie poster, a stylized depiction of text, or the like. The exemplary expanded media control interface 609 includes a media progress indicator 609B (e.g., depicting temporal progress through the media track (time elapsed), and the amount of time until the end of the current media (time remaining)). Exemplary expanded media control interface 609 also includes playback control affordances 609C (e.g., that function similar or the same to those described above), volume control affordance 609D (e.g., that function similar or the same to those described above), and a device selection affordance 609E.

[0256] FIGS. 6H-6N illustrate exemplary multi-device interfaces in accordance with some embodiments. FIG. 6H depicts an exemplary multi-device interface 610 that includes affordances 610B-610D for the current device 600. In some embodiments, device 600 displays multi-device interface 610 in response to receiving user input 608A. In some embodiments,  
 5 device 600 displays multi-device interface 610 in response to receiving user input 608B.

[0257] As shown in FIG. 6H, multi-device interface 610 includes, as described above regarding expanded media control interface 609, an indicator 610A representing media (that is currently being played back on the device 600, which is named “iPhone”), a media progress indicator 610B (e.g., depicting temporal progress through the media track (time elapsed), and the  
 10 amount of time until the end of the current media (time remaining)). Exemplary multi-device interface 610 also includes playback control affordances 610C (e.g., that function similar or the same to those described above), volume control affordance 610D (e.g., that function similar or the same to those described above), and a device selection affordance 610E. In contrast to the expanded media control interface 609 of FIG. 6G, multi-device interface 610 provides the user  
 15 with information on the media playback status of multiple devices, as well as the ability to affect the same.

[0258] As shown in FIG. 6H, multi-device interface 610 also includes indicators associated with other playback devices. Indicator 610F corresponds to the one or more devices that are named (or in a set of devices named) “Living Room”. In some embodiments, a set of devices  
 20 can include one or more devices. The set of devices can be assigned the name “Living Room” based on their location within the user’s home. For example, when configuring (e.g., using device 600 and a home control application) the one or more devices in the set named Living Room (e.g., before first use), the name “Living Room” is assigned to the one or more devices in the set. Thus, when selecting or viewing the playback status of devices throughout the home, the  
 25 user is provided an intuitive identification of the set of devices by location. In some embodiments, the name of a device or a device set is a default name. For example, if a device is not configured by a user to have a specific name, the device can simply be named “Device 1” or “Device 1 – Living Room” if the location is associated (e.g., by a user or automatically). In some embodiments, the name of a device or a device set is a user-configured name. For  
 30 example, the user selects a name from a predefined set of names. In some examples, the name

displayed for a device (e.g., in a multi-device interface) is the location of the device. For example, a device can be named (e.g., in a configuration setting or a home control application) “Tim’s Speaker” but appear as “Tim’s Room” based on a location associated with the device. In some embodiments, a set of devices is a custom name. For example, the user can assign

5 personalized names to device sets, such as “Tim’s Room”. In some embodiments, a name other than a location name is used. For example, the user can give a set of devices an arbitrary name.

**[0259]** In this example, the set of devices named Living Room and represented by indicator 610F are currently playing back the media item titled “Heart Wave” by the artist “MKTS”, which are indicated inside of indicator 610F. In some embodiments, a media item is one or more

10 of a song, a video, a podcast, an audio stream, a video stream, an audio file, a video file, an e-book (e.g., also referred to as an electronic book), a text document, a webpage, a phone call, a video call, or the like. Indicator 610G corresponds to the set of devices named or included in the set named “Bedroom”, which are currently playing back the song titled “Vibes” by artist “John Appleseed”. In some embodiments, an indicator for a set of devices (e.g., indicator 610F and

15 610G) is displayed (e.g., in a multi-device interface) even when the corresponding set of devices is not currently playing back media. In some embodiments, an indicator for a set of devices (e.g., indicator 610F and 610G) is displayed (e.g., in a multi-device interface) even when fewer than all devices in the corresponding set of devices are currently playing back media. For example, if the set of Living Room devices includes three devices (e.g., three smart speaker

20 devices, such as device 580), and only one of the devices is currently playing a media item (e.g., “Heart Wave” by “MKTS”), the corresponding indicator in the multi-device interface still includes an identification of currently playing back media (e.g., “Heart Wave” by “MKTS” is displayed inside of indicator 610F for the device set “Living Room”).

**[0260]** In some embodiments, if individual devices of the set of devices are concurrently

25 playing back different media items, the multi-device interface displays an indication that multiple media items are playing on the devices of a set of devices. For example, the multi-device interface can include a single indicator for the set (e.g., 610F) and an identification that multiple media items are being played back on those devices (e.g., “1 movie, 1 song”). For example, the multi-device interface can include two indicators (e.g., 610F) for the set and an

30 identification of each respective media item being played back (e.g., an indicator like 610F for

each media item, both identified as “Living Room”, or identified as “Living Room – Device 1” and “Living Room – Device 2”).

- [0261]** A set of devices can also be referred to as a set of “available playback devices”. In some embodiments, available playback devices include one or more (e.g., remote, external) devices on which a current device (e.g., device 600) can control or affect playback (e.g., using a multi-device interface such as 610). For example, as shown in FIG. 6H, if the set of devices named Living Room includes three external devices (e.g., 580 of FIG. 5I) that are connected to device 600 via a communication link (e.g., Bluetooth, Wi-Fi, or the like), and can be controlled by instructions issued by device 600 (e.g., representing user input), the devices in the set named Living Room are “available playback devices”. In some embodiments, affecting or controlling playback on an available playback device is subject to conditions or restrictions. For example, device 600 can see the devices in the Living Room represented by indicator 610F, but modifying the playback status of those devices can be subject to permission (e.g., if the media being played back on the Living Room devices was initiated by another device or user). In some embodiments, available playback devices include the current device. For example, in the example of the Living Room including three devices, a plurality of available devices includes device 600 as well as the three living room devices, for a total of at least four devices. Thus, multi-device interface 610 provides a convenient interface that provides an indication of what is currently playing on the current device, as well as on other devices.
- [0262]** In some embodiments, one or more devices automatically detect another device. In some embodiments, the devices then form a network between themselves. For example, two devices (e.g., 580) can detect each other after booting up for the first time (e.g., straight out of the box, without configuration by a user), establish a connection link between themselves (e.g., and between device 600), and appear in a multi-device interface (e.g., with a name such as “Speaker 1”, and/or a location such as “No Location”). In some embodiments, the device (e.g., 580) is configured to part of a user’s home (e.g., the home devices). One of skill in the art will appreciate that a variety of techniques can be used to interconnect and/or transmit information between devices (e.g., 580, 600), which are all intended to be within the scope of this disclosure, and thus additional details are not included here.

**[0263]** In FIG. 6I, device 600 receives user input 612 representing selection of device selection affordance 610E. For example, user input 612 can be a tap or touch on a location associated with the displayed device selection affordance 610E.

**[0264]** FIG. 6J illustrates an exemplary multi-device user interface, in accordance with some embodiments. In some embodiments, device 600 displays multi-device interface 610 in response to receiving user input 608B. In some embodiments, device 600 displays multi-device interface 610 in response to receiving user input 612. In some examples, a multi-device interface is displayed in response to selection of a device selection affordance (e.g., 610E of FIG. 6I) in any media application.

**[0265]** As shown in FIG. 6J, multi-device interface 610 includes individual indicators 610H-610O for each device of the available playback devices. In the depicted example, the individual indicators are visually associated with the indicator 610A (which identifies the media item “Same Thing” by “Jambug”, as well as the devices currently playing back the media, in this case only the device named “iPhone”). Indicator 610H identifies the current device (named “iPhone”) and includes the selection indicator 610I. In this example, selection indicator 610I includes a checkmark, which indicates that the device 610H is currently playing back the media of indicator 610A. Indicator 610J identifies the set of devices named “Bedroom” and includes indicator 610K, which does not include a checkmark (e.g., the Bedroom set of devices is not currently playing back the media track “Same Thing” by “Jambug”). Indicator 610J also includes an indication that the Bedroom set of devices are currently playing back other media. For example, in FIG. 6J, the indicator 610J includes the title of the track “Vibes”. The visual indication communicates to the user that the Bedroom devices set is currently busy. If the user wishes to add the Bedroom device set to the current playback of “Same Thing” by “Jambug” (e.g., by selecting indicator 610K), doing so would interrupt media that is currently playing in the Bedroom. Indicator 610L identifies the set of devices named “Kitchen” and includes indicator 610M, which does not include a checkmark (e.g., the Kitchen set of devices is not currently playing back the media track “Same Thing” by “Jambug”). Indicator 610N identifies the set of devices named “Living Room” and includes indicator 610O, which does not include a checkmark (e.g., the Living Room set of devices is not currently playing back the media track “Same Thing” by “Jambug”). Indicator 610N also includes an indication that the Living Room

set of devices are currently playing back other media. For example, in FIG. 6J, the indicator 610J includes the title of the track “Vibes”.

[0266] As shown in FIG. 6J, the individual indicators are visually associated with the indicator 610A. As can be seen, the individual indicators 610H-610O are included within the box outline of indicator 610A. In some examples, this provides a visual indication that the multi-device interface is currently “targeted” or “focused” on the “media session” identified by indicator 610A. In some embodiments, a media session includes a device and a media item. In the example shown in FIG. 6J, indicator 610A represents a media session that includes the media item “Same Thing” by “Jambug”, and the device “iPhone” (e.g., device 600). In some  
 5  
 10  
 15  
 20  
 25  
 30  
 35  
 40  
 45  
 50  
 55  
 60  
 65  
 70  
 75  
 80  
 85  
 90  
 95  
 100  
 105  
 110  
 115  
 120  
 125  
 130  
 135  
 140  
 145  
 150  
 155  
 160  
 165  
 170  
 175  
 180  
 185  
 190  
 195  
 200  
 205  
 210  
 215  
 220  
 225  
 230  
 235  
 240  
 245  
 250  
 255  
 260  
 265  
 270  
 275  
 280  
 285  
 290  
 295  
 300  
 305  
 310  
 315  
 320  
 325  
 330  
 335  
 340  
 345  
 350  
 355  
 360  
 365  
 370  
 375  
 380  
 385  
 390  
 395  
 400  
 405  
 410  
 415  
 420  
 425  
 430  
 435  
 440  
 445  
 450  
 455  
 460  
 465  
 470  
 475  
 480  
 485  
 490  
 495  
 500  
 505  
 510  
 515  
 520  
 525  
 530  
 535  
 540  
 545  
 550  
 555  
 560  
 565  
 570  
 575  
 580  
 585  
 590  
 595  
 600  
 605  
 610  
 615  
 620  
 625  
 630  
 635  
 640  
 645  
 650  
 655  
 660  
 665  
 670  
 675  
 680  
 685  
 690  
 695  
 700  
 705  
 710  
 715  
 720  
 725  
 730  
 735  
 740  
 745  
 750  
 755  
 760  
 765  
 770  
 775  
 780  
 785  
 790  
 795  
 800  
 805  
 810  
 815  
 820  
 825  
 830  
 835  
 840  
 845  
 850  
 855  
 860  
 865  
 870  
 875  
 880  
 885  
 890  
 895  
 900  
 905  
 910  
 915  
 920  
 925  
 930  
 935  
 940  
 945  
 950  
 955  
 960  
 965  
 970  
 975  
 980  
 985  
 990  
 995  
 1000  
 1005  
 1010  
 1015  
 1020  
 1025  
 1030  
 1035  
 1040  
 1045  
 1050  
 1055  
 1060  
 1065  
 1070  
 1075  
 1080  
 1085  
 1090  
 1095  
 1100  
 1105  
 1110  
 1115  
 1120  
 1125  
 1130  
 1135  
 1140  
 1145  
 1150  
 1155  
 1160  
 1165  
 1170  
 1175  
 1180  
 1185  
 1190  
 1195  
 1200  
 1205  
 1210  
 1215  
 1220  
 1225  
 1230  
 1235  
 1240  
 1245  
 1250  
 1255  
 1260  
 1265  
 1270  
 1275  
 1280  
 1285  
 1290  
 1295  
 1300  
 1305  
 1310  
 1315  
 1320  
 1325  
 1330  
 1335  
 1340  
 1345  
 1350  
 1355  
 1360  
 1365  
 1370  
 1375  
 1380  
 1385  
 1390  
 1395  
 1400  
 1405  
 1410  
 1415  
 1420  
 1425  
 1430  
 1435  
 1440  
 1445  
 1450  
 1455  
 1460  
 1465  
 1470  
 1475  
 1480  
 1485  
 1490  
 1495  
 1500  
 1505  
 1510  
 1515  
 1520  
 1525  
 1530  
 1535  
 1540  
 1545  
 1550  
 1555  
 1560  
 1565  
 1570  
 1575  
 1580  
 1585  
 1590  
 1595  
 1600  
 1605  
 1610  
 1615  
 1620  
 1625  
 1630  
 1635  
 1640  
 1645  
 1650  
 1655  
 1660  
 1665  
 1670  
 1675  
 1680  
 1685  
 1690  
 1695  
 1700  
 1705  
 1710  
 1715  
 1720  
 1725  
 1730  
 1735  
 1740  
 1745  
 1750  
 1755  
 1760  
 1765  
 1770  
 1775  
 1780  
 1785  
 1790  
 1795  
 1800  
 1805  
 1810  
 1815  
 1820  
 1825  
 1830  
 1835  
 1840  
 1845  
 1850  
 1855  
 1860  
 1865  
 1870  
 1875  
 1880  
 1885  
 1890  
 1895  
 1900  
 1905  
 1910  
 1915  
 1920  
 1925  
 1930  
 1935  
 1940  
 1945  
 1950  
 1955  
 1960  
 1965  
 1970  
 1975  
 1980  
 1985  
 1990  
 1995  
 2000  
 2005  
 2010  
 2015  
 2020  
 2025  
 2030  
 2035  
 2040  
 2045  
 2050  
 2055  
 2060  
 2065  
 2070  
 2075  
 2080  
 2085  
 2090  
 2095  
 2100  
 2105  
 2110  
 2115  
 2120  
 2125  
 2130  
 2135  
 2140  
 2145  
 2150  
 2155  
 2160  
 2165  
 2170  
 2175  
 2180  
 2185  
 2190  
 2195  
 2200  
 2205  
 2210  
 2215  
 2220  
 2225  
 2230  
 2235  
 2240  
 2245  
 2250  
 2255  
 2260  
 2265  
 2270  
 2275  
 2280  
 2285  
 2290  
 2295  
 2300  
 2305  
 2310  
 2315  
 2320  
 2325  
 2330  
 2335  
 2340  
 2345  
 2350  
 2355  
 2360  
 2365  
 2370  
 2375  
 2380  
 2385  
 2390  
 2395  
 2400  
 2405  
 2410  
 2415  
 2420  
 2425  
 2430  
 2435  
 2440  
 2445  
 2450  
 2455  
 2460  
 2465  
 2470  
 2475  
 2480  
 2485  
 2490  
 2495  
 2500  
 2505  
 2510  
 2515  
 2520  
 2525  
 2530  
 2535  
 2540  
 2545  
 2550  
 2555  
 2560  
 2565  
 2570  
 2575  
 2580  
 2585  
 2590  
 2595  
 2600  
 2605  
 2610  
 2615  
 2620  
 2625  
 2630  
 2635  
 2640  
 2645  
 2650  
 2655  
 2660  
 2665  
 2670  
 2675  
 2680  
 2685  
 2690  
 2695  
 2700  
 2705  
 2710  
 2715  
 2720  
 2725  
 2730  
 2735  
 2740  
 2745  
 2750  
 2755  
 2760  
 2765  
 2770  
 2775  
 2780  
 2785  
 2790  
 2795  
 2800  
 2805  
 2810  
 2815  
 2820  
 2825  
 2830  
 2835  
 2840  
 2845  
 2850  
 2855  
 2860  
 2865  
 2870  
 2875  
 2880  
 2885  
 2890  
 2895  
 2900  
 2905  
 2910  
 2915  
 2920  
 2925  
 2930  
 2935  
 2940  
 2945  
 2950  
 2955  
 2960  
 2965  
 2970  
 2975  
 2980  
 2985  
 2990  
 2995  
 3000  
 3005  
 3010  
 3015  
 3020  
 3025  
 3030  
 3035  
 3040  
 3045  
 3050  
 3055  
 3060  
 3065  
 3070  
 3075  
 3080  
 3085  
 3090  
 3095  
 3100  
 3105  
 3110  
 3115  
 3120  
 3125  
 3130  
 3135  
 3140  
 3145  
 3150  
 3155  
 3160  
 3165  
 3170  
 3175  
 3180  
 3185  
 3190  
 3195  
 3200  
 3205  
 3210  
 3215  
 3220  
 3225  
 3230  
 3235  
 3240  
 3245  
 3250  
 3255  
 3260  
 3265  
 3270  
 3275  
 3280  
 3285  
 3290  
 3295  
 3300  
 3305  
 3310  
 3315  
 3320  
 3325  
 3330  
 3335  
 3340  
 3345  
 3350  
 3355  
 3360  
 3365  
 3370  
 3375  
 3380  
 3385  
 3390  
 3395  
 3400  
 3405  
 3410  
 3415  
 3420  
 3425  
 3430  
 3435  
 3440  
 3445  
 3450  
 3455  
 3460  
 3465  
 3470  
 3475  
 3480  
 3485  
 3490  
 3495  
 3500  
 3505  
 3510  
 3515  
 3520  
 3525  
 3530  
 3535  
 3540  
 3545  
 3550  
 3555  
 3560  
 3565  
 3570  
 3575  
 3580  
 3585  
 3590  
 3595  
 3600  
 3605  
 3610  
 3615  
 3620  
 3625  
 3630  
 3635  
 3640  
 3645  
 3650  
 3655  
 3660  
 3665  
 3670  
 3675  
 3680  
 3685  
 3690  
 3695  
 3700  
 3705  
 3710  
 3715  
 3720  
 3725  
 3730  
 3735  
 3740  
 3745  
 3750  
 3755  
 3760  
 3765  
 3770  
 3775  
 3780  
 3785  
 3790  
 3795  
 3800  
 3805  
 3810  
 3815  
 3820  
 3825  
 3830  
 3835  
 3840  
 3845  
 3850  
 3855  
 3860  
 3865  
 3870  
 3875  
 3880  
 3885  
 3890  
 3895  
 3900  
 3905  
 3910  
 3915  
 3920  
 3925  
 3930  
 3935  
 3940  
 3945  
 3950  
 3955  
 3960  
 3965  
 3970  
 3975  
 3980  
 3985  
 3990  
 3995  
 4000  
 4005  
 4010  
 4015  
 4020  
 4025  
 4030  
 4035  
 4040  
 4045  
 4050  
 4055  
 4060  
 4065  
 4070  
 4075  
 4080  
 4085  
 4090  
 4095  
 4100  
 4105  
 4110  
 4115  
 4120  
 4125  
 4130  
 4135  
 4140  
 4145  
 4150  
 4155  
 4160  
 4165  
 4170  
 4175  
 4180  
 4185  
 4190  
 4195  
 4200  
 4205  
 4210  
 4215  
 4220  
 4225  
 4230  
 4235  
 4240  
 4245  
 4250  
 4255  
 4260  
 4265  
 4270  
 4275  
 4280  
 4285  
 4290  
 4295  
 4300  
 4305  
 4310  
 4315  
 4320  
 4325  
 4330  
 4335  
 4340  
 4345  
 4350  
 4355  
 4360  
 4365  
 4370  
 4375  
 4380  
 4385  
 4390  
 4395  
 4400  
 4405  
 4410  
 4415  
 4420  
 4425  
 4430  
 4435  
 4440  
 4445  
 4450  
 4455  
 4460  
 4465  
 4470  
 4475  
 4480  
 4485  
 4490  
 4495  
 4500  
 4505  
 4510  
 4515  
 4520  
 4525  
 4530  
 4535  
 4540  
 4545  
 4550  
 4555  
 4560  
 4565  
 4570  
 4575  
 4580  
 4585  
 4590  
 4595  
 4600  
 4605  
 4610  
 4615  
 4620  
 4625  
 4630  
 4635  
 4640  
 4645  
 4650  
 4655  
 4660  
 4665  
 4670  
 4675  
 4680  
 4685  
 4690  
 4695  
 4700  
 4705  
 4710  
 4715  
 4720  
 4725  
 4730  
 4735  
 4740  
 4745  
 4750  
 4755  
 4760  
 4765  
 4770  
 4775  
 4780  
 4785  
 4790  
 4795  
 4800  
 4805  
 4810  
 4815  
 4820  
 4825  
 4830  
 4835  
 4840  
 4845  
 4850  
 4855  
 4860  
 4865  
 4870  
 4875  
 4880  
 4885  
 4890  
 4895  
 4900  
 4905  
 4910  
 4915  
 4920  
 4925  
 4930  
 4935  
 4940  
 4945  
 4950  
 4955  
 4960  
 4965  
 4970  
 4975  
 4980  
 4985  
 4990  
 4995  
 5000  
 5005  
 5010  
 5015  
 5020  
 5025  
 5030  
 5035  
 5040  
 5045  
 5050  
 5055  
 5060  
 5065  
 5070  
 5075  
 5080  
 5085  
 5090  
 5095  
 5100  
 5105  
 5110  
 5115  
 5120  
 5125  
 5130  
 5135  
 5140  
 5145  
 5150  
 5155  
 5160  
 5165  
 5170  
 5175  
 5180  
 5185  
 5190  
 5195  
 5200  
 5205  
 5210  
 5215  
 5220  
 5225  
 5230  
 5235  
 5240  
 5245  
 5250  
 5255  
 5260  
 5265  
 5270  
 5275  
 5280  
 5285  
 5290  
 5295  
 5300  
 5305  
 5310  
 5315  
 5320  
 5325  
 5330  
 5335  
 5340  
 5345  
 5350  
 5355  
 5360  
 5365  
 5370  
 5375  
 5380  
 5385  
 5390  
 5395  
 5400  
 5405  
 5410  
 5415  
 5420  
 5425  
 5430  
 5435  
 5440  
 5445  
 5450  
 5455  
 5460  
 5465  
 5470  
 5475  
 5480  
 5485  
 5490  
 5495  
 5500  
 5505  
 5510  
 5515  
 5520  
 5525  
 5530  
 5535  
 5540  
 5545  
 5550  
 5555  
 5560  
 5565  
 5570  
 5575  
 5580  
 5585  
 5590  
 5595  
 5600  
 5605  
 5610  
 5615  
 5620  
 5625  
 5630  
 5635  
 5640  
 5645  
 5650  
 5655  
 5660  
 5665  
 5670  
 5675  
 5680  
 5685  
 5690  
 5695  
 5700  
 5705  
 5710  
 5715  
 5720  
 5725  
 5730  
 5735  
 5740  
 5745  
 5750  
 5755  
 5760  
 5765  
 5770  
 5775  
 5780  
 5785  
 5790  
 5795  
 5800  
 5805  
 5810  
 5815  
 5820  
 5825  
 5830  
 5835  
 5840  
 5845  
 5850  
 5855  
 5860  
 5865  
 5870  
 5875  
 5880  
 5885  
 5890  
 5895  
 5900  
 5905  
 5910  
 5915  
 5920  
 5925  
 5930  
 5935  
 5940  
 5945  
 5950  
 5955  
 5960  
 5965  
 5970  
 5975  
 5980  
 5985  
 5990  
 5995  
 6000  
 6005  
 6010  
 6015  
 6020  
 6025  
 6030  
 6035  
 6040  
 6045  
 6050  
 6055  
 6060  
 6065  
 6070  
 6075  
 6080  
 6085  
 6090  
 6095  
 6100  
 6105  
 6110  
 6115  
 6120  
 6125  
 6130  
 6135  
 6140  
 6145  
 6150  
 6155  
 6160  
 6165  
 6170  
 6175  
 6180  
 6185  
 6190  
 6195  
 6200  
 6205  
 6210  
 6215  
 6220  
 6225  
 6230  
 6235  
 6240  
 6245  
 6250  
 6255  
 6260  
 6265  
 6270  
 6275  
 6280  
 6285  
 6290  
 6295  
 6300  
 6305  
 6310  
 6315  
 6320  
 6325  
 6330  
 6335  
 6340  
 6345  
 6350  
 6355  
 6360  
 6365  
 6370  
 6375  
 6380  
 6385  
 6390  
 6395  
 6400  
 6405  
 6410  
 6415  
 6420  
 6425  
 6430  
 6435  
 6440  
 6445  
 6450  
 6455  
 6460  
 6465  
 6470  
 6475  
 6480  
 6485  
 6490  
 6495  
 6500  
 6505  
 6510  
 6515  
 6520  
 6525  
 6530  
 6535  
 6540  
 6545  
 6550  
 6555  
 6560  
 6565  
 6570  
 6575  
 6580  
 6585  
 6590  
 6595  
 6600  
 6605  
 6610  
 6615  
 6620  
 6625  
 6630  
 6635  
 6640  
 6645  
 6650  
 6655  
 6660  
 6665  
 6670  
 6675  
 6680  
 6685  
 6690  
 6695  
 6700  
 6705  
 6710  
 6715  
 6720  
 6725  
 6730  
 6735  
 6740  
 6745  
 6750  
 6755  
 6760  
 6765  
 6770  
 6775  
 6780  
 6785  
 6790  
 6795  
 6800  
 6805  
 6810  
 6815  
 6820  
 6825  
 68



being displayed (and, for example, the media playback control affordances are again displayed). In some examples, if the device 600 received selection of one or more individual indicators 610K, 610M, or 610O (e.g., user input that causes device 600 to display checkmarks inside of the indicators), selection of affordance 610R causes the device 600, in response, to initiate media playback on the corresponding selected devices. In some embodiments, device 600 initiates playback in response to the selection of one or more individual indicators 610K, 610M, or 610O.

**[0270]** FIG. 6K illustrates device 600 receiving selection of an individual indicator for a device of the available playback devices. User input 614 is received on indicator 610, associated with the Kitchen set of devices (represented by 610L). In some examples, user input 614 is a tap or touch on a location associated with indicator 610M. In some examples, user input 614 is a deep press on a location associated with indicator 610M.

**[0271]** FIG. 6L illustrates an exemplary multi-device interface 610 after receiving selection (e.g., user input 614) of an individual indicator for a device of the available playback devices. As can be seen in FIG. 6L, the indicator 610A now includes an indication (“Kitchen + iPhone”) that the current media session includes the Kitchen set of devices and the device named iPhone (e.g., device 600). Further, indicator 610L has been updated to include an individual volume control affordance, and indicator 610M now includes a checkmark. In some examples, the Kitchen device set is added to the current media session of indicator 610A in response to user input selection of their associated indicator 610M. In some examples, an additional user input (e.g., user input 615) on affordance 610R causes the Kitchen devices to be added to the current media session of indicator 610A.

**[0272]** FIG. 6M-6N illustrate switching between media sessions using an exemplary multi-device interface when. In FIG. 6M, multi-device interface 610 is shown, with a first media session associated with indicator 610A (e.g., playback of “Same Thing” by artists “Jambug” on the device “iPhone”). As shown in FIG. 6M, device 600 receives user input 616 associated with indicator 610F, which is associated with a second media session (e.g., playback of “Heart Wave” by artists “MKTS” on the “Living Room” set of devices). In some examples, user input 616 is a tap or touch at a location associated with indicator 610F. In some examples, user input 616 is a deep press at a location associated with indicator 610F.

**[0273]** In some embodiments, in response to user input 616, the device 600 updates the display of the multi-device interface to “focus” (also referred to as “target”) the second media session. For example, FIG. 6N depicts indicator 610A, associated with the first media session, as minimized (e.g., with no visually associated indicators for individual available playback devices or media playback controls). However, indicator 610F has been expanded to include individual indicators for each device of the plurality of available playback devices. Alternatively, or in addition, an expanded indicator for a media session (e.g., indicator 610F of FIG. 6N) can include media playback control affordances. As shown in FIG. 6N, indicators 610H, 610J, 610L, and 610N are now visually associated with indicator 610F for the second media session on the Living Room set of devices. Notably, indicators 610M and 610O now include checkmarks, indicating that they are part of the currently-selected media session (e.g., associated with the expanded indicator 610F).

**[0274]** Switching between media sessions can be referred to as “retargeting”, “targeting”, “refocusing”, “focusing”, or the like. Thus, the selection of indicator 610F can be referred to as “focusing” the current device 600 or “focusing” the multi-device interface 610 on a set of devices or a media session.

**[0275]** As shown above with respect to FIGS. 6H to 6N, a multi-device interface can be used to view a media playback status of a plurality of available playback devices. Additionally, a multi-device interface can be used to view what each device in a set of available playback devices is currently playing back. Further, individual devices can be added or removed from a media session using the multi-device interface. In addition to the examples shown in FIGS. 6H to 6N, other exemplary techniques for invoking and interacting with the multi-device interface can be used, as described below.

**[0276]** FIGS. 6O-6Y illustrate exemplary techniques for interacting with a multi-device user interface, in accordance with some embodiments. FIGS. 6O-6R illustrate an exemplary technique for initiating playback directly onto one or more dynamically-selected external devices. FIG. 6O illustrates an exemplary browsing interface. Browsing interface 620 depicts an interface for browsing media items. For example, a user can use a browsing interface to find and select one or more media items for playback. Exemplary browsing interfaces include

interfaces for browsing a music library, a video library, media content available for streaming, or the like. In this example, the browsing interface 620 is a music browsing interface. Indicator 620A shows that the device is displaying a list of media items (e.g., a playlist) titled “New Music”. Media item 620B (also referred to as song 620B) is a song titled “Monday Morning” by artist “The Fomoers”.

[0277] In FIG. 6P, device 600 receives user input 622 on song 620B. In some examples, user input representing selection of a media item (e.g., a tap on a song) causes playback of the song to initiate on the current device. For example, if device 600 is currently only “targeting” itself, then a tap on a media item causes playback to initiate on device 600. For further example, if device 600 is currently targeting itself and the device set “Living Room”, then a tap on a media item causes playback to initiate on device 600 and the set of devices named “Living Room”. In some examples, a deep press user input or a tap and hold user input on a media item causes device 600 to perform a secondary operation (e.g., other than immediately initiate playback of the corresponding media item on the targeted device or devices). In some examples, the secondary operation allows, before playback of the corresponding media is initiated, selection of one or more devices that the user would like to initiate media playback on. In this way, the user can begin playback directly on the desired set of devices, without needing to first initiate playback on a current device (e.g., device 600) and then transfer playback to one or more external devices (e.g., through a cumbersome arrangement of interfaces). One of the drawbacks of first initiating playback on the current device (e.g., a personal device) and then transferring playback to other devices (e.g., a home theater system) is that by the time media playback is initiated on the desired set of devices, the media item has already begun playing on the device—if playing back for a room full of listeners, such a scenario is undesirable. Even if playback is restarted (manually or automatically) in response to or after transferring playback to the desired set of devices, the original device that initiated playback will have wasted device resources by starting the playback of the song when such operation was not desired by the user. In some examples, a tap input invokes the primary operation, and a deep press or a tap and hold input invokes the secondary operation. One of skill in the art would recognize that any two user inputs, recognizable by a device as different types of user input, can be used to invoke respective primary and secondary operations.

**[0278]** FIG. 6Q illustrates an exemplary media item menu. For example, media item menu 624 is displayed in response to user input 622, which is a deep press or a tap and hold input (e.g., invoking a secondary operation on a media item). Menu 624 includes a list of possible actions that can be selected for the media item 620B (the song titled “Monday Morning” by “The Fomoers”). Media item menu 624 includes play to speaker affordance 624A. In FIG. 6R, device 600 receives user input 626 on the play to speaker affordance 624A. For example, user input 626 is a tap. In some examples, in response to receiving the user input 626 representing selection of the play to speaker affordance 624A, device 600 displays a multi-device interface (e.g., similar to multi-device interface 610 of FIG. 6J) for selecting one or more desired devices to initiate playback on. For example, a multi-device interface can be displayed that includes an indicator (e.g., 610A) for a media session that includes the media item “Monday Morning” by “The Fomoers” and no selected devices (e.g., no devices with indicators that include checkmarks). In this example, after selection of the one or more desired devices (e.g., to add them to the media session), playback is then initiated on the desired devices (e.g., device 600 initiates playback on itself and/or transmits an instruction to other devices in the set of desired devices). In this example, a user input (e.g., 622) associated with a media item is used to invoke a multi-device interface (e.g., 610) so that one or more external devices can be selected before device 600 initiates playback of the media. Thus, device 600 initiates playback of the media item (e.g., “Monday Morning” as shown in FIG. 6P) from the beginning (e.g., from the start of the song) on the selected one or more external devices, rather than first initiating playback on device 600 and then subsequently transferring playback (e.g., during playback).

**[0279]** FIGS. 6S-6Y illustrate exemplary techniques for providing an indication of a device’s focus. FIG. 6S illustrates an exemplary current media interface. Current media interface 630 (also referred to as a “now playing interface”) identifies a media item that is currently being played back. Current media interface 630 includes album art 630A, media identifier 630B (song title “Same Thing”), media identifier 630C (artist “Jambug”), media identifier 630D (album “Fly Away”), and device selection affordance 630E. As shown in FIG. 6S, the device selection affordance 630E does not include an identifier for another device. Thus, in this example, the media item identified in the current media interface 630A is currently playing back on the current device, device 600. In some examples, the media identified by the currently media

interface is currently being played back on other devices (e.g., in addition to the current device, or a set that excludes the current device).

**[0280]** At FIG. 6T, device 600 receives user input 632 on device selection affordance 630E. In response to receiving user input 632, at FIG. 6U the device displays multi-device interface 610. As can be seen in FIG. 6U, a first region 611A (e.g., shown bordered by a first dotted line pattern, for illustration purposes) of the display includes the multi-device interface 610, and a second region 611B (e.g., shown bordered by a second dotted line pattern, for illustration purposes) of the display includes a visible indication of the content displayed prior to displaying the multi-device interface. In this case, the content displayed prior to displaying the multi-device interface is the current media interface 630. For example, the album art 630A is visible through the multi-device interface. In this example, the first region is visually overlaid on the second region.

**[0281]** At FIG. 6V, device 600 receives a user input 634 on indicator 610F. In some examples, user input 634 is a tap or touch at a location associated with indicator 610F. In some examples, user input 634 is a deep press at a location associated with indicator 610F.

**[0282]** As shown in as shown in FIG. 6W, in some examples, in response to user input 634, device 600 displays multi-device interface 610 with the indicator 610F expanded to shown individual indicators for devices in the set of available playback devices as visually associated with indicator 610F. Thus, device 600 is now focused on the media session that includes the device set Living Room. As can be seen, current media interface 636 (described below) is visible (through the multi-device interface 610) in FIG. 6W. Notably, as seen in FIG. 6W, in response to input 634, device 600 ceases to display the visual indications associated with current media interface 630 and displays, instead, visual indications associated with current media interface 636. This is substitution of current media interfaces is indicative of the device changing the targeted media session from the session associated with indicator 610A to the session associated with indicator 610F (FIG. 6U).

**[0283]** As shown in as shown in FIG. 6X, in some examples, in response to user input 634, device 600 ceases displaying multi-device interface 610 and displays the current media interface 636. Thus, FIG. 6X illustrates an alternative response by device 600 to receiving user input 634.

Current media interface 636, similar to interface 630, includes album art 636A, media identifier 636B (song title “Heart Wave”), media identifier 636C (artist “MKTS”), media identifier 636D (album “MKTS”), and device selection affordance 636E. However, each of the indicators has been updated to reflect that the media item and devices of the selected media session has changed (e.g., because device 600 is now targeted to a media session that includes a different set of devices). Notably, device selection affordance 636E includes an identifier 636F, which identifies the currently targeted device. As shown in FIG. 6X, identifier 636F includes the text “Living Room” indicating that the current media interface 636 is a current media interface for media currently playing back on the set of devices named Living Room.

**[0284]** A user may desire to view the media status of the plurality of devices within their home at any time, even while viewing an interface for a non-media related application on their device. Thus, a technique for accessing a multi-device interface easily and quickly from any application executing on a device is described herein. FIGS. 6Y-6AA illustrate an exemplary technique for accessing a multi-device interface, in accordance with some embodiments. FIG. 6Y illustrates an exemplary interface for an application. Web browsing interface 640 depicts a currently displayed web browsing session (e.g., a home page of the website “Apple.com”). The web browsing interface 640 includes webpage content 640A. At FIG. 6Z, device 600 receives a user input 642. In some examples, user input 642 is a swipe gesture from an edge of a touch-sensitive surface of device 600. In some examples, in response to user input 642, device 600 displays a playback control interface. For example, in response to user input 642, device 600 displays playback control interface 606A of FIG. 6C. In some embodiments, in response to receiving user input 608A on device selection affordance 606B at playback control interface 606A, device 600 displays a multi-device interface (e.g., 610 of FIG. 6AA).

**[0285]** FIG. 6AA illustrates an exemplary multi-device interface visually overlaid on an application interface. As shown in FIG. 6AA, multi-device interface 610 includes individual indicators for available playback devices. In the example depicted in FIG. 6AA, there is only one media session currently active on available devices in the user’s home—which includes the playback of “Same Thing” by “Jambug” on the current device 600. In some examples, the multi-device interface is concurrently displayed with previously-displayed content. For example, as

shown in FIG. 6AA, the multi-device interface 610 is visually overlaid (e.g., displayed in a first region) over the web browsing interface 640 (e.g., displayed in a second region).

[0286] FIGS. 6AB-6AC illustrate exemplary techniques for adjusting a volume of available playback devices. FIG. 6AB depicts multi-device interface 610 with a single media session that includes playback of the media item “Same Thing” by “Jambug” on three devices: “iPhone” (e.g., device 600), the Kitchen set of devices, and the Living Room set of devices. FIG. 6AB depicts individual volume control affordance 610S (corresponding to the device iPhone), individual volume control affordance 610T (corresponding to the device set Kitchen), individual volume control affordance 610U (corresponding to the device set Living Room). For example, individual volume control affordances are selectable and can be manipulated (e.g., left and right) in order to adjust volume of the respective corresponding device. In some examples, an individual volume control affordance is not displayed for devices that are not included in the current media session (e.g., the device Bedroom in FIG. 6AB does not correspond to a displayed individual volume control affordance). FIG. 6AB also depicts a group volume control affordance 610D, which is selectable and can be manipulated (e.g., left and right) in order to adjust volume of the plurality of devices included the media session represented by indicator 610A. For example, at FIG. 6AB, device 600 receives user input 644 on group volume control affordance 610D, which represents a tap and slide gesture in a leftward direction (e.g., representing a request to lower the volume). In response to the user input 644, the device lowers the group volume as represented by the location of the sliding affordance 610D, as shown in FIG. 6AC. FIG. 6AC also illustrates that the individual volume control affordances for each device in the group have been correspondingly lowered.

[0287] FIGS. 6AD-6AG illustrate exemplary interfaces for initiating playback on a preferred device. In certain instances, a user may desire to initiate playback of media automatically at one or more preferred devices. For example, because media content can include a visual aspect (e.g., if the media is a video), it can be desirable to automatically initiate playback of such content on a device with a display, or on a device with a large display (e.g., larger than the device that receives the user input request to initiate playback). For example, the user may browse for media content using their personal device (e.g., device 600) that has a relatively small screen, but desire that playback of a selected media item (e.g., a feature-length film) begin on their large-screen

television. In other examples, the user may request playback of media via voice commands to a device (e.g., device 580) that does not have video playback capabilities. In this latter example, the device without the video playback capability is able to receive the user's request, but hands off video playback responsibility to another device.

5   **[0288]**     Turning to the figures, FIG. 6AD illustrates an exemplary browsing interface. As shown in FIG. 6AD, media browsing interface 650 includes a media item with video content. In this example, media item 650A represents an episode of a television show named "Super Heroes". At FIG. 6AE, the device 600 receives user input 652 associated with media item 650A. In some examples, user input 652 is a tap or touch on media item 650A. In some examples, user  
10   input 652 is a deep press on media item 650A.

**[0289]**     In response to receiving the user input 652, device 600 displays message interface 654 in FIG. 6AF. Message interface 654 includes an indication that playback of the video content is or has been initiated on a different device ("Beginning playback on Apple TV") that is not device 600. In this example, the device named "Apple TV" is different than device 600, and  
15   represents a preferred device for playback of video media. For example, the device Apple TV can be connected to the user's large-screen TV. In some embodiments, in response to the user input (e.g., user input 652) the device (e.g., 600) determines whether it is currently connected to a home network. In accordance with a determination that the device is currently connected to the home network, the device initiates (e.g., transmits an instruction to initiate) playback on the  
20   preferred device. For example, if the device determines that the user is home, it forgoes initiating playback on itself, and initiates playback on the external preferred device. In accordance with a determination that the device is not currently connected to the home network, the device initiates playback on itself. For example, if the device determines that the user is not home, it initiates playback on itself. In some examples, the preferred device is a set of preferred  
25   devices (e.g., one or more). In some examples, a preferred device (or set of devices) is predetermined. For example, a preferred device can be selected by the user and saved into device or user account settings. In another example, a preferred device is automatically selected. For example, if the user's home only includes one recognized video capable external device (e.g., an Apple TV), it may be designated as the preferred device. In some embodiments, the  
30   device prompts the user whether to initiate playback on a preferred device. For example,



regardless of whether a preferred device has been preconfigured by the user, the device 600 may prompt (e.g., visually or audibly) and ask “Would you like to initiate playback of “Super Heroes” on your Apple TV?” in response to user input 652.

**[0290]** FIG. 6AG illustrates an exemplary playback control interface for video content.

5 Playback control interface 656 includes an indication 656A of the currently playing media content (“Super Heroes”), playback control affordances 656B (e.g., rewind 10 seconds, pause, and skip 10 seconds), and an indication 656C of the device currently playing back the media content (“Apple TV”). In some embodiments, interface 656 is displayed subsequent to message interface 654.

10 **[0291]** FIGS. 6AH-6AQ illustrate exemplary multi-device interfaces. As described herein, a multi-device interface can be used to view and control media playback status of a plurality of available playback devices throughout a set of interconnected devices (e.g., devices in a user’s home and associated with the user’s account). Thus, a plurality of different types of devices can be controlled and each device can have a different interface. For example, the set of devices in a  
 15 home can comprise a first smart speaker (e.g., 580) made by a first manufacturer, a second smart speaker (e.g., 580) made by a second manufacturer different than the first, and home media hub (e.g., an Apple TV by Apple Inc. of Cupertino, California USA). An exemplary home media hub can include or otherwise be connected to a large display (e.g., larger than the display of personal device 600), and thus can have an identical, a similar, or a different interface than those  
 20 described above with respect to device 600. Additional exemplary interfaces are described in detail below.

**[0292]** FIG. 6AH illustrates an exemplary current media interface 664, displayed on display 660A of device 660. In some embodiments, device 660 includes one or more features of device 100, 300, or 500. Device 660 is itself a device included in the set of devices associated with the  
 25 user’s home (or is otherwise configured to act as a display for a device included in the set of devices associated with the user’s home). Current media interface 664 includes a device selection affordance 664A (e.g., that functions similar or the same as device selection affordance 630E of FIG. 6S). Device selection affordance 664A is associated with the text “Living Room Apple TV”, which indicates that the device 660 is currently targeted at itself, device 660.

Current media interface 664 also includes an indication of currently playing media (e.g., indicator 664C), which is the song titled “Heart Wave” (e.g., indicator 664D) by artist “MKTS” (e.g., indicator 664E). In some examples, indicator 664C of currently playing interface 664 is an animated indicator, further communicating that the associated media item is currently playing back. Indicators 664F and 664G correspond to one or more other media items available for playback.

**[0293]** FIG. 6AH also illustrates an exemplary remote control for controlling device 660. In some examples, remote control 662 is connected to device 660 (e.g., paired) and used by a user to interact with interfaces displayed on device 660. Because a remote control is effectively an extension of a device that is used for controlling the device remotely, for the purposes of this disclosure, a user input received at device 662 is considered the same as a user input received at device 660, unless otherwise noted herein. For example, a tap input received on device 662 that represents a request to select an affordance is considered the same as a tap on device 660 (e.g., if device 660 included a touch-sensitive surface) representing a request to select the same affordance, unless otherwise noted. However, one of skill in the art would appreciate that a user input can be received at any device and communicated to another device (e.g., for processing and performing an action in response), and that the particular device that physically receives the user input is not important, unless specifically noted. Likewise, in the example that device 660 is an external display device (e.g., a television) used by another device (e.g., an Apple TV that is a “home device” that receives and processes user input playback commands), because device 660 is effectively an extension of the other device, device 660 as referred to herein interchangeably with said other device, unless otherwise noted. For example, a reference to the “focus” or “target” of device 660 with respect to controlling media refers to the focus or target of the other device (e.g., Apple TV), unless otherwise noted.

**[0294]** In FIG. 6AH, device 662 receives user input 668 on device 662. User input 668 represents selection of the device selection affordance 664A. In some examples, user input 668 is a button press on device 662 while device selection affordance 664A is highlighted or otherwise selected at interface 664. In some examples, user input 662 is a tap, a tap and hold, or a deep press on a touch-sensitive surface. In some embodiments, device 660 displays a multi-device interface (e.g., 670 of FIG. 6AI) in response to receiving user input 668.

**[0295]** FIG. 6AI illustrates an exemplary multi-device interface, in accordance with some embodiments. Multi-device interface 670 includes an identification of the current focus (e.g., the currently-selected media session) of device 660. Header 670A indicates that the current focus of the device is the Living Room Apple TV (e.g., device 660). Multi-device interface 670 also includes a first indicator 670B, which indicates the currently-targeted media session. For example, the media session represented by indicator 670B includes playback of the song titled “Heart Wave” by artist “MKTS” from album “MKTS”. Together, header 670A and indicator 670B (which may be collectively referred to as an indicator) indicate the currently-targeted media session (e.g., media playing back, and on which devices) of interface 670. Multi-device interface 670 also includes a second indicator 670C, which corresponds to a different media session than the currently-selected media session. As shown in FIG. 6AI, indicator 670C is displayed (e.g., partially displayed) on the edge of the display.

**[0296]** As described above with respect to multi-device interface 610, multi-device interface 670 includes individual indicators representing available playback devices (e.g., devices in the user’s home). Indicator 670D identifies the current device (named “Living Room Apple TV”) and includes the selection indicator 670K. In this example, selection indicator 670K includes a checkmark, which indicates that the device 670D is currently playing back the media of indicator 670B (e.g., is included in the currently-targeted media session). Indicator 670E identifies the set of devices named “Kitchen” and includes indicator 670L, which does not include a checkmark (e.g., the Kitchen set of devices is not currently playing back the media track “Heart Wave” by “MKTS”). Indicator 670E also includes an indication that the Kitchen set of devices are currently playing back other media. For example, in FIG. 6AI, the indicator 670E includes the title of the track “Same Thing” and the artist “Jambug”. Indicator 670F identifies the set of devices named “Bedroom” and includes indicator 670M, which does not include a checkmark (e.g., the Bedroom set of devices is not currently playing back the media track “Heart Wave” by “MKTS”). Indicator 670F also includes an indication that the Bedroom set of devices are currently playing back other media. For example, in FIG. 6AI, the indicator 670F includes the title of the track “Vibes” and the artist “John Appleseed”. Indicator 670G identifies the set of devices named “Patio” and includes indicator 670N, which does not include a checkmark (e.g., the Patio set of devices is not currently playing back the media track “Heart Wave” by “MKTS”).

**[0297]** While multi-device interface 670 is displayed, device 662 receives user input 672, as shown in FIG. 6AI. In some examples, user input 672 is a swipe gesture on a touch-sensitive surface of device 662. For example, user input 672 is a leftward swipe.

**[0298]** In response to a user input (e.g., swipe gesture), in some examples, the device updates multi-device interface 670A to focus on a different media session. As shown in FIG. 6AJ, in response to user input 672 that is a leftward swipe, device 660 replaces display of the first indicator 670B with the display of second indicator 670C, which had been displayed immediately to the right of the first indicator 670B in FIG. 6AI. Thus, the multi-device interface 670 can be used to switch between different media sessions, visually indicated by switching between corresponding indicators. In some examples, other user inputs can be used to switch the multi-device interface between media sessions. For example, other user inputs include up or down directional gestures, left or right directional gestures, selection of one or more affordances (e.g., a left or right arrow), press of a button on a device (e.g., device 662), or any other appropriate type of user input.

**[0299]** As shown in FIG. 6AJ, in response to the user input 672, the current media session now corresponds to indicator 670C, which includes playback on the set of devices identified as “Kitchen” (e.g., as shown in updated header 670A) of the media item titled “Same Thing” by artist “Jambug” from the album “Fly Away” (e.g., as shown in indicator 670C). Additionally, the individual device indicators 670D-670G have been updated based on the currently displayed media session associated with indicator 670C. Thus, the device set named Kitchen corresponding to indicator 670E is the only device set that includes a checkmark (e.g., in corresponding indicator 670L). Further, FIG. 6AJ shows indicator 670H (not previously displayed) is now displayed in the area of the display where indicator 670C was displayed prior to user input 672. Thus, an additional leftward swipe (e.g., 674 of FIG. 6AJ), in this example, would cause indicator 670H to replace indicator 670C. FIG. 6AJ also shows indicator 670B displayed (e.g., partially) to the left of indicator 670C. Thus, a rightward swipe, in this example, would cause indicator 670B to replace display of indicator 670C (e.g., as shown in FIG. 6AI).

**[0300]** FIG. 6AK illustrates multi-device interface 670 with a current media session corresponding to indicator 670I (e.g., one leftward swipe from the media session represented by

indicator 670H, and two leftward swipes from the media session represented by indicator 670C). In some embodiments, a media session corresponds to a set of devices that are not currently playing back media. For example, as shown in FIG. 6AK, the current media session includes the device set named “Patio”. Rather than include an identification of a currently playing media item, indicator 670I includes the text “Choose Music”. Likewise, indicator 670G does not include an indication of a media item.

**[0301]** FIG. 6AL illustrates multi-device interface 670 with a current media session corresponding to indicator 670H (e.g., one leftward swipe from the media session represented by indicator 670C, and one rightward swipe from the media session represented by indicator 670I).

As shown in FIG. 6AL, indicator 670H is currently highlighted. In this example, while the indicator 670H is highlighted, device 662 receives a user input 676. In some examples, user input 676 is a tap, touch, or press received at device 662. In response to receiving the user input 676, device 660 displays current media interface 664 as shown in FIG. 6AM. As shown in FIG. 6AM, current media interface 664, displayed in response to user input 676, indicates the device 660 is currently targeted at a media session that includes the devices named “Bedroom” (e.g., as indicated by device selection affordance 664A) that is currently playing the song titled “Vibes” by “John Appleseed” (e.g., corresponding to indicator 664F, showing the album cover for the song). Thus, the focus of the device 660 has been changed (e.g., as compared to FIG. 6AH), and selection of new media for playback (e.g., using interface 664) will affect the currently targeted media session.

**[0302]** FIG. 6AN illustrates an exemplary multi-device interface that includes a currently-selected media session that includes two device sets. In FIG. 6AN, both the Kitchen and Living Room sets of devices are included in the current media session (e.g., playback of the song titled “Same Thing”). As shown in FIG. 6AN, indicator 670E is currently highlighted. User input 678 is received at device 662 while indicator 670E is highlighted.

**[0303]** In some examples, in response to user input 678 on a selected indicator corresponding to one or more devices, a volume control affordance is displayed. As shown in FIG. 6AO, in response to the user input 678 while indicator 670E is selected, device 660 enters a volume adjustment mode for the corresponding device set named Kitchen. For example, a volume

adjustment affordance 670J is displayed (e.g., replacing indicator 670E temporarily). While in the volume adjustment mode, the device 662 receives a user input 679, and in response, adjusts the volume of the Kitchen device set accordingly. In some examples, user input 679 is a directional swipe (e.g., left or right, up or down).

5     **[0304]**     FIG. 6AP illustrates an exemplary browser interface, in accordance with some embodiments. As shown in FIG. 6AP, browser interface 680 includes an indicator 680A of media that is now playing, which represents the currently-targeted media session, as well as recently added media items (e.g., that when selected cause playback to initiate on the devices in the currently-selected media session). In some examples, while browser interface 680 is  
10    displayed, user input 681 is received. In some examples user input 681 is a selection of button 682 of device 662. In some examples, user input 681 is a tap and hold user input, a press and hold (e.g., of a button), a deep press, a double tap or double press, or any other appropriate user input on device 662 or device 660.

**[0305]**     As shown in FIG. 6AQ, in response to user input 681, device 660 displays multi-  
15    device interface 670 overlaid on the browser interface 680. In some examples, multi-device interface 670 is displayed concurrently with other interfaces of device 660. For example, user input 681 provides a quick access to multi-device interface so that a user can quickly view and control the media playback status of devices throughout their home, even when performing other tasks or operations (e.g., using other, non-media related applications).

20    **[0306]**     FIG. 6AR illustrates a variety of exemplary playback control interfaces. Playback control interface 690A represents an interface for controlling audio playback, in accordance with some embodiments. Playback control interface 690B represents an interface for controlling video playback, in accordance with some embodiments. Playback control interface 690C represents an interface for controlling audio, in accordance with some embodiments. For example, playback  
25    control interface 690C is suited for use as a pop-up interface (e.g., of a tool bar or web browser). For instance, in response to selection of an affordance, interface 690C can protrude from the selected affordance (e.g., from the pointed shape on one of its sides), temporarily covering currently displayed content (e.g., until dismissed). Playback control interface 690D is an

alternative to 690A, for example, and can be used as a persistent “widget” in a device operating system interface.

**[0307]** In some embodiments, a device (e.g., device 600) is configured to receive playback coordination responsibility from another device (e.g., device 580). For example, a device that is configured to receive or perform playback coordination responsibility (also referred to as a “hero device”) is a device that is configured to perform one or more of the following tasks: issue commands to one or more external devices to synchronize and/or control playback of media on the external devices; store a media item or a playback queue for playback; access a content stream from a remote location (e.g., an internet location); provide a content stream (e.g., of media) to one or more external devices for playback; and process playback control instructions for a media session (e.g., receive, process (e.g., de-duplicate redundant requests), and forward instructions to appropriate devices). In some embodiments, device 600 coordinates playback on a set of device. In some embodiments, the set of devices excludes the device 600. For example, if the set of devices does not include a device configured to be hero device, device 600 retains playback coordination responsibility. In some embodiments, device 600 transfers playback coordination responsibility to a device configured to be a hero device. For example, if the set of devices includes a device configured to be hero device, device 600 transfers playback coordination responsibility to that device (e.g., such as a device 580). Playback coordination responsibility is described in more detail below.

**[0308]** FIG. 7 is a flow diagram illustrating a method for accessing media playback status of a plurality of available playback devices using an electronic device in accordance with some embodiments. Method 700 is performed at a device (e.g., 100, 300, 500, 580) with a display. Some operations in method 700 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0309]** As described below, method 700 provides an intuitive way for accessing media playback status of a plurality of available playback devices. The method reduces the cognitive burden on a user when accessing media playback status of a plurality of available playback devices, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to access media playback status of a plurality of available

5 playback devices faster and more efficiently conserves power and increases the time between battery charges.

**[0310]** The electronic device (e.g., 600) receives (702) a user input. For example, the device receives user input (e.g., 608A of FIG. 6E) selection of an affordance (e.g., 606B of FIG. 6E). In some examples, the device receives a user input (e.g., 608B of FIG. 6F) associated with a playback control interface (e.g., 606A of FIG. 6C).

**[0311]** In response to receiving the user input, the electronic device (e.g., 600) displays (704), on the display, a multi-device interface (e.g., 610) that includes: one or more indicators (e.g., 610A, 610F, 610G) associated with a plurality of available playback devices that are connected to the device (e.g., 600) and available to initiate playback of media from the device (e.g., 600), and a media playback status (e.g., as indicated by 610F and 610G) of the plurality of available playback devices. In some examples, a media playback status includes one or more of: an indication of what is currently being played on the plurality of available playback devices. In some examples, the devices in the plurality of available playback devices are associated with a user, a user account, or a plurality of devices associated with a user. For example, the devices may be a collection of devices belonging to the user or designated as residing inside of a user's home. In some embodiments, an indicator of the one or more indicators can be associated with more than one available playback device. For example, devices that are currently playing the same content can be grouped and displayed as a single indicator (e.g., 610A of FIG. 6A).

**[0312]** Displaying a multi-device interface that includes one or more indicators associated with a plurality of available playback devices that are connected to the device and available to initiate playback of media from the device, along with a media playback status of the plurality of available playback devices, provides the user with visual feedback about the state of a plurality of devices that are available for media playback. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.



**[0313]** Additionally, displaying such a multi-device interface allows the user to collectively view a plurality of states for a plurality of available devices in one optimized interface.

Providing an optimized interface to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and  
 5 reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0314]** In some embodiments, one or more devices are “connected” when data can be exchanged between the devices. For example, devices can be connected to a common Local  
 10 Area Network (“LAN”) that enables data exchange between the devices. In some embodiments, one or more connected devices are connected directly. In some examples, a direct connection between two devices does not rely on an intermediate device between two directly connected devices. For example, a direct connection can be formed between a device that creates a Wi-Fi connection directly to a second device, without requiring an intermediate wireless access point  
 15 (“WAP”) to facilitate the connection.

**[0315]** In some embodiments, one or more devices are connected indirectly. In some examples, an indirect connection between two devices includes (e.g., is routed through) an intermediate device between two connected devices. For example, an indirect connection can be formed between a device that is connected to a common wireless (e.g., Wi-Fi) connection  
 20 through an intermediate WAP.

**[0316]** In some embodiments, one or more devices are “connected” by virtue of each being logged into (or otherwise associated with) the same user account. For example, a user may have two personal devices that are both logged into an account for a cloud-based service and thus are connected. For instance, the user’s phone (e.g., an iPhone) and their tablet computer (e.g., an  
 25 iPad) can both be logged into the user’s iCloud account. In this example, the iPhone and the iPad can exchange data through the cloud-based service (e.g., a cloud server). In some embodiments, the device is connected to the available playback devices such that the device can initiate playback of media on one or more of the available playback devices. For example, an available playback device can begin playback of an media file (or stream), transfer playback

(currently playing on the device) to the available device, or add the available device to concurrently play back of media a currently playing on the device).

**[0317]** In some embodiments, the user input (e.g., 608A of FIG. 6E) is a first user input, and the electronic device (e.g., 600), receives a second user input (e.g., 615 or 616) representing selection of the one or more indicators associated with the plurality of available playback devices. In response to receiving the second user input, the electronic device transmits an instruction to initiate playback on the plurality of available playback devices. In some embodiments, the plurality of devices begin playback immediately. In some embodiments, the available devices begin playback without building up a buffer of media data and then, during playback, build up a buffer. Thus, for example, delay between when a user selects a media item and hears playback is reduced. In some embodiments, playback does not begin until a certain proportion of devices of the plurality are ready to begin playback. For example, playback can begin when 75% of devices are ready (e.g., have buffered a minimum amount of media).

**[0318]** In some embodiments, the user input (e.g., 608A of FIG. 6E) is a first user input, and while displaying the multi-device interface (e.g., 610), the electronic device (e.g., 600) displays, on the display (e.g., 602), a first indicator (e.g., 610E, 610F, or 610G of FIG. 6H). The electronic device receives a third user input (e.g., 612 or 616) representing selection of the first indicator (e.g., 610E or 610F). In response to receiving the third user input, the electronic device displays, on the display, affordances (e.g., 610H-610O of FIG. 6J or FIG. 6N), for each of the devices of the plurality of available playback devices. For example, after selecting an indicator (e.g., 610) for a group of devices (e.g., “Kitchen” and “Living Room” of FIG. 6N), the multi-device interface includes affordances (e.g., 610H, 610J, 610L, and 610N) for each device in the home (e.g., iPhone, Bedroom, Kitchen, and Living Room in the example in FIG. 6N).

**[0319]** In some embodiments, while the electronic device (e.g., 600) is playing back a first media item (e.g., represented by 610A of FIG. 6J), the electronic device receives a fourth user input (e.g., 616) representing selection of a second indicator (e.g., 610F) of the one or more indicators, wherein the second indicator is associated with a set of playback devices that does not include the device. In some embodiments, a set of playback devices includes one or more playback devices. Subsequent to receiving the fourth user input representing selection of the

second indicator, the electronic device displays, on the display, a browsing interface (e.g., 620), wherein the browsing interface includes an affordance (e.g., 620B) associated with a second media item. The electronic device (e.g., 600) receives a fifth user input (e.g., 622) representing selection of the affordance associated with the second media item. In response to receiving the fifth user input, the electronic device (e.g., 600): transmits an instruction to initiate playback of the second media item on the set of playback devices that does not include the device (e.g., 600); and continues playing back the first media item (e.g., represented by 610A of FIG. 6J) on the electronic device (e.g., 600). For example, in response to the user input selection of affordance 620B (associated with media item “Monday Morning” by “The Fomoers”), the device initiates playback of the associated media item on the selected devices named “Kitchen” and “Living Room” (e.g., as shown selected in FIG. 6N). Further, playback continues on the electronic device (e.g., named iPhone in this example) of the media item titled “Same Thing” by artist “Jambug” (e.g., as shown in FIG. 6N).

**[0320]** In some embodiments, the browsing interface (e.g., 620) includes an affordance associated with a third media item (e.g., 620B), and the electronic device receives a sixth user input (e.g., 622) associated with the affordance associated with the third media item. In accordance with receiving the sixth user input, the electronic device displays, on the display, the multi-device interface. For example, after receiving a deep press on a media item (e.g., a song), the device displays the multi-device interface (e.g., 610 of FIG. 6J).

**[0321]** In some embodiments, the sixth user input (e.g., 622) is a press and hold. In some embodiments, in response to the sixth user input, the electronic device displays a menu (e.g., 624) with an affordance (e.g., 624A), selection of which causes the multi-device interface (e.g., 610) to be displayed.

**[0322]** In some embodiments, the sixth user input (e.g., 622) has a characteristic intensity. In accordance with a determination that the characteristic intensity of the sixth user input meets the intensity-dependent criteria, and subsequent to receiving the sixth user input, the electronic device (e.g., 600) displays, on the display (e.g., 602), the multi-device interface (e.g., 610). In some embodiments, in response to the sixth user input, the electronic device displays a menu (e.g., 624) with an affordance (e.g., 624A), selection of which causes the multi-device interface

(e.g., 610) to be displayed. In accordance with a determination that the characteristic intensity of the sixth user input does not meet the intensity-dependent criteria, and subsequent to receiving the sixth user input: the electronic device forgoes displaying, on the display, the multi-device interface; and transmits an instruction to initiate playback of the third media item (e.g., 620B) on the set of playback devices that does not include the device (e.g., Living Room + Kitchen, as shown in FIG. 6N).

**[0323]** In some embodiments, to display the multi-device interface (e.g., 610), the electronic device (e.g., 600) concurrently displays, on the display (e.g., 602): a first region (e.g., 611A of FIG. 6U) that includes the multi-device interface (e.g., 610 of FIG. 6U); and a second region (e.g., 611B of FIG. 6U) that includes content (e.g., 630) displayed prior to displaying the multi-device interface.

**[0324]** In some embodiments, the first region (e.g., 6611A) is visually overlaid on the second region (e.g., 611B, as shown in FIG. 6U). In some embodiments, the second region is visually blurred, (e.g., to indicate that the first region is an active window). In some embodiments, the second region appears darkened (e.g., to indicate that the first region is an active window).

**[0325]** In some embodiments, the electronic device (e.g., 600) receives selection (e.g., user input 634) of an indicator (e.g., 6610F of FIG. 6V) of the one or more indicators, wherein the indicator includes a representation of a fourth media item (e.g., “Heart Wave” as shown in FIG. 6V). In some examples, the representation of the fourth media item is a thumbnail image that includes album art, an artist thumbnail, or the like. In response to receiving selection of the indicator, and while continuing to concurrently display the first and second regions, the electronic device (e.g., 600) updates display of the second region (e.g., 611B) to include at least a portion of the representation of the fourth media item (e.g., as shown in FIG. 6W). For example, the second region can be updated to reflect that the device has received user selection of a different media item than that which is currently playing back, a representation of which was displayed immediately prior to receiving the selection. Thus, the electronic device visually indicates that it has been retargeted to the devices that are playing back the fourth media item. In some examples, the second region represents a media application on the device. For example, a

media application includes any application executing on the device usable for browsing, selecting, or otherwise initiating playback of media items.

**[0326]** In some embodiments, the user input (e.g., 608A or 608B) is a first user input, and prior to receiving the user input, the electronic device (e.g., 600) receives a seventh user input (e.g., 604 or 642). In response to receiving the seventh user input, the electronic device displays, on the display (e.g., 602), a playback control interface (e.g., 606A of FIG. 6C) that includes: one or more playback control affordances (e.g., 606M of FIG. 6C); a playback device selection affordance (e.g., 606B of FIG. 6C); and an affordance for controlling a data connection of the device (e.g., 606N). The electronic device receives the first user input (e.g., 608A of FIG. 6E, or 608B of FIG. 6F), wherein the first user input is associated with the playback control interface (e.g., selection of 606B of FIG. 6E, or a deep press of 606A of FIG. 6F).

**[0327]** In some embodiments, the electronic device receives the first user input (e.g., 608A or 608B), and the first user input has an input characteristic. In some embodiments, an input characteristic is a characteristic intensity of an input. In some embodiments, an input characteristic is a length of time associated with an input. In some examples, a length of time associated with an input is a length of time that a touch input was continuously detected on a touch-sensitive surface (e.g., of device 600).

**[0328]** The electronic device (e.g., 600) determines whether the input characteristic meets an input characteristic-dependent criteria. In some embodiments, to determine whether the input characteristic meets an input characteristic-dependent criteria, the electronic device determines whether the characteristic intensity meets an intensity-dependent criteria. For example, whether the characteristic input of the input is above a threshold intensity. In some embodiments, to determine whether the input characteristic meets an input characteristic-dependent criteria, electronic device determines whether the user input meets a time-based criteria. For example, whether the touch is detected (e.g., on a touch-sensitive surface associated with the electronic device) for a predetermined amount of time. Input characteristics and input characteristic dependent criteria other than those based on intensity or time can be used. In accordance with a determination that the input characteristic meets the input characteristic-dependent criteria, the device displays, on the display, the multi-device interface. In accordance with a determination

that the input characteristic intensity does not meet the input characteristic-dependent criteria, the electronic device forgoes displaying, on the display, the multi-device interface. In some embodiments, further in accordance with a determination that the input characteristic intensity does not meet the input characteristic-dependent criteria, the electronic device determines a location associated with the first user input. In accordance with a determination that the location is associated with a playback control affordance (e.g., 606M of FIG. 6C), the device performs a corresponding playback control function. For example, if the first user input does not have a characteristic intensity that exceeds a threshold intensity, and is received at a location associated with a pause playback affordance, then the device pauses playback.

**[0329]** In some embodiments, the seventh user input (e.g., 642) is received while displaying a user interface of an application executing on the device (e.g., 640 of FIG. 6Y). While continuing to display at least a portion (e.g., 640 of FIG. 6AA) of the user interface of the application, the electronic device (e.g., 600) displays, on the display (e.g., 602), the playback control interface (e.g., 606A). Subsequent to receiving the first user input, and while continuing to display the at least a portion of the user interface of the application, the electronic device (e.g., 600) displays, on the display, the multi-device interface (e.g., 610 of FIG. 6AA). In some embodiments, a user input (e.g., a touch or click) outside of the multi-device interface portion (e.g., outside of 610 of FIG. 6AA) causes the electronic device to cease displaying the multi-device interface (e.g., and display 640 as shown in FIG. 6Y). For example, the multi-device interface ceases being displayed overlaid on the application and the application (e.g., represented by 640 of FIG. 6Y) becomes the active user interface again.

**[0330]** In some embodiments, the multi-device interface (e.g., 610 of FIG. 6AB) includes a volume control affordance (e.g., 610D of FIG. 6AB) associated with the plurality of available playback devices (e.g., the devices represented by 610H, 610L, and 610N). The electronic device receives an eighth user input (e.g., 6644) associated with the volume control affordance. In response to receiving the eighth user input, the device transmits an instruction to adjust a playback volume of the plurality of available playback devices (e.g., the devices represented by 610H, 610L, and 610N). For example, the device (e.g., 600) transmits instructions to the devices “Kitchen” and “Living Room” that are currently targeted by the device and are playing back the same media content.

[0331] In some embodiments, the multi-device interface includes a plurality of individual volume control affordances (e.g., 610S, 610T, and 610U of FIG. 6AB), each associated with a single device of the plurality of available playback devices (e.g., the devices represented by 610H, 610L, and 610N, respectively). The device receives a ninth user input associated with an individual volume control affordance (e.g., 610U). For example, the electronic device receives a selection and movement of the slider 610U in FIG. AB. In response to receiving the ninth user input, the device transmits an instruction to adjust a playback volume of the associated device (e.g., device represented by 610N), wherein the associated device is different than the electronic device (e.g., 600). For example, the electronic device transmits an instruction to adjust the volume for the device associated with the affordance 610U, forgoing adjustment of volume for other devices in the group.

[0332] In some embodiments, the one or more indicators associated with the plurality of available playback devices includes: a first indicator (e.g., 670B of FIG. 6AI) representing a fifth media item currently playing on the electronic device (e.g., 660), wherein the first indicator is displayed in a first region (e.g., 670A of FIG. 6AI); a second indicator (e.g., 670C of FIG. 6AI) representing a group of devices (e.g., 670E of FIG. 6AJ) that are each currently playing back a sixth media item; and individual indicators (e.g., indicators 670D, 670E, 670F, and 670G of FIG. 6AI) for each device of the plurality of available playback devices. While displaying the multi-device interface, the electronic device (e.g., 600) receives a tenth user input (e.g., 672) representing a request to replace display of the first indicator (e.g., 670B of FIG. 6AI) in the first region (e.g., 670A of FIG. 6AI) with display of the second indicator (e.g., 670C). In response to the tenth user input, the electronic device replaces display (e.g., as illustrated in FIG. 6AJ) of the first indicator (e.g., 670B) in the first region (e.g., 670A) with display of the second indicator (e.g., 670C as illustrated in FIG. 6AJ). In some embodiments, the tenth user input is received at a second device (e.g., 662) associated with the electronic device (e.g., 600 or 660).

[0333] In some embodiments, the electronic device (e.g., 660) displays an indication (e.g., 670K) of whether each device of the plurality of available playback devices is currently playing back a media item associated with an indicator displayed in the first region.

[0334] In some embodiments, the electronic device (e.g., 660) receives an eleventh user input (e.g., 678) associated with an individual indicator (e.g., 670E of FIG. 6AN) for a device of the plurality of available playback devices. The electronic device determines whether the eleventh user input represents a selection that exceeds a threshold duration. For example, the input can be a tap and hold on a touch-sensitive surface of the device or a touch-sensitive surface associated with the device (e.g., of 662). In accordance with the eleventh user input representing a selection that exceeds the threshold duration, the electronic device enters a volume adjustment mode for the device associated with the individual indicator (e.g., illustrated in FIG. 6AO). In some examples, entering the volume adjustment mode can include displaying a visual indication (e.g., 670J of FIG. 6AO) that the electronic device is in a volume adjustment mode. For the visual indication can indicate which device or devices are currently subject to volume adjustment in the volume adjustment mode. For example, indicators for other devices can be grayed out or otherwise altered in appearance in response to the eleventh user input. In some examples, a volume indicator (e.g., 670J) such as a slider or knob indicating a volume level appears, appears enlarged, or is otherwise visually altered so as to visually communicate that the electronic device is currently in the volume adjustment mode. In accordance with the eleventh user input (e.g., 678) not representing a selection that exceeds the threshold duration, forgoing entering the volume adjustment mode for the device associated with the individual indicator.

[0335] In some embodiments, the electronic device (e.g., 600, 660) receives a twelfth user input representing a request to initiate media playback on the plurality of available devices. In response to receiving the twelfth user input: in accordance with a determination that the plurality of available devices includes at least one device configured to receive playback coordination responsibility, the electronic device transfers playback coordination responsibility to the at least one device of the plurality of devices. In accordance with a determination that the plurality of available devices does not include at least one device configured to receive playback coordination responsibility, the electronic device (e.g., 600, 660) coordinates the media playback on the plurality of devices.

[0336] In some embodiments, while the electronic device (e.g., 600 or 660) is coordinating the media playback on the plurality of devices, the electronic device receives a thirteenth user input representing a request to initiate a phone call on the device. For example, the device



receives user input representing a request to answer a phone call or to place a phone call. In response to receiving the thirteenth user input representing the request to initiate the phone call, the electronic device: initiates the phone call; and continues coordinating the media playback on the plurality of devices during the phone call.

5    **[0337]**     In some embodiments, further in response to receiving the twelfth user input, the electronic device (e.g., 600, 660) transmits data representing a playback queue to each of the devices in the plurality of devices.

10   **[0338]**     In some embodiments, the electronic device (e.g., 600 or 660) receives a fourteenth user input representing a request to initiate media playback on the plurality of available devices, wherein the fourteenth user input is associated with a first user. In some examples, the electronic device determines that a user input is associated with the first user based on detected voice input, based on a device that sent the request, or the like. In response to receiving the fourteenth user input, in accordance with a determination that the first user is subject to a playback restriction, the electronic device (e.g., 600, 660) prevents the electronic device (e.g., 600, 660) from  
15   initiating media playback on the plurality of available devices in response to the eleventh user input. In accordance with a determination that the first user is not subject to the playback restriction, the electronic device allows the device to initiate media playback on the plurality of available devices in response to the eleventh user input.

20   **[0339]**     In some embodiments, the electronic device (e.g., 600 or 660) receives a fifteenth user input (e.g., 652 of FIG. 6AE) representing a request for media output on the device. In some embodiments, the fifteenth user input represents a request to initiate media playback on the device. In some embodiments, the fifteenth user input represents a request to output media having a visual component. For example, media having a visual component includes, but is not limited to, images, videos, browser applications, electronic messages (e.g., emails, text  
25   messages), or the like. In response to receiving the fifteenth user input: in accordance with a determination that the request for media output is a request to display content (e.g., represented by 650A of FIG. 6AE), the electronic device transmits an instruction to a preferred device (e.g., 660 of FIG. 6AH) of the plurality of available playback devices to initiate display of the content in response to the twelfth request. In some embodiments, request for media output is a request to

5 playback content having a visual component (e.g., video). For example, video content includes but is not limited to: a movie, a show, a video stream, or the like. In some embodiments, a preferred device is a device that is capable of outputting video (e.g., an Apple TV), or a device connected to a large display (e.g., predefined as preferred). In accordance with a determination  
 10 that the request for media output is not a request to display content, the electronic device (e.g., 600 or 660): forgoes transmitting the instruction to the preferred device of the plurality of available playback devices to initiate display of the content in response to the twelfth request; and initiates media output on the device in response to the twelfth user input. For example, if the requested playback is of audio content, the electronic device plays back the audio on the  
 15 requested device instead.

[0340] Note that details of the processes described above with respect to method 700 (e.g., FIG. 7) are also applicable in an analogous manner to the methods described below. For example, method 900, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described  
 20 above with reference to method 700. For brevity, these details are not repeated below.

[0341] FIGS. 8A-8P illustrate exemplary user interfaces for accessing a multi-device interface, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 9.

[0342] FIGS. 8A-8B illustrate an exemplary current media interface, in accordance with  
 20 some embodiments. At FIG. 8A, device 800 displays, on display 802, current media interface 804. Current media interface 804 (also referred to as a “now playing interface”) identifies a media item that is currently being played back. In some embodiments, device 800 includes one or more features of device 100, 300, or 500. Current media interface 804 includes album art 804A, media identifier 804B (song title “Same Thing”), media identifier 804C (artist “Jambug”),  
 25 media identifier 804D (album “Fly Away”), and device selection affordance 804E. As shown in FIG. 8A, the device selection affordance 804E does not include an identifier for another device. Thus, in this example, the media item identified in the current media interface 804 is currently playing back on the current device, device 800. In some examples, the media identified by the currently media interface is currently being played back on other devices as well (e.g., in

addition to the current device, or a set that excludes the current device). As shown in FIG. 8B, device 800 receives user input 806 representing selection of device selection affordance 804E. In some examples, user input 806 can be a tap or touch on a location associated with the displayed device selection affordance 804E.

5 [0343] FIG. 8C illustrates an exemplary multi-device interface, in accordance with some embodiments. In some embodiments, device 800 displays multi-device interface 810 in response to user input 806. As shown in FIG. 8C, multi-device interface 810 includes indicators 810A-810K. Multi-device interface 810 is analogous to multi-device interface 610, described above (e.g., with respect to FIG. 6J). Likewise, indicators 810A-810K are analogous to the indicators  
10 of multi-device interface 610. Accordingly, the above description of a multi-device interface (e.g., 610) is hereby incorporated by reference with respect to multi-device interface 810.

[0344] In particular, FIG. 8C depicts a multi-device interface 810 that includes an indicator 810J that represents a media session that includes the device set “Kitchen + Living Room”, which is comprised of the device set “Kitchen” and the device set “Living Room”. In this  
15 example, the Kitchen set represents a single smart speaker device (e.g., device 580), and the Living Room set represents a different single smart speaker device (e.g., another instance of device 580). The media session represented by indicator 810J includes playback of the media item titled “Heart Wave” by artist “MKTS” on the device set “Kitchen + Living Room”.

[0345] FIGS. 8D-8H illustrate exemplary techniques for refocusing a device, in accordance  
20 with some embodiments. At FIG. 8D, the device 800 receives user input 812 representing selection of indicator 810J. In some embodiments, user input 812 is a tap or touch on a location associated with the indicator 810J. In some embodiments, user input 812 is a deep press input or a tap and hold input on a location associated with the indicator 810J. As shown in FIG. 8D, the current media interface 804 is visible on display 802 concurrently with the display of multi-  
25 device interface 810. Specifically, device 800 displays multi-device interface 810 in a first region 828A that is visually overlaid on a second region 828B. Device 800 displays the current media interface 804 in the second region 828B. As shown in FIG. 8D, second region 828B (e.g., the current media interface 804) is partially obscured by the first region 828A, but it still visible. Thus, device 800 provides a visual indication (e.g., other than the multi-device interface 810) of

the current focus of the device. For instance, because the album art displayed with the indicator 810A matches the album art of current media interface 804, the device indicates that the current focus of the device, or the focus of a particular application (e.g., associated with the current media interface 804), is the current device “iPhone”, which is currently playing the media item associated with the matching album art.

**[0346]** In response to receiving user input 812, device 800 displays an expanded version of indicator 810J, as shown in FIG. 8E. The expanded indicator 810J (and the reduced size of indicator 810A) of FIG. 8E provide visual indication that the focus of the device is now on the media session represented by indicator 810J. As shown in FIG. 8E, in response to changing the focus: indicator 810B no longer includes a checkmark in indicator 810F (e.g., because the iPhone is not part of the currently-selected media session), indicators 810D and 810E now include checkmarks in indicators 810H and 810I, respectively (e.g., because the Kitchen and Living Room set of devices are part of the currently-selected media session). In some examples, an indicator for one or more devices indicates that the corresponding one or more devices are unavailable. For example, an unavailable device is a device that is: offline, currently installing a software or firmware update, configured to be unavailable (e.g., via a setting or button), or the like. In some examples, a corresponding indicator is not displayed for unavailable devices. Alternatively, an indicator for such device or devices is displayed, but with an indication that the device is unavailable for media playback. For example, FIG. 8E depicts indicator 810C, which includes the text “Updating” indicating that the Bedroom device set is currently unavailable for media playback (e.g., initiated from the device 800). FIG. 8E also depicts the text and image of indicator 810C different than the other device indicators, further visually indicating that the device set Bedroom is unavailable for media playback from device 800. For example, the device 800 can display an indicator for an unavailable device in a grey color, or other suitable manner that visually distinguishes the unavailable device from available devices.

**[0347]** At FIG. 8F, device 800 receives user input 814. In this example, user input 814 represents a contact (e.g., touch, tap, deep press, or press and hold) on a location outside of the displayed multi-device interface 810 (e.g., on a location that does not include display of an indicator of multi-device indicator 810). In some examples, in response to receiving user input 814, device 800 ceases displaying multi-device interface 810.

[0348] FIGS. 8G and 8H illustrate an exemplary current media interface. At FIG. 8F, device 800 displays current media interface 816. In some examples, current media interface 816 is displayed in response to user input 814 of FIG. 8F. In some examples, current media interface 816 is displayed in response to user input 812 of FIG. 8D. Current media interfaces 804 and 816 are similar, however current media interface 816 is an updated version of interface 804, and reflects that the device 800 is now targeting a different media session (e.g., set of devices and/or media). In particular, current media interface 816 includes album art 816A (e.g., different than the album art 804A) media identifier 816B (song title “Heart Wave”), media identifier 816C (artist “MKTS”), media identifier 816D (album “MKTS”), and device selection affordance 816E. As shown in FIG. 8G, the device selection affordance 816E includes an identifier for another device set, “Kitchen + Living Room”. Thus, in this example, the media item identified in the current media interface 816 is currently playing back on the device set “Kitchen + Living Room” (e.g., which excludes device 800). At FIG. 8H, device 800 receives a user input 818. In this example, user input 818 represents a contact (e.g., touch, tap, deep press, or press and hold) on a location outside of the displayed current media interface 816 (e.g., on a location that does not include display of an indicator of current media interface 816). In some examples, in response to receiving user input 818, device 800 ceases displaying current media interface 816. In some examples, device 800 displays browser interface 820 in response to user input 818.

[0349] FIGS. 8I and 8J illustrate an exemplary browser interface. At FIG. 8I, device 800 displays browser interface 820 for viewing and selecting a plurality of media items. Browser interface 820 depicts a music browsing interface, and in particular, an album view of a music album. Browser interface 820 includes identifier 820A identifying the currently-selected album, as well as a plurality of affordances (e.g., 820B and 820C), each corresponding to a media item (e.g., tracks of the music album). Current media indicator 822 identifies media currently playing back as part of a currently-selected media session (e.g., the track titled “Heart Wave” playing back on the devices Kitchen + Living Room). At FIG. 8J, device 800 receives user input 824 representing selection of media item affordance 820B. In some examples, user input is a tap or touch input at a location associated with affordance 820B. In some examples, user input is a deep press or touch and hold input at a location associated with affordance 820B.

[0350] FIG. 8K illustrates an exemplary current media interface. In some examples, device 800 displays current media interface 826 in response to user input 824 (e.g., shown in FIG. 8K). In some examples, device 800 displays current media interface 826 in response one or more user inputs received subsequent to user input 824. As shown in FIG. 8K, current media interface 826 illustrates that, in response to a request to selection of a media item for playback (e.g., selection of affordance 820B) and while device 800 is targeted to a set of devices (e.g., “Kitchen + Living Room” as shown in FIG. 8H), that playback is initiated on the targeted set of devices. Thus, user input selection of affordance 820B associated with the music item titled “The Spiral” by artist “The Fomoers” causes display of current media interface 826 that includes corresponding appropriate indicators 826A-826D. Device selection affordance 826E indicates that the focus of device 800 continues to be the device set “Kitchen + Living Room” (e.g., as it was immediately prior to receiving user input 824).

[0351] FIGS. 8L-8P illustrate exemplary interfaces for initiating playback of media on one or more devices that are currently playing back other media. FIG. 8L depicts multi-device interface 810, as described above with respect to FIG. 8C. As shown in FIG. 8L, the currently-selected media session corresponds to the device iPhone and the media track “Same Thing”.

[0352] At FIG. 8M, device 800 has received user input selection of the device set Kitchen (e.g., represented by the checkmark in indicator 810H of indicator 810D) and the device set Living Room (e.g., represented by the checkmark in indicator 810I of indicator 810E). In some examples, the user input selection of a device is user input 830 at a location associated with a device indicator (e.g., indicator 810D, as shown in FIG. 8M). FIG. 8M also depicts user input 832, representing selection of affordance 810L. In some examples, user input 832 is a contact (e.g., tap, touch, deep press) at a location associated with affordance 810L. In some examples, the user input selection of a device is user input 832. FIG. 8M also depicts indicator 810J, for a non-selected media session that includes playback on the devices Kitchen and Living Room. Accordingly, the device Kitchen and Living Room are currently busy (e.g., are part of a different media session (e.g., than the media session that is selected) that includes playback of media content) playing back the media item titled “Heart Wave”. Further, FIG. 8M depicts indicator 810J with identifier 810M, which identifies a media session owner. In some embodiments, a media session owner is a device. In some embodiments, a media session owner is a user or (e.g.,

a user account). In some embodiments, a media session owner is a device and a user. As shown in FIG. 8M, the media session owner associated with the media session of indicator 810J includes both a user and a device, “Bob’s iPhone”. Thus, in this example, the media session owner includes a device different than device 800, and the different device is associated with a user (e.g., Bob) that is not associated with device 800 (e.g., device 800 is not logged into an account associated with Bob).

**[0353]** FIG. 8N illustrates an exemplary notification prompt for taking over playback of a device. In some embodiments, device 800 displays notification prompt 834 in response to receiving user input 830. In some embodiments, device 800 displays notification prompt 834 in response to receiving user input 832. In some examples, a notification prompt is displayed when device 800 attempts to initiate (or be configured to initiate) media playback on a device that is currently busy playing back media. In some examples, a device is busy playing back media if such media was initiated by a different media session owner. Thus, if device 800 is associated with a first user account (e.g., belonging to user Tim) and the targeted device is currently playing back media that was initiated by a second user account (e.g., from a device associated with a user account belonging to Bob) that is not associated with device 800, a notification prompt such as notification prompt 834 can be displayed.

**[0354]** In some examples, a notification prompt for taking over playback is displayed in response to user input 830. For example, in response to a user selecting an indicator for Kitchen device in FIG. 8M, a notification prompt is displayed. In some examples, a notification prompt for taking over playback is displayed in response to user input 832. For example, in response to receiving selection of affordance 810L in FIG. 8M (e.g., after receiving selection of the Kitchen and Living Room indicators 810D and 810E), notification prompt 834 is displayed. Notification prompt 834 includes a message 834A that reads: “The Kitchen and Living Room speakers are currently playing “Heart Wave”. Are you sure you would like to play “Same Thing” in the Kitchen and Living Room?”. Further, notification prompt 834 includes yes affordance 834B and cancel affordance 834C. In some examples, selection of affordance 834B causes device 800 to take over the playback of the selected devices. In some examples, selection of affordance 834C causes device 800 to forgo taking over the playback of the selected devices.

[0355] FIG. 8O illustrates an exemplary multi-device interface after taking over playback from another media session owner. At FIG. 8O, device 800 displays the multi-device interface 810 depicted in FIG. 8O in response to selection of yes affordance 834B, representing confirmation of that the device 800 should take over playback and add the Kitchen and Living Room devices to the currently-selected “Same Thing” media session. Notably, in FIG. 8O, the indicator 810J (as shown in FIG. 8L) is no longer displayed. In some examples, an indicator for a media session ceases to be displayed subsequent to its devices being taken over. In this example, the media session that corresponded to indicator 810J (e.g., playback of “Heart Wave” on devices “Kitchen + Living Room”) no longer exists (e.g., because each of its devices have been added to another media session). Thus, indicator 810J is not displayed in multi-device interface 810 of FIG. 8O.

[0356] FIG. 8P illustrates an exemplary multi-device interface after less than all devices of a media session have been taken over. FIG. 8P is similar to FIG. 8O except that the device set “Living Room” was not taken over (e.g., not selected at FIG. 8M) and added to the media session for the media item “Same Thing”. Thus, the indicator 810J continues to be displayed in FIG. 8P, but has been updated to reflect that the Kitchen device is no longer a part of that media session. For example indicator 810J in FIG. 8P now identifies “Living Room” as the device set included in its corresponding media session, and no longer identifies “Kitchen + Living Room” (e.g., as in FIG. 8M).

[0357] FIG. 9 is a flow diagram illustrating a method for configuring an electronic device to initiate playback on a plurality of available playback devices using an electronic device in accordance with some embodiments. Method 900 is performed at a device (e.g., 100, 300, 500, 580) with a display. Some operations in method 900 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

[0358] As described below, method 900 provides an intuitive way for configuring an electronic device to initiate playback on a plurality of available playback devices. The method reduces the cognitive burden on a user for configuring an electronic device to initiate playback on a plurality of available playback devices, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to configure an electronic



device to initiate playback on a plurality of available playback devices faster and more efficiently conserves power and increases the time between battery charges.

**[0359]** The electronic device (e.g., 800) displays (902), on the display (e.g., 802), a first current media interface (e.g., 804 of FIG. 8A) for the device, wherein the first current media interface includes: a representation (e.g., 804A, 804B, 804C, and/or 804D of FIG. 8A) of a first media item available for playback on the device (904), and a playback device selection affordance (906) (e.g., 804E). In some examples, a current media interface is any user interface for browsing, viewing, or controlling media playback. For example, a current media interface is a “Now Playing” interface.

**[0360]** In some embodiments, the electronic device (e.g., 800) is currently playing the first media item. For example, the first current media interface is a “Now Playing” interface. In some embodiments, the representation of the first media item available for playback on the device is selectable (e.g., is an affordance), and can be selected to initiate playback of the first media item on the electronic device. For example, the first current media interface is a browsing interface that allows browsing of one or more media items (e.g., the first media item) while a media application on the electronic device (e.g., or the electronic device itself) is targeting the electronic device. In some embodiments, selection of a media item (e.g., the first media item) while the music application is targeted to a device causes playback of the media item to initiate on the targeted device in response.

**[0361]** In some embodiments, selection of a playback device selection affordance (e.g., 804E) allows one or more available playback devices to be selected. In some embodiments, the available playback devices include the electronic device. Selection of one or more available playback devices may be referred to as “targeting”, “retargeting”, “focusing”, “refocusing” a media application or the electronic device, as described above. For example, a media application or device can be targeted to three discrete devices: the electronic device and two external speakers connected to the device via a wireless connection. In this example, while targeted to the three discrete devices in this example, a media item is selected for playback, and playback is initiated on the three discrete devices.

**[0362]** The electronic device (e.g., 800) receives (908) a first user input (e.g., 806 of FIG. 8B) representing selection of the playback device selection affordance (e.g., 804E).

**[0363]** In response to receiving the first user input (e.g., 806), the electronic device (e.g., 800) displays (910), on the display (e.g., 802), one or more affordances (e.g., affordances 804B-804K) associated with a plurality of available playback devices (e.g., the device sets iPhone, Bedroom, Kitchen, and/or Living Room of FIG. 8C) connected to the device (e.g., 800). In some examples, available playback devices are devices that are connected to the device such that the electronic device can control or otherwise use the available playback devices to initiate playback of media content (e.g., via instructions transmitted over a communication link). In some examples, the available devices are connected (e.g., to the electronic device) via a wireless connection (e.g., via Wi-Fi, Apple Airplay, or the like). In some embodiments, the plurality of available playback devices includes the electronic device.

**[0364]** Displaying one or more affordances associated with a plurality of available playback devices connected to the device provides the user with visual feedback about the state of a plurality of devices that are available for media playback. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0365]** Displaying one or more affordances associated with a plurality of available playback devices connected to the device allows the user to collectively view a plurality of states for a plurality of available devices in one optimized interface. Providing an optimized interface to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0366]** The electronic device (e.g., 800) receives (912) a second user input (e.g., 812 of FIG. 8D) representing selection of the one or more affordances (e.g., affordance 810J of FIG. 8D) associated with the plurality of available playback devices. In some examples, the electronic

device receives selection of several devices (e.g., via selection of indicators 810H and 810I as shown in FIG. 8E), or receives selection of a single indicator (e.g., 810J FIG. 8D) representing a plurality of devices.

**[0367]** In response to receiving the second user input (e.g., 812), the electronic device (e.g., 800) configures (914) the device to initiate playback on the plurality of available playback devices (e.g., the devices in the set “Kitchen + Living Room” represented by affordance 810J of FIG. 8D, and individually by affordances 804D and 804E of FIG. 8E). In some embodiments, configuring the device to initiate playback comprises initiating playback on the plurality of available playback devices. In some embodiments, playback is not initiated in response to configuring the device to initiate playback on the plurality of available playback devices, but if a command to initiate playback of media is subsequently received by the device, playback will be initiated on the plurality of available playback devices. Thus, in some examples, configuring a device to initiate media playback, on one or more devices, “retargets” the device (e.g., as described above) on the one or more devices, for example, to control and/or output playback on a plurality of available devices.

**[0368]** Configuring a device to initiate playback on the plurality of available playback devices allows the user to collectively control a plurality of available devices in one optimized interface. Providing an optimized interface to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0369]** In some embodiments, configuring the device to initiate playback on the plurality of available playback devices comprises transmitting an instruction to the available playback devices to initiate playback (e.g., the devices in the set “Kitchen + Living Room” represented by affordance 810J of FIG. 8D, and individually by affordances 804D and 804E of FIG. 8E).

**[0370]** In some embodiments, while the electronic device (e.g., 800) is configured to initiate playback on the plurality of available playback devices (e.g., devices represented by affordances 804D and 804E of FIG. 8E), and after ceasing to display the one or more affordances (e.g.,

affordances 804B-804K) associated with the plurality of available playback devices (e.g., the device sets iPhone, Bedroom, Kitchen, and/or Living Room of FIG. 8C), the electronic device receives a third user input (e.g., 824 of FIG. 8J), representing a request to initiate playback of a second media item (e.g., represented by 820B of FIG. 8J). For example, while the electronic device is targeting the plurality of available playback devices, the third user input is received after ceasing to display multi-device interface 810. In response to receiving the third user input, the electronic device transmits a request to initiate playback of the second media on the plurality of available playback devices (e.g., the device set “Kitchen + Living Room” indicated by device selection affordance 824E of FIG. 8K). In some embodiments, the third user input is received at a browser interface (e.g., 820 of FIG. 8I). In some examples, a browser interface is an interface for browsing and selecting media items for playback (e.g., a music application, a video application). The browser interface can be displayed after configuring the device to initiate playback on the plurality of available playback device at a multi-device interface, and after ceasing to display (e.g., dismissing, exiting) the multi-device interface. In some examples, the device remembers that playback of selected media will be initiated on the plurality of available devices that were selected at the multi-device interface (e.g., as shown in FIG. 8F). In some embodiments, the third user input is selection of an affordance of the browser interface. For example, such as an affordance associated with a media item, such as a song or video. In some embodiments, transmitting a request to initiate playback of the second media comprises transmitting an address (e.g., a URL) that is usable to stream the media. In some embodiments, transmitting a request to initiate playback of the second media comprises transmitting a stream of the media from the electronic device to the plurality of available devices.

**[0371]** In some embodiments, the first current media interface (e.g., 804 of FIG. 8A) for the electronic device (e.g., 800) includes an indication (e.g., 804A, 804B, 804C, and/or 804D) of a media item currently playing back on the device, and further in response to receiving the first user input (e.g., 806), the electronic device (e.g., 800) concurrently displays, on the display (e.g., 802): a first region (e.g., 828A of FIG. 8D) that includes the one or more affordances (e.g., 804B-804K) associated with the plurality of available playback devices; and a second region (e.g., 828B of FIG. 8D) that includes the indication (e.g., 804A, 804B, 804C, and/or 804D) of the media item currently playing back (e.g., “Same Thing” by “Jambug” as indicated by indicator 810A of FIG. 8D) on the electronic device (e.g., 800). Further in response to receiving the

second user input (e.g., 812 of FIG. 8D), the electronic device (e.g., 800) visually updates the second region (e.g., 828B of FIG. 8D) to display an indication of a media item currently playing back (e.g., “Heart Wave” by “MKTS” as indicated by indicator 810J of FIG. 8E) on the plurality of available playback devices (e.g., the device set “Kitchen + Living Room” represented by indicator 810J of FIG. 8E).

**[0372]** In some embodiments, the one or more affordances (e.g., 810J of FIG. 8D) associated with the plurality of available playback devices connected to the device include information (e.g., “Heart Wave” by “MKTS” as indicated by indicator 810J of FIG. 8E) identifying media currently being played back by the plurality of available playback devices.

**[0373]** In some embodiments, the information identifying the media currently being played back by the plurality of available playback devices includes one or more of: a song title, an artist, a movie title, an episode name, and a URL (e.g., “Heart Wave” by “MKTS” as indicated by indicator 810J of FIG. 8E).

**[0374]** In some embodiments, while the electronic device (e.g., 800) is configured to initiate playback on the plurality of available playback devices (e.g., the device set “Kitchen + Living Room” represented by indicator 810J of FIG. 8E), the electronic device transmits an instruction to initiate media playback of a third media item (e.g., “Same Thing” by “Jambug”, as indicated by the active media session indicator 810A of FIG. 8M) on the plurality of available playback devices (e.g., the device set Kitchen and the device set Living Room respectively corresponding to indicators 810D and 810E of FIG. 8M), wherein the plurality of available playback devices are currently playing a fourth media item (e.g., “Heart Wave” by “MKTS”, as indicated by the active media session indicator 810J of FIG. 8M) that was initiated by another device (e.g., the device named “Bob’s iPhone” identified by indicator 810J of FIG. 8M) different than the electronic device (e.g., 800). Subsequent to transmitting the instruction to initiate playback of the third media item, the electronic device (e.g., 800) receives an indication (e.g., as shown by indicator 810A of FIG. 8O, checkmarks in indicators 810H and 810I) that the plurality of devices are currently playing back the third media item (e.g., “Same Thing” by “Jambug”, as indicated by the active media session indicator 810A of FIG. 8O).

**[0375]** In some embodiments, the electronic device (e.g., 800) determines that the plurality of available playback devices (e.g., the device set Kitchen and the device set Living Room respectively corresponding to indicators 810D and 810E of FIG. 8M) are currently playing content (e.g., “Heart Wave” by “MKTS”, as indicated by indicator 810J of FIG. 8M) that was initiated by another device (e.g., “Bob’s iPhone” as indicated by indicator 810J of FIG. 8M). In accordance with the determination that the plurality of available playback devices are currently playing content that was initiated by another device, the electronic device requests (e.g., displays prompt 834 of FIG. 8N) user input confirmation (e.g., selection of affordance 834B or 834C of FIG. 8N) of the instruction to initiate media playback of a third media item on the plurality of available playback devices. The electronic device (e.g., 800) receives a user input response (e.g., selection of affordance 834B or 834C of FIG. 8N) to the request for user input confirmation. In accordance with the user input response being a positive confirmation (e.g., selection of affordance 834B FIG. 8N), the electronic device transmits the instruction to initiate media playback of the third media item on the plurality of available playback devices. In accordance with the user input response being a negative confirmation (e.g., selection of affordance 834C FIG. 8N), forgoing transmitting the instruction to initiate media playback of the third media item on the plurality of available playback devices.

**[0376]** In some embodiments, further in response to receiving the second user input (e.g., 812 of FIG. 8D), the electronic device (e.g., 800) ceases displaying (e.g., replaces display with current media interface 816 of FIG. 8G) the one or more affordances (e.g., the affordances included in 810 of FIG. 8D) associated with the plurality of available playback devices.

**[0377]** In some embodiments, a media item includes one or more of audio data, video data, or both.

**[0378]** Note that details of the processes described above with respect to method 900 (e.g., FIG. 9 are also applicable in an analogous manner to the methods described below/above. For example, method 700, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 900. For brevity, these details are not repeated below.

[0379] FIGS. 10A-10O illustrate exemplary user interfaces for configuring an electronic device, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 11.

[0380] FIG. 10A illustrates an exemplary smart speaker device. Device 1000 is a smart speaker device, and can include one or more features of device 580 as described above. In some embodiments, device 1000 includes one or more features of device 100, 300, or 500. As shown in FIG. 10A, device 1000 can include one or more LED indicators, which are shown displaying a rotating swirling pattern 1004 in FIG. 10A. In some examples, the LED indicators display a pattern (e.g., also referred to as a “boot up pattern”) when device 1000 is powered on for the first time (e.g., during boot up of the device). The pattern 1004 can be created by one or more LED indicators or other display elements (e.g., a display panel), which are referred to herein interchangeably, unless otherwise noted. In some examples, LED indicators are positioned under a touch-sensitive surface of device 1000. FIG. 10B illustrates three concentric rings, 1006A, 1006B, and 1006C that represent concentric rings of discrete LED indicators that comprise an LED indicator that forms pattern 1004. The rings 1006A-1006C can be used to create the boot up pattern (e.g., pattern 1004). In some examples, other arrangements of lighting elements are used. When device 1000 is finished booting up, or is otherwise ready to pair (e.g., with another device) and/or be configured, the pattern 1004, in some examples, can change. For example, the pattern may transition to a pulsing pattern (e.g., progressively lighting up each concentric ring 1006A-1006C, and then turning them off in reverse order).

[0381] As shown in FIG. 10A, device 1000 has limited display capabilities, and thus configuration of device 1000 can be made easier by the use of a second device having more robust display capabilities. In some examples, device 1000 is a smart home device (e.g., a network connected speaker) that a user places within their home (e.g., in one location, or moving between many locations). In such case, the user has physical access to the device when configuring it, and thus the use of physical proximity can be used as part of an intuitive and easy to use interface for configuring the device 1000. Thus, rather than making a user navigate various menus attempting to establish or access communication between a personal device (e.g., device 1010) and the device 1000, a user can place their personal device near device 1000, for example, as part of a configuration process.

**[0382]** FIGS. 10C-10G illustrate exemplary physical arrangements of a first device and a second device. FIG. 10C illustrates a first scenario that includes first device (e.g., device 1000) sitting on a table, and a user holding a second device (e.g., personal device 1010) at a long distance away from the first device. In some embodiments, device 1010 includes one or more features of device 100, 300, or 500. FIG. 10D illustrates an exemplary overhead view of the first scenario. As shown in FIG. 10D, device 1000 and device 1010 are far apart. FIG 10D includes the proximity condition range indicator 1008. A proximity condition range indicator is also referred to herein as a “proximity zone indicator” or simply as a “proximity zone”. Device 1010 is not inside of proximity condition range indicator 1008. Proximity condition range indicator 1008 is included as a visual aid, and is intended to represent a physical proximity that would satisfy a proximity condition. For example, range indicator 1008 can represent the range of a near-field communication detection circuitry of device 1000. In some embodiments, any appropriate technique can be used to detect proximity between devices. For instance, in some examples, wide-band wireless connection is used. Wide-band wireless connection is used, for example, to determine one or more of: directionality, distance, and orientation, of one or more devices. Thus, presence of a detectable device within (e.g., partially or completely) within the proximity condition range indicator 1008 would satisfy a proximity condition, but would not if the detectable device is located outside of the range indicator 1008. One of skill would appreciate that a detection range of physical proximity can be non-uniform, can be affected by numerous variables (e.g., wireless interference, air humidity, or the like), and can include points in space in three dimensions, all of which are intended to be within the scope of this disclosure. Thus, the graphical representation of proximity condition range indicator 1008 is not intended to limit the scope of determining whether a proximity condition is satisfied.

**[0383]** FIG. 10E illustrates a second scenario that includes first device (device 1000) sitting on a table, and a user holding a second device (personal device 1010) at a short distance away from the first device. FIG. 10F illustrates an exemplary overhead view of the second scenario. As shown in FIG. 10F, device 1000 and device 1010 are close together and now device 1010 is at least partially within the proximity condition range indicator 1008. Because proximity condition range indicator 1008 represents a physical proximity that satisfies the proximity condition, the first device 1000 detects an indication that a physical proximity between the first device and the second device 1010 satisfies the proximity condition. In some examples, in



accordance with detecting that a proximity condition is satisfied, device 1000 initiates a configuration process. For example, the device 1000 can enter a configuration mode for receiving configuration data (e.g., settings, account information, and the like) from the second device. In some examples, in accordance with detecting that a proximity condition is satisfied, device 1000 proceeds to a next step in a configuration process. For example, if the device 1000 is already in a configuration mode, the satisfaction of a proximity condition can cause the device 1000 to proceed to a next step. For instance, satisfaction of the proximity condition can be required in order to verify the identity of the second device or verify that the user of the second device has physical access to device 1000 (e.g., is not a user outside of the home that is attempting to remotely access and configure device 1000).

**[0384]** FIGS. 10G-10J illustrate exemplary techniques for using audio tone signals when configuring a device. FIG. 10G depicts an overhead view similar to FIG. 10F, but additionally depicts device 1000 outputting an audio tone signal 1014 (e.g., depicted as graphical representations of sound waves). In this example, speaker 1000 plays an audible tone. In some examples, the tone is part of a proximity handshake tone at the beginning of a configuration process (e.g., to initiate the process), or a tone later in (e.g., during) the configuration process. In some embodiments, the audio tone signal is out-of-band to a communication link between the first device and the second device. For example, the first and second devices are connected and exchange data communications over a Bluetooth wireless connection (e.g., a communication link). In this example, while the devices continue to be connected via the Bluetooth connection (e.g., the devices detect each other of Bluetooth and perform a handshake), an audio tone signal (e.g., an audible tone that includes or represents a communication between the devices) is out-of-band with the Bluetooth communication link. In some embodiments, being out-of-band to a communication link means that a signal (e.g., an audio tone signal) is not communicated using the same data exchange technique. In some examples, using a different data exchange technique can include one or more of using a different: transmission protocol (e.g., Bluetooth, Wi-Fi), data carrier technology (e.g., sound (mechanical) waves instead of light (electromagnetic) waves), hardware (e.g., wireless antenna instead of a wired connector), or the like. In some embodiments, an audio tone signal is a sound traveling through a transmission medium (e.g., that is detectable by another device). For example, an audio tone signal can include frequencies

inside of the human audible frequency range (e.g., approximately 20 Hertz to 20,000 Hertz), and/or include frequencies outside of the human audible frequency range.

**[0385]** FIG. 10H illustrates an exemplary perspective view of the overhead view of FIG. 10G. As can be seen, a user is holding second device 1010 a short distance away from device 1000, which is outputting the audio tone signal 1014.

**[0386]** FIG. 10I illustrates an exemplary perspective view where the second device 1010 is outputting a second audio tone signal 1016 (e.g., which may referred to as a response audio tone signal). In some embodiments, a response audio tone signal 1016 (also referred to as a “second audio tone signal”) is output by the second device in response to the second device detecting the audio tone signal by device 1000. For example, device 1010 can play a response tone immediately in response to detecting the tone signal 1014, in order to communicate to the device 1000 that the first audio tone signal was received. In some embodiments, a response tone signal is a tone signal that is output by the second device at a later step in the configuration process. For example, the first tone signal (e.g., 1014) can represent an audible indication that the configuration process has been initiated (e.g., and proceeds to a first step of the process), and subsequent to initiating the configuration process for the second device (e.g., using the first device), the second device can output the second audio tone signal (e.g., 1016) at a fourth step of the configuration process. In some embodiments, the response tone signal includes encoded data. For example, as part of the configuration process for the second device, the second device (e.g., a personal device 1010 that is already associated with a user’s account) can pass account login information to the first device (e.g., so that the device 1000 can access or update data associated with the user’s account) via encoded data in an audio tone signal. This technique can be used, for example, when transmission of such data by other means may be unsecure (e.g., may be intercepted). In some examples, data is encoded in an audio tone signal by any appropriate technique, as one of skill in the art would appreciate. For example, an audio tone signal can include tones at a particular frequency representing data signatures. In some examples, an audio tone signal includes modulated carrier sound waves that carry data information.

**[0387]** In some embodiments, the first device repeats the audio tone signal until it receives a confirmation that the second device detected the audio tone signal. For example, device 1000

can repeat output of audio tone signal 1014 until receiving confirmation that device 1010 detected the signal 1014. For example, the confirmation can be a response tone (e.g., second audio tone signal 1016; “out-of-band”) or a communication over the communication link (e.g., Bluetooth, Wi-Fi, or the like; “in-band”) between the two devices.

5   **[0388]**     In some embodiments, the first device repeats the audio tone signal for a predetermined number of times. In some embodiments, the first device repeats the audio tone signal for a predetermined number of times or until a confirmation that the second device detected the audio tone signal is received, whichever comes first. For example, device 1000 can repeat the audio tone signal 1014 three times before it ceases repeating the tone, if no  
10   confirmation is received (e.g., response tone signal 1016).

**[0389]**     In some embodiments, the first device outputs a dictated audio passcode. As shown in FIG. 10J, device 1000 outputs an audio tone signal 1018 that includes the dictated text “The passcode is 061917”. In this example, the user can enter the passcode “061917” into device 1010, for example, to initiate or proceed to a next step in the configuration process for  
15   configuring the first device 1000. Thus, if the audio tone signal is not detected by the second device (e.g., device 1000 does not receive a confirmation), device 1000 can output a dictation of a passcode that can, for example, be used to proceed to a next step in the configuration process or authorize data exchange between the two devices. For example, a user can enter the dictated passcode into device 1010, or repeat the passcode back to device 1000 (e.g., using voice input).  
20   Thus, if the audio tone signal was being used as part of a process of confirming the identity of the first device or second device, but the second device cannot detect the audio tone signal, the user can use the dictated audio passcode to achieve the same effect. For example, using the passcode confirms that the device 1010 is within a relatively close physical proximity by virtue of the user hearing and entering the dictated audio passcode.

25   **[0390]**     In some embodiments, device 1000 outputs encoded data visually. For example, LED indicators (e.g., 1006A-1006B) can be used to output a pattern or sequence of light emission that is detectable by another device (e.g., 1010) and that includes or otherwise represents data information. The other device can, for example, capture or record the light

pattern and decode the data, or transmit the captured data back to the device to verify that the other device observed the light pattern.

**[0391]** In some embodiments, during a configuration process, configuration data is received and stored by device 1000. Examples of configuration data include, but are not limited to, one or more of: whether a device (e.g., 1000 or 1010) is a member of a group of devices (e.g., home devices, or a stereo pair), a name or identifier of the device, a user associated with the device, a location (e.g., a room name) of the device, user account credentials (e.g., for network or cloud-based services such as iCloud, iTunes, Apple Music, Spotify, or the like). Configuration data for device 1000 can also be added or edited in a home control application (e.g., as shown in FIG. 6A).

**[0392]** In some embodiments, the first device is configured to be included in a group of devices. FIG. 10K illustrates two devices—first device 1000 and third device 1020—that make up an exemplary group of devices. As shown in FIG. 10K, the first and third devices are both smart speaker devices (e.g., such as device 580). In some embodiments, each device in the group of devices is configured to output an audio channel. FIG. 10K shows the first and third devices placed on either side of a television. In this example, device 1000 is configured to output a left audio channel (e.g., of a stereo audio signal) and the device 1020 is configured to output a right audio channel (e.g., of a stereo audio signal). Thus, the devices in FIG. 10K can be referred to as a “stereo pair”, a “stereo group”, or the like. In some embodiments, devices in a group are configured to output identical channels. For example, referring again to FIG. 10K, both devices 1000 and 1020 can be configured to output the same audio signal (e.g., monaural audio). In some examples, a group of devices includes more than two devices. For example, FIG. 10L illustrates a group of devices comprised of device 1000, device 1020, device 1022, and device 1024. As described with reference to FIG. 10K, each device in the group can be configured to output a different audio channel signal (e.g., “rear left” signal on device 1022, “rear right” signal on device 1024, “front left” signal on device 1000, and “front right” signal on device 1020).

**[0393]** In some embodiments, a group of devices (e.g., as shown in FIGS. 10K and 10L), are treated as one device at a user interface for selecting devices for playback. For example, the group of devices 1000 and 1020 of FIG. 10K can be configured as a device set named “Living

Room”. In some examples, a multi-device interface (e.g., multi-device interface 610 of FIG. 6J, as described above) would display one individual indicator (e.g., indicator 610N of FIG. 6J) corresponding to the stereo pair of devices 1000 and 1020. In some examples, the individual indicator includes an indication that it represents a group of devices (e.g., indicator 610N of FIG. 6J can include two graphical speaker icons).

**[0394]** In some embodiments, a group of devices (e.g., as shown in FIGS. 10K and 10L) are displayed separately at a user interface for selecting devices for playback. In some examples, a multi-device interface (e.g., multi-device interface 610 of FIG. 6J, as described above) includes an individual indicator for each device in a group of devices. For example, referring back to the group in FIG. 10K, device 1000 can be made to output a first media item while device 1020 outputs a second media item, concurrently (e.g., using a multi-device interface such as 610 of FIG. 6J).

**[0395]** FIG. 10M depicts an exemplary simplified network diagram of a device group, in accordance with some embodiments. In some embodiments, the first device and the third device establish a communication link between, and communicate with, each other directly. For example, FIG. 10M depicts an access point 1030, which may represent a wireless router, network switch, or the like, that creates a location area network that is connected to both devices 1000 and 1020. In this example, device 1000 is connected to access point 1030 (e.g., as illustrated by communication link 1034). In this example, device 1020 is also connected to access point 1030 (e.g., as illustrated by communication link 1036). In this example, access point 1030 is a wireless router and devices 1000 and 1020 are connected to the same wireless (e.g., Wi-Fi) network generated by the access point 1030. Access point 1030 is also connected to second device 1010 (e.g., illustrated by communication link 1038) as well as to a wide area network (e.g., internet). Thus, device 1000 and 1020 are connected by access point 1030. Devices 1000 and 1020, in some examples, can communicate directly, bypassing the need to exchange communications via access point 1030. For example, devices 1000 and 1020 can create a Wi-Fi network between them (e.g., where one device acts as an access point for the other).

Communication directly with each other, rather than through an access point that each device in the group is connected to, can provide useful benefits. For example, if both devices 1000 and 1020 have a poor connection to access point 1030, synchronization of simultaneous audio

5 playback on the group of devices can be degraded due to increased latency. If devices 1000 and 1020 have a strong connection directly between them, then latency issues are reduced. Further, routing communication directly between devices 1000 and 1020 reduces usage of the access point 1030's bandwidth by reducing traffic on the network created by the access point (e.g., the user's main home Wi-Fi network). As described previously, in some examples, devices 1000 and 1020 do not have to be grouped to communicate directly. For instance, in some examples, devices 1000 and 1020 can communicate directly out-of-the-box, without being configured by the user to form a device group.

10 **[0396]** FIG. 10M also depicts communication link 1039 between device 1010 and device 1000. In some examples, link 1039 is a Bluetooth connection, a Wi-Fi connection, or the like.

**[0397]** FIGS. 10N-10O illustrated exemplary techniques for indicating progress in a configuration process. In some examples, the first device and the second device output synchronized audio tone signals. The synchronized audio tone signals, for example, can be used to indicate progression through a configuration process. In some examples, the synchronized tones are output at the completion of each step of a configuration process. For example, FIG. 10N illustrates device 1000 outputting audio tone signal 1042, and device 1010 is outputting audio tone signal 1044. Audio tone signals 1042 and 1044 are outputting by their respective devices to be synchronized in time (e.g., output such that at least a portion of each tone are played during an overlapping period of time).

20 **[0398]** In some embodiments, synchronized audio tone signals are harmonics. Thus, in some examples, the synchronized audio tone signals are the same audio frequency. For example, audio tone signal 1042 has a frequency of 2000 Hertz, while audio tone signal 1044 has a frequency of 2000 Hertz. In some examples, audio frequency of one of the synchronized audio tone signals is an integer multiple of the audio frequency of the other frequency. For example, 25 audio tone signal 1042 has a frequency of 1000 Hertz, while audio tone signal 1044 has a frequency of 2000 Hertz.

**[0399]** In some embodiments, synchronized audio tone signals are each a different frequency of a musical chord or a musical scale. Thus, for example, the synchronized tones sound (e.g., to a user) like they are in harmony.

**[0400]** In some embodiments, subsequent synchronized audio tone signals have a different audio frequency. For example, to indicate that the configuration process is progressing, the synchronized audio tone signals can increase (e.g., step up) in frequency at each subsequent step in a configuration process. In the example shown in FIG. 10N, synchronized audio tone signals 1042 and 1044 are output by their respective devices upon completion of a first step in a configuration process.

**[0401]** Turning now to FIG. 10O, device 1000 outputs synchronized audio tone signal 1046 and device 1010 outputs synchronized audio tone signal 1048. In this example, the signals 1046 and 1048 are output subsequent to signals 1042 and 1044, and are output upon completion of a second step in the configuration process. Further, signals 1046 and 1048 can be harmonics (e.g., the same audio frequency or integer multiples of the same frequency) or compatible tones (e.g., frequencies in the same musical chord or musical scale). To illustrate the concept that the synchronized audio tone signals change in frequency as a configuration process progress, plot 1040 of FIG. 10O is helpful. Plot 1040 depicts a first point 1040A at a frequency of 2000 Hertz and a second point 1040B at a frequency of 8000 Hertz. First point 1040A represents the frequency of audio tone signals 1042 and 1044, which are output after the first step in the configuration process. Second point 1040B represents the frequency of audio tone signals 1046 and 1048, which are output after the subsequent second step in the configuration process. In some examples, synchronized audio tone signals decrease in frequency as progress during the configuration process progresses. Thus, using synchronized audio tone signals, the first and second devices can audibly indicate progress of a configuration process to the user. For example, the audio tone signals can give the impression of approaching a crescendo or a final completion frequency. As one of skill would appreciate, synchronized audio tone signals can be used to indicate progress of other processes involving two or more devices. Further, as should be apparent, more than two devices can be configured to output synchronized audio tone signals.

**[0402]** FIG. 11 is a flow diagram illustrating a method for configuring an electronic device using a second device in accordance with some embodiments. Method 1100 is performed at a device (e.g., 100, 300, 500, 580). Some operations in method 1100 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0403]** As described below, method 1100 provides an intuitive way for configuring a first device using a second device. The method reduces the cognitive burden on a user for configuring a first device using a second device, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to configure a first device using a second device faster and more efficiently conserves power and increases the time between battery charges.

**[0404]** The electronic device (e.g., 1000) detects (1102) an indication that a physical proximity between the electronic device (e.g., 1000 of FIG. 10F) and a second device (e.g., 1010 of FIG. 10F) satisfies a proximity condition (e.g., device 1010 is within proximity zone 1008, as illustrated in FIG. 10F), wherein the electronic device (e.g., 1000) is connected to the second device (e.g., 1010) via a communication link (e.g., 1039). In some examples, the electronic device and second device are connected via a wireless data transmission protocol (e.g., Bluetooth, Wi-Fi, or the like). In some embodiments, the indication is detected using a near-field communication technique.

**[0405]** In accordance with detecting the indication, the electronic device audibly outputs (1104) an audio tone signal (e.g., 1014), wherein the audio tone signal is out-of-band to the communication link (e.g., 1039). For example, the device is a speaker that plays a tone. In some examples the tone is a proximity handshake tone at the beginning of a configuration process. In some examples the tone is played by the speaker during the configuration process (e.g., after it begins). In some embodiments, being out-of-band to a communication link means that a signal (e.g., an audio tone signal) is not communicated using the same data exchange technique.

**[0406]** Using a detection of physical proximity allows the user to efficiently move through a configuration process for a device with fewer required user inputs. Providing an optimized configuration process to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.



**[0407]** Subsequent to outputting the audio tone signal (e.g., 1014), the electronic device (e.g., 1000) determines (1106) whether a response audio tone signal (e.g., 1016) from the second device (e.g., 1010) has been received.

**[0408]** In accordance with a determination that the response audio tone signal (e.g., 1016) from the second device (e.g., 1010) has been received, the electronic device (e.g., 1000) proceeds (1108) to a next step in a configuration process. In some embodiments, a configuration process includes receiving one or more configuration settings for the electronic device. In some examples, configuration settings include one or more of: a location (e.g., room name) of the electronic device, a device identifier (e.g., a name), whether the electronic device is a member of a group of devices (e.g., a left or right channel of a stereo pair of speakers), user account credentials (e.g., allowing the electronic device to log into a cloud-based service), audio output preferences (e.g., language, volume), content restrictions (e.g., parental controls), or the like.

**[0409]** Proceeding to a next step in a configuration process in accordance with a determination that a response audio tone signal has been received allows the user to efficiently move through a configuration process for a device with fewer required user inputs. Providing an optimized configuration process to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0410]** In accordance with a determination that the response audio tone signal from the second device has not been received, the electronic device (e.g., 1000) forgoes (1110) proceeding to the next step in the configuration process. For example, if the device does not detect a response audio tone signal (e.g., 1016) within a threshold amount of time after outputting an audio tone signal, the device can timeout (e.g., stop listening for a response audio tone signal), can repeat the tone, or dictate an audio passcode aloud.

**[0411]** In some embodiments, the response audio tone signal (e.g., 1016) represents an indication that the audio tone signal (e.g., 1014) was detected by the second device (e.g., 1010).

**[0412]** In some embodiments, at least one of the audio tone signal (e.g., 1014) and the response audio tone signal (e.g., 1016) comprises encoded data. In some embodiments, the encoded data comprises an indication of the outputting device's identity. For example, the encoded data can include an audible representation of data sent from one device to the other.

5 Audibly outputting the data from one device such that the other device can detect it (e.g., using a microphone) can provide sufficient indication that the second device and the electronic device are within a relative close physical proximity to each other. In some embodiments, the encoded data includes user account credentials. For example, the encoded data can include data representing user account information for a cloud-based service (e.g., iCloud login information),  
 10 a media streaming service (e.g., Apple Music), or data for confirming that the electronic device (e.g., 1000) should be provided access to the user's account or personal data.

**[0413]** In some embodiments, the response audio tone signal (e.g., 1016) comprises encoded data, and further in accordance with a determination that the response audio tone signal from the second device (e.g., 1010) has been received, the electronic device (e.g., 1000) converts the  
 15 encoded data, of the response audio tone signal, into decoded data. In some embodiments, the electronic device (e.g., 1000) uses at least a portion of the decoded data to log in to a user account of a cloud-based service. For example, if the encoded data includes login credentials for a cloud-based service (e.g., iCloud) the electronic device decodes the encoded data into an account user name and/or password, and logs into the cloud-based service.

20 **[0414]** In some embodiments, the response audio tone signal (e.g., 1016) comprises data that confirms the identity of the second device (e.g., 1010). For example, the data that is encoded can be data that was transmitted to the second device that is played back as a tone, or can be a unique identifier associated with the second device.

**[0415]** In some embodiments, the electronic device (e.g., 1000) includes a memory, and the  
 25 electronic device receives one or more configuration settings from the second device (e.g., 1010). In response to receiving the one or more configuration settings, the electronic device stores the configuration settings in the memory of the electronic device. In some examples, configuration settings include one or more of the settings as described above.

**[0416]** In some embodiments, the one or more configuration settings includes a location identifier representing a physical location of the electronic device (e.g., 1000). For example, a location identifier can include a room identifier such as “Living Room”, “Bedroom”, “Bedroom 2”, “Kitchen”, “Tim’s Room”, or the like. In some embodiments, the location identifier is associated with the electronic device (e.g., 1000) and communicated to other devices (e.g., 1010). For example, the identifier can be used in a multi-device interface (e.g., 610 of FIG. 6J) or in a device management application (e.g., as shown in FIG. 6A) to provide an intuitive and/or descriptive identification of the device.

**[0417]** In some embodiments, the one or more configuration settings includes an indication that the electronic device (e.g., 1000) is included in a device group (e.g., a group comprised of device 1000 and 1020 of FIG. 10K), wherein the device group includes the electronic device (e.g., 1000 of FIG. 10K) and a third device (e.g., 1020 of FIG. 10K). For example, a device group includes two or more devices (e.g., smart speakers) configured to coordinate (e.g., synchronize) output of media (e.g., audio). In some embodiments, the devices in a device group (e.g., a speaker pair, such as left and right channels 1000 and 1020 of FIG. 10K, respectively) are treated as one unit. For example, the devices in a device group can be identified (e.g., at a multi-device user interface) by a single device group identifier (e.g., “Living Room”) rather than as individual devices. Thus, a command to “Play audio in the Living Room” can cause all devices in the group “Living Room” to playback the audio.

**[0418]** In some embodiments, the first device (e.g., 1000) and the second device (e.g., 1010) are connected to a local area network via an access point (e.g., 1030). In some embodiments, the electronic device (e.g., 1000) establishes a communication link (e.g., 1032) to the third device (e.g., 1020 of FIG. 10M), wherein the communication link to the third device does not include the access point (e.g., 1030). In some embodiments, the communication link utilizes a wireless communication protocol. In some embodiments, the communication link is a wired connection between the electronic device and the third device. In some examples, the access point is a network router, a network switch, or other hardware for communicatively coupling a plurality of devices. In some embodiments, the electronic device (e.g., 1000) synchronizes media playback with the third device (e.g., 1010) using the communication link (e.g., 1032) to the third device.

**[0419]** In some embodiments, to audibly output the audio tone signal, the electronic device (e.g., 1000) audibly outputs the audio tone signal (e.g., 1014), and determines whether the second device (e.g., 1010) detected the audio tone signal. In some embodiments, determining whether the second device detected the audio tone signal includes determining whether data is received over the communication link (e.g., 1038) representing confirmation that the second device (e.g., 1010) detected the audio tone signal (e.g., 1014). In some embodiments, the electronic device receives (e.g., detects) a response audio tone signal (e.g., 1016) from the second device (e.g., 1010) representing confirmation that the second device detected the audio tone signal (e.g., 1014). In accordance with a determination that the second device (e.g., 1010) did not detect the audio tone signal (e.g., 1014), the electronic device (e.g., 1000) repeats audibly outputting the audio tone signal (e.g., 1014). For example, the electronic device plays the tone (e.g., 1014) a second time (or an *n*th time). In accordance with a determination that the second device detected the audio tone signal, the electronic device forgoes repeating audibly outputting the audio tone signal.

**[0420]** In some embodiments, further in accordance with a determination that the second device (e.g., 1010) did not detect the audio tone signal (e.g., 1014), the electronic device (e.g., 1000) determines whether the audio tone signal has been audibly outputted a threshold number of times. In accordance with a determination that the audio tone signal has been audibly outputted a threshold number of times, the electronic device (e.g., 1000) audibly outputs a dictated passcode (e.g., 1018 of FIG. 10J). For example, the threshold number of times can be three. Thus, if the electronic device plays a tone (e.g., 1014) once and repeats the tone twice thereafter, without receiving confirmation (e.g., 1016) that the second device detected the audio tone signal, the electronic device can (e.g., on the fourth occurrence) output a dictated passcode instead of replaying the tone. In some embodiments, a passcode includes one or more alphanumeric characters. In some embodiments, audibly outputting a dictated passcode includes reading out individual characters of the passcode. For example, a text-to-speech algorithm is used to audibly output the passcode (e.g., as a phrase, as individual characters). In some embodiments, audibly outputting a dictated passcode includes reading out a phrase (e.g., formed by a plurality of alphanumeric characters). In accordance with a determination that the audio tone signal has not been audibly outputted a threshold number of times, the electronic device

forgoes audibly outputting a dictated passcode. In some embodiments, the electronic device repeats outputting the audio tone signal until reaching the threshold number of times.

**[0421]** In some embodiments, the audio tone signal (e.g., 1014) is a first audio tone signal, and in response to progressing from a first step in the configuration process to a second step in the configuration process, the electronic device (e.g., 1000) outputs a second audio tone signal (e.g., 1042 of FIG. 10N), wherein the second audio tone signal is outputted concurrently with the output of a third audio tone signal (e.g., 1044 of FIG. 10N) outputted by the second device (e.g., 1010), and wherein the second audio tone signal and the third audio tone signal are harmonics. For example, the second audio tone signal and the third audio tone signal are the same frequency or are integer multiples of the same frequency. In some examples, concurrent output of harmonic frequencies by the electronic device and the second device can provide audible feedback to a user of progress through the configuration process. For example, higher pitched (e.g., higher frequency) tones can indicate that the configuration process is near completion. Thus, relative or absolute progress through the configuration process can be provided in an intuitive manner.

**[0422]** In some embodiments, in response to progressing from the second step in the configuration process to a third step in the configuration process, the electronic device (e.g., 1000) outputs a fourth audio tone signal (e.g., 1046 of FIG. 10O), wherein the fourth audio tone signal is outputted concurrently with the output of a fifth audio tone signal (e.g., 1048 of FIG. 10O) outputted by the second device (e.g., 1010), wherein the fourth audio tone signal and the fifth audio tone signal are harmonics, and wherein the fourth audio tone signal is a higher frequency tone than the second audio tone signal (e.g., as illustrated by 1040). In some examples, the concurrently played tones escalate in frequency as progression through the configuration process increases.

**[0423]** Note that details of the processes described above with respect to method 1100 (e.g., FIG. 11) are also applicable in an analogous manner to the methods described below/above. For example, method 700, 900, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 1100. For brevity, these details are not repeated below.

**[0424]** FIGS. 12A-12AM illustrate exemplary user interfaces for controlling media playback, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 13.

**[0425]** As described above (e.g., with respect to FIGS 10A-10F), devices can use the satisfaction of a proximity condition to perform one or more functions. The use of proximity of one device to another device can be used as a clear indicator that a user (e.g., holding one of the devices) would like to perform some action (e.g., invoke an interface) on one or both of the devices. For example, this can prevent a waste of device resources by avoiding excessive user input (e.g., to navigate one or more menus on a device display) in order perform a function. Moreover, this can save the user time as well, for example, by reducing the number of user inputs required to perform a function (e.g., invoke an interface on a display).

**[0426]** In some examples, the satisfaction of a proximity condition between two devices can be used as an indication that a user (e.g., of one of the devices, a mobile device) would like to transfer media playback to or from one device (e.g., the mobile device) to the other device (e.g., a stationary smart speaker). Exemplary techniques are described below.

**[0427]** FIGS. 12A-12F illustrate an exemplary scenario in which a first device and a second device are not playing back media content when they are placed in close proximity.

**[0428]** FIG. 12A illustrates an exemplary scenario in which a user is holding device 1200 (e.g., a personal device, such as device 100, 300, 500) in close proximity to device 1202 (e.g., a smart speaker, such as device 580). In some embodiments, device 1200 includes one or more features of devices 100, 300, or 500. Thus, FIG. 12A is similar to FIG. 10E, the description of which is hereby incorporated by reference. In the example depicted in FIG. 12A, device 1200 and device 1202 are both not currently outputting audio (e.g., are not playing back media). In the example depicted in FIG. 12A, the physical distance between device 1200 and device 1202 satisfies a proximity condition. In some examples, device 1200 detects an indication that the proximity condition is satisfied (e.g., and, in response, initiates communication with device 1202, for example, to send an indication that the condition is satisfied). In some examples, device 1202 detects an indication that the proximity condition is satisfied (e.g., and, in response,

initiates communication with device 1200, for example, to send an indication that the condition is satisfied).

**[0429]** It is noted that FIG. 12A, and the figures that follow, are not necessarily to scale and are included merely as a visual aid. Thus, unless otherwise noted, they are not intended as a limitation on a distance required to be in close proximity or to satisfy a proximity condition.

**[0430]** FIG. 12B illustrates an exemplary media information interface. FIG. 12B, also depicts an overhead view of the scenario of FIG. 12A. As can be seen, device 1200 is within (e.g., at least a portion of the device inside of) the proximity zone 1204 (also referred to as proximity condition range indicator 1204). Device 1200 is inside of proximity condition range indicator 1204, and thus the proximity condition is satisfied. The phrase “close proximity” or “in close proximity”, as used herein, refers to a scenario in which a physical distance between two devices satisfies a proximity condition (e.g., as shown in FIG. 12B and FIG. 10F). Proximity condition range indicator 1204 is included as a visual aid, and is intended to represent a physical proximity that would satisfy a proximity condition. For example, range indicator 1204 can represent the range of a near-field communication detection circuitry of device 1202. Thus, presence of a detectable device within (e.g., partially or completely) the proximity condition range indicator 1204 would satisfy a proximity condition, but would not if the detectable device is located outside of the range indicator 1204. One of skill would appreciate that a detection range of physical proximity can be non-uniform, can be affected by numerous variables (e.g., wireless interference, air humidity, device orientation, among others), and can include points in space in three dimensions, all of which are intended to be within the scope of this disclosure. Thus, the proximity condition range indicator 1204 is not intended as a limitation on the scope of determining whether a proximity condition is satisfied.

**[0431]** FIG. 12B illustrates media information interface 1208 displayed on a display 1206 of device 1200. In some embodiments, device 1200 includes one or more features of device 100, 300, or 500. In some examples, media information interface 1208 is displayed in response to device 1200 being placed (e.g., briefly or continuously) in close proximity with device 1202. Thus, because media information interface 1208 displayed in response to the device being placed

in close proximity, it can referred to as a type of “proximity card” or specifically a “media proximity card”.

**[0432]** In the example shown in FIG. 12B, device 1202 is a device associated with the location (or name) “Kitchen” and is a speaker (e.g., a smart speaker). Thus, proximity card 1208 includes the title 1208B “Kitchen Speaker”, visually indicating the name of the speaker that the user placed device 1200 in close proximity to. Proximity card 1208 also includes an album affordance 1208A representing media content, as well as an identifier 1208C describing the status of the media content. In this example, the media content displayed in proximity card 1208 is content that was recently played on the second device, device 1202 (e.g., Kitchen Speaker). Thus, in this example, when neither device 1200 or device 1202 are currently playing back media content, placing the devices in close proximity causes device 1200 to display an interface for viewing recently played media. In some examples, the recently played media was recently played by the first device (e.g., device 1200). In some examples, the recently played media is media that was recently played on both devices 1200 and 1202. In some embodiments, proximity card 1208 is displayed when one or more of devices 1200 and 1202 are currently playing back media.

**[0433]** At FIG. 12C, device 1200 receives user input 1210 on album affordance 1208A. In some examples, user input 1210 is a tap, touch, deep press, or a press and hold input received at device 1200. In some examples, a first device (e.g., device 1200) continues displaying a proximity card after the first device is no longer in close proximity to a second device (e.g., device 1202).

**[0434]** At FIG. 12D, in response to receiving user input 1210, device 1200 displays current media interface 1212. Current media interface 1212 (also referred to as “now playing screen” 1212) depicts one or more media items that are currently playing back (e.g., on the device 1202). Interface 1212 includes an identifier 1212A of a media item (e.g., the song titled “Same Thing” by artist “Jambug” from the album “Fly Away”), album art 1212B, and device selection affordance 1212C. As described above, a device selection affordance can indicate the current focus of the device. In this example, FIG. 12D depicts that the current media interface 1212 is targeting the Kitchen Speaker. Thus, in response to the user input selection of the affordance



1208A (e.g., representing a media item), device 1200 transmits an instruction to device 1202 to initiate playback of the corresponding media item, and updates the display of device 1200 to include playback controls and a media status of the device 1202. Accordingly, the user is provided a convenient technique for quickly beginning and controlling media playback on a second device (e.g., Kitchen Speaker) using a first device (e.g., person device 1200).

**[0435]** In some examples, current media interface is displayed on lock screen of device 1200. For example, the proximity card 1208 can be displayed while the device 1200 was locked and, while remaining locked, the device receives user input that causes the device to initiate playback of media and update the lock screen (e.g., to display interface 1212).

**[0436]** FIGS. 12E-12F illustrate exemplary techniques for browsing media within a media information interface, in accordance with some embodiments. At FIG. 12E, device 1200 receives user input 1214 on affordance 1208A, wherein affordance 1208B is visible. FIG. 12F shows user input 1214 shift to the left. In this example, user input 1214 was a leftward swipe on the recently played media affordances of proximity card 1208. In some embodiments, user input 1214 is a directional swipe in any direction (e.g., up, down, left, right, etc.). As shown in FIG. 12F, the affordances representing media items have shifted in accordance with the user input 1214. Affordance 1208B is now centered within proximity card, and affordance 1208C (e.g., representing a third media) is now visible.

**[0437]** FIGS. 12G-12N illustrate an exemplary scenario in which a first device and a second device are both playing back media content when they are placed in close proximity.

**[0438]** FIG. 12G illustrates an exemplary scenario in which a user is holding device 1200 (e.g., a personal device) in close proximity to device 1202 (e.g., a smart speaker). Thus, FIG. 12G is similar to FIG. 12A, the description of which is hereby incorporated by reference. In the example depicted in FIG. 12G, device 1200 and device 1202 are both currently outputting audio, as represented by sound waves 1216 (from device 1200) and sound waves 1218 (from device 1202).

**[0439]** FIG. 12H illustrates the states of devices 1200 and 1202 prior to them being placed in close proximity. As can be seen, device 1200 is currently playing back a first media item, as

presented by current media interface 1220. Media indicator 1220A identifies the song titled “Monday Morning” currently playing on device 1200, album art 1220B, device selection affordance 1220C (indicating that device 1200 is targeted on itself, the device named “iPhone”), and playback control affordances 1220D. Device 1202 is currently playing back a media item as well, the song titled “Same Thing” by artist “Jambug”, as represented by media state 1222.

**[0440]** FIG. 12I illustrates an exemplary media information interface. FIG. 12I, also depicts an overhead view of the scenario of FIG. 12G. As can be seen, device 1200 is within (e.g., at least a portion of the device is inside) the proximity zone 1204 (also referred to as proximity condition range indicator 1204). Device 1200 is inside of proximity condition range indicator 1204, and thus is in close proximity (e.g., the proximity condition is satisfied).

**[0441]** FIG. 12I illustrates media information interface 1224 displayed on a display 1206 of device 1200. In some examples, media information interface 1224 is displayed in response to device 1200 being placed (e.g., briefly or continuously) in close proximity with device 1202. Thus, because media information interface 1224 displayed in response to the device being placed in close proximity, it is also referred to as a “proximity card” or specifically a “media proximity card”.

**[0442]** In the example shown in FIG. 12I, device 1202 is a device associated with the location (or name) “Kitchen” and is a speaker (e.g., a smart speaker). Thus, proximity card 1224 includes the title 1224B “Kitchen Speaker”, visually indicating the name of the speaker that the user placed device 1200 in close proximity to. Proximity card 1224 also includes album affordances 1224A and 1224D representing media content (e.g., media items). Proximity card 1224 also includes a volume control affordance 1224C for controlling the volume of the Kitchen Speaker. In this example, the media content displayed in proximity card 1224 is content that is currently playing on the device 1200 (e.g., affordance 1224A), and other media items (e.g., affordance 1224D), for example, media that was recently played on the first device 1200. Proximity card 1224 includes identifier 1224B below affordance 1224A, which indicates which device (e.g., if any) is currently playing back the media item corresponding to affordance 1224A. In this example, identifier 1224B includes a graphic (e.g., which can be animated to convey that music is currently playing) and the text “From iPhone”, which refers to device 1200 in this

example. Proximity card 1224 provides an interface that allows the user to add the device “Kitchen Speaker” into the current playback session (e.g., of “Monday Morning” on device 1200).

[0443] As shown in FIG. 12I, proximity card 1224 also includes device selection affordance 1224E. In some examples, device selection affordance 1224E can be used to change the focus of the proximity card. For example, if the user desired to add the iPhone (e.g., device 1200) to the media session of the Kitchen Speaker (e.g., playback of the song “Same Thing” as shown in FIG. 12H), they can select affordance 1224E and change the targeted device (e.g., of proximity card 1224) to iPhone, and then select the indicator associated with the media item “Same Thing”. For example, after receiving user input on 1224E and selection of the device “iPhone” (e.g., via a drop down menu, or the like), device 1200 updates the display of affordance 1224A to show the album art of the song “Same Thing”, and updates identifier 1224B to include the text “From Kitchen Speaker”.

[0444] In some embodiments, a proximity card is displayed concurrently with a current media interface. In some embodiments, display of a proximity card replaces display of a portion of a current media interface. For example, FIG. 12I shows proximity card 1224 having replaced the album art 1220B of current media interface 1220 (of FIG. 12H). In some embodiments, a proximity card is not displayed concurrently with a current media interface. For example proximity card 1208 of FIG. 12E is not currently displayed with a current media interface (e.g., 1220 of FIG. 12H).

[0445] At FIG. 12J, device 1200 receives user input 1226 representing selection of affordance 1224A. In response to user input 1226, device 1200 displays current media interface 1228, as shown in FIG. 12K. Current media interface 1228 represents an updated version of interface 12H. As can be seen, device selection indicator 1228D has been updated to indicate that the Kitchen Speaker has been added to the media session for the song “Same Thing”—the accompanying text now states “iPhone + Kitchen”. Media indicator 1228A identifies the song titled “Monday Morning” currently playing on device 1200 and device 1202, playback control affordances 1228B, album art 1228C, device selection affordance 1228D (indicating that device

1200 is targeted on itself, the device named “iPhone”, and also targeted on the Kitchen device set).

[0446] FIGS. 12L-12N illustrate exemplary interfaces for controlling media playback on a second device. In some examples, affordance 1224E of FIG. 12I can be used to change the function of the proximity card. For instance, a user may desire to control playback of the existing media session that includes the second device (e.g., device 1202) rather than to add the second device to a media session of the first device (e.g., device 1200). For example, referring back to FIG. 12H, the user may want to maintain the two separate media sessions that are currently playing back on the two devices, but wants to control playback on the second device 1202. In some examples, the device receives selection of affordance 1224E of FIG. 12I and, in accordance with the selection (e.g., with or without additional user input), subsequently changes the displayed proximity card into a current media interface proximity card 1230, as shown in FIG. 12L. In this example, proximity card 1230 of FIG. 12L replaces display of proximity card 1224 of FIG. 12I. Proximity card 1230 is a type of current media interface, but is presented visually as a proximity card (e.g., with a displayed border, and occupying less than all of the display 1206), to visually indicate that it represents a current media interface for a device that was placed in close proximity to device 1200. In some embodiments, in accordance with a selection of 1224E, device 1200 displays a current media interface such as that shown in FIG. 12H (e.g., full size).

[0447] Proximity card 1230 includes an identifier 1230A that indicates the current focus of the proximity card (e.g., Kitchen Speaker), a media identifier 1230B identifying a media item currently being played back by the targeted device (e.g., the song “Same Thing” by “Jambug”), and playback control affordances 1230C for controlling playback of the current media session.

[0448] At FIG. 12M, device 1200 receives user input 1232 associated with a playback control affordance 1230C. In this example, the user input is a selection “next track” affordance. User input 1232 can be a tap, a touch, a deep press, a tap and hold input, or the like.

[0449] At FIG. 12N, in response to user input 1232, device 1200 updates the display of media identifier 1230B to identify the next track (e.g., the song “Tuesday Morning” by “The Fomoers”).

**[0450]** FIGS. 12O-12W illustrate an exemplary scenario in which only a first device is playing back media content when placed in close proximity with to a second device.

**[0451]** FIG. 12O illustrates an exemplary scenario in which a user is holding device 1200 (e.g., a personal device) in close proximity to device 1202 (e.g., a smart speaker). Thus, FIG.

5 12O is similar to FIG. 12A, the description of which is hereby incorporated by reference. In the example depicted in FIG. 12O, device 1200 is currently outputting audio, as represented by sound waves 1234 (from device 1200), and device 1202 is not currently outputting audio (e.g., no media playback).

**[0452]** FIG. 12P illustrates the state of device 1200 immediately prior to being placed in  
10 close proximity with device 1202. As can be seen, device 1200 is currently playing back a first media item, as indicated by current media interface 1220 (e.g., described above with respect to FIG. 12H). Media indicator 1220A identifies the song titled “Monday Morning” currently playing on device 1200.

**[0453]** FIG. 12Q illustrates an exemplary media information interface. FIG. 12Q illustrates  
15 media information interface 1236 displayed on a display 1206 of device 1200. In some examples, device 1200 displays media information interface 1236 in accordance with detecting that device 1200 is in close proximity to device 1202. For example, media information interface 1236 is displayed in response to detecting that device 1200 is within (e.g., at least a portion of the device) the proximity zone 1204 (also referred to as proximity condition range indicator  
20 1204) of device 1202. Thus, the proximity condition is satisfied.

**[0454]** In some examples, media information interface 1236 is displayed in response to device 1200 being placed (e.g., briefly or continuously) in close proximity with device 1202. Thus, because media information interface 1236 displayed in response to the device being placed in close proximity, it is also referred to as a “proximity card” or specifically a “media proximity  
25 card”.

**[0455]** In the example shown in FIG. 12Q, device 1202 is a device associated with the location (or name) “Kitchen” and is a speaker (e.g., a smart speaker). Thus, proximity card 1236 includes the title 1236A “Kitchen Speaker”, visually indicating the name of the device that the

user placed device 1200 in close proximity to (e.g., also referred to as the “focus” or “target” of the proximity card). Proximity card 1236 also includes an action indicator 1236B (e.g., an arrow), indicating that a user input gesture on the proximity card (e.g., in the direction of the arrow) will cause the device to perform an action. Likewise, action indicator 1236D (the text “Push to Play”) indicates to a user that a user input on the proximity card 1236 will cause the device to take action. Additionally, proximity card 1236 includes a media affordance 1236C representing media content (e.g., one or more media items). In this example, media affordance 1236C includes album art for the track titled “Monday Morning” by the artist “The Fomoers” (e.g., as shown in FIG. 12P). In some examples, media affordance 1236C includes other types of visual indications of one or more media items (e.g., text, images, or other appropriate visual representations). In this example, the media content represented (e.g., by affordance 1236C) by the proximity card 1236 is content that is currently playing on the device 1202 (e.g., the Kitchen Speaker). Proximity card 1236 provides an interface that allows the user to add the device “Kitchen Speaker” to the current media session (e.g., of playback of “Monday Morning” on device 1200).

**[0456]** FIGS. 12R-12U illustrate and exemplary push interaction with a media control interface. At FIG. 12R, device 1200 receives user input 1238 on proximity card 1236. At FIG. 12S, user input 1238 has moved across the display (e.g., in the direction of action indicator 1236B). In this example, user input 1238 is a directional swipe gesture. FIG. 12R also illustrates proximity card 1236 has shifted position on the display 1206 in accordance with the directional swipe gesture user input 1238, which will be referred to as the “push position”.

**[0457]** In some examples, device 1200 requires that the proximity card 1236 be held at the push position for a threshold amount of time before performing an action in response. In some examples, device 1200 provides a visual indication of the progress toward satisfying the threshold amount of time. For example, FIG. 12T illustrates push progress indicator 1236E, which is a partially completed ring. In some examples, other types of indicators can be used. Thus, in the example in FIG. 12T, the elapsed time that the proximity card 1236 has been held in the push position is approximately one-quarter of the necessary threshold time. In some embodiments, a requirement to satisfy a threshold amount of time in the push position can be bypassed (e.g., overridden) if a user input (e.g., 1238) satisfies an additional criteria. For

example, if the user input is a deep press or is a swipe past an edge of the display (e.g., through the push position and off the top edge of display 1206), the device can perform the push function immediately in response.

5 [0458] In response to the user input 1238, device 1200 performs an action in response. In some embodiments, the device 1200 “pushes” media playback onto the device 1202. In some examples, device 1200 initiates playback of the media item represented by proximity card 1236 on device 1202 (e.g., transmits an instruction to device 1202 in response to user input 1238). In some examples, playback on device 1200 ceases in response to user input 1238. FIG. 12U illustrates proximity card 1236 upon completion of the push action (e.g., user input 1238 holding  
10 the proximity card 1236 in the push position for longer than the threshold duration). As shown, proximity card 1236 now includes confirmation 1236F (“Playing on Kitchen Speaker”) and push progress indicator 1236E now includes a checkmark. Thus, in this example, when the display 1206 of device 1200 appears as shown in FIG. 12U, the device 1202 is currently playing back the media item “Monday Morning”.

15 [0459] FIG. 12 V illustrates an exemplary current media interface 1220. Current media interface 1220 is displayed subsequent to device 1200 receiving user input 1238 pushing the playback to the Kitchen Speaker. Thus, device 1200 updates the device selection indicator 1220C to indicate that the current focus of the device (e.g., the devices in the current media session) is the Kitchen Speaker. Thus, in this example, playback on the device iPhone (e.g.,  
20 device 1200) ceased and audio playback was handed off to the Kitchen Speaker. In some embodiments, pushing playback includes initiating playback on the target device (e.g., hand off playback) and ceasing playback on the current device (e.g., 1200). In some embodiments, pushing playing includes initiating playback on the target device (e.g., hand off playback) and continuing playback on the current device (e.g., 1200).

25 [0460] FIG. 12W illustrates an alternate technique for pushing media to a second device, in accordance with some embodiments. FIG. 12W depicts current media interface 1220, as described with respect to FIG. 12P. Notably, device 1200 is currently targeted at itself (“iPhone”). Device 1200 receives user input 1239 on device selection affordance 1220C. In some examples, a multi-device interface is displayed in response to user input 1239. As

described above, the multi-device interface can be used to add the second device (e.g., 1202) to the current media session (e.g., effectively pushing playback to it).

[0461] In accordance with some embodiments, media content is automatically transferred from a first device to a second device if the devices are in close proximity for a length of time greater than a threshold length of time. For example, if device 1200 is placed in close proximity to device 1202 for longer than a threshold length of time (e.g., 5 seconds), device 1200 can automatically (e.g., without further user input) transfer playback of media to device 1202. This can be referred to as “automatic push” or “auto-push”. In accordance with some embodiments, media content is automatically transferred from a second device to a first device if the devices are in close proximity for a length of time greater than a threshold length of time. For example, if device 1200 is placed in close proximity to device 1202 for longer than a threshold length of time (e.g., 5 seconds), device 1202 can automatically (e.g., without further user input) transfer playback of media to device 1200. This can be referred to as “automatic pull” or “auto-pull”. When a user places a device in close proximity to another device for an extended period of time, this can be a strong indication that the user wishes playback to transfer between the devices. For example, a user can place their smartphone next to their smart speaker (e.g., 580) after entering their home and have what they were listening to on headphones begin playing on their home sound system, without further input at any device. Thus, by automatically pushing or pulling content from a personal electronic device, the number of user inputs for transferring media playback is reduced.

[0462] FIGS. 12X-12AG illustrate an exemplary scenario in which only a second device is playing back media content when placed in close proximity with to a first device.

[0463] FIG. 12X illustrates an exemplary scenario in which a user is holding device 1200 (e.g., a personal device) in close proximity to device 1202 (e.g., a smart speaker). Thus, FIG. 12X is similar to FIG. 12A, the description of which is hereby incorporated by reference. In the example depicted in FIG. 12X, device 1200 is not currently outputting audio, and device 1202 is currently outputting audio (e.g., media playback), as represented by sound waves 1240 (from device 1202).



**[0464]** FIG. 12Y illustrates an exemplary media information interface. In some examples, device 1200 displays media information interface 1242 in accordance with detecting that device 1200 is in close proximity to device 1202. For example, media information interface 1242 is displayed in response to detecting that device 1200 is within (e.g., at least a portion of the device is inside) the proximity zone 1204 (also referred to as proximity condition range indicator 1204) of device 1202. Thus, the proximity condition is satisfied.

**[0465]** FIG. 12Y illustrates media information interface 1242 displayed on a display 1206 of device 1200. In some examples, media information interface 1242 is displayed in response to device 1200 being placed (e.g., briefly or continuously) in close proximity with device 1202. Thus, because media information interface 1242 displayed in response to the device being placed in close proximity, it is also referred to as a “proximity card” or specifically a “media proximity card”.

**[0466]** In the example shown in FIG. 12Y, proximity card 1242 includes the title 1242A “iPhone”, visually indicating the name of the device (e.g., device 1200) that is the target of the proximity card action (e.g., will receive media playback in response to appropriate user input on the proximity card). Proximity card 1242 also includes an action indicator 1242C (e.g., an arrow), indicating that a user input gesture on the proximity card (e.g., in the direction of the arrow) will cause the device to perform an action. Likewise, action indicator 1242D (the text “Pull down to play on iPhone”) indicates to a user that a user input on the proximity card 1242 will cause the device to take action. Additionally, proximity card 1242 includes a media affordance 1242B representing media content (e.g., one or more media items). In this example, media affordance 1242B includes album art for the track titled “Same Thing” by the artist “Jambug” (e.g., that is currently playing on device 1202). In some examples, media affordance 1242B includes other types of visual indications of one or more media items (e.g., text, images, or other appropriate visual representations). In this example, the media content represented (e.g., by affordance 1242B) by the proximity card 1242 is content that is currently playing on the device 1202 (e.g., the Kitchen Speaker). Proximity card 1242 provides an interface that allows the user to add the device “iPhone” (e.g., 1200) to the current media session (e.g., of playback of “Same Thing” on device 1202) of another device in close proximity (e.g., device 1202).

[0467] FIGS. 12Z-12AC illustrate and exemplary pull interaction with a media control interface. At FIG. 12Z, device 1200 receives user input 1244 on proximity card 1242. At FIG. 12AA, user input 1244 has moved across the display (e.g., in the direction of action indicator 1242C). In this example, display 1206 is a touch-sensitive display. In this example, user input 1244 is a directional swipe gesture. FIG. 12AA also illustrates proximity card 1242 has shifted position on the display 1206 in accordance with the directional swipe gesture user input 1244, which will be referred to as the “pull position”.

[0468] In some examples, device 1200 requires that the proximity card 1242 be held at the pull position for a threshold amount of time before performing an action in response. In some examples, device 1200 provides a visual indication of the progress toward satisfying the threshold amount of time. For example, at FIG. 12AB illustrates pull progress indicator 1242E, which is a partially completed ring. In some examples, other types of indicators can be used. Thus, in the example in FIG. 12AB, the elapsed time that the proximity card 1242 has been held in the push position is approximately one-quarter of the necessary threshold time. In some embodiments, a requirement to satisfy a threshold amount of time in the push position can be bypassed (e.g., overridden) if a user input (e.g., 1244) satisfies an additional criteria. For example, if the user input is a deep press or is a swipe past an edge of the display (e.g., through the push position and off the top edge of display 1206), the device can perform the pull function immediately in response.

[0469] In response to the user input 1242, device 1200 performs an action in response. In some embodiments, the device 1200 “pulls” media playback onto the device 1200. In some embodiments, pulling playback includes initiating playback on the current device (e.g., 1200) and ceasing playback on the external device (e.g., 1202). In some embodiments, pulling playback includes initiating playback on the current device (e.g., 1200) and continuing playback on the external device (e.g., 1202).

[0470] In some examples, device 1200 initiates playback of the media item represented by proximity card 1242. In some examples, playback on device 1202 ceases in response to user input 1242 or in response to device 1200 initiating playback. FIG. 12AC illustrates proximity card 1242 upon completion of the pull action. As shown, proximity card 1242 now includes

confirmation 1242F (“Playing on iPhone”) and pull progress indicator 1242E now includes a checkmark. Thus, in this example, when the display 1206 of device 1200 appears as shown in FIG. 12AC, the device 1200 is currently playing back the media item titled “Same Thing”.

[0471] FIG. 12AD illustrates an exemplary current media interface 1246. Current media interface 1246 is displayed subsequent to device 1200 receiving user input 1244 and pulling the playback to the iPhone. Current media interface 1246 includes a media identifier 1246A (e.g., showing the track titled “Same Thing” by “Jambug”), device selection affordance 1246B (e.g., showing focus is on the iPhone), media playback indicator 1246C (showing temporal progress of playback of the current media item), and playback control affordances 1246D. As shown in FIG. 12AD, device 1200 updates the device selection indicator 1246B to indicate that the current focus of the device (e.g., the devices in the current media session) is the iPhone (e.g., device 1200). Thus, in this example playback on the device Kitchen Speaker (e.g., device 1202) ceased and audio playback was handed off to the iPhone (e.g., device 1200).

[0472] In some examples, if device 1200 is associated with a personal listening device (e.g., headphones), device 1200 automatically pulls the media playback from device 1202 and initiates the playback on the personal listening device. For example, as shown in the current media interface 1246 of FIG. 12AE, the playback of the pulled media item “Same Thing” is currently playing back on the headphones named “AirPods” (e.g., indicated by device selection indicator 1246B). For example, if a user is about to leave their home and would like to take music with them (e.g., to go running), device 1200 routes the music to an associated set of headphones (e.g., if turned on and/or being worn by the user) without first beginning playback on a speaker of device 1200 in response to user input 1244.

[0473] FIG. 12AF-12AG illustrates an exemplary alternate technique for interacting with a proximity card, in accordance with some embodiments. FIG. 12AF depicts proximity card 1242, with a user input 1248 on the media affordance 1242B. In some examples, user input 1248 is a tap, a touch, a deep press, or a press and hold input, or the like. At FIG. 12AG, device 1200 displays a current media interface 1250 that is targeted at the Kitchen Speaker in response to user input 1248. Current media interface 1250 includes a device selection affordance 1250A (e.g., indicating the focus of the interface 1250) and playback control affordances 1250B. Thus, if a

user wishes to control playback on the Kitchen speaker, rather than pull the media to the iPhone, a tap on the proximity card can be used to reveal a current media interface targeted to the Kitchen Speaker's media session.

**[0474]** FIGS. 12AH-12AJ illustrate exemplary interfaces for transferring playback of video content between devices. In the examples described above, reference was made to transferring playback of media, and in particular audio. In some embodiments, media content includes video content. For example, a media item can be a video file or a video stream. Thus, the techniques described above are applicable to video content as well.

**[0475]** For example, FIG. 12AH illustrates playback of exemplary video content 1252 on device 1200. FIG. 12AI illustrates an exemplary proximity card 1254 for transferring video content from device 1200 to another device. Proximity card 1254 is analogous to proximity card 1236 of FIG. 12Q, the description of which is hereby incorporated by reference. Similar to proximity card 1236, proximity card 1254 includes the title 1254A "Apple TV", visually indicating the name of the device that the user placed device 1200 in close proximity to. Title 1254A also visually indicates the focus of the proximity card (e.g., the device that will receive the media content in response), in this case the device named "Apple TV". Proximity card 1254 also includes an action indicator 1254D (e.g., an arrow), indicating that a user input gesture on the proximity card (e.g., in the direction of the arrow) will cause the device to perform an action. Likewise, action indicator 1254C (the text "Push to Play") indicates to a user that a user input on the proximity card 1254 will cause the device to take action. Additionally, proximity card 1254 includes a media affordance 1254B representing media content (e.g., one or more media items). In this example, media affordance 1254B includes a video screen shot (e.g., depicting a dog) of a video (e.g., 1252 of FIG. 12AH) currently playing on device 1200. In some examples, media affordance 1254B includes other types of visual indications of one or more media items (e.g., a video screen shot, video cover art, text, images, or other appropriate visual representations). Proximity card 1254 provides an interface that allows the user to add the device "Apple TV" to the current media session (e.g., of playback of the video media 1252).

**[0476]** FIG. 12AJ illustrates an exemplary result of transferring the video content depicted in FIG. 12AI from a first device 1200 to a second device 1260. In some examples, device 1260 can

be a device as described above with respect to device 660 of FIG. 6. In this example, device 1260 is media device (e.g., Apple TV made by Apple Inc. of Cupertino, California USA) connected to a display 1256 of device 1258 (e.g., a television). In this example, the user placed device 1200 in close proximity to device 1260, causing device 1200 to display proximity card 1254. In response to user input representing an upward swipe on proximity card 1254, playback of the video content is transferred to the device 1260. For example, device 1260 is currently playing back the video content 1252 from FIG. 12AH. In this example, device 1260 is configured to output the video content via the display of television device 1256. In some embodiments, device 1260 includes a display, which is used to playback the transferred media content.

[0477] Further, in the example depicted in FIG. 12AJ, device 1202 is currently playing back the audio portion of the video content playing back on device 1260. In some examples, device 1260 acts like a media hub, and can route video and/or audio data (e.g., for playback and output) to other devices connected to it (e.g., via wireless or wired connections). For example, as shown in FIG. 12AJ, device 1260 outputs video playback to television 1256 and audio playback (e.g., from the same media) to smart speaker 1202. In some embodiments, the device routing of a component signal (e.g., video or audio) of media content is preconfigured. For example, a user can configure device 1260 to always output audio on device 1202 and always output video on device 1256 (e.g., when a request for playback is received at either device, or at some other external device via a multi-device interface). In some embodiments, device 1260 dynamically determines the routing of a component signal (e.g., video or audio) of media content. For example, a user can configure device 1260 to always output audio on device 1202 and always output video on device 1256—however, if device 1202 is busy playing back other content, device 1260 can instead route the audio signal to be output by the speakers of television 1256. In some embodiments, device 1260 automatically detects the appropriate device (e.g., a preferred device) and automatically routes the content to that device. For example, device 1260 automatically detects speaker 1202 and automatically routes (e.g., hands off) audio playback of the audio portion of media). Likewise, device 1202, in some examples, automatically routes video to a video playback device, such as device 1260 (e.g., an Apple TV).

[0478] One of skill in the art would appreciate the numerous possible combinations of devices (e.g., two or more) that can be used to create an integrated media playback experience as described herein (e.g., with respect to FIGS. 12A-12AM). For example, the functions as described above (e.g., with respect to detecting proximity, displaying interfaces for transferring media between devices, displaying visual content, and/or outputting audible content) are not limited to being performed by a single device. In some embodiments, any number of devices are used to perform a function (e.g., and achieve a desired end result). One of skill in the art would appreciate that any number of devices can be used to perform the functions described above and, thus, to achieve the same desired end result, and the various combinations of devices possible are intended to be within the scope of this disclosure. In some examples, reducing the dependence on a single device or a limited number of devices to perform a desired media function, provides the user with a seamless and integrated media experience that can be accessed using various devices.

[0479] FIGS. 12AK-12AL illustrate exemplary interfaces for transferring a phone call between devices. In the examples described above, reference was made to transferring playback of media, and in particular audio and video. However, for example, the transfer of playback is not limited to transferring media such as songs and movies. In some embodiments, media content includes a phone call. For example, media content can be a telephone call, a voice over internet protocol “VOIP” call, a video call, or the like.

[0480] For example, FIG. 12AK illustrates an exemplary call interface 1262, displayed on device 1200. Call interface 1262 indicates that device 1200 is currently in an active phone call (e.g., a VOIP call).

[0481] FIG. 12AL illustrates an exemplary proximity card 1264 for transferring the phone call to another device (e.g., 1202). Proximity card 1264 is analogous to proximity card 1236 of FIG. 12Q, the description of which is hereby incorporated. Similar to proximity card 1236, proximity card 1264 includes the title 1264A “Kitchen Speaker”, visually indicating the name of the device that the user placed device 1200 in close proximity to. Title 1264A also visually indicates the focus of the proximity card (e.g., the device that will receive the media content in response), in this case the device named “Kitchen Speaker”. Proximity card 1264 also includes

an action indicator 1264C (e.g., an arrow), indicating that a user input gesture on the proximity card (e.g., in the direction of the arrow) will cause the device to perform an action. Likewise, action indicator 1264D (the text “Push Call”) indicates to a user that a user input on the proximity card 1264 will cause the device to take action. Additionally, proximity card 1264 includes a media affordance 1264B representing media content (e.g., a phone call). In this example, media affordance 1264B includes an image of a contact, a contact name, and a call time for the current phone call. In some examples, media affordance 1264B includes any appropriate visual indication of one or more media items (e.g., a video screen shot, video cover art, text, images, or other appropriate visual representations). Proximity card 1264 provides an interface that allows the user to add the device “Kitchen Speaker” to the current media session (e.g., of outputting audio of the phone call).

**[0482]** As one of skill in the art would appreciate, a phone call involves both audio output and audio input (e.g., using a microphone). In some embodiments, transferring a media item (e.g., a phone call or a video call) from one device to another device comprises transferring media output (e.g., audio or video output), but not transferring a media input function (e.g., audio or video input). For example, in the example depicted in FIG. 12AL, device 1200 can handoff audio output (e.g., so that phone call audio output is audibly output by a smart speaker 1202), but forgo handing off the media input function and continue to use its microphone to receive phone call audio (e.g., or its camera, in the case of a video call). In some embodiments, transferring a media item (e.g., a phone call or a video call) from one device to another device comprises transferring media output (e.g., audio or video output), and transferring a media input function. For example, in the example depicted in FIG. 12AL, device 1200 can handoff audio output (e.g., so that phone call audio output is audibly output by a smart speaker 1202), as well as handoff the media input function (e.g., so that smart speaker 1202 uses its microphone to receive phone call audio). In some embodiments, transferring a media item (e.g., a phone call or a video call) from one device to another device comprises transferring media input function, but not transferring a media output (e.g., audio or video output). In some embodiments, a device transfers less than all media output functions and/or media input functions. For example, if a video call is pushed to a display device with no audio output capability, the device (e.g., 1200) can transfer the visual output function to the display the device, and retain both the audio output function and the audio input function.

[0483] It should be apparent to one of skill in the art that the various interfaces and techniques described herein (e.g., with respect to FIGS. 12A-12AM) for controlling and/or transferring media content between devices is applicable to many types of media. Any media with one or more of an audio component and a visual component, and that are formatted to be communicated between electronic devices, are intended to be within the scope of this disclosure. For example, other specific examples of media that can be controlled or transferred in accordance with the techniques described herein include, but are not limited to: an electronic book (e.g., also commonly referred to as an “e-book”), a webpage, textual content (e.g., documents, spreadsheets), screen sharing (e.g., mirroring a first device’s screen at a second device), and an image (e.g., photos, animations).

[0484] In certain situations, the owner of a device may not desire to allow any user that has physical access to a device to be able to control the device. For example, it may not be desirable to allow guests (e.g., via the guests’ devices) to control playback on the owner’s home device. FIG. 12AM illustrates an exemplary media information interface. Media information interface 1266 (also referred to as proximity card 1266) depicts an interface that is displayed, in some examples, when a guest device is placed in close proximity to a home owner’s device. In some examples, a guest device is a device that is not associated with a user account that is a member of an authorized set of users (e.g., one or more). For example, an authorized set of users (e.g., user accounts) are users that have been added to a group in a device management application (e.g., a group of users 602A-602C as described above with respect to FIG. 6A). Thus, in some examples, if device 1200 is not logged into a user account associated with a user of the authorized set of users, device 1200 does not present a proximity card for controlling playback (e.g., a push proximity card, a pull proximity card, or a recently played media proximity card). Rather, in some examples, device 1200 displays proximity card 1266 in response to being placed in close proximity to a device that is associated with an authorized set of users.

[0485] Proximity card 1266 includes the title 1266A “Kitchen Speaker”, visually indicating the name of the device (e.g., device 1202) that is the target of the proximity card (e.g., whose media playback information is presented on the card). Additionally, proximity card 1266 includes a media affordance 1266B representing media content (e.g., one or more media items). In this example, media affordance 1266B includes album art for the track titled “How Many



Times” by the artist “Jambug” (e.g., that is currently playing on device 1202). In some examples, media affordance 1266B includes other types of visual indications of one or more media items (e.g., text, images, or other appropriate visual representations). In this example, the media content represented (e.g., by affordance 1266B) by the proximity card 1266 is content that is currently playing on the device 1202 (e.g., the Kitchen Speaker). Proximity card 1266 also includes a textual identification 1266C of the currently playing media. Thus, proximity card 1266 provides an informational interface that allows a guest to view information about media playback on a device in close proximity, without being able to affect the playback. For example, a swipe on proximity card 1266 will not push or pull media playback to device 1200.

10 **[0486]** FIG. 13 is a flow diagram illustrating a method for displaying a media information interface using an electronic device in accordance with some embodiments. Method 1300 is performed at a device (e.g., 100, 300, 500) with a display. Some operations in method 1300 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

15 **[0487]** As described below, method 1300 provides an intuitive way for displaying a media information interface. The method reduces the cognitive burden on a user for displaying a media information interface, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to display a media information interface faster and more efficiently conserves power and increases the time between battery charges.

20 **[0488]** The electronic device (e.g., 1200) detects (1302), while connected to a second device (e.g., 1202), an indication that a physical proximity between the first device and the second device satisfies a proximity condition. For example, the devices are connected when the second device is in Bluetooth range of the first device, or is connected to the same Wi-Fi network as the first device. In some examples, the proximity condition is satisfied when a physical proximity of  
 25 the electronic device (e.g., 1200) is within a proximity zone of the second device (e.g., such as proximity zone 1204 of FIG. 12B). In some embodiments, the electronic device (e.g., device 1200 or 1202) detects whether the proximity condition is satisfied using a near-field communication technique. In some embodiments, the electronic device (e.g., 1200) that

determines whether the proximity condition is satisfied communicates the determination to the other device (e.g., 1202).

**[0489]** In accordance with detecting that the physical proximity satisfies the proximity condition (e.g., the electronic device is within the proximity zone 1204 of FIG. 12B), the electronic device (e.g., 1200) displays (1304), on the display (e.g., 1206), a media information interface (e.g., 1208 of FIG. 12B).

**[0490]** Using a detection of physical proximity for displaying a media information interface allows the user to efficiently invoke a device-specific user interface with fewer required user inputs. Performing an operation when a set of conditions has been met without requiring further user input enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0491]** In some embodiments, the indication is detected while the first device (e.g., 1200) is not playing media content and while the second device (e.g., 1202) is not playing media content. In some embodiments, displaying the media information interface (e.g., 1208) comprises displaying, on the display (e.g., 1206), a first affordance (e.g., 1208A) representing a first media item that was recently played on the second device. In some embodiments, the electronic device (e.g., 1200) receives a first user input (e.g., 1210) representing selection of the first affordance. In response to receiving the first user input (e.g., 1210), the electronic device (e.g., 1200) transmits an instruction to the second device (e.g., 1202) to initiate playback of the first media item.

**[0492]** In some embodiments, the electronic device (e.g., 1200) receives a second user input (e.g., 1214 of FIGS. 12E and 12F) representing a directional swipe gesture on the first affordance (e.g., 1208A). In response to receiving the second user input (e.g., 1214), and while continuing to display the first affordance (e.g., 1208A of FIG. 12F), displaying, on the display (e.g., 1206), a second affordance (e.g., 1208C of FIG. 12F) representing a second media item that was recently played on the second device, wherein the second affordance was not displayed prior to receiving the second user input (e.g., 1214 of FIG. 12F).

**[0493]** In some embodiments, the indication is detected while the first device (e.g., 1200) is playing a third media item (e.g., 1220A of FIG. 12H) and while the second device (e.g., 1202) is playing a fourth media item (e.g., 1222 of FIG. 12H) different than the third media item. In some embodiments, displaying the media information interface (e.g., 1224 of FIG. 12I) comprises displaying, on the display (e.g., 1206), a third affordance (e.g., 1224A of FIG. 12I) associated with the third media item (e.g., 1220A) currently playing on the first device (e.g., 1200). In some embodiments, the electronic device (e.g., 1200) receives a third user input (e.g., 1226 of FIG. 12J) representing selection of the third affordance (e.g., 1224A). In response to receiving the third user input (e.g., 1226), the electronic device (e.g., 1200) transmits an instruction to the second device (e.g., 1202) to initiate playback of the third media item (e.g., 1220A).

**[0494]** In some embodiments, further in response to receiving the third user input (e.g., 1226), the electronic device (e.g., 1200) ceases playing the third media item (e.g., 1220A) on the first device (e.g., 1200).

**[0495]** In some embodiments, further in response to receiving the third user input (e.g., 1226), the electronic device (e.g., 1200) displays, on the display, playback control affordances (e.g., 1228B of FIG. 12K) that control the playback of the third media item (e.g., 1228A of FIG. 12K, or 1230C of FIG. 12L) on the second device (e.g., 1202).

**[0496]** In some embodiments, the indication is detected while the first device (e.g., 1200) is playing a fifth media item (e.g., 1220A of FIG. 12P) and while the second device (e.g., 1202) is not playing media content. In some embodiments, displaying the media information interface (e.g., 1236 of FIG. 12Q) comprises displaying, on the display, a fourth affordance (e.g., 1236C of FIG. 12Q) representing the fifth media item (e.g., represented by 1236C of FIG. 12Q). In some embodiments, the electronic device (e.g., 1200) receives a fourth user input (e.g., 1238 of FIG. 12R and 12S). In some embodiments, the electronic device (e.g., 1200) determines whether the fourth user input (e.g., 1238) represents a directional swipe gesture on the fourth affordance (e.g., 1236C). In some embodiments, the swipe gesture is an upward swipe. In some embodiments, the swipe gesture is a swipe in a direction toward the second device (e.g., 1202). For example, the swipe gesture would depend on the orientation of the first device (e.g., 1200).

relative to the second device (e.g., 1202). In response to receiving the fourth user input (e.g., 1238), and in accordance with a determination that the fourth user input represents a directional swipe gesture on the fourth affordance (e.g., 1236C): the electronic device (e.g., 1200) transmits an instruction to the second device (e.g., 1202) to initiate playback of the fifth media item (e.g., represented by affordance 1236C of FIG. 12Q, or by 1220A of FIG. 12C). In some embodiments, further in response to the fourth user input (e.g., 1236C), and in accordance with a determination that the fourth user input represents a directional swipe gesture on the fourth affordance (e.g., 1236C), the electronic device (e.g., 1200) ceases playback, on the first device (e.g., 1200), of the fifth media item. In some embodiments, in response to receiving the fourth user input (e.g., 1236C), and in accordance with a determination that the fourth user input does not represent a directional swipe gesture on the fourth affordance (e.g., 1236C): the electronic device (e.g., 1200) forgoes transmitting an instruction to the second device (e.g., 1202) to initiate playback of the fifth media item. In some embodiments, further in response to receiving the fourth user input (e.g., 1236C), and in accordance with a determination that the fourth user input does not represent a directional swipe gesture on the fourth affordance (e.g., 1236C), the electronic device (e.g., 1200) continues playback, on the first device (e.g., 1200), of the fifth media item (e.g., represented by affordance 1236C of FIG. 12Q, or by 1220A of FIG. 12C).

**[0497]** In some embodiments, the first device (e.g., 1200) ceases playback of the fifth media item at a playback time (e.g., as illustrated by 1220D of FIG. 12V) of the fifth media item (e.g., represented by affordance 1236C of FIG. 12Q, or by 1220A of FIG. 12C). In some embodiments, transmitting the instruction to the second device (e.g., 1202) to initiate playback of the fifth media item comprises transmitting an instruction to the second device to begin playback at approximately the playback time of the fifth media item. For example, so that the playback is perceived as continuous by a listener. For example, the first device instructs the second device to begin playback at the same time that the first device ceases playback of the fifth media item, a certain amount of time after the time that the first device ceases playback, or within a range of time based on the time that the first device ceases playback.

**[0498]** In some embodiments, displaying the media information interface comprises displaying, on the display (e.g., 1206), a fifth affordance (e.g., 1220C of FIG. 12W). In some embodiments, the electronic device (e.g., 1200) determines whether the fourth user input (e.g.,

1239) represents a selection of the fifth affordance (e.g., 1220C of FIG. 12W. In some embodiments, in response to receiving the fourth user input, and in accordance with a determination that the fourth user input represents a selection of the fifth affordance, displaying, on the display (e.g., 1206), a multi-device interface (e.g., 610 of FIG. 6J). In some embodiments, further in response to receiving the fourth user input, and in accordance with a determination that the fourth user input does not represent a selection of the fifth affordance, the electronic device (e.g., 1200) forgoes displaying the multi-device interface.

**[0499]** In some embodiments, the indication is detected while the first device (e.g., 1200) is not playing media content and while the second device (e.g., 1202) is playing a sixth media item (e.g., represented by 1242B of FIG. 12Y). In some embodiments, displaying the media information interface (e.g., 1242 of FIG. 12Y) comprises displaying, on the display (e.g., 1206), a sixth affordance (e.g., 1242B of FIG. 12Y)) representing the sixth media item. In some embodiments, the electronic device (e.g., 1200) receives a fifth user input (e.g., 1244 of FIGS. 12Z and 12AA). In some embodiments, the electronic device (e.g., 1200) determines whether the fifth user input represents a directional swipe gesture on the fifth affordance (e.g., 1242B). In some embodiments, the swipe gesture is a downward swipe. In some embodiments, the swipe gesture is a swipe in a direction away from the second device (e.g., 1202). For example, the directional swipe would depend on the orientation of the first device relative to the second device. In some embodiments, in response to receiving the fifth user input (e.g., 1244), and in accordance with a determination that the fifth user input represents a directional swipe gesture on the sixth affordance: the electronic device (e.g., 1200) transmits an instruction to the second device (e.g., 1202) to cease playback of the sixth media item. In some embodiments, further in response to receiving the fifth user input (e.g., 1244), and in accordance with a determination that the fifth user input represents a directional swipe gesture on the sixth affordance, electronic device (e.g., 1200) initiates playback, on the first device (e.g., 1200), of the sixth media item (e.g., represented by 1242B of FIG. 12AA). For example, pulling on a displayed proximity card causes playback of media from the second device to transfer to the first device. In some embodiments, in response to receiving the fifth user input, and in accordance with a determination that the fifth user input does not represent a directional swipe gesture on the sixth affordance: the electronic device (e.g., 1200) forgoes transmitting an instruction to the second device (e.g., 1202) to cease playback of the sixth media item. In some embodiments, further in

response to receiving the fifth user input, and in accordance with a determination that the fifth user input does not represent a directional swipe gesture on the sixth affordance: the electronic device (e.g., 1200) forgoes initiating playback, on the first device (e.g., 1200), of the sixth media item.

5   **[0500]**     In some embodiments, the electronic device (e.g., 1200) determines whether the fifth user input (e.g., 1248 of FIG. 12AF) represents a selection (e.g., a tap, touch, press, deep press, or tap and hold input) of the sixth affordance (e.g., 1242B of FIG. 12AF). In some embodiments, further in response to receiving the fifth user input, and in accordance with a determination that the fifth user input (e.g., 1248) represents a selection of the sixth affordance,  
 10   the electronic device (e.g., 1200) displays, on the display (e.g., 1206), playback control affordances (e.g., 1250B of FIG. 12AG) for controlling the playback of the sixth media item (e.g., represented by 1242B of FIG. 12AF) on the second device (e.g., 1202, represented by 1250A of FIG. 12AG). In some embodiments, in accordance with a determination that the fifth user input does not represent a selection of the sixth affordance, the electronic device (e.g., 1200)  
 15   forgoes displaying, on the display (e.g., 1206), playback control affordances (e.g., 1250B of FIG. 12AG) for controlling the playback of the sixth media item on the second device (e.g., 1202).

**[0501]**     In some embodiments, the second device (e.g., 1202) ceases playback of the sixth media item (e.g., represented by 1246A of FIG. 12AD) at a playback time (e.g., 1246C of FIG. 12AD) of the sixth media item. In some embodiments, initiating playback, on the first device  
 20   (e.g., 1200), of the sixth media item comprises beginning playback at approximately the playback time (e.g., 1246C of FIG. 12AD) of the sixth media item. In some examples, the transfer of playback from the second device to the first device is perceived as continuous by a listener. For example, the first device can begin playback at the same time that the second device ceases playback, a certain amount of time after the time that the second device ceases  
 25   playback, or within a range of time based on the time that the second device ceases playback.

**[0502]**     In some embodiments, initiating playback, on the first device (e.g., 1200), of the sixth media item (e.g., represented by 1246A of FIG. 12AD) comprises displaying, on the display (e.g., 1206): an identification of the sixth media item (e.g., 1246A of FIG. 12AD), and playback

control affordances (e.g., 1246D of FIG. 12AD) for controlling playback of the sixth media item on the first device (e.g., 1200).

**[0503]** In some embodiments, the first device (e.g., 1200) is connected to a plurality of devices, wherein the plurality of devices includes the second device (e.g., 1202), and wherein the displayed media information interface (e.g., 1208, 1224, 1236, or 1242) corresponds to the second device (e.g., 1202).

**[0504]** In some embodiments, the first device (e.g., 1200) is connected to the second device (e.g., 1202) via a wireless communication link.

**[0505]** In some embodiments, the media information interface (e.g., 1236, or 1242) comprises an indication (e.g., 1236B, 1236D, 1242C, and/or 1242D) that the media content playing back on the first device (e.g., 1200) or the second device (e.g., 1202) can be transferred to the other device not playing back the media content. For example, proximity cards can include an indication (e.g., text, an arrow) that the media content can be “pushed” to the second device (e.g., an up arrow) or “pulled” from the second device (e.g., down arrow).

**[0506]** In some embodiments, a media item is selected from the group consisting of an audio file, an audio stream, a video file, a video stream, a phone call, and a video call.

**[0507]** In some embodiments, the first device (e.g., 1200) is associated with a first user account (e.g., user 602A of FIG. 6A), and the second device (e.g., 1202) is associated with a set of user accounts. In some embodiments, the set of user accounts includes one or more user accounts. In some embodiments, further in accordance with detecting that the physical proximity satisfies the proximity condition: in accordance with a determination that the first user account is a member of the set of user accounts, the electronic device (e.g., 1200) displays an indication (e.g., 1236B, 1236D, 1242C, and/or 1242D) that media playback can be transferred between the first device (e.g., 1200) and the second device (e.g., 1202). For example, the indication provides a visual indication that media playback can be pushed from the first device to the second, or pulled from the second device to the first. In some embodiments, the device also displays playback control affordances (e.g., 1220D of FIG. 12H). In some embodiments, in accordance with a determination that the first user account is not a member of the set of user

accounts, the electronic device (e.g., 1200) forgoes displaying the indication (e.g., 1236B, 1236D, 1242C, and/or 1242D) that media playback can be transferred between the first device and the second device. For example, the electronic device can instead display an interface 1266 as shown in FIG. 12AM. In some examples, interface 1266 includes an indication of what is  
 5 now playing on the second device, but does not include an affordance that can be swiped to transfer playback, nor does it include arrows prompting a swipe gesture. In some embodiments, the device also forgoes displaying playback controls (e.g., as shown in FIG. 1266).

**[0508]** In some embodiments, in accordance with a determination (e.g., by device 1200 or 1202) that the physical proximity between the first device (e.g., 1200) and the second device  
 10 (e.g., 1202) has satisfied the proximity condition continuously for a threshold amount of time, automatically transferring playback of a media item between the first device and the second device. In some embodiments, automatically transferring comprises transferring without further user input and/or without requiring an additional condition be met. In some embodiments, in accordance with a determination that the physical proximity between the first device and the  
 15 second device has not satisfied the proximity condition continuously for a threshold amount of time, the electronic device (e.g., 1200) forgoes automatically transferring playback of a media item between the first device and the second device.

**[0509]** Note that details of the processes described above with respect to method 1300 (e.g., FIG. 13) are also applicable in an analogous manner to the methods described below/above. For  
 20 example, method 700, 900, 1100, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 1300. For brevity, these details are not repeated below.

**[0510]** FIGS. 14A-14M illustrate exemplary techniques for controlling a device, in accordance with some embodiments. The user interfaces in these figures are used to illustrate  
 25 the processes described below, including the processes in FIG. 15.

**[0511]** FIG. 14A illustrates an exemplary device 1400, in accordance with some embodiments. In some embodiments, device 1400 includes one or more features of devices 100, 300, 500, or 580. In some embodiments, as shown in FIG. 14A, device 1400 includes a touch-sensitive surface 1402. In this example, the touch-sensitive surface is arranged on top of the



device, which is a smart speaker device sitting on surface. In some embodiments, device 1400 includes a touch-sensitive display.

**[0512]** FIG. 14B illustrates an overhead view of exemplary device 1400. Touch-sensitive surface 1402 can be seen. Also visible are LED indicators 1404, 1406A, and 1406B. In some examples, one or more of the LED indicators on device 1400 are used to visually indicate a status of the device. For example, touch-sensitive surface 1402 can respond differently to the same user input (e.g., a tap at the same location) based on a state of device 1400 (e.g., at different times). Thus, device 1400 can use the LED indicators to visually communicate the current status of the device (e.g., and in turn, indicate the effect that a user input (e.g., on touch-sensitive surface 1402) will have on the device). In some examples, one or more of the following properties of one or more LED indicators are controlled by the device 1400 to communicate a state of the device: illumination (e.g., on or off), brightness, color, diameter, and shape. In some examples, other visual properties of the LED indicators can be controlled (e.g., adjusted) in order to indicate a device state (e.g., a media playback status, a state of a touch-sensitive surface or a touch-sensitive display). In some embodiments, the LED indicators are a display screen (e.g., 112 of FIG. 1B, 504 of FIG. 5A). For example, instead of using LED indicators, a device 1400 can include a display screen, such as an organic light-emitting diode (OLED) panel, an LED panel, an LCD panel, or the like. In some embodiments, LED indicators are any component(s) that can be controlled by an electronic device (e.g., 1400) to output a visual indication.

**[0513]** FIGS. 14C-14L depict various exemplary states of device 1400, and actions performed by the device in response to user input in accordance with the states.

**[0514]** FIG. 14C illustrates the overhead view shown in FIG. 14B, but where device 1400 receives a user input 1408 at a location on the touch-sensitive surface 1402. In this example, the user input 1408 is received at a location over LED indicator 1406A. In this example, device 1400 is not playing back media content at the time when user input 1408 is received. For example, device 1400 is in a paused state during a media playback session, or is not currently a part of a media playback session.

**[0515]** At FIG. 14D, in response to receiving user input 1408, device 1400 initiates playback of media. For example, device is now outputting media (e.g., via a speaker), as represented

graphically by sound wave 1410 in FIG. 14D. In this example, device 1400 has resumed playing media playback that was paused. In some examples, if no media playback is currently paused, device 1400 still initiates playback of media in response to user input 1408. For example, the device 1400 can initiate playback of recently played media, default media (e.g., configured by user, or automatically selected), favorite media associated with a user account, preconfigured media (e.g., configured to playback during a predetermined time, day), or the like. In some examples, device 1400 updates the LED indicators to visually indicate that the device is currently playing back media content. In this example, indicator 1406A now includes a “+” icon and indicator 1406B now includes a “-” icon. In some examples, the indicators 1406A and 1406B of FIG. 14D visually communicate that the device is currently playing back media (e.g., outputting an audio signal). One of skill would appreciate that other visual indications (e.g., icons) and/or indicators (e.g., indicator 1406) can be used to visually communicate that the device is currently playing back media. Further, in some examples, indicators 1406A and 1406B of FIG. 14D visually communicate that they can be touched in order to adjust volume. One of skill would appreciate that other indications (e.g., icons) and/or indicators (e.g., indicator 1406) can be used to visually communicate the state (e.g., function in response to user input) of a touch-sensitive or touch-sensitive display.

**[0516]** In some embodiments, the “+” and “-” indicators 1406A and 1406B cease to be displayed in response to device 1400 performing a voice assistant function. For example, in response to detecting voice user input (e.g., “Hey Siri”), the device can cease displaying one or more of the icons within indicator 1406A and 1406B. In some examples, the illumination of one or more of indicators 1404, 1406A, and 1406B changes during a voice assistant function. For example, indicators 1404, 1406A, and 1406B can turn off, be illuminated, change color, or the like in response to a voice assistant function being performed on device 1400.

**[0517]** FIG. 14E illustrates the overhead view shown in FIG. 14D, but where device 1400 receives a user input 1410 at a location on the touch-sensitive surface 1402. In this example, the user input 1410 is received at a location over LED indicator 1406A, which is the same location as user input 1408. In this example, device 1400 (as shown in FIG. 14D) is currently playing back media content at the time when user input 1410 is received. For example, device 1400 is

included in a media playback session (e.g., and is playing music audio, or the audio component of video playback).

**[0518]** In response to receiving user input 1410, device 1400 adjusts a volume of device 1400. For example, as illustrated by the volume level meter 1412 in FIG. 14F, device 1400  
 5 adjusts (e.g., increases) volume from a first level 1412A (e.g., the volume immediately prior to the user input 1410) to a second level 1412B (e.g., the volume immediately subsequent to the user input 1410), in response to user input 1410.

**[0519]** FIGS. 14G-14J illustrate exemplary techniques for expanding the size of a responsive area on a touch-sensitive surface, in accordance with some embodiments.

**[0520]** FIG. 14G illustrates an overhead view of device 1400 while it is currently playing  
 10 back media content (e.g., as described in FIG. 14F). Additionally, FIG. 14G depicts the boundaries of touch-sensitive regions 1414A and 1414B over indicators 1406A and 1406B, respectively. In some examples, touch-sensitive region boundaries are not displayed or visible on an electronic device (e.g., 1400). For instance, in this example, the regions 1414A and 1414B  
 15 are included for reference only and are not displayed by device 1400. In some examples, an electronic device displays boundaries of one or more touch-sensitive regions (e.g., 1414A or 1414B).

**[0521]** At FIG. 14H, the device (as shown in FIG. 14G) receives user input 1416 over indicator 1406A. In this example, user input 1416 is a touch on touch-sensitive surface 1402.

**[0522]** As can be seen, at least a portion of user input 1416 is included within the touch-sensitive region 1414A. In response to user input 1416, device 1400 increases a volume (e.g., as shown in FIG. 14F).

**[0522]** In some embodiments, further in response to receiving user input 1416 on an indicator 1406A, device 1400 temporarily expands the touch-sensitive region 1414A to form an  
 25 expanded touch-sensitive region (also referred to as an “expanded region”). An exemplary expanded region 1418 is shown in FIG. 14I. As can be seen in FIG. 14I, the expanded region 1418 covers a larger area of touch-sensitive surface 1402 than region 1414A did (e.g., as shown in FIG. 14G). In some examples, an expanded region replaces a region. For instance, in

this example, expanded region 1418 (e.g., which will perform the same function as region 1414A, in response to a touch within it) covers the area (and more) that region 1414A occupied, thus replacing it.

**[0523]** In some embodiments, the device ceases to maintain the expanded touch-sensitive region after a predetermined amount of time. In some embodiments, the device ceases to maintain the expanded touch-sensitive region after a predetermined amount of time since the last user input within the expanded region. For example, subsequent user inputs (e.g., taps) within the expanded region would cause a measure (e.g., a timer) of the amount of time since the last user input to be reset after each detect touch input. In this example, the expanded region returns to its normal size (e.g., 1414A) after the amount of time reaches the predetermined amount of time after the final user input with the expanded region.

**[0524]** At FIG. 14J, device 1400 receives a second user input 1420 within the expanded region 1418, but outside of region 1414A. In some examples, in accordance with a determination that the second user input (e.g., 1420) was received during the predetermined amount of time after detecting the first user input (e.g., 1416), device 1400 adjusts (e.g., increases) a volume of the currently playing media. For example, as illustrated by the volume level meter 1422 in FIG. 14K, device 1400 adjusts volume from a first level 1422A (e.g., the volume immediately prior to the user input 1420) to a second level 1422B (e.g., the volume immediately subsequent to the user input 1420), in response to user input 1420.

**[0525]** In some examples, in accordance with a determination that the second user input (e.g., 1420) was not received during the predetermined amount of time after detecting the first touch, device 1400 ceases playing media. For example, if user input 1420 was received after a predetermined amount of time after a touch that caused the region 1414A to expand (or a subsequent touch within the expanded region 1418), and was not within the region 1414A, then the volume is not increased because the temporary expansion (e.g., increase in responsive area on a touch-sensitive surface) ended before the user input 1420 was received. In some examples, device 1400 ceases playback in response to user input 1420, when it is received after the predetermined amount of time, and is outside of the second region. For instance, in the example shown in FIG. 14J, user input 1420 is within a region 1414C that is configured to cause device

1400 to pause media playback (or resume paused playback). Thus, in response to user input 1420 when it is received after the predetermined amount of time, and is outside of the second region, device 1400 pauses playback.

**[0526]** FIG. 14L illustrates an exemplary technique for adjusting the volume of a device.

5 While the description above referenced increasing a volume of device 1400 in response to user input on a touch-sensitive surface, FIG. 19L illustrates an exemplary technique for lowering the volume of device 1400. In response to receiving user input 1410, device 1400 adjusts a volume of device 1400. For example, as illustrated by the volume level meter 1426 in FIG. 14L, device 1400 adjusts volume from a first level 1426A (e.g., the volume immediately prior to the user  
10 input 1424) to a second level 1426B (e.g., the volume immediately subsequent to the user input 1424, lower than level 1426A), in response to user input 1424.

**[0527]** In some embodiments, device 1400 includes a plurality of volume levels. For example, device 1400 can maintain e.g., store in memory) a volume level for a media playback function, and maintain a volume level for a voice assistant function. In some examples, the  
15 plurality of volume levels are each different. For example, device 1400 can adjust a first volume level (e.g., of media playback) to 0% of maximum (e.g., muted, no sound is produced by a speaker of device 1400) while a second volume level is set to a non-zero value of 50% of maximum (e.g., a maximum output level of the speaker, or a maximum level of a volume level meter).

20 **[0528]** For example, FIG. 14M illustrates two volume level meters, representing two volume levels stored by device 1400. Media volume level meter 1430 includes a maximum level and a minimum level. Voice assistant volume level meter 1432 includes a maximum level and a minimum level.

**[0529]** In some embodiments, a second volume level is a derivative of a first volume level.  
25 For example, the volume level of a voice assistant (e.g., represented by volume meter 1432) can be mathematically derived from the volume level of media playback volume. For example,  $\text{Volume (voice assistant)} = (\text{Volume (media)} \div 1.5)$ . Thus, the second volume level (e.g., of the voice assistant) is derived from a first volume level (e.g., of media playback), and adjustment of the first results in an adjustment of the second.

[0530] In some embodiments, a second volume level is non-zero when a first volume level is zero. For example, as shown in FIG. 14M, the virtual assistant volume meter 1432 has a non-zero minimum. Thus, in some examples, when media volume level is set to zero, the voice assistant volume is non-zero, and thus a user can continue to hear and interact with the voice assistant. For example, the voice assistant volume can be derived as follows (where Volume (voice assistant) = ((Volume (media) ÷ 1.5) + x), where “x” is a constant representing an amount of volume added back into the result of Volume(media) ÷ 1.5. One of skill in the art would appreciate that a volume level can be represented using a variety of units or quantities, which are not discussed in more detail here. Any appropriate representation of a volume level that an electronic device (e.g., device 1400) can use to control the volume of sound output is intended to be within the scope of this disclosure.

[0531] In some embodiments, user input on touch-sensitive surface 1402 causes device 1400 to change playback of currently playing media. For example, user input on touch-sensitive surface 1402 can cause device 1400 to skip to next media item (e.g., on a playlist), to go back to a previous media item (e.g., on a playlist), pause playback, or the like. In some embodiments, device 1400 concurrently plays back a plurality of media items. In some embodiments, in response to user input on touch-sensitive-surface 1402, device 1400 adjusts the output of each of the plurality of concurrently playing media items. In some embodiments, each of the plurality of media items are adjusted differently. For example, if device 1400 is concurrently playing back first media representing a news program (e.g., an audio stream) and second media representing music (e.g., an audio stream), a user input (e.g., a swipe gesture, a rotational swipe, a multi-contact swipe, or the like) on surface 1402 causes device 1400 to adjust an output level of the first and second media. In some embodiments, the adjustment is relative. For example, an output level of the first media is adjusted higher while an output level of the second media is adjusted lower. For example, an output level of the first media is adjusted lower while an output level of the second media is adjusted higher. For example, if the user desires to increase the volume of the news program and lower the music volume, a counter-clockwise rotational swipe gesture on surface 1402 causes device 1400 to adjust the volume of each media item accordingly. Conversely, in this example, a clockwise rotational swipe gesture on surface 1402 causes device 1400 to increase the volume of the music and lower the volume of the news program. Thus,

device 1400 receives user input to control a crossfade between a plurality of currently playing media signals.

**[0532]** In some embodiments, device 1400 includes one or more microphones. In some examples, device 1400 detects, with the one or more microphones, a voice command user input from a voice command source. In some embodiments, the voice command source is moving. For example, the voice command source is a user that is speaking to the device, and the user may move (e.g., walk around a room) relative to the device (e.g., stationary in the room). In some embodiments, while continuing to detect the voice command user input: device 1400 determines a plurality of spatial positions of the moving voice command source, and illuminates light-emitting elements (e.g., indicators 1404) based on the plurality of spatial positions of the moving voice command source. Thus, for example, device 1400 can use (e.g., selectively illuminate) indicators 1404 based on the direction of a voice command source (e.g., a user speaking to device 1400 to invoke a voice assistant function using device 1400). For instance, when a user stands at a first position relative to device 1400 (e.g., and speaks a command to the device), indicators 1404 include one or more illuminated LEDs that visually appear to align with or indicate (e.g., “point in”) the direction of the first position. Likewise, when a user stands at a second position relative to device 1400 (e.g., and speaks a command to the device), different than the first position, indicators 1404 include one or more illuminated LEDs that visually appear to align with or indicate (e.g., “point in”) the direction of the second position.

**[0533]** In some embodiments, device 1400 detects a plurality of voice sources. In some embodiments, the device determines that one voice source, of the plurality of voice sources, represents a voice command user input. In some embodiments, device 1400 illuminates light-emitting elements (e.g., indicators 1404) based on the one voice source, of the plurality of voice sources. For example, if device 1400 is placed in a room with a plurality of speaking users and one user (or more than one) utters a voice command, the device 1400 uses indicators 1404 to visually indicate the direction of the user whose voice is currently being used to generate and/or process a voice command.

**[0534]** FIGS. 14N-14Q illustrate exemplary patterns created by illuminate light-emitting elements (e.g., indicators 1404) based on a spatial positions of a voice command source (e.g.,

1440). At FIG. 14N, a user 1440 utters the user input voice command 1442 “Hey Siri” to invoke a personal assistant voice function on device 1400. FIG. 14O illustrates an overhead view (not to scale) of FIG. 14N, before the user utters voice command 1442. As shown, the indicator lights 1404 are not illuminated.

5   **[0535]**     In FIG. 14P, an “input gravity” type of illumination pattern is shown, displayed in response to device 1400 detecting voice command 1442. The illuminated light-emitting elements of indicator 1404 form a semi-circular illumination pattern bordering the edge of indicators 1404. The elements that are closest to the edge and in the direction of the voice command source appear different from the surrounding elements. For example, the center of the  
10   semi-circle indicates the direction of the voice source (e.g., user 1440) being listened to by device 1400 and can appear to be brighter or a different color than the surrounding elements.

**[0536]**     In FIG. 14Q, a “linear” type of illumination is shown (an alternative to FIG. 14P’s “input gravity” type of illumination pattern), displayed in response to device 1400 detecting voice command 1442. The illuminated light-emitting elements of indicator 1404 form a  
15   substantially linear pattern within indicators 1404. Elements that align with the direction (e.g., relative to device 1400) of the voice command source appear different from the surrounding elements. For example, the elements aligned with the direction of the voice source being listened to by device 1400 and can appear to be brighter or a different color than the surrounding elements.

20   **[0537]**     In some examples, other appropriate types of visual patterns can be used to indicate direction of a voice command source, and the examples above are not intended to limit the scope of this disclosure.

**[0538]**     FIGS. 14R-14T illustrate exemplary arrangements and states of light-emitting indicators, in accordance with some embodiments. For example, FIGS. 14R-14T illustrate  
25   exemplary illumination patterns of indicator 1404, for communicating various states of device 1400. In some embodiments, device 1400 includes a cover over indicator 1404. For example, a partially opaque cover placed over indicator 1404 can cause the output of the light emitting elements to diffuse, and form patterns, which are also illustrated in FIGS. 14R-14T, for ease of reference.



**[0539]** FIG. 14R illustrates four illumination states of indicator 1404, both with and without a diffusion cover over the indicator. Pattern 1454A illustrates a large pattern (all LEDs illuminated), pattern 1454B illustrates a medium pattern (middle two rings illuminated), pattern 1454C illustrates a small pattern (e.g., inner-most ring illuminated), and pattern 1454D illustrates a circling pattern (e.g., various LEDs illuminated in a shape). In some examples, lighting elements of 1404 form the shape of 1454D and alternate illumination to give the appearance that the shape is moving (e.g., swirling a circular pattern). Covered patterns 1452A-1452D correspond to patterns 1454A-1454D, respectively, and depict how the patterns appear with a diffusion cover over indicator 1404.

**[0540]** FIG. 14S illustrates four illumination patterns that are presented by indicator 1404 in response to a voice user input (e.g., invoking a voice assistant), in accordance with some embodiments. As shown in FIG. 14S, pattern 1454E is displayed prior to voice input. Patterns 1454F-1454I are displayed in sequence in response to the voice input, giving the appearance of a small pattern transitioning into a large pattern, and then settling at a medium sized pattern. Covered patterns 1452E-1452I correspond to patterns 1454E-1454I, respectively, and depict how the patterns appear with a diffusion cover over indicator 1404. In some embodiments, the patterns 1454E-1454I form a series (e.g., that are displayed sequentially, in the order shown or in any order).

**[0541]** FIG. 14T illustrates three illumination patterns that are presented by indicator 1404, in accordance with some embodiments. For example, the patterns 1454J-1454L (and corresponding 1452J-1452L) can be displayed while device 1400 is performing a voice assistant function. In some embodiments, the patterns 1454J-1454L form a series (e.g., that are displayed sequentially, in the order shown or in any order). For example, performing a voice assistant function can include one or more of: listening to voice input (e.g., after detecting it), listening for voice input (e.g., prior to detecting it), outputting a voice assistant output (e.g., providing a text-to-speech audible response to voice input), processing user input (e.g., parsing the voice input, or performing a task in response to the voice input), or the like. In the examples depicted in FIG. 14T, each pattern includes shapes (e.g., circles) and each shape includes a number (e.g., the pattern in 1454J includes the numbers 1, 2, and, 3), wherein each number represents a color. Thus, the three circles of pattern 145J are each a different color. In patterns 1452J and 1454J,

the elements in indicator 1404 are illuminated so that the colors do not appear to mix. In pattern 1452K and 1454K, the elements in indicator 1404 are illuminated so that the colors do appear to mix. For example, the colors are mixed and form new colors 4, 5, 6, and 7, based on the overlap of colors 1, 2, and 3. In pattern 1452L and 1454L, the elements in indicator 1404 are illuminated so that the colors do appear to mix, and the shapes within the pattern are less clearly defined (e.g., are no longer perfect circles, are swirling in an animated fashion). As can be seen, the colors 1 and 3 have changed relative position from pattern 1454K to 1454L. In some examples, the various patterns 1452J-1452L are be used (e.g., as sequence or part of an animation) to indicate the state of a voice assistant function.

**[0542]** In some examples, the color elements in indicator 1404, as described above with respect to patterns 1454J-1454L, are used to provide visual indication that the device 1400 is performing a first function (e.g., a voice assistant function), in contrast to a second function (e.g., media playback). For example, monochromatic light can be output by indicator 1404 when device 1400 is only playback media (e.g., a song), but transition to color when the device (e.g., even while continuing media playback) begins performing a voice assistant-related function (e.g., detects voice input of a token phrase, such as “Hey Siri”).

**[0543]** FIG. 15 is a flow diagram illustrating a method for controlling media playback using an electronic device in accordance with some embodiments. Method 1500 is performed at a device (e.g., 100, 300, 500) with a touch-sensitive surface. Some operations in method 1500 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0544]** As described below, method 1500 provides an intuitive way for controlling media playback. The method reduces the cognitive burden on a user for controlling media playback, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to control media playback faster and more efficiently conserves power and increases the time between battery charges.

**[0545]** The electronic device (e.g., 1400) detects (1502) a touch (e.g., 1408 or 1410) on the touch-sensitive surface (e.g., 1402). In response to detecting the touch on the touch-sensitive

surface, the electronic device (e.g., 1400) determines (1504) whether the electronic device (e.g., 1400) is currently playing media (e.g., represented by 1410 of FIG. 14D).

**[0546]** In accordance with a determination that the device (e.g., 1400) is currently playing media (1506): the electronic device (e.g., 1400) determines (1508) whether a location of the touch (e.g., 1408 or 1410) is within a first area (e.g., 1414C of the touch-sensitive surface (e.g., 1402) or within a second area (e.g., 1414A) of the touch-sensitive surface, wherein the first area and the second area are non-overlapping.

**[0547]** In accordance with a determination that the location of the touch is within the first area (e.g., 1414C) of the touch-sensitive surface, the electronic device (e.g., 1400) ceases playing media (1510).

**[0548]** In accordance with a determination that the location of the touch is within the second area (e.g., 1414A) of the touch-sensitive surface, the electronic device (e.g., 1400) adjusts (1512) a volume of the currently playing media (e.g., adjust up or down).

**[0549]** In accordance with a determination that the device is not currently playing media, the electronic device (e.g., 1400) initiates playback of media (1514).

**[0550]** Using a device state as well as a location of an area of a touch on a touch-sensitive surface to determine how a device responds to touch user input provides the user with a simplified interface that provides contextually relevant controls. Providing additional control of the device without cluttering the UI with additional displayed controls enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0551]** In some embodiments, the second area is comprised of a plurality of non-contiguous and non-overlapping areas (e.g., 1414A and 1414B of FIG. 14G) of the touch-sensitive surface (e.g., 1402 of FIG. 14G).

**[0552]** In some embodiments, the second area is comprised of a first sub-area (e.g., 1414A) and a second sub-area (e.g., 1414B), and wherein adjusting the volume of the currently playing media comprises: lowering the volume of the currently playing media if the location of the touch is within the first sub-area (e.g., 1414B); and raising the volume of the currently playing media if the location of the touch is within the second sub-area (e.g., 1414A).

**[0553]** In some embodiments, the touch is a first touch (e.g., 1416), and, subsequent to adjusting the volume of the currently playing media in accordance a determination that the location of the touch (e.g., 1416) is within the second area (e.g., 1414A): the electronic device (e.g., 1400) temporarily expands the second area to create an expanded second area (e.g., 1418 of FIG. 14I) for a predetermined amount of time after detecting the first touch (e.g., 1416) on the touch-sensitive surface (e.g., 1402). In some embodiments, the electronic device (e.g., 1400) receives a second touch (e.g., 1420) on the touch-sensitive surface. In some embodiments, the second touch (e.g., 1420) is located within the expanded second area (e.g., 1418). In some embodiments, the second touch (e.g., 1420) is not located within the second area (e.g., 1414A). In some embodiments, the electronic device (e.g., 1400) determines whether the second touch (e.g., 1420) was received during the predetermined amount of time after detecting the first touch (e.g., 1416). In accordance with a determination that the second touch was received during the predetermined amount of time after detecting the first touch, the electronic device (e.g., 1400) adjusts the volume of the currently playing media (e.g., as illustrated by 1422 of FIG. 14K). In accordance with a determination that the second touch was not received during the predetermined amount of time after detecting the first touch, the electronic device (e.g., 1400) ceases playing media. In some embodiments, ceasing playing media comprises pausing playback of currently playing media.

**[0554]** In some embodiments, the touch-sensitive surface includes a display (e.g., 1404A and 1404B). In some embodiments, the display is an LED array (e.g., 1406). In some embodiments, further in accordance with a determination that the device is currently playing media, the electronic device (e.g., 1400) displays, on the display, an indicator (e.g., + icon in 1406A of FIG. 14D) within the second area (e.g., 1414A). In some embodiments, further in accordance with a determination that the device is not currently playing media, the electronic device (e.g., 1400) forgoes displaying the indicator within the second area.

**[0555]** In some embodiments, the electronic device (e.g., 1400) to adjust the volume of the currently playing media comprises: the electronic device (e.g., 1400) adjusts a media playback volume (e.g., 1430 of FIG. 14M); and the electronic device (e.g., 1400) adjusts a virtual assistant volume (e.g., 1432 of FIG. 14M). In some embodiments, the virtual assistant volume is

5 proportional to the media playback volume.

**[0556]** In some embodiments, the virtual assistant volume is non-zero when the media playback volume is zero.

**[0557]** In some embodiments, a maximum value of the virtual assistant volume (e.g., 1432) is lower than a maximum value of the media playback volume (e.g., 1430).

10 **[0558]** Note that details of the processes described above with respect to method 1500 (e.g., FIG. 15) are also applicable in an analogous manner to the methods described below/above. For example, method 700, 900, 1100, 1300, 1700, 1800, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 1500. For brevity, these details are not repeated below.

15 **[0559]** FIGS. 16A-16P illustrate exemplary user techniques and interfaces for adding media to a playback queue, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIGS. 17-18.

**[0560]** FIG. 16A illustrates an exemplary scenario in which a plurality of devices are connected. Specifically, device 1600 is a smart speaker that is connected to both devices 1602 and 1604 (e.g., personal devices). In some embodiments, device 1600 includes one or more

20 features of devices 100, 300, 500, or 580. In some embodiments, devices 1602 and 1604 include one or more features of devices 100, 300, 500, or 580. In some examples, the respective users of devices 1602 and 1604 may desire to add media to a shared playback queue that is maintained by, and/or stored in, device 1600. FIGS. 16B-16P illustrate exemplary techniques for doing so.

25 **[0561]** At FIG. 16B, device 1602 displays an exemplary playlist selection interface 1606 on display 1603. Under interface heading 1606A, device 1602 displays a playlist affordance 1606B, representing the playlist titled “Tim’s Birthday”. As shown in FIG. 16B, the playlist “Tim’s Birthday” is identified as a “Shared Playlist”. In some embodiments, a shared queue (e.g., a

shared playlist) is a queue that one or more users and/or one or more devices can access and/or manage (e.g., add media items, remove media items, begin playback, or the like). At FIG. 16C, device 1602 receives user input 1608, representing selection of affordance 1606B. In some embodiments, device 1602 displays interface 1610 of FIG. 16D in response to receiving user  
 5 input 1608.

**[0562]** FIG. 16D illustrates an exemplary interface representing a playback queue (also referred to variously as a “media playback queue” or simply a “queue”). Playlist interface 1610 of FIG. 16D includes a single media item 1610B listed under playlist identifier 1610A. As shown in FIG. 16D, media item 1610B represents the song “Same Thing” by artist “Jambug”. In  
 10 some embodiments, an interface representing a playback queue includes additional information associated with a media item. For example, media item 1610B also includes an identification of the user who added the media item to the playlist (e.g., the user named Tim) and a source of the media item (e.g., a media streaming service named Apple Music).

**[0563]** In this example, playlist interface 1610 is displayed on device 1602. However,  
 15 because the playback queue represented by playlist interface 1610 is a shared queue, it can be accessed by multiple users and/or multiple devices. In some embodiments, device 1604 displays playlist interface 1610. In some embodiments, device 1602 and device 1604 display (e.g., concurrently) playlist interface 1610. Referring back to the scenario in FIG. 16A, devices 1602 and 1604 are associated with different users.

**[0564]** While reference is made to a playlist of songs in this example, an exemplary playback  
 20 queue is not limited to songs. In some embodiments, a playback queue is any data representing one or more media items and information usable to access the media items (e.g., for playback). In some embodiments, a playback queue includes data associated with the one or more media items. For example, the playback can include information regarding one or more of: when the  
 25 media was added to the queue, when the media expires from the queue, a source of the media (e.g., file location, a URL, an identification of a streaming service, a source device (e.g., the device that stores the media item)), credentials for accessing media (e.g., login credentials or a token granting access to a media streaming service), an identifier of a user that added the media to the queue, an identifier of a device that added the media to the queue, or the like. In some

embodiments, a playback queue includes, but is not limited to, one or more of the following types of media items: an audio file, a video file, an audio stream, a video stream, or the like.

**[0565]** Turning back to the figures, FIGS. 16E-16P illustrate exemplary interfaces for adding media items to the playlist depicted in playlist interface 1610, in accordance with some  
5 embodiments.

**[0566]** At FIG. 16E, device 1602 displays browsing interface 1612, which is identified by browsing interface header 1612A as a list of New Music. In some embodiments, device 1602 displays browsing interface 1612 subsequent to displaying playlist interface 1610. In some  
10 embodiments, a browsing interface is any interface (e.g., of a media application) for browsing and selecting media items. Browsing interface 1612 includes affordance 1612B representing a first media item (e.g., the song “Monday Morning” by artist “The Fomoers”) and affordance 1612C representing a second media item (e.g., the song “Paradise” by artist “MKTS”). At FIG. 16F, device receives user input 1614, associated with affordance 1612B. In some examples, user input 1614 is a deep press or a press and hold user input.

**[0567]** At FIG. 16G, device 1602 displays media menu 1616 in response to user input 1614. Media menu 1616 includes various items for performing actions associated with the media item of affordance 1612B. Media menu 1616 includes affordance 1616A (e.g., an “add to playlist” affordance). At FIG. 16H, device 1602 receives user input 1618 representing a selection of affordance 1616A. In some examples, user input 1618 is a tap user input.

**[0568]** In response to user input 1618, device 1602 displays playlist interface 1610, which  
20 has been updated to include media item 1610C (FIG. 16I). Media item 1610C represents the media item associated with media menu 1616 of FIG. 16G (e.g., the song “Monday Morning” by artist “The Fomoers”). Thus, the user of device 1602 has added a media item to the shared playlist titled “Tim’s Birthday”. As described above, other users and devices (e.g., device 1604)  
25 can view and add media to a shared queue, as illustrated below.

**[0569]** At FIG. 16J, device 1604 displays a media menu 1619 on display 1605. In some embodiments, device 1604 displays media menu 1619 in response to a user input (not illustrated) associated with affordance 1612C, of browser interface 1612 (e.g., as shown in FIG. 16E),

representing the second media item (e.g., the song “Paradise” by artist “MKTS”). Media menu 1619 includes affordance 1619A (e.g., an “add to playlist” affordance). As shown in FIG. 16J, device 1604 receives user input 1620, associated with affordance 1619A. In some examples, user input 1620 is a tap user input.

5    **[0570]**     In response to input 1620, device 1604 displays playlist interface 1610, which has been updated to include media item 1610D (FIG. 16K). Media item 1610D represents the media item associated with media menu 1619 of FIG. 16J (e.g., the song “Paradise” by artist “MKTS”). Thus, the user of device 1604 has added a media item to the shared playlist titled “Tim’s Birthday”. Accordingly, in this example, two devices associated with two different users  
10    accessed and added media to a shared queue (e.g., the media queue “Tim’s Playlist”, as represented by 1610).

**[0571]**     FIG. 16K also depicts additional information regarding one or more of the media items in the playback queue represented by playlist interface 1610, in accordance with some embodiments. As shown, each affordance includes information regarding a user (e.g., a user  
15    account) that added the corresponding media item to the queue. Additionally, each affordance includes information regarding a source (e.g., a media application) of the corresponding media item to the queue. As shown, media item 1610B was added by the user “Tim” from the source “Apple Music” (e.g., a music application, for playing local files or media streams). Media item 1610C was added by the user “Jessica” (identifier 1610G) from the source “Music Streamer”  
20    (e.g., a music streaming application) (identifier 1610E). Media item 1610D was added by the user “Jim” (identifier 1610H) from the source “Music Website” (e.g., a music streaming website) (identifier 1610F).

**[0572]**     In some embodiments, users can remove media items from a shared queue. FIGS. 16L-16O depict exemplary interfaces for removing media items from a shared queue. At FIG.  
25    16L, device 1604 receives user input 1621 associated with affordance 1610C of playlist interface 1610. In some examples, user input 1621 is a deep press or a press and hold user input.

**[0573]**     In response to input 1621, device 1604 displays media menu 1622, which includes an affordance 1622A for deleting a media item from the playlist (e.g., that includes the text “Delete from Tim’s Birthday”) (FIG. 16M). At FIG. 16M, device 1604 receives user input 1623



representing selection of affordance 1622A. In some examples, user input 1623 is a tap user input.

**[0574]** At FIG. 16N, in response to input 1623, device 1604 displays playlist interface 1610, which has been updated to remove the media item associated with affordance 1610C. Thus, in the examples shown in FIG. 16N, the user of device 1604 has deleted a media item that was added by the user of device 1602. In some embodiments, any user can delete a media item from a shared queue. In some embodiments, a user can only delete media items that were added by them. In some embodiments, a user cannot delete any media items from a queue (e.g., even if added by them). In some embodiments, a user's ability to delete media items from a queue is subject to permissions. For example, a user can lack the ability (e.g., permission) to delete media items from a shared queue, but subsequently gain such ability after being granted permission (e.g., by a member of the home). In some embodiments, a user has the ability (e.g., permission) to remove media items from a queue by virtue of being a member of a set of users (e.g., a member of the home that includes device 1600 or another device that maintains or stores the queue).

**[0575]** FIG. 16O illustrates an exemplary message informing a user that they do not have permission to delete an item from a shared queue. Message box 1624 includes the message "You do not have permission to delete tracks from Tim's Birthday Playlist". In some embodiments, device 1604 displays message box 1624 in response to user input 1623. Thus, as alternative to the result shown in FIG. 16N, in some examples, device 1604 displays message box 1624 as shown in FIG. 16O if the user of device 1604 does not have permission to remove the media item that was added by the user of device 1602.

**[0576]** In some embodiments, a user or device requires permission to add a media item to a playback queue. For example, if a user lacks permission to add a media item to a shared queue, a message box similar to 1624 can be displayed that reads "You do not have permission to add tracks to Tim's Birthday Playlist". In some embodiments, permission to add media items are subject to the same conditions or approval states and levels described above with respect to permission to remove media items, and thus are not repeated.

[0577] FIG. 16P illustrates an exemplary queue removal condition, in accordance with some embodiments. Queue removal condition 1632 indicates that the media item 1610C will “expire” (e.g., be automatically removed from the queue) in 23 hours. In some embodiments, a media item in a playback queue is subject to being removed from the queue after a condition is met (e.g., or is not met), also referred to as a “queue removal condition”. In some embodiments, in accordance with a determination that a queue removal condition associated with a media item is satisfied, a device (e.g., a device that maintains or stores the queue) removes the media item from the playback queue. In some embodiments, the queue removal condition is satisfied if the requester (e.g., 1602) that added the media item (e.g., 1610C) is no longer connected to a local area network that includes the device that maintains or stores the playback queue (e.g., 1600). In some embodiments, the queue removal condition is satisfied if a predetermined amount of time passes after the first media item was added to the queue. In some embodiments, the predetermined amount of time is 24 hours. In some embodiments, the queue removal condition is satisfied if the requester (e.g., user and/or device that added the media item to the queue) is no longer connected to the local area network and the device that maintains or stores the queue (e.g., 1600) is not logged in to a media streaming service (e.g., that is the source of the media item).

[0578] Notably, a fourth device 1630 displays playback interface 1610 of FIG. 16P. In some embodiments, the fourth device is associated with a user (e.g., user account) different than the users associated with devices 1600, 1602, and 1604. Thus, as described above, FIG. 16P further illustrates that a shared playback queue can be viewed by any number of devices and any number of users. In some embodiments, a device can access a shared queue when connected (e.g., directly) to the device that maintains or stores the queue (e.g., communication link 1039 of FIG. 10M between devices 1010 and 1000). In some embodiments, a device can access a shared queue when connected to common network as a device that maintains or stores the queue (e.g., via access point 1030 of FIG. 10M between devices 1010 and 1000).

[0579] In some embodiments, a device is associated with a media preference profile (also referred to as a “taste preference profile”). For example, device 1600 can be associated with (e.g., logged into) a user account associated with a third user (e.g., not the users of devices 1602 and 1604). The third user, in some examples, may not want the media that is added to the shared playback queue on their device (e.g., 1600) to affect their media preference profile. For

example, the media preference profile can include data representing one or more of: particular media items associated the third user's account, media item playback history, media recommendations based on history or taste preferences, or the like. Thus, in some embodiments, media added to the playback queue on the first device (e.g., 1600) does not affect a media preference profile of a user account associated with the first device (e.g., 1600). In some examples, if the user of device 1602 is the same as the third user (e.g., whose account is associated with device 1600), device 1600 updates the media preference profile of third user based on media added by device 1602, but not based on media added by device 1604 (e.g., associated with a different user than the third user). Thus, the owner of a device can allow others to add music to a playback queue on a device associated with the owner's user account, without affect the device owner's taste preference profile.

**[0580]** FIG. 17 is a flow diagram illustrating a method for playing back media from a plurality of media streaming services using an electronic device in accordance with some embodiments. Method 1700 is performed at a device (e.g., 100, 300, 500, 580, 1600). Some operations in method 1700 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0581]** As described below, method 1700 provides an intuitive way for playing back media from a plurality of media streaming services. The method reduces the cognitive burden on a user for playing back media from a plurality of media streaming services, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to play back media from a plurality of media streaming services faster and more efficiently conserves power and increases the time between battery charges.

**[0582]** The electronic device (e.g., 1600) receives (1702) a first request (e.g., represented by user input 1618 of FIG. 16H) to queue a first media item (e.g., 1612B) for playback on a set of devices (e.g., 1600). In some embodiments, the set of devices includes the first device (e.g., 1600). In some embodiments, the set of devices includes one or more devices. In some embodiments, the set of devices excludes the first device (e.g., 1600).

**[0583]** The electronic device (e.g., 1600) adds (1704) the first media item (e.g., 1610C as shown in FIG. 16K) to a playback queue (e.g., 1610A).

**[0584]** The electronic device (e.g., 1600) receives (1706) a second request (e.g., represented by user input 1620 of FIG. 16J) to queue a second media item (e.g., 1612C) for playback on the set of devices (e.g., 1600).

**[0585]** The electronic device (e.g., 1600) adds (1708) the second media item (e.g., 1610D as shown in FIG. 16L) to the playback queue (e.g., 1610A).

**[0586]** The electronic device (e.g., 1600) accesses (1710) the first media item (e.g., 1610C) from a first media streaming service (e.g., represented by 1610E of FIG. 16K).

**[0587]** The electronic device (e.g., 1600) initiates playback (1712) of the first media item (e.g., 1610C) on the set of devices (e.g., 1600);

10 **[0588]** The electronic device (e.g., 1600) accesses (1714) the second media (e.g., 1610D) item from a second media streaming service (e.g., represented by 1610F of FIG. 16K) different than the first media streaming service (e.g., 1610E).

**[0589]** The electronic device (e.g., 1600) initiates playback (1716) of the second media item (e.g., 1610D) on the set of devices (e.g., 1600).

15 **[0590]** Allowing a first media item from a first media streaming service and a second media item from a second media streaming service, different than the first media streaming service, to be added to a common playback queue, accessed, and played back allows the user to efficiently queue and manage playback of media from different sources using a single interface, thus requiring fewer user inputs to do so. Reducing the number of inputs needed to perform an  
20 operation enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0591]** In some embodiments, the first request is received from a first requester (e.g., 1602).  
25 In some embodiments, a requester is a device (e.g., 1602). In some embodiments, a requester is a user account (e.g., a user account associated with identifier 1610G of FIG. 16K). In some embodiments, a requester is a user account associated with a device. In some embodiments, the

first request includes identification of the first requester (e.g., represented by 1610G of FIG. 16K).

**[0592]** In some embodiments, the second request is received from a second requester (e.g., 1604) different than the first requester (e.g., 1602). In some embodiments, the second request  
5 includes identification of the second requester (e.g., represented by 1610H of FIG. 16L).

**[0593]** In some embodiments, the first requester is a second device (e.g., 1602) associated with a first user account (e.g., a user account associated with identifier 1610G). In some embodiments, the second requester is a third device (e.g., 1604) associated with a second user account (e.g., a user account associated with identifier 1610H).

**[0594]** In some embodiments, further in response to receiving the first request, the electronic device (e.g., 1600) determines whether the first requester (e.g., 1602) has permission to add a media item (e.g., 1610C) to the playback queue (e.g., 1610). In accordance with a determination that the first requester has permission to add a media item to the playback queue (e.g., 1610), the electronic device (e.g., 1600) adds the first media item to the playback queue (e.g., 1610 as  
10 shown in FIG. 16I). In accordance with a determination that first requester does not have permission to add a media item to the playback queue, the electronic device (e.g., 1600) forgoes adding the first media item to the playback queue (e.g., 1610 remains as shown in FIG. 16D).  
15

**[0595]** In some embodiments, to determine whether the first requester has permission to add a media item to the playback queue, the electronic device (e.g., 1600) determines whether a user  
20 account (e.g., a user account associated with identifier 1610G) associated with the first requester (e.g., 1602) has permission to add a media item (e.g., 1610C) to the playback queue (e.g., 1610). In accordance with a determination that the user account associated with the first requester has permission to add a media item to the playback queue, the electronic device (e.g., 1600) adds the first media item (e.g., 1610C) to the playback queue (e.g., 1610 as shown in FIG. 16I). In  
25 accordance with a determination that the user account associated with the first requester does not have permission to add a media item to the playback queue, the electronic device (e.g., 1600) forgoes adding the first media item to the playback queue (e.g., 1610 remains as shown in FIG. 16D).

**[0596]** In some embodiments, the electronic device (e.g., 1600) receives, from the second requester (e.g., 1604), a third request (e.g., 1623) to remove the first media item (e.g., 1610C) from the playback queue (e.g., 1610). The electronic device (e.g., 1600) determines whether the second requester has permission to remove the first media item from the playback queue. In

5 accordance with a determination that the second requester has permission to remove the first media item from the playback queue, the electronic device (e.g., 1600) removes the first media item from the playback queue (e.g., 1610 as shown in FIG. 16N). In accordance with a determination that the second requester does not have permission to remove the first media item from the playback queue, the electronic device (e.g., 1600) forgoes removing the first media item  
10 from the playback queue (e.g., 1610 remains as shown in FIG. 16K).

**[0597]** In some embodiments, to determine whether the second requester (e.g., 1604) has permission to remove the first media item from the playback queue, the electronic device (e.g., 1600) determines whether the second requester (e.g., 1604) is a member of a predefined set of requesters (e.g., the set of users represented by 603A-603C of FIG. 6A) associated with the first

15 device. In accordance with a determination that the second requester is a member of a predefined set of requesters associated with the first device (e.g., 1600), the electronic device (e.g., 1600) removes the first media (e.g., 1610C) item from the playback queue (e.g., as shown in 1610 of FIG. 16N). In accordance with a determination that the second requester is a member of a predefined set of requesters associated with the first device, the electronic device (e.g.,  
20 1600) forgoes removing the first media item from the playback queue (e.g., 1610 remains as shown in FIG. 16K).

**[0598]** In some embodiments, the electronic device (e.g., 1600) transmits, to a fourth device (e.g., 1630 of FIG. 16P), an indication of the content of the playback queue (e.g., playlist 1610 of FIG. 16P) for display on the fourth device. In some embodiments, the indication of the content  
25 of the playback queue includes: an indication (e.g., 1610G) of the first requester that is associated with the first media item (e.g., 1610C) in the playback queue (e.g., 1610 of FIG. 16P), and an indication (e.g., 1610H) of the second requester that is associated with the second media item (e.g., 1610D) in the playback queue.

**[0599]** In some embodiments, subsequent to adding the first media item to the playback queue: the electronic device (e.g., 1600) determines whether a queue removal condition (e.g., illustrated by 1632 of FIG. 16P) for the first media item (e.g., 1610C) is satisfied. In some embodiments, the queue removal condition is satisfied if the requester (e.g., 1602) that added the media item (e.g., 1610C) is no longer connected to a local area network that includes the first device (e.g., 1600). In some embodiments, the queue removal condition is satisfied if a predetermined amount of time passes after the first media item was added to the queue. In some embodiments, the predetermined amount of time is 24 hours. In some embodiments, the queue removal condition is satisfied if the requester is no longer connected to the local area network and the first device (e.g., 1600) is not logged in to the first media streaming service. In some embodiments, in accordance with a determination that the queue removal condition for the first media item is satisfied, the electronic device (e.g., 1600) removes the first media item from the playback queue (e.g., removal of a media item as shown in FIG. 16O). In some embodiments, in accordance with a determination that the queue removal condition for the first media item is not satisfied, the electronic device (e.g., 1600) forgoes removing the first media item from the playback queue.

**[0600]** In some embodiments, the first device (e.g., 1600) is not included in the set of devices.

**[0601]** Note that details of the processes described above with respect to method 1700 (e.g., FIG. 17) are also applicable in an analogous manner to the methods described below/above. For example, method 700, 900, 1100, 1300, 1500, 1800, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 1700. For brevity, these details are not repeated below.

**[0602]** FIG. 18 is a flow diagram illustrating a method for playing back media requested by a plurality of devices using an electronic device in accordance with some embodiments. Method 1800 is performed at a device (e.g., 100, 300, 500, 580, 1600). Some operations in method 1800 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0603]** As described below, method 1800 provides an intuitive way for playing back media requested by a plurality of devices. The method reduces the cognitive burden on a user for playing back media requested by a plurality of devices, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to play back media requested by a plurality of devices faster and more efficiently conserves power and increases the time between battery charges.

**[0604]** The electronic device (e.g., 1600) receives (1802), from a second device (e.g., 1602) associated with a first user (e.g., a first user account), a first request (e.g., represented by user input 1618 of FIG. 16H) to queue a first media item (e.g., 1612B of FIG. 16E) for playback on a set of devices (e.g., 1600). In some embodiments, the set of devices includes the first device (e.g., 1600). In some embodiments, the set of devices includes one or more devices. In some embodiments, the set of devices excludes the first device (e.g., 1600).

**[0605]** The electronic device (e.g., 1600) adds (1804) the first media item (e.g., 1610C of FIG. 16K) to a playback queue (e.g., 1610 of FIG. 16K);

**[0606]** The electronic device (e.g., 1600) receives (1806), from a third device (e.g., 1604) associated with a second user (e.g., a second user account), a second request (represented by user input 1620 of FIG. 16J) to queue a second media item (e.g., 1612C of FIG. 16E) for playback on the set of devices (e.g., 1600). In some embodiments, the second user is different than the first.

**[0607]** The electronic device (e.g., 1600) adds (1808) the second media item (e.g., 1610D of FIG. 16K) to the playback queue (e.g., 1610 of FIG. 16L).

**[0608]** The electronic device (e.g., 1600) initiates playback (1810) of the first media item (e.g., 1610C of FIG. 16K) on the set of devices (e.g., 1600).

**[0609]** The electronic device (e.g., 1600) initiates playback (1812) of the second media item (e.g., 1610D of FIG. 16L) on the set of devices (e.g., 1600).

**[0610]** Allowing a first media item from a first device associated with a first user and a second media item from a second device associated with a second user, different than the first user, to be added to a queue for playback on a common set of devices allows a plurality of users



to efficiently share and manage a common playback queue from any of a plurality of devices, thus requiring fewer user inputs to do so. Reducing the number of inputs needed to perform an operation enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when  
 5 operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0611]** In some embodiments, the first request includes a first identifier (e.g., 1610G of FIG. 16K) of at least one of the first user and the second device.

**[0612]** In some embodiments, the second request includes a second identifier (e.g., 1610H of  
 10 FIG. 16K) of at least one of the second user and the third device.

**[0613]** In some embodiments, the second device (e.g., 1602) is associated with a first user account that is associated with the first user. In some embodiments, the first user account is a user account on a media streaming service. For example, exemplary media streaming services include Apple Music, Spotify, or the like. In some embodiments, the first user account is a  
 15 cloud-based service user account. For example, exemplary media streaming services include Apple iCloud, or the like.

**[0614]** In some embodiments, the third device (e.g., 1604) is associated with a second user account that is associated with the second user.

**[0615]** In some embodiments, the electronic device transmits, to a fourth device (e.g., 1630  
 20 of FIG. 16P), an indication (e.g., playlist 1610 of FIG. 16P) of the content of the playback queue for display on the fourth device, wherein the indication of the content of the playback queue includes: the first identifier (e.g., 1610G or 1610E of FIG. 16P) associated with the first media item (e.g., 1610C of FIG. 16P) in the playback queue, and the second identifier (e.g., 1610H or 1610F of FIG. 16P) associated with the second media item (e.g., 1610D of FIG. 16P) in the  
 25 playback queue.

**[0616]** In some embodiments, further in response to receiving the second request, and in accordance with a determination that the third device (e.g., 1604) has permission to add a media item to the playback queue, the electronic device (e.g., 1600) adds the second media (e.g., 1610D

of FIG. 16K) item to the playback queue. In some embodiments, in accordance with a determination that the third device does not have permission to add a media item to the playback queue, the electronic device (e.g., 1600) forgoes adding the second media item to the playback queue (e.g., 1610 remains as shown in FIG. 16I).

5   **[0617]**     In some embodiments, further in response to receiving the second request: in accordance with a determination that the second user (e.g., 1610H of FIG. 16K) associated with the third device (e.g., 1604) has permission to add a media item (e.g., 1610D of FIG. 16K) to the playback queue, the electronic device (e.g., 1600) adds the second media item to the playback queue (e.g., as shown in FIG. 16K). In some embodiments, in accordance with a determination  
10   that the second user associated with the third device does not have permission to add a media item to the playback queue, the electronic device (e.g., 1600) forgoes adding the second media item to the playback queue (e.g., the playback queue remains as shown in FIG. 16I, which does not include media item 1610D).

**[0618]**     In some embodiments, the electronic device (e.g., 1600) receives, from the third  
15   device (e.g., 1604), a third request (e.g., 1623 of FIG. 16M) to remove the first media item (e.g., 1610C) from the playback queue. In some embodiments, in response to receiving the third request, and in accordance with a determination that the third device has permission to remove the first media item from the playback queue, the electronic device (e.g., 1600) removes the first media item from the playback queue (e.g., 1610 as shown in FIG. 16N). In some embodiments,  
20   in accordance with a determination that the third device does not have permission to remove the first media item from the playback queue, the electronic device (e.g., 1600) forgoes removing the first media item from the playback queue (e.g., and displays message 1624 of FIG. 16O).

**[0619]**     In some embodiments, in response to receiving the third request (e.g., 1623 of FIG. 16M), and in accordance with a determination that the second user is a member of a predefined  
25   set of users (e.g., the set of users represented by 603A-603C of FIG. 6A) associated with the first device (e.g., 1600), the electronic device (e.g., 1600) removes the first media item (e.g., 1610C) from the playback queue (e.g., 1610 as shown in FIG. 16N). In some embodiments, in accordance with a determination that the second user is not a member of a predefined set of users

associated with the first device, the electronic device (e.g., 1600) forgoes removing the first media item from the playback queue.

**[0620]** In some embodiments, subsequent to adding the first media item to the playback queue, and in accordance with a determination that a queue removal condition (e.g., illustrated by 1632 of FIG. 16P) for the first media item (e.g., 1610C) is satisfied, the electronic device (e.g., 1600) removes the first media item from the playback queue (e.g., 1610 as shown in FIG. 16N). In some embodiments, the queue removal condition is satisfied if the requester (e.g., 1602) that added the media item (e.g., 1610C) is no longer connected to a local area network that includes the first device (e.g., 1600). In some embodiments, the queue removal condition is satisfied if a predetermined amount of time passes after the first media item was added to the queue. In some embodiments, the predetermined amount of time is 24 hours. In some embodiments, the queue removal condition is satisfied if the requester is no longer connected to the local area network and the first device (e.g., 1600) is not logged in to a media streaming service (e.g., that is the source of the media item). In some embodiments, in accordance with a determination that the queue removal condition for the first media item is not satisfied, the electronic device (e.g., 1600) forgoes removing the first media item from the playback queue.

**[0621]** In some embodiments, the first device (e.g., 1600) is not included in the set of devices.

**[0622]** In some embodiments, the first device (e.g., 1600) is associated with a media preference profile, wherein the media preference profile is associated with the first user. In some embodiments, further in response to receiving, from the second device (e.g., 1602) associated with the first user, the request (e.g., 1618) to queue the first media item (e.g., 1610C) for playback, the electronic device (e.g., 1600) updates the media preference profile based on the first media item. In some embodiments, further in response to receiving, from the third device associated with the second user, the request to queue the second media item for playback, the electronic device (e.g., 1600) forgoes updating the media preference profile based on the second media item. For example, if the request to queue the first media item is received from a device or user that is not associated with an owner of device 1600 (e.g., a home member), then a request

to queue the media item will not affect the owner's taste preferences (e.g., which can be based on history of media played back on device 1000, or other home devices).

**[0623]** Note that details of the processes described above with respect to method 1800 (e.g., FIG. 18) are also applicable in an analogous manner to the methods described below/above. For example, method 700, 900, 1100, 1300, 1500, 1700, 2000, 2200, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 1800. For brevity, these details are not repeated below.

**[0624]** FIGS. 19A-19P illustrate exemplary user interfaces for using a first device to configure a second device, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 20.

**[0625]** FIG. 19A illustrates a scenario (e.g., similar to that shown in FIG. 10E) in which a user brings device 1900 into close proximity to device 1906. In this example, device 1900 is being used to configure device 1906 (e.g., an initial configuration after powering on device 1906 for the first time). As shown, device 1906 is outputting an audio tone signal 1904 (e.g., representing sound waves). In some embodiments, device 1906 outputs an audio tone signal (e.g., 1904) in response to an indication that device 1900 is in close proximity to device 1906. For brevity, the above description regarding placement and detection of devices in close proximity (e.g., with respect to FIGS. 10A-10O) is hereby incorporated by reference, and thus not repeated.

**[0626]** FIG. 19B depicts an exemplary state of device 1900 immediately prior to being placed in close proximity to device 1906. As shown, device 1900 displays a home screen (e.g., home screen 605 as shown in FIG. 6B) on display 1902. At FIG. 19C, device 1900 is placed into close proximity to device 1906 (e.g., is within the proximity zone 1908). In some embodiments, proximity is detected in a manner similar to that discussed with respect to FIGS. 10C-10G. In some embodiments, in response to detecting an indication that device 1900 entered into close proximity to device 1906, device 1900 displays proximity card 1910, as shown in FIG. 19D.

**[0627]** FIGS. 19D-19P illustrate exemplary interfaces of a configuration process, in accordance with some embodiments. In this example, the configuration process is a process for

configuring a second device using a first device. Thus, as shown, the interfaces are displayed on a first device (e.g., device 1900), and the steps of the configuration process pertain to, for example, transmitting data to the second device, selecting or entering configuration settings, and the like. In some embodiments, the steps shown in FIGS. 19D-19P can be displayed in any order (e.g., other than that shown or described herein). In some embodiments, one or more of the steps shown in FIG. 19D-19P are omitted from a configuration process. In some embodiments, one or more steps other than those shown in FIG. 19D-19P are added to a configuration process. In some embodiments, the first device and the second device are devices that include one or more features of devices 100, 300, 500, or 580.

**[0628]** FIG. 19D illustrates an exemplary setup card. In some embodiments, device 1900 displays setup card 1910 in response to being placed in close proximity to device 1906. Thus, a setup card is also referred to herein as a “proximity card” as described above, the description of which is hereby incorporated by reference. In some embodiments, a device continues displaying a proximity card after being removed from close proximity to another device.

**[0629]** Setup card 1910 includes an identification of the device to be configured, which is the device (e.g., 1906) that device 1900 was placed in close proximity to. As shown, setup card 1910 includes the title “Speaker” (e.g., device 1906 is a smart speaker), as well as an image depicting the device (e.g., in the shape of device 1906 as shown in FIG. 19A). Setup card 1910 also includes affordance 1910A. In some embodiments, device 1900 initiates a configuration process (or otherwise proceeds to a next step in a configuration process) in response to receiving selection of affordance 1910A.

**[0630]** At FIG. 19E, device 1900 displays setup card 1912. In some embodiments, device 1900 displays setup card in response to user input selection (not illustrated) of affordance 1910A in FIG. 19D. Setup card 1912 depicts an exemplary location selection interface. Setup card 1912 includes a location selection affordance 1912A (e.g., which can be a scrollable list or a movable list item selector). Setup card also includes affordance 1912B, for example, for proceeding to a next step in the configuration process. In this example, the location “John’s Room” is selected using affordance 1912A, and device 1900 receives user input 1913 on affordance 1912B. In some embodiments, device 1900 transmits configuration data in response

to user input (e.g., 1913) associated with a setup card. In some examples, device 1900 transmits a location identifier for “John’s Room” to device 1906, in response to proceeding to a next step (e.g., in response to user input 1913) while the location “John’s Room” is selected. In some examples, device 1906 receives the location identifier and saves it into memory (e.g., storing it with one or more other configuration settings). In some embodiments, device 1900 transmits the configuration data to a third device (e.g., not device 1900 or 1906). For example, device 1900 can transmit configuration data to another device within the user’s home (e.g., a home control hub device, such as an Apple TV by Apple Inc. of Cupertino, California USA). In some embodiments, device 1900 displays setup card 1914 of FIG. 19F in response to user input 1913.

**[0631]** At FIG. 19F, device 1900 displays setup card 1914. Setup card 1914 includes a prompt to the user to share settings with device 1906 (“Share Your Settings”). In some embodiments, setup card 1914 includes an identification of settings to be shared with device 1906. For example, as shown in FIG. 19F, setup card identifies a user account (e.g., login credentials) and a home wireless network (e.g., connection credentials) to be transmitted to device 1906. In some embodiments, device 1900 is already connected to or logged into (or otherwise able to log into (e.g., the credentials are stored in memory)) the accounts or networks identified by setup card 1914. Thus, setup card 1914 provides an easy interface for identifying and permitting the sharing of certain settings with device 1906. In some embodiments, setup card 1914 allows selection of one or more of the settings to share with device 1906. For example, setup card 1914 can include selection affordances that allow selection of less than all of the accounts listed therein, thus allowing the user to share some (but not all) settings with device 1906. As shown in FIG. 19F, the settings to be shared in this example are: credentials for a user account (e.g., associated with the “Apple ID” “JAppleseed@icloud.com”) and credentials for a wireless network (e.g., for the Wi-Fi network named “Appleseed Home”). In some embodiments, device 1900 transmits the settings information to device 1900 in response to user input selection of affordance 1914B.

**[0632]** At FIG. 19G, device 1900 displays setup card 1916. In some embodiments, device 1900 displays setup card 1916 in response to user input selection of affordance 1914B. In some examples, setup card 1916 is displayed while device 1900 exchanges data with device 1906 (e.g.,

device 1900 transmits settings data as described above). For example, setup card 1916 includes status 1916A showing that the devices are connecting (or otherwise exchanging data).

**[0633]** At FIG. 19H, device 1900 displays setup card 1918. In some embodiments, device 1900 displays setup card 1918 subsequent to setup card 1916. For example, device 1900  
 5 displays setup card 1916 after transmitting the settings data to device 1906. Setup card 1918 includes a message 1918A. In some embodiments, the message conveys a current state of the configuration process. For example, as shown in FIG. 19H, message 1918A says “Playing Tone”. Thus, in the example depicted, device 1906 is currently playing a tone (e.g., an audio tone signal). In some embodiments, while displaying message 1916A, device 1900 is listening  
 10 for the tone played by device 1906. For brevity, the description of audio tone signals above (e.g., with respect to FIGS. 10A-10O) are hereby incorporate by reference.

**[0634]** In some embodiments, device 1900 displays a message (not illustrated) indicating that the tone was not detected by device 1900. For example, device 1900 can update message 1916A to read “Your device is listening but cannot detect a tone, please move your phone closer”.

**[0635]** In some embodiments, setup card 1918 includes one or more fields for entering a passcode (not illustrated). For example, as described above (e.g., with respect to FIGS. 10A-10O), device 1906 can output a dictated passcode (e.g., if a tone cannot be detected by device 1900 after a threshold number of attempts). Thus, using the one or more fields of setup card 1918, a user can enter the passcode that was dictated by device 1906, for example, in order to  
 20 progress to a next step in the configuration process (e.g., complete the setup process).

**[0636]** At FIG. 19I, device 1900 displays setup card 1920, which depicts a completion setup card. In some embodiments, device 1900 displays setup card 1920 after transmitting the settings data to device 1906. In some embodiments, device 1900 displays setup card 1920 after detecting an audio tone output by device 1906. Selection of the done affordance 1920A, in some  
 25 examples, dismisses the setup card 1920.

**[0637]** As described previously, a device (e.g., device 1906) can be configured to be part of a device group (e.g., a stereo pair). FIGS. 19J-19L illustrate exemplary interfaces for configuring a device to be part of a device group, in accordance with some embodiments.

[0638] At FIG. 19J, device 1900 displays setup card 1922. In some embodiments, device 1900 displays setup card 1922 in response to user input 1913 (e.g., representing selection of affordance 1912B of FIG. 19E, setting the location of device 1906). In the example shown in FIG. 19J, the location “John’s Room” already includes an existing device (e.g., another smart speaker like device 1906), and the user is presented the option to create a device group that includes the existing device and device 1906. The user can select either affordance 1922A (“Use as a stereo pair”) or affordance 1922B (“Not now”). In some examples, selection of affordance 1922B continues the configuration process as described above (e.g., display of setup card 1914). As shown in FIG. 19J, device 1900 receives user input 1923 representing selection of affordance 1922A. In some embodiments, device 1900 displays setup card 1924 in response to receiving user input 1923.

[0639] FIG. 19K illustrates an exemplary device group configuration interface. Setup card 1924 includes affordances 1924A and 1924B for selecting an audio channel for the device being configured (e.g., device 1906). In this example, the device group being created is a stereo pair (e.g., two devices that will be used to respectively output left and right channel stereo audio). In some embodiments, selection of affordance 1924C cancels the creation of a device group, and continues the configuration process as described above (e.g., display of setup card 1914). At FIG. 19K, device 1900 receives user input 1925 representing selection of the left channel (denoted “L”). Thus, device 1906 will be configured to output the left channel of a stereo audio signal for the device group named “John’s Room Speakers”.

[0640] In some embodiments, device 1900 displays setup card 1926 of FIG. 19L in response to receiving user input 1925. FIG. 19L indicates that the creation of the stereo pair was successful and includes affordance 1926A. In some embodiments, selection of affordance 1926A continues the configuration process as described above (e.g., display of setup card 1914).

[0641] FIGS. 19M-19N illustrate exemplary interfaces for creating a new location. In some examples, the configuration process allows for a user to create a new location identifier to associate with device 1906. Setup card 1928 of FIG. 19M illustrates an alternative version of the location selection setup card 1912 of FIG. 19E. Setup card 1928 includes an option, selected by affordance 1928A, to create a new location (e.g., as indicated by the text “Create New Room”).



FIG. 19N illustrates an exemplary interface 1930 for entering a location identifier. In some embodiments, interface 1930 is displayed as a proximity card. Interface 1930 includes a field 1930A for entering a name of a new location (e.g., room), for example, using displayed keyboard 1930B. As shown, the user of device 1900 has entered the name “Tim’s Room” into field 1930A. Device 1900 receives user input 1931 representing selection of a done affordance. In some embodiments, device 1900 creates the location named “Tim’s Room” and associates device 1906 therewith (e.g., transmits the identifier to device 1900) in response to selection of the done affordance. Thus, in some examples, the user is not required to exit, or otherwise terminate, the configuration process in order to seek out an interface (e.g., an interface of a home control application, as described above with respect to FIG. 6A) for creating a new location identifier for their home group of devices, only to return and restart the configuration process from the beginning, wasting time and device resources. In some embodiments, in response to receiving user input 1931, device displays setup card 1914. In some embodiments, in response to receiving user input 1931, device 1900 proceeds to a next step in a configuration process.

**[0642]** In some embodiments, a location identifier is a name associated with the device. For instance, in some examples, a location identifier does not include reference to any particular location (e.g., “Speaker 1”). Thus, the location identifier can simply be used as a name by which to identify a configured device (e.g., at a multi-device interface as described above).

**[0643]** In some examples, the configuration process requires that device 1900 logs into a user account in order to proceed with the configuration process. FIGS. 19O-19P illustrate exemplary interfaces for logging into a user account during a configuration process, in accordance with some embodiments. Setup card 1932 includes the message “Please login to your iCloud account to continue”, and includes an affordance 1932A that includes the option “Login Now”. In some embodiments, setup card 1932 is displayed prior to setup card 1914. For example, if device 1900 determines that it is not logged into a required user account, it displays setup card 1932 in response. In some embodiments, after receiving login credentials, device 1900 displays setup card 1914. In some embodiments, device 1900 displays setup card 1932 in response to selection of affordance 1914B (“Share Settings”).

**[0644]** At FIG. 19P, device 1900 displays a setup card 1934 with fields 1934A and 1934B for receiving login credentials during the configuration process. Thus, in some examples, the user is not required to exit, or otherwise terminate, the configuration process in order to seek out a login page, only to return and restart the configuration process from the beginning, wasting  
 5 time and device resources. In some embodiments, after receiving login credentials in fields 1934A and 1934B (e.g., and after verifying them or using them to successfully login to the user account), device displays setup card 1914. In some embodiments, after receiving valid credentials (e.g., via setup card 1934), device 1900 proceeds to a next step in a configuration process.

**[0645]** FIG. 20 is a flow diagram illustrating a method for configuring a second device using an electronic device in accordance with some embodiments. Method 2000 is performed at a device (e.g., 100, 300, 500, 580, 1900) with a display. Some operations in method 2000 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0646]** As described below, method 2000 provides an intuitive way for configuring a second device. The method reduces the cognitive burden on a user for configuring a second device, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to configure a second device faster and more efficiently conserves power and increases the time between battery charges.

**[0647]** The electronic device (e.g., 1900) (also referred to as a “first device”) detects (2002) an audio tone signal (e.g., 1904) indicative of a pairing handshake with a second device (e.g., 1906). In some embodiments, the audio tone signal is an initial tone. For example the tone is played in response to the devices being placed in close proximity. In some embodiments, the audio tone signal is played during a configuration process. In some embodiments, the audio tone  
 25 signal represents a response to another audio tone signal played by the electronic device.

**[0648]** In some embodiments, the first device (e.g., 1900) is connected (2004) to the second device via a communication link (e.g., 1039 of FIG. 10M). In some embodiments, the communication link is a wireless communication link. For example, the communication can be a Bluetooth or a Wi-Fi connection, or the like.

**[0649]** In some embodiments, the audio tone signal (e.g., 1904) is out-of-band to the communication link (2006). For example, the audio tone signal is not transmitted using the communication link. For example, the first and second devices are connected and exchange data communications over a Bluetooth wireless connection (e.g., a communication link). In this example, while the devices continue to be connected via the Bluetooth connection (e.g., while the devices are paired), an audio tone signal (e.g., an audible tone that includes or represents a communication between the devices) is out-of-band with the Bluetooth communication link. In some embodiments, being out-of-band to a communication link means that a signal (e.g., an audio tone signal) is not communicated using the same data exchange technique.

**[0650]** Using an audio tone signal that is out-of-band with a communication link between two devices allows the user to efficiently move through a configuration process for a device with fewer required user inputs, while ensuring that the devices are in relatively close proximity and that the user has physical access to both devices. Providing an optimized configuration process to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0651]** In accordance with detecting the audio tone signal, the first device (e.g., 1900) initiates (2008), on the first device (e.g., 1900), a configuration process for configuring the second device (e.g., 1906).

**[0652]** Using a detection of an audio tone signal allows the user to efficiently move through a configuration process for a device with fewer required user inputs. Providing an optimized configuration process to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0653]** During the configuration process, the first device (e.g., 1900) displays (2010), on the display (e.g., 1902), a configuration user interface (e.g., 1912) that includes a prompt to select a location (e.g., “Where is this speaker?” as shown in FIG. 19E).

**[0654]** The first device (e.g., 1900) receives (2012) user input selection (e.g., 1913) of a location (e.g., the location “John’s Room” shown in 1912A of FIG. 8J).

**[0655]** In response to receiving the user input, the first device (e.g., 1900) configures (2014) the second device (e.g., 1906) to be associated with the location. In some embodiments, configuring the second device to be associated with the location includes transmitting configuration data that includes the location. In some embodiments, the data is transmitted to the second device (e.g., a smart speaker). In some embodiments, the data is transmitted to a third device (e.g., Apple TV).

**[0656]** In some embodiments, the audio tone signal (e.g., 1904) is generated by the second device (e.g., 1906 as shown in FIG. 19A).

**[0657]** In some embodiments, the audio tone signal includes an audio passcode. In some embodiments, the audio passcode is dictated (e.g., as shown in FIG. 10J). In some embodiments, the audio passcode is encoded in the audio tone signal.

**[0658]** In some embodiments, the audio tone signal (e.g., 1904) is received while the first device (e.g., 1900) is physically positioned within a threshold physical proximity (e.g., 1908 of FIG. 19C) to the second device (e.g., as shown in FIG. 19C).

**[0659]** In some embodiments, the audio tone signal is a first audio tone signal, the method further comprising, during the configuration process (e.g., while displaying setup card 1918 of FIG. 19H): detecting a second audio tone signal comprising encoded data. For example, the second audio tone signal includes one or more of user account login information, an identifier for the second device, or other data for confirming that the second device should be provided access to the user’s account or personal data. In response to detecting the second audio tone signal: the first device (e.g., 1900) transmits an acknowledgement to the second device (e.g., 1906); and the first device (e.g., 1900) proceeds to a next step in the configuration process (e.g., displays the setup card 1920 of FIG. 19I).

**[0660]** In some embodiments, further in response to receiving the user input selection (e.g., 1913) of the location (e.g., “John’s Room” as shown in FIG. 19J): in accordance with a determination that a third device (e.g., device 1020 of FIG. 10K, where the second device is device 1000 of FIG. 10K) is currently associated with the location (e.g., “John’s Room”), the first device (e.g., 1900) displays, on the display (e.g., 1902), a configuration user interface (e.g., setup card 1922 of FIG. 19J) that includes a prompt (e.g., affordance 1922A in FIG. 19J that includes text “Use as a stereo pair”) to select whether to create a device group (e.g., stereo pair) that includes the second device and the third device. In some embodiments, a device group includes two or more devices. In accordance with a determination that a third device is not currently associated with the location, the first device (e.g., 1900) forgoes displaying, on the display, the configuration user interface that includes the prompt to select whether to create the device group (e.g., displays setup card 1914 of FIG. 19F instead of setup card 1922).

**[0661]** In some embodiments, the first device (e.g., 1900) receives user input (e.g., 1923) representing an affirmative request create the device group. In some embodiments, in response to the user input representing an affirmative request create the device group, the first device (e.g., 1900) displays, on the display, a configuration user interface (e.g., 1924 of FIG. 19K) that includes a prompt (e.g., “Is this speaker left or right?” as shown in FIG. 19K) to select an audio output channel (e.g., left or right, as shown in FIG. 19K) to associate with the second device. In some embodiments, the first device (e.g., 1900) receives user input (e.g., 1925) representing selection of an audio output channel (e.g., left, as shown in FIG. 19K). In response to receiving the user input representing selection of a selected audio output channel, the first device (e.g., 1900) associates (e.g., transmits configuration data to) the second device with the selected audio channel.

**[0662]** In some embodiments, the prompt to select a location includes a plurality of predetermined location identifiers (e.g., Kitchen, Bedroom, Patio, Dining Room, as shown in FIG. 19E).

**[0663]** In some embodiments, the plurality of predetermined location identifiers includes a user-defined location identifier (e.g., John’s Room, as shown in FIG. 19E).

**[0664]** In some embodiments, the prompt to select a location includes a field (e.g., “Create New Room” option as shown in FIG. 19M) for creating a new location identifier. In some embodiments, the first device (e.g., 1900) receives user input (e.g., 1931) associated with the field for creating a new location identifier (e.g., text entered into field 1930A of FIG. 19N), wherein the user input includes a location identifier (e.g., “Tim’s Room” as shown in FIG. 19N). The first device (e.g., 1900) creates a new location identifier based on the received user input associated with the field for creating the new location identifier, and associates the second device with the new location identifier (e.g., transmits configuration data that includes the new location identifier to the second device).

**[0665]** In some embodiments, during the configuration process: the first device (e.g., 1900) displays, on the display (e.g., 1902), a configuration user interface (e.g., setup card 1914 of FIG. 19F) that includes a prompt (e.g., “Share your settings” affordance 1914B as shown in FIG. 19F) requesting permission to transmit user account information (e.g., login credentials) to the second device (e.g., 1906). The first device (e.g., 1900) receives user input (e.g., selection of affordance 1914B) providing permission to transmit the user account information to the second device. In response to receiving the user input providing permission, the first device (e.g., 1900) transmits the user account information to the second device (e.g., 1906).

**[0666]** In some embodiments, prior to transmitting the user account information to the second device, and in accordance with a determination that the first device (e.g., 1900) is not currently logged into a user account associated with the user account information (e.g., is not currently logged into an iCloud account), the first device (e.g., 1900) displays, on the display (e.g., 1902), a prompt to log in to the user account (e.g., setup card 1932 that includes the text “Please login to your iCloud account to continue” as shown in FIG. 19O), and forgoes transmitting the user account information to the second device. In accordance with a determination that the first device is currently logged into the user account associated with the user account information, the first device (e.g., 1900) transmitting the user account information to the second device (e.g., 1906).

**[0667]** In some embodiments, in response to progressing from a first step (e.g., setup card 1912) in the configuration process to a second step (e.g., setup card 1914) in the configuration

process, the first device (e.g., 1900) outputs a third audio tone signal (e.g., 1044 of FIG. 10N). In some embodiments, the third audio tone signal is outputted concurrently with the output of a fourth audio tone signal (e.g., 1042 of FIG. 10N) outputted by the second device (e.g., 1906). In some embodiments, the third audio tone signal and the fourth audio tone signal are harmonics.

5    **[0668]**     In some embodiments, in response to progressing from the second step (e.g., setup card 1914) in the configuration process to a third step (e.g., setup card 1916) in the configuration process, the first device (e.g., 1900) outputs a fifth audio tone signal (e.g., 1048 of FIG. 10O). In some embodiments, the fifth audio tone signal is outputted concurrently with the output of a sixth audio tone signal (e.g., 1046 of FIG. 10O) outputted by the second device (e.g., 1906). In  
10   some embodiments, the fifth audio tone signal and the sixth audio tone signal are harmonics. In some embodiments, the fifth audio tone signal is a higher frequency tone than the third audio tone signal (e.g., as shown in plot 1040 of FIG. 10O).

**[0669]**     Note that details of the processes described above with respect to method 2000 (e.g., FIG. 20) are also applicable in an analogous manner to the methods described below/above. For  
15   example, method 700, 900, 1100, 1300, 1500, 1700, 1800, 2200, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 2000. For brevity, these details are not repeated below.

**[0670]**     FIGS. 21A-21I illustrate exemplary user interfaces for adjusting a device output of an audible signal, in accordance with some embodiments. The user interfaces in these figures are  
20   used to illustrate the processes described below, including the processes in FIG. 22.

**[0671]**     FIG. 21A illustrates an exemplary scenario in which a plurality of devices are connected. Specifically, device 2100 (also referred to as a first device) is a smart speaker that is connected to device 2110 (e.g., another smart speaker, also referred to as a second device). Device 2100 is optionally connected to the device being held by user 2106 (e.g., a personal  
25   device). In some embodiments, devices 2100, 2107, and 2110 include one or more features of devices 100, 300, 500, or 580. In some examples, device 2100 and/or device 2110 includes one or more audio signal detection components (e.g., microphones) and can detect voice user input. As shown in FIG. 21A, the user 2106 utters the voice input command 2108 “Hey Siri” aloud, which is detected by device 2100. Further, the voice input command 2108 is uttered while

device 2100 is currently outputting an audible signal 2104 (e.g., media playback, voice assistant text-to-speech output), and while device 2110 is currently outputting an audible signal 2112 (e.g., media playback, voice assistant voice output). In some embodiments, device 2100 and device 2110 are concurrently outputting synchronized audible signals (e.g., are a stereo pair group, and are outputting synchronized playback of the same media item).

**[0672]** FIG. 21B depicts an overhead view of the scenario of FIG. 21A, and illustrates the relative spatial positioning of device 2100, device 2110, and user 2106 relative to each other.

**[0673]** In some embodiments, in response to detecting the user input voice command (e.g., 2108 by user 2106), device 2100 adjusts the output of an audible signal (e.g., 2104). In some embodiments, device 2100 adjusts the output of the audible signal based on a spatial position of the voice command source (e.g., the position of user 2106) while continuing to output the audible signal (e.g., 2104). For example, device 2100 applies spatial domain audio processing to project the sound away from the user 2106, to filter the sound with low pass, and/or band pass, and/or high pass filters, or to lower the volume (e.g., to zero) of one or more of its speakers (e.g., where device 2100 includes an array of a plurality of speakers). For example, device 2100 can lower the volume of a speaker (e.g. of an array of speakers of device 2100) that is outputting the audible signal and that is nearest the spatial position of user 2106.

**[0674]** In some embodiments, in response to detecting the user input voice command (e.g., 2108), device 2100 determines a spatial position of a voice command source (e.g., user 2106).

FIG. 21C illustrates exemplary values that a device (e.g., 2100) uses to determine a spatial position of a voice command source (e.g., 2106). As shown, user 2106 is standing at a position that is a lateral angle 2122 (e.g.,  $\theta$  (theta) degrees) from a reference point on reference marker 2120. Reference marker 2120 is included for illustrative purposes. User 2106 is standing at a distance 2124 (e.g.,  $d$  units of length) away from device 2100 (e.g., which is depicted as the center of reference marker 2120). In some embodiments, device 2100 uses one or more of an angle and distance to determine a spatial position of a voice command source. In some embodiments, an angle is a lateral angle (e.g. as shown in FIG. 21C). In some embodiments, an angle is a vertical angle. For example, using a vertical angle (not illustrated), device 2100 can determine a height (e.g., in a z-direction, a third dimension) of a voice command source relative



to device 2100. In some embodiments, a spatial position of the voice command source is a position relative to device 2100 (e.g., relative to a coordinate system of device 2100, as illustrated by 2120).

**[0675]** In some embodiments, a plurality of devices (e.g., 2100 and 2110) are used to determine a spatial position of a voice command source (e.g., user 2106). For example, both devices 2100 and 2110, as shown in FIG. 21C, can determine a distance to user 2106 and share the results with the other device. In some examples, device 2100 uses both distance measurements to determine a spatial position of user 2106. For further example, three devices can be used to triangulate a position of a voice command source (e.g., user 2106). Utilizing a plurality of approximations or measurements from a plurality of devices, in some examples, results in a more accurate determination of spatial position of a voice command source than would otherwise be achieved with a single device.

**[0676]** In some embodiments, device 2100 adjusts the output of the audible signal based on the spatial position of the voice command source (e.g., user 2106). FIG. 21D illustrates the overhead view of FIGS. 21C and 21D, however the output of the audible signal 2104 has been adjusted (e.g., reduced) in the direction of user 2106, as shown by the lack of sound waves emanating from device 2100 in the direction of user 2106. As seen in FIG. 21D, device 2100 continues to output audible signal 2104 in directions not directly facing the user.

**[0677]** In some embodiments, device 2100 adjusts the output of the audible signal based on the second device (e.g., 2110). FIG. 21E illustrates that device 2100 has adjusted (e.g., ceased) the output of the audible signal 2104 (similar to FIG. 21D) both in the direction of user 2106 and in the direction of the second device 2110. This can be done, for example, when device 2110 is also listening to the voice command input. In some examples, devices 2100 and 2110 can both detect voice user input 2108. In such examples, device 2110 can better suited (e.g., is a shorter distance from the user, has a more sensitive microphone, has faster speech processing hardware) for detecting the voice user input (e.g., 2108). Thus, for example, device 2100 can reduce the output of an audible signal so as to reduce an influence on the device 2110 (e.g., thus reducing interference with device 2110's audio detection function). In some embodiments, the first device (e.g., device 2100) uses a known influence (e.g., that its audio output has) on the second device

(e.g., device 211) to adjust output. In some embodiments, the first device (e.g., device 2100) determines a known influence based on data received from the second device (e.g., device 2110). For example, device 2100 can receive (e.g., from device 2110) data representing an influence that audio output from device 2100 has on detection circuitry (e.g., a microphone array) of device 2110. In some embodiments, a known influence is determined during playback (e.g., device 2100 determines a known influence while outputting the audible signal 2104). For instance, in some examples, device 2100 and device 2110 are outputting the same output signal, and device 2100 thus uses the known output signal to reduce interference with any input signal (e.g., voice input) from user 2106 (e.g., device 2100 subtracts one signal from the other before signal output). In some embodiments, a known influence is predetermined data retrieved from memory (e.g., previously determined and subsequently retrieved from memory of device 2100). In some embodiments, a known influence (e.g., on a second device) includes data regarding the influence of one or more of the following characteristics of audio output by the first device: frequency, volume, and direction.

**[0678]** FIGS. 21F and 21G illustrate an exemplary adjustment of output of device 2100. As shown, device 2100 includes a speaker array (e.g., one or more speakers) of three speakers (e.g., 2102A-2102C), each pointing in different directions (e.g., directions 120 degrees apart). In some embodiments, a speaker array includes any number of two or more speakers. Before adjustment (e.g., before detection of voice user input 2108), the output levels of the speakers 2102A-2102C are shown in FIG. 21F. As shown in FIG. 21G, in response to detecting voice user input 2108, device 2100 reduces the output of speaker 2102B (e.g., which faces the user 2106) to zero (e.g., zero volume), and slightly reduces the output of speakers 2102A and 2102C.

**[0679]** In some embodiments, a first device performs an audio processing technique. For example, device 2100 can perform an audio processing technique to project the audio output so that it is perceived by a user to be in a direction away from the user. For example, device 2100 performs a spatial audio processing technique on one or more signals representing the audio output. The spatial audio processing technique, in some examples, is used to transform the one or more signals representing the audio output, when outputted by the device, is perceived by a listener to emanate from a selected spatial position. One of skill in the art would recognize that

various appropriate techniques can be used for performing such audio processing, all of which are intended to be within the scope of this disclosure.

[0680] FIG. 21H illustrates the overhead view of devices 2100 and 2110 and user 2106, and includes two points—a first point 2132 (e.g., representing a spatial position) that is in a direction  
5 away from user 2106 (e.g., relative to device 2100), and a second point 2130 (e.g., representing a spatial position) that is in a direction toward the user (e.g., relative to device 2100).

[0681] In some embodiments, device 2100 adjusts audio output such that it will be perceived by a voice command source (e.g., user 2106) to emanate from a point in a direction away from them (e.g., relative to device 2100). For example, in response to detecting voice user input 2108,  
10 the device can adjust the output of 2104 (e.g., playback of music as shown in FIG. 21I) so that the user 2106 perceives the sound to emanate from point 2132, rather than from the position of device 2100. Thus, while user is speaking, for example, they are provided an indication that device 2100 is currently listening (e.g., even though it continues playing back media) when they perceive the volume of audio output to be lowered (e.g., in comparison to the audible output  
15 prior to adjustment, as seen in FIG. 21B). Further, in this example, media playback is not interrupted (e.g., paused, stopped, muted) by a user voice command.

[0682] In some embodiments, device 2100 adjusts audio output such that it will be perceived by a voice command source (e.g., user 2106) to emanate from a point in a direction toward them (e.g., relative to device 2100). For example, as shown in FIG. 21I, in response to detecting voice  
20 user input 2108 (e.g., a command to a voice assistant function on device 2100), device 2100 outputs a response 2140 (e.g., text-to-speech output “OK, I’ll set a timer for 30 minutes”) in a direction toward user 2106 (e.g., toward point 2130 of FIG. 21H). In this example, voice user input 2108 included the command “Hey Siri, set a timer for 30 minutes”. Thus, user 2106 perceives the response sound (e.g., 2140) to emanate from point 2130. Thus, device 2100  
25 utilizes a known spatial position of a voice command source to target an audible response in the direction of the source. Thus, the user is provided a response that is more likely to be heard by the user. For example, if the user is in a noisy environment, targeting the audio output to the user’s position can increase the likelihood that the user hears the output of device 2100. Further, in this example, media playback is not interrupted (e.g., paused, stopped, muted at least in

directions facing away from the voice command source) while providing response sound 2140, since response sound 2140 is directed towards the user is therefore readily perceptible, even while media playback continues. Further, if there are multiple users in a room, device 2100's spatially-targeted output can provide increased privacy by targeting a response such that other, non-targeted users are less likely to hear.

**[0683]** FIG. 22 is a flow diagram illustrating a method for adjusting audible output using an electronic device in accordance with some embodiments. Method 2200 is performed at a device (e.g., 100, 300, 500, 580). Some operations in method 2200 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0684]** As described below, method 2200 provides an intuitive way for adjusting audible output. The method reduces the cognitive burden on a user for adjusting audible output, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to adjust audible output faster and more efficiently conserves power and increases the time between battery charges.

**[0685]** While outputting an audible signal (e.g., 2104) from the electronic device (e.g., 2100), the electronic device (e.g., 2100) detects a (2202) user input voice command (e.g., 2108) from a voice command source (e.g., 2106).

**[0686]** In response to detecting the user input voice command, the electronic device (e.g., 2100) determines (2204) a spatial position (e.g., angle 2122 and/or distance 2124 of FIG. 21C) of the voice command source (e.g., 2106) relative to the electronic device (e.g., 2100). In some embodiments, determining a spatial position includes determining one or more of a distance (e.g., 2124 of FIG. 21C) and an angle (e.g., 2122 of FIG. 21C) to the voice command source (e.g., a user speaking). For example, an angle can be a lateral angle or a vertical angle relative to a coordinate system of the electronic device.

**[0687]** While continuing to output the audible signal (e.g., 2104), the electronic device (e.g., 2100) adjusts (2206) the output (e.g., volume, frequency, and/or direction) of the audible signal based on the spatial position of the voice command source (e.g., as shown in FIG. 12D). In some embodiments, the electronic device (e.g., 2100) applies spatial domain audio processing to the

audible signal. In some embodiments, the electronic device (e.g., 2100) projects the output of the audible signal (e.g., sound) in one or more directions other than a direction toward the voice command source (e.g., 2106). In some embodiments, the electronic device (e.g., 2100) projects the output in a direction away from the voice command source. In some embodiments, the

5 electronic device (e.g., 2100) includes an array (e.g., two or more) of speakers. In some embodiments, the electronic device (e.g., 2100) adjusts the outputs of each speaker in the array of speakers. For example, the electronic device (e.g., 2100) adjusts the relative output of one or more speakers in the array to spatially-target output of the audible signal in a direction other than toward the voice command source. In some examples, the electronic device (e.g., 2100) lowers

10 the output volume (e.g., to zero) of a speaker (e.g., of an array of speakers) that is outputting the audible signal and that is nearest to the spatial position.

**[0688]** Adjusting the output of an audible signal, while continuing to output it, based on a spatial position determined in response to a user input voice command provides the user with feedback that their voice command is being detected. Providing improved audible feedback to

15 the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0689]** In some embodiments, the device is a first device, and the audible signal is a first

20 audible signal. In some embodiments, the electronic device (e.g., 2100) determines that a second device (e.g., 2110) is currently outputting a second audible signal (e.g., 2112). For example, the first and second device are currently playing the same content (e.g., are a device group), or the first device detects (e.g., via one or more microphones) that the second device is outputting audio (e.g., which can be a different audio signal).

**[0690]** In some embodiments, adjusting, by the first device (e.g., 2100), the output of the first

25 audible signal is further based on a known influence that audio output by the first device has on the second device (e.g., 2110). For example, the second device may be closer to the voice command source (e.g., 2106), and thus may be the most appropriate device to listen to the user input voice command (e.g., 2108). In some embodiments, the audio output of the first device is

adjusted so as to reduce interference with the second device's ability to detect and/or process the user input voice command. For example, the second device includes a microphone for detecting voice input and the first device adjusts its output so as to reduce interference with the second devices use of its microphone to detect voice user input. In some embodiments, the known  
 5 influence is determined (e.g., by device 2100) based on the spatial position of the second device (e.g., relative to the position of the first device). In some embodiments, the known influence is based on data received from the second device (e.g., the second device transmits quantitative data regarding how the output of audible signals by the first device affects the audio detection circuitry (e.g., microphone) of the second device).

10 **[0691]** In some embodiments, the first device (e.g., 2100) adjusts the output (e.g., volume, frequency, and/or direction) of the audible signal based on the spatial position of second device (e.g., 2110) (e.g., as shown in FIG. 21E).

**[0692]** In some embodiments, the device (e.g., 2100) includes a speaker array (e.g., two or more speakers, such as speakers 2102A-2102C of FIG. 21F), wherein each speaker in the  
 15 speaker array (e.g., 2102A-2102C) receives a respective output signal. In some embodiments, adjusting the output of the audible signal based comprises: performing an audio processing technique using at least: the respective output signals of each speaker in the speaker array (e.g., as illustrated in FIG. 21F), and the spatial position of the voice command source (e.g., as shown in FIG. 21C). In some embodiments, the electronic device (e.g., 2100) adjusts at least one of the  
 20 respective output signals corresponding to a speaker of the speaker array (e.g., as shown in FIG. 21G, in which speaker 2102B's output volume level has been reduced).

**[0693]** In some embodiments, the audio processing technique includes transforming the audio output into the spatial domain and applying one or more filters (e.g., head-related transfer functions (HRTFs). For example, the filter can create a three-dimensional audio effect at a  
 25 position that is laterally located in the opposite direction of the voice command source (e.g., point 2132 as shown in FIG. 21H). Thus, if a user is located at a position that is at some lateral angular position relative to the device (e.g., an angular position relative to the speaker that will be referred to as 0 degrees for reference), the speaker can apply a 3D audio effect to adjust the output of the audible signal so that the user perceives the audio to be emanating from an angular

position of 180 degrees relative to the speaker (e.g., point 2132 as shown in FIG. 21H). In some embodiments, the audio processing includes a cross-talk cancellation (CTC) process. In some embodiments, the audio processing technique includes a beamforming process (e.g., using constructive and/or destructive interference of sound waves to achieve spatial selectiveness of audio output). Any technique for creating a perceived spatial audio effect to a human listener is intended to be within the scope of this disclosure.

**[0694]** In some embodiments, the spatial position is a first spatial position (e.g., 2130 of FIG. 21H), and wherein adjusting the output of the audible signal further comprises outputting the audible signal (e.g., 2104) such that it will be perceived, by a listener (e.g., user 2106) at the first spatial position (e.g., 2130 of FIG. 21H), to emanate from a second spatial position (e.g., 2132 of FIG. 21H) that is in a direction, relative to the device (e.g., 2100), away from the first spatial position of the voice command source. For example, device 2100 applies a 3D audio effect such that a human listener located at the user's position will perceive the output (e.g., 2104) to be emanating from the spatial position that is in a direction away from the user, relative to the device.

**[0695]** In some embodiments, subsequent to adjusting the output of the audible signal: the electronic device (e.g., 2100) detects that the user input voice command (e.g., 2108) from the voice command source (e.g., 2106) has ended. In response to detecting that the user input voice command from the voice command source has ended, the electronic device (e.g., 2100) ceases adjusting the output the audible signal. For example, the adjusted audio output (shown in FIG. 12G) returns to its previous unadjusted state (e.g., as shown in FIG. 21F).

**[0696]** In some embodiments, determining the spatial position of the voice command source relative to the device comprises: determining a distance (e.g., 2124) of the voice command source relative (e.g., 2106) to the electronic device (e.g., 2100), and determining an angular position (e.g., a lateral or vertical angle) (e.g., 2122) of the voice command source relative to the device.

**[0697]** In some embodiments, the audible signal (e.g., 2104) is a first audible signal, and while adjusting the output of the audible signal (e.g., 2104 as shown in FIG. 21D): the electronic

device (e.g., 2100) outputs a second audio signal (e.g. 2140) based on the spatial position of the voice command source.

**[0698]** In some embodiments, the spatial position (e.g., position of user 2106 in FIG. 21I) is a first spatial position, and outputting the second audible signal (e.g., 2140 as shown in FIG. 21I) comprises outputting the second audible signal such that it will be perceived, by a listener at the first spatial position, to emanate from a third spatial position (e.g., point 2130) that is in a direction, relative to the device, toward the first spatial position of the voice command source.

**[0699]** In some embodiments, the first audible signal represents playback of a media item (e.g., a song, video audio), and wherein the second audible signal represents a virtual assistant output (e.g., a voice assistant output 2140, as shown in FIG. 21I).

**[0700]** In some embodiments, the electronic device (e.g., 2100) includes a plurality of microphones (e.g., a microphone array).

**[0701]** Note that details of the processes described above with respect to method 2200 (e.g., FIG. 22) are also applicable in an analogous manner to the methods described below/above. For example, method 700, 900, 1100, 1300, 1500, 1700, 1800, 2000, 2400, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 2200. For brevity, these details are not repeated below.

**[0702]** FIGS. 23A-23K illustrate exemplary user interfaces for blended taste profile playback queues, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 24.

**[0703]** FIG. 23A illustrates an exemplary scenario in which a plurality of devices are connected. Specifically, device 2300 is a smart speaker that is connected to both devices 2302 and 2310 (e.g., personal devices). In some embodiments, device 2300 includes one or more features of devices 100, 300, 500, or 580. In some embodiments, devices 2302 and 2304 include one or more features of devices 100, 300, 500, or 580. In some examples, the respective users of devices 2302 and 2310 may desire to playback media based on both of their taste profiles. In some examples, devices 2300, 2302, and/or 2310 are used to create, maintain and/or store a



playback queue based on a plurality of taste profiles. FIGS. 23B-23K illustrate exemplary interfaces for doing so.

**[0704]** FIG. 23B illustrates an exemplary playback queue interface. In this example, playlist interface 2312 represents the playlist named “Users Nearby” and includes media items 2314A-2314C. In some embodiments, a device (e.g., 2300) automatically generates (e.g., creates or populates with media items) a media playback queue based on the taste profiles of connected devices. For example, device 2300 creates (or otherwise populate with media items) the playlist “Users Nearby” based on taste profiles associated with devices (e.g., or users associated with those devices) connected to device 2300. Thus, as shown in FIG. 23B, the playlist 2312 (displayed by device 2310) is created and the media items 2314A-2314C are added to the playlist automatically in response to detecting that a single device is connected (e.g., device 2310) to device 2300 (e.g., on the same Wi-Fi network, via Bluetooth, or the like). In some embodiments, a device (e.g., 2300) automatically generates a media playback queue (e.g., the playlist named “Users Nearby” (displayed by device 2310) depicted in FIG. 23B) in response to detecting that the device (e.g., 2300) is connected to one or more other devices (e.g., 2302 or 2310).

**[0705]** FIGS. 23C-23D illustrate depictions of exemplary taste profiles of two users, and two exemplary combined taste profiles. In some embodiments, a device (e.g., 2300) generates a playback queue based on one or more taste profiles. In some embodiments, a device (e.g., 2300) generates a playback queue based on a combined taste profile.

**[0706]** FIG. 23C illustrates taste profile 2316A (of a first user) and taste profile 2316B (of a second user). Taste profile 2316A includes the media preferences: Music Genre 1, Music Genre 2, and Music Genre 3. Taste profile 2316B includes the media preferences: Music Genre 2, Music Genre 3, and Music Genre 4. Thus, taste profiles 2316A and 2316B have some overlap in media preference. In some embodiments, a device (e.g., 2300) generates a combined taste profile based on an overlap of media preferences. For example, device 2300 generates combined taste profile 2316C, which includes the media preferences that are common to both taste profile 2316A and 2316B, namely the media preferences: Music Genre 2 and Music Genre 3. Thus, generating a playback queue using the combined taste profile 2316C will result in a playback

queue that includes media items that the users associated with the taste profiles 2316A and 2316B are both likely to enjoy.

**[0707]** FIG. 23D illustrates taste profile 2318A (of a first user) and taste profile 2318B (of a second user). Taste profile 2318A includes the media preferences: Music Genre 1 and Music Genre 2. Taste profile 2318B includes the media preferences: Music Genre 3 and Music Genre 4. Thus, taste profiles 2318A and 2318B do not have overlap in media preference. In some embodiments, a device (e.g., 2300) generates a combined taste profile based on one or more media preferences for each taste profile associated with a detected. For example, device 2300 generates combined taste profile 2318C, which includes at least one media preference from each of taste profile 2318A and 2318B, namely the media preferences: Music Genre 1, Music Genre 2, Music Genre 3, and Music Genre 4. Thus, generating a playback queue using the combined taste profile 2318C will result in a playback queue includes media items that at least one user associated with the profiles 2318A and 2318B is likely to enjoy.

**[0708]** In some embodiments, a device (e.g., 2300) populates (e.g., adds media items to) an existing media playback queue in response to detecting a device associated with a taste profile. Thus, in some examples, device 2300 dynamically updates a queue based user taste profiles as more users are detected. FIG. 23E illustrates playlist 2312 (displayed by device 2310), but it has been updated to include media items 2314D and 2314E. For example, device 2300 added media items 2314D and 2314E in response to detecting connection to device 2302. In this example, device 2300 updated the combined taste profile (e.g., used to populate playlist 2312) based on the taste profile associated with device 2302.

**[0709]** In some embodiments, a device (e.g., 2300) removes media items from a playback queue in response to no longer detecting a device associated with a taste profile. For example, device 2300 updates a queue to cater to the users that remain connected. For instance, in response to device 2302 no longer being detected by device 2300, device 2300 can remove media items 2314D and 2314E from playlist 2312. Thus, media playback can be tailored to users who remain present in a location (e.g., connected to device 2300) even as users come and go, without requiring excessive user inputs to do so.

**[0710]** In some embodiments, a device (e.g., 2300) creates a playback queue based on a plurality of taste profiles in response to user input. FIGS. 23F-23K illustrate exemplary interfaces for doing so.

**[0711]** FIG. 23F illustrates an exemplary playlist selection interface 2320, that includes a playlist creation affordance 2320A. At FIG. 23G, device 2310 receives user input 2322 representing selection of affordance 2320A.

**[0712]** In response to user input 2320A, device 2310 displays playlist creation interface 2324 (FIG. 23H). Playlist creation interface 2324 includes a title 2324A (“Dinner Party”), an affordance 2324B for making the playlist public (e.g., make it a shared playlist that can be viewable by other users, editable by other users, or the like), and an affordance 2324C for adding music to the playlist. At FIG. 23I, device 2310 receives user input 2326 representing selection of affordance 2324C.

**[0713]** In some embodiments, a device (e.g., 2310) displays a prompt to create a queue based on a plurality of taste profiles of detected devices in response to receiving user input (e.g., 2326). As shown in FIG. 23J, in response to receiving user input 2326, device 2310 displays message 2328, which reads: “The following users have been detected in your home: Tim, Jessica, Sophia, and Zachary. Would you like to create a playlist based on each user’s tastes?” In response to selection of affordance 2328A, device 2310 generates a playback queue (e.g., such as illustrated in FIG. 23E) based on the plurality of taste profiles associated with the detected devices (e.g., corresponding to the users named Tim, Jessica, Sophia, and Zachary). Thus, as shown in the example in FIGS. 23H-23J, device 2310 determines that a user is attempting to make a playlist and displays a prompt to create a queue based on the taste profiles of detected users.

**[0714]** As described above, a device can automatically generate a playback queue based on a plurality of taste profiles. In some embodiments, a device (e.g., 2300, 2310) generates the queue based on a plurality of taste profile in response to user input activating (e.g., opening) a media application. For example, FIG. 23K illustrates playlist selection interface 2320 (similar to FIG. 23F), but it has been updated to include an affordance 2320B representing a playlist that was automatically generated based on the taste profiles of detected users (e.g. Tim, Jessica, and 2 others). Thus, when a user opens a music application to browse playlists, a playlist based on a

combined taste profile of detected users can already exist (e.g., and be displayed), reducing the number of inputs required to create and/or access such a queue.

**[0715]** FIG. 24 is a flow diagram illustrating a method for maintaining a queue based on multiple user taste profiles using an electronic device in accordance with some embodiments.

5 Method 2400 is performed at a device (e.g., 100, 300, 500, 580). Some operations in method 2400 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0716]** As described below, method 2400 provides an intuitive way for maintaining a queue based on multiple user taste profiles. The method reduces the cognitive burden on a user for  
10 maintaining a queue based on multiple user taste profiles, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to maintain a queue based on multiple user taste profiles faster and more efficiently conserves power and increases the time between battery charges.

**[0717]** The electronic device (e.g., 2300 or 2302), which is a first device, detects (2402) that  
15 a second device (e.g., 2310) associated with a second user account (e.g., an iCloud account) is connected to the first device (e.g., 2300 or 2302). For example, the second device is connected to the same Wi-Fi network, within Bluetooth range of the first device, or the like. The first device is associated (2404) with a first user account (e.g., an iCloud account). The first user account is associated (2406) with a first media preference profile (e.g., 2316A or 2318A). In  
20 some embodiments, a media preference profile includes data representing media items or information for identifying media items that represents the preferences of the owner of the first user account. In some embodiments, a preference profile includes one or more media items. For example, the profile includes identifiers for media (e.g., songs, videos) that the first user account has saved, liked, listened to (e.g., a plurality of times), or otherwise indicates that the owner of  
25 the first user account likes a media item. In some embodiments, the preference profile includes generalized information for identifying media items. For example, generalized information can include a genre (e.g., type of music), an artist, an album (e.g., comprised of a plurality of media items). Such generalized information can be used to identify media items by matching, for example, metadata associated with media items to the generalized information. The second user

account is associated (2408) with a second media preference profile (e.g., 2316B or 2318B) different than the first media preference profile.

**[0718]** The first device (e.g., 2300 or 2302) initiates (2410) playback of media based on the first media preference profile and the second media preference profile.

5 **[0719]** Initiating playback of media based on first and second media profiles associated with first and second devices that are connected provides users with an improved media playback feature for creating playback queues according to the tastes of multiple users whose devices are connected while reducing redundant user inputs at each device. Providing improved media playback features to the user enhances the operability of the device and makes the user-device  
10 interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0720]** In some embodiments, the first device (e.g., 2300 or 2302) determines a combined  
15 preference profile (e.g., 2316C or 2318C) based on the first media preference profile (e.g., 2316A or 2318A) and the second media preference profile (e.g., 2316B or 2318B).

**[0721]** In some embodiments, determining a combined preference profile based on the first media preference profile and the second media preference profile comprises: determining a media preference that is related to both the first media preference profile and the second media  
20 preference profile. In some embodiments, a media preference includes one or more of a genre of media (e.g., music), an artist, a media item (e.g., a song), or the like. In some embodiments, a media preference that is related to both is a media preference that is common to both profiles (e.g., 2316C). In some embodiments, a media preference that is related to both is a media preference that is a subset or superset of both profiles. For example, rock and roll music is a  
25 superset of rock and roll music from the year 1987.

**[0722]** In some embodiments, while continuing to detect that the second device (e.g., 2310) is connected to the first device: the first device (e.g., 2300 or 2302) adds a plurality of media items (e.g., 2314D and 2314E of FIG. 23E) to a playback queue (e.g., the playlist “Users

Nearby” shown in FIG. 23E) based on the first media preference profile (e.g., 2316A or 2318A) and the second media preference profile (e.g., 2316B or 2318B). In some embodiments, the first device (e.g., 2300 or 2302) initiates playback of the plurality of media items.

**[0723]** In some embodiments, the first device (e.g., 2300 or 2302) receives a request (e.g., selection of affordance 2314F) to initiate playback on the first device, and in response to receiving the request, initiates the playback of media based on the first media preference profile and the second media preference profile.

**[0724]** In some embodiments, the request (e.g., selection of 2314F) is received from the second device (e.g., 2310). For example, a guest device (e.g., not associated with the device or the home set of devices) initiates playback of a playback queue that includes a media items pertaining to a blended taste profile.

**[0725]** In some embodiments, the first device includes a display (e.g., 2302), and wherein the method further comprises: displaying, on the display, an affordance (e.g., a “play now” affordance (e.g., 2314F), a media item in a playlist (e.g., 2314D), a “shuffle all” affordance, or the like), and wherein receiving the request to initiate playback on the first device comprises receiving user input selection of the affordance (e.g., 2314F). In response to receiving user input selection of the affordance, the first device (e.g., 2300 or 2302) initiates the playback of media based on the first media preference profile and the second media preference profile.

**[0726]** In some embodiments, initiating playback of media based on the first media preference profile and the second media preference profile comprises: transmitting an instruction to a third device (e.g., 2300) to initiate playback.

**[0727]** In some embodiments, the first device (e.g., 2300 or 2302) receives a media item (e.g., an identifier of a media item, a link to the media item, or a copy of the media item). In response to receiving the media item: in accordance with a determination that the media item was received from the first device, the first device (e.g., 2300 or 2302) updates the first media preference profile based on the media item (e.g., 2316A or 2318A); and in accordance with a determination that the media item was received from the second device (e.g., 2310), the first device (e.g., 2300 or 2302) forgoes updating the first media preference profile based on the

media item. For example, if the media item was added to a blended taste profile queue by a device not associated with a user account of the device managing or storing the queue (e.g., the owner's device), the owner's taste profile is not updated based on the addition of that media item to the queue.

5   **[0728]**     Note that details of the processes described above with respect to method 2400 (e.g., FIG. 24) are also applicable in an analogous manner to the methods described below/above. For example, method 700, 900, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2600, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 2400. For brevity, these details are not repeated below.

10   **[0729]**     FIGS. 25A-25I illustrate exemplary user interfaces for allowing guest playback on a set of devices, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 26.

15   **[0730]**     FIG. 25A illustrates an exemplary scenario in which a plurality of devices are connected. Specifically, device 2500 is a smart speaker that is connected to both devices 2502 and 2504 (e.g., personal devices). In some embodiments, device 2500 includes one or more features of devices 100, 300, 500, or 580. In some embodiments, devices 2502 and 2504 include one or more features of devices 100, 300, 500, or 580. In this example, the user (also referred to as a first user) of device 2504 is associated with a user account that is associated with device 2500 (e.g., both device 2504 and 2500 are members of a home set of devices, as described above with respect to FIG. 6A). Further, in this example, the user of device 2502 is not associated with device 2500 (e.g., is a guest of (e.g., not a member of) the home that includes the home set of devices). The user (also referred to as a second user) of device 2502 may desire access to device 2500, for example, to initiate playback therefrom. FIGS. 25B-25I illustrate exemplary interfaces for requesting and granting access, in accordance with some embodiments.

25   **[0731]**     FIG. 25B illustrates an exemplary current media interface. As shown, device 2502 (e.g., the guest device) displays current media interface 2506 on display 2503. As shown, device 2502 is currently playing back a media item ("Same Thing") on itself (e.g., as indicated by device selection affordance 2506A, which identifies device 2502, named "iPhone"). At FIG.

25C, device 2502 receives user input 2508 representing selection of device selection affordance 2506A.

[0732] In response to user input 2508, device 2502 displays exemplary multi-device interface 2510 (FIG. 25D). In some embodiments, multi-device interface 2510 is a multi-device interface  
 5 such as multi-device interface 610 of FIGS. 6H-6N and multi-device interface 810 of FIGS. 8C-8P, discussed above. In this example, the devices listed in interface 2510 (except 2510A, “iPhone”, which represents device 2502) are devices associated with the first user (e.g., associated with device 2504 and device 2500) that are members of the home set of devices. At FIG. 25D, device 2502 receives user input 2512 representing selection of indicator 2510C, which  
 10 is associated with indicator 2510B, representing the device named “Living Room” (e.g., device 2500). In some embodiments, device 2502 transmits a request to initiate playback on the selected set of devices (e.g., transmits a request to 2500).

[0733] In response to receiving selection of the device named “Tim’s Living Room” (e.g., user input 2512), device 2502 displays message 2514 (FIG. 25E), which prompts the user to  
 15 “Please wait”. In some examples, message 2514 is displayed while permission for device 2502 is being requested (e.g., at another device). For example, subsequent to transmitting a request to initiate playback to device 2500 (e.g., and while device 2502 is awaiting confirmation that playback has been initiated or permission has not been granted), device 2502 displays message 2514. In some embodiments, the ability of device 2502 to initiate playback on a device with  
 20 which it is not associated (e.g., device 2502 is not associated with same user account, or is not a member of a common set of devices (e.g., home set devices) with device 2500) is subject to permission from another device associated with device 2500. In some embodiments, the requesting device (e.g., 2502) transmits a request for permission to a device (e.g., device 2500 or device 2504) of the set of devices associated with (e.g., that includes) device 2500. For example,  
 25 in response to a user input request to initiate playback on a device of a home set of devices, device 2502 transmits a request for permission to one or more devices in the home set of devices (e.g., device 2500, or another device in the set of devices). In some embodiments, the request is transmitted by the requesting device (e.g., 2500) to another device (e.g., with a display) of the set of devices (e.g., device 2504). For example, device 2500 receives the playback request from



device 2502 and, in response, transmits the request for permission (e.g., for device 2502) to device 2504.

**[0734]** FIGS. 25F-25G illustrate exemplary permission request interfaces. In some embodiments, a permission request interface (e.g., 2516 or 2518) is displayed on a device (e.g., by device 2504) of the set of devices (e.g., 2500 and 2504) in response to a request to initiate playback on a device (e.g., 2500) of the set of devices by a device (e.g., 2502) that is not included in the set of devices.

**[0735]** At FIG. 25F, device 2504 (e.g., which is included in the home set of devices) displays permission request interface 2516, which includes affordances for granting permission (2516A) and denying permission (2516B). For example, user input associated with 2516A will grant device 2502 permission to initiate media playback of “Same Thing” on device 2500, and user input user input associated with 2516B will deny device 2502 such permission. In some embodiments, a permission request interface includes information about the request to initiate playback on the set of devices. In some embodiments, the information includes one or more of, but is not limited to, an identification of: the device requesting initiation of playback (e.g., 2502), a user (e.g., a user account) associated with the request (e.g., the user of 2502), and an identification of the devices on which playback is requested (e.g., the device 2500 named Living Room). As shown in FIG. 25F, interface 2516 includes the information: “Would you like to allow Bob to play music in the Living Room?”, which identifies the user (e.g., named Bob) requesting initiation of playback and the device on which they are requesting it (e.g., named or located in the Living Room).

**[0736]** In some embodiments, a permission interface allows selection of a plurality of different permission levels. In some embodiments, a permission level grants conditional permission. For example, permission request interface 2518 (FIG. 25G) includes a plurality of permission levels (associated with affordances 2518A-2518D) that can be granted by the user of device 2504: “Always Allow” (e.g., always allow the user Bob to initiate playback), “Allow Once” (e.g., allow the current request, but not future requests from Bob), “Not Now” (e.g., deny the current request, but ask permission for future requests from Bob), and “Never Allow” (e.g., deny the currently request and all future requests from Bob).

**[0737]** FIG. 25H illustrates an updated current media interface 2506 displayed on device 2502. In some embodiments, the updated current media interface 2506 is displayed in response to device 2502 being granted permission (e.g., user input associated with affordance 2516A at device 2504). As shown, device selection affordance 2506A indicates that playback is occurring on device 2500 and device 2502 (e.g., the devices selected at FIG. 25D). In some embodiments, the current media interface includes an indication of a user associated with the device of the set of devices. For example, as shown in FIG. 25H, device selection affordance 2506A identifies the Living Room device as “Tim’s Living Room” (e.g., wherein “Tim” is a user associated with device 2500).

**[0738]** In some embodiments, playback of media by guests (e.g., by device 2502) on a device of the home set of devices does not affect a preference profile and/or playback history of a user associated with the set of devices. For example, FIG. 25I illustrates an exemplary interface 2520 for browsing the recently played media items by the user Tim (e.g., the user of device 2504). In some embodiments, device 2504 displays interface 2520 subsequent to user input granting permission to a device that is not a member of the set of devices (e.g., to device 2502). As shown, the recently played media items 2520A-2520C do not include the media item “Same Thing” that was played back in response to the request by device 2502.

**[0739]** FIG. 26 is a flow diagram illustrating a method for allowing a guest device to initiate playback using an electronic device in accordance with some embodiments. Method 2600 is performed at a device (e.g., 100, 300, 500, 580). Some operations in method 2600 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0740]** As described below, method 2600 provides an intuitive way for allowing a guest device to initiate playback. The method reduces the cognitive burden on a user for allowing a guest device to initiate playback, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to allowing a guest device to initiate playback faster and more efficiently conserves power and increases the time between battery charges.

**[0741]** The electronic device (e.g., 2500), which is a first device, receives a request (2602), from a third device (e.g., 2502), to initiate media playback on at least one device of a set of devices (e.g., a set that includes devices 2500 and 2504).

**[0742]** In some embodiments, the set of devices comprises (2604) the first device (e.g., 2500) and a second device (e.g., 2504). In some embodiments, the set of devices is a home set of devices (e.g., configured using a home control application as described with respect to FIG. 6A). For example, the set of devices includes one or more devices associated with one or more members of a household. In some embodiments, a member of the household is identified by device (e.g., from which a request originates) and/or by one or more user accounts associated with one or more devices (e.g., the user's devices are each logged into the user's iCloud account). Thus, a household can be defined as devices associated with a set of user accounts. In some embodiments, the set of user accounts comprises a single user account. In some embodiments, the set of user accounts comprises more than one user account.

**[0743]** In some embodiments, the third device is not a (2606) member of the set of devices. For example, the third device belongs to a guest or visitor to the home that includes the set of devices. For example, the third device can be associated with a user account that is not a member of the set of user accounts that comprise the set of users making up the household.), and

**[0744]** In some embodiments, the third device (e.g., 2502) is connected to (2608) the first device (e.g., 2500). In some examples, the devices are connected via Wi-Fi, Bluetooth, or the like.

**[0745]** In some embodiments, in response to receiving the request (2610): in accordance with a determination that the third device (e.g., 2502) has permission (e.g., previously granted by member of the home) to initiate media playback on the at least one device (e.g., 2500) of set of devices, the electronic device (e.g., 2500) initiates (2612) media playback on the set of devices (e.g., 2500). In some embodiments, a set of devices includes one or more devices.

**[0746]** In accordance with a determination (2614) that the third device does not have permission to initiate media playback on the at least one device of set of devices: the electronic device (e.g., 2500) transmits (2616) a request for permission (e.g., represented by 2516 of FIG.

25F) to the second device (e.g., 2504). For example, the second device displays a prompt (e.g., as shown in 2516 of FIG. 25F).

[0747] Requesting permission, by a first device, from a second device to initiate playback based on a request from a third device in response to the request provides users with the ability to quickly and dynamically request permission for media playback while reducing the number of user inputs required to navigate permissions menus or resend a request to initiate playback after being granted permission. Providing improved media playback permissions features to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

[0748] In response to receiving permission from the second device, the electronic device (e.g., 2500) initiates (2618) media playback on the at least one device (e.g., 2500) of the set of devices. In some embodiments, initiating playback includes transmitting an instruction (e.g., to another device in the set of devices) to initiate playback.

[0749] In some embodiments, in accordance with a determination that a first user account associated with the third device has permission to initiate media playback on the set of devices, the electronic device (e.g., 2500) determines that the third device (e.g., 2502) has permission (e.g., device 2502 has permission by virtue being associated with a user (e.g., user account) that has permission), wherein the first user account is not associated with any device of the set of devices (e.g., is an account (e.g., iCloud) of a guest user that is not associated with any device in the home of the home set of devices). In accordance with a determination that the first user account associated with the third device does not have permission to initiate media playback on the set of devices, the electronic device (e.g., 2500) forgoes determining that the third device has permission. For example, if the user account associated with the third device does not have permission, playback does not initiate in response to a request from the third device.

[0750] In some embodiments, further in accordance with a determination that the third device does not have permission, the electronic device (e.g., 2500) transmits the request for permission to a plurality of devices (e.g., 2504 and another device (e.g., a personal device with a

display), both associated with the home owner) that includes the second device (e.g., 2504). For example, the plurality of devices are devices that are associated with the first device. In some embodiments, the first device and the plurality of devices are each associated with one or more user accounts that are not associated with the third device. For example, the plurality of devices  
 5 can be other devices associated with an owner (e.g., their user account) of the first device (e.g., logged into a common account belonging to the owner, or logged in to accounts associated with a predefined group of users such as a family of the owner), but the third device is associated with a guest (e.g., with the guest's user account) to the owner's home. Thus, the third device is not included in the group of users in the owner's household.

10 **[0751]** In some embodiments, initiating media playback on the at least one device of the set of devices comprises: initiating playback on the first device (e.g., 2500); and forgoing initiating playback on the second device (e.g., 2504). Thus, in some examples, the device that initiates playback is not the device that granted permission.

**[0752]** In some embodiments, subsequent to receiving permission from the second device  
 15 (e.g., 2504): the electronic device (e.g., 2500) receives a request, from the third device (e.g., 2502), to initiate playback on a fourth device (e.g., another smart speaker device that is not device 2500), wherein the set of devices comprises the fourth device, and wherein the fourth device is not included in the at least one device of the set of devices (e.g., the original request (by device 2502) to initiate playback on device 2500 did not include a request to initiate playback on  
 20 the fourth device.). In response to receiving the request to initiate playback on a fourth device, (by device 2502) initiates playback on the fourth device. In some embodiments, initiating playback includes transmitting an instruction (e.g., to another device) to initiate playback. For example, if the guest user subsequently selects additional devices (e.g., at a multi-device interface) in the home owner's home (e.g., after being granted permission to initiate playback on  
 25 the first device 2500), the permission extends to other devices (e.g., all devices) associated with the home set of devices.

**[0753]** In some embodiments, subsequent to receiving permission from the second device: receiving a request, from the third device, to remove a media item (e.g., as shown in FIGS. 16M-16O) from a playback queue on the at least one device of the set of devices (e.g., 2500). In

response to receiving the request: in accordance with a determination that the media item was added to the playback queue by the third device (e.g., was added by the guest), the electronic device (e.g., 2500) removes the media item from the playback queue. In accordance with a determination that that the media item was not added to the playback queue by the third device  
 5 (e.g., not added by the guest), forgoing removing the media item from the playback queue.

**[0754]** In some embodiments, the first device is associated with a media preference profile (e.g., 2316A as shown in FIG. 23C), and further in response to receiving the request from the third device that is not a member of the set of devices, the electronic device (e.g., 2500) forgoes updating the media preference profile based on the request. For example, device 2500 (e.g.,  
 10 which is associated with the home owner) does not update a taste profile associated with the owner's user account based on media items played back in response to a request for another user (e.g., a user associated with a guest user account).

**[0755]** Note that details of the processes described above with respect to method 2600 (e.g., FIG. 26) are also applicable in an analogous manner to the methods described below/above. For  
 15 example, method 700, 900, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2800, 3000, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 2400. For brevity, these details are not repeated below.

**[0756]** FIGS. 27A-27E illustrate exemplary user interfaces for providing data based on a physical position, in accordance with some embodiments. The user interfaces in these figures  
 20 are used to illustrate the processes described below, including the processes in FIG. 28.

**[0757]** FIG. 27A illustrates an exemplary scenario in which two devices (2700 and 2702) are connected. In some embodiments, device 2700 includes one or more features of device 100, 300, 500, and 580. In some embodiments, device 2702 includes one or more features of device 100, 300, 500, and 580. In some examples, a user may wish to use device 2700 (e.g., a smart  
 25 speaker) as an extension of device 2702 (e.g., a personal device), wherein device 2702 is associated with the user's account (e.g., a thus their account data). For example, utilizing a smart speaker as an extension of a device (e.g., to output audio, phone calls, dictated messages, or the like; and/or to detect user voice input) allows the user improved hands-free access to the functions of their personal device. Further example, such functionality can also extend the

distance that a user can be from their personal device while maintaining the ability to access data from their personal device. However, providing unconditional access of data from a personal device to a public device (e.g., potentially used by more than one user in a household) can be undesirable to the owner of the personal device. Thus, access to data from the personal device can be subject to satisfaction of one or more conditions, such as physical position condition. FIGS. 27B-27E provide exemplary interfaces for facilitating the sharing of data from one device to another based on physical positioning.

**[0758]** FIG. 27B illustrates an exemplary scenario in which the physical positioning of a device (e.g., 2702) satisfies a permissive condition (e.g., is placed in close proximity to device 2700). In the example of FIG. 27B, device 2700 received a user input request (e.g., a voice input), requesting the output of data from personal device 2702 through device 2700. For example, the request is a user input voice request to dictate the user's messages stored on (or otherwise associated with) device 2702. In response to the request, device 2700 determines that a physical positioning of device 2702 is in satisfaction of a physical position-based permissive condition. For example, device 2700 determines that device 2702 is in a permissive physical position (e.g., is in close proximity, such as within proximity zone 2704). In response to determining that the physical positioning of device 2702 satisfies a permissive condition, device 2700 outputs the data (e.g., dictation output 2706). Dictation output 2706 includes the response "You have 3 appointments today." In this example, dictation output 2706 is output in response to the user input voice request "Do I have any appointments today?"

**[0759]** FIG. 27C illustrates an exemplary scenario in which the physical positioning of a device (e.g., 2702) does not satisfy a permissive condition. As shown, for example, device 2702 is not within proximity zone 2704 of device 2700, which is the permissive condition in this example. Thus, in response to receiving voice input "Do I have any appointments today?", device 2700 does not output the dictation shown in FIG. 27B. In some embodiments, a device (e.g., 2700) outputs an indication of how to satisfy the permissive condition. As shown, device 2700 outputs the dictation 2708 "Please move your phone closer".

**[0760]** As illustrated above, a permissive condition can be based on device proximity. In some embodiments, a permissive condition is based on (or further based on) an orientation of a

device (e.g., 2702). FIG. 27D illustrates an exemplary scenario in which device 2702 is within close proximity to device 2700, but does not satisfy a permissive condition. In the example shown in FIG. 27D, the permissive condition is satisfied when device 2702 is in a permissive physical orientation. In some embodiments, an orientation of a device (e.g., 2702) satisfies the permissive condition when the device is face up. For example, in FIG. 27D, the main display (e.g., the “face” or “front” of the device) the main display 2703 of device 2702 is oriented down (e.g., the device is face down). In some embodiments, an orientation of a device satisfies the permissive condition when the device (e.g., 2702) is pointing in a direction (e.g., from the top of the device) toward the second device (e.g., 2700). In some embodiments, a permissive condition is satisfied when both a physical proximity and a physical orientation condition are satisfied.

**[0761]** FIG. 27E illustrates an exemplary scenario in which the physical positioning of device 2702 satisfies the permissive condition. FIG. 27E illustrates that device 2700 can be used to output dictation of data from device 2702. As shown, device 2700 outputs a dictation of a text message, the dictation being: “Text message from Bob, ‘Let’s meet at 6 P.M.’”.

**[0762]** FIG. 28 is a flow diagram illustrating a method for providing data based on a physical position using an electronic device in accordance with some embodiments. Method 2800 is performed at a device (e.g., 100, 300, 500, 580). Some operations in method 2800 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0763]** As described below, method 2800 provides an intuitive way for providing data based on a physical position. The method reduces the cognitive burden on a user for providing data based on a physical position, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to provide data based on a physical position faster and more efficiently conserves power and increases the time between battery charges.

**[0764]** The electronic device (e.g., 2700), which is at a first device associated with a user account (e.g., logged into user’s iCloud) receives (2802) user input (e.g., a user input voice command) representing a request to access data from the user account. In some embodiments, data from a user account can include one or more of: calendar data (e.g., meetings, events, or the



like), messages (e.g., text messages, iMessages, emails, voice messages, or the like), notes, reminders (e.g., audio or text reminders), or the like.

**[0765]** In response to receiving (2804) the user input (e.g., user input voice command), the first device (e.g., 2700) determines (2806) whether a physical positioning of the first device (e.g., 2700) and a second device (e.g., 2702) associated with the user account satisfies a permissive condition. In some embodiments, a permissive condition is satisfied when the second device is in close proximity to the first device (e.g., as shown in FIG. 27B). In some embodiments, a permissive condition is satisfied when a device orientation of the second device is a permissive orientation (e.g., lying face up on a surface) (e.g., as shown in FIG. 27B).

**[0766]** In accordance with a determination that the physical positioning satisfies the permissive condition, the first device (e.g., 2700) provides (2808) the data from the user account through the first device (e.g., dictates the data, as shown in FIG. 27B).

**[0767]** In accordance with a determination that the physical positioning does not satisfy the permissive condition, the first device (e.g., 2700) forgoes (2810) providing the data from the user account through the first device (e.g., requests that the second device is placed in close proximity, as shown in FIG. 27C; requests unlocking of second device, as shown in FIG. 27D).

**[0768]** Using a determination of whether the physical positioning of device satisfies a permissive condition provides the user with an easy technique for granting permission without extraneous user inputs. Performing an operation when a set of conditions has been met without requiring further user input enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0769]** In some embodiments, providing the data from the user account through the first device comprises: outputting an audio signal (e.g., 2706 or 2712) representative of the data from the user account.

**[0770]** In some embodiments, outputting an audio signal representative of the data from the user account comprises: causing audible output of a dictation (e.g., 2706 or 2712) representative of the data from the user account using a text-to-speech algorithm In some embodiments, the dictation is in a natural language (e.g., a spoken language such as English, Spanish, French, or the like). For example, the dictation comprises data being read aloud (e.g., using a text-to-speech algorithm) through a speaker of the first device.

**[0771]** In some embodiments, the data from the user account comprises data from one or more of: a calendar entry (e.g., a meeting, an appointment), a notification (e.g., of an incoming text message), an email, a text message, a stored text document (e.g., a note), stored contact information, phone call audio, video call audio or video (e.g., FaceTime, Skype), a voice message, an address (e.g., user's home), and a media item (e.g., music, video).

**[0772]** In some embodiments, determining whether the physical positioning of the first device and second device satisfies the permissive condition comprises: determining whether a physical proximity between the first device and the second device satisfies a proximity condition (e.g., the first and second device are in close proximity to each other).

**[0773]** In some embodiments, determining whether the physical positioning of the first device and second device satisfies the permissive condition comprises: determining whether a physical orientation of the first device satisfies an orientation condition. In some embodiments, the physical orientation can be detected via sensors on the second device (e.g., and communicated to the first device), such as one or more of: accelerometer, ambient light sensor, camera, or the like. In some embodiments, an orientation condition is satisfied when the second device is positioned such that a main display is not covered. For example, a device that is resting face up (e.g., with its display visible, in contrast to face down) satisfies the orientation condition.

**[0774]** In some embodiments, further in accordance with a determination that the physical positioning does not satisfy the permissive condition, the first device (e.g., 2700) outputs an indication (e.g., 2708 or 2710) that the permissive condition is not satisfied (e.g., the devices are not in close proximity).

**[0775]** In some embodiments, outputting the indication that the permissive condition is not satisfied comprises: outputting an audible indication (e.g., 2708 or 2710) of a user action required to satisfy the permissive condition (e.g., a dictated output of: “Please unlock your device” or “Please bring your phone closer”, or the like.).

5 **[0776]** In some embodiments, the user input representing a request to access data from the user account is a first user input, the method further comprising, subsequent to providing the data from the user account through the first device (e.g., as shown in FIG. 27B): receiving a second user input (e.g., a user input voice command) representing a request to access additional data from the user account. In response to receiving the second user input, determining whether the  
 10 physical positioning of the first device (e.g., 2700) and the second device (e.g., 2702) associated with the user account satisfies the permissive condition. In accordance with a determination that the physical positioning satisfies the permissive condition, providing the additional data (e.g., as shown in FIG. 27E) from the user account through the first device. In accordance with a determination that the physical positioning does not satisfy the permissive condition, forgoing  
 15 providing the additional data from the user account through the first device (e.g., as shown in FIG. 27C).

**[0777]** Note that details of the processes described above with respect to method 2800 (e.g., FIG. 28) are also applicable in an analogous manner to the methods described below/above. For example, method 700, 900, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 3000, and  
 20 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 2800. For brevity, these details are not repeated below.

**[0778]** FIGS. 29A-29I illustrate exemplary user interfaces and techniques for manage playback of media on a plurality of devices, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the  
 25 processes in FIG. 30.

**[0779]** FIG. 29A illustrates an exemplary multi-device interface (e.g., such as multi-device interface 610 or 810 as described above with respect to FIGS. 6 and 8) that includes Devices 1 through 4, displayed on display 2902 of device 2900. In this example, a user uses device 2900 to transmit a request to initiate media playback on a set of devices that includes Devices 1 through

4. In some embodiments, device 2900 includes one or more features of devices 100, 300, 500, and 580.

**[0780]** FIG. 29B illustrates an exemplary arrangement of Devices 1 through 4 (e.g., devices 2910, 2912, 2914, and 2916, respectively) that are included in the set of devices on which  
5 playback has been requested (e.g., by device 2900). In some embodiments, devices 2910, 2912, 2914, and 2916 are smart speakers that include one or more features of devices 100, 300, 500, and 580.

**[0781]** At FIG. 29C, the set of devices have initiated playback of media (e.g., are outputting audio), in response to the request from device 2900.

10 **[0782]** In some embodiments, a set of devices that is concurrently playing back media (e.g., as part the same media session) synchronizes playback of the media. In some embodiments, one device coordinates playback synchronization (e.g., also referred to as a “primary device” or “hero device”). Coordinating playback synchronization can include one or more of: processing  
15 playback control commands (e.g., pause, next track), streaming media to the other devices in the set of devices, storing and/or maintaining a playback queue, detecting whether the other devices are outputting the media in synchronization with each other (e.g., via use of a clock signal), or the like.

**[0783]** In some embodiments, a set of devices (e.g., for a media session) includes an heir device (also referred to as a “designated heir” or a “backup primary device”). In some  
20 embodiments, the designated heir is configured to take over responsibility of the primary device in response to the primary device no longer being able to playback media (e.g., for the media session) and/or coordinate playback synchronization. In some embodiments, several “generations” of heirs are designated (e.g., a designated heir, a designated heir to the designated heir, and so forth).

25 **[0784]** FIG. 29D depicts an exemplary scenario in which device 2910 is the designated heir to device 2912, the primary device. As shown, device 2912 (primary) connects to each of the devices in the set and, for example, synchronizes playback from each device.

**[0785]** FIG. 29E depicts an exemplary scenario in which device 2910 has become the primary device and (e.g., because device 2912 is no longer available) and device 2914 is now the designated heir to device 2910, the primary device. For example, the scenario in FIG. 29E follows an event (e.g., during the scenario in FIG. 29D) in which device 2912 (e.g., the previous primary) is no longer available for playback during the media session on the set of devices. As shown, device 2910 (primary) connects to each of the remaining devices in the set (e.g., 2914 and 1216) and, for example, coordinates playback with each of these devices.

**[0786]** FIG. 29F depicts an exemplary scenario in which device 2914 has become the primary device and (e.g., because device 2910 is no longer available) and device 2916 is now the designated heir to device 2914, the primary device. For example, the scenario in FIG. 29F follows an event (e.g., during the scenario in FIG. 29E) in which device 2910 (e.g., the previous primary) is no longer available for playback during the media session on the set of devices). As shown, device 2914 (primary) connects to each of the remaining devices (e.g., 2916) in the set and, for example, coordinates playback with each of these devices.

**[0787]** FIG. 29G depicts an exemplary scenario similar to that shown in FIG. 29D, but in which device 2916 is not part of the original set of devices selected by the user (e.g., using device 2900) for the media playback session. In some embodiments, a device that is not part of the set of devices (e.g., of the requested media session) performs the function of designating the primary device and/or the designated heir for the media playback session. For example, as shown in FIG. 29G, device 2916, even though not in the set of devices, designates device 2910 as the heir and device 2912 as the primary device. In some embodiments, the device that designates a primary device is a home media control device (e.g., an Apple TV).

**[0788]** In some embodiments, primary device responsibility (e.g., playback coordination) includes processing playback control commands. For example, because the devices in a set of devices are interconnected with each other (and potentially connected with other devices), a playback control command can be received by any device of the set of devices (or by the other devices). In some embodiments, the playback control command is forwarded to the primary device if it is a device that is not the primary device for a media session. In some embodiments, the primary device processes the playback control command, and then transmits instructions to

the (e.g., remaining) devices in the set of devices (e.g., for enacting the playback control command).

**[0789]** For example, FIG. 29H illustrates the exemplary scenario in which a playback control command 2920 is received at a non-primary device (e.g., designated heir, device 2910 in this example). Thus, as shown, device 2910 forwards the playback control command to the primary device. In contrast, at FIG. 29I, device 2910 is the primary device and receives the playback control command 2920. Thus, in the example depict in FIG. 29I, device 2910 processes the playback control command and transmits playback instructions (e.g., skip to next track, pause playback, or the like) to the remaining devices in the set (e.g., that are included in the media session).

**[0790]** FIG. 30 is a flow diagram illustrating a method for managing playback coordination using an electronic device in accordance with some embodiments. Method 3000 is performed at a device (e.g., 100, 300, 500, 580). Some operations in method 3000 are, optionally, combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0791]** As described below, method 3000 provides an intuitive way for managing playback coordination. The method reduces the cognitive burden on a user for managing playback coordination, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to manage playback coordination faster and more efficiently conserves power and increases the time between battery charges.

**[0792]** The electronic device (e.g., 2910), which is a first device, receives (3002) a command to initiate playback of media on a set of devices comprising the first device (e.g., 2910) and a second device (e.g., 2912). In some embodiments, the first and second devices are both configured to be capable of receiving playback coordination responsibility for the set of devices.

**[0793]** In response to receiving the command, the first device (e.g., 2910) initiates (3004) synchronized playback of the media on the set of devices (e.g., 2910 and 2912), wherein the second device is designated (3006) as a primary device (e.g., as shown in FIG. 29D) configured to coordinate the playback of the media on the set of devices, and wherein the first device is

configured (3008) to be a designated heir to the primary device (e.g., as shown in FIG. 29D). In some embodiments, coordinating playback on the set of devices includes one or more of: storing a media playback queue, synchronizing media playback start time, and receiving and routing playback commands. In some embodiments, a designated heir to the primary device is a device  
 5 that will take over duty as the primary device if the current primary device becomes unavailable.

**[0794]** Initiating synchronized playback and automatically managing the coordination of media playback without requiring further user input reduces the burden on the user when playing back media on a plurality of devices. Performing an operation when a set of conditions has been met without requiring further user input enhances the operability of the device and makes the  
 10 user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0795]** In some embodiments, the set of devices further comprises a third device (e.g., 2914  
 15 as shown in FIG. 29D), and during playback on the set of devices, the first device (e.g., 2910) detects that the second device (e.g., 2912) is no longer available for playback of the media (e.g., as shown in FIG. 29E). For example, a device is no longer available for playback if the device is requested to play something else or to cease playback, the device is disconnected, or the like. In response to detecting that the second device is no longer available to playback the media: the  
 20 first device (e.g., 2910) determines that the first device is designated as the primary device configured to coordinate the playback of the media on the set of devices (e.g., as shown in FIG. 29E), continues playback of the media on the first device (e.g., as shown in FIG. 29E), and coordinates the playback of the media on the third device (e.g., 2914, as shown in FIG. 29E and 29I). In some embodiments, the first device determines that it is the primary device. In some  
 25 embodiments, the first device receives notification from another device that the first device has been designated the primary device. For example, the first device assumes the role of primary device and begins coordination playback on the remaining device(s) in the set of devices. In this example, the third device is a remaining device.

**[0796]** In some embodiments, coordinating the playback of the media on the third device comprises one or more of: providing a link to the media (e.g., a URL); providing a stream of the media (e.g., a real time or buffered stream of data representing the media); and providing a copy of the media (e.g., a media file).

5 **[0797]** In some embodiments, the first device (e.g., 2910) receives a command to cease playback of media on the first device. In response to receiving the command to cease playback of media on the first device: the first device (e.g., 2910) ceases playback of media on the first device (e.g., as shown in FIG. 29F), and designates the third device to be the primary device configured to coordinate the playback of the media on the set of devices (e.g., as shown in FIG.  
10 29F).

**[0798]** In some embodiments, the set of devices further comprises a third device (e.g., 2914), and during playback on the set of devices (e.g., 2910, 2912, and 2914), the first device (e.g., 2910) detects that the second device (e.g., 2912) is no longer available for playback of the media (e.g., as shown in FIG. 29E). In response to detecting that the second device is no longer  
15 available to playback the media: the first device (e.g., 2910) determines that the third device (e.g., 2914) (e.g., despite the first device being the designated heir) is designated as the primary device configured to coordinate the playback of the media on the set of devices, and the first device (e.g., 2910) continues playback of the media on the first device, and the first device (e.g., 2910) receives, from the third device (e.g., the new primary device), an instruction for  
20 coordinating playback of the media on the first device. For example, the first device does not assume the role of primary device, and thus begins receiving coordinating instructions for playback from the new primary device, the third device.

**[0799]** In some embodiments, the first device (e.g., 2910) receives, from a fourth device (e.g., 2916), a command to initiate playback of media on the set of devices. The first device  
25 (e.g., 2910) receives, from the fourth device, a designation that the first device is the designated heir. For example, the device that transmits the command to initiate playback and that designates the designated heir is a device different than the designated heir and the designated primary device.



**[0800]** In some embodiments, the fourth device is not a member of the set of devices. For example, the fourth device is a device in the home set of devices that initially coordinates playback on device(s) regardless of whether playback includes the fourth device. In some embodiments, initially coordinating playback includes designating a designated heir and/or a primary device for the playback session on the set of devices.

**[0801]** In some embodiments, initiating synchronized playback of the media on the set of devices comprises transmitting a copy of a playback queue to each device in the set of devices.

**[0802]** In some embodiments, during synchronized playback, the first device (e.g., 2910) receives, at the first device, a playback control command (e.g., 2920, such as pause, next track, seek, or the like). In response to receiving the playback control command: in accordance with the first device being designated the primary device, the first device (e.g., 2910) transmits an instruction to each of the devices in the set of devices based on the playback control command (e.g., as shown in FIG. 29I). In accordance with the first device not being designated the primary device, the first device (e.g., 2910) transmits the playback control command to a designated primary device (e.g., as shown in FIG. 29H). For example the first device forwards the command to the primary device for processing, and does not take further action until receiving an instruction from the primary device).

**[0803]** Note that details of the processes described above with respect to method 3000 (e.g., FIG. 30) are also applicable in an analogous manner to the methods described below/above. For example, method 700, 900, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 2800, and 3200 optionally includes one or more of the characteristics of the various methods described above with reference to method 3000. For brevity, these details are not repeated below.

**[0804]** FIGS. 31A-31N illustrate exemplary user interfaces for outputting an audible output based on user location, in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 32.

**[0805]** FIG. 31A illustrates in exemplary home that includes an exemplary home set of devices (e.g., the set of devices 3100, 3102, and 3104). As shown, devices 3100 and 3102 are in the room named “Living Room” (e.g., are named or otherwise associated with an identifier

“Living Room”) and device 3104 is in the room “Bedroom”. In this example, devices 3100, 3102, and 3104 represent smart speaker devices that the user has positioned around their home, and that are connected to each other (e.g., via Wi-Fi). In some embodiments, devices 3100, 3102, and 3104 include one or more features of devices 100, 300, 500, and 580. FIG. 31A also depicts device 3106 (representing a car), which is optionally a device that is connected to the user’s home set of devices (e.g., devices 3100, 3102, and 3104). In some embodiments, device 3108 includes one or more features of devices 100, 300, 500, and 580.

**[0806]** As described above, devices such as devices 3100, 3102, and 3104 (e.g., smart speaker devices), in accordance with some embodiments, can determine a spatial position of a user for targeting audio content to a voice command source and/or act as an extension (e.g., for notifications output) of another device (e.g., a personal device). Similarly, a device (or a set of devices) (e.g., such as devices 3100, 3102, and 3104) can be configured to automatically and selectively output audible output based on whether a user is within a range of the device (e.g., physically present near the device). FIGS 31B-31N illustrates exemplary techniques for doing so.

**[0807]** FIG. 31B depicts the scenario of FIG. 31A, however user 3108 is present in the Living Room near device 3100. In some embodiments, a device (e.g., 3100) of a set of devices (e.g., 3100, 3102, and 3104) receives an audible output trigger event. For example, in FIG. 31B, user 3108 utters the user input voice command 3112 “Hey Siri, set a timer for 10 minutes”. In some embodiments, an audible output trigger event is any data configured to cause a device to output an audible output in response to a trigger event. For instance, in some examples, an audible output trigger event includes one or more of: notification settings (e.g., identifying events for which a device should issue an audible notification such as phone calls, text messages, reminders, calendar events, or the like), a user input request to set an alarm/reminder/timer, or the like. In some embodiments, the audible output trigger event is received via user input (e.g., a voice command) or data transfer (e.g., from a user’s personal device, or from their user account (e.g., iCloud)). Subsequent to the user input voice command 3112, in the example shown in FIG. 31C, the user is still in the same position nearest device 3100, and so device 3100 outputs an audible alarm 3110 upon the occurrence of the trigger event (e.g., expiration of the 10 minute timer).

**[0808]** In some embodiments, a device (e.g., 3100) has an audible output range (e.g., a designated, predetermined, or dynamic range). In some embodiments, if a device (e.g., 3100) determines that a user is located outside of the audible output range of the device, it forgoes outputting the audible output when the trigger event occurs. For example, as shown in FIG. 31D, user 3108 is closest to device 3102 when the trigger event occurs (e.g., the expiration of the 10 minute timer), and thus device 3102 outputs the audible alarm 3110. Similarly, in FIG. 31E, the user 3108 is closest to device 3104 when the trigger event occurs (e.g., the expiration of the 10 minute timer), and thus device 3104 outputs the audible alarm 3110.

**[0809]** In some embodiments, determining whether a user is located within an audible output range is based on one or more of: a detected physical proximity of the device (e.g., 3100) to the user (e.g., 3108), a detected presence of the user (e.g., 3108) in the same room as the device (e.g., 3100), and the output characteristics (e.g., audio output power) of the device (e.g., 3100). In some embodiments, determining whether a user is located within an audible output range is based on detection of a device associated with the user.

**[0810]** An audible output range can be determined in a variety of manners. In some embodiments, the audible output range (e.g., of each device) is fixed. For example, FIG. 31F depicts the audible output range 3100A of device 3100 (e.g., is a proximity range represented by the dotted line), the audible output range 3102A of device 3102, and audible output range 3104A of device 3104, which represent fixed ranges. In some embodiments, an audible output range is independent for each device (or is not affected by whether there are other devices in the set of devices, or other devices nearby. For example, a device can have a fixed proximity range (e.g., 3100A, 3102A, or 3104A), such that it is possible for a user to be out of range (e.g., in the garage in FIG. 31F) of each device in a set of devices (e.g., 3100, 3102, and 3104).

**[0811]** In some embodiments, a user can be within the audible output range of a plurality of devices. For example, as shown in FIG. 31G, user 3108 is within the output range of both devices 3100 and 3102, and thus both devices are outputting audible alarm 3110. In some embodiments, only one device of the plurality of devices outputs an audible output if a user is within range of the plurality of devices.

**[0812]** In some embodiments, an audible output range of a device is the room in which a device is located. For example, as shown in FIG. 31H, the user is physically positioned in the Bedroom upon the occurrence of the trigger event, and thus device 3104 outputs audible alarm. Notably, in FIG. 31H, device 3104 outputs the alarm even though user 3106 is physically  
 5 positioned closer to device 3100. Thus, in this example, it is the room that the user is in, and not necessarily physical proximity, that affects whether a device outputs in response to a trigger event.

**[0813]** In some embodiments, each device in a set of devices (e.g., 3100, 3102, and 3104) receives the audible output trigger event. As shown in FIG. 31H, even though the user's voice  
 10 input (e.g., to set a timer) was received at device 3100, device 3104 responds to the trigger event by audibly outputting the alarm 3110. In some embodiments, a device (e.g., 3104) receives an audible output trigger event from another device (e.g., another device (e.g., 3100) in a set of devices, such as a home set of devices; or another device connected to the device). In some  
 15 embodiments, a device (e.g., 3104) receives an audible output trigger event from a user account (e.g., downloaded from an iCloud account).

**[0814]** In some embodiments, the audible output range of a device (e.g., 3100) is relative to one or more other devices (e.g., 3102), or is otherwise affected by other devices in a set of devices or nearby. For instance, FIG. 31I illustrates a scenario in which device 3100 is  
 20 physically nearest to the user 3106 (or is the last device to which the user 3106 was detected to be nearest). Thus, in FIG. 31I, device 3100 outputs the audible alarm 3110, even though the user is in the next room. This, for example, can ensure that at least one device outputs the audible output. In some embodiments, a device adjusts its output (e.g., outputs at a loud volume) based on a user's positioning (e.g., if the user is detected to be positioned far away from the device).

**[0815]** In some embodiments, a device (e.g., 3100) of the set of devices (e.g., 3100, 3102,  
 25 and 3104) detects a user voice to determine whether the user is located within the device's audible output range. For example, in FIG. 31J user 3108 speaking with user 3116 in the Living Room, as represented by user voice 3114 ("How are you?"). In some example, device 3100 detects the voice of user 3106, and determines that the user is in the Living Room (e.g., and within the audible output range of device 3100). Thus, in this example, device 3100 will output

the audible alarm 3110 upon occurrence of the trigger (e.g., if user 3106 continues to be detected, or is detected within a threshold amount of time preceding the trigger event (e.g., within the last 5 minutes before the trigger)).

**[0816]** In some embodiments, a device (e.g., 3106) that is not one of the set of devices (e.g., 3100, 3102, and 3104) is connected to the set of devices. In this example, device 3106 is a car that connected to a personal device of user 3106 when the user entered the car. In some embodiments, the devices of the set of devices forgo outputting audible outputs in response to determining that the user is within an audible output range (e.g., while the car is powered on) of the device (e.g., 3106) that is not one of the set of devices. For example, as shown in FIG. 31K, when the user enters car 3106, the set of devices 3100, 3102, and 3104 do not output the audio output in response to trigger event (e.g., because the user is likely to be leaving their home).

**[0817]** In some examples, the devices of a set of devices are used as intelligent end-to-end communication tools. In some embodiments, a first device (e.g., 3100) of a set of devices (e.g., 3100, 3102, and 3104) receives a user input request (e.g., 3118) to deliver a message (e.g., 3120) to a user (e.g., 3116) that is within audible output range of at least one device of the set of devices. In some embodiments, the first device (e.g., 3100) transmits the message to a second device (e.g., 3104) (e.g., that the user 3116 is within audible output range of) of the set of devices (e.g., 3100, 3102, and 3104). For example, as shown in FIG. 31L, user 3108 is located in the Living Room and user 3116 is located in the Bedroom. At FIG. 31M, user 3108 utters the user input voice command 3118 “Send a message to Tim, dinner is ready”, which is detected by device 3100. As described above, the devices of the set of devices (e.g., 3100, 3102, and 3104) can determine a physical position of a user in order to deliver output of audible notifications as appropriate. Thus, as shown in FIG. 31N, a message 3120 (“Dinner is ready”) is audibly output by a second device (e.g., 3104) of the set. In this example, the user 3116 (the target of the voice input command, Tim) is located within the audible output range of device 3104, and thus device 3104 outputs the message 3120. In some embodiments, the first device transmits a request to the second device inquiring whether the user (e.g., 3116) is within the devices audible output range (e.g., and if confirmation is received, transmits the message 3120 to the second device).

**[0818]** In some embodiments, the audible output range of a device (e.g., 3100) is based on one or more of: other detectable indicia of a user presence or location, including footsteps (e.g., determining and detecting a footstep pattern associated with a user, tracking the location of a set of footsteps as they move around (e.g., which are presumed to be the user), determining and  
 5 detecting a breathing pattern of the user, using a visual detection mechanism (e.g., a motion sensor, a camera), or the like.

**[0819]** FIG. 32 is a flow diagram illustrating a method for outputting an audible output based on user location using an electronic device in accordance with some embodiments. Method 3200 is performed at a device (e.g., 100, 300, 500). Some operations in method 3200 are, optionally,  
 10 combined, the order of some operations are, optionally, changed, and some operations are, optionally, omitted.

**[0820]** As described below, method 3200 provides an intuitive way for outputting an audible output based on user location. The method reduces the cognitive burden on a user for outputting an audible output based on user location, thereby creating a more efficient human-machine  
 15 interface. For battery-operated computing devices, enabling a user to outputting an audible output based on user location faster and more efficiently conserves power and increases the time between battery charges.

**[0821]** The electronic device (e.g., 3100), which is a first device of a set of devices (e.g., 3100, 3102, and 3104) associated with a first user account: receives (3202) an audible output  
 20 trigger event. In some embodiments, an audible output trigger event is any data configured to cause a device to output an audible output in response to a trigger event. In some embodiments, an audible output trigger events is one or more of: a notification (e.g., alarm/timer/reminder) for a particular time (e.g., 5:00PM) or some length of time in the future (e.g., in 30 minutes). In some embodiments, an audible output trigger event is a device notifications setting.

**[0822]** The first device (e.g., 3100) determines (3204) that a first user (e.g., 3108), associated with the first user account, is located within an audible output range (e.g., 3100A, 3102A, and/or 3104A) of a device of the set of devices. In some embodiments, an audible output range is independent for each device (or is not affected by whether there are other devices in the set of devices). For example, each device has an “fixed” proximity range, so a user (e.g., 3108) can be  
 25

out of range of each device in a set of devices. In some embodiments, the audible output range of a device is relative or otherwise affected by other devices in the set of devices. For example, the user may always be within the audible output range of the closest (most proximate) device of the set (e.g., closest device responds, even if it is in the next room or 100 meters away; as shown in FIG. 31I). In some embodiments, the audible output range is the room that the device is located in (e.g., for a device located in a room that is correctly identified as being in the “Bedroom” in device settings, then a user is within the audible output range of the bedroom device (e.g., 3104) is present (physically located) in the Bedroom, as shown in FIG. 31H.);

**[0823]** In accordance with a determination that the first user (e.g., 3108) is within the audible output range of the first device (e.g., 3100), and in accordance with an occurrence of the audible output trigger event, the first device (e.g., 3100) outputs (3206) an audible output (e.g., 3110 as shown in FIG. 31C). For example, the first device outputs an audible tone for timer expiring, or outputs a received phone call.

**[0824]** Using a determination of whether the physical position of a user is within an audible output range of a device provides the user with an easy technique for receiving output from appropriately positioned devices without extraneous user inputs. Performing an operation when a set of conditions has been met without requiring further user input enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

**[0825]** In accordance with a determination that the first user is within the audible output range of a second device (e.g., 3102 as shown in FIG. 31D, and in accordance with an occurrence of the audible output trigger event, forgoing outputting the audible output (e.g., 3100 does not output audible tone for timer expiring; as shown in FIG. 31D).

**[0826]** In some embodiments, the device (e.g., 3102) of the set of devices is a second device, and wherein outputting the audible output comprises transmitting an instruction to the second device (e.g., 3102) to output the audible output (e.g., 3110 as shown in FIG. 31D).

**[0827]** In some embodiments, outputting the audible output includes playing an audible tone (e.g., a sound, or voice dictation). In some embodiments, the device also outputs a visual output (e.g., using an LED or a display.).

**[0828]** In some embodiments, receiving the audible output trigger event comprises receiving  
5 user input representing configuration of the audible output trigger event (e.g., setting a timer, an alarm, or reminder; or setting up notification or phone call output settings).

**[0829]** In some embodiments, receiving the audible output trigger event comprises receiving  
10 data representing audible output settings associated with the first user account (e.g., whether to push one or more of: phone calls, text message notifications, email notifications, etc., to the first device (e.g., for audible output)).

**[0830]** In some embodiments, the audible output range of the first device is based on one or more of: a detected physical proximity (e.g., distance) of the first device to the first user; a detected presence of the first user in the same room as the first device; and the output characteristics of the first device (e.g., speaker output power).

**[0831]** In some embodiments, determining that the first user is located within the audible  
15 output range of the device of the set of devices comprises one or more of the following:  
detecting, at the device (e.g., 3100), a voice associated with the first user (e.g., 3112 or 3114)  
(e.g., within a threshold time before the notification trigger event, indirectly (e.g., overhearing  
20 user), or directly (e.g., user interacts with device with a voice command)); detecting, at the  
device, a third device (e.g., a personal device) associated with the user, wherein the third device  
is not a member of the set of devices (e.g., the device is the user's personal phone, and is not part  
of a group of stationary devices (e.g., devices 3100, 3102, and 3104)); and receiving a signal,  
from an external sensor (e.g., a sensor on an external device, or a sensor on the device),  
representative of the first user being physically near the device (e.g., motion sensor, camera).

**[0832]** In some embodiments, subsequent to outputting the audible output: in accordance  
25 with a determination that the first user (e.g., 3108) is within an audible output range of a fourth  
device (e.g., 3106) that is not a member of the set of devices (e.g., 3100, 3102, and 3104), and in  
accordance with an occurrence of the audible output trigger event, the first device (e.g., 3100)



forgoes outputting the audible output. For example, the user has entered their car in the garage (e.g., which is connected to the set of devices), and the set of devices forgoes outputting the audible output even though the user is still be within range of a device of the set of devices.

**[0833]** In some embodiments, the first device (e.g., 3100) plays back media content. Further in accordance with a determination that the first user is within the audible output range of the fourth device (e.g., 3106) that is not a member of the set of devices, ceasing playback of the media content.

**[0834]** Note that details of the processes described above with respect to method 3200 (e.g., FIG. 32) are also applicable in an analogous manner to the methods described above. For example, method 700, 900, 1100, 1300, 1500, 1700, 1800, 2000, 2200, 2400, 2600, 2800, and 3000, optionally includes one or more of the characteristics of the various methods described above with reference to method 3200. For brevity, these details are not repeated below.

**[0835]** The foregoing description, for purpose of explanation, has been described with reference to specific embodiments. However, the illustrative discussions above are not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many modifications and variations are possible in view of the above teachings. The embodiments were chosen and described in order to best explain the principles of the techniques and their practical applications. Others skilled in the art are thereby enabled to best utilize the techniques and various embodiments with various modifications as are suited to the particular use contemplated.

**[0836]** Although the disclosure and examples have been fully described with reference to the accompanying drawings, it is to be noted that various changes and modifications will become apparent to those skilled in the art. Such changes and modifications are to be understood as being included within the scope of the disclosure and examples as defined by the claims.

**[0837]** As described above, one aspect of the present technology is the gathering and use of data available from various sources to improve the delivery to users of invitational content or any other content that may be of interest to them. The present disclosure contemplates that in some instances, this gathered data may include personal information data that uniquely identifies or can be used to contact or locate a specific person. Such personal information data can include

demographic data, location-based data, telephone numbers, email addresses, home addresses, or any other identifying information.

**[0838]** The present disclosure recognizes that the use of such personal information data, in the present technology, can be used to the benefit of users. For example, the personal information data can be used to deliver targeted content that is of greater interest to the user. Accordingly, use of such personal information data enables calculated control of the delivered content. Further, other uses for personal information data that benefit the user are also contemplated by the present disclosure.

**[0839]** The present disclosure further contemplates that the entities responsible for the collection, analysis, disclosure, transfer, storage, or other use of such personal information data will comply with well-established privacy policies and/or privacy practices. In particular, such entities should implement and consistently use privacy policies and practices that are generally recognized as meeting or exceeding industry or governmental requirements for maintaining personal information data private and secure. For example, personal information from users should be collected for legitimate and reasonable uses of the entity and not shared or sold outside of those legitimate uses. Further, such collection should occur only after receiving the informed consent of the users. Additionally, such entities would take any needed steps for safeguarding and securing access to such personal information data and ensuring that others with access to the personal information data adhere to their privacy policies and procedures. Further, such entities can subject themselves to evaluation by third parties to certify their adherence to widely accepted privacy policies and practices.

**[0840]** Despite the foregoing, the present disclosure also contemplates embodiments in which users selectively block the use of, or access to, personal information data. That is, the present disclosure contemplates that hardware and/or software elements can be provided to prevent or block access to such personal information data. For example, in the case of advertisement delivery services, the present technology can be configured to allow users to select to “opt in” or “opt out” of participation in the collection of personal information data during registration for services. In another example, users can select not to provide location information

for targeted content delivery services. In yet another example, users can select to not provide precise location information, but permit the transfer of location zone information.

[0841] Therefore, although the present disclosure broadly covers use of personal information data to implement one or more various disclosed embodiments, the present disclosure also  
5 contemplates that the various embodiments can also be implemented without the need for accessing such personal information data. That is, the various embodiments of the present technology are not rendered inoperable due to the lack of all or a portion of such personal information data. For example, content can be selected and delivered to users by inferring preferences based on non-personal information data or a bare minimum amount of personal  
10 information, such as the content being requested by the device associated with a user, other non-personal information available to the content delivery services, or publically available information. The scope of the invention is covered by the following claims.

## PATENTKRAV

1. Computer-implementeret fremgangsmåde, der omfatter:

ved en indretning med en skærm:

visning (902), på skærmen, af en første aktuel mediegrænseflade for indretningen,

5 hvor den første mediegrænseflade omfatter:

en repræsentation (904) af et første medieelement der er tilgængeligt for

afspilning på indretningen, og

et afspilningsindretningsvalghandlingselement (eng: playback device selection affordance) (906);

10 modtagelse (908) af et første brugerinput der repræsenterer valg af afspilningsindretningsvalghandlingselementet;

visning (910), på skærmen, som reaktion på modtagelse af det første brugerinput, af en flerhed af handlingselementer, idet hvert handlingselement i flerheden af

handlingselementer er associeret med et sæt af tilgængelige afspilningsindretninger forbundet til

15 indretningen;

modtagelse (912) af et andet brugerinput der repræsenterer valg af to eller flere af flerheden af handlingselementer associeret med sættene af tilgængelige afspilningsindretninger; og

20 konfigurerings (914), som reaktion på modtagelse af det andet brugerinput, af indretningen til at initiere afspilning på sættene af tilgængelige afspilningsindretninger associeret med de to eller flere valgte handlingselementer.

2. Fremgangsmåde ifølge krav 1, hvor konfigurerings af indretningen til at initiere afspilning på sættene af tilgængelige afspilningsindretninger omfatter transmittering af en instruktion til de

25 tilgængelige afspilningsindretninger om at initiere afspilning.

3. Fremgangsmåde ifølge krav 1, der endvidere omfatter, mens indretningen er konfigureret til at initiere afspilning på sættene af tilgængelige afspilningsindretninger:

modtagelse, efter ophør af visning af flerheden af handlingselementer associeret med sættene af tilgængelige afspilningsindretninger, af et tredje brugerinput, på indretningen, der repræsenterer en anmodning om at initiere afspilning af et andet medieelement;

5 transmittering, som reaktion på modtagelse af det tredje brugerinput, af en anmodning om at initiere afspilning af det andet medieelement på sættene af tilgængelige afspilningsindretninger.

4. Fremgangsmåde ifølge et hvilket som helst af kravene 1-3, hvor den første aktuelle mediegrænseflade for indretningen omfatter en indikation af et medieelement der i øjeblikket  
10 afspilles på indretningen, idet fremgangsmåden endvidere omfatter:

samtidig visning, på skærmen, som yderligere reaktion på modtagelse af det første brugerinput, af:

et første område der omfatter flerheden af handlingselementer associeret med sættene af tilgængelige afspilningsindretninger; og

15 et andet område der omfatter indikationen af medieelementet der i øjeblikket afspilles på indretningen;

visuel opdatering, som yderligere reaktion på modtagelse af det andet brugerinput, af det andet område til at vise en indikation af et medieelement der i øjeblikket afspilles på sættene af tilgængelige afspilningsindretninger.

20

5. Fremgangsmåde ifølge et hvilket som helst af kravene 1-4, hvor flerheden af handlingselementer associeret med sættene af tilgængelige afspilningsindretninger forbundet til indretningen omfatter information der identificerer medie der i øjeblikket afspilles på sættene af tilgængelige afspilningsindretninger.

25

6. Fremgangsmåde ifølge krav 5, hvor informationen der identificerer mediet der i øjeblikket afspilles på sættene af tilgængelige afspilningsindretninger omfatter én eller flere af: en sangtitel, en kunstner, en filmtitel, et episodenavn og en URL.

7. Fremgangsmåde ifølge et hvilket som helst af kravene 1-6, der endvidere omfatter, mens indretningen er konfigureret til at initiere afspilning på sættene af tilgængelige afspilningsindretninger:

transmittering af en instruktion om at initiere medieafspilning af et tredje medieelement på sættene af tilgængelige afspilningsindretninger,

hvor sættene af tilgængelige afspilningsindretninger i øjeblikket afspiller et fjerde medieelement der blev initieret af en anden indretning der er forskellig fra indretningen; og

modtagelse, efter transmittering af instruktionen om at initiere afspilning af det tredje medieelement, af en indikation af at sættene af indretninger i øjeblikket afspiller det tredje medieelement.

8. Fremgangsmåde ifølge krav 7, der endvidere omfatter:

bestemmelse af at sættene af tilgængelige afspilningsindretninger i øjeblikket afspiller indhold der blev initieret af en anden indretning;

anmodning, i overensstemmelse med bestemmelsen af at sættene af tilgængelige afspilningsindretninger i øjeblikket afspiller indhold der blev initieret af en anden indretning, om brugerinputbekræftelse af instruktionen om at initiere medieafspilning af et tredje medieelement på sættene af tilgængelige afspilningsindretninger;

modtagelse af et brugerinputsvare på anmodningen om brugerinputbekræftelse;

transmittering, i overensstemmelse med at brugerinputsvaret er en positiv bekræftelse, af instruktionen om at initiere medieafspilning af det tredje medieelement på sættene af tilgængelige afspilningsindretninger; og

undladelse af transmittering, i overensstemmelse med at brugerinputsvaret er en negativ bekræftelse, af instruktionen om at initiere medieafspilning af det tredje medieelement på sættene af tilgængelige afspilningsindretninger.

9. Fremgangsmåde ifølge et hvilket som helst af kravene 1-8, der endvidere omfatter:

ophør af visning, som yderligere reaktion på modtagelse af det andet brugerinput, af flerheden af handlingselementer associeret med sættene af tilgængelige afspilningsindretninger.

10. Fremgangsmåde ifølge et hvilket som helst af kravene 1-9, hvor et medieelement omfatter én eller flere af: lyddata, videodata eller begge.

11. Ikke-flygtigt computerlæsbart lagermedium der indeholder ét eller flere programmer  
5 konfigureret til at blive udført på én eller flere processorer i en elektronisk indretning med en skærm, idet det ene eller flere programmer omfatter instruktioner til udførelse af fremgangsmåden ifølge et hvilket som helst af kravene 1-10.

12. Elektronisk indretning, der omfatter:  
10 en skærm;  
én eller flere processorer; og  
hukommelse der indeholder ét eller flere programmer konfigureret til at blive udført på den ene eller flere processorer, idet det ene eller flere programmer omfatter instruktioner til udførelse af fremgangsmåden ifølge et hvilket som helst af kravene 1-10.

15

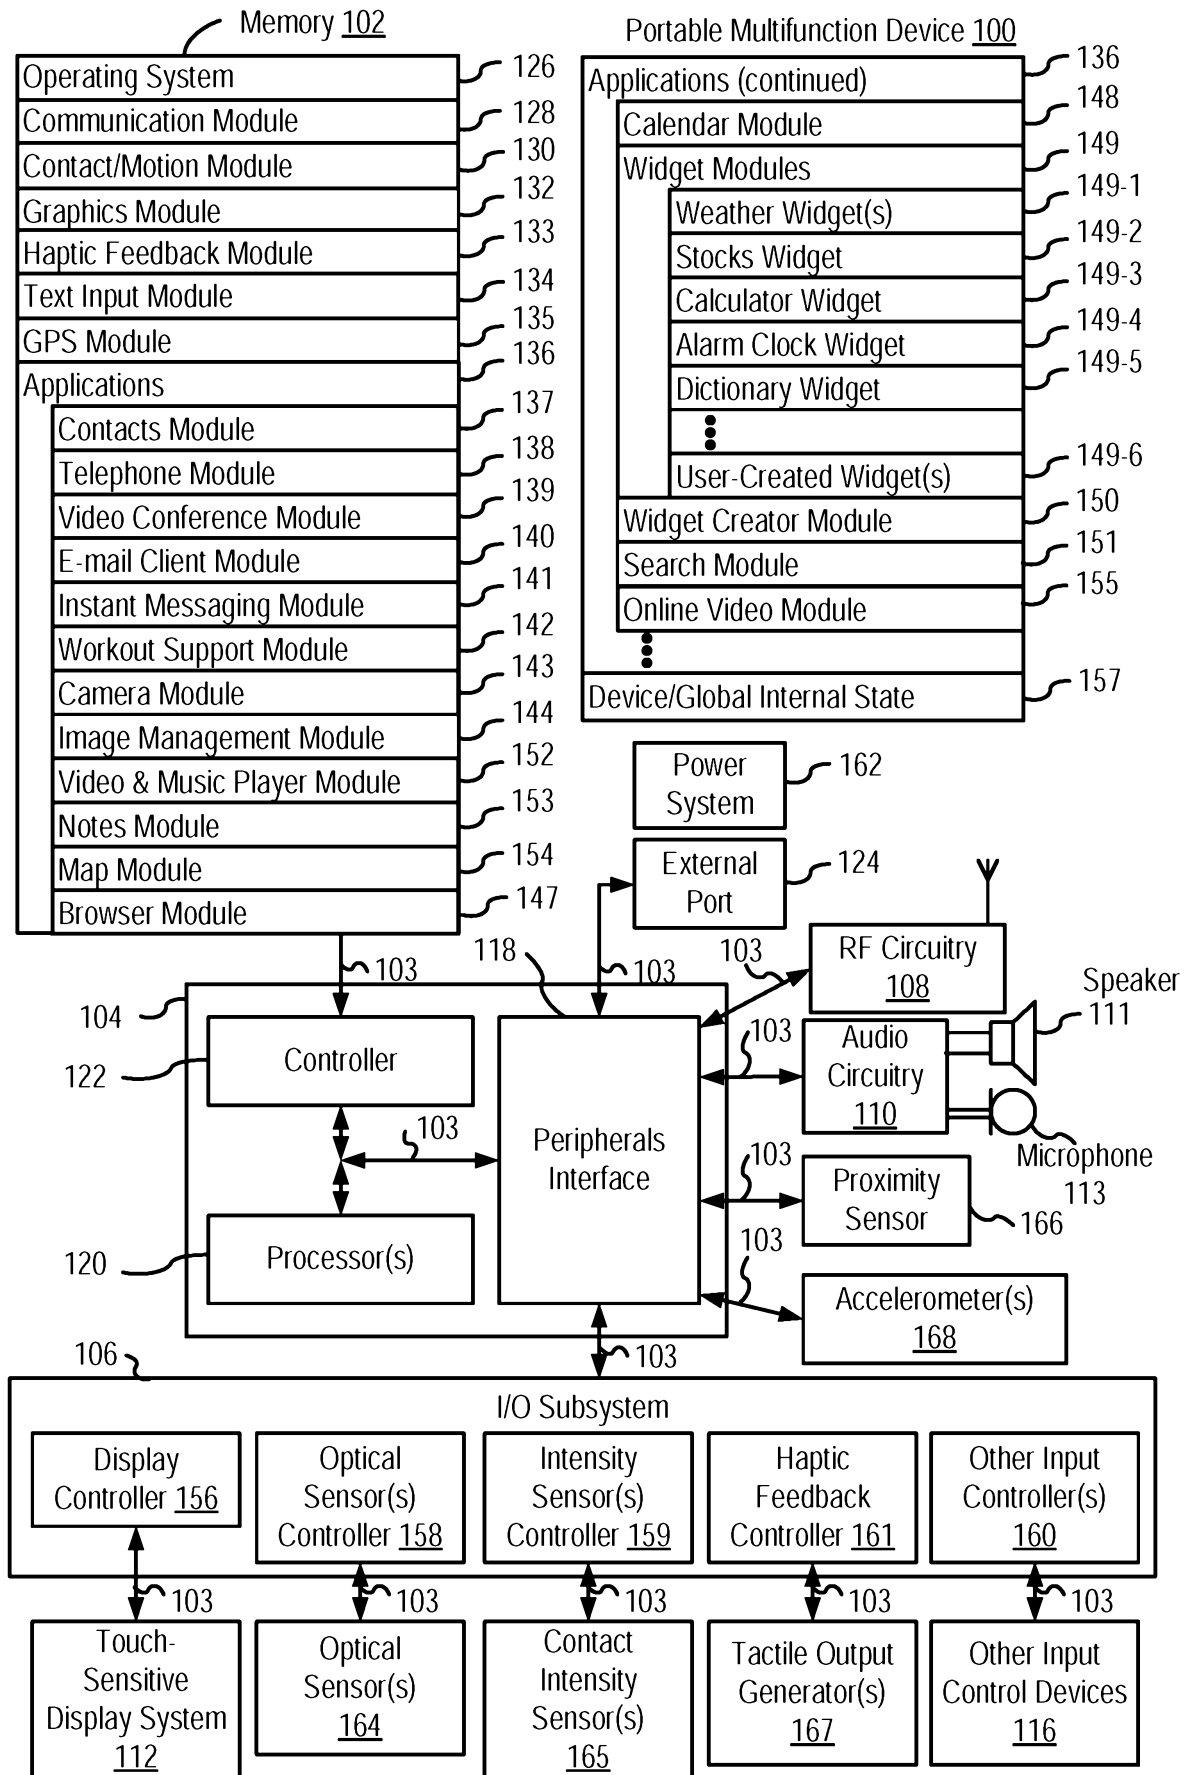


FIG. 1A



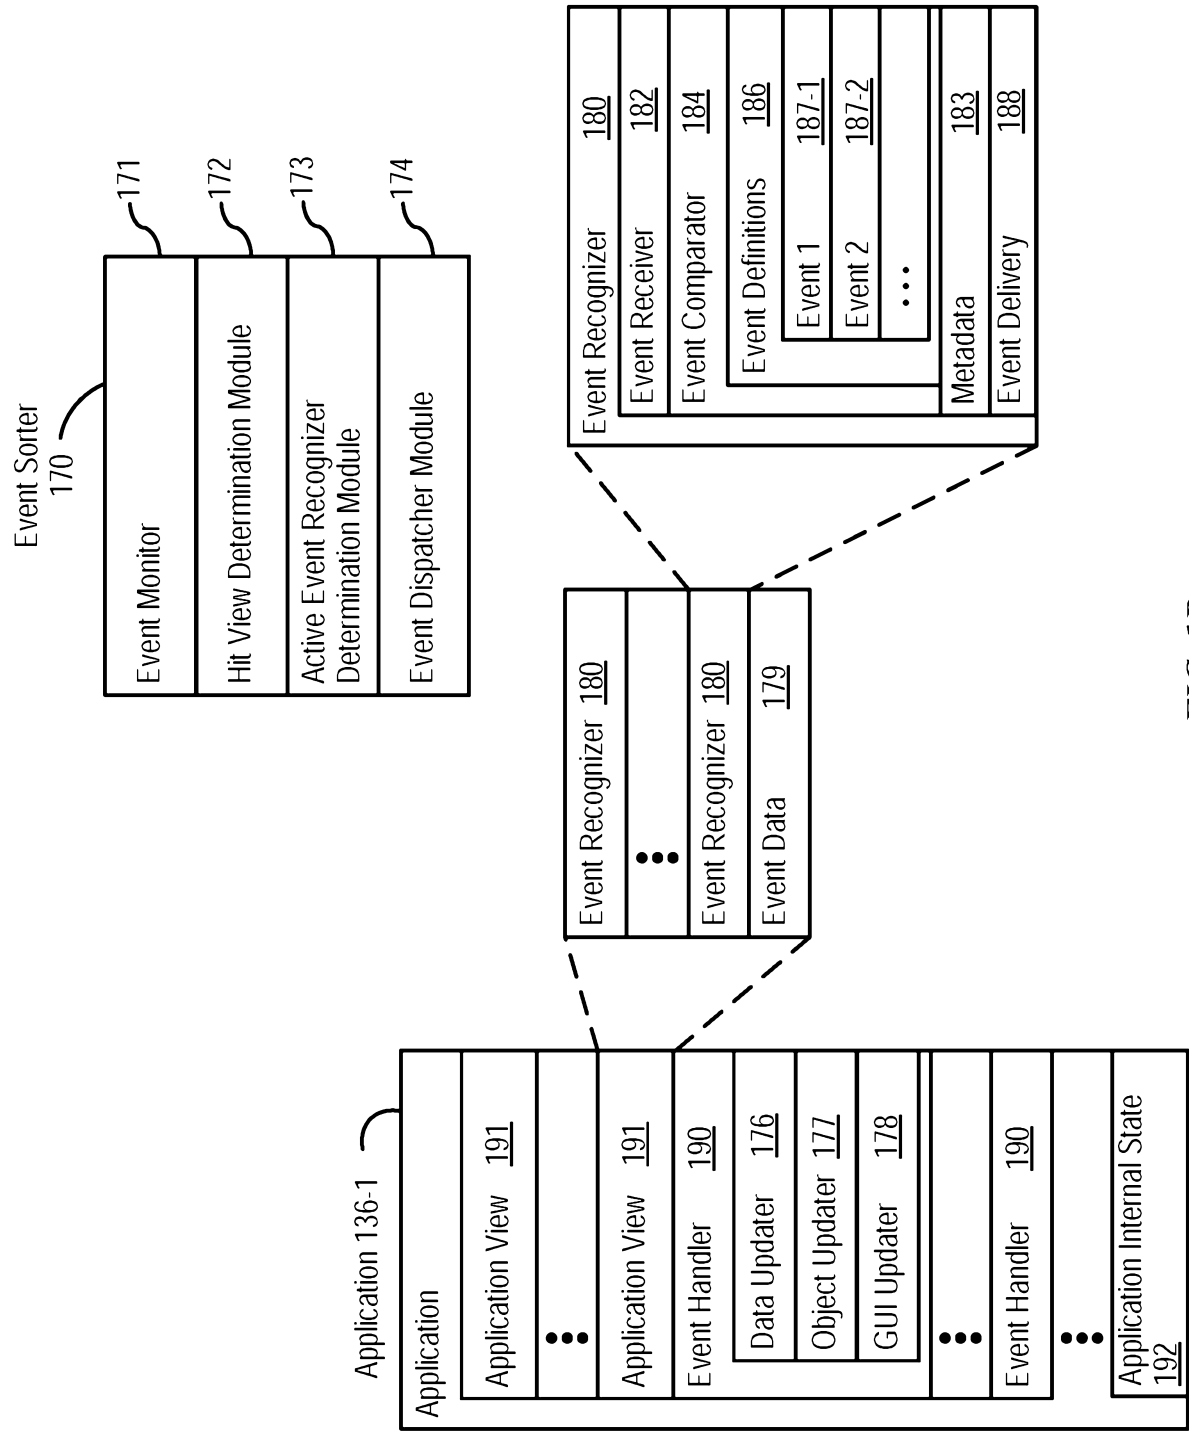
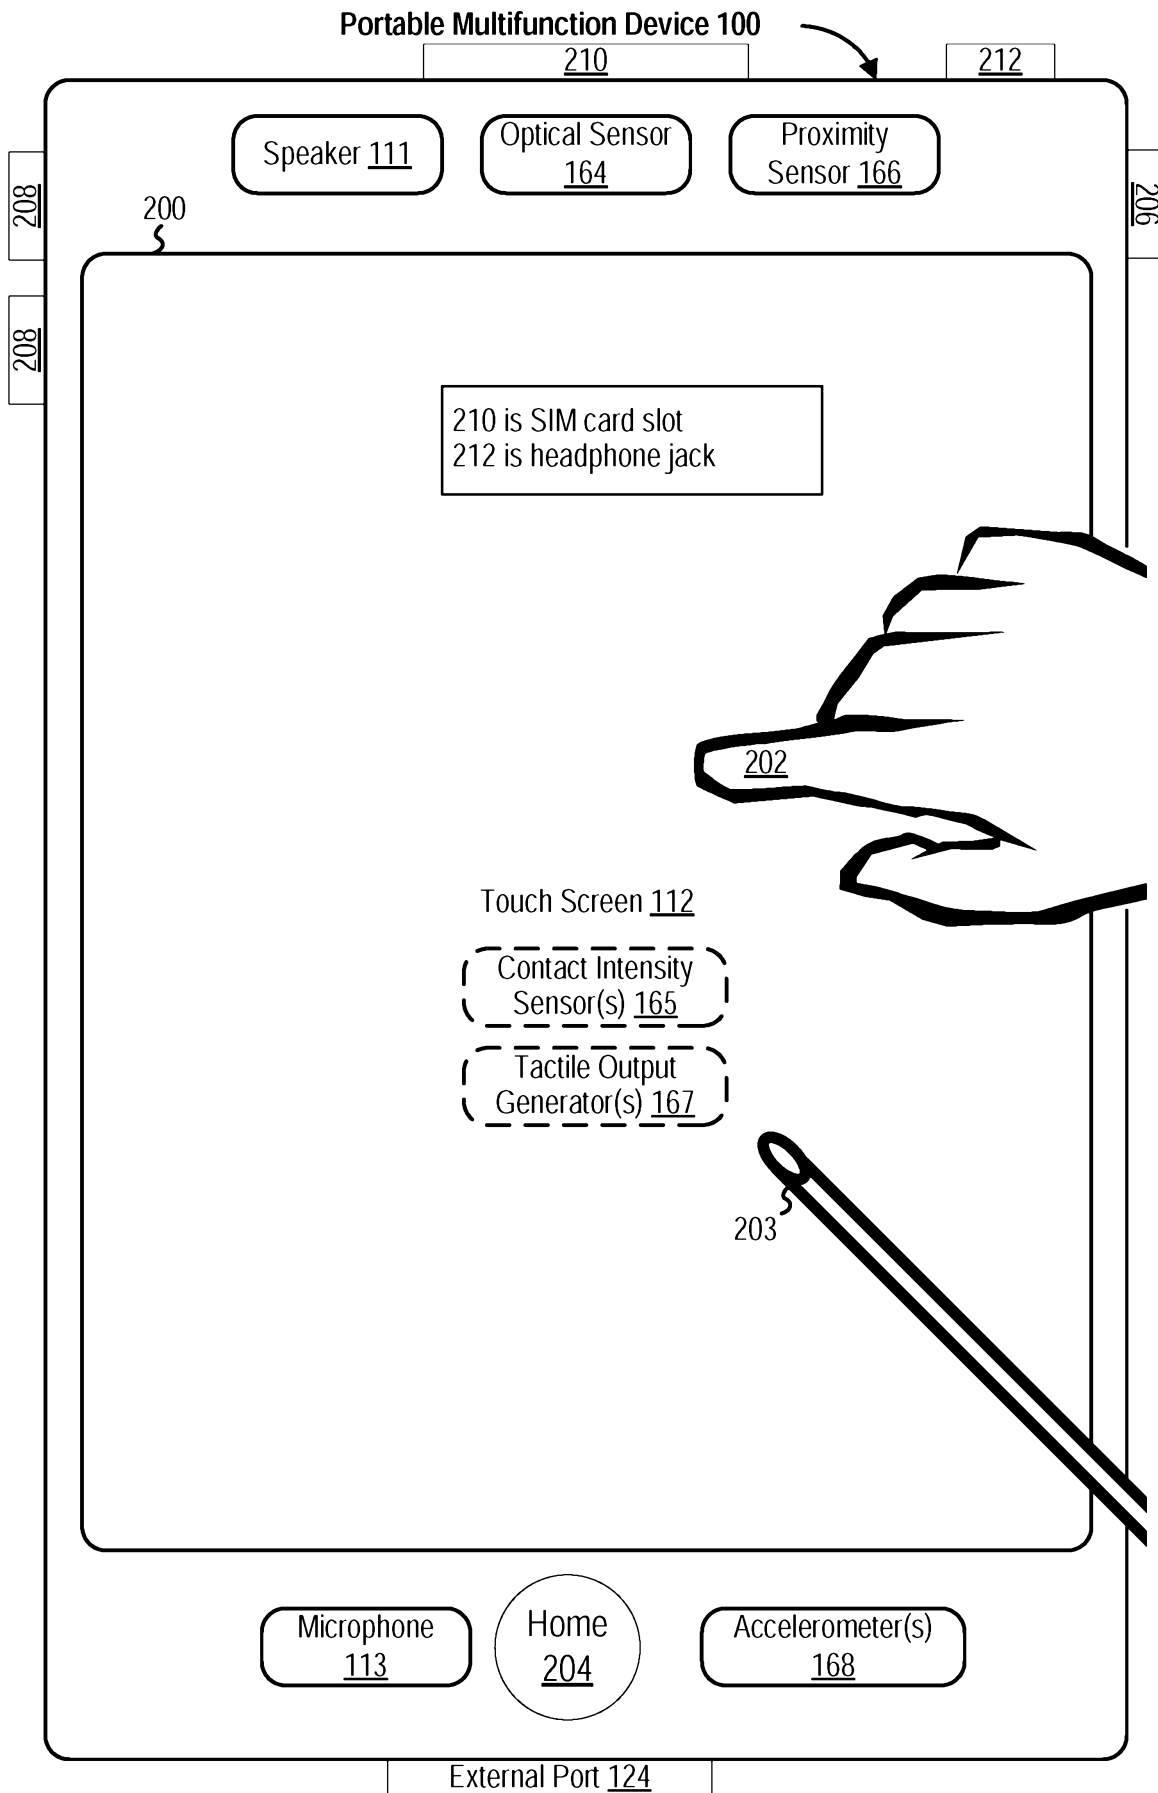


FIG. 1B

**FIG. 2**

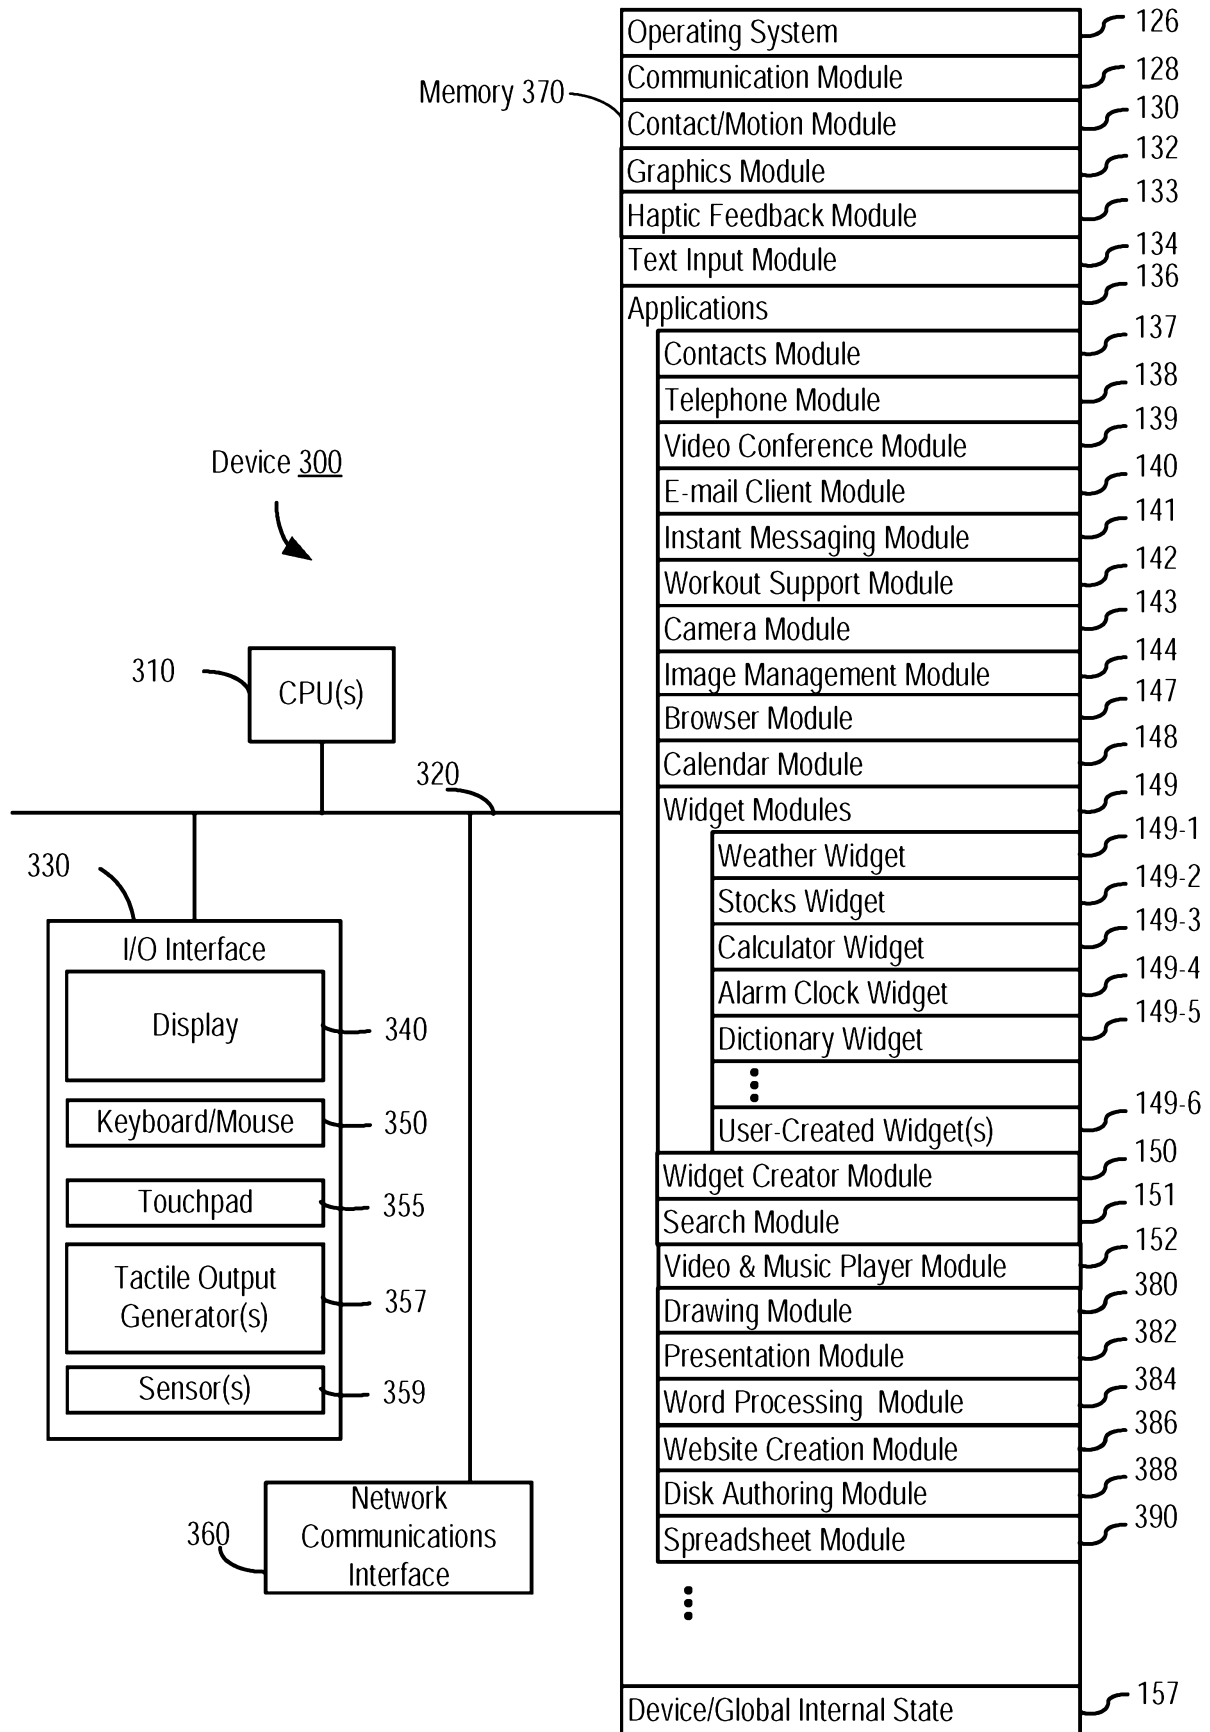


FIG. 3

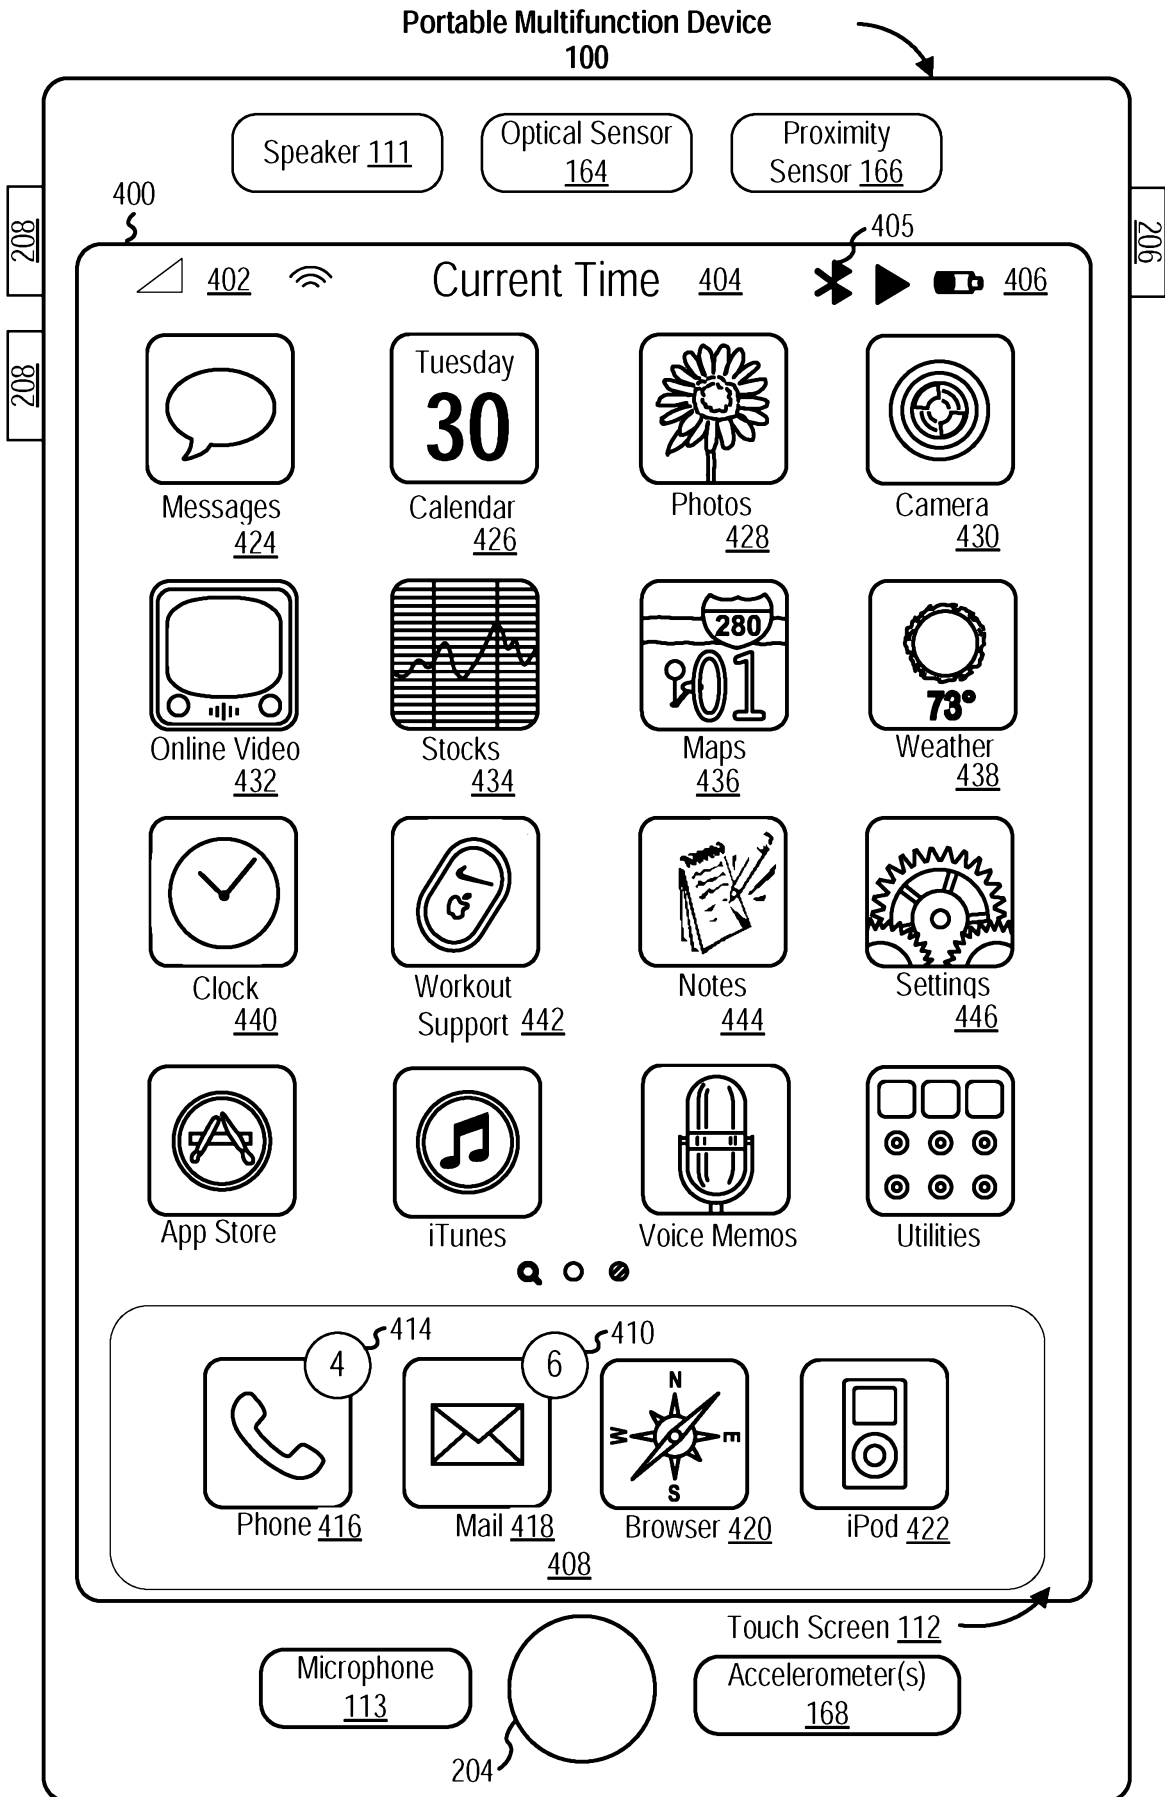
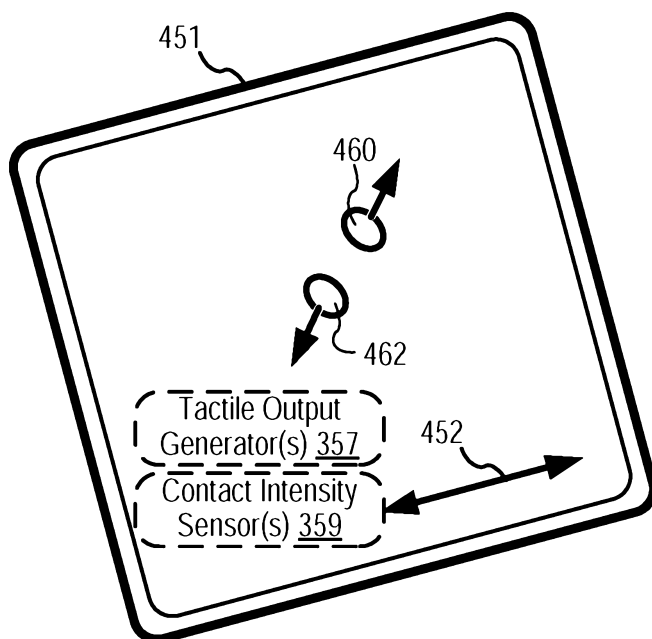
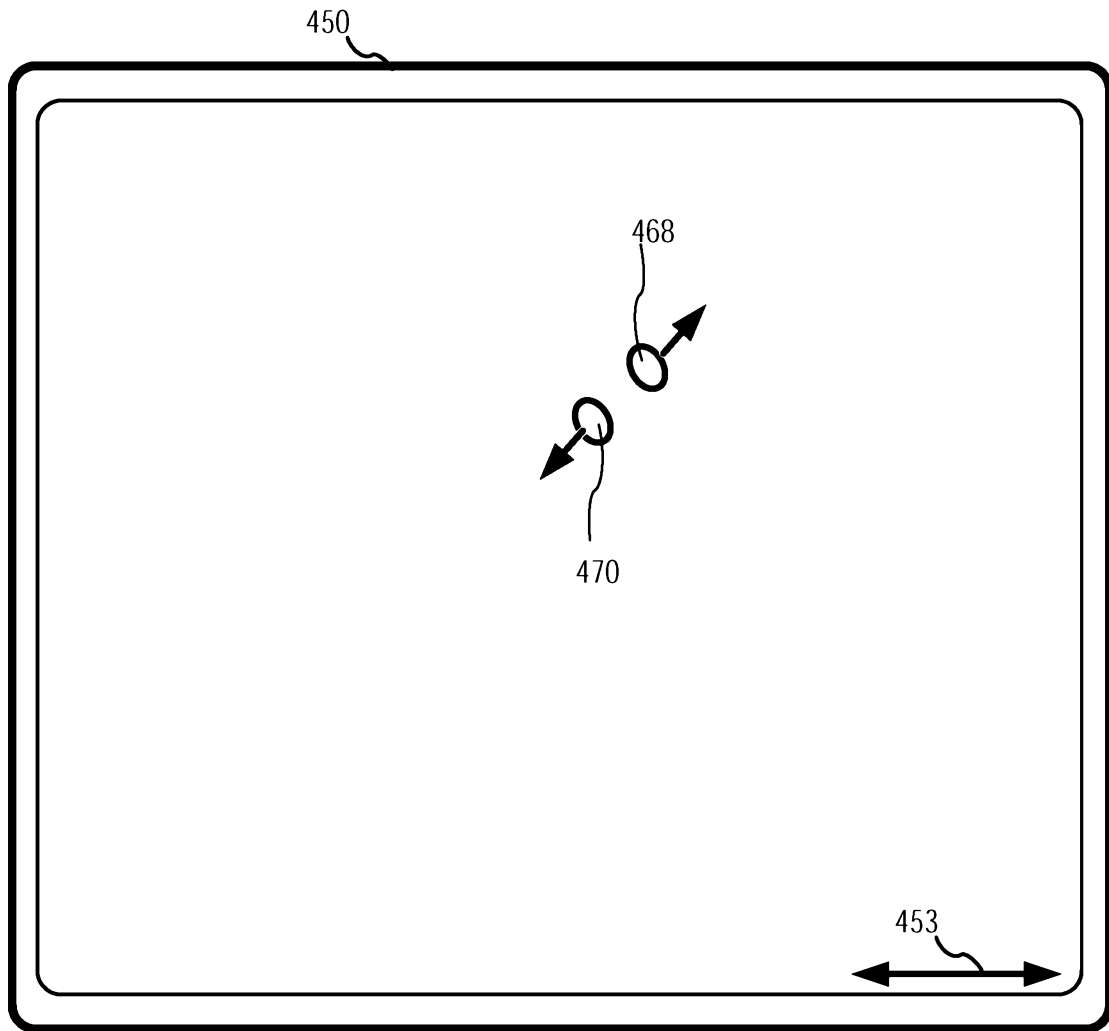
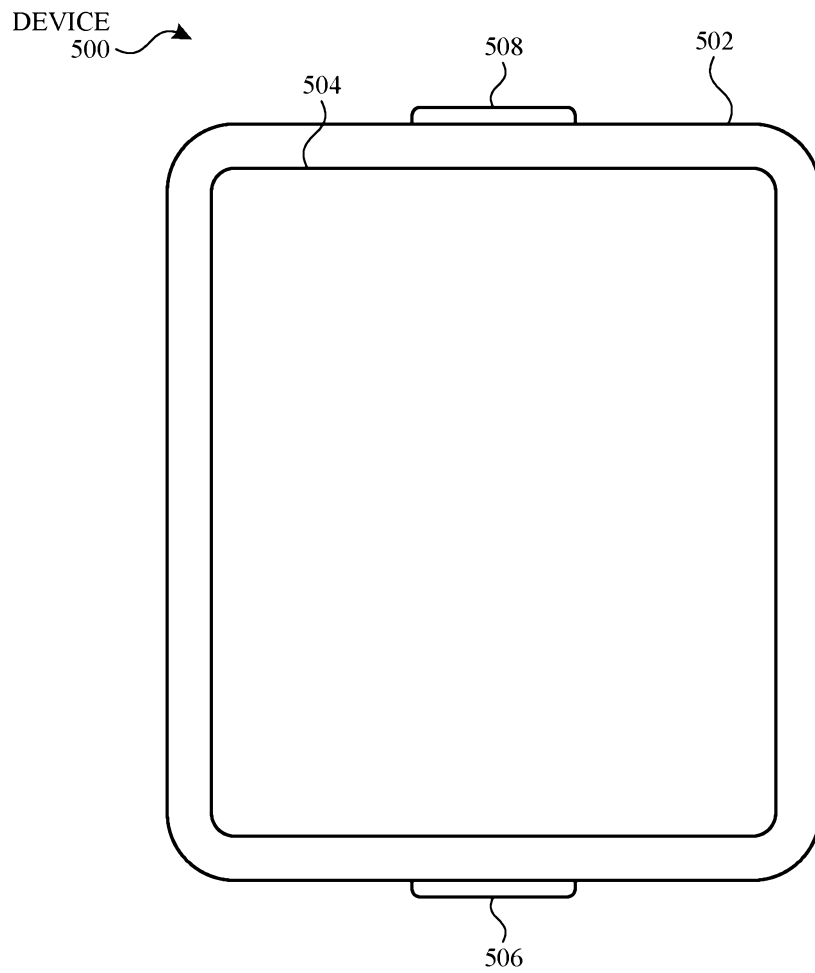


FIG. 4A

**FIG. 4B**

**FIG. 5A**

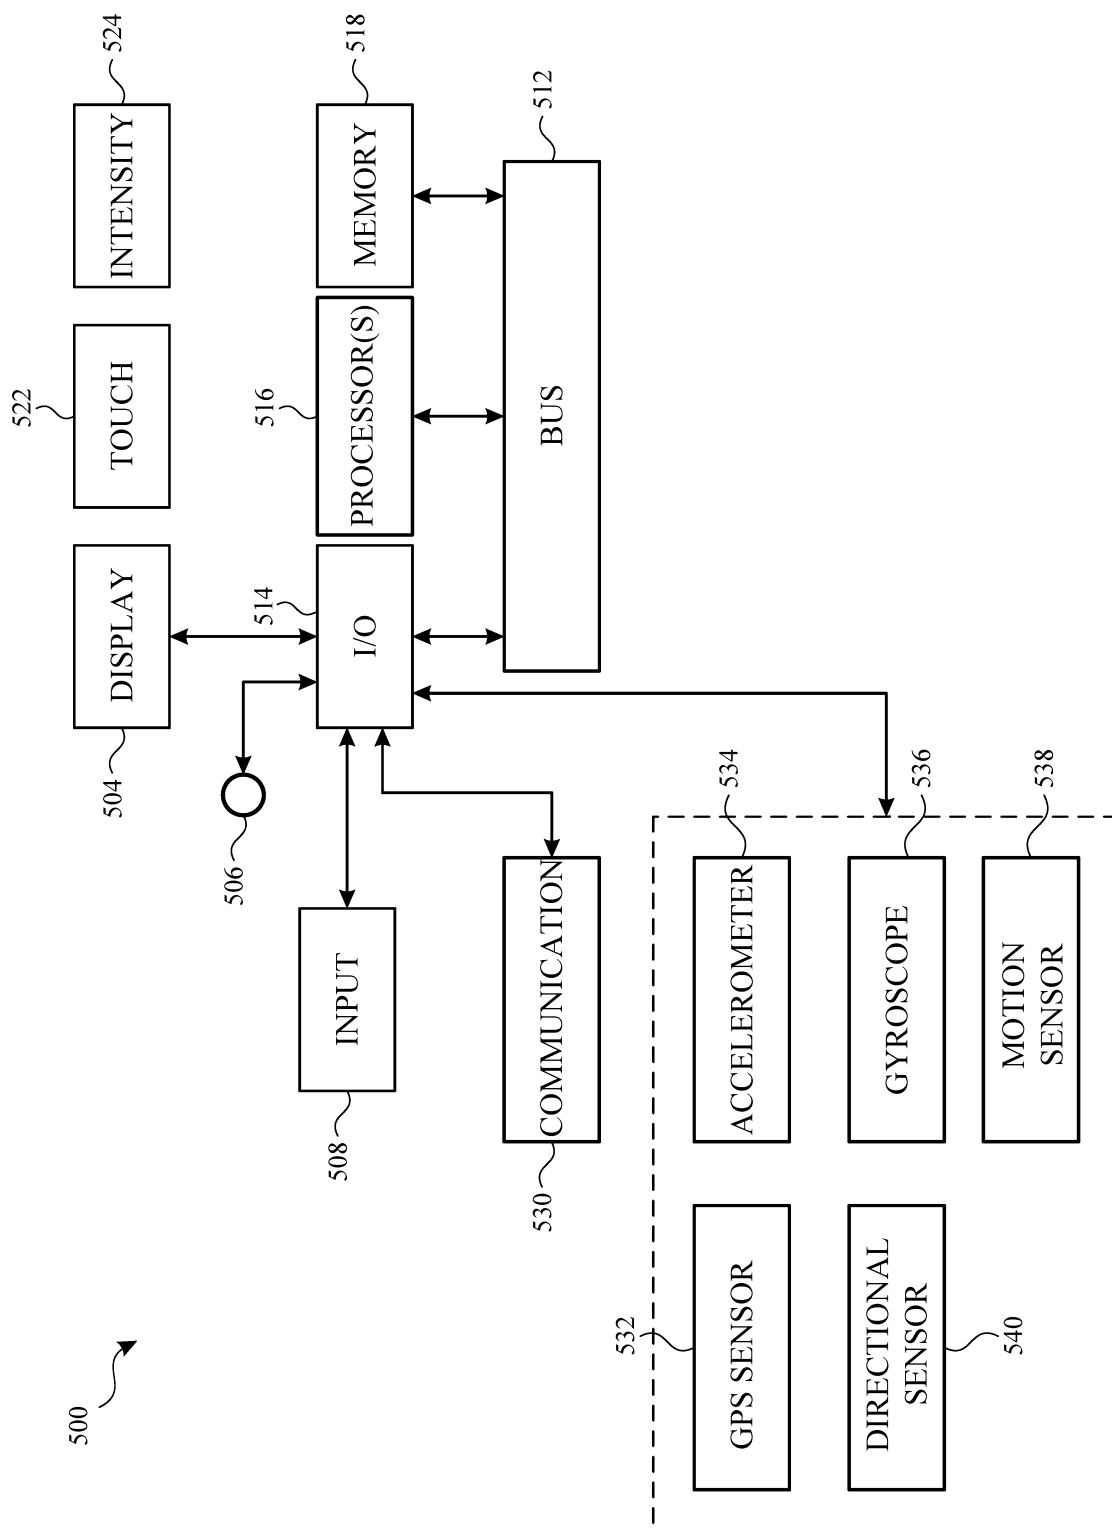
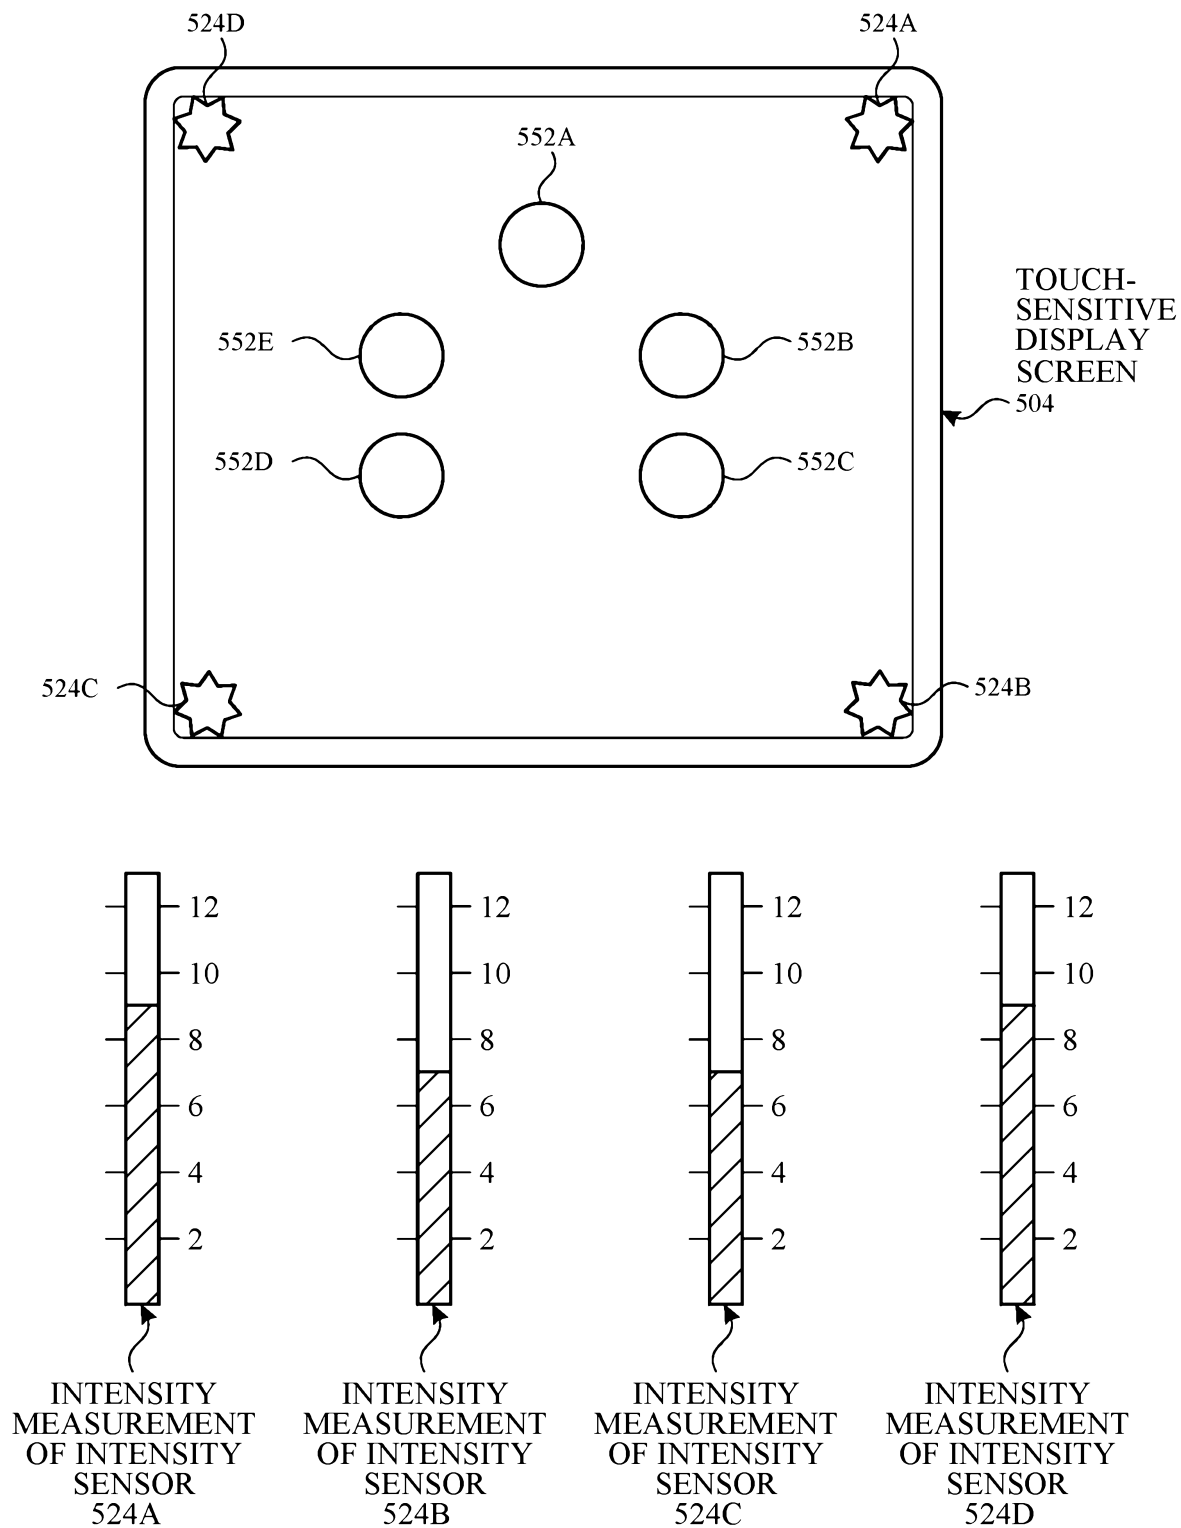


FIG. 5B

**FIG. 5C**



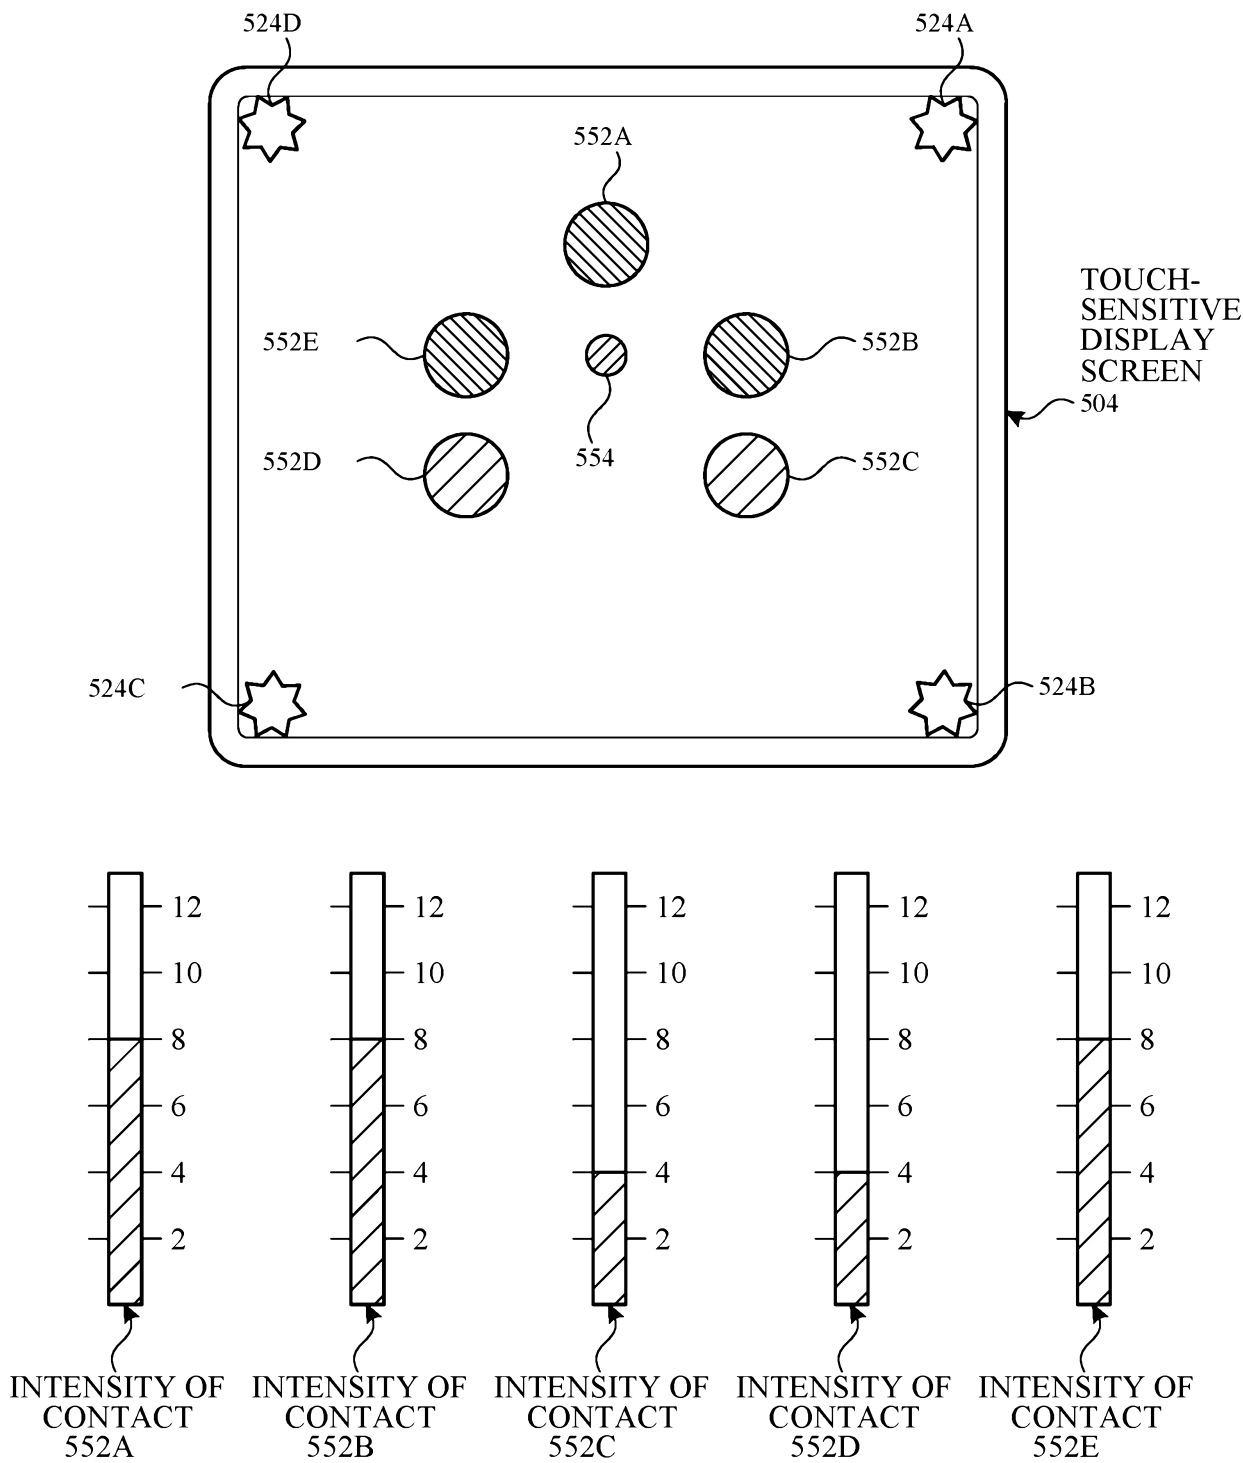
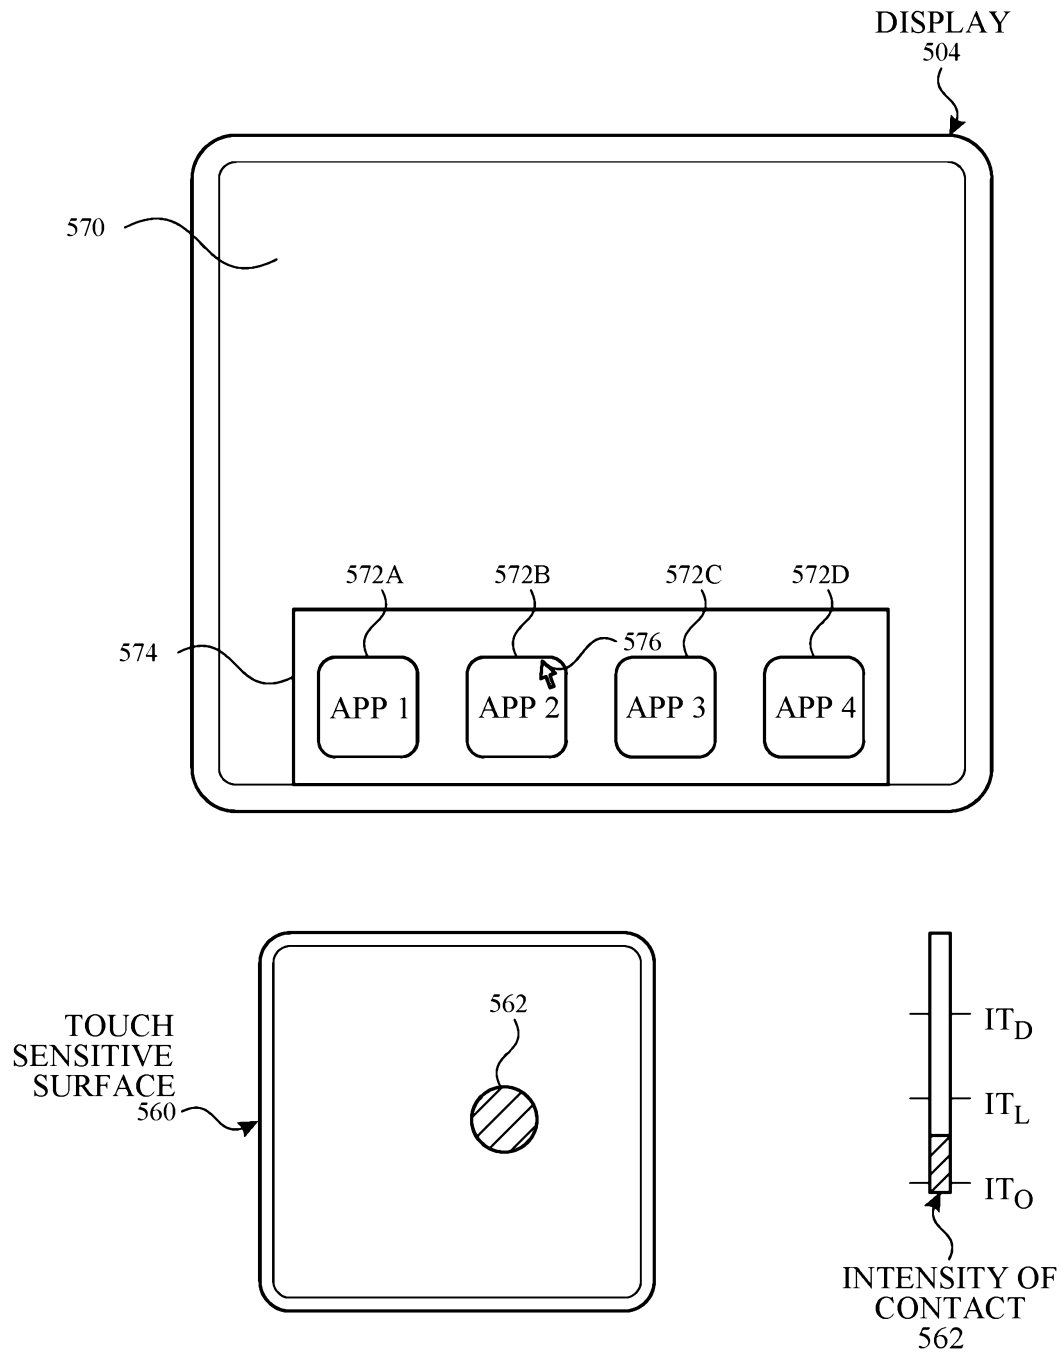


FIG. 5D

**FIG. 5E**

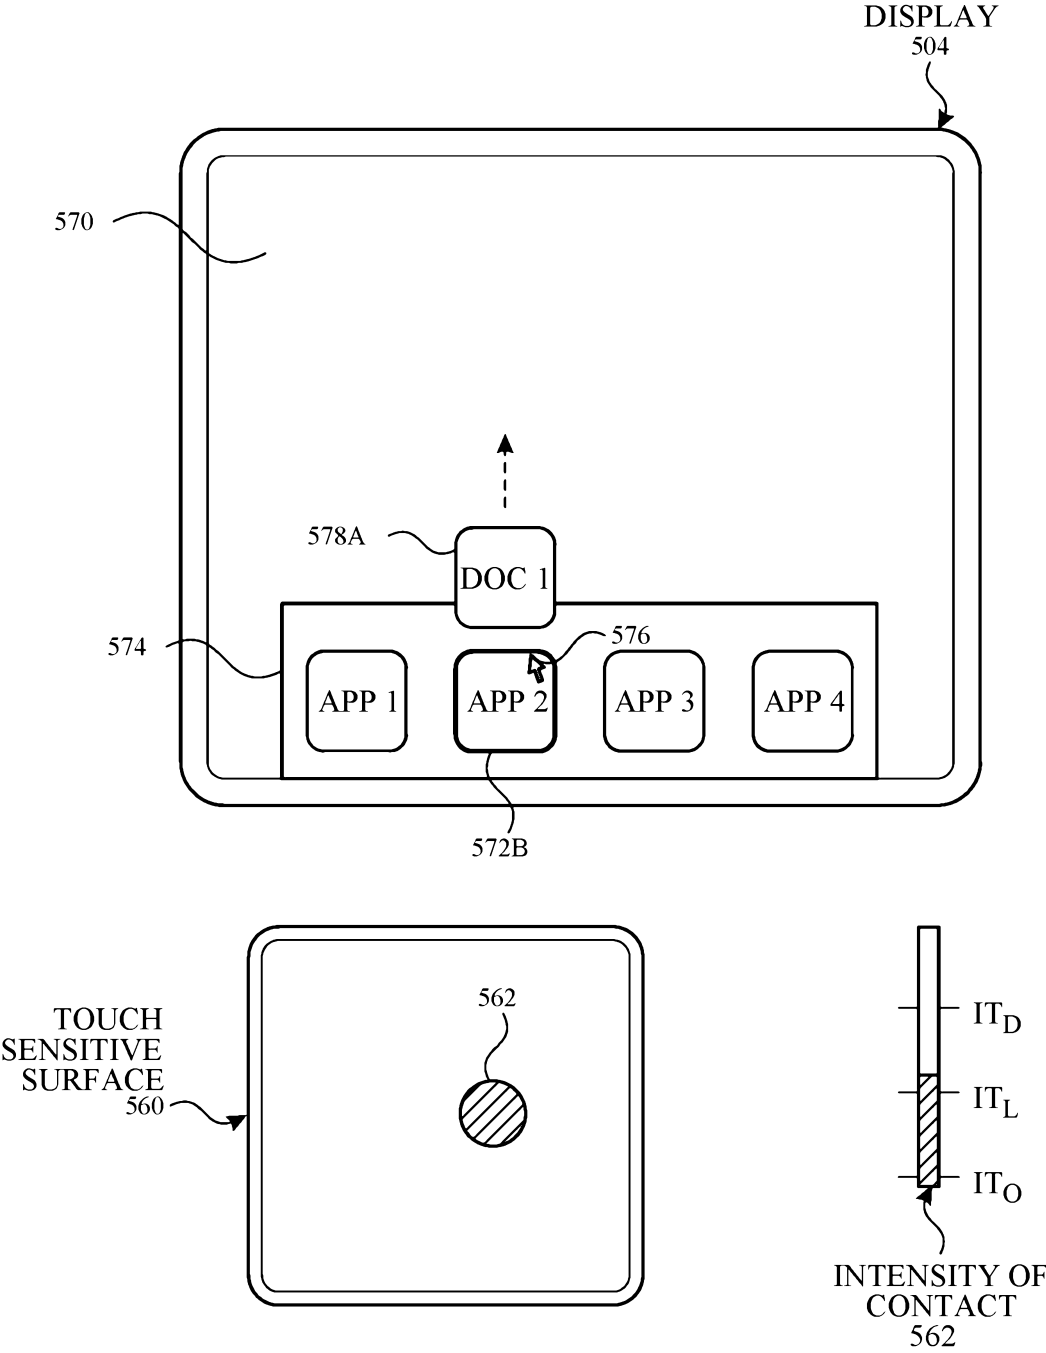
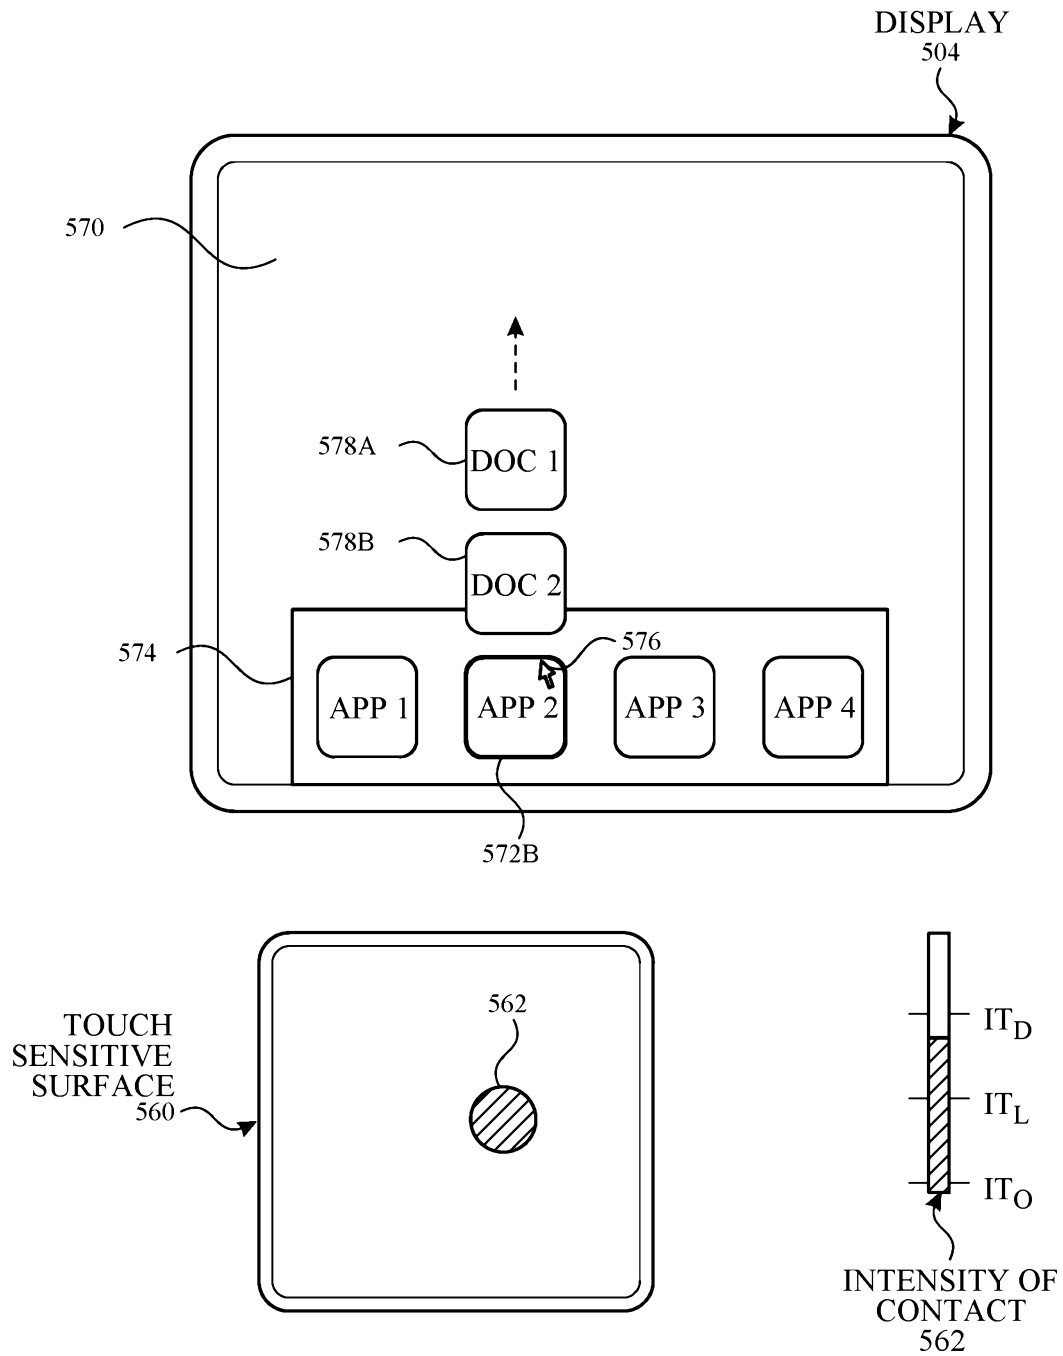
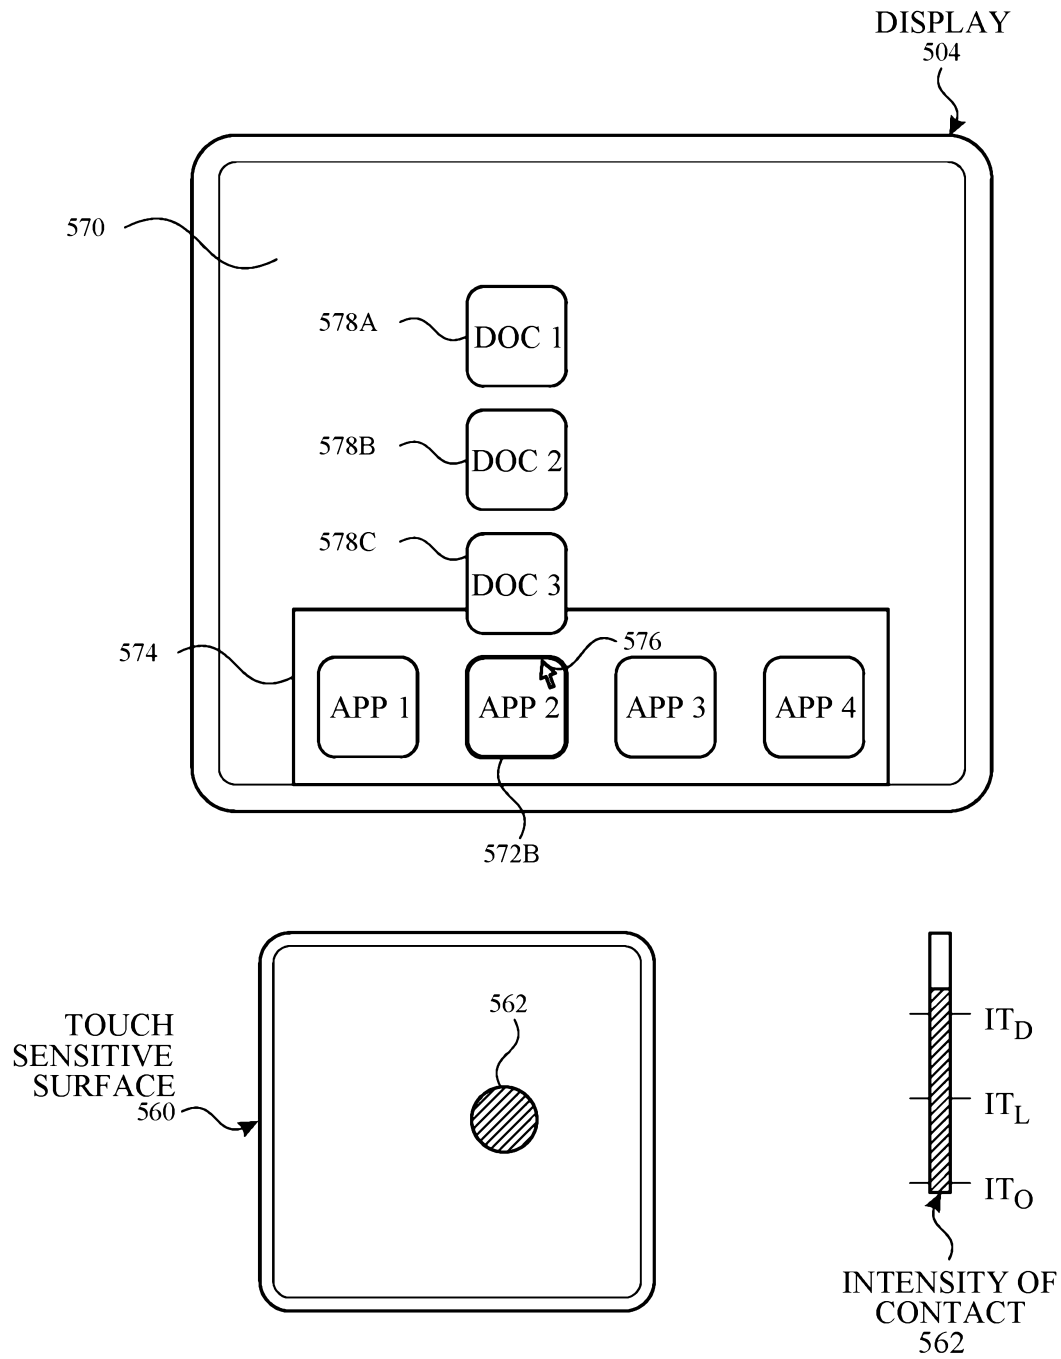
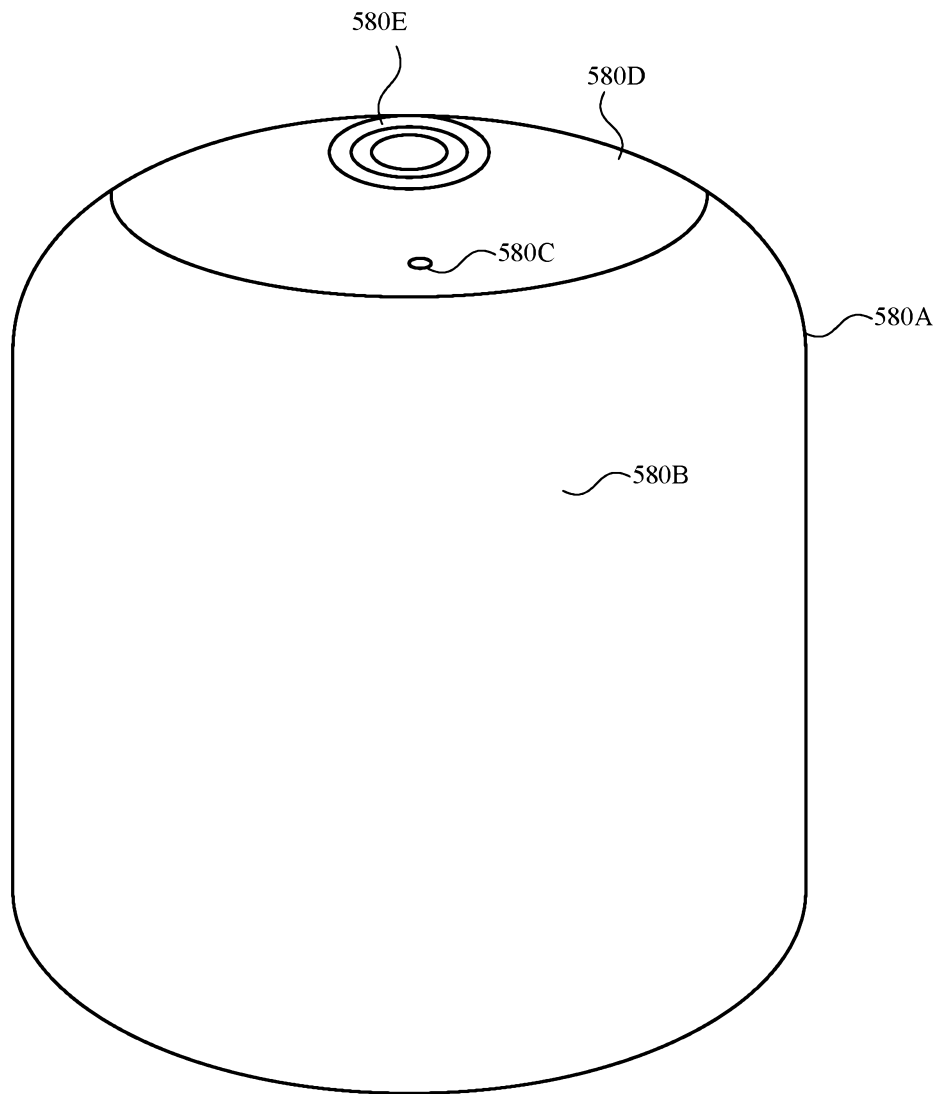


FIG. 5F

**FIG. 5G**

**FIG. 5H**

**FIG. 5I**

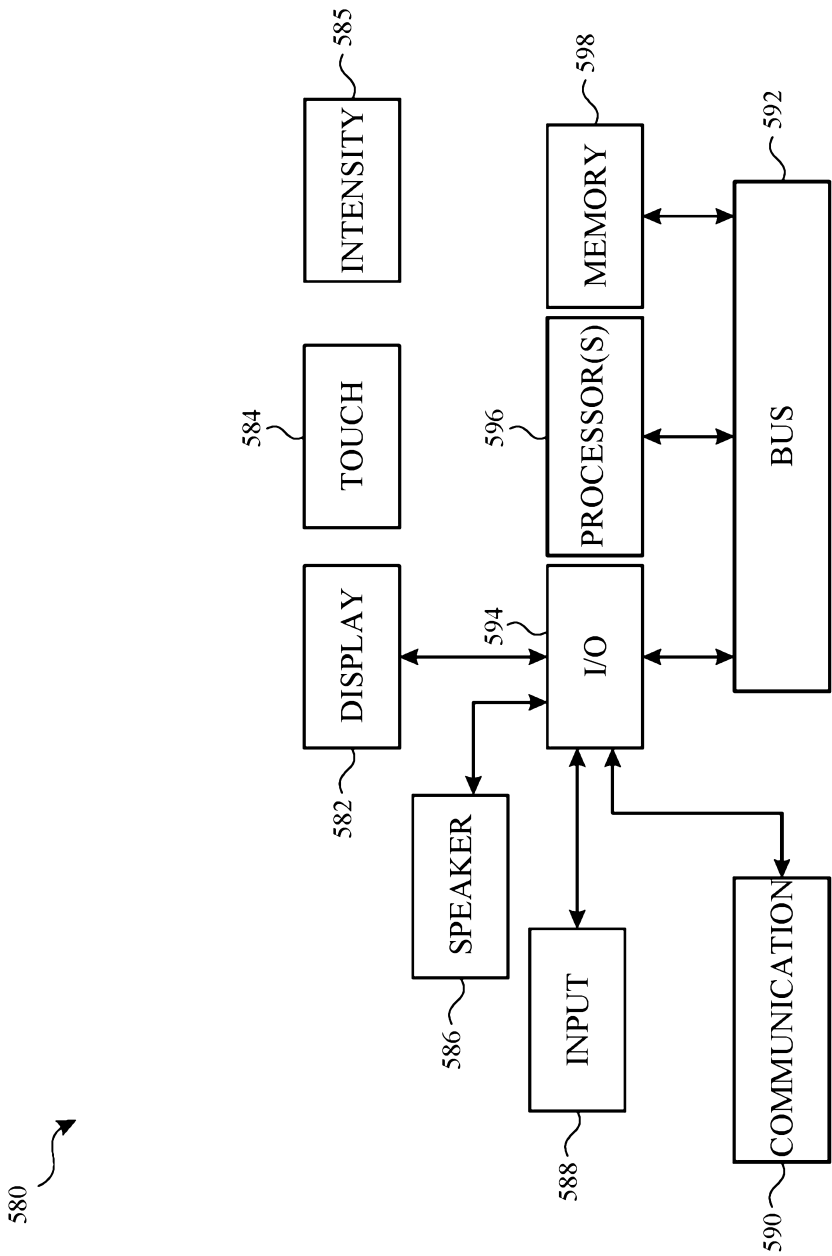


FIG. 5J

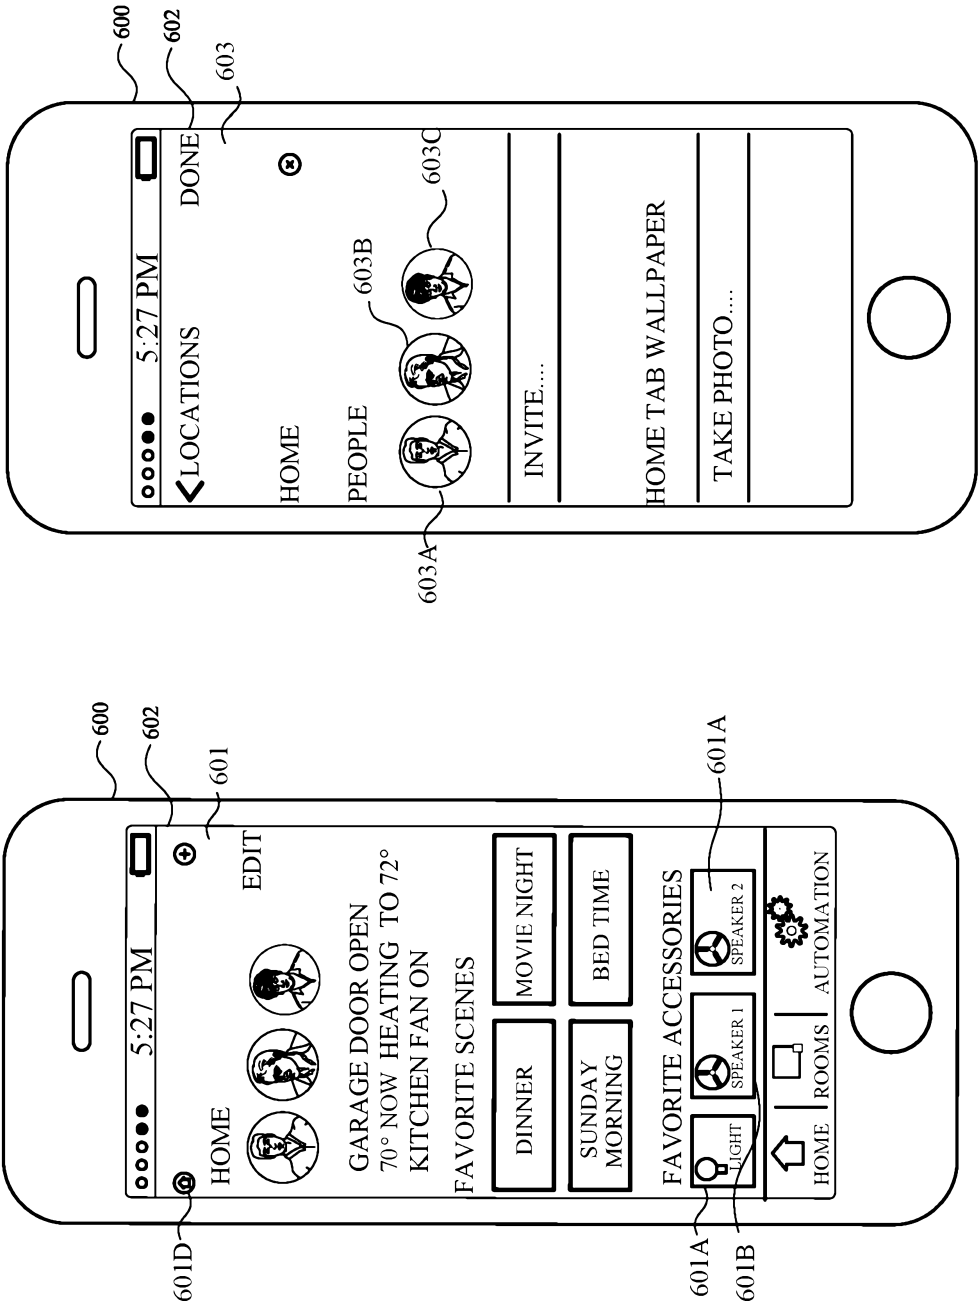


FIG. 6A



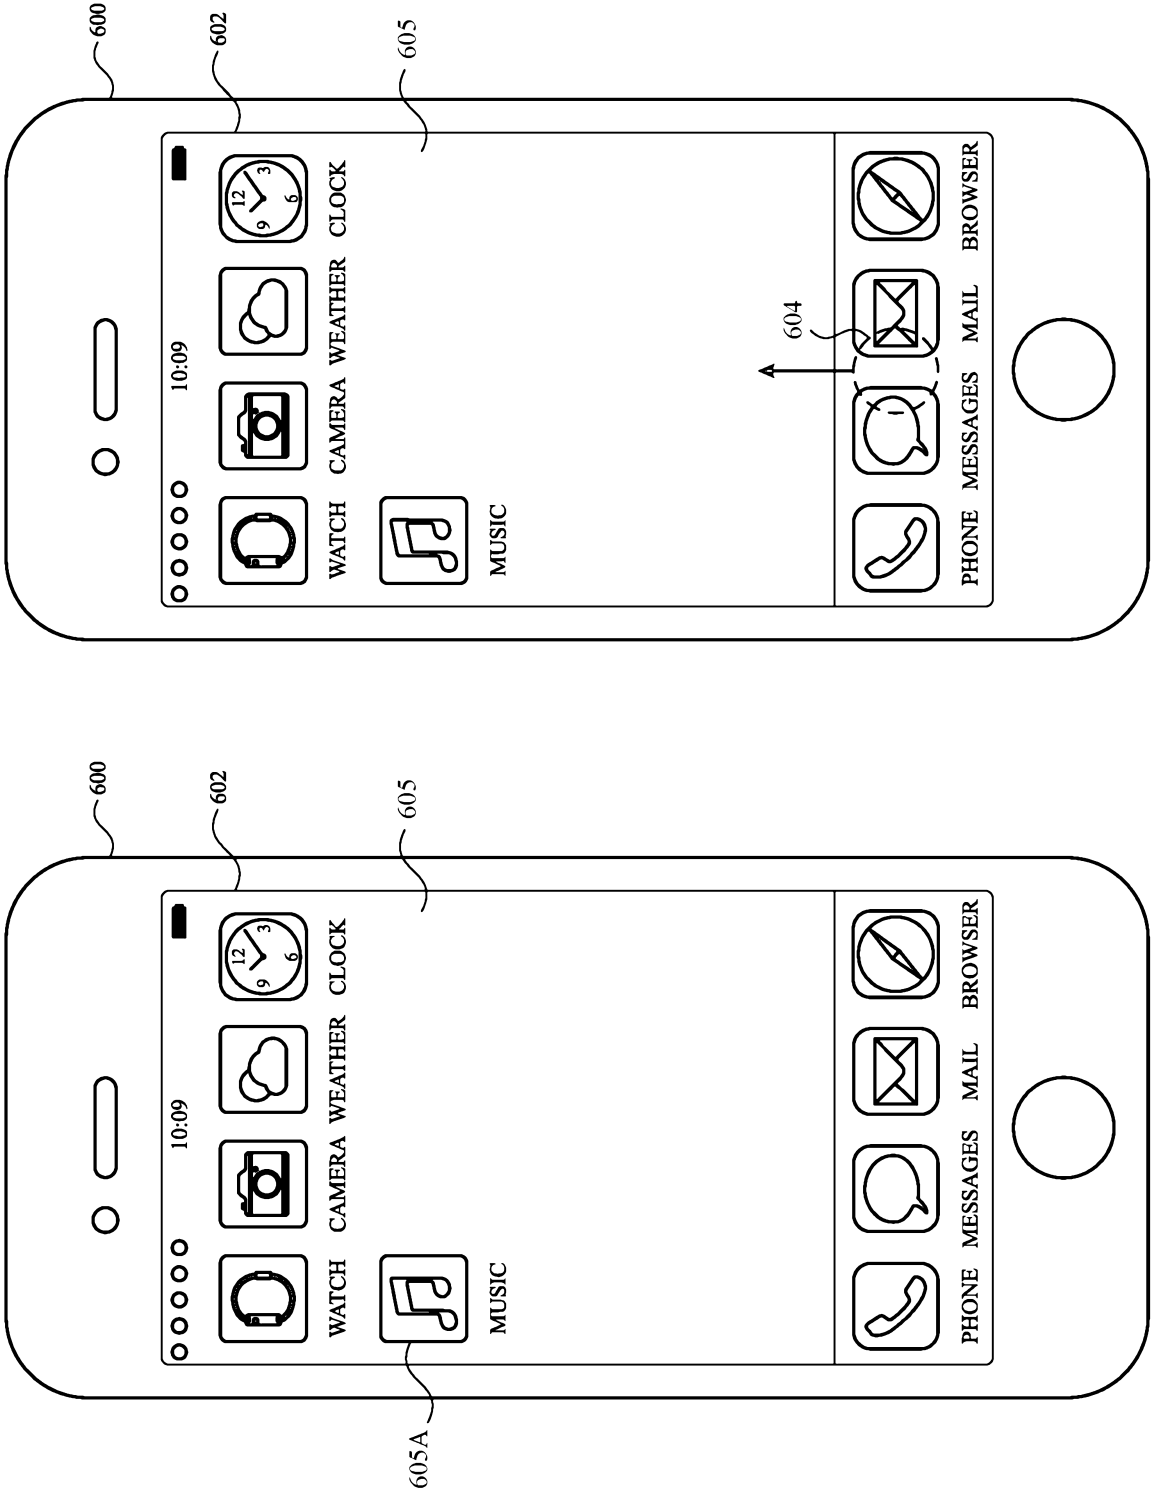


FIG. 6B

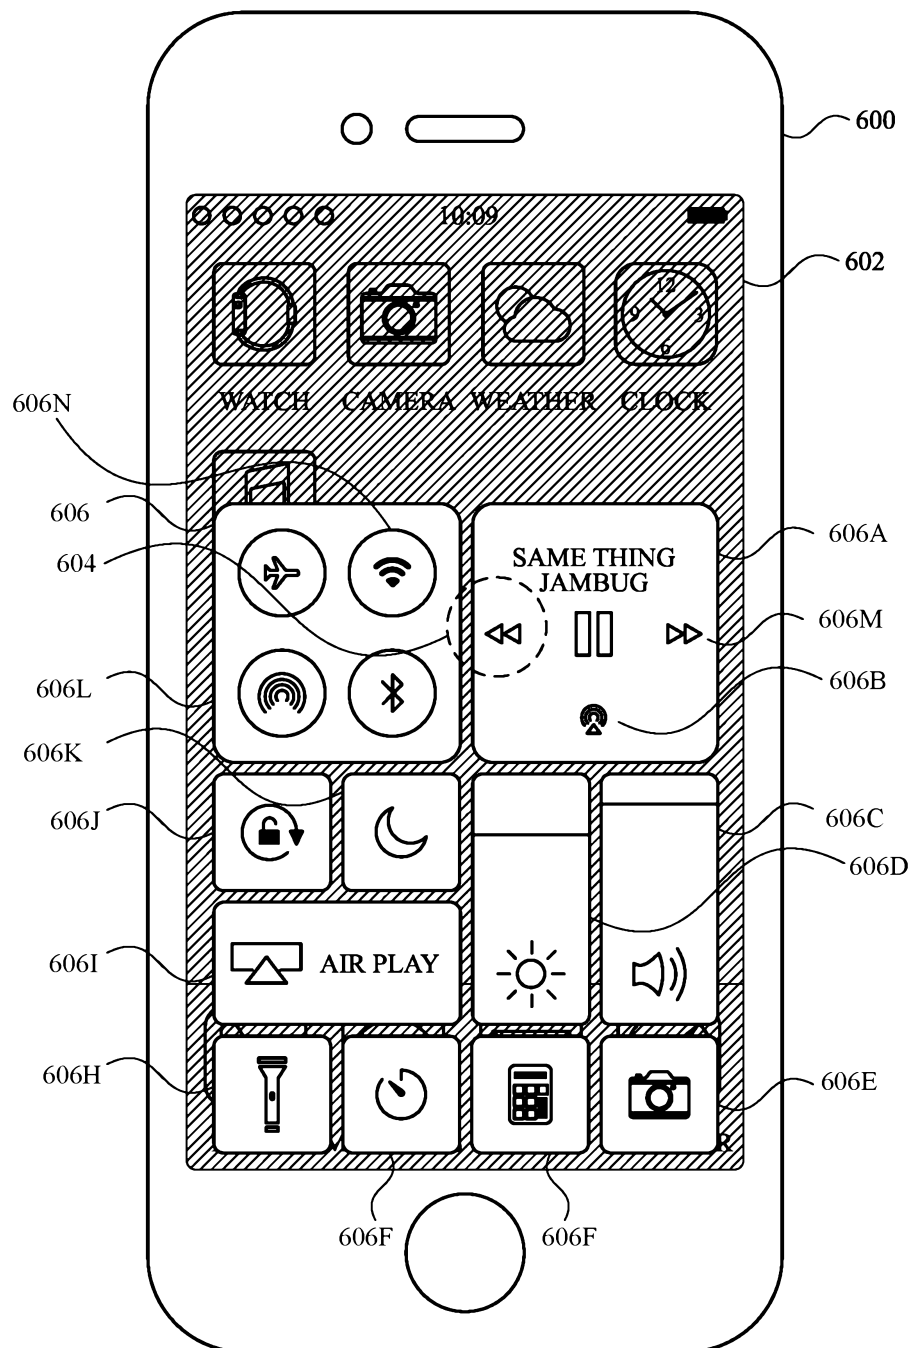
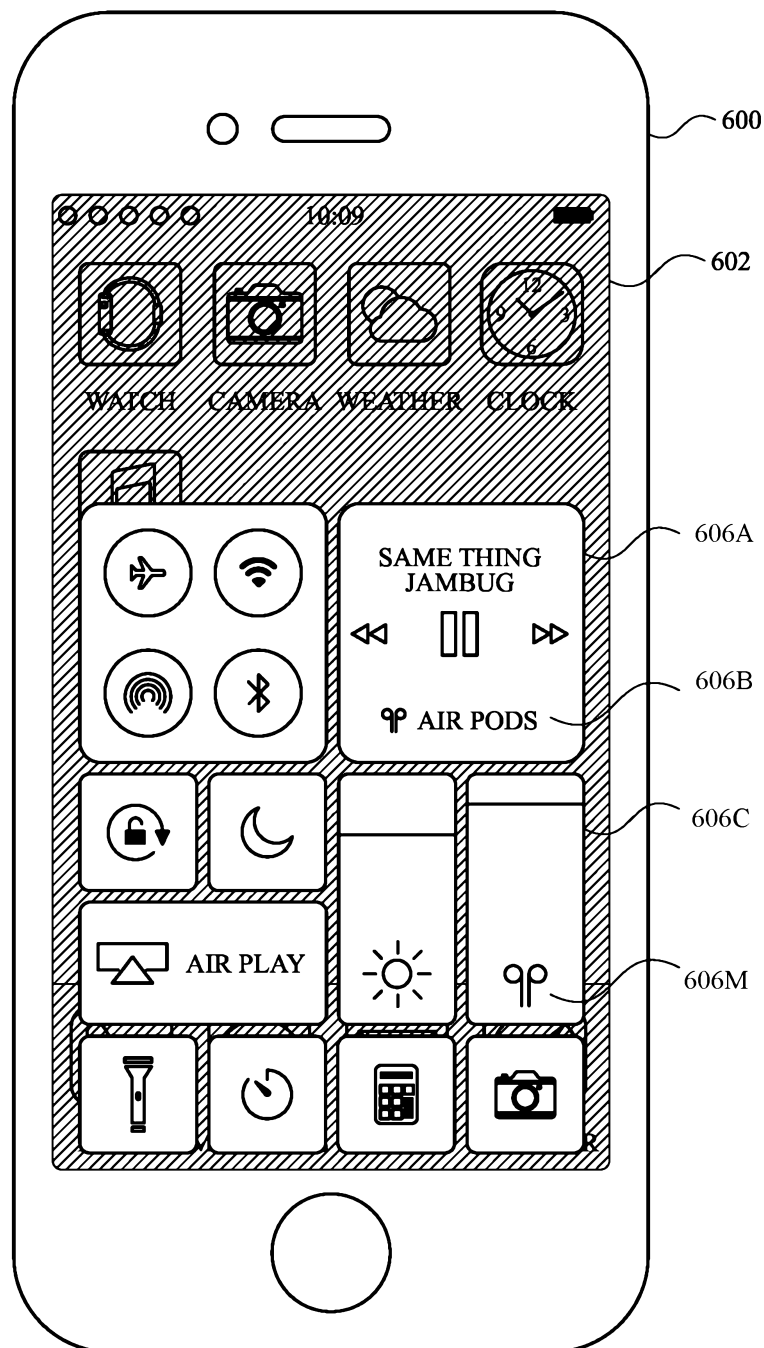
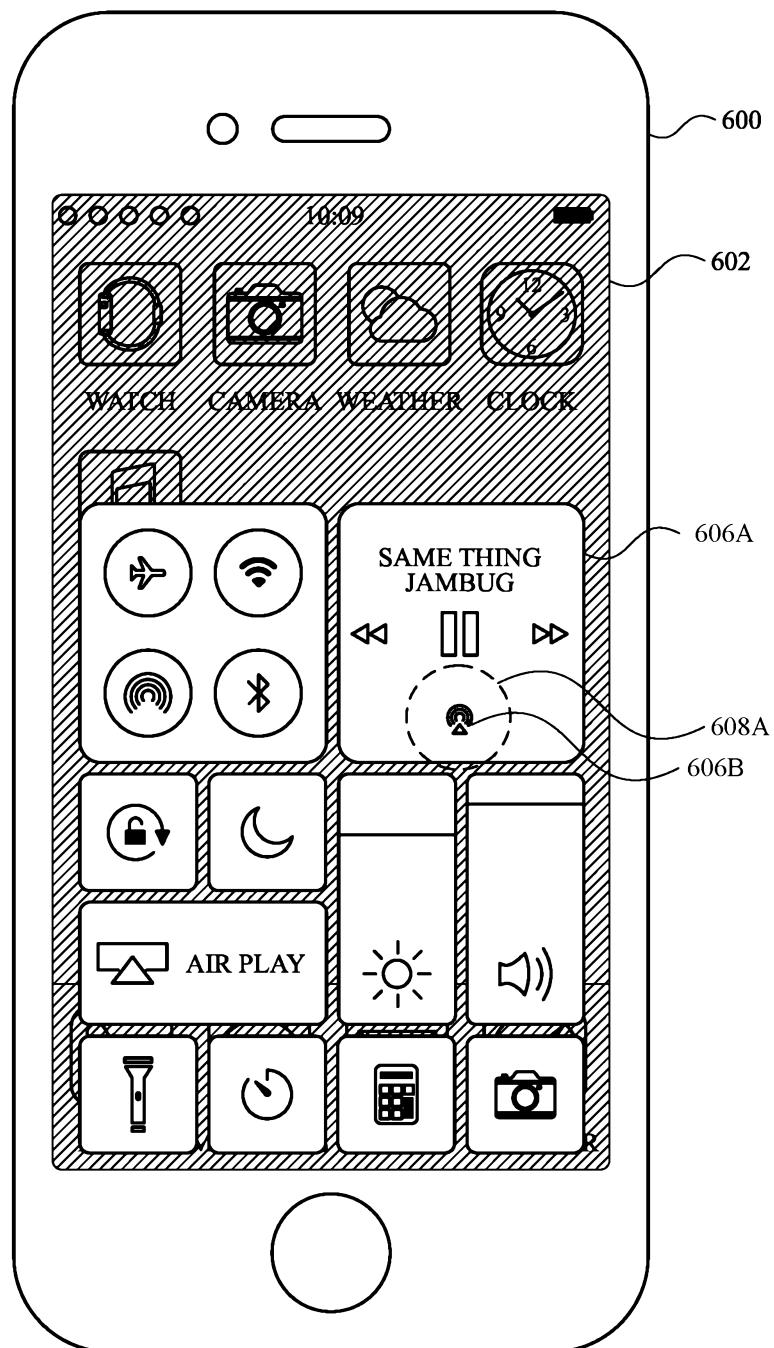
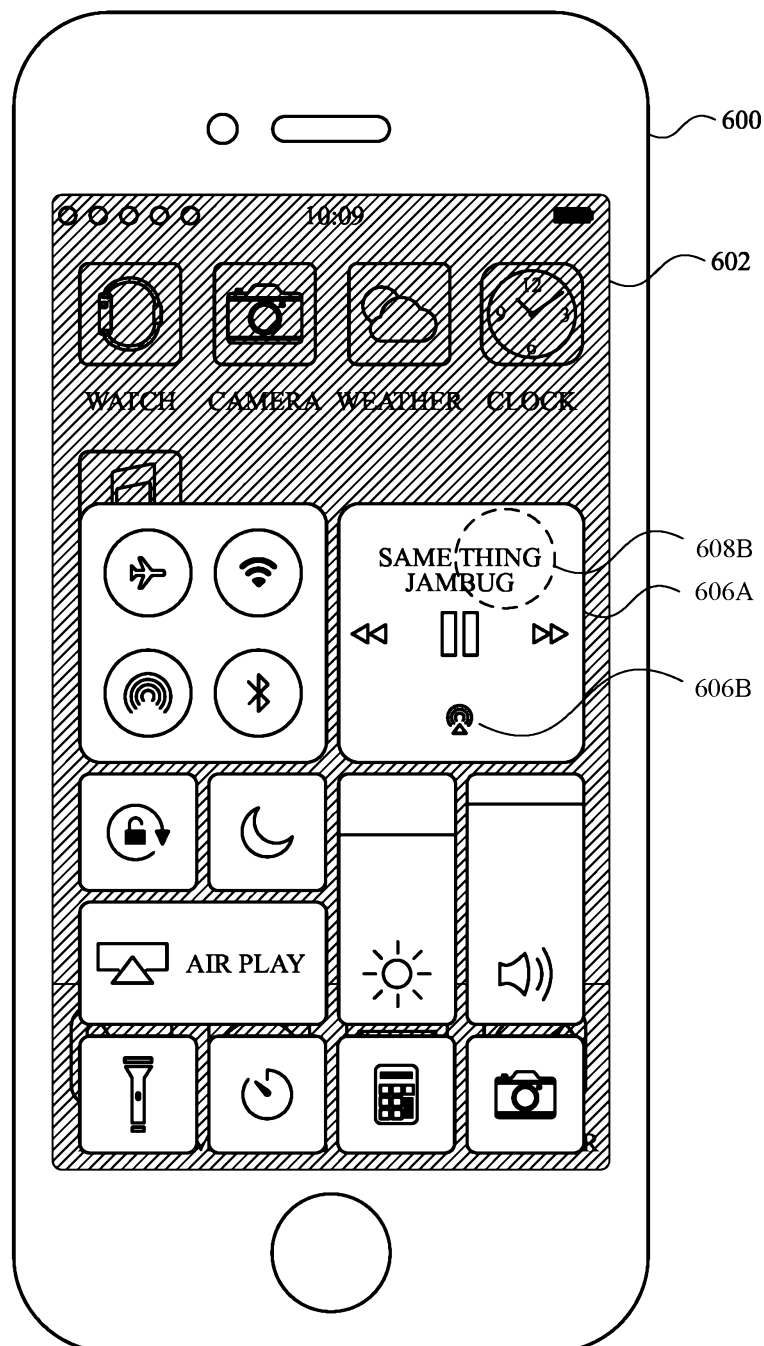
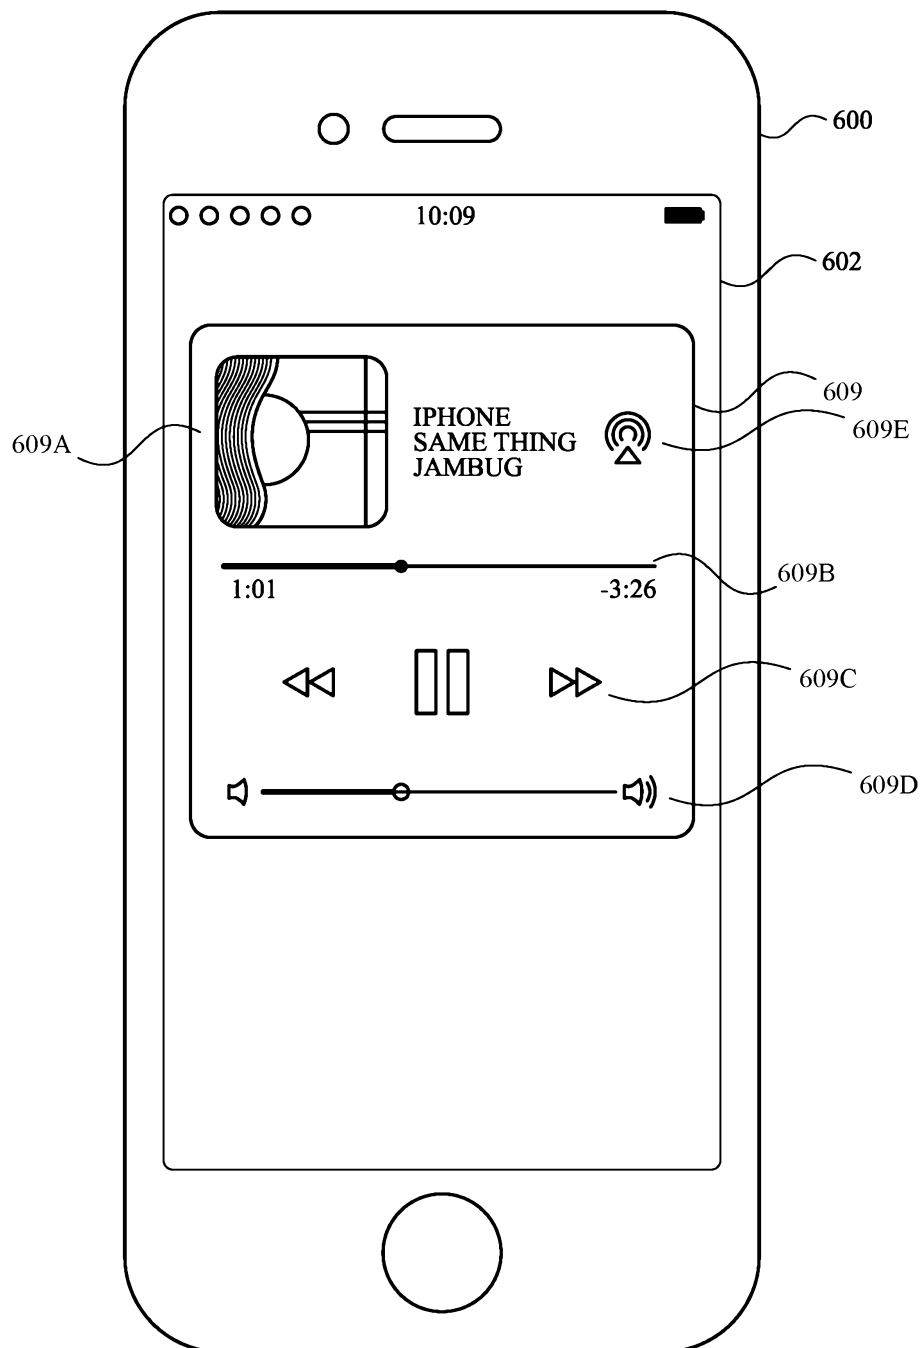


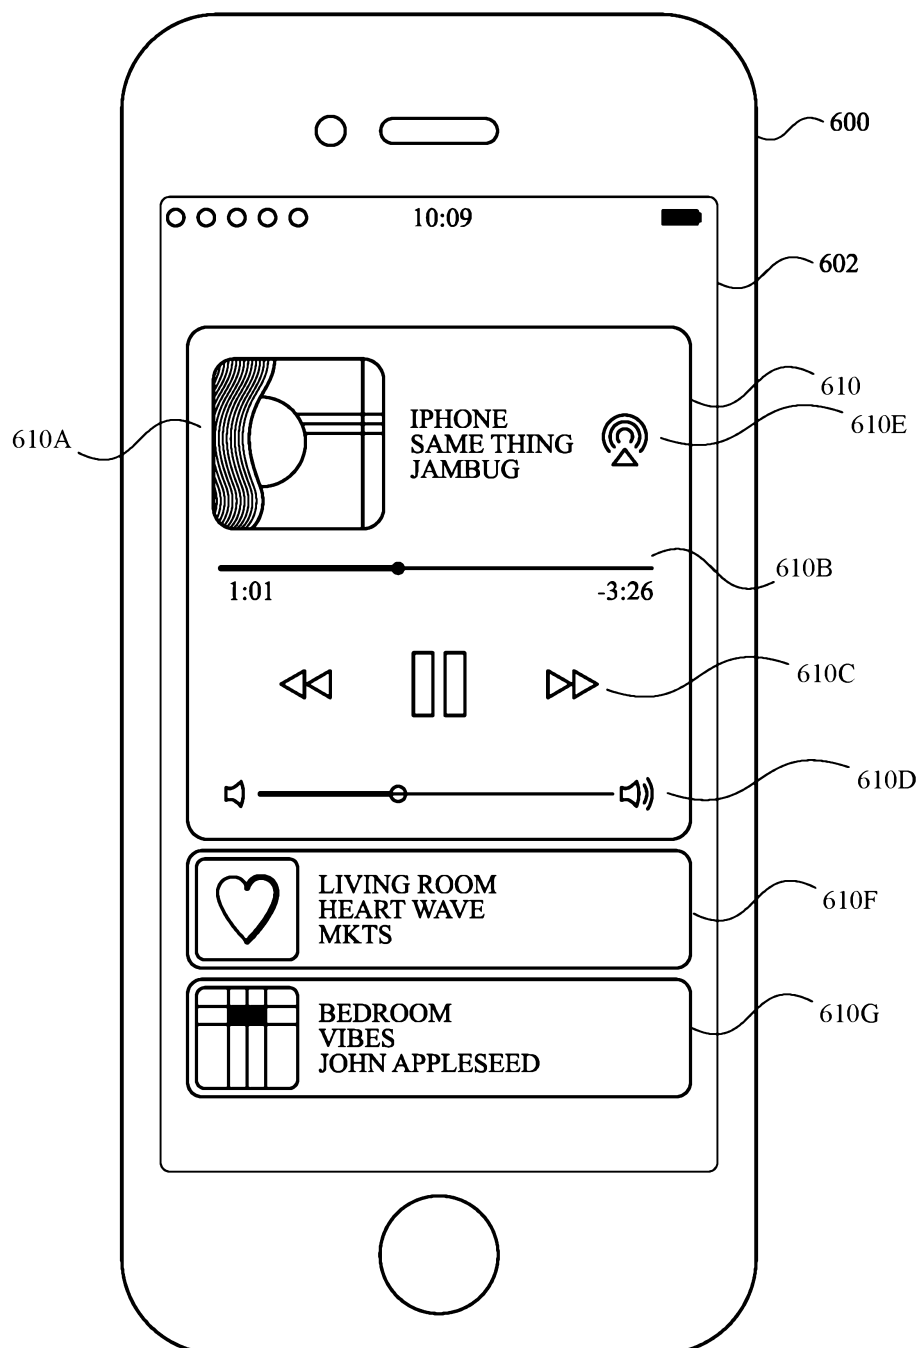
FIG. 6C

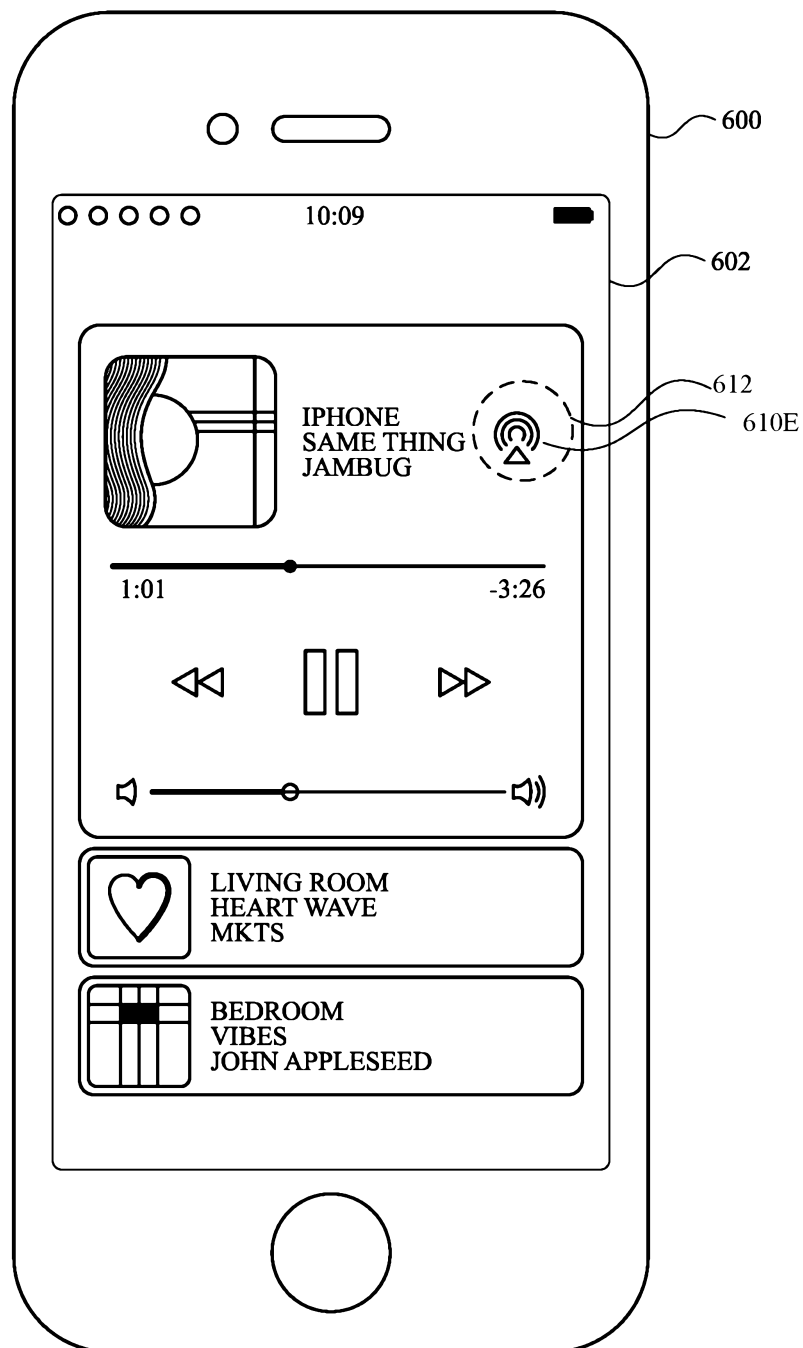
**FIG. 6D**

**FIG. 6E**

**FIG. 6F**

**FIG. 6G**

**FIG. 6H**

**FIG. 6I**



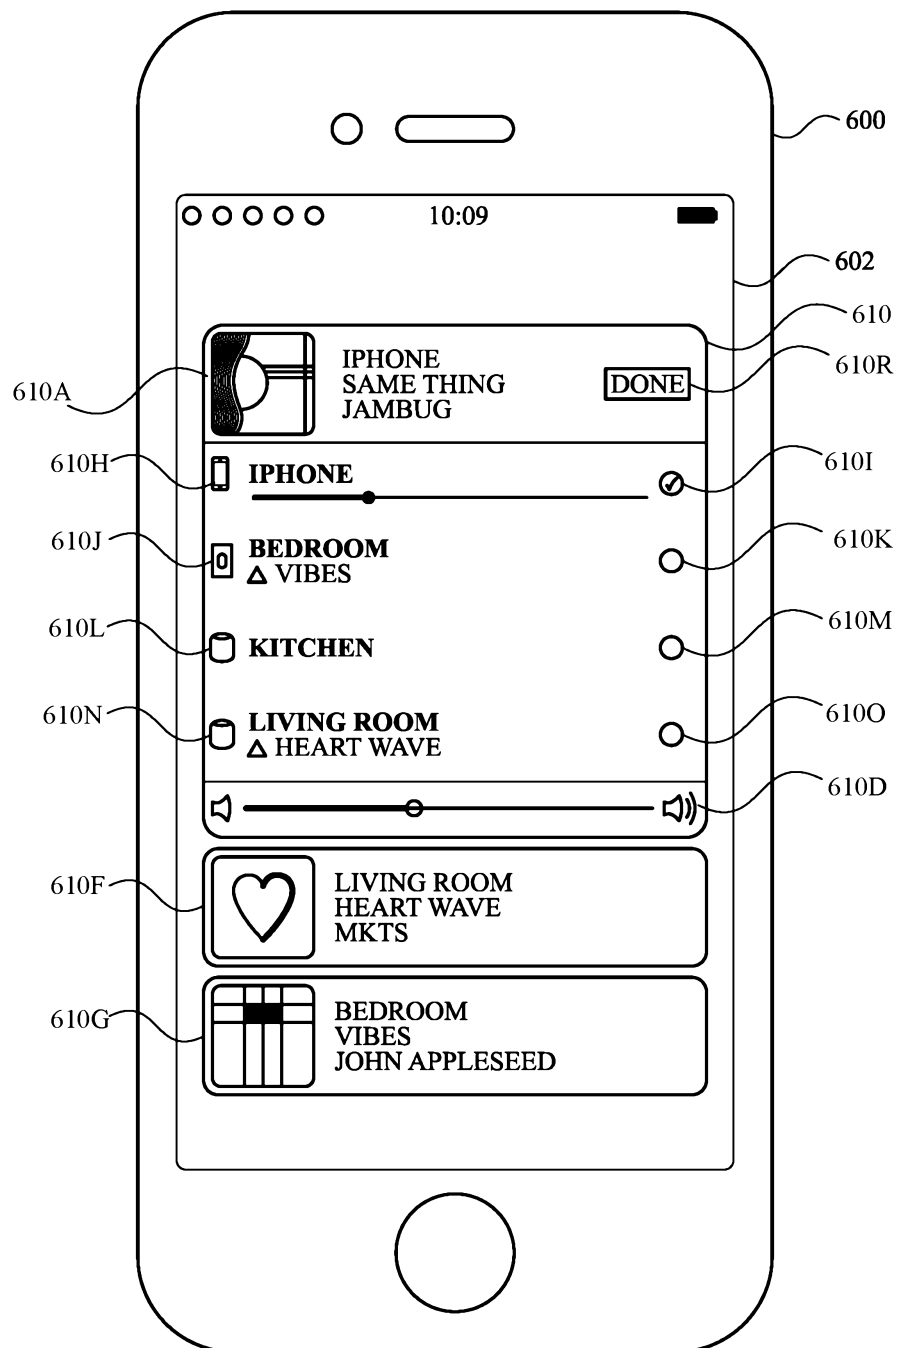


FIG. 6J

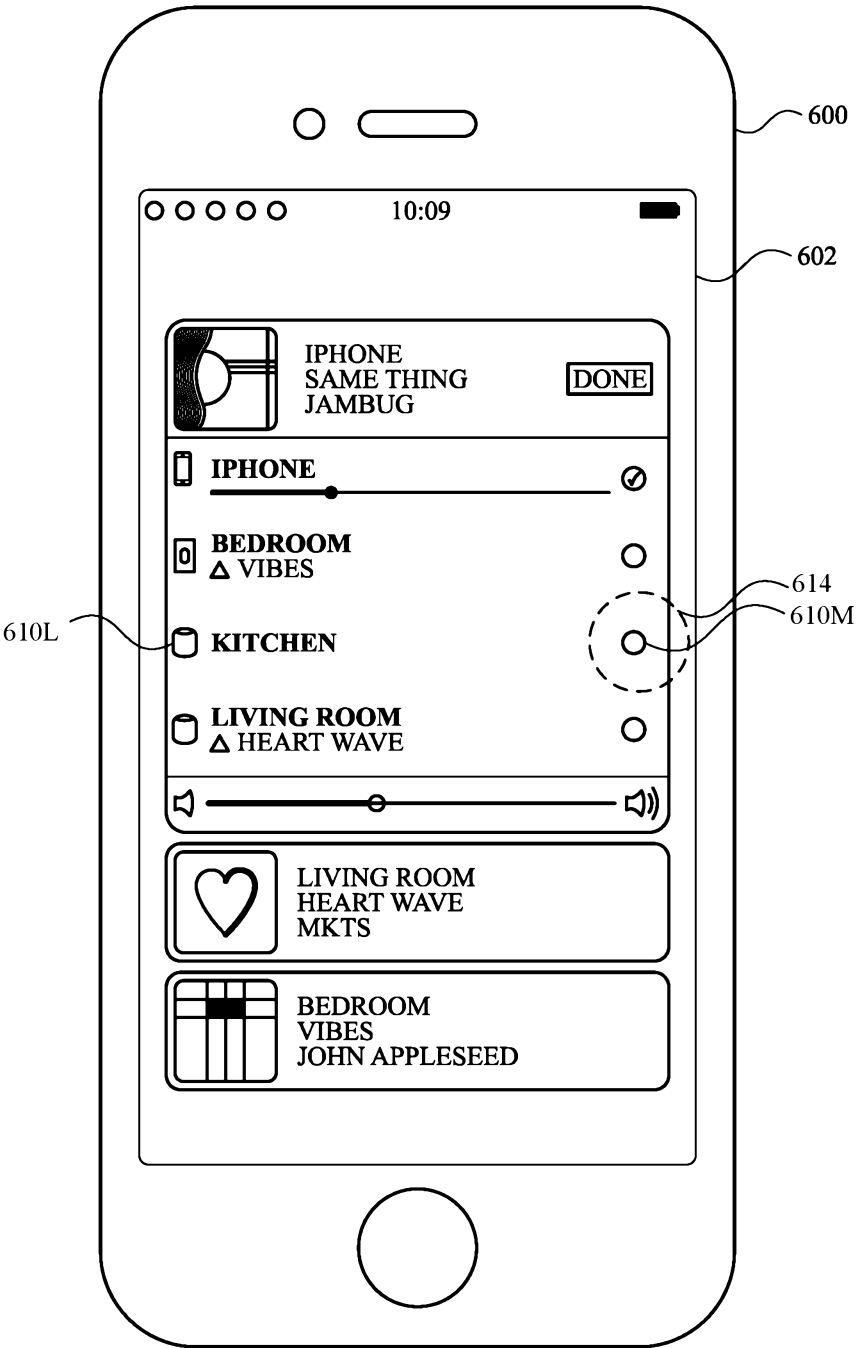
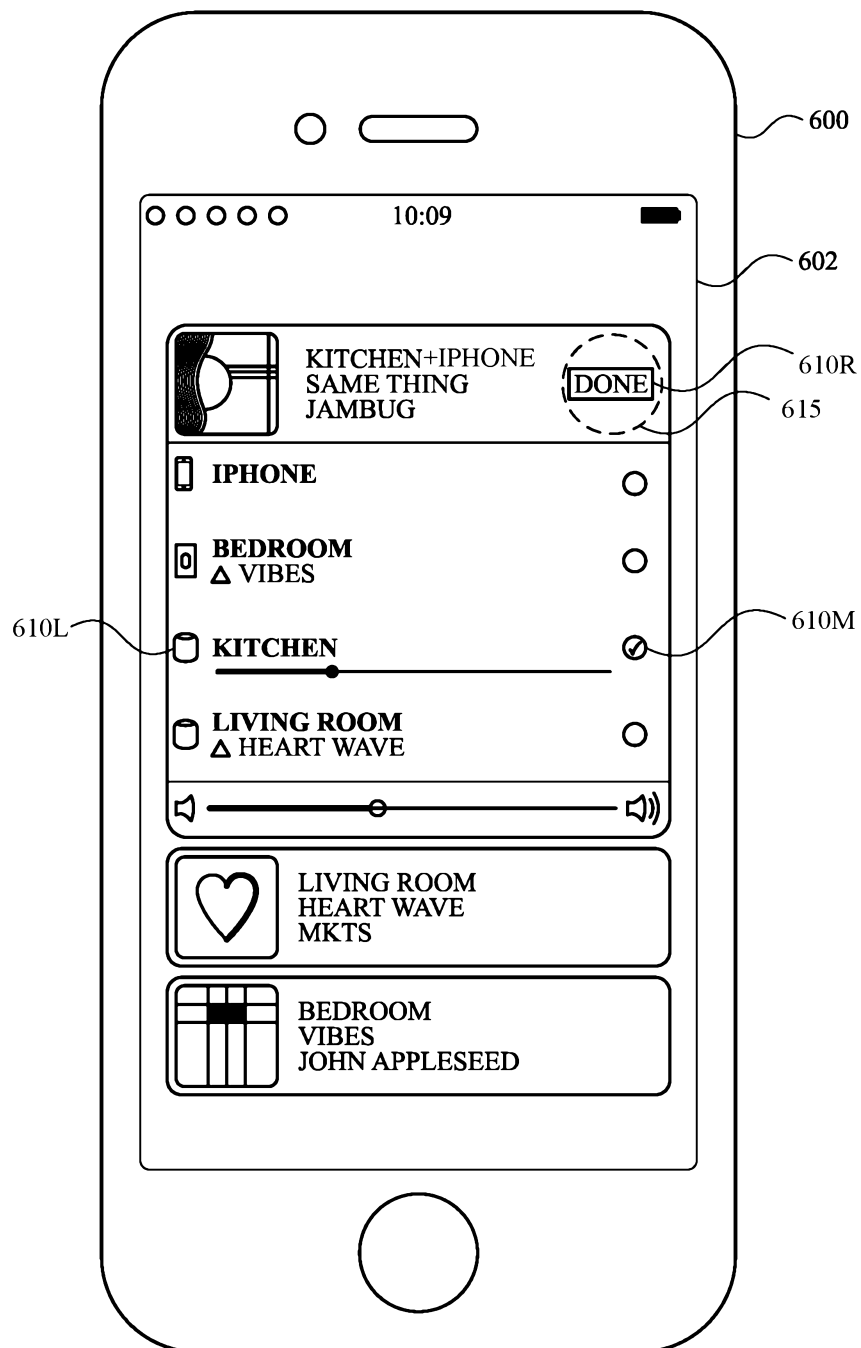
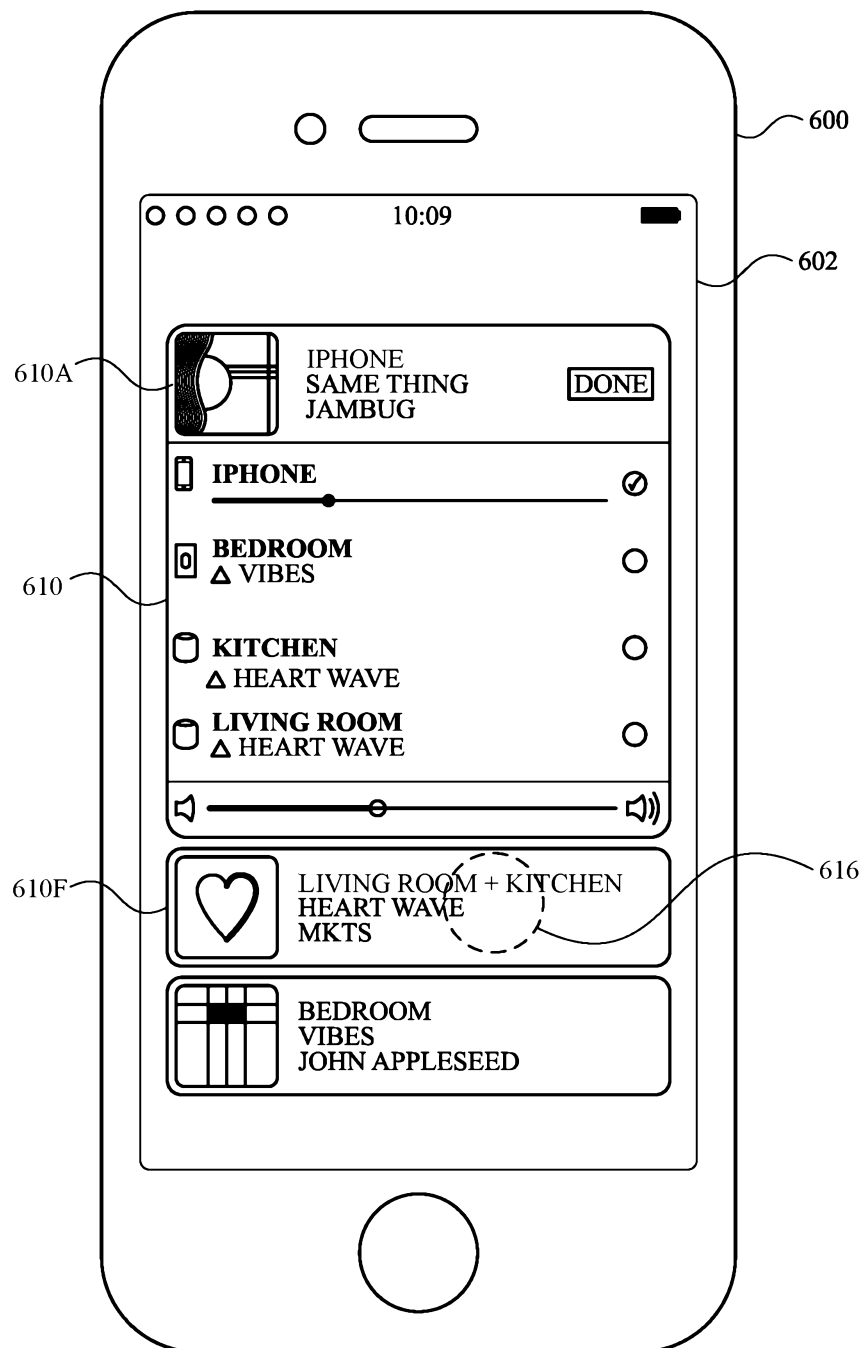


FIG. 6K

**FIG. 6L**

**FIG. 6M**

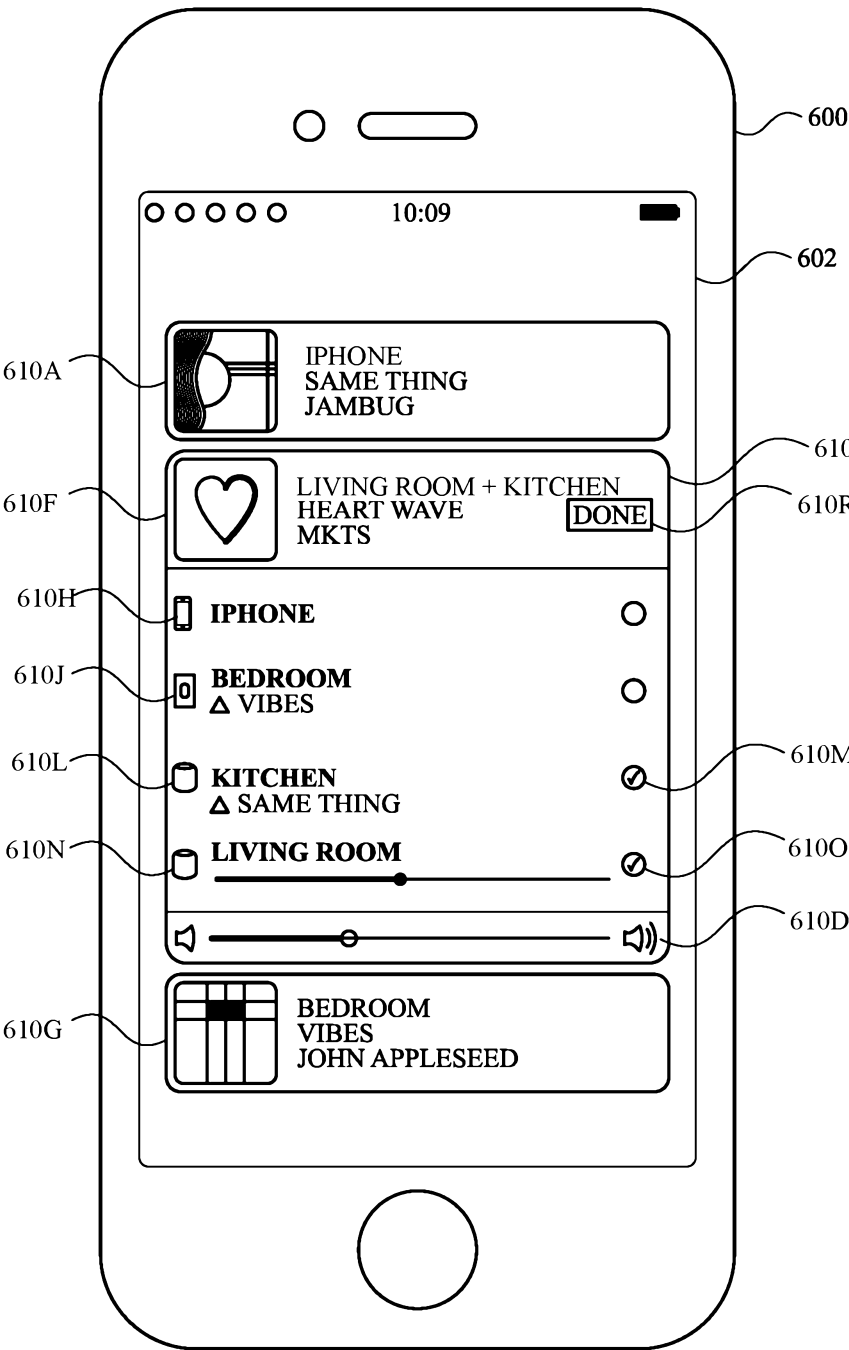
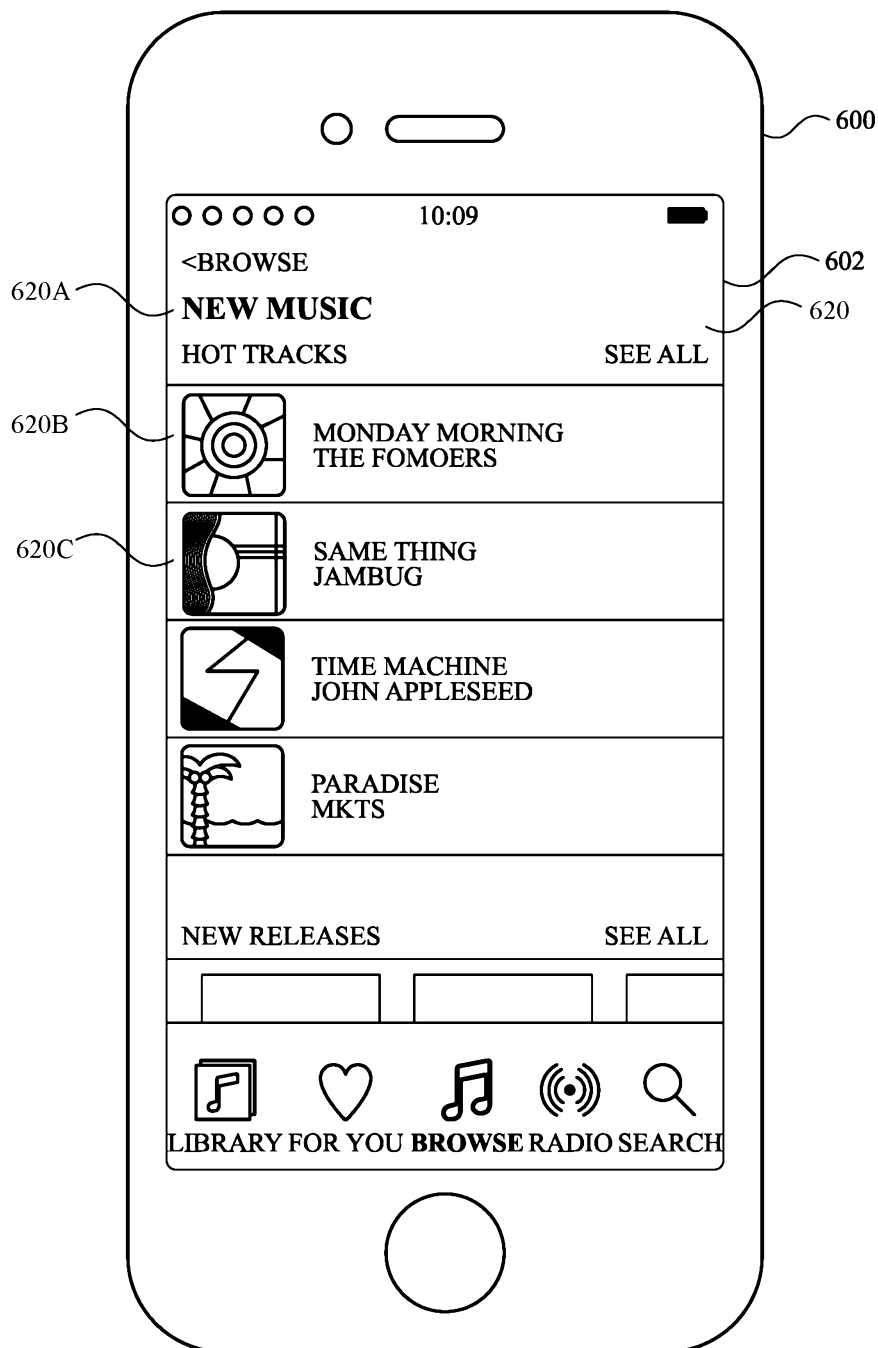
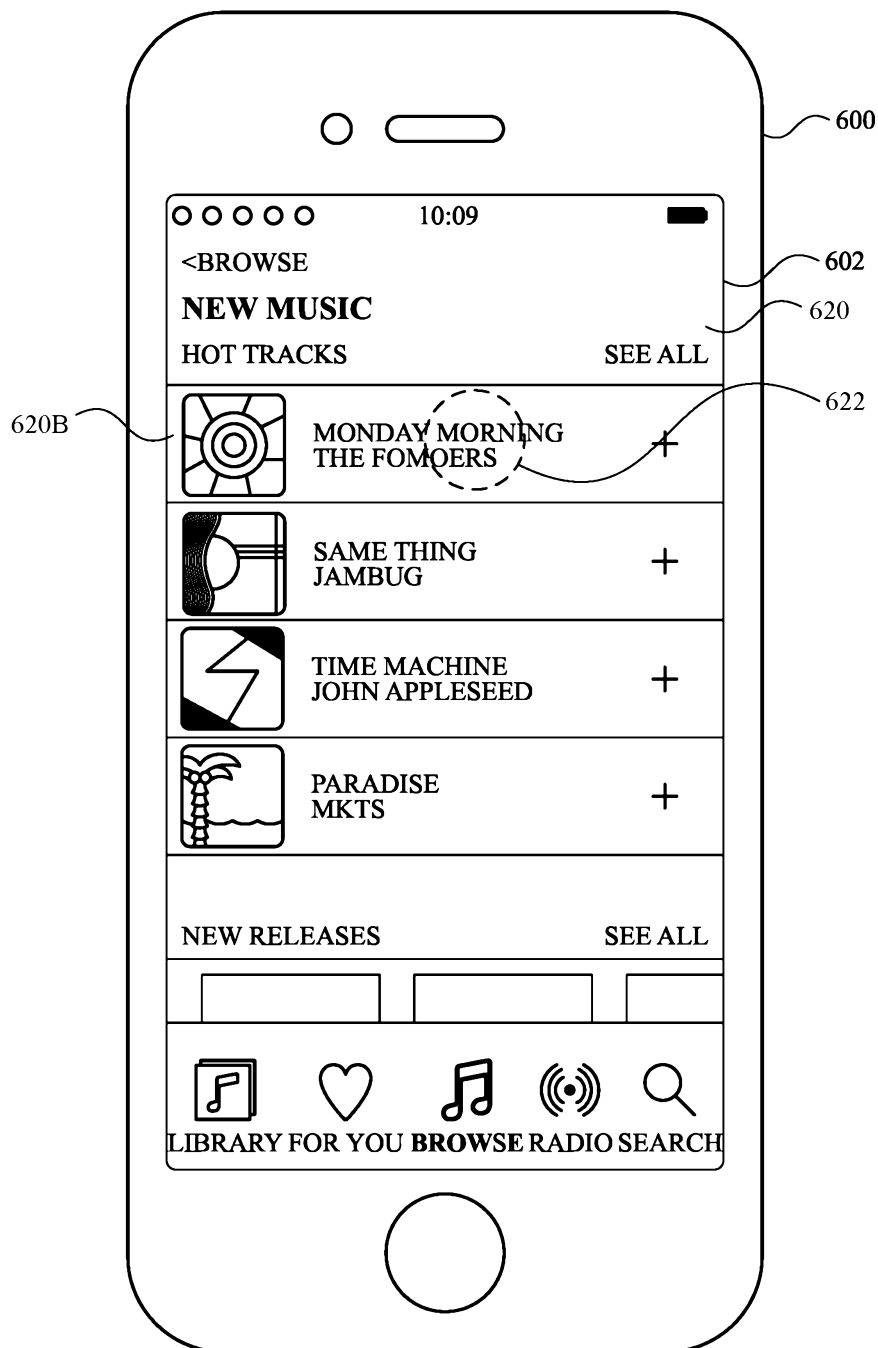
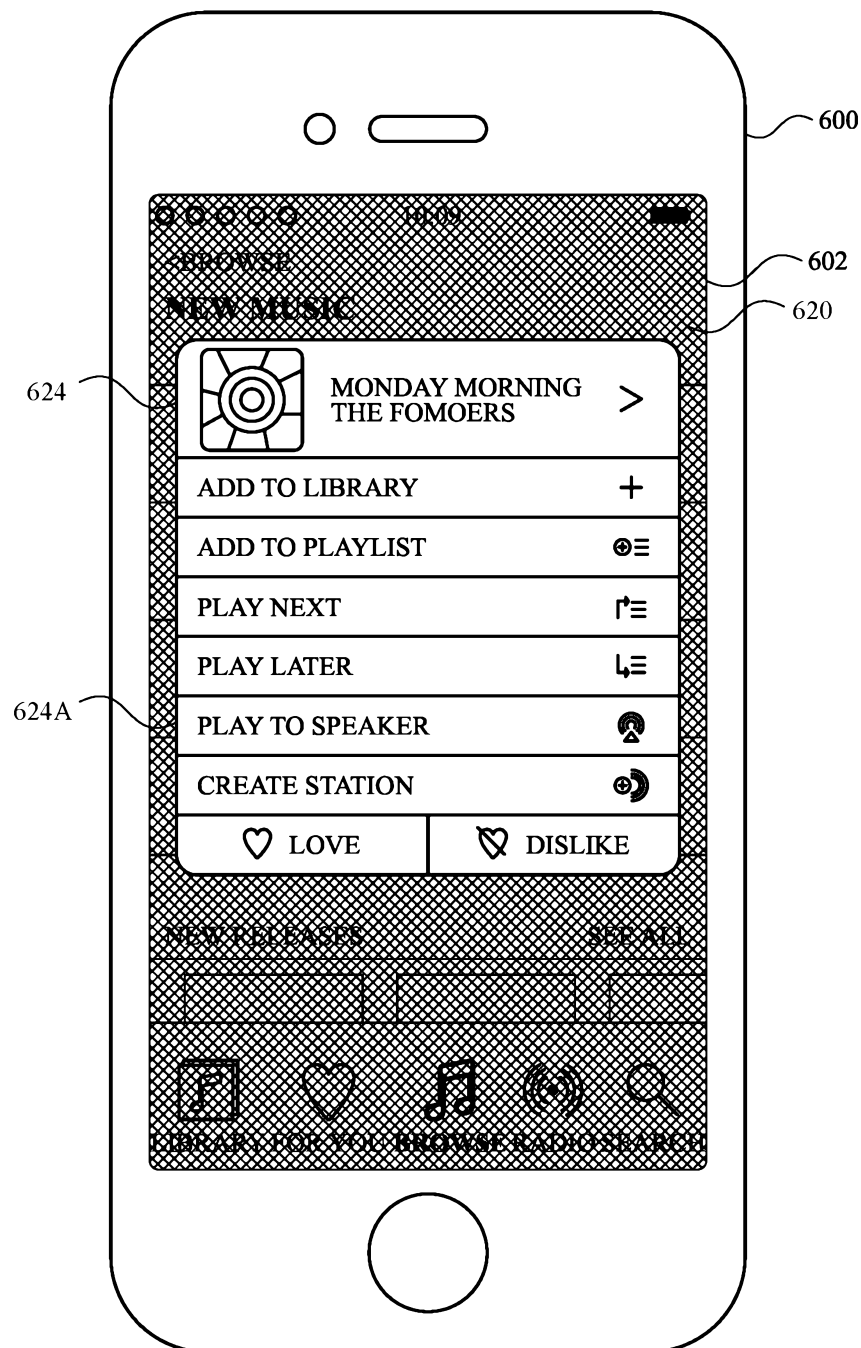


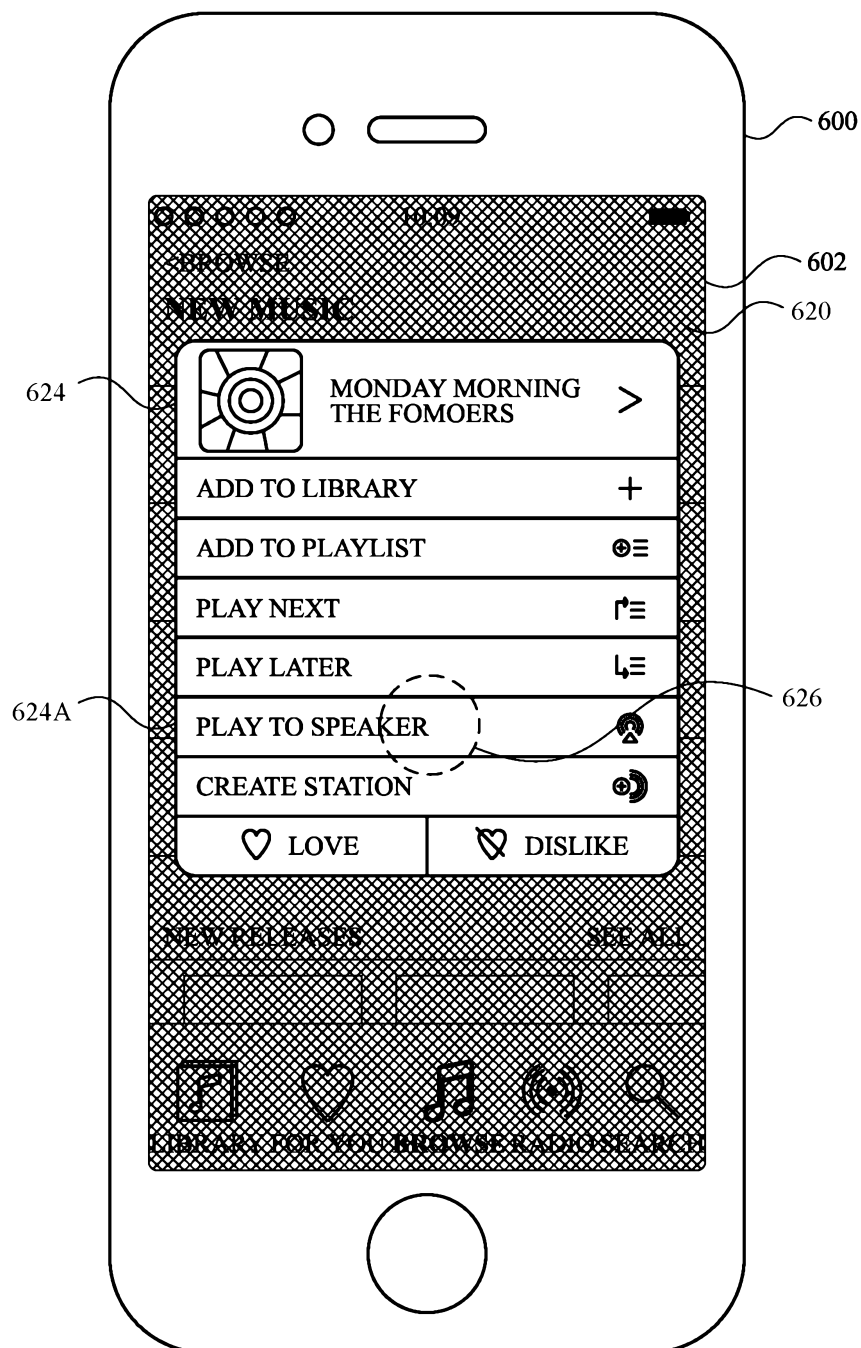
FIG. 6N

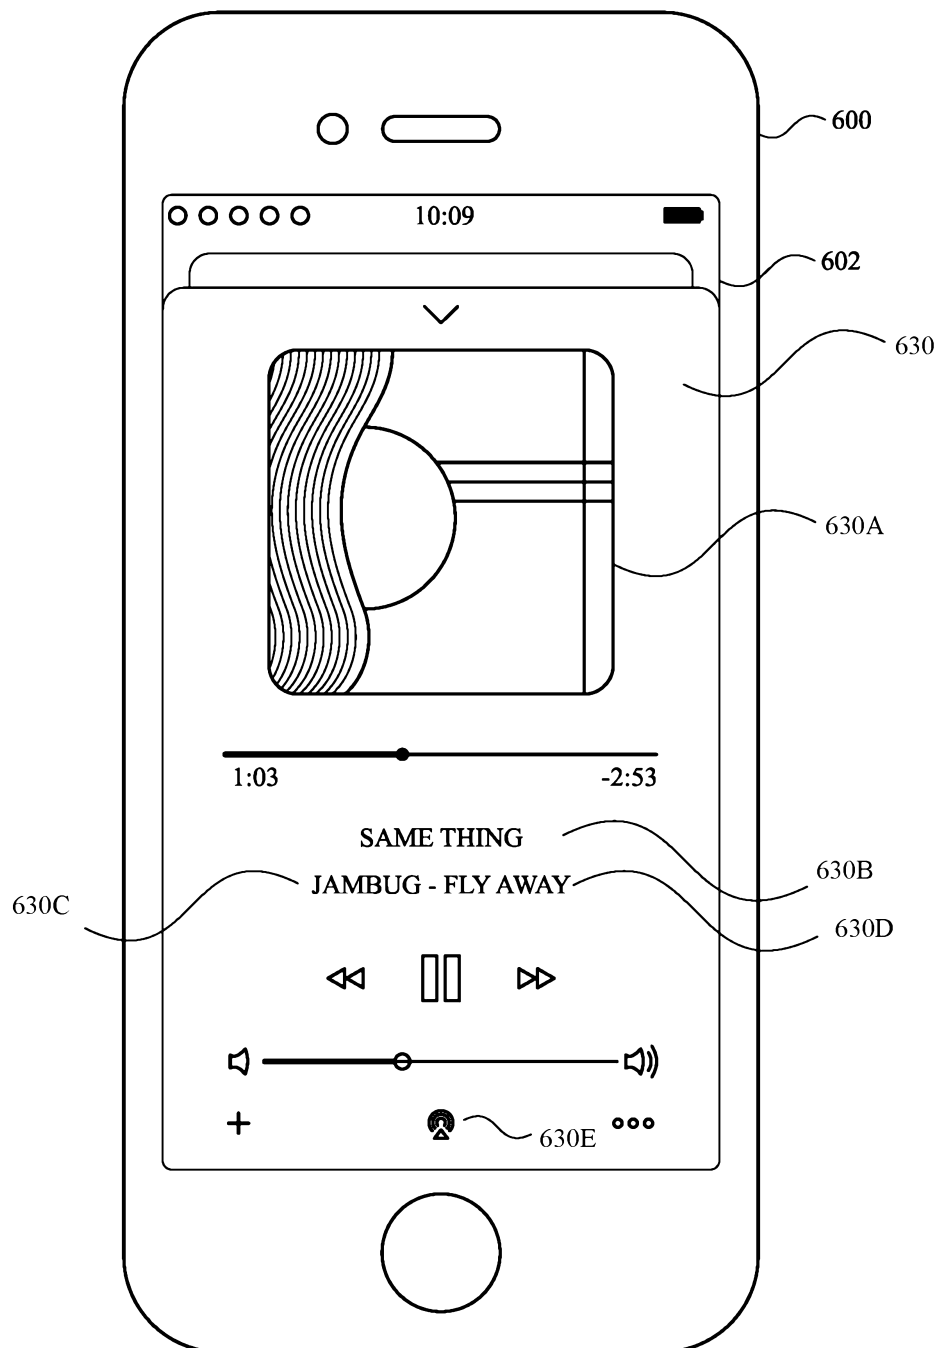
**FIG. 60**

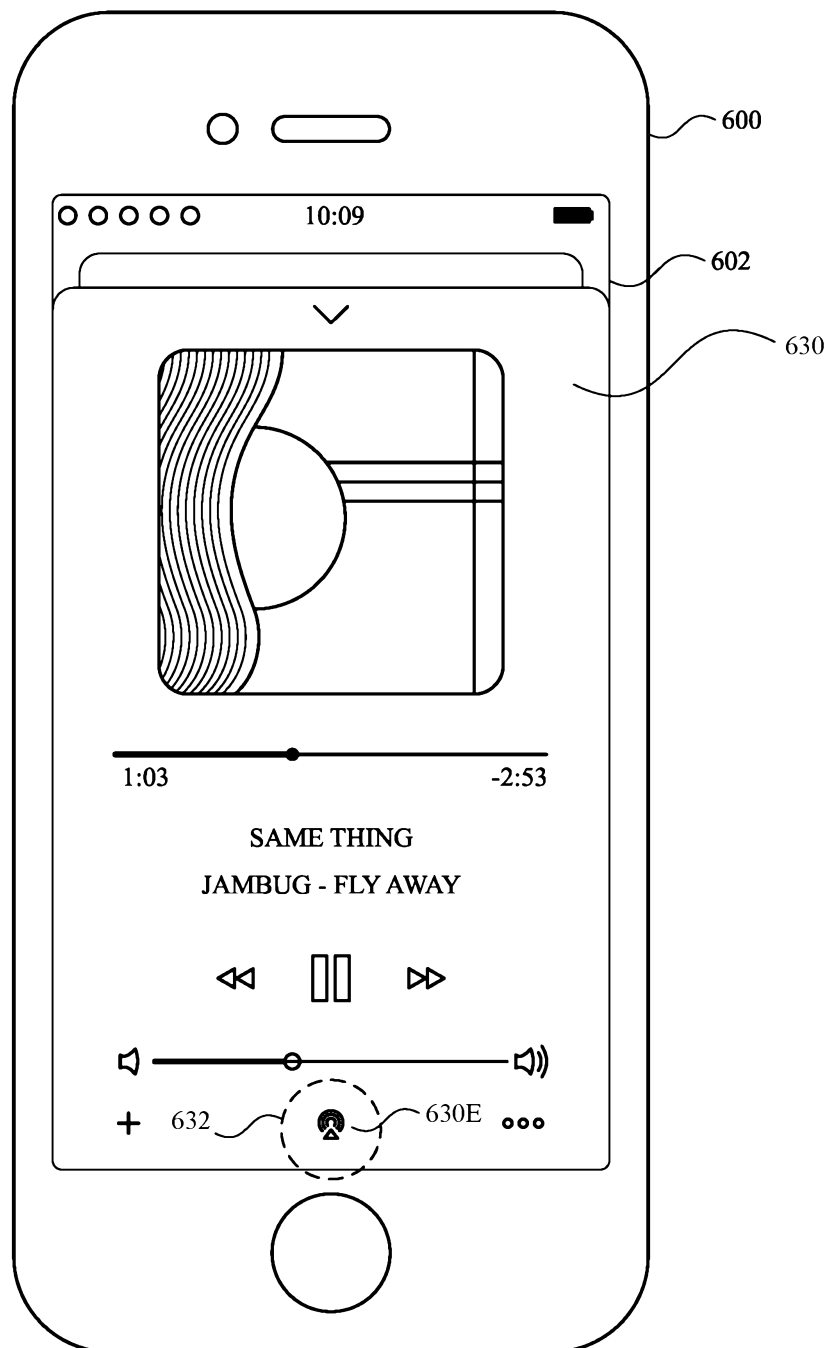
**FIG. 6P**

**FIG. 6Q**



**FIG. 6R**

**FIG. 6S**

**FIG. 6T**

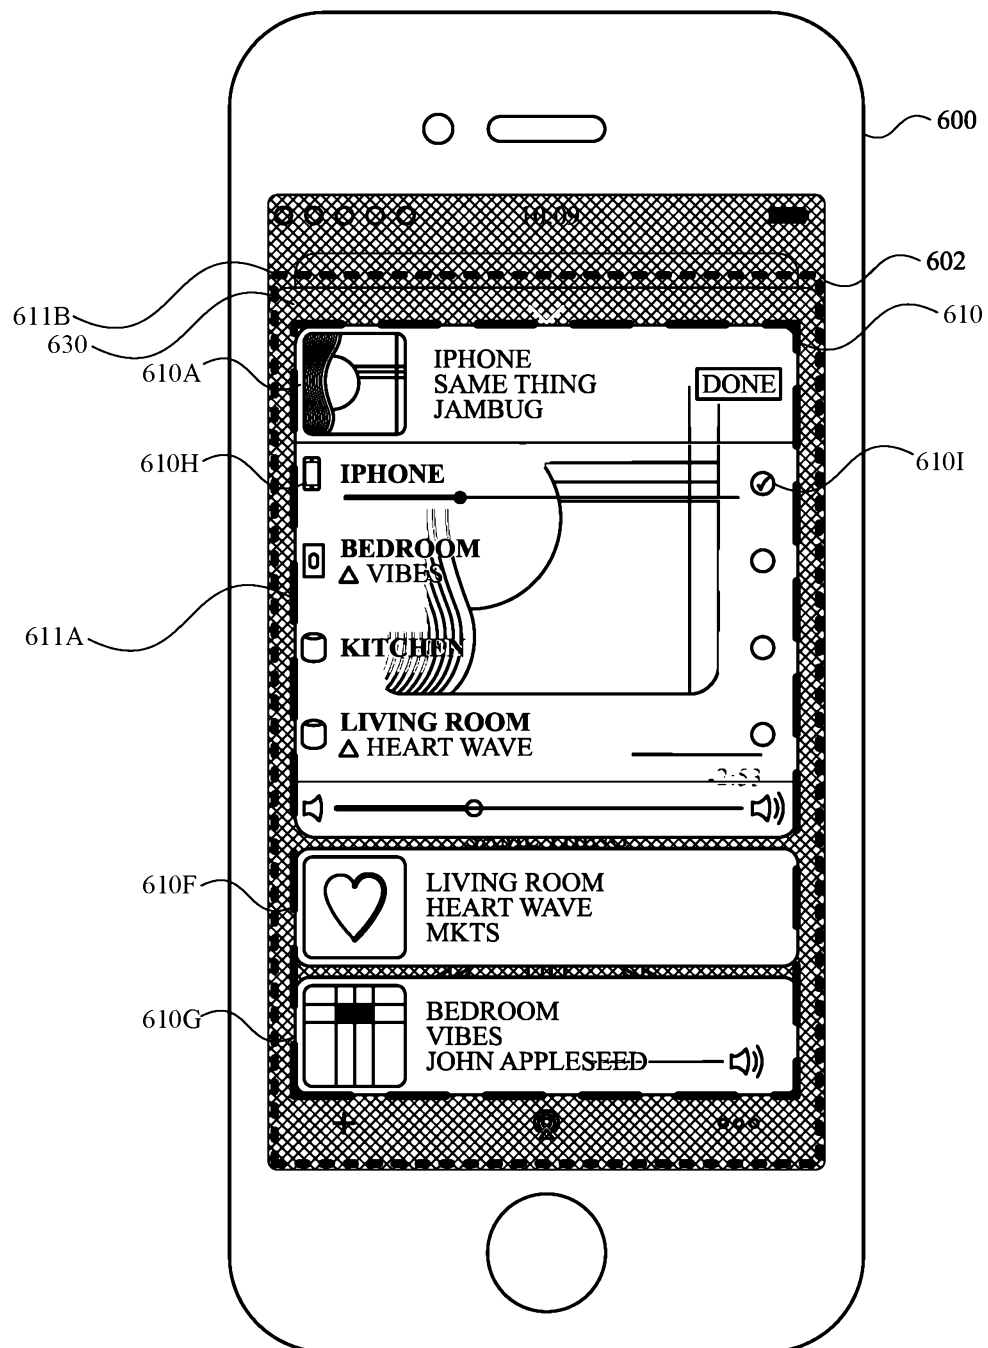
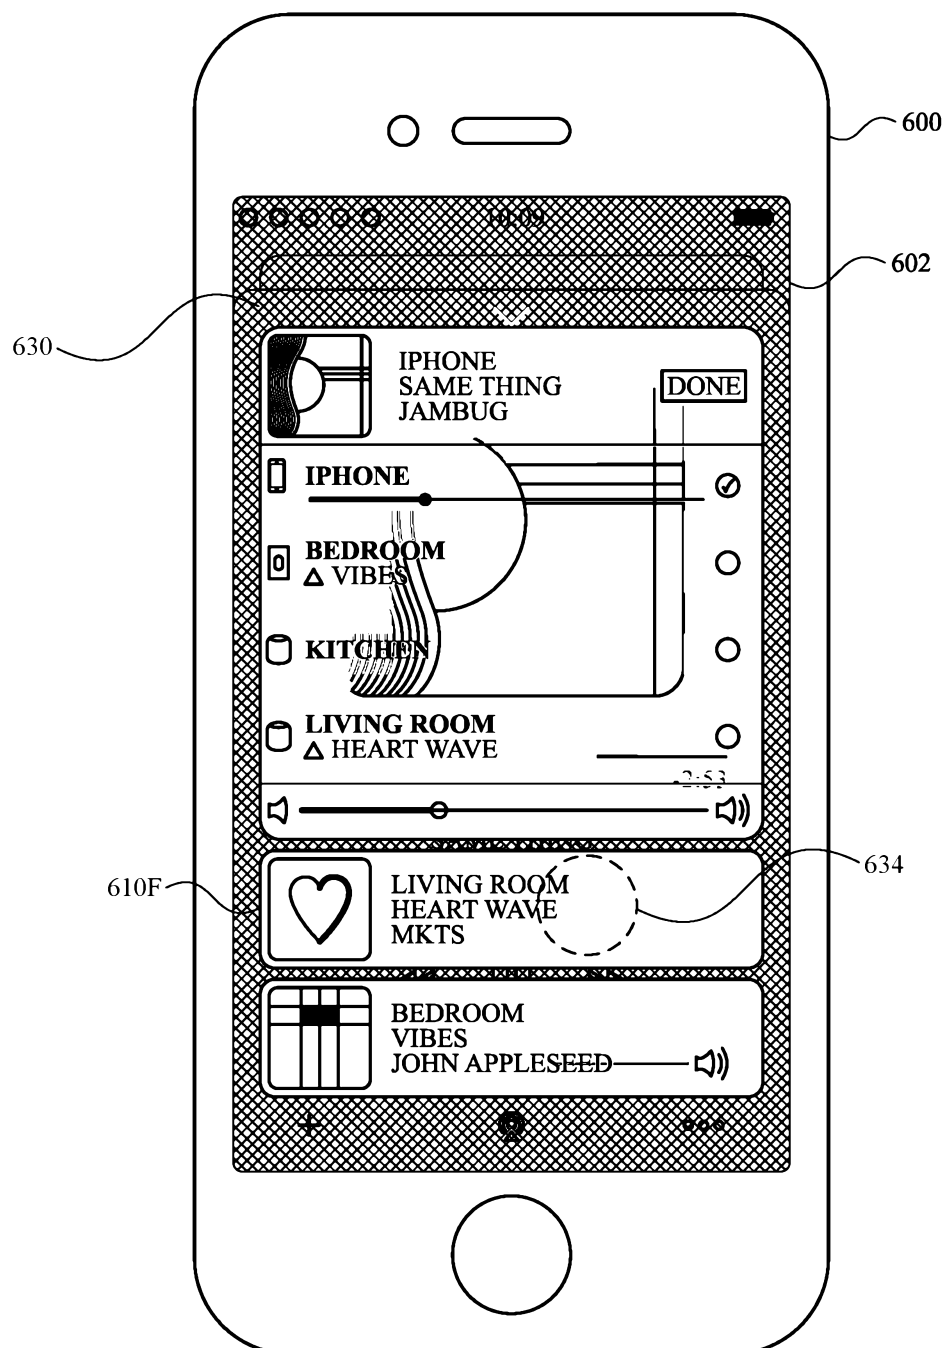


FIG. 6U

**FIG. 6V**

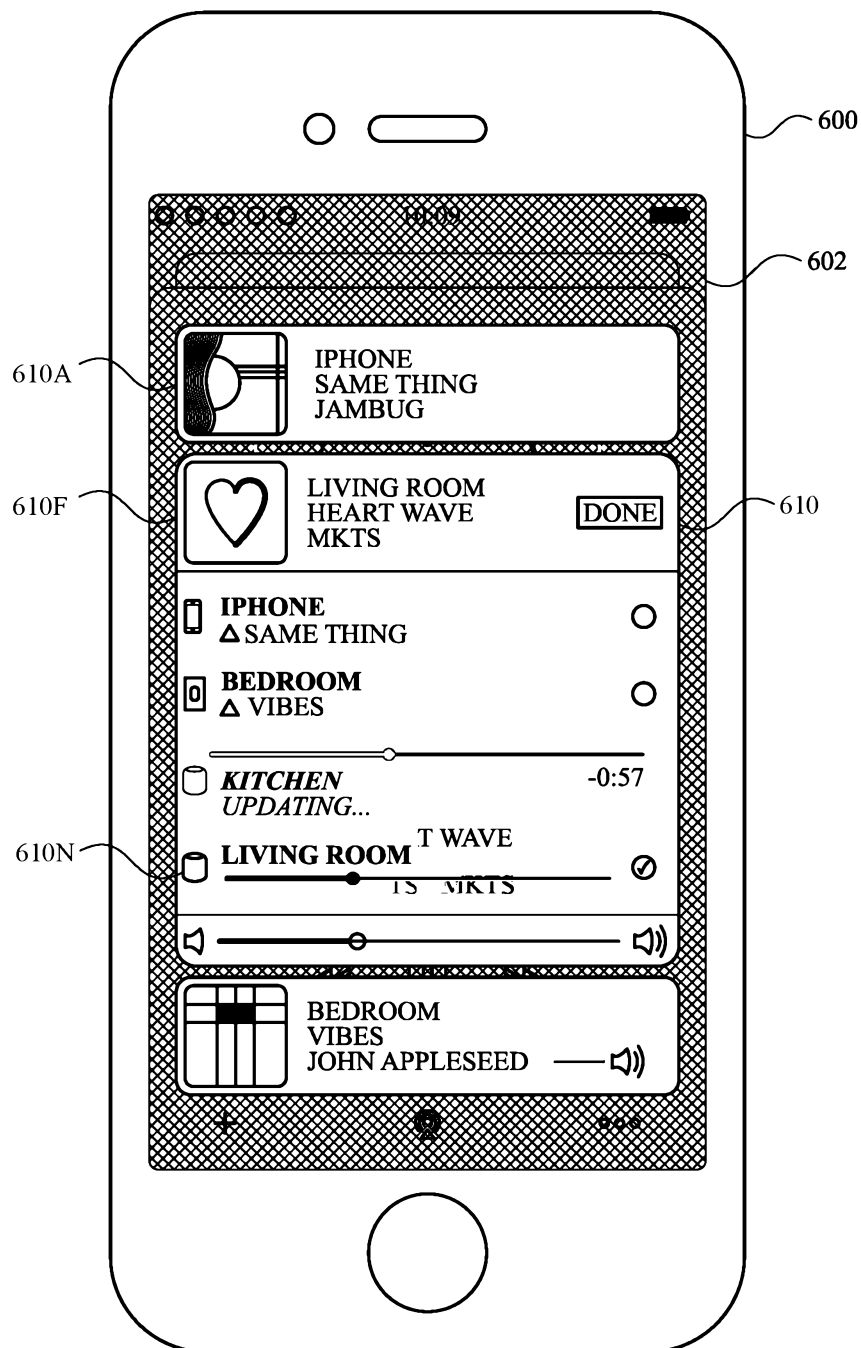
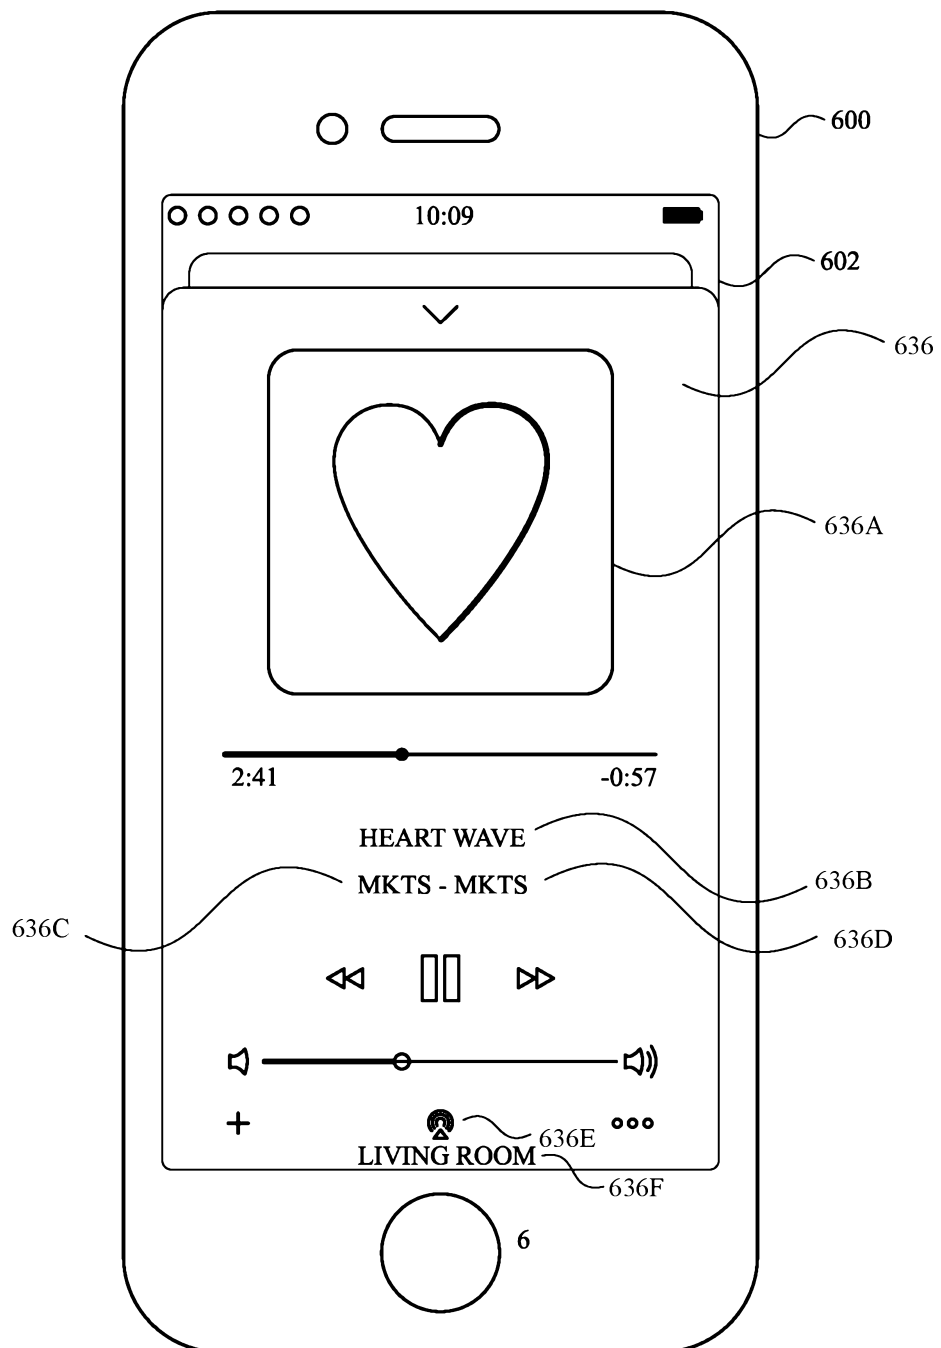
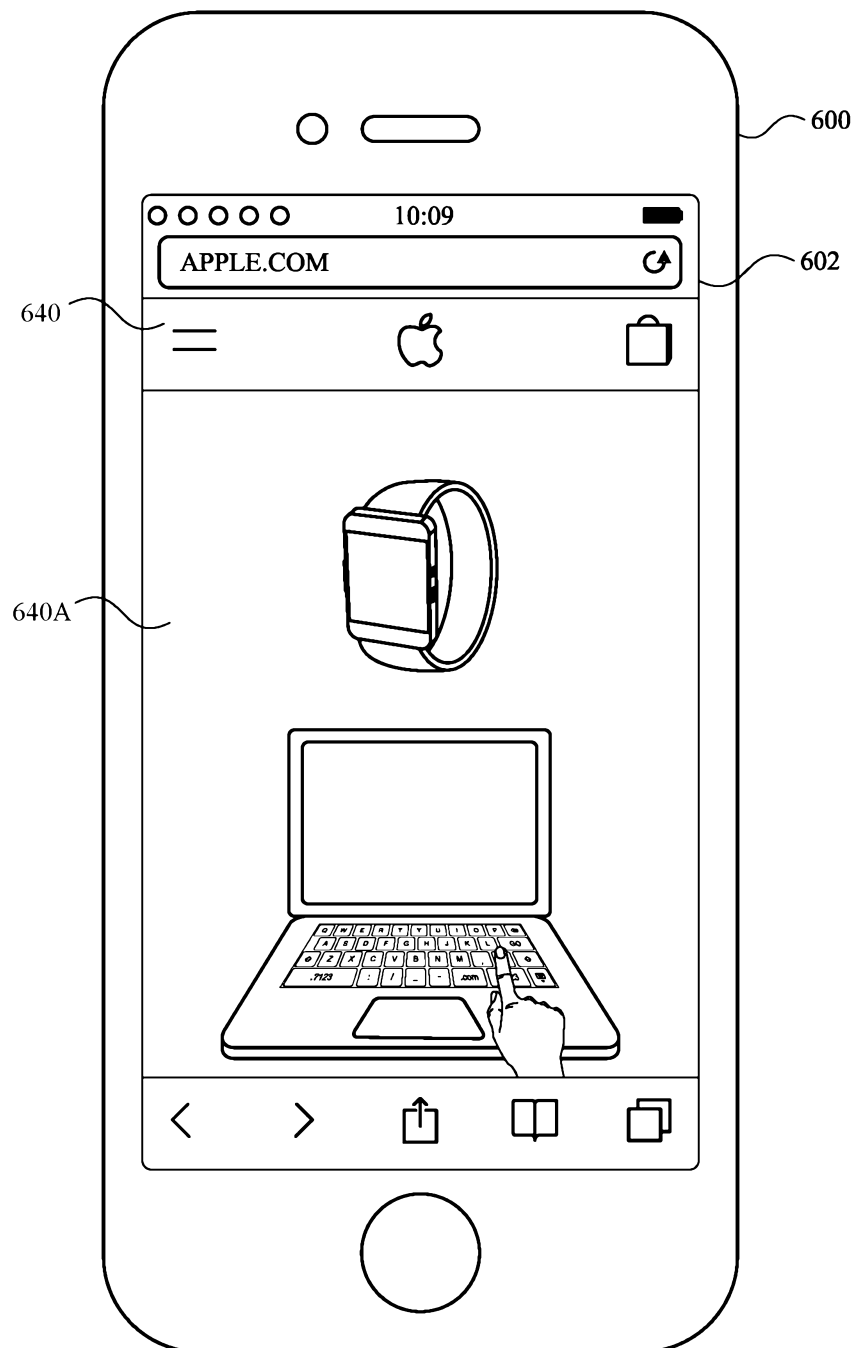
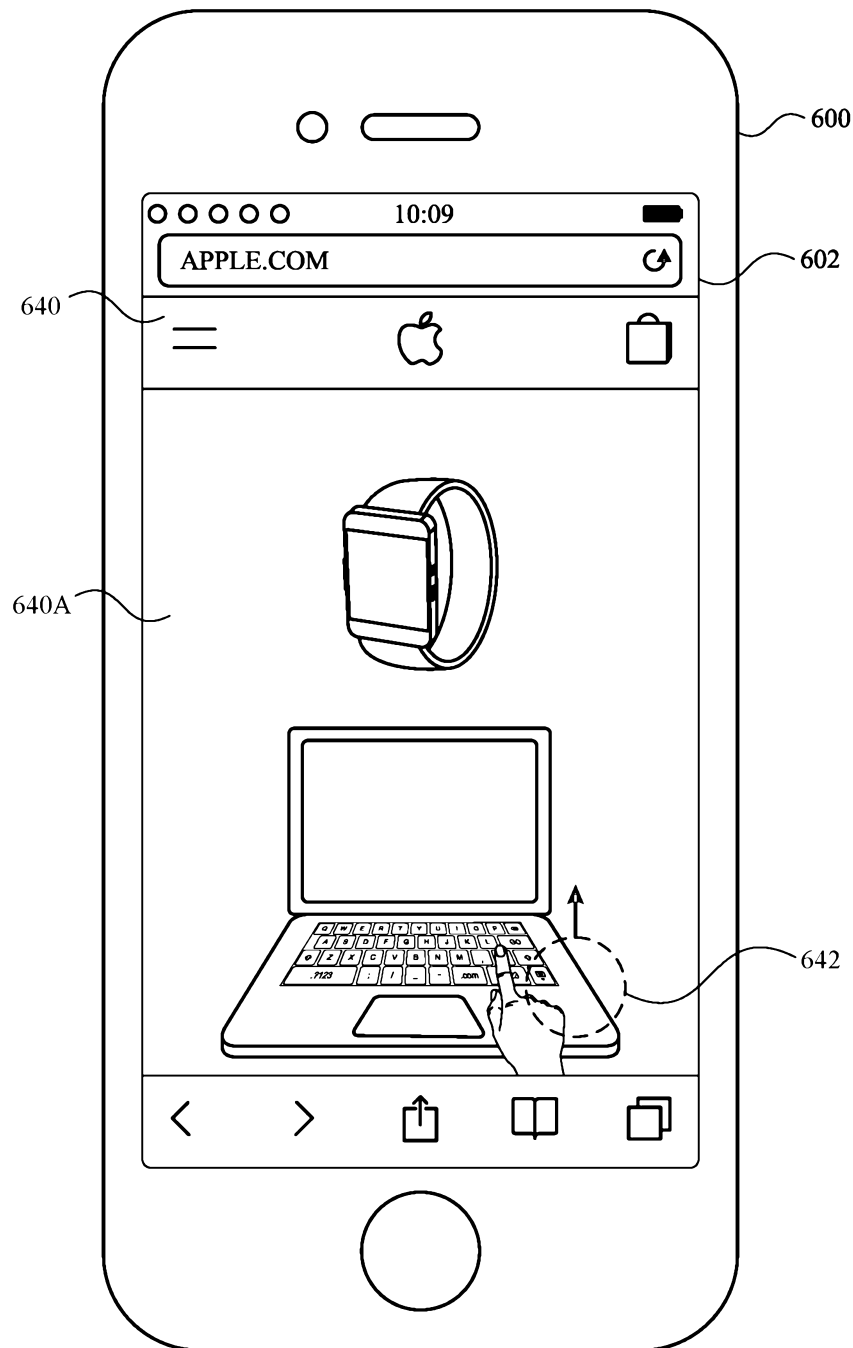


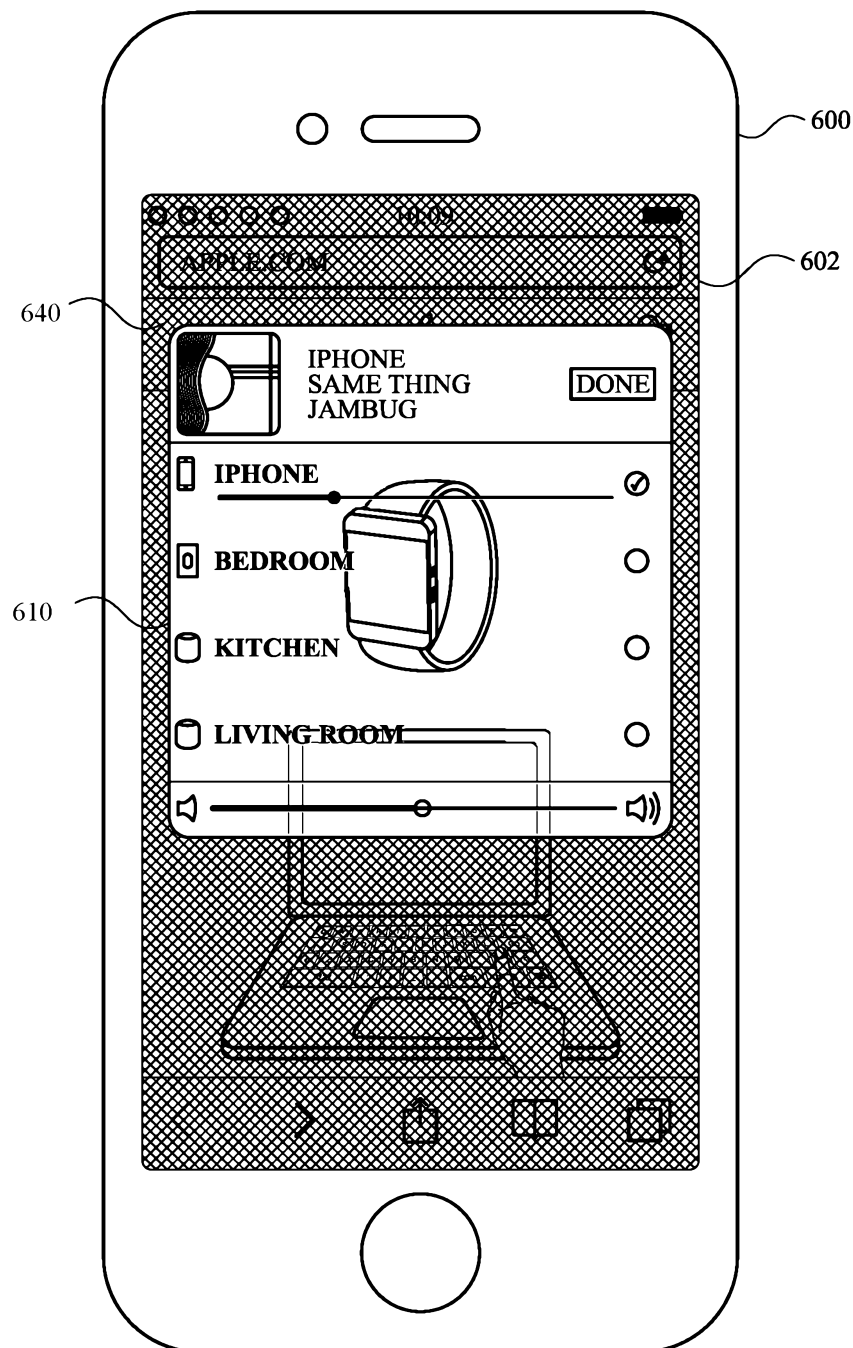
FIG. 6W

**FIG. 6X**

**FIG. 6Y**



**FIG. 6Z**

**FIG. 6AA**

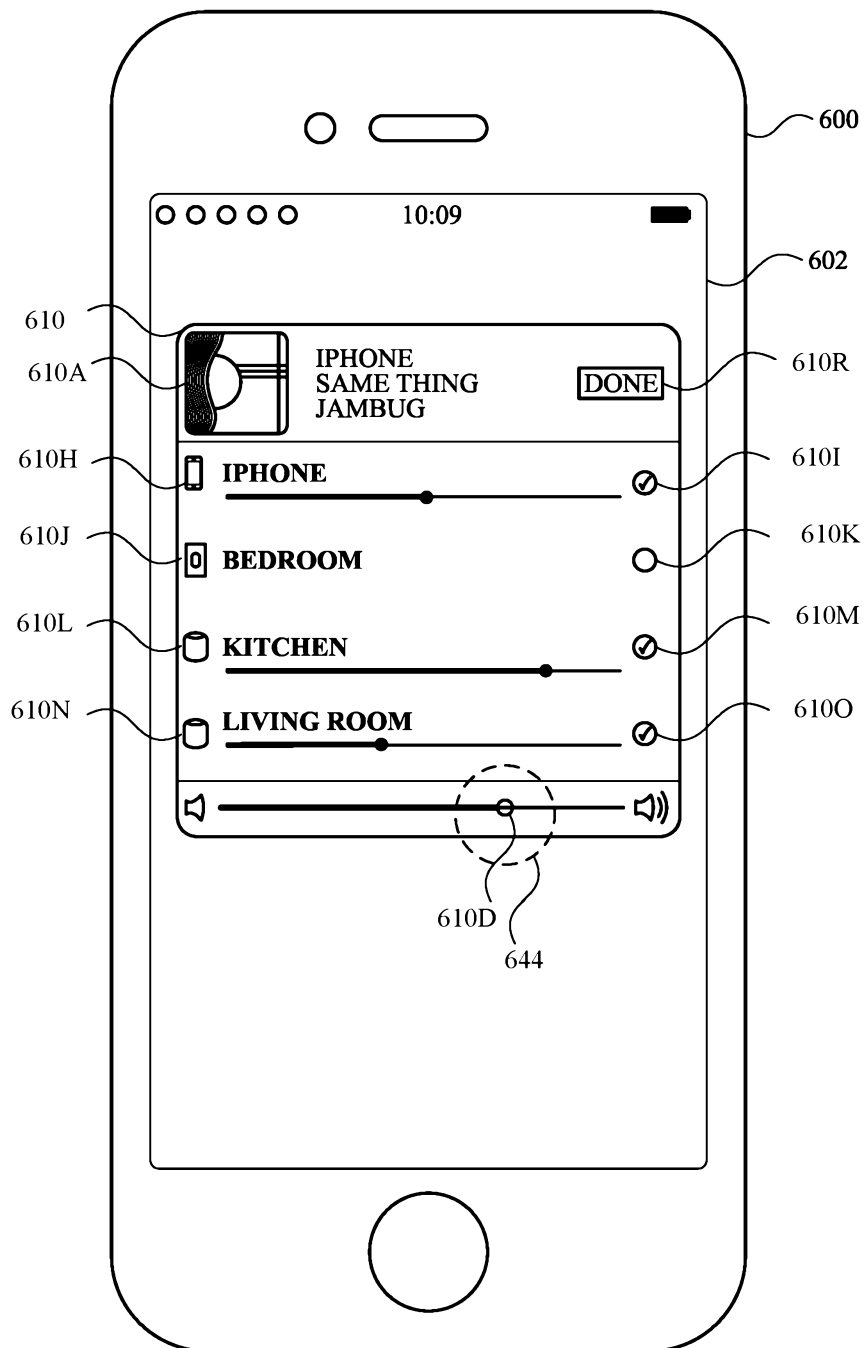
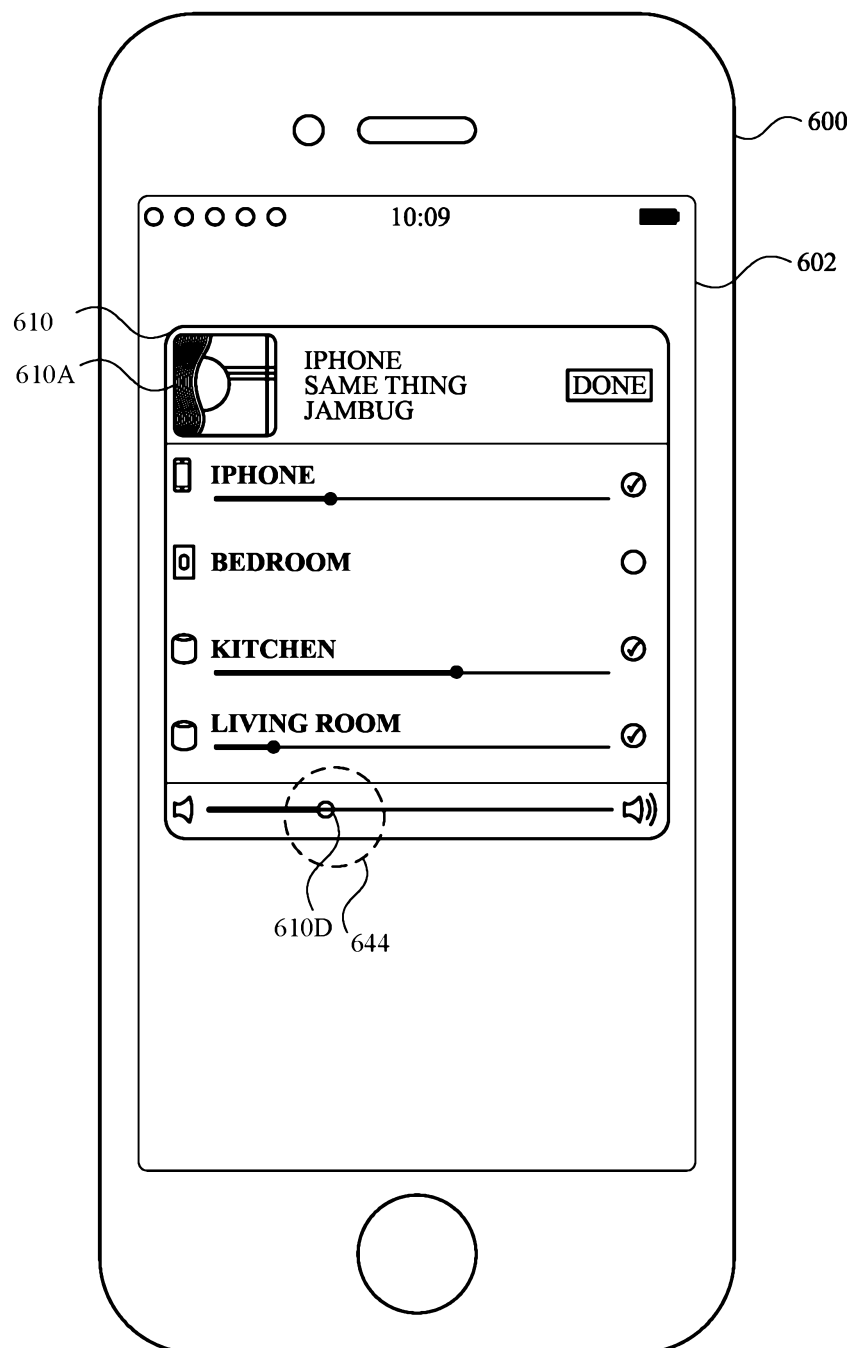
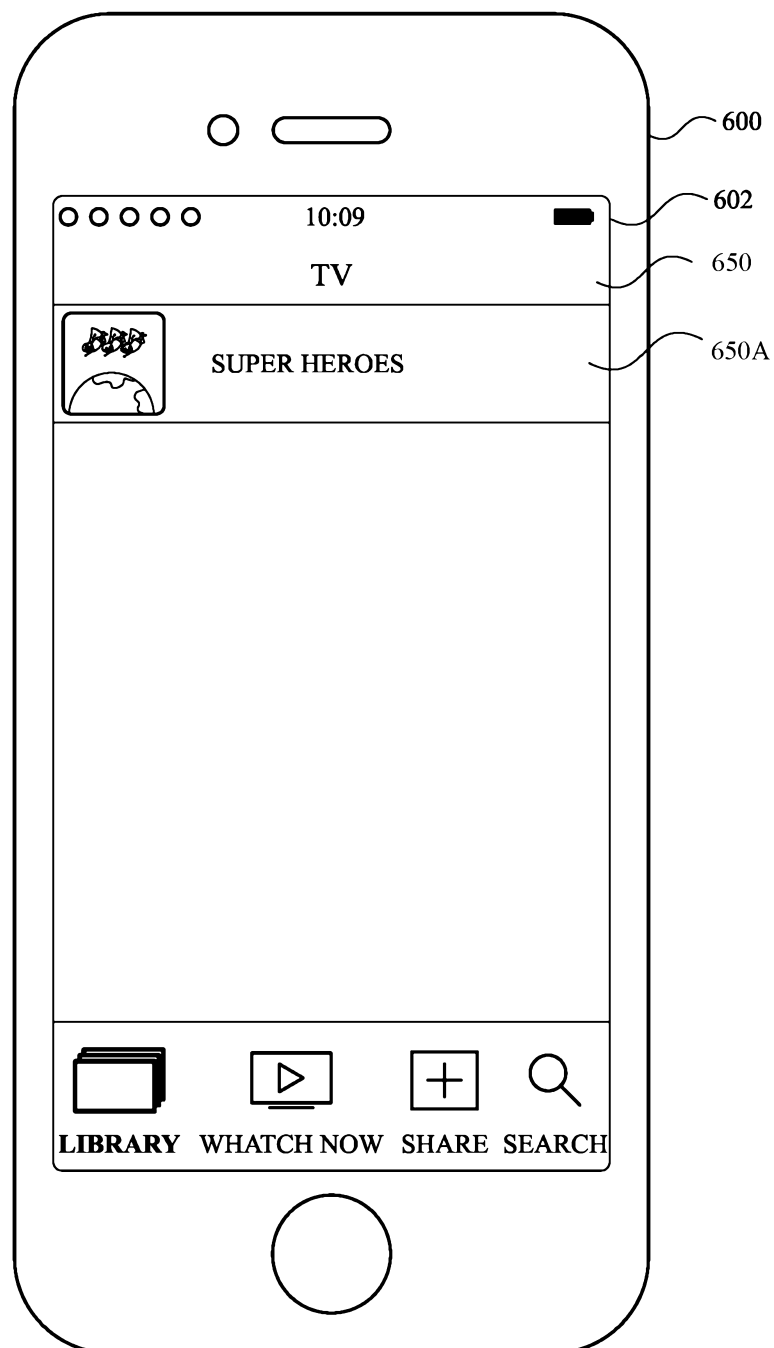
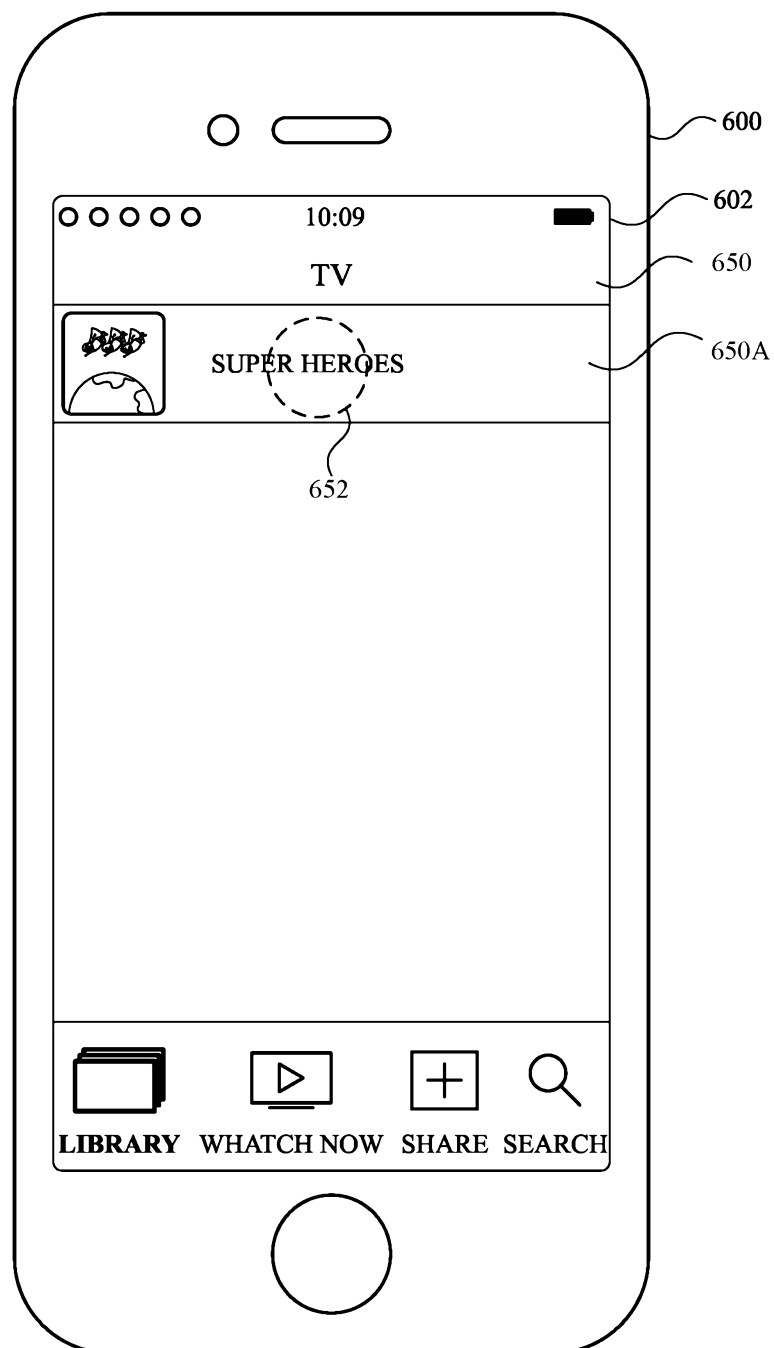
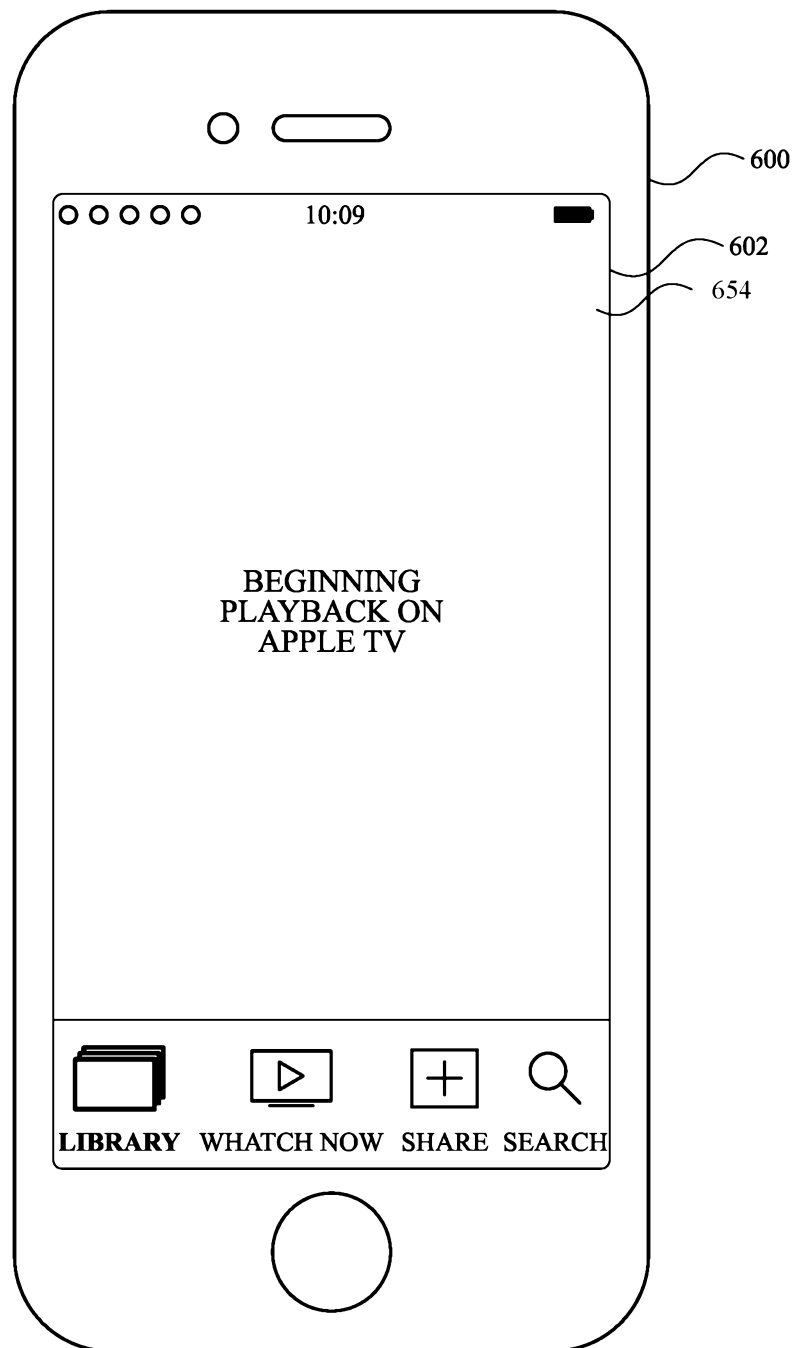


**FIG. 6AB**

**FIG. 6AC**

**FIG. 6AD**

**FIG. 6AE**

**FIG. 6AF**

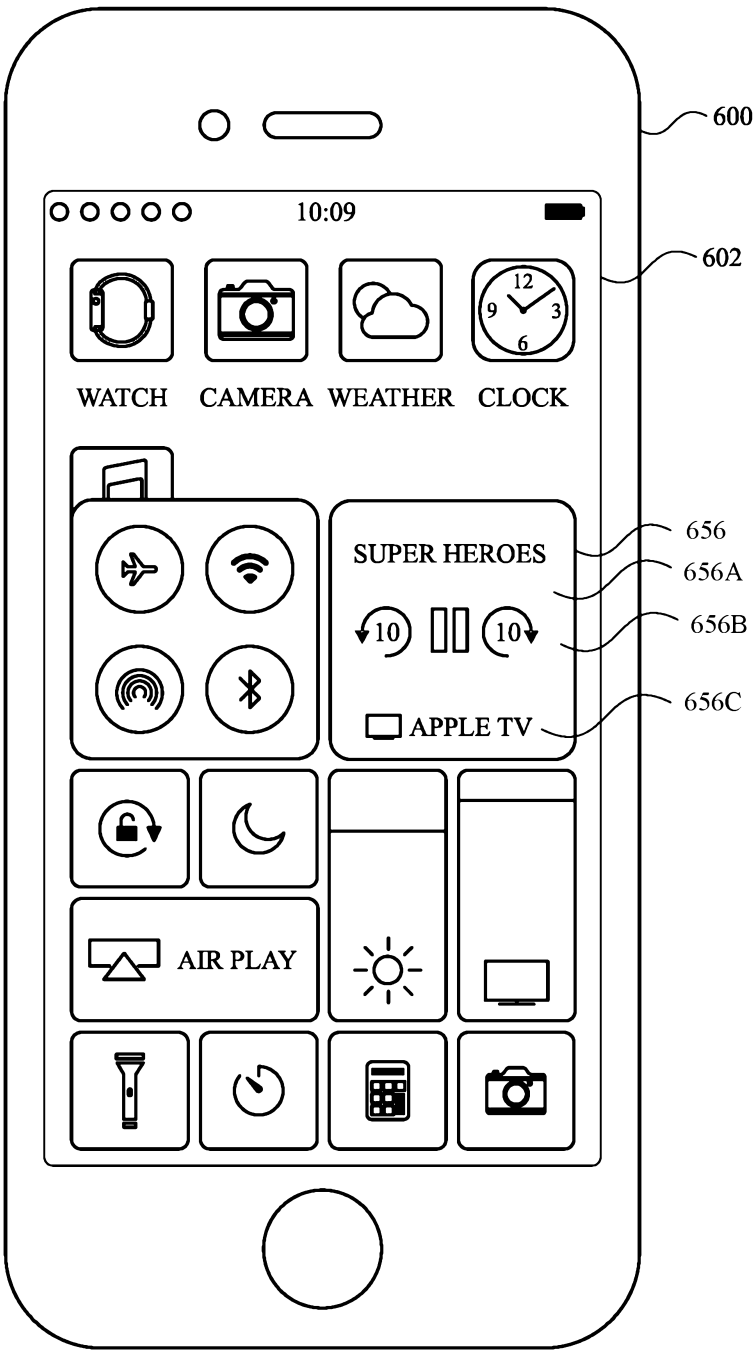


FIG. 6AG



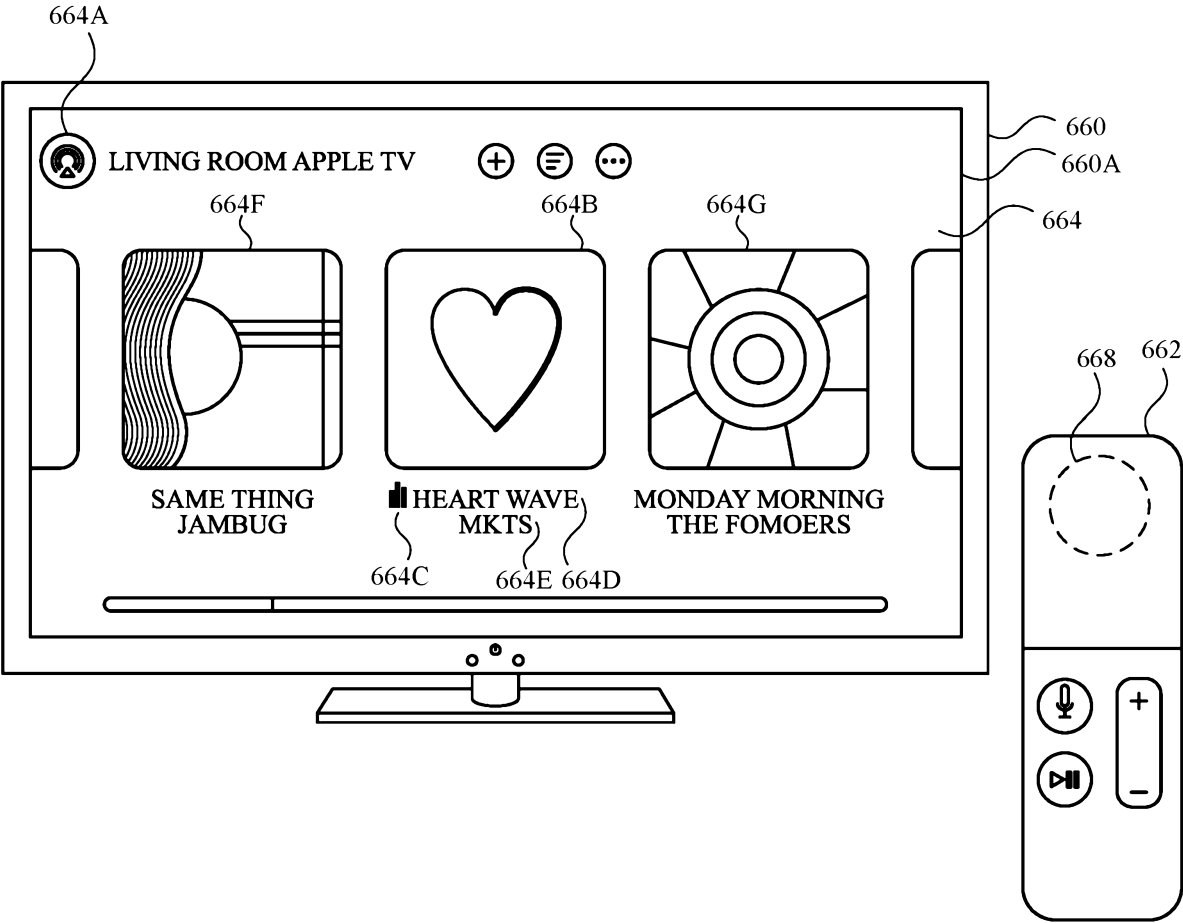
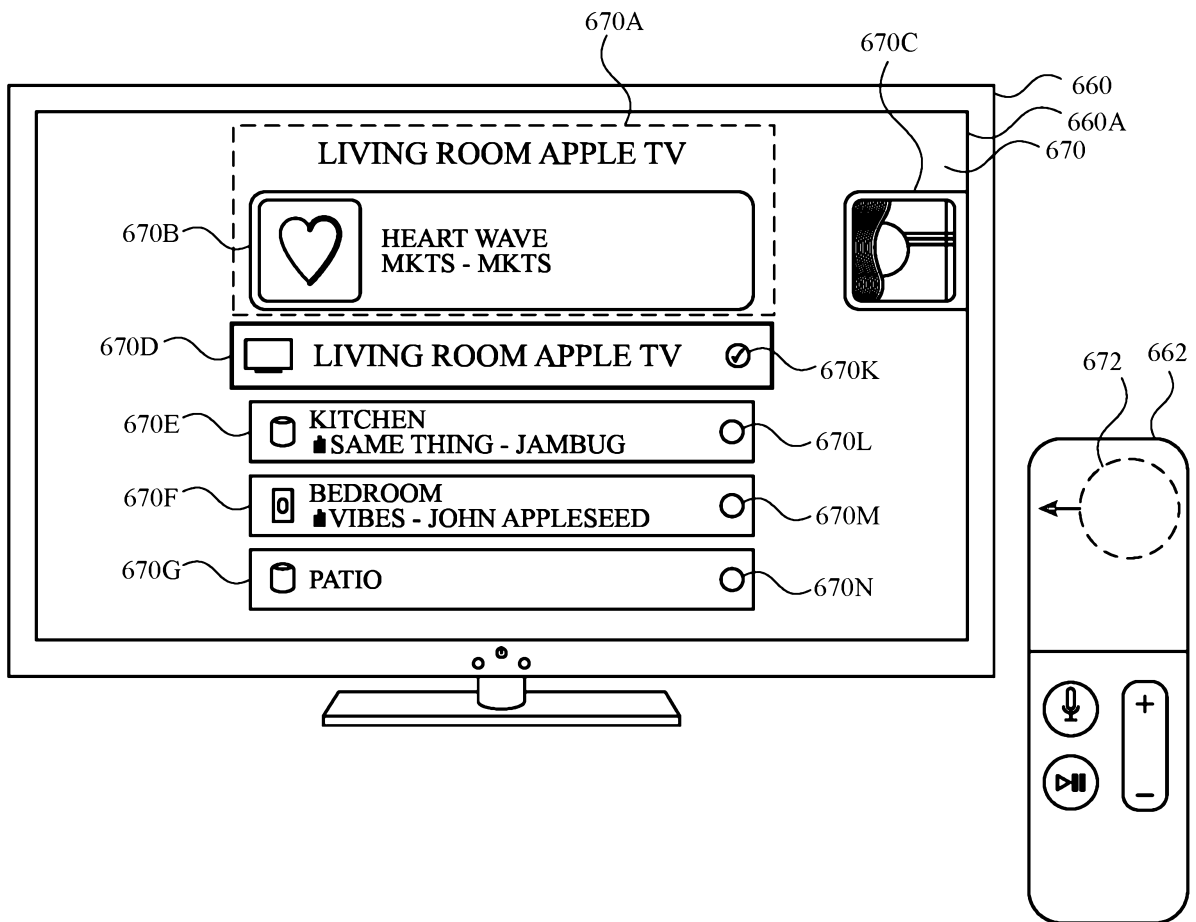
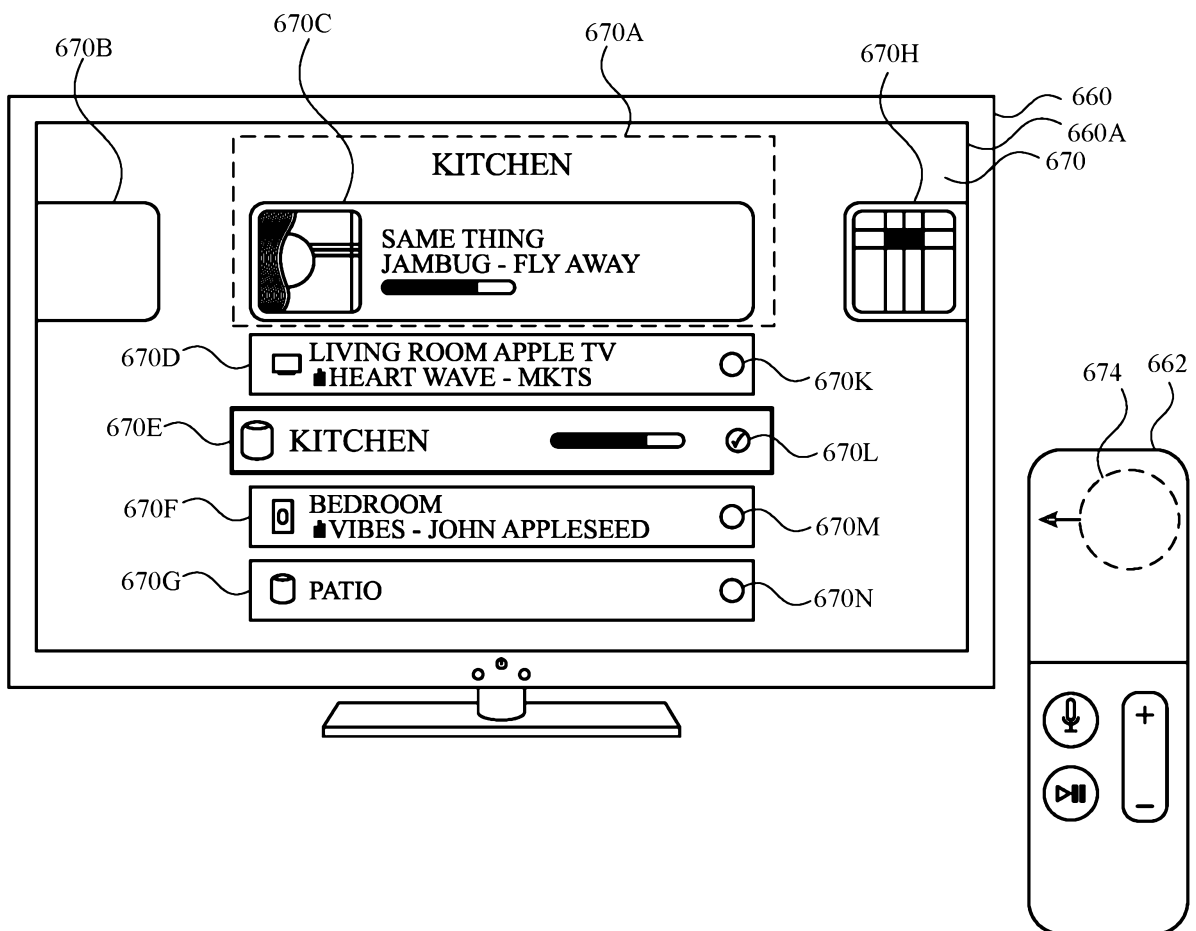


FIG. 6AH

**FIG. 6AI**

**FIG. 6AJ**

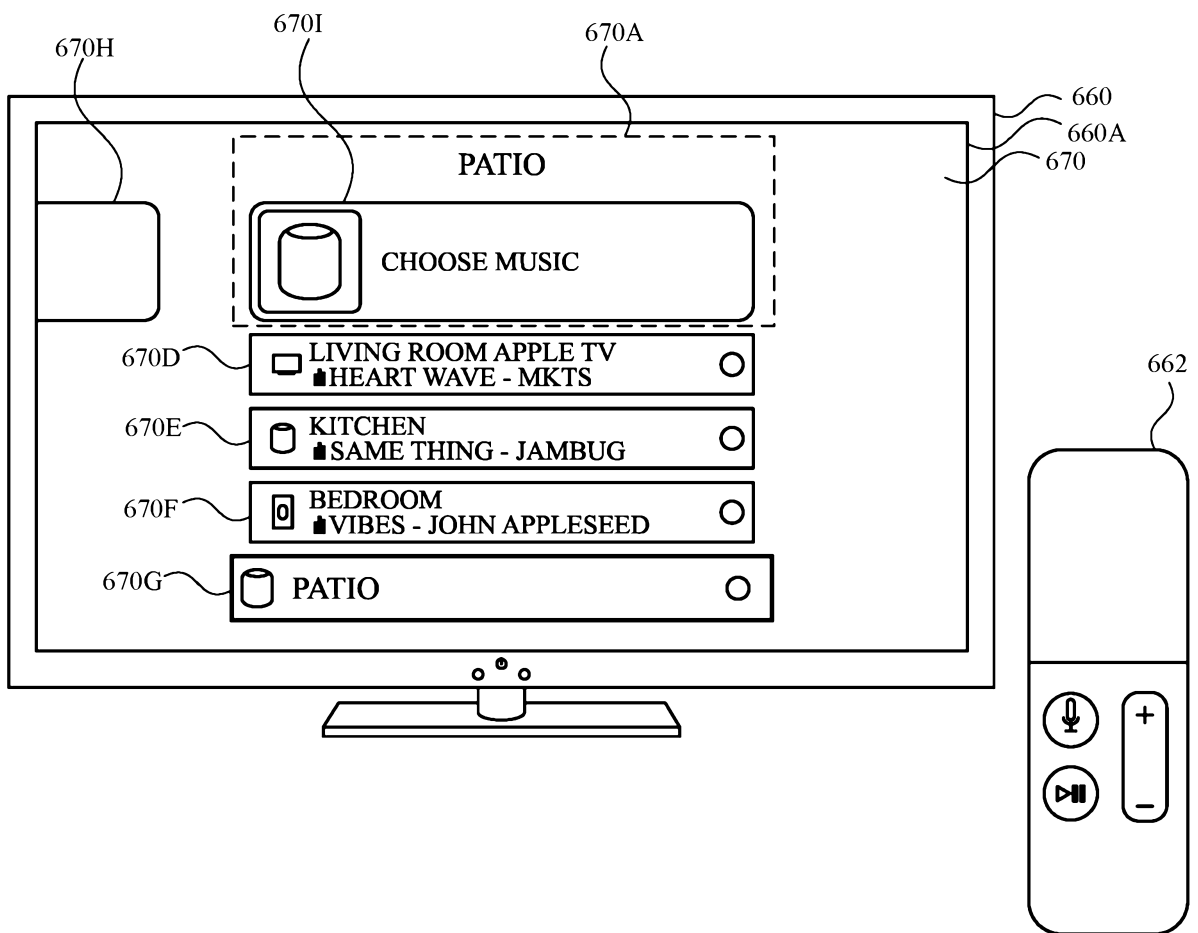
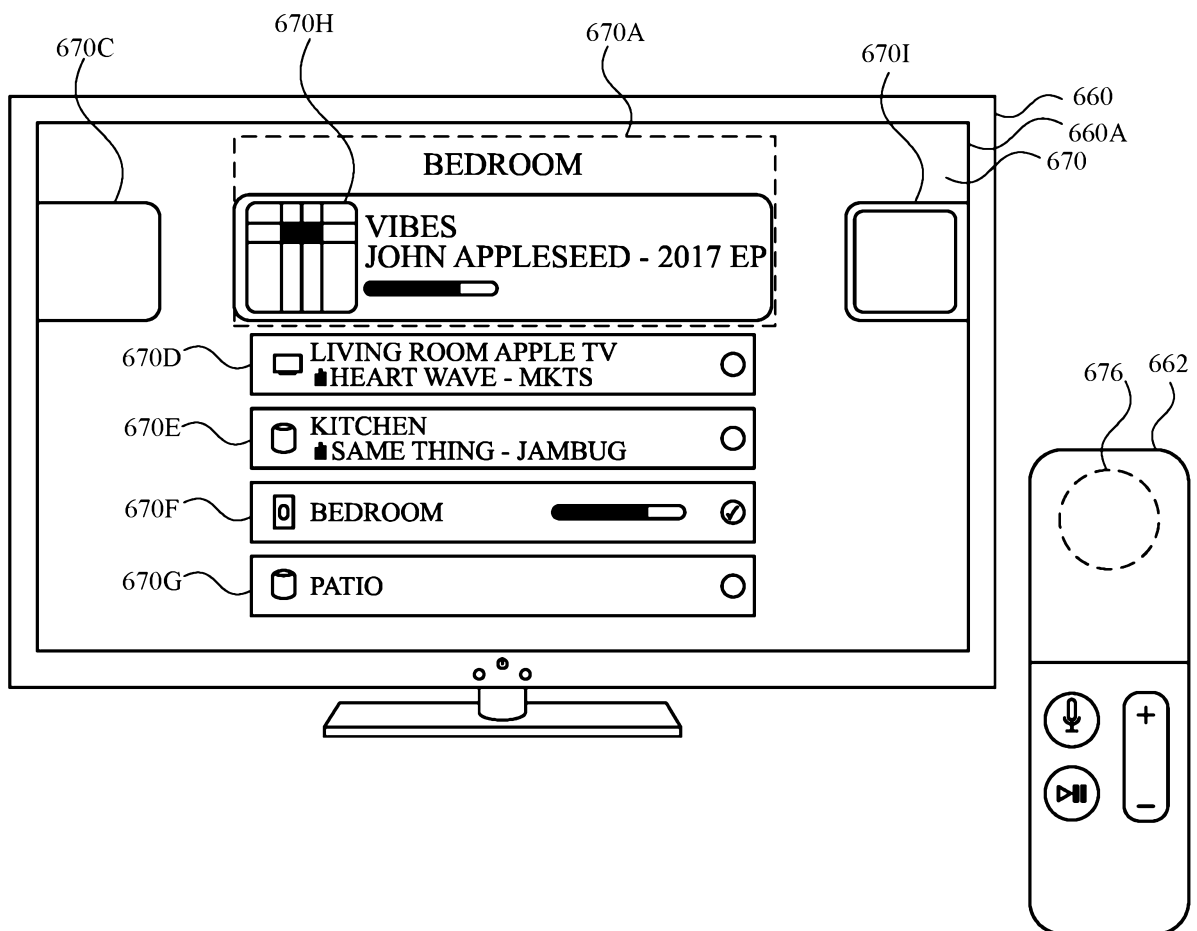
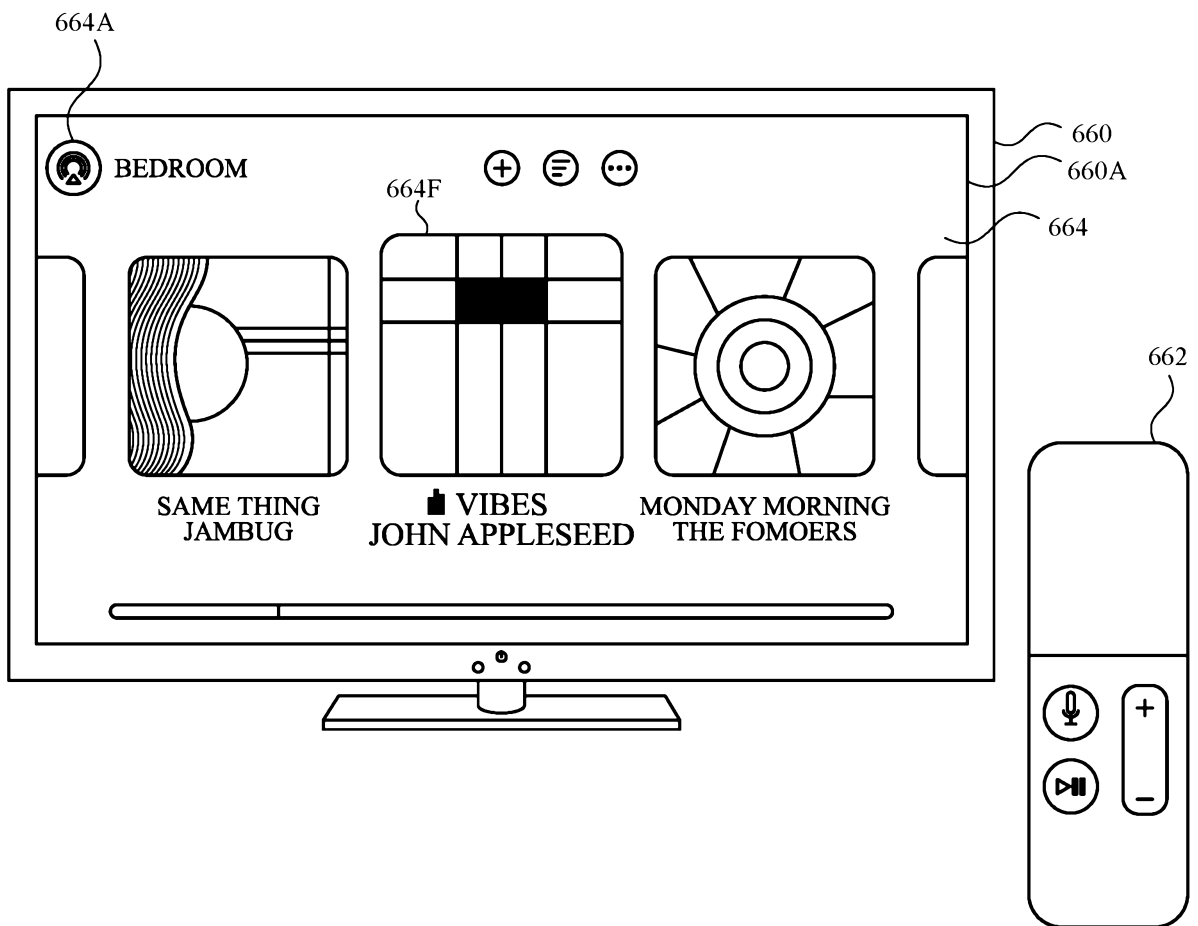
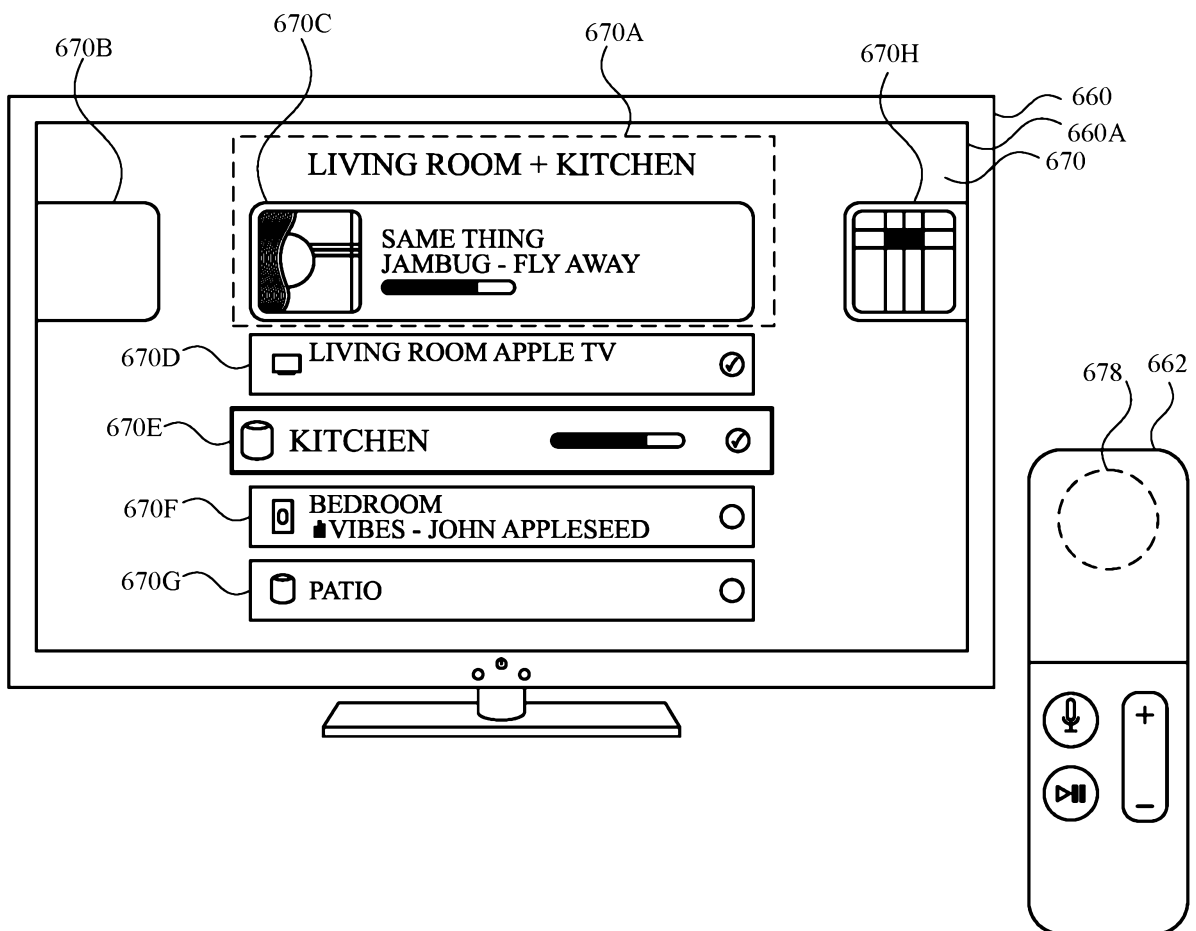
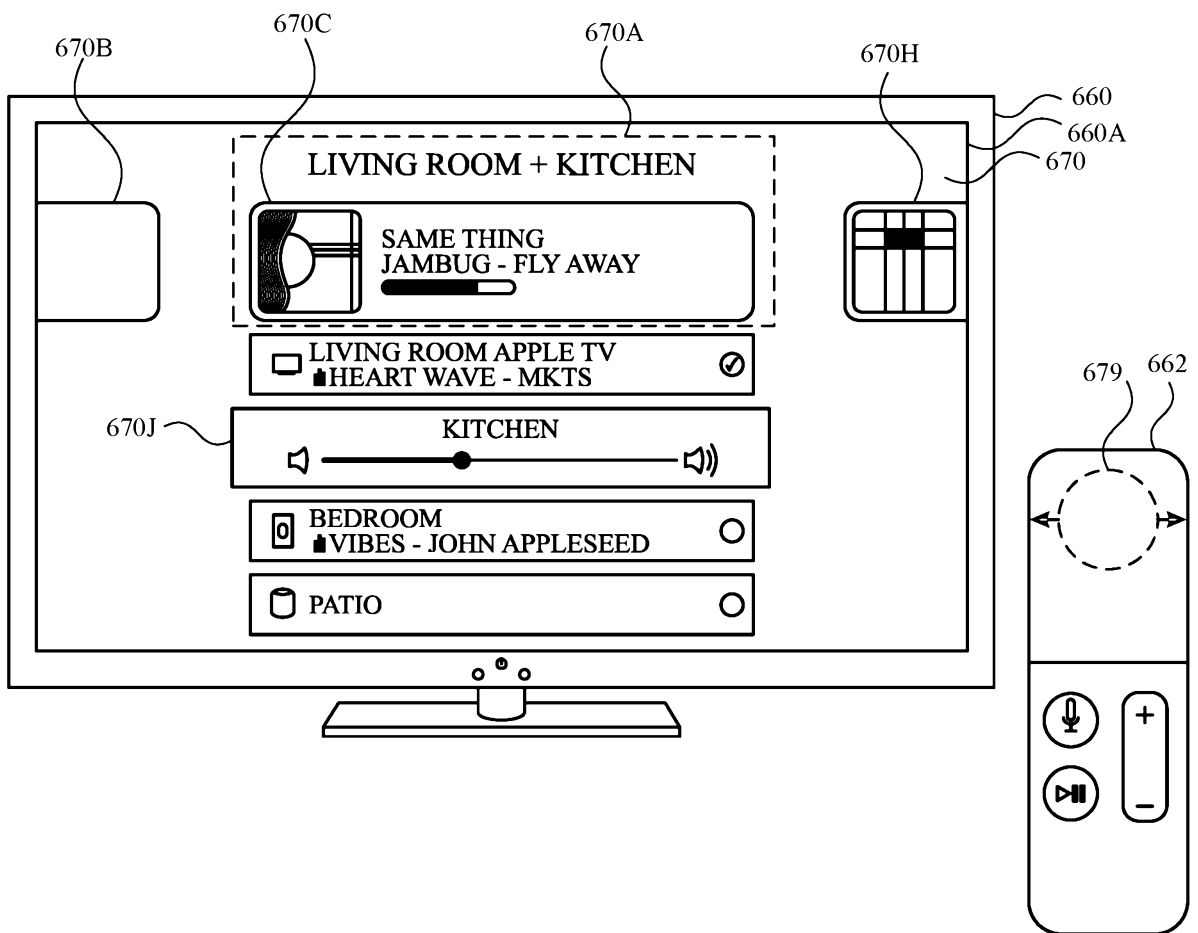


FIG. 6AK

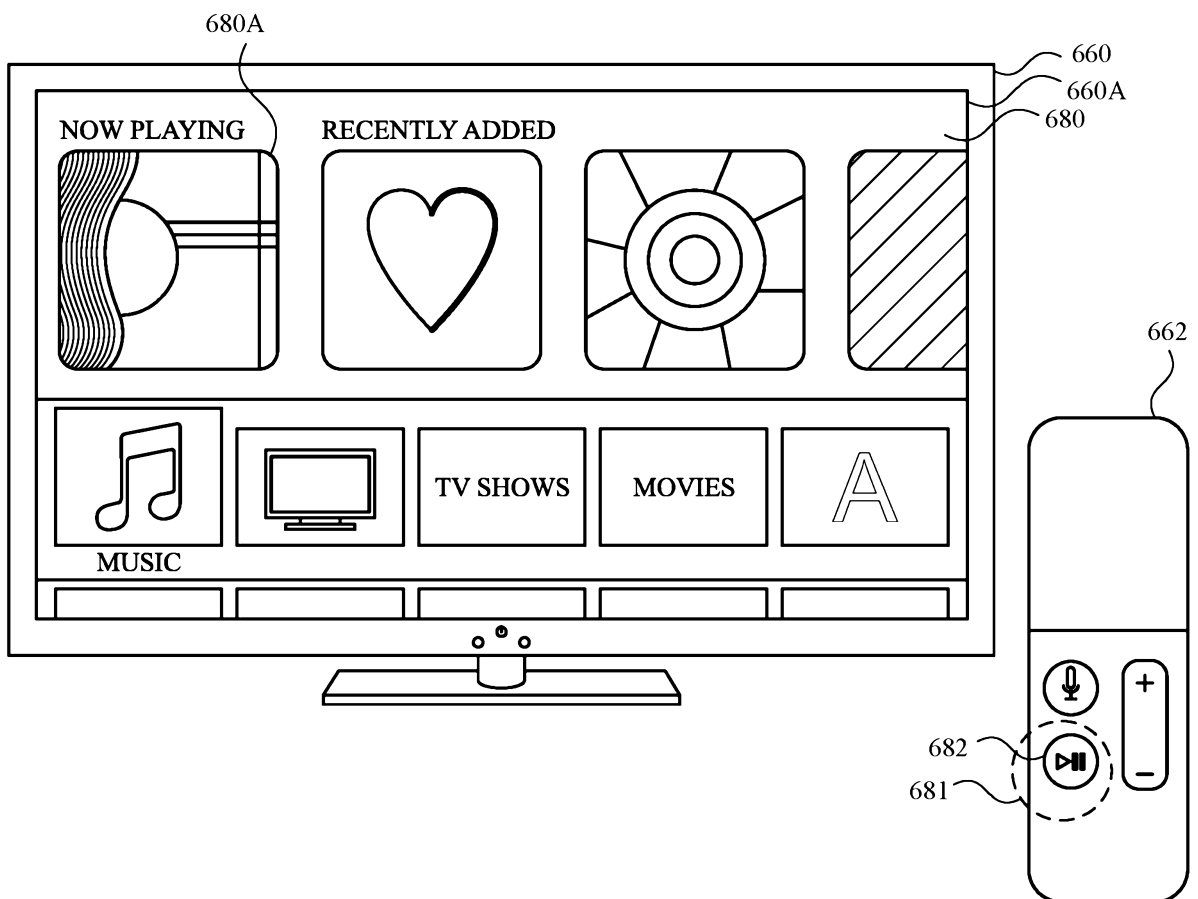
**FIG. 6AL**

**FIG. 6AM**

**FIG. 6AN**

**FIG. 6A0**



**FIG. 6AP**

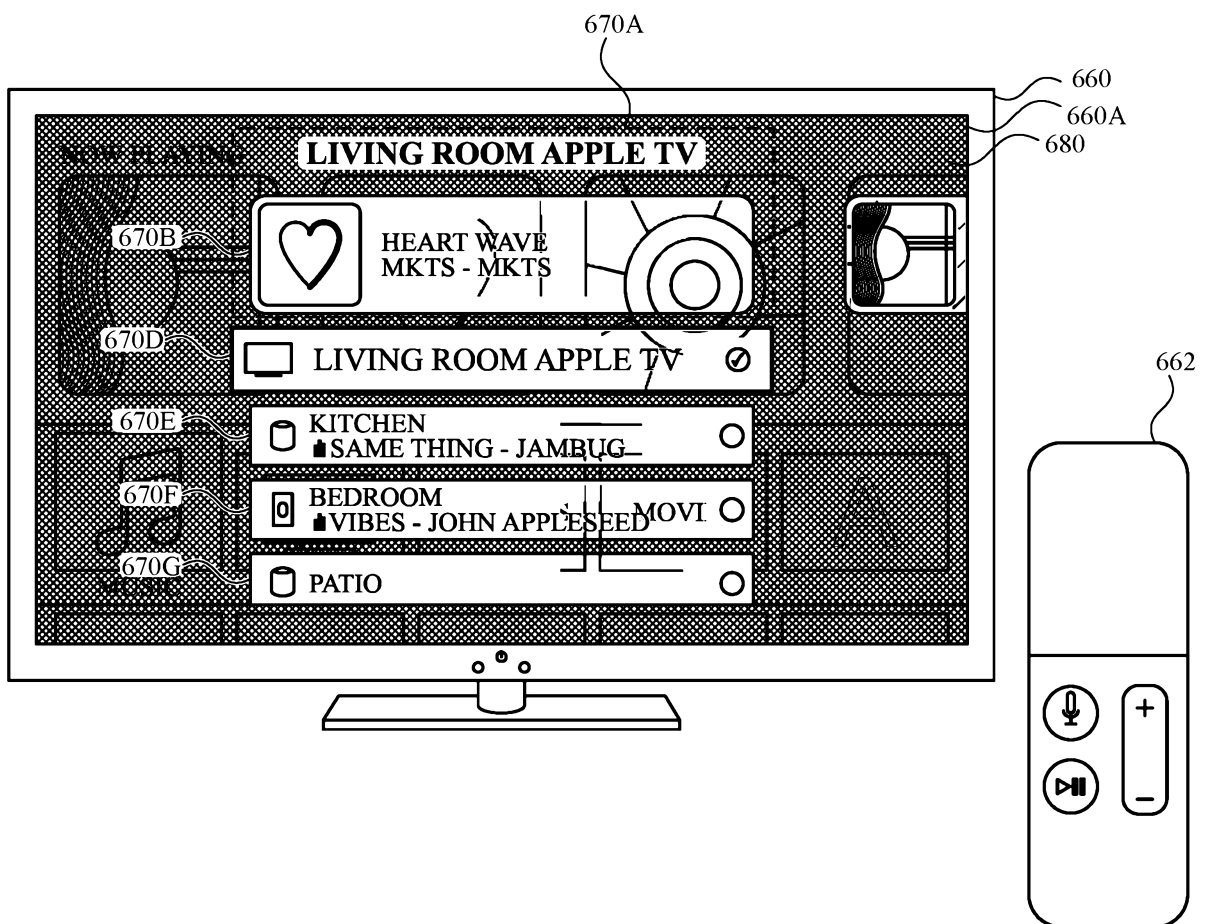


FIG. 6AQ

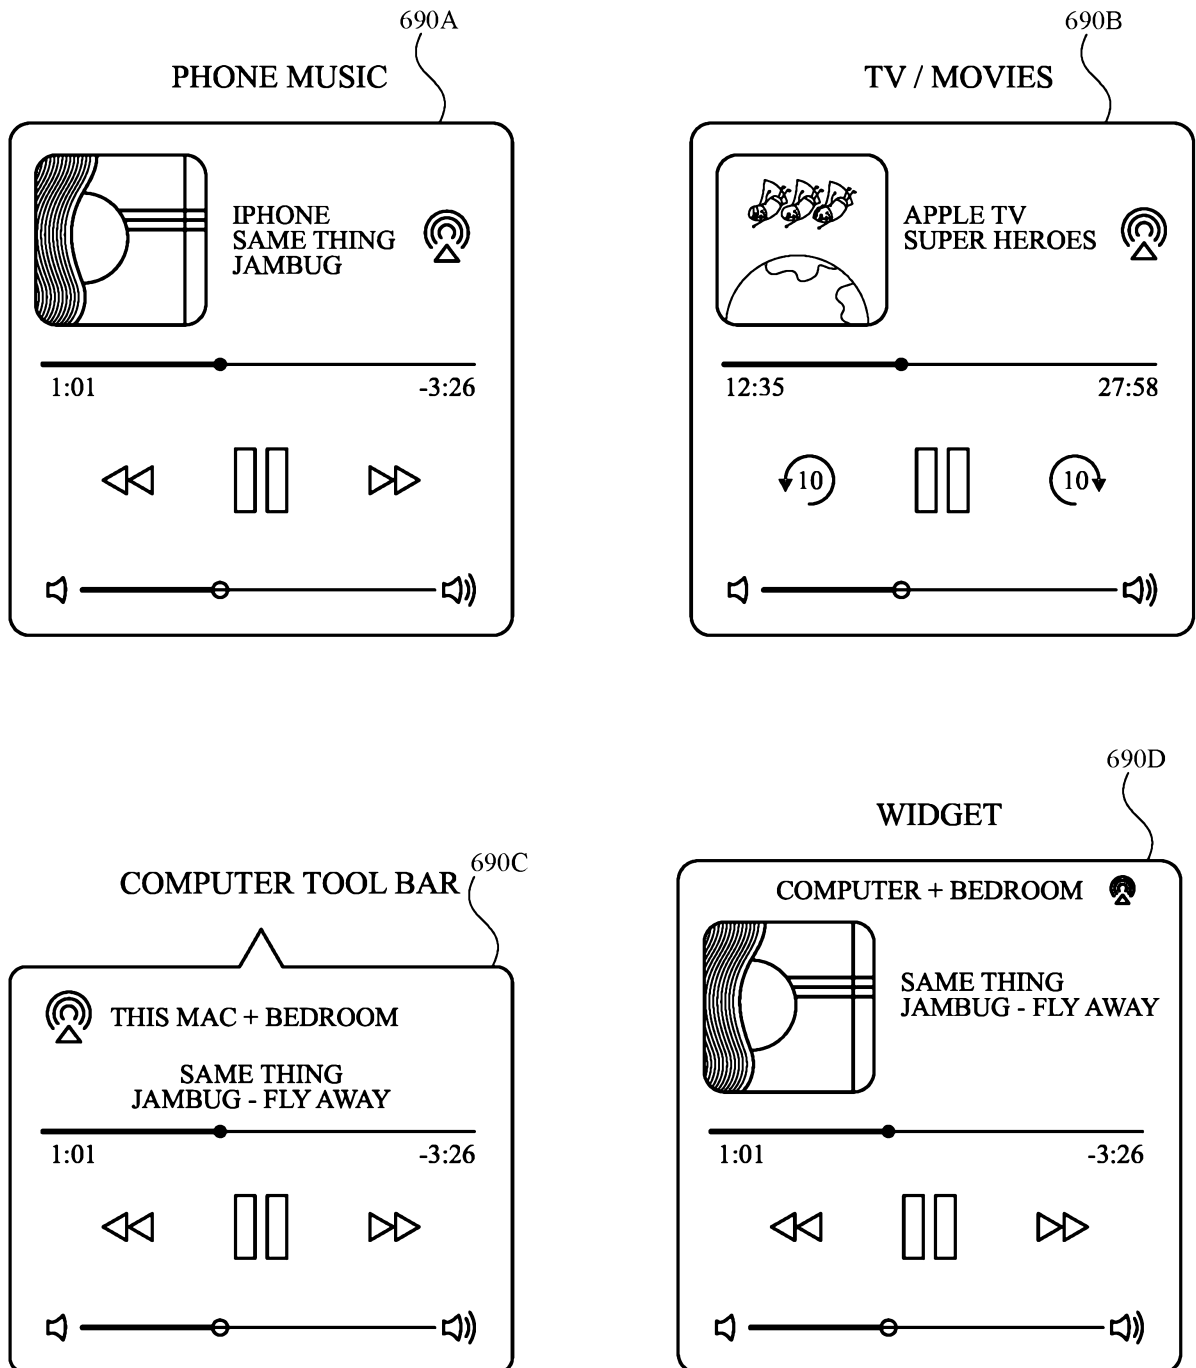
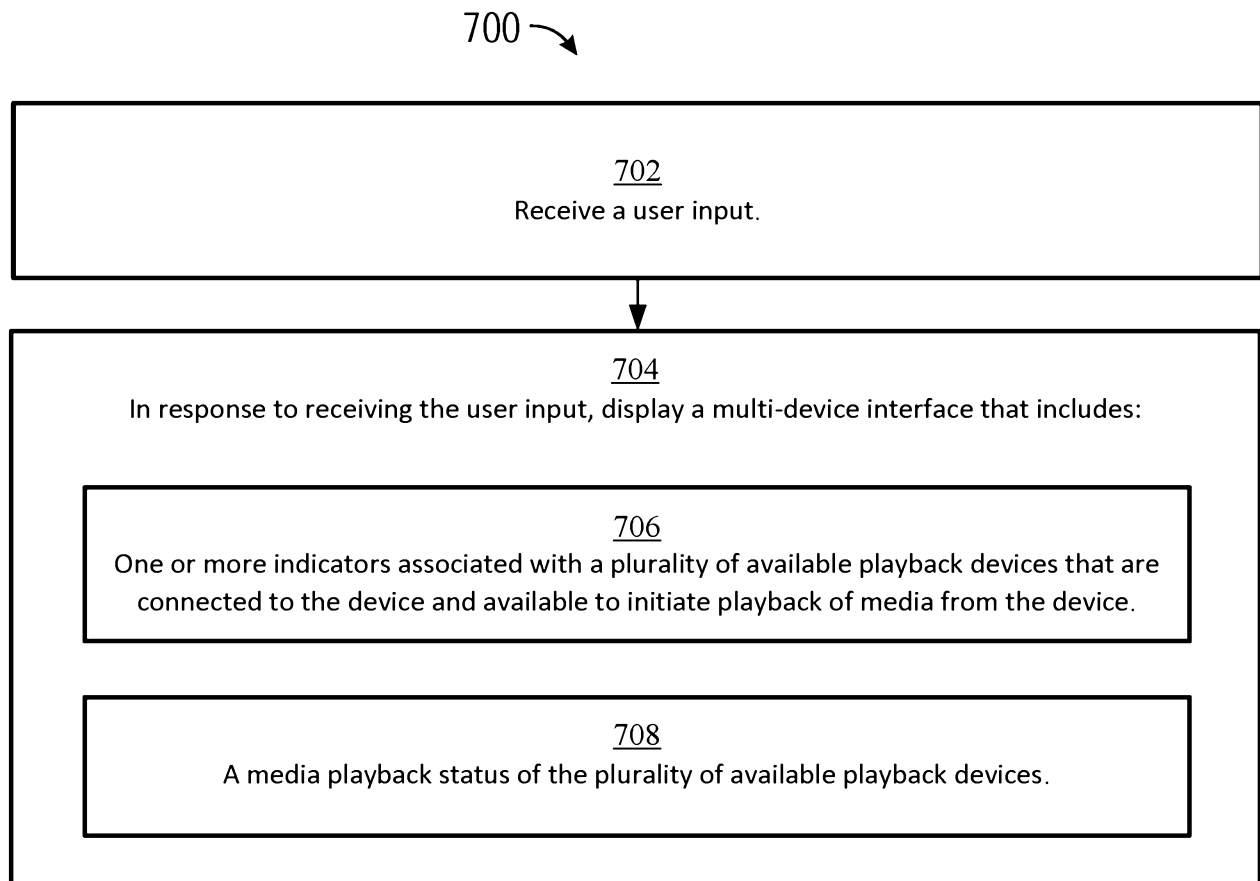
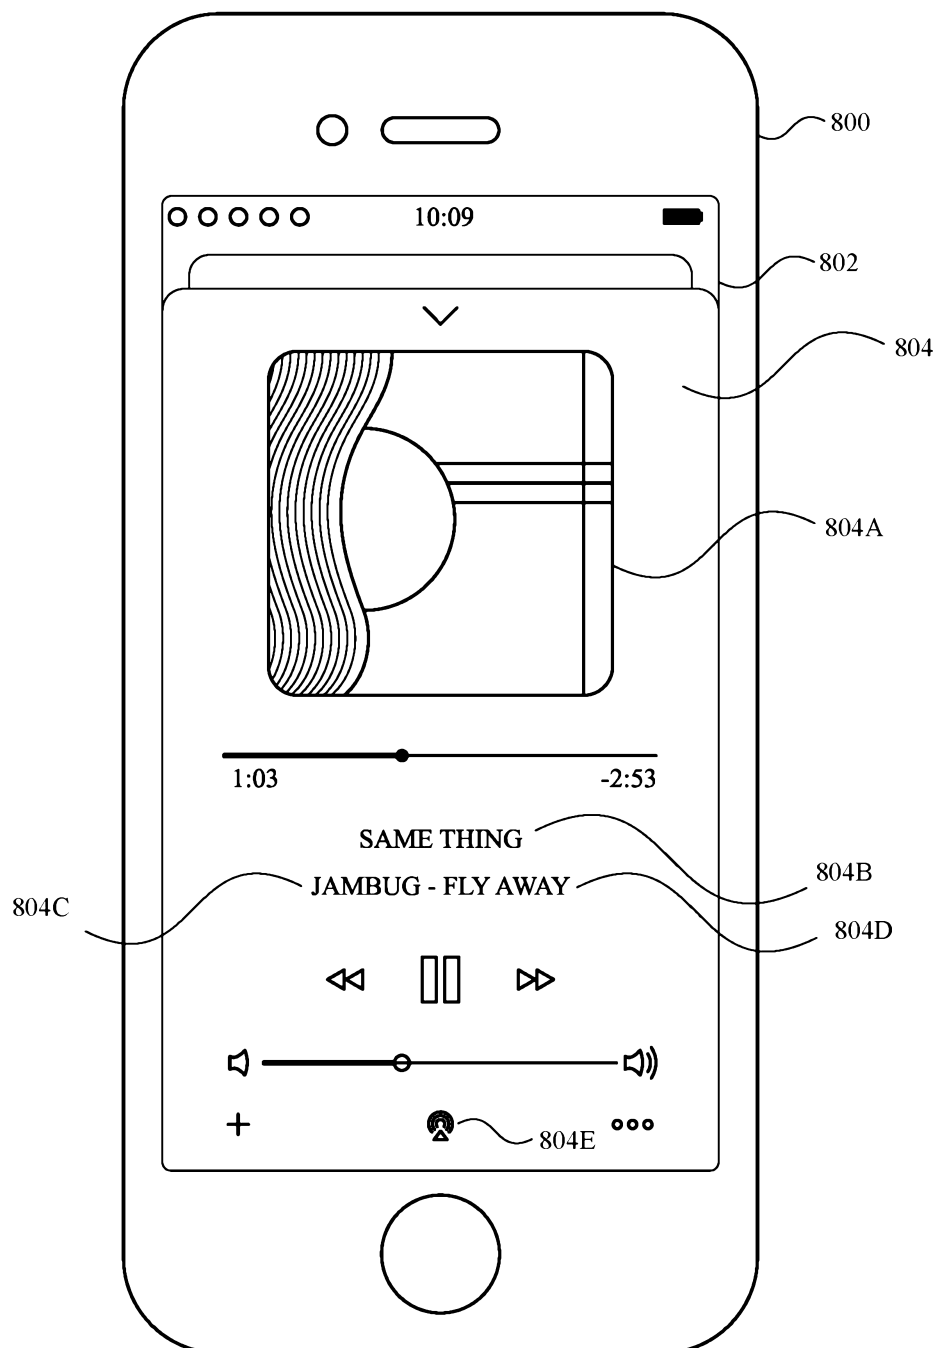
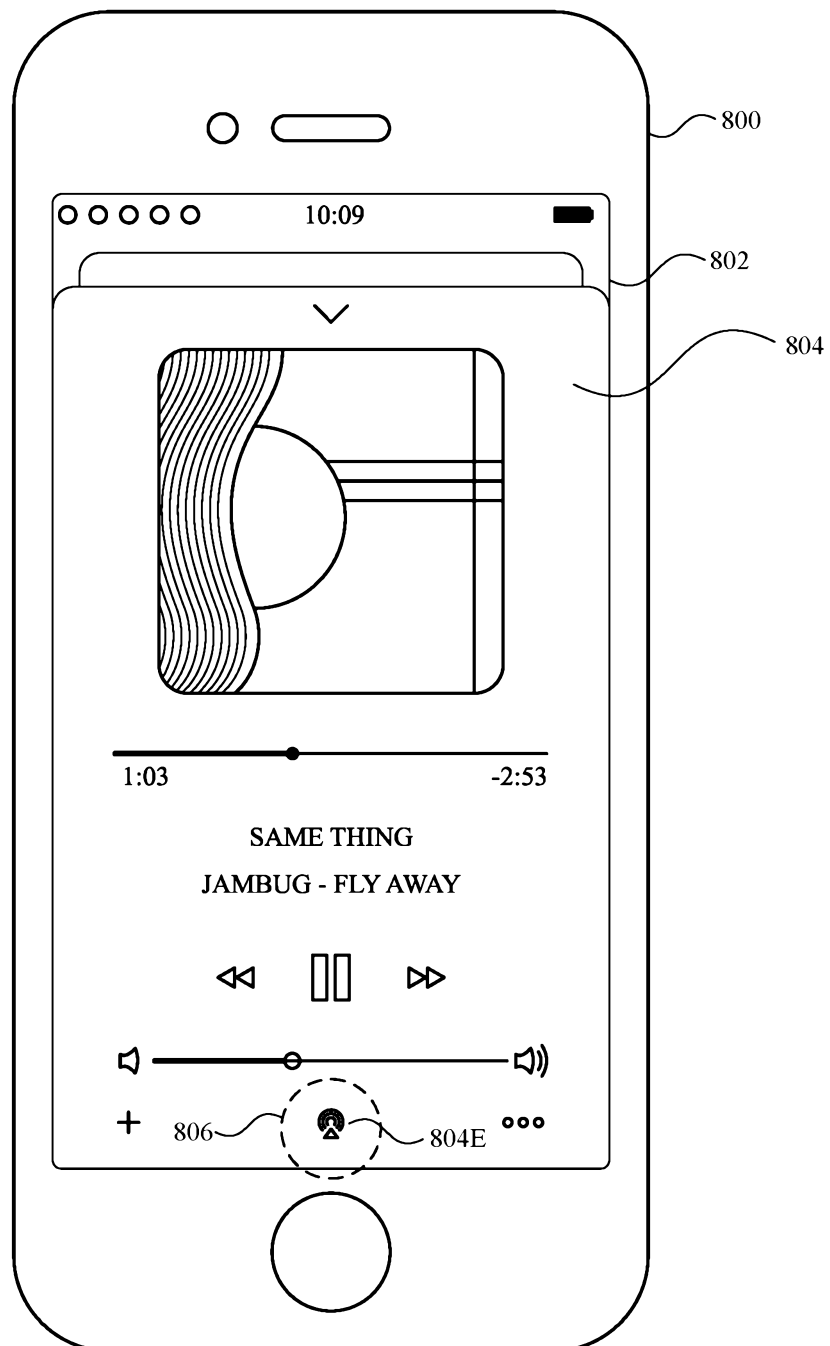


FIG. 6AR

**FIG. 7**

**FIG. 8A**

**FIG. 8B**

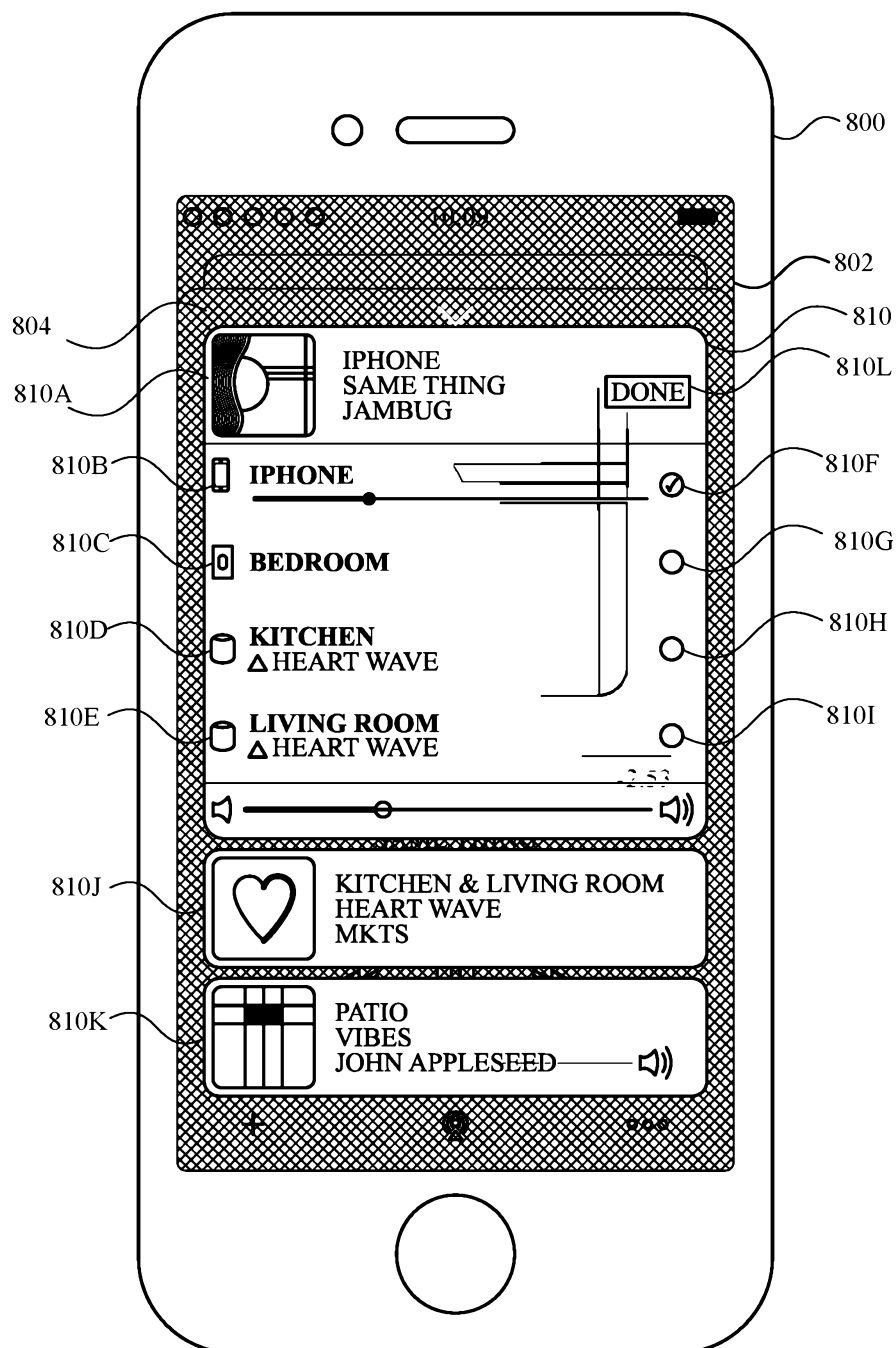


FIG. 8C

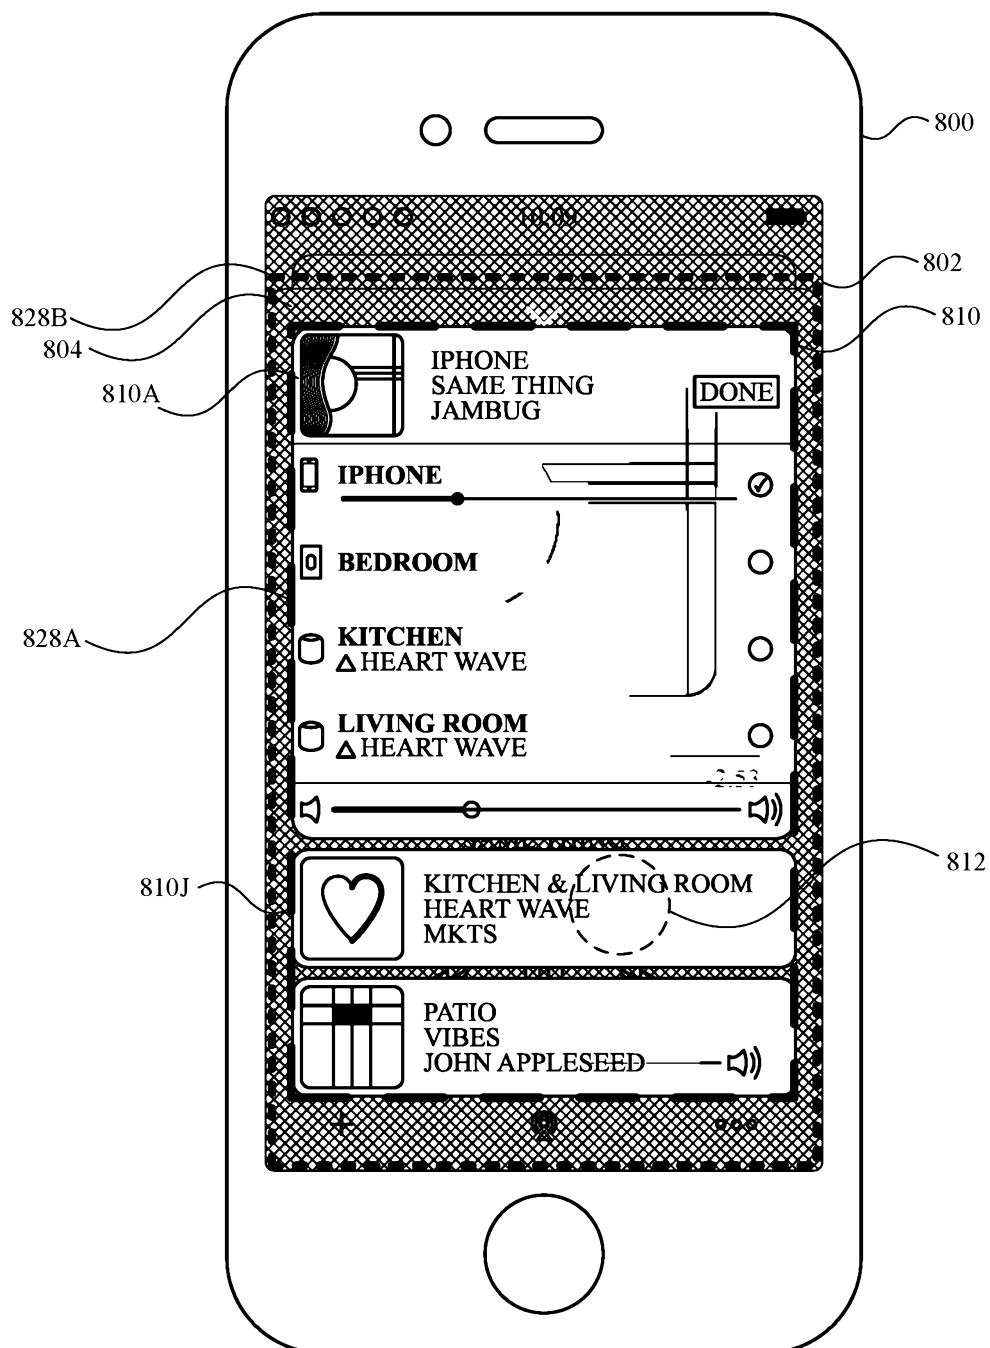


FIG. 8D



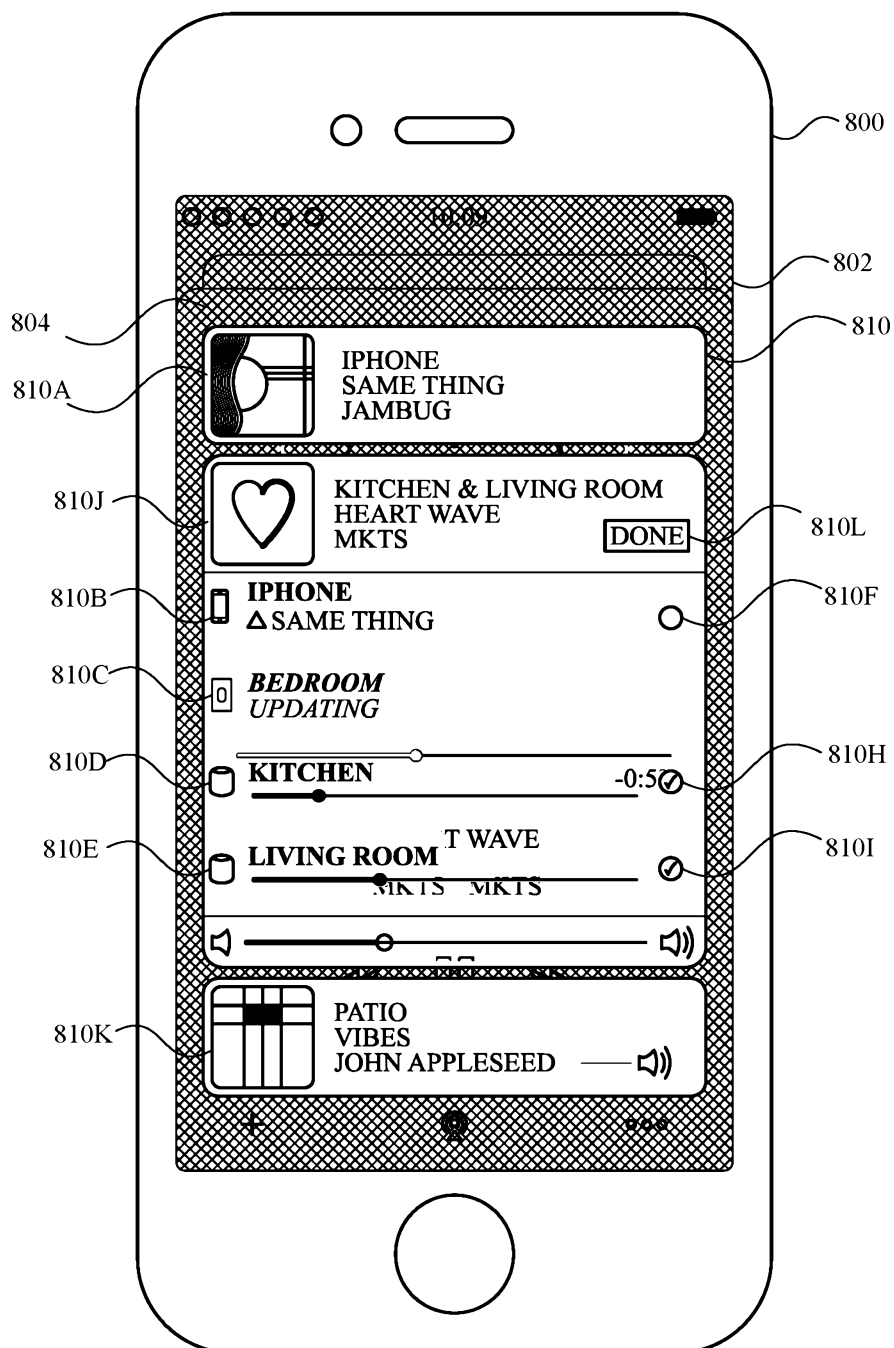


FIG. 8E

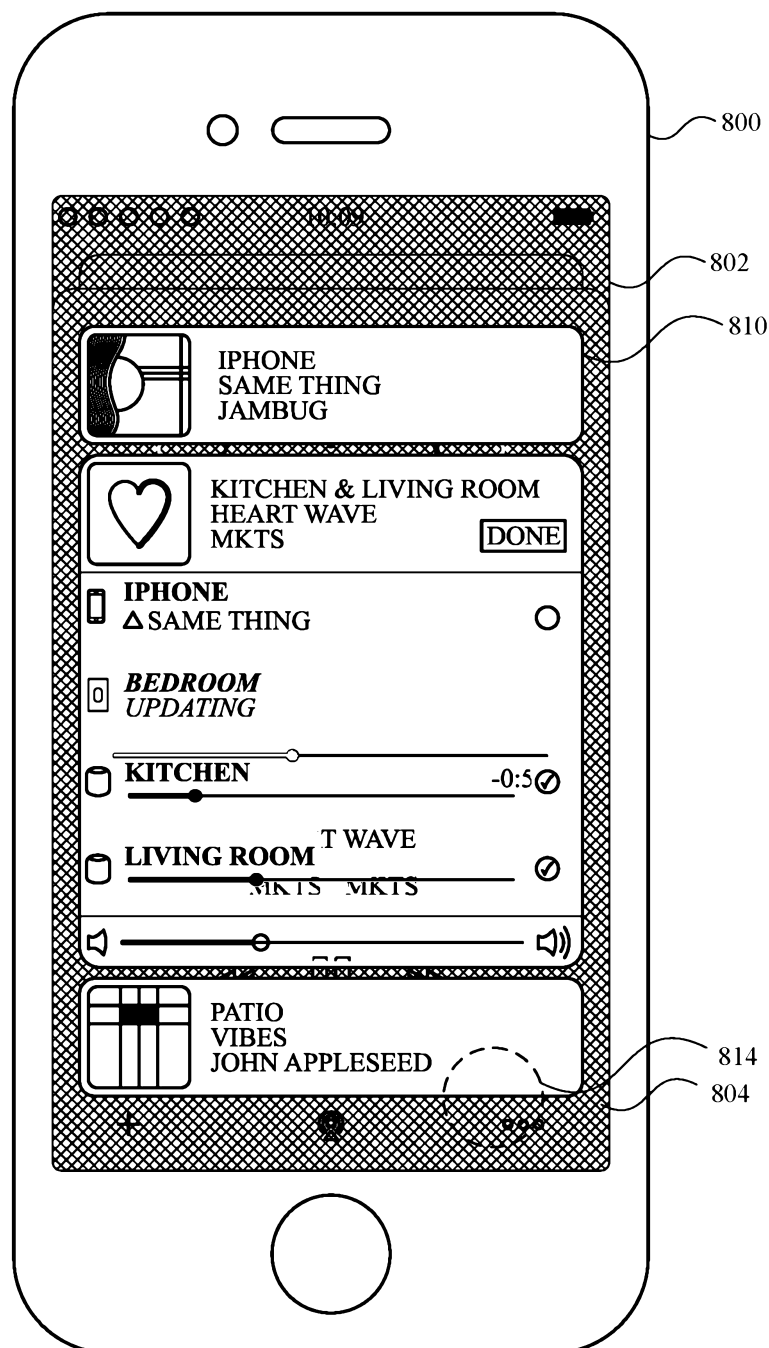
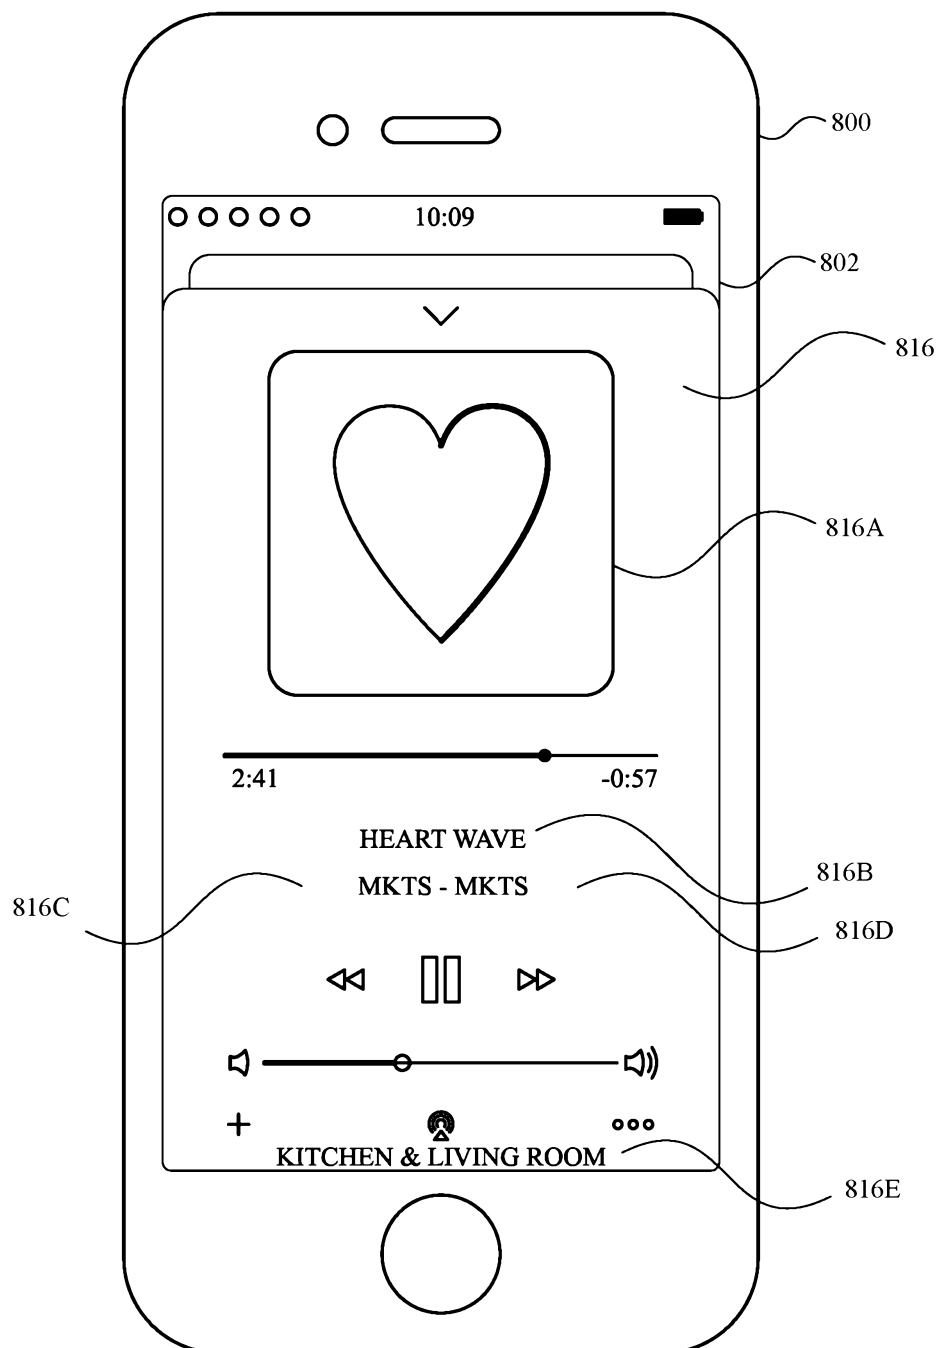
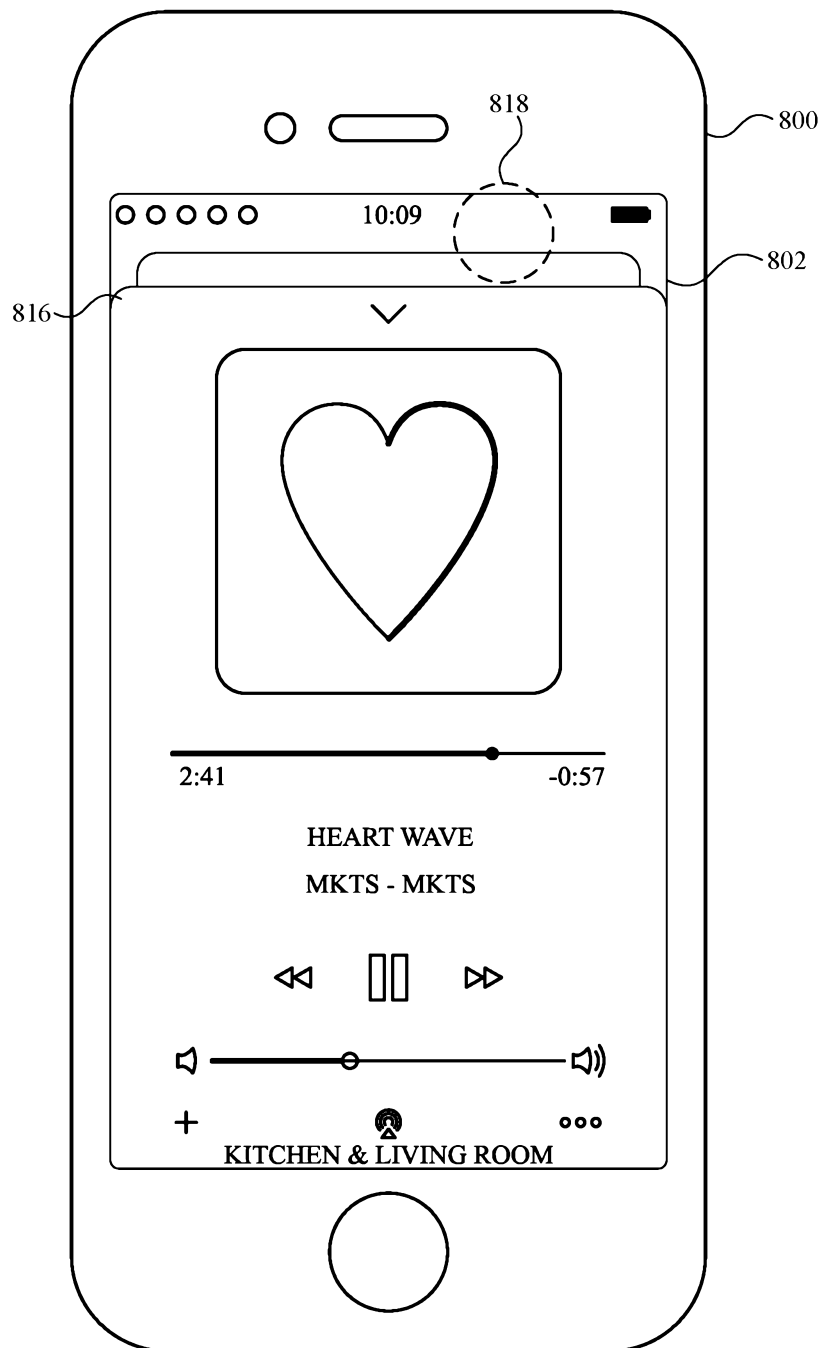


FIG. 8F

**FIG. 8G**

*FIG. 8H*

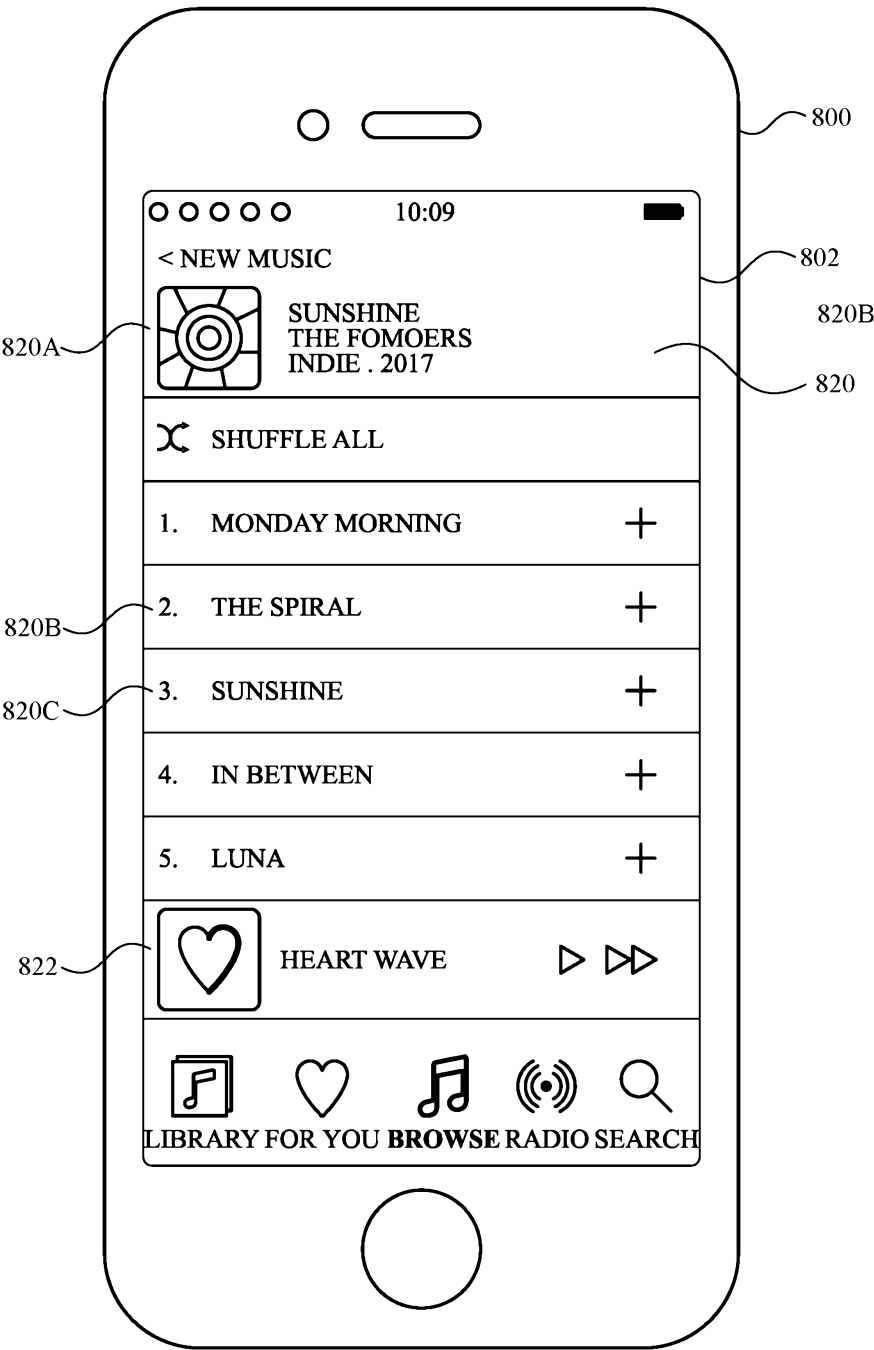


FIG. 8I

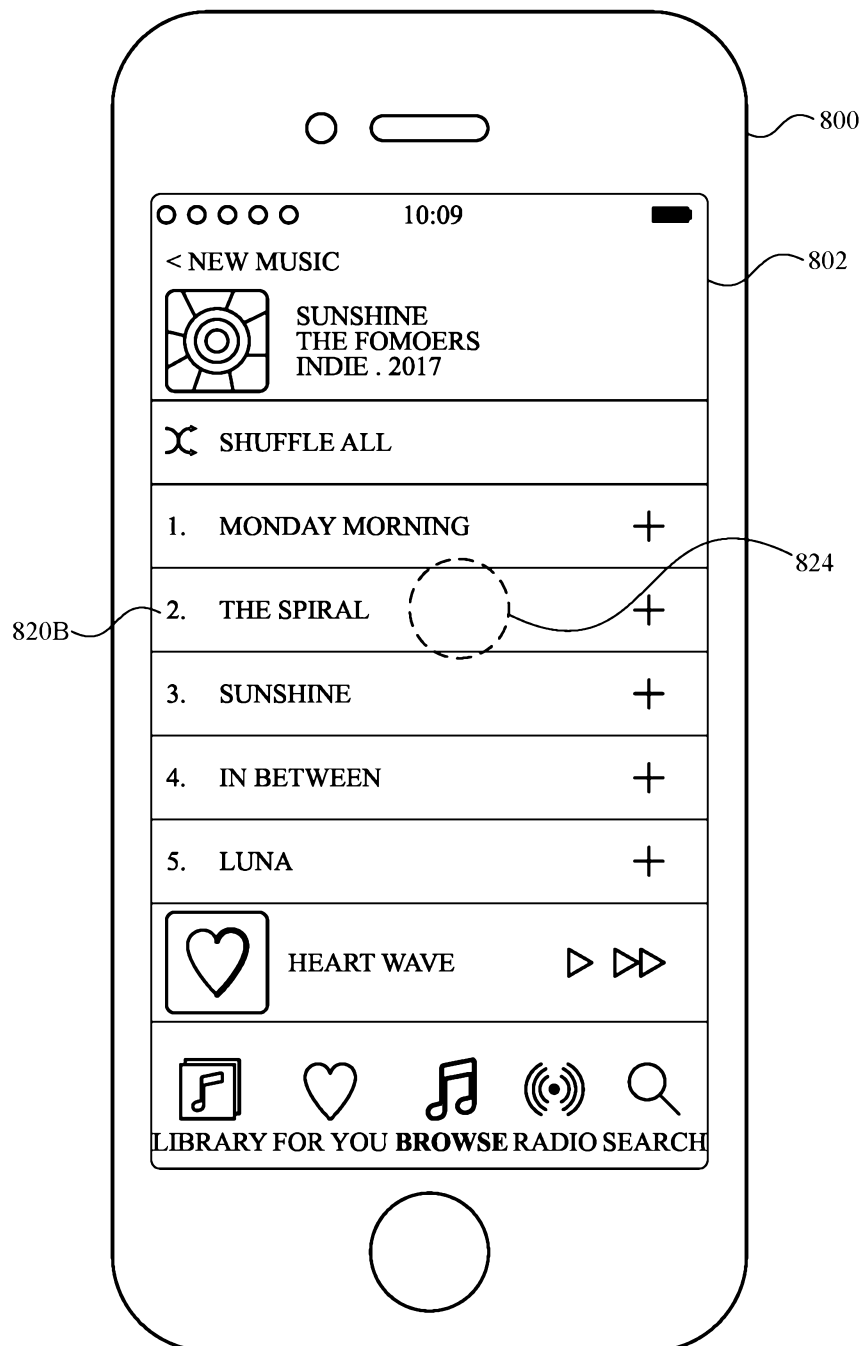
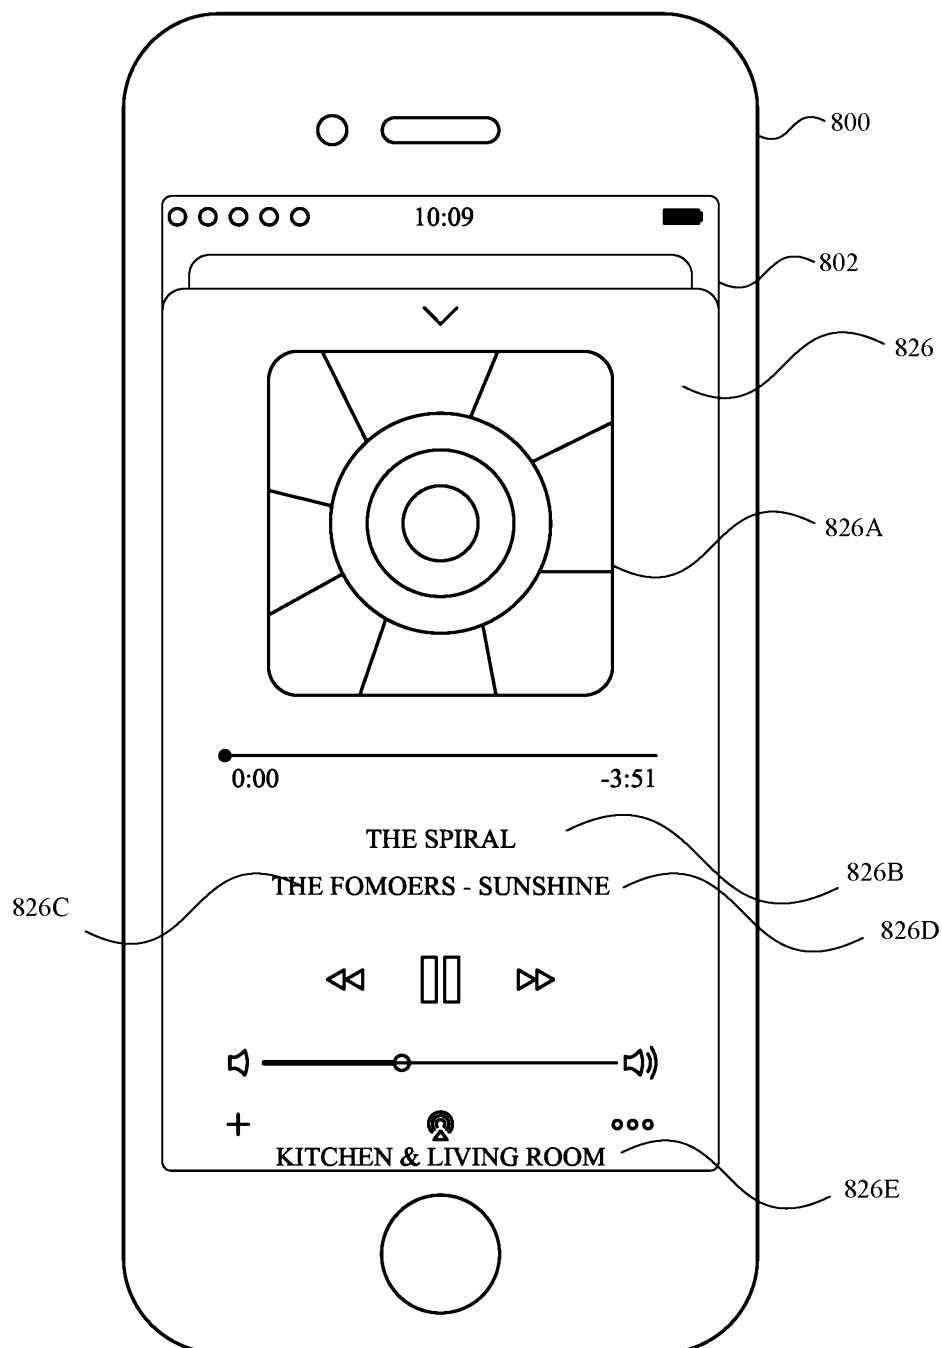


FIG. 8J

**FIG. 8K**

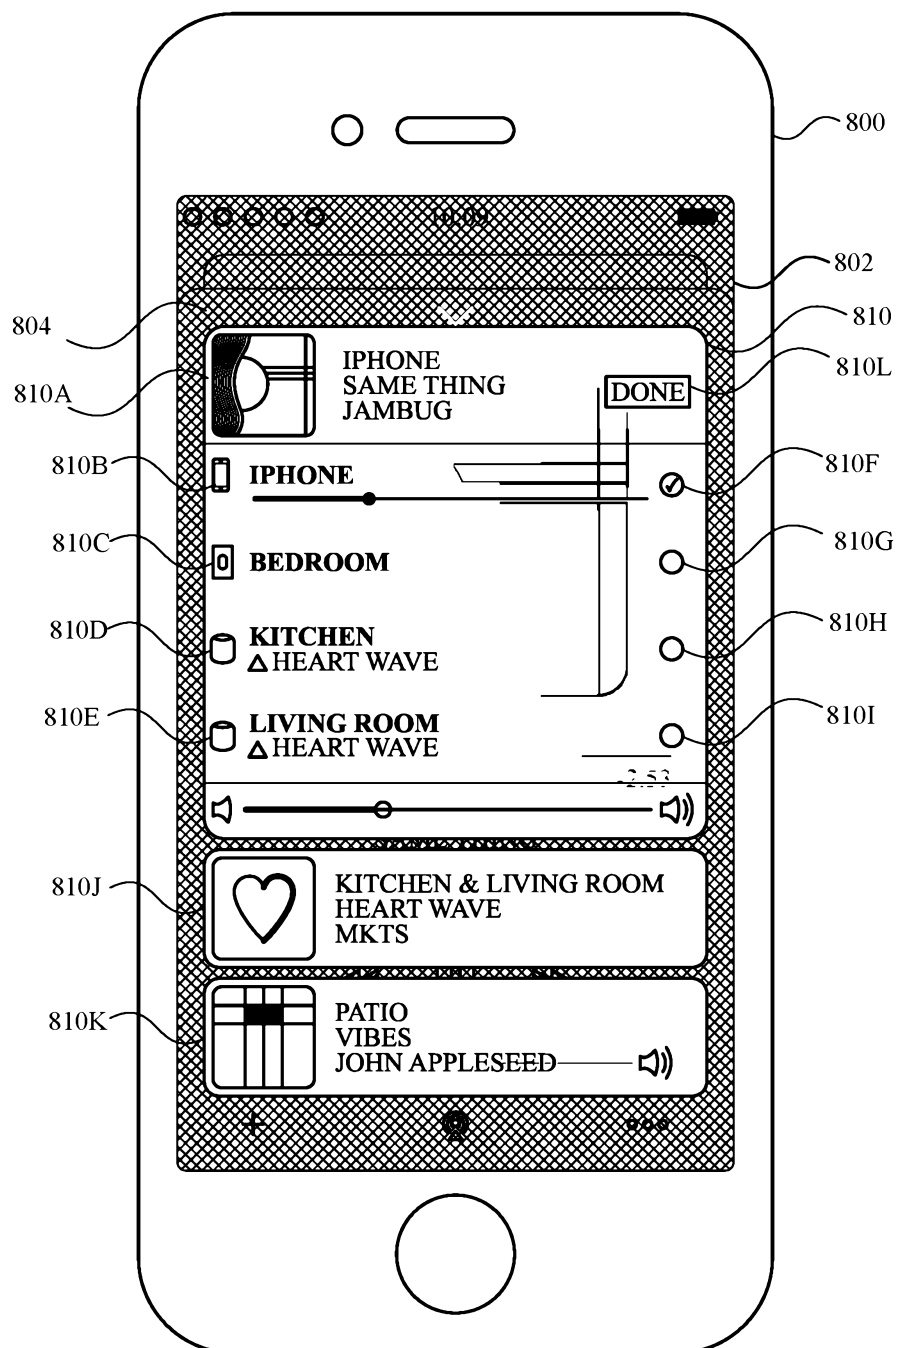


FIG. 8L



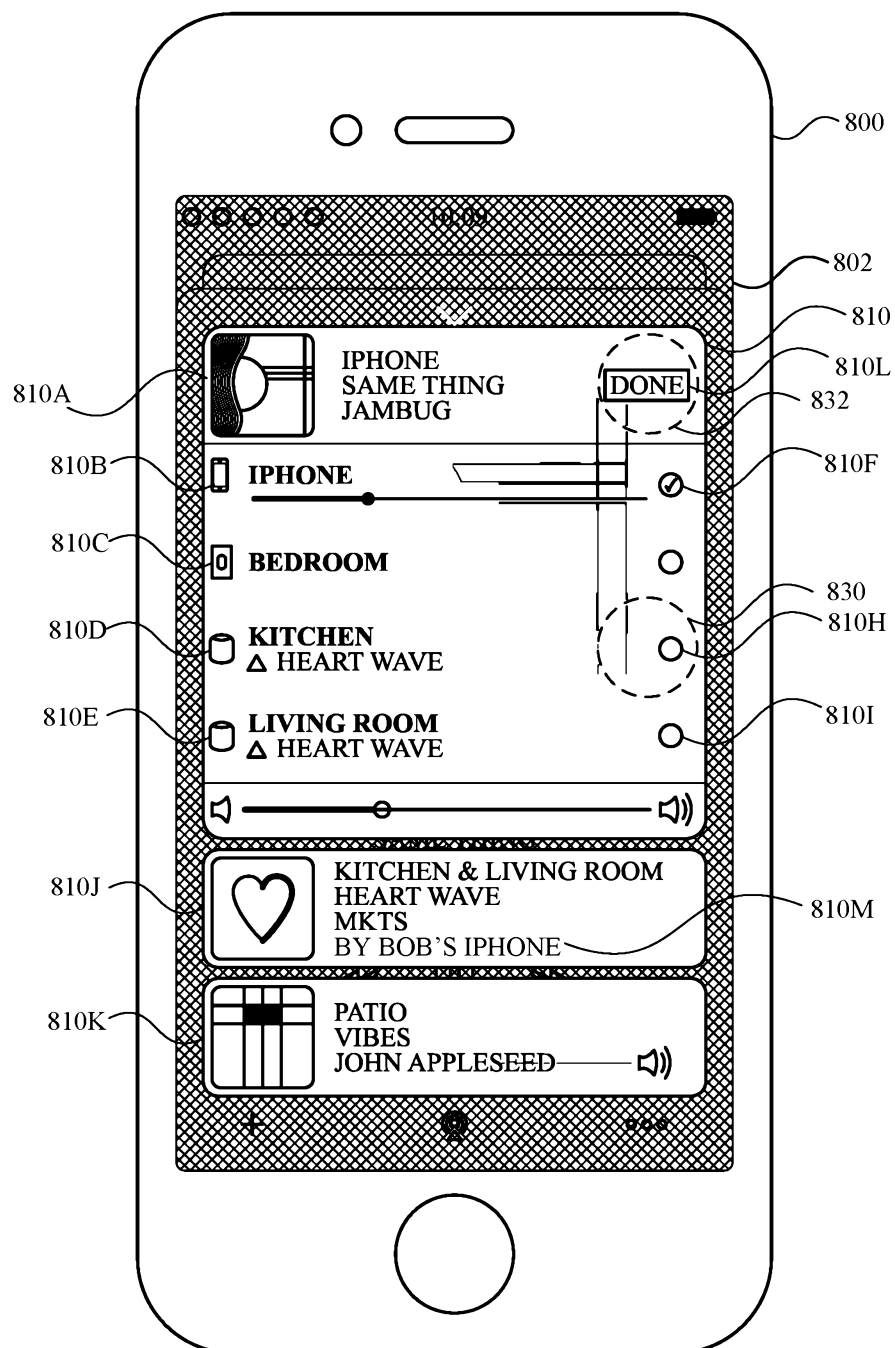


FIG. 8M

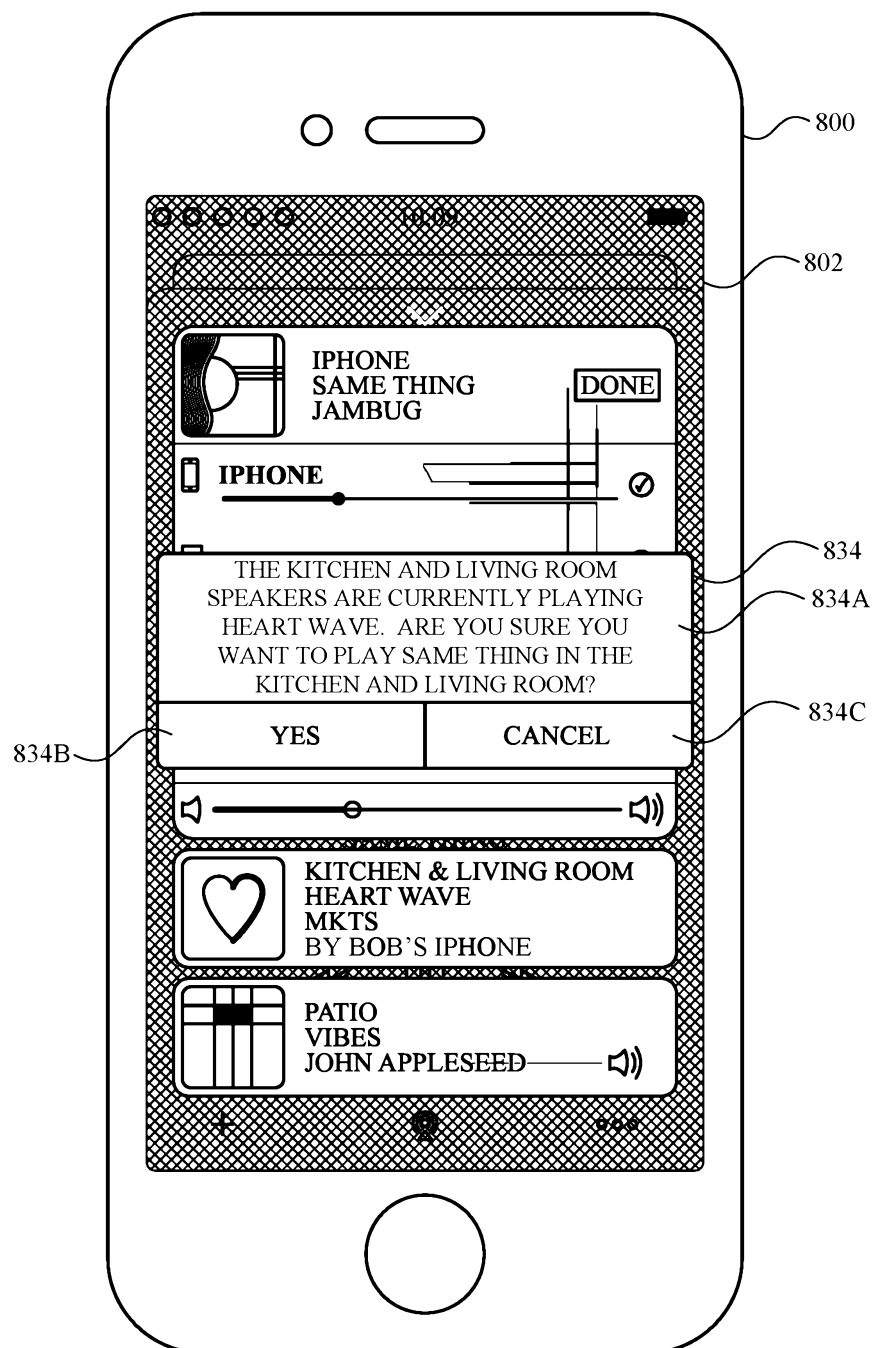


FIG. 8N

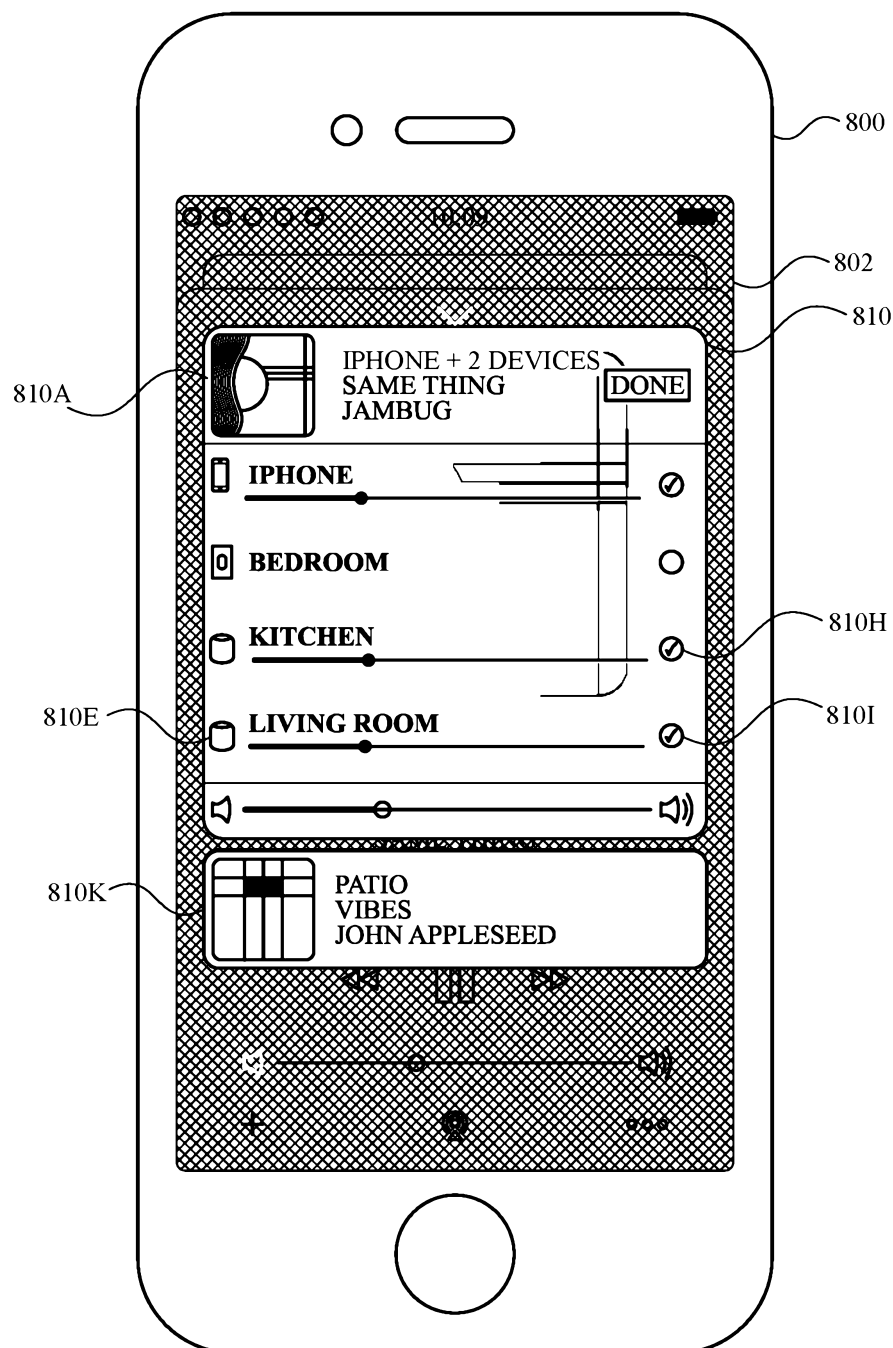


FIG. 80

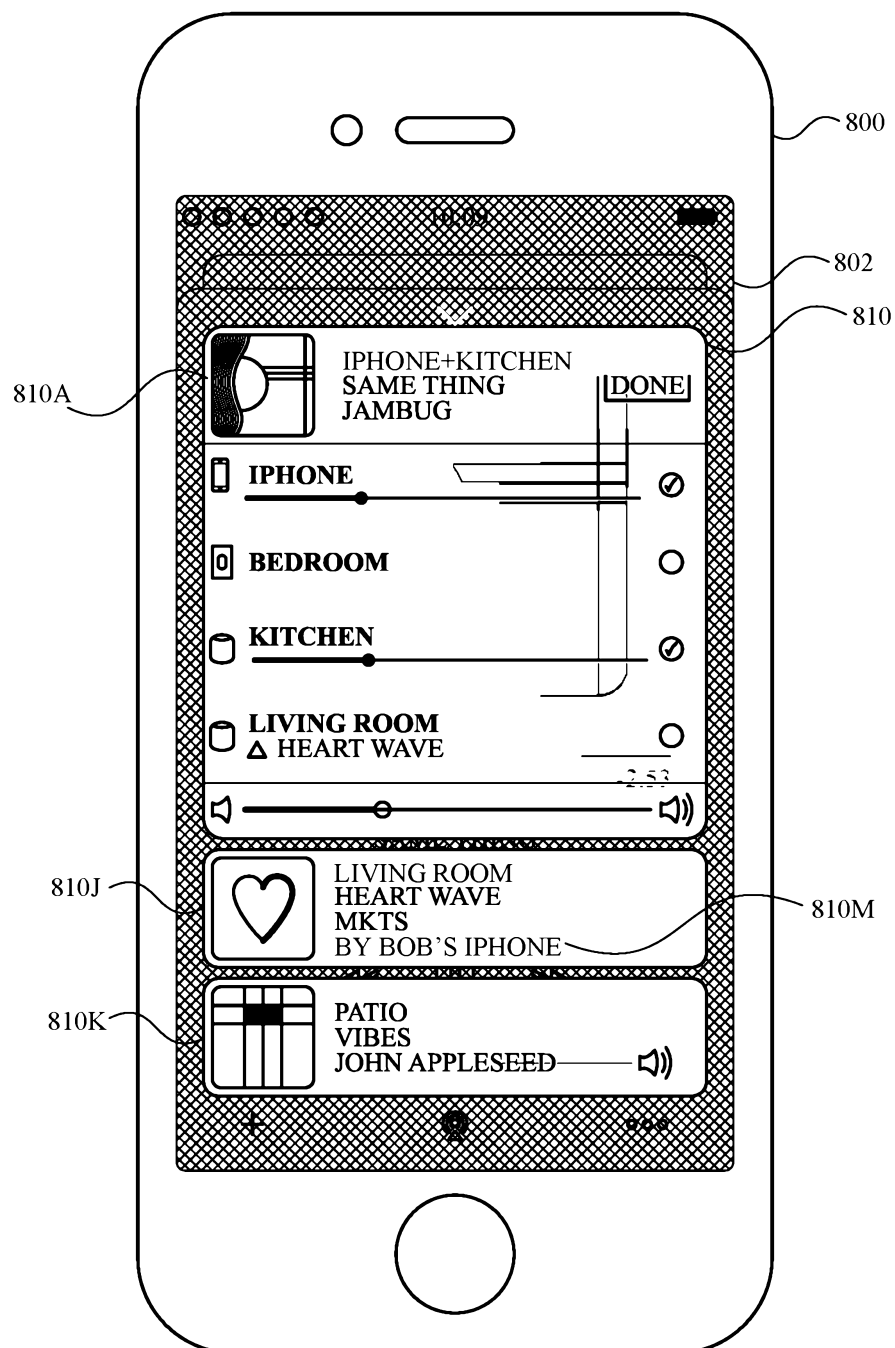
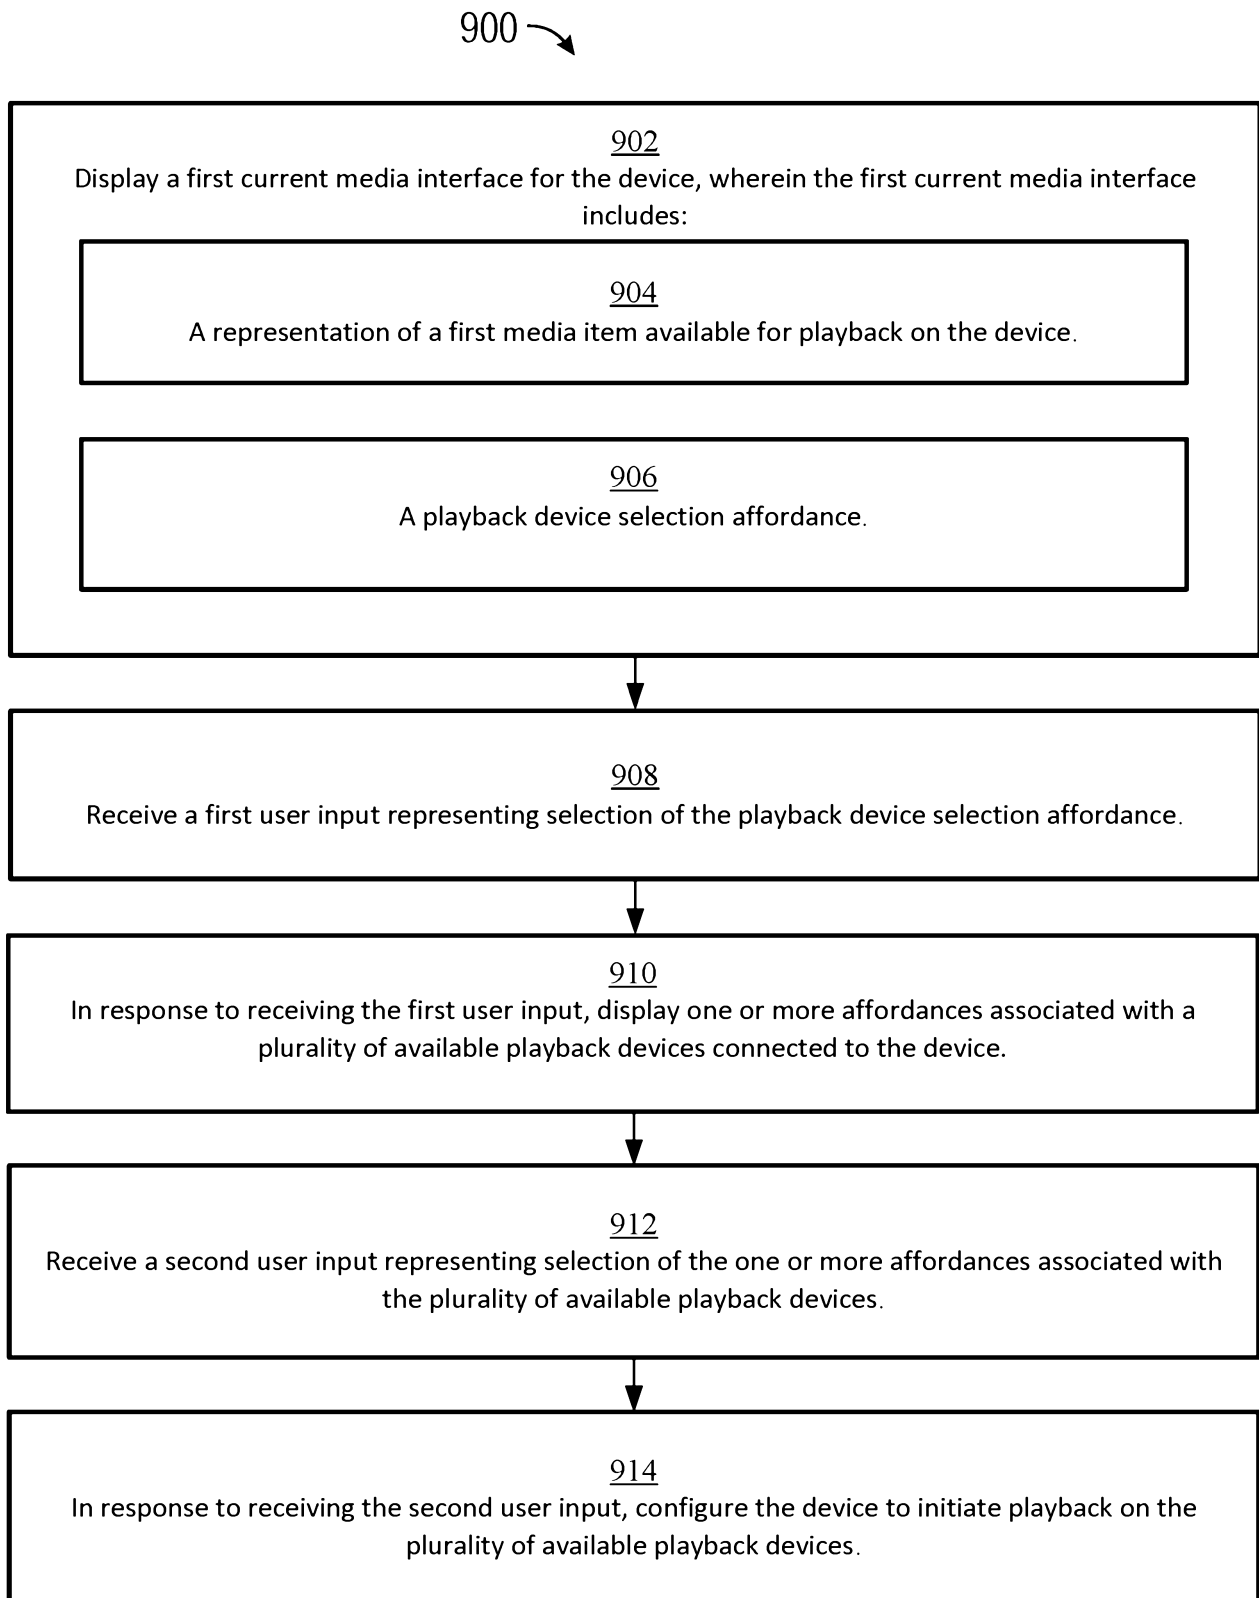
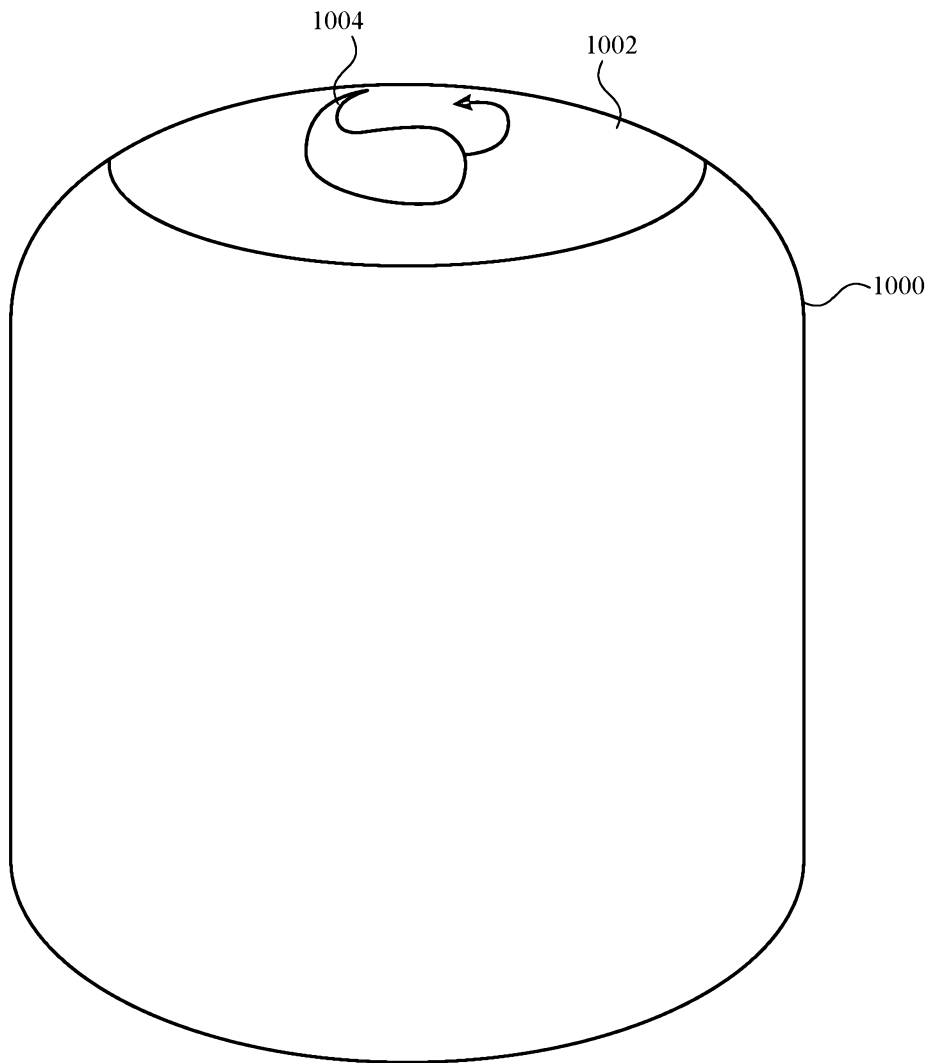
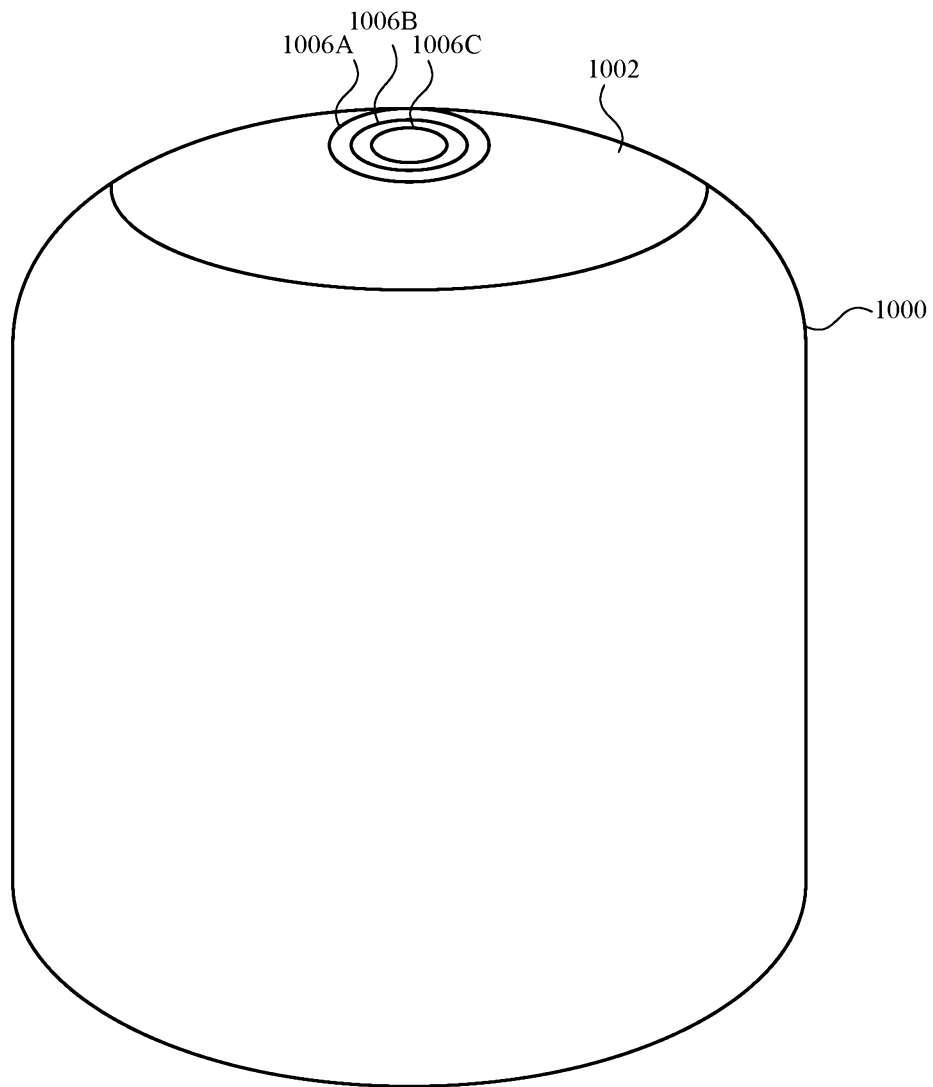
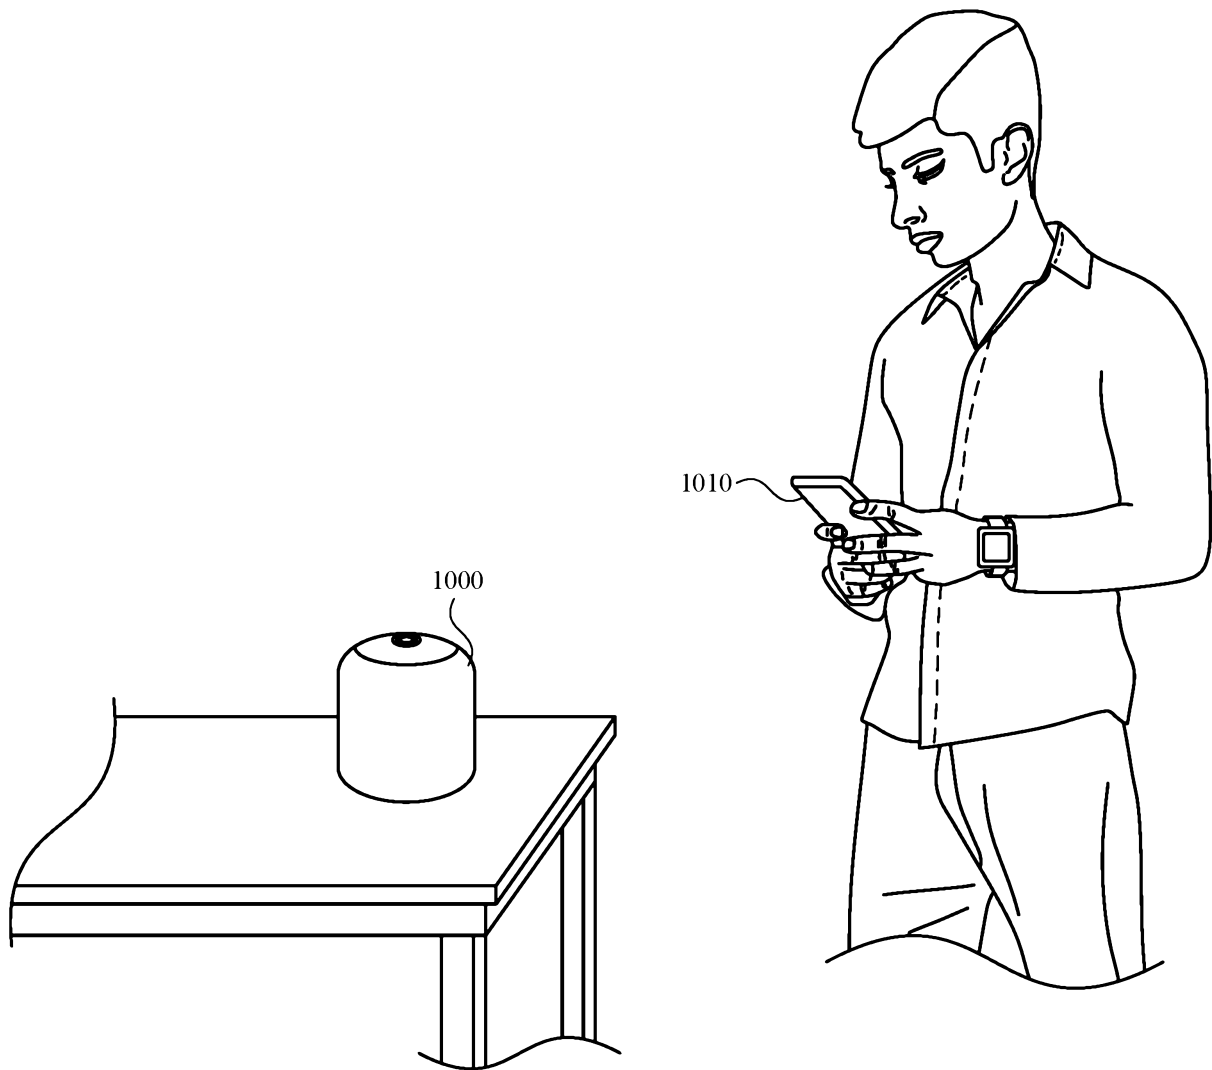


FIG. 8P

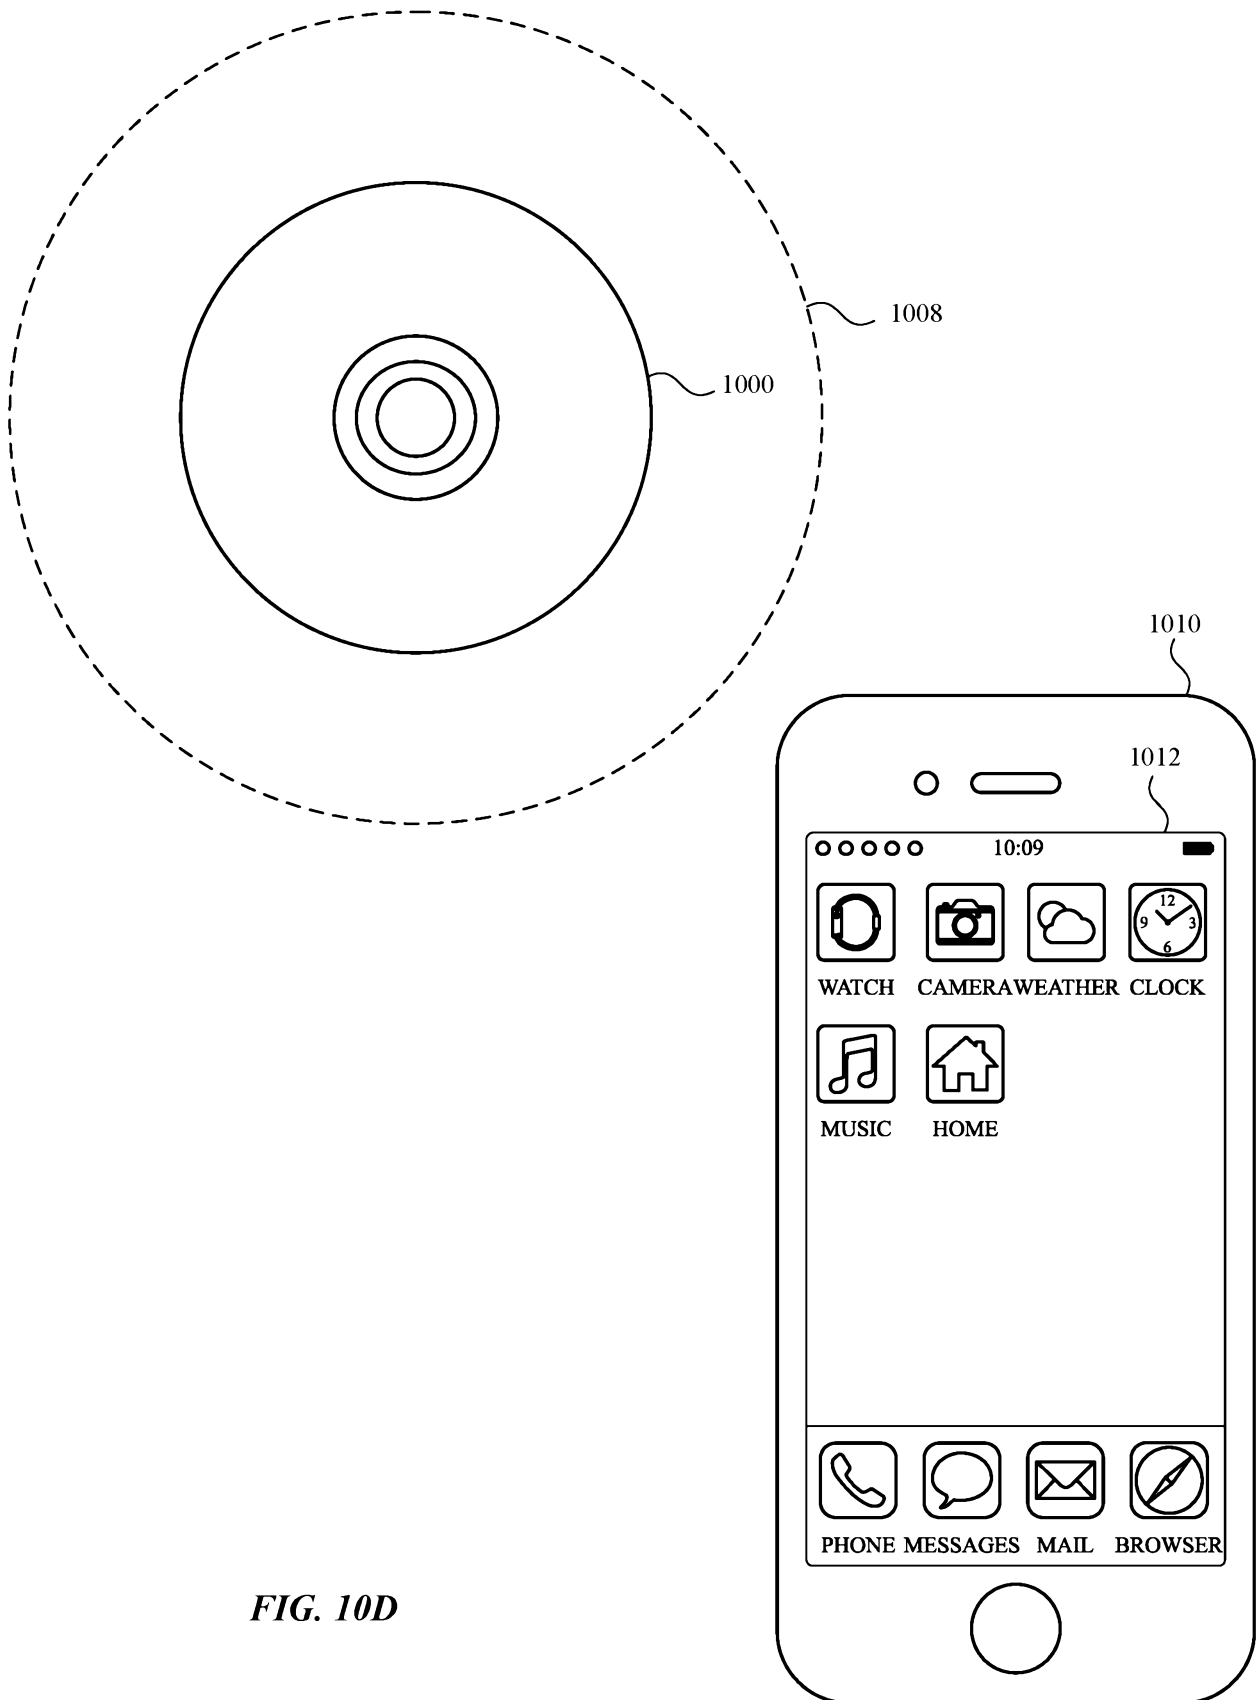
**FIG. 9**

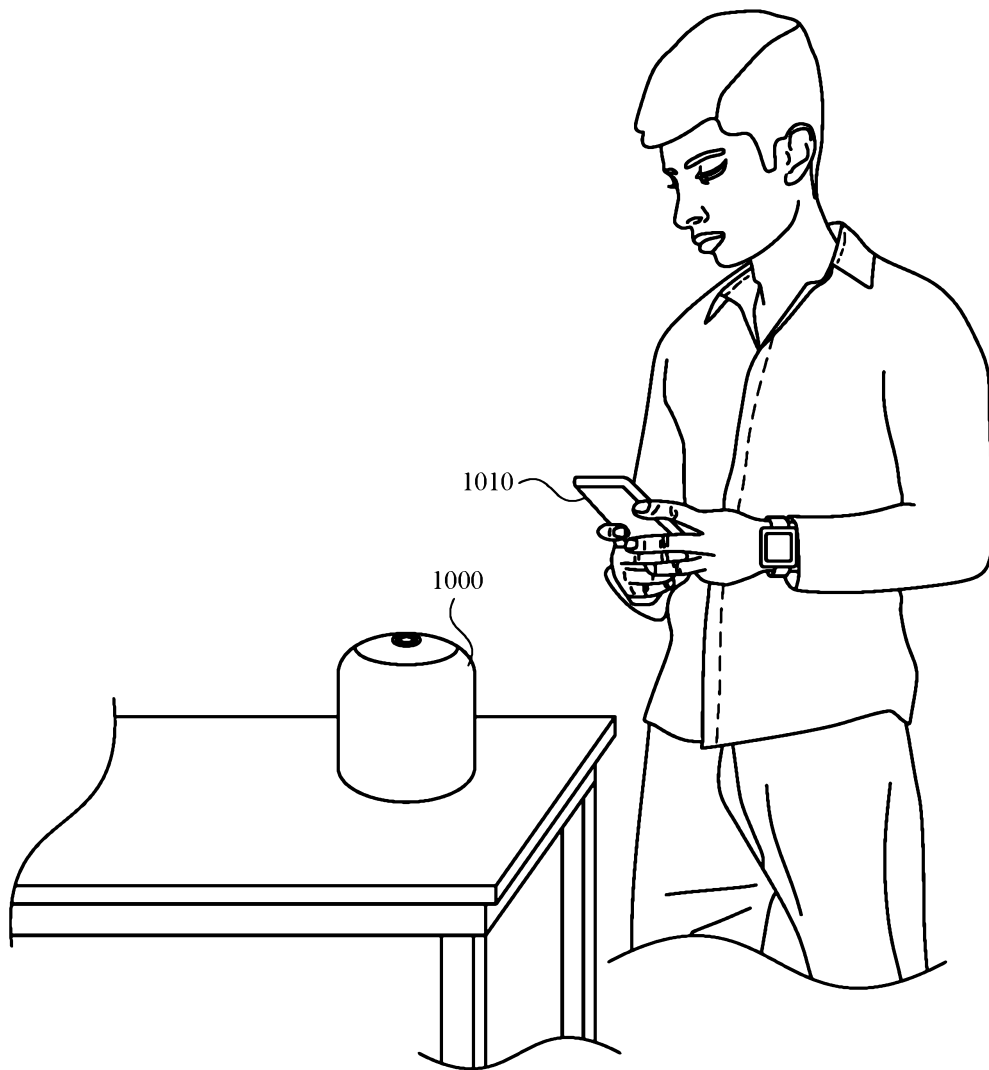
**FIG. 10A**

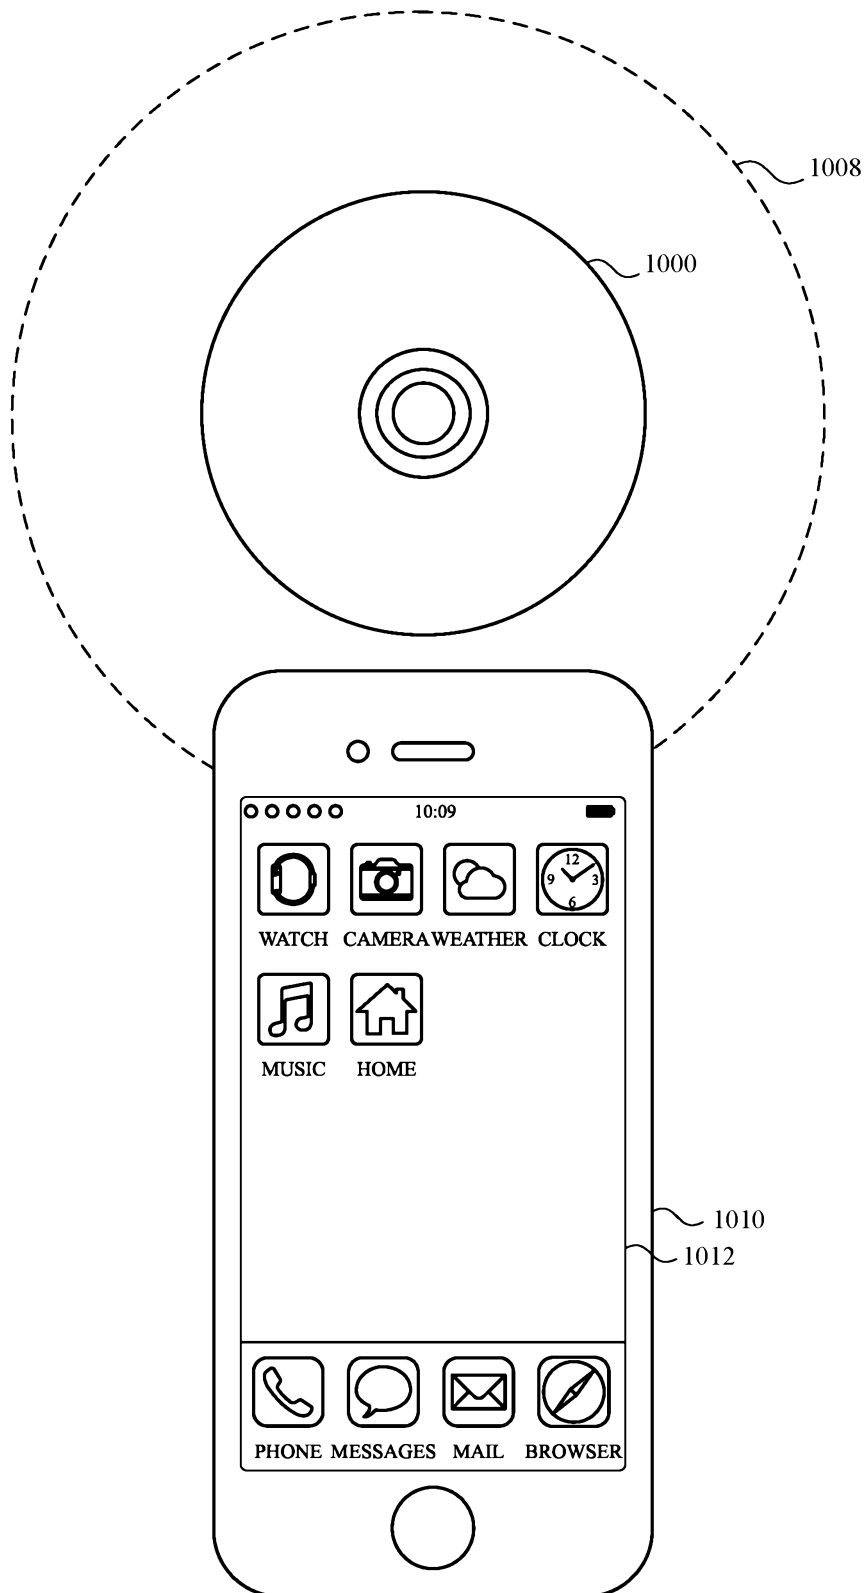
**FIG. 10B**

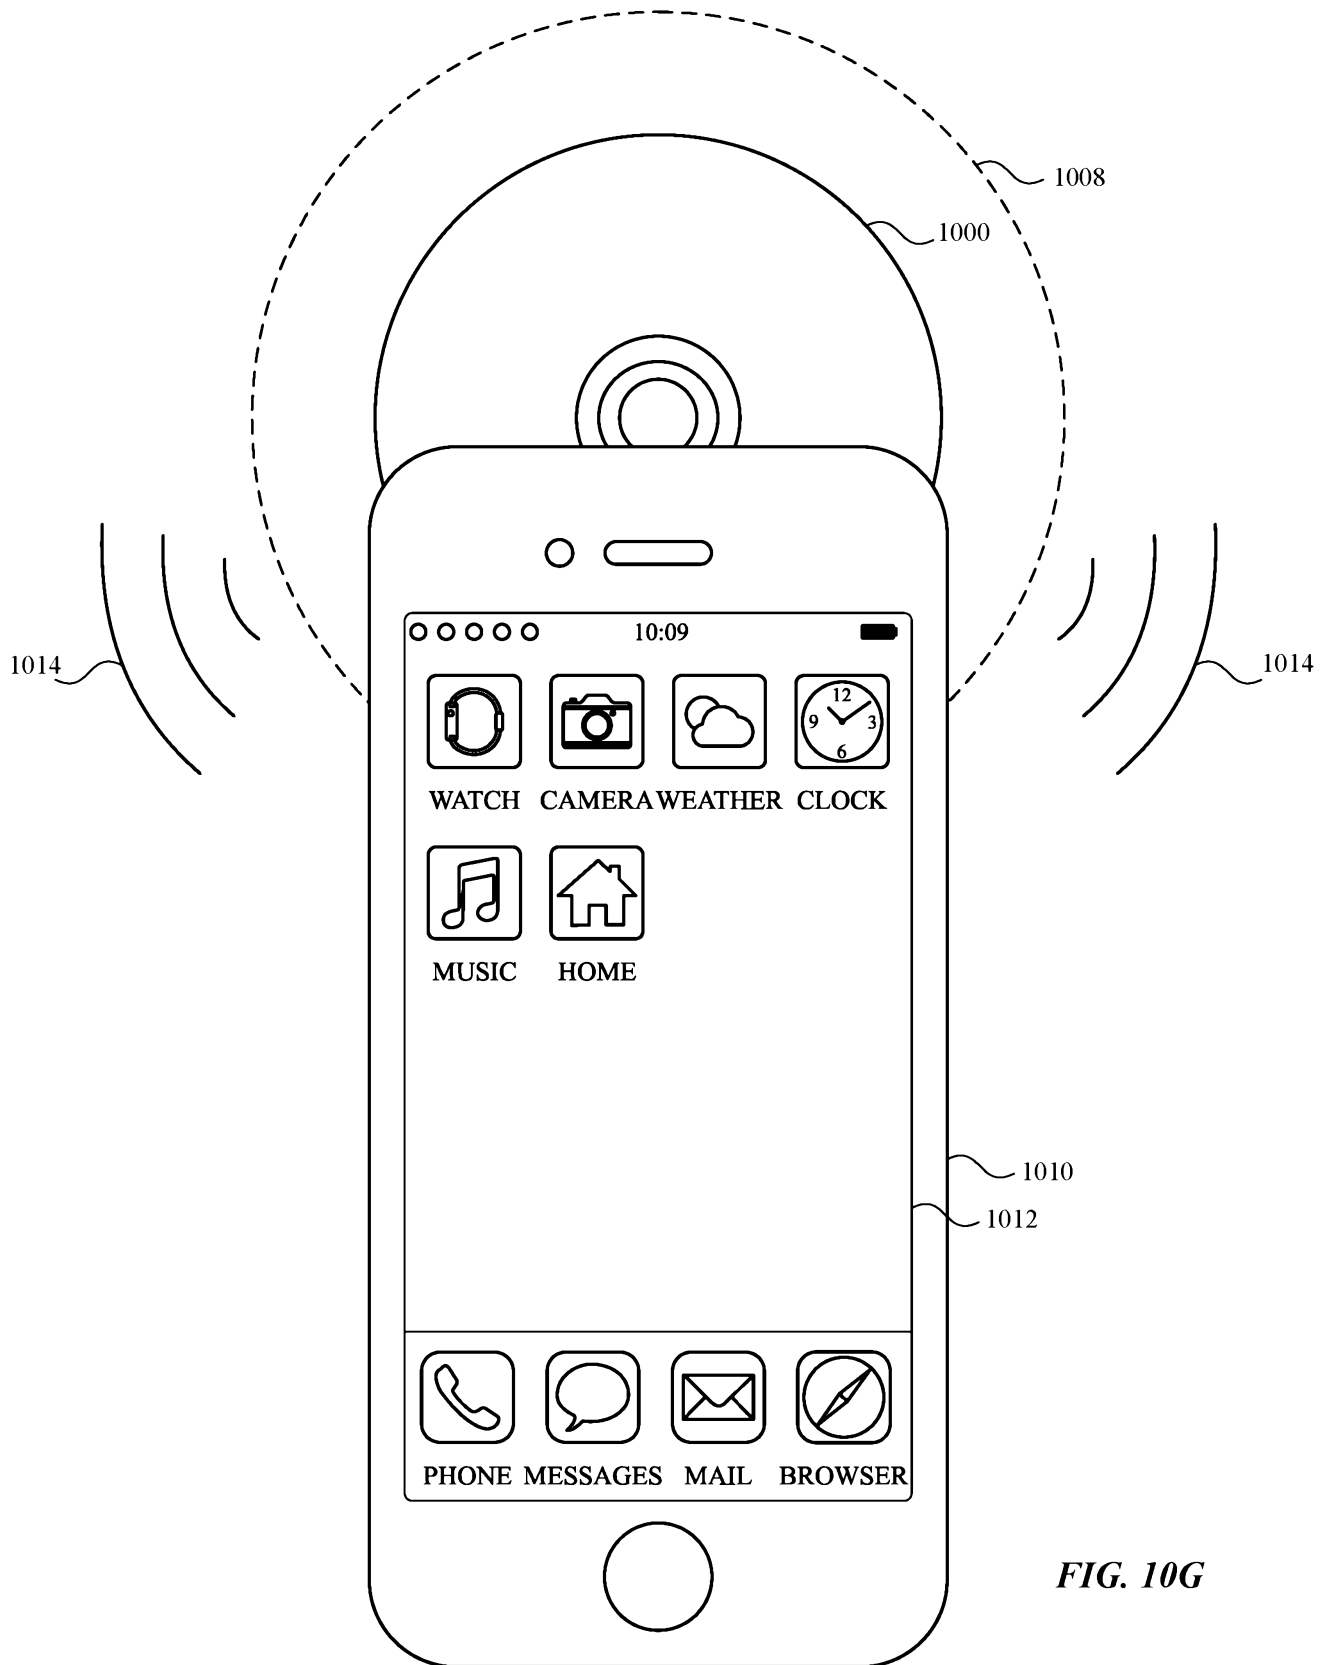
*FIG. 10C*

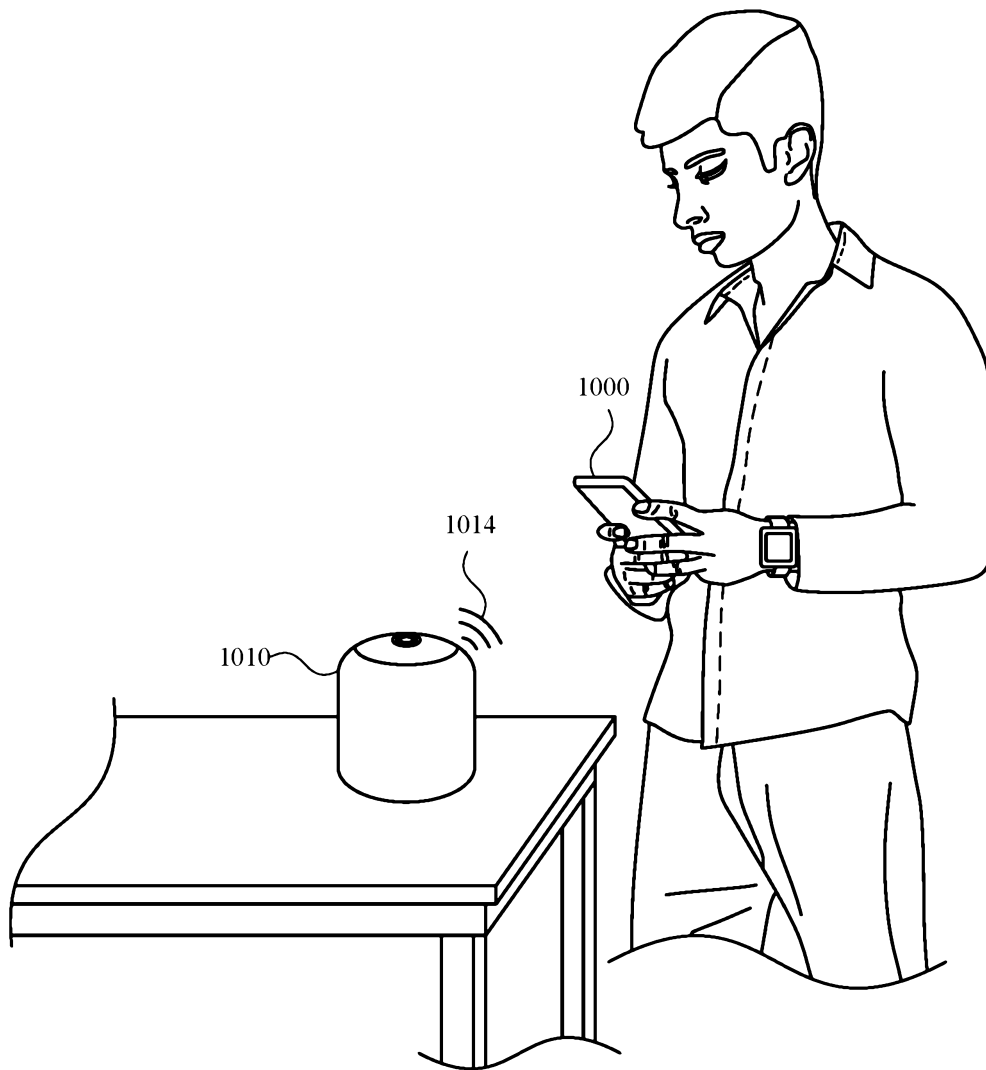


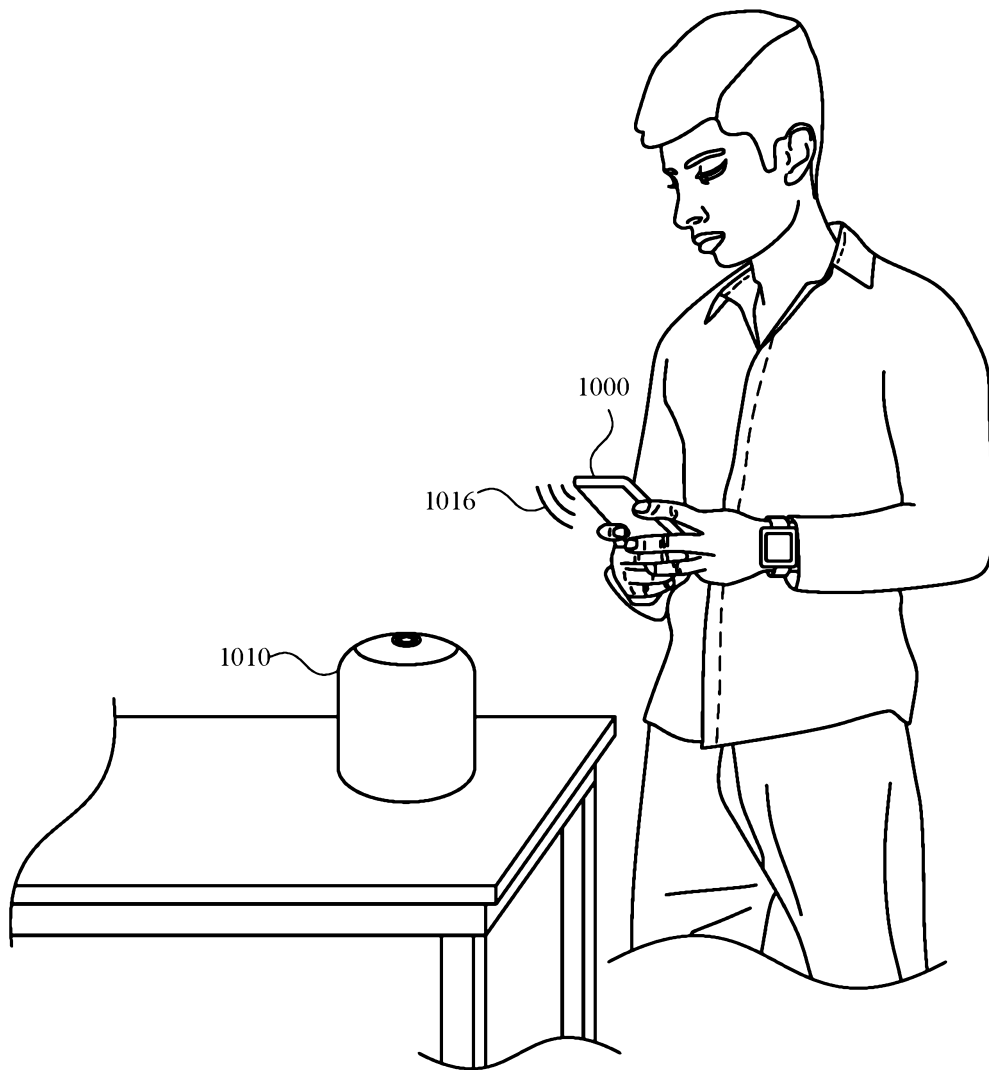
**FIG. 10D**

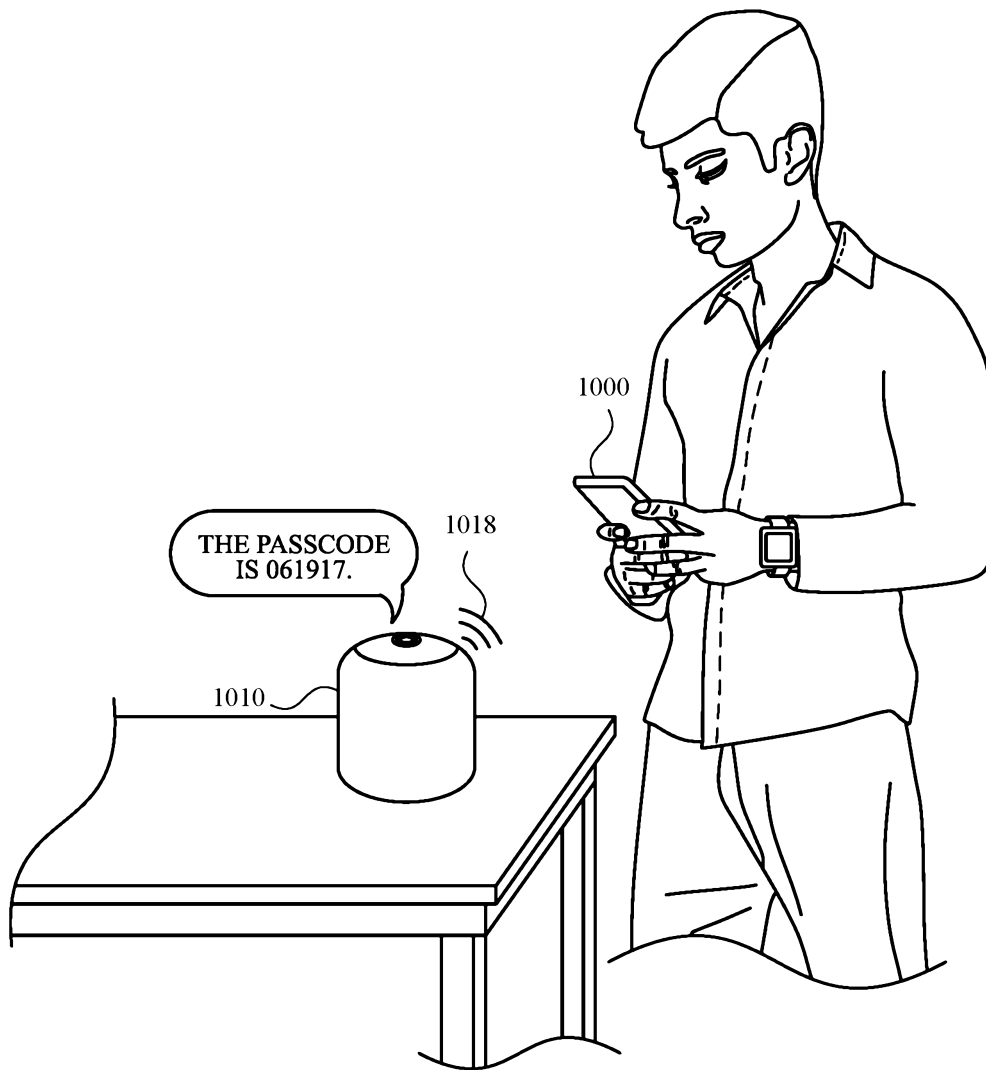
**FIG. 10E**

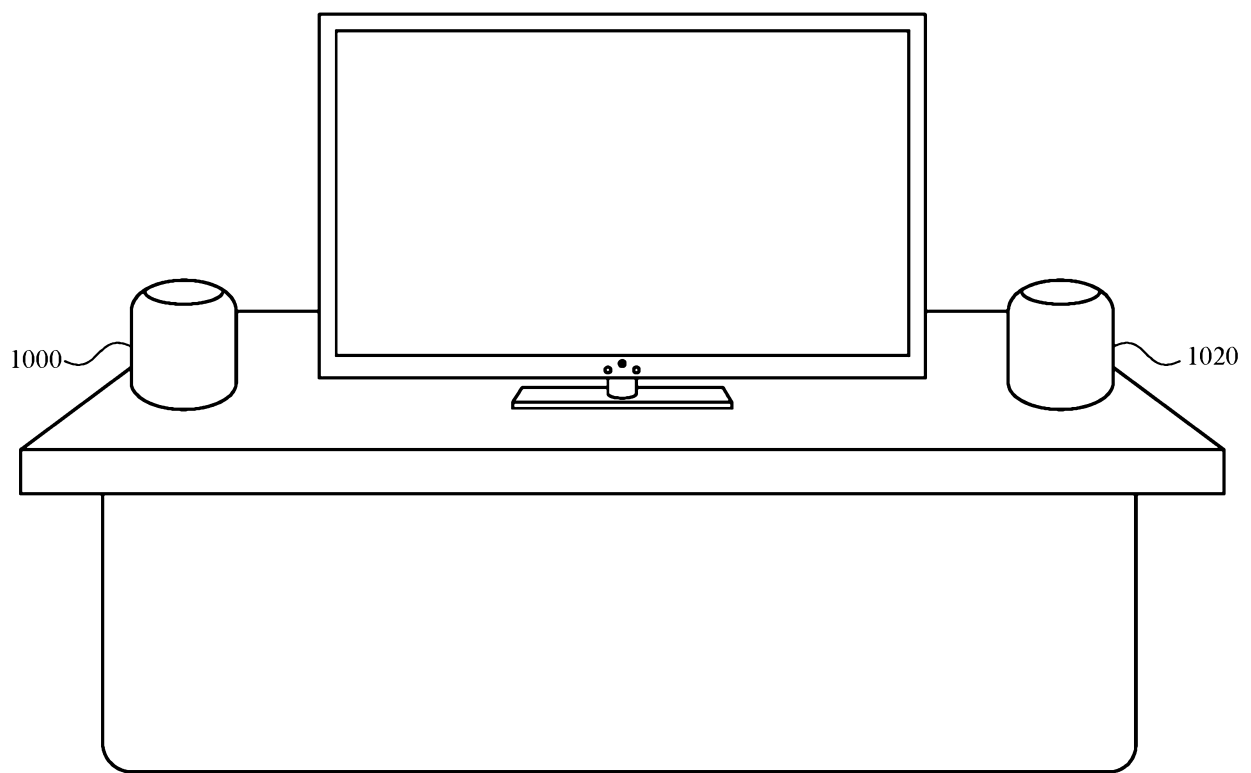
**FIG. 10F**

**FIG. 10G**

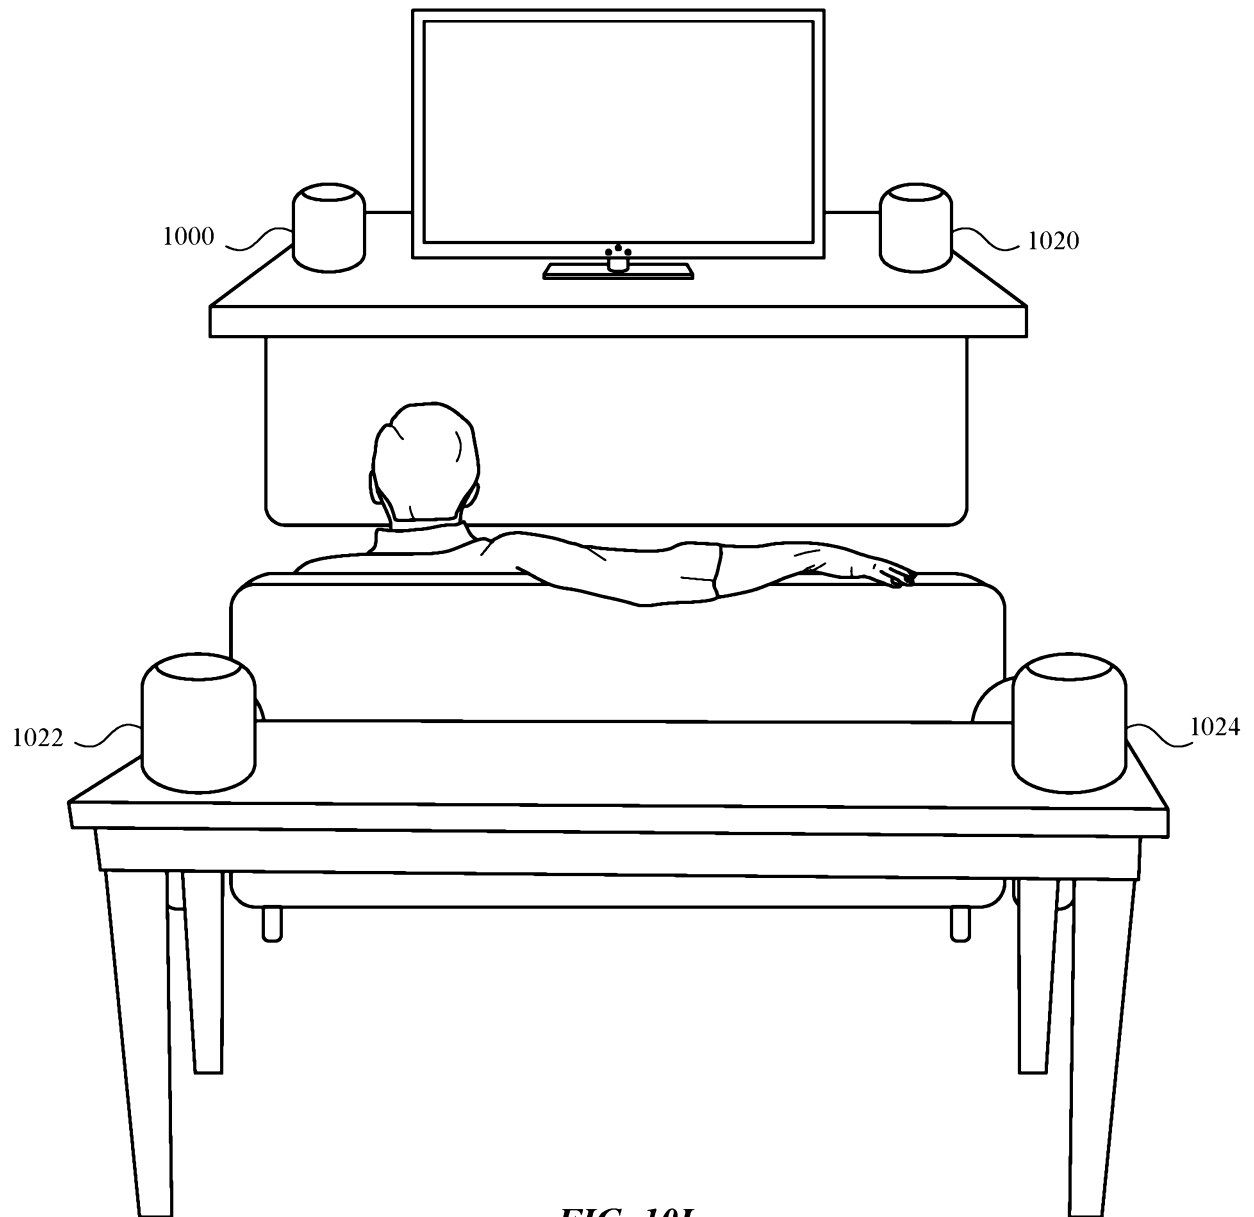
**FIG. 10H**

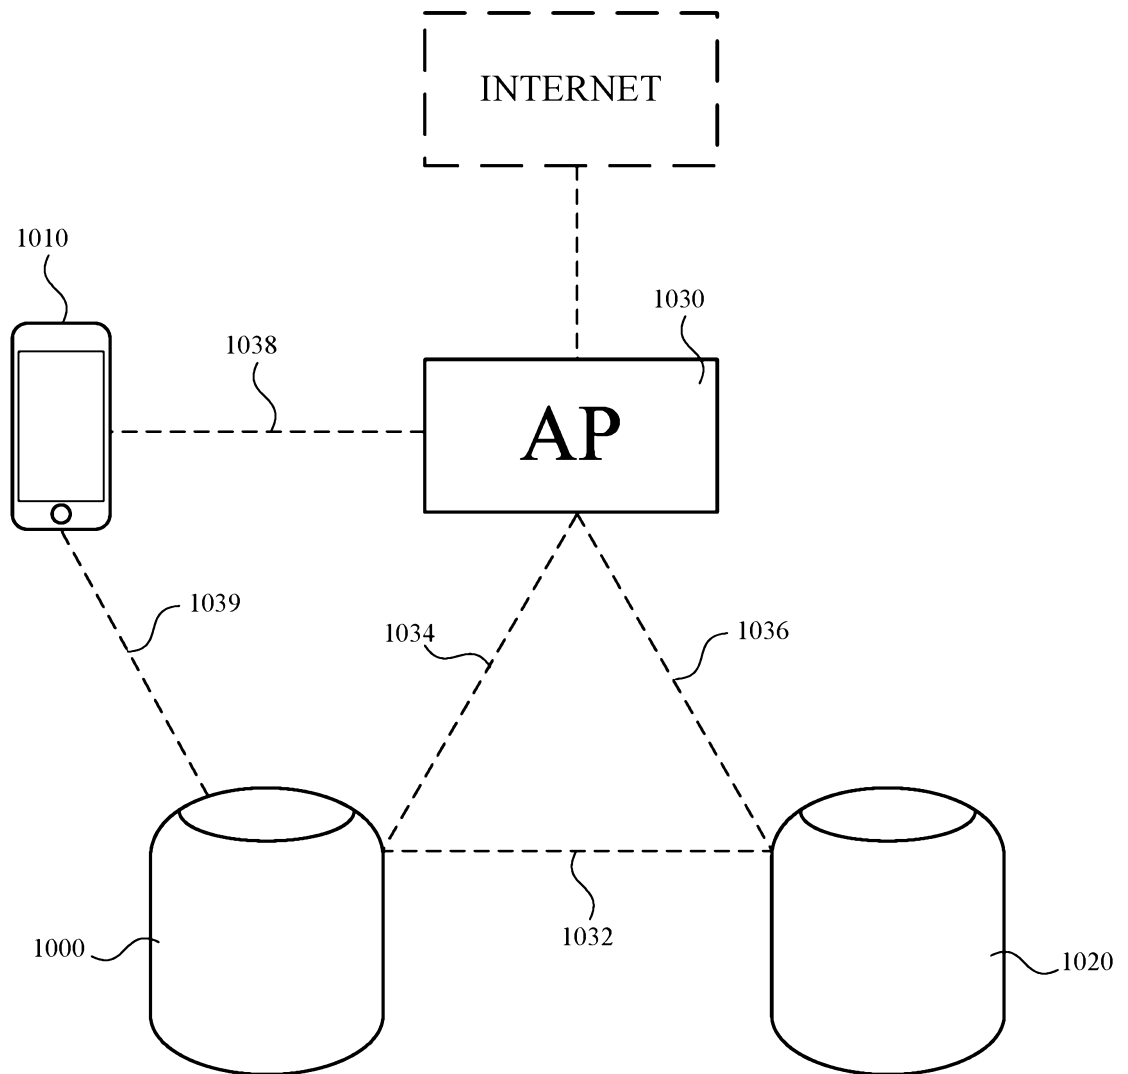
**FIG. 10I**

**FIG. 10J**

**FIG. 10K**



**FIG. 10L**

**FIG. 10M**

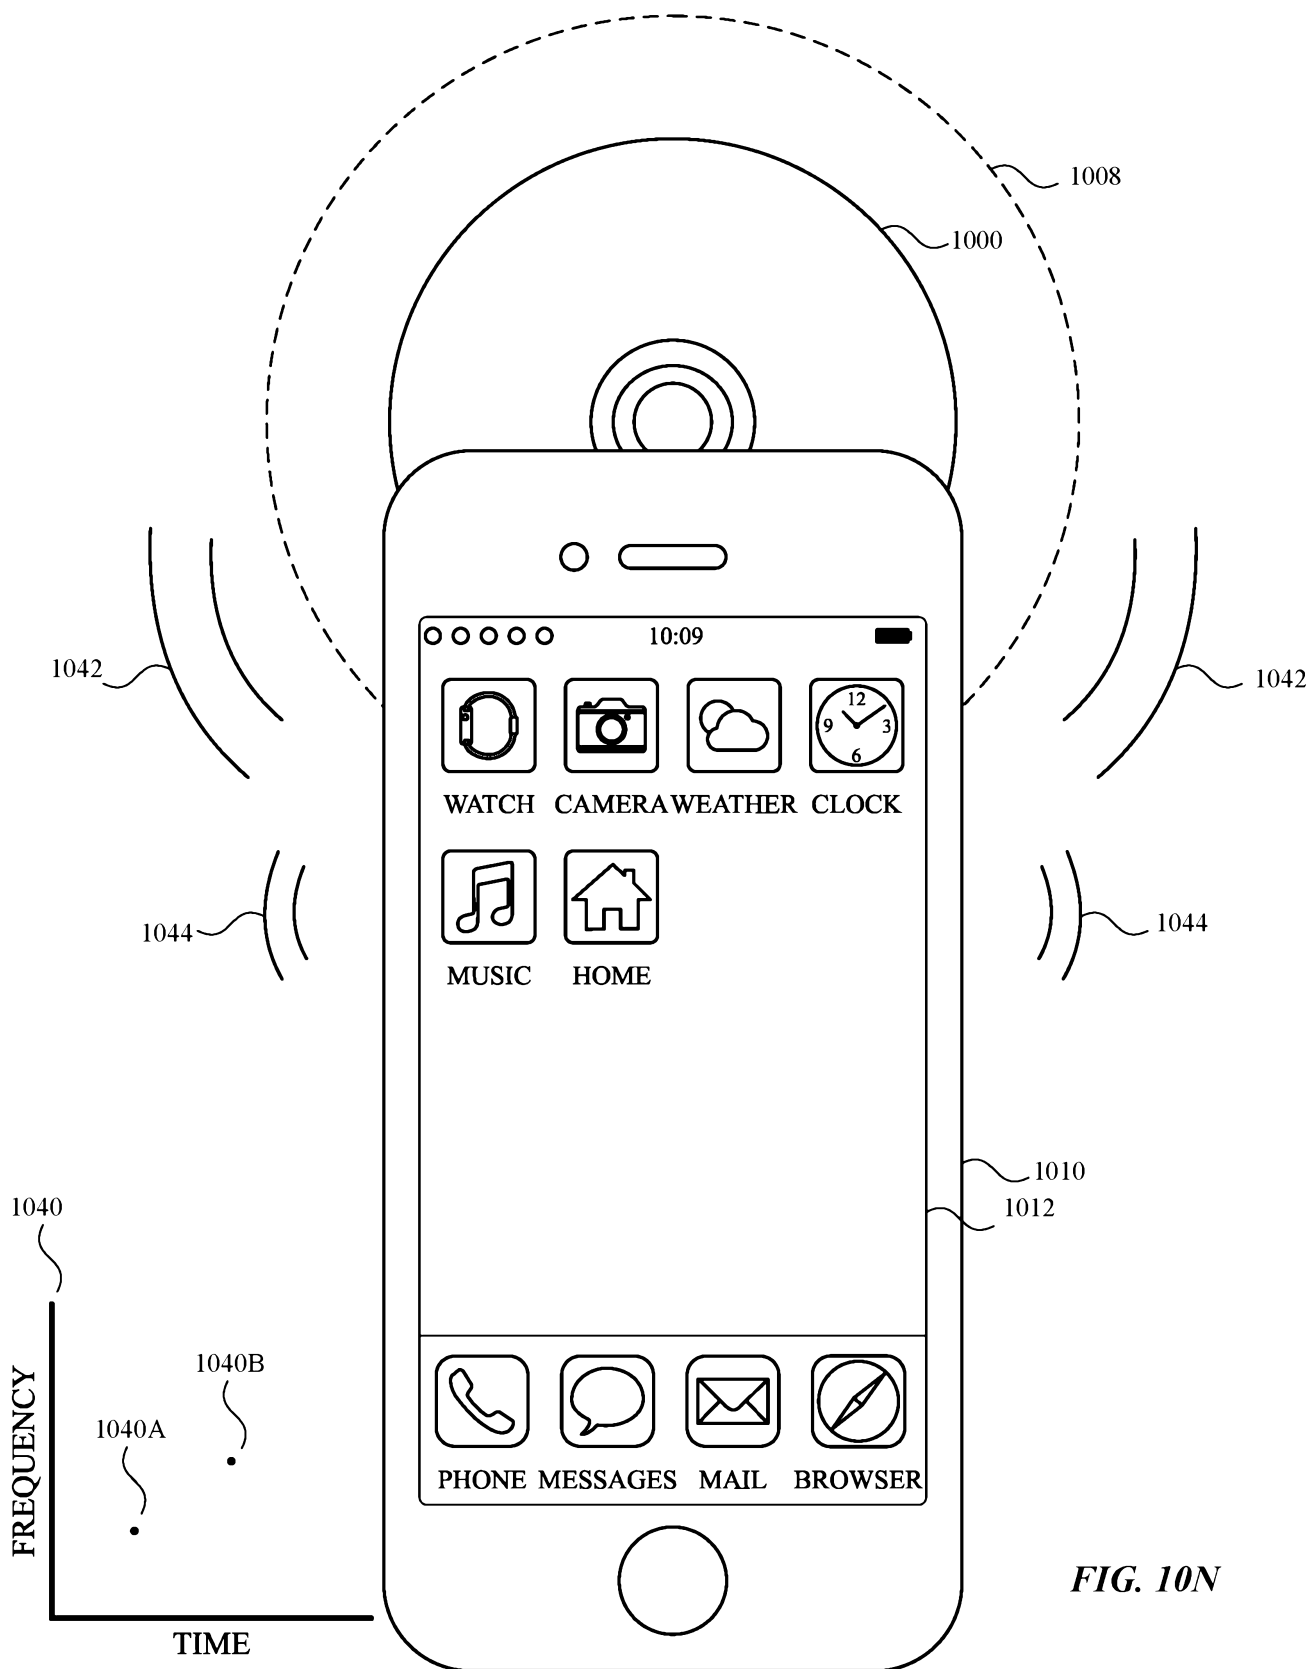


FIG. 10N

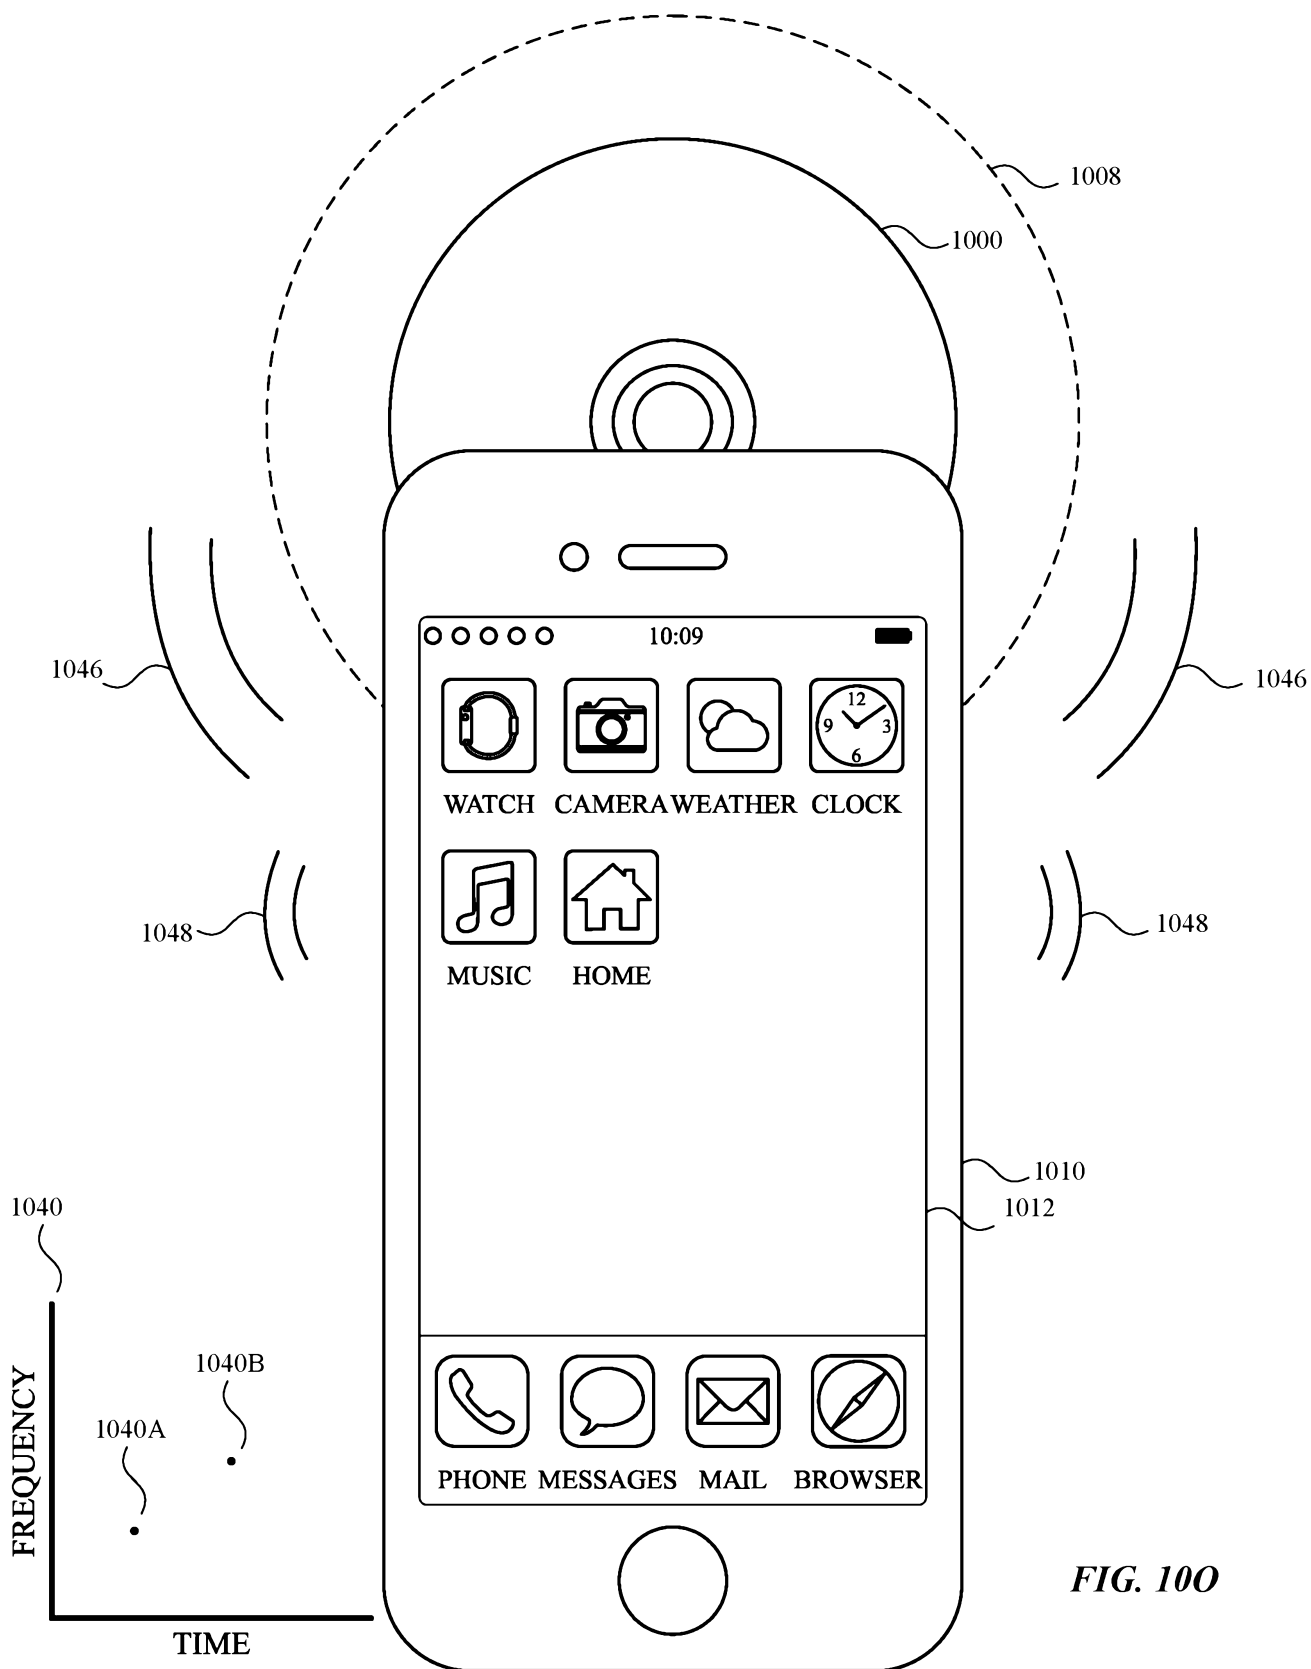
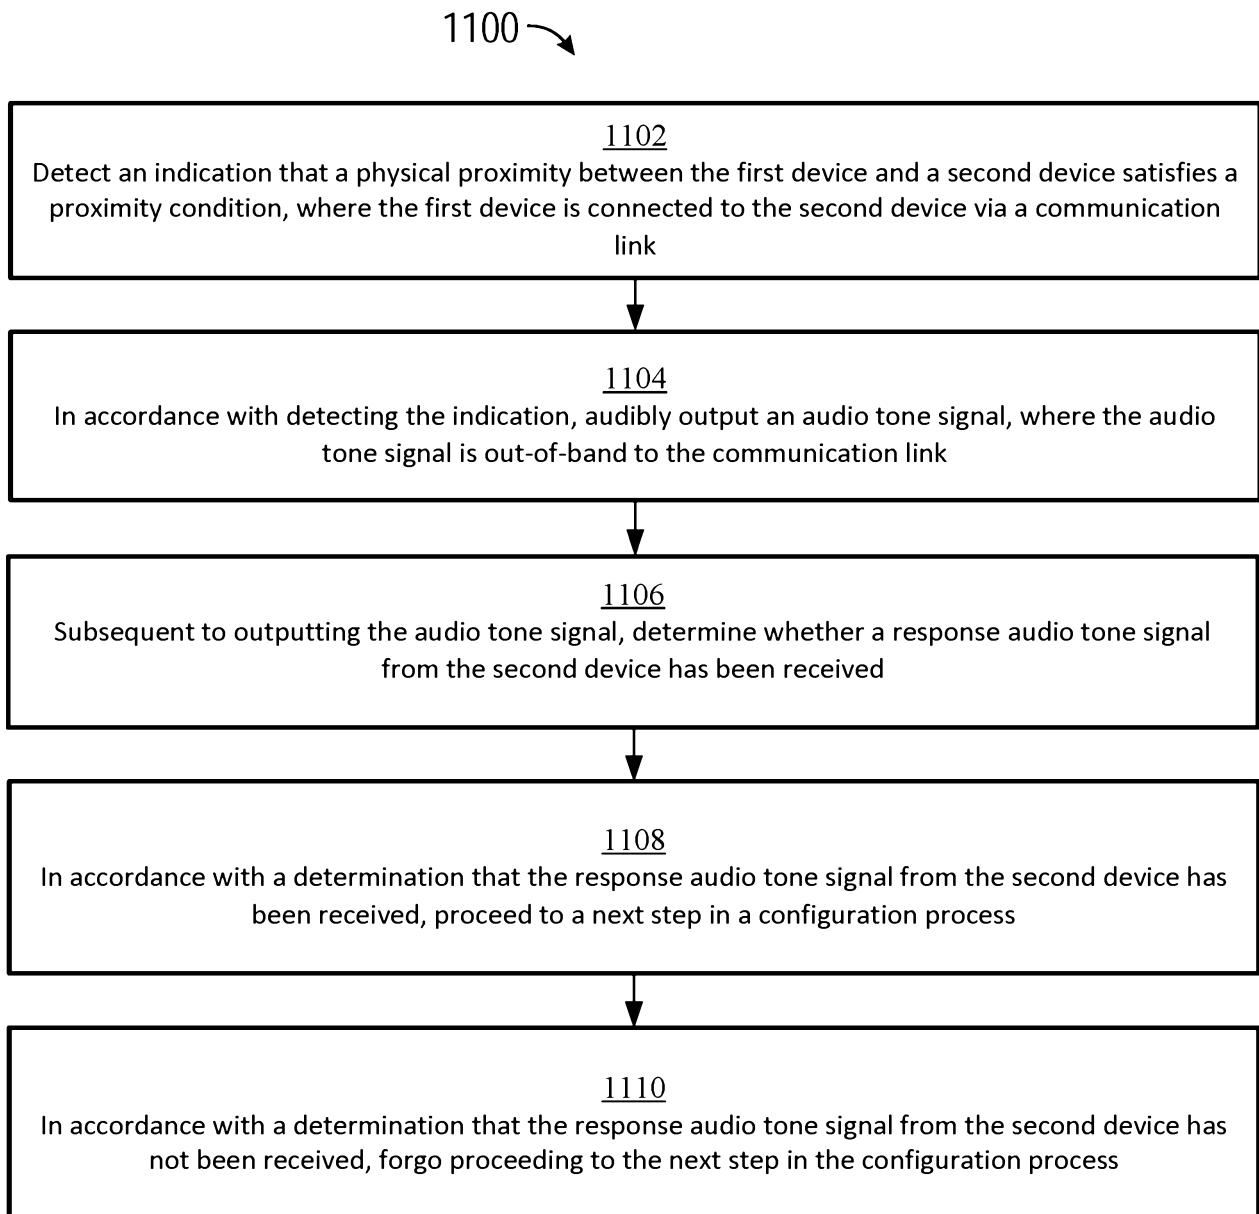
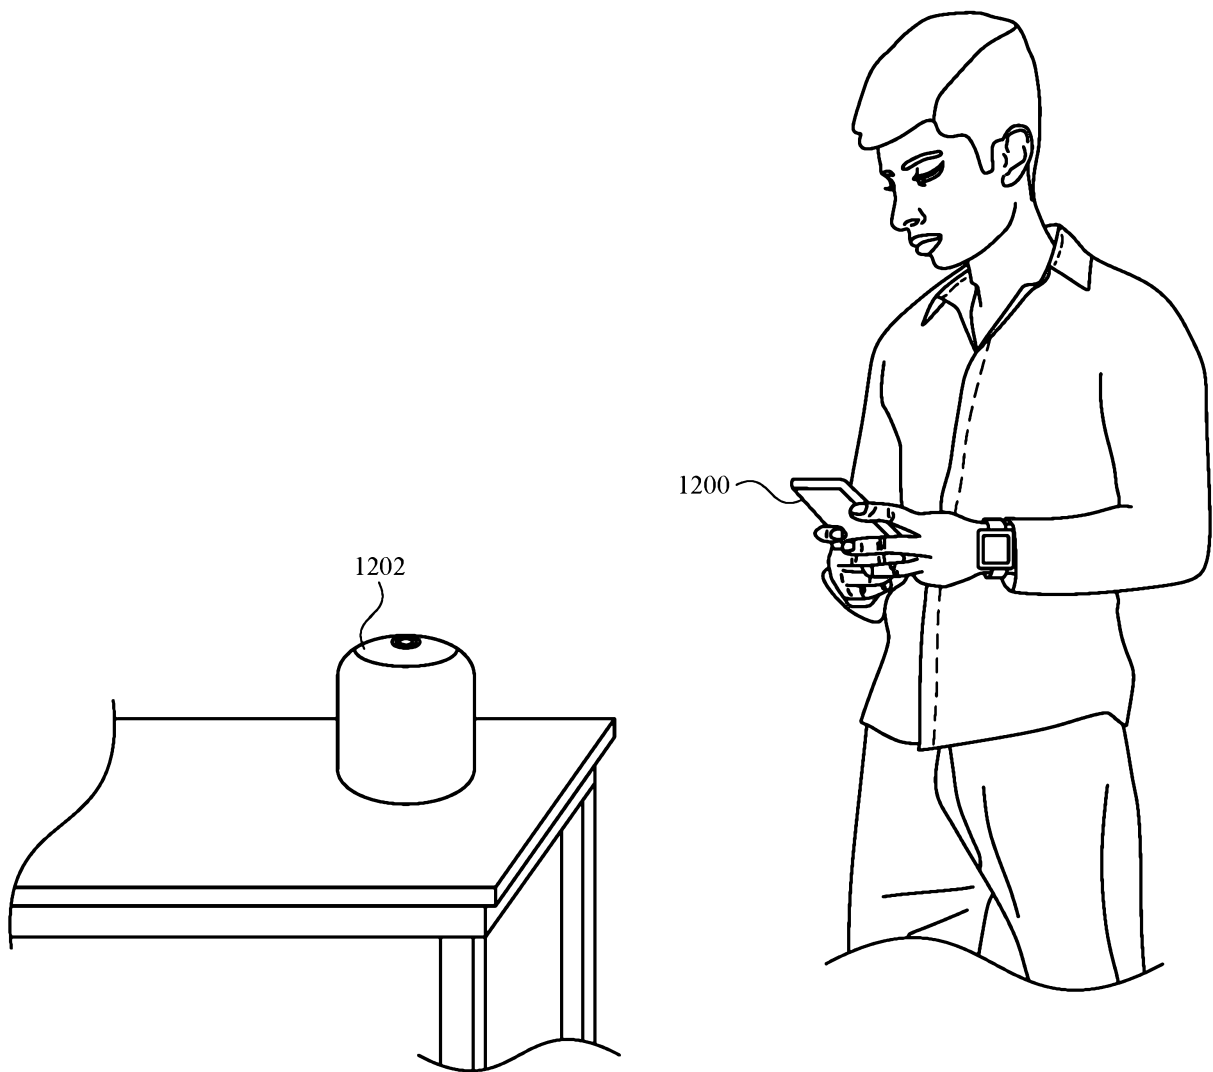
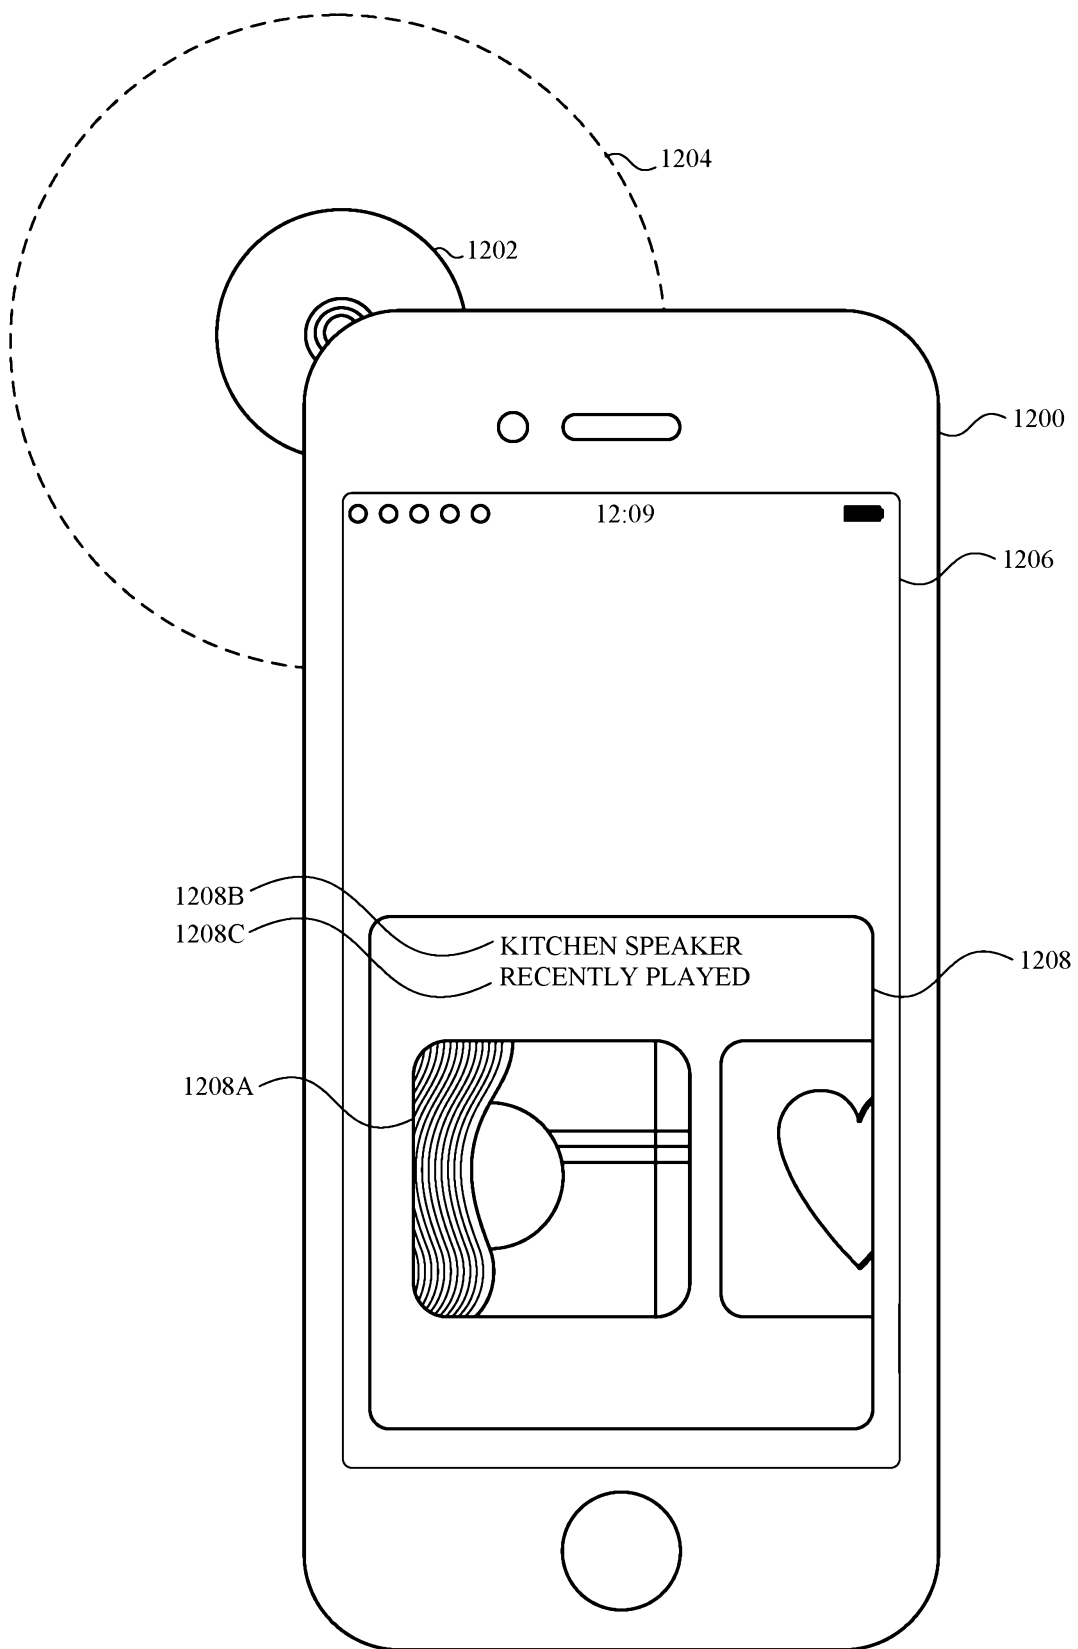
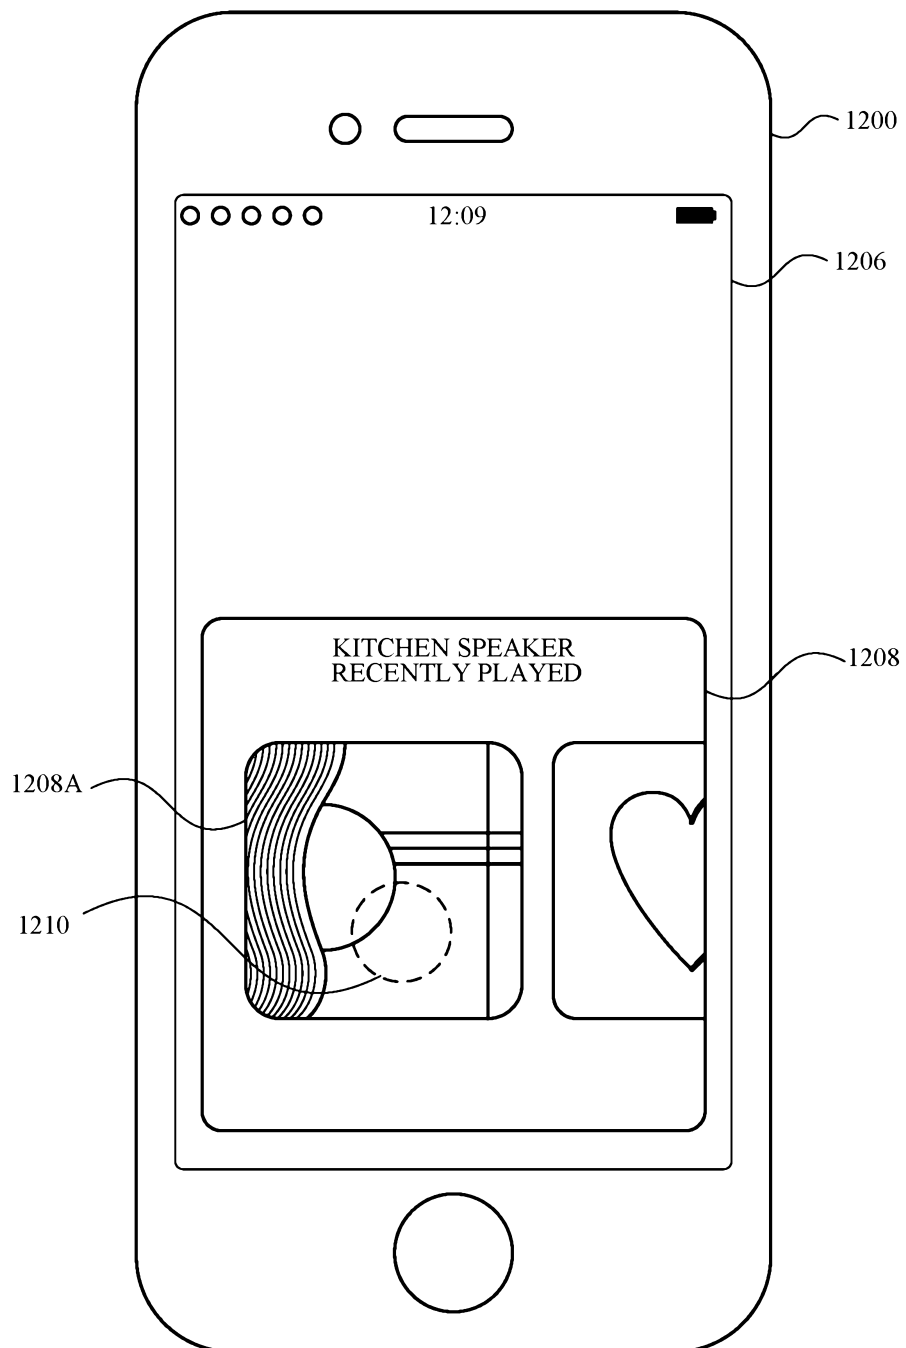


FIG. 100

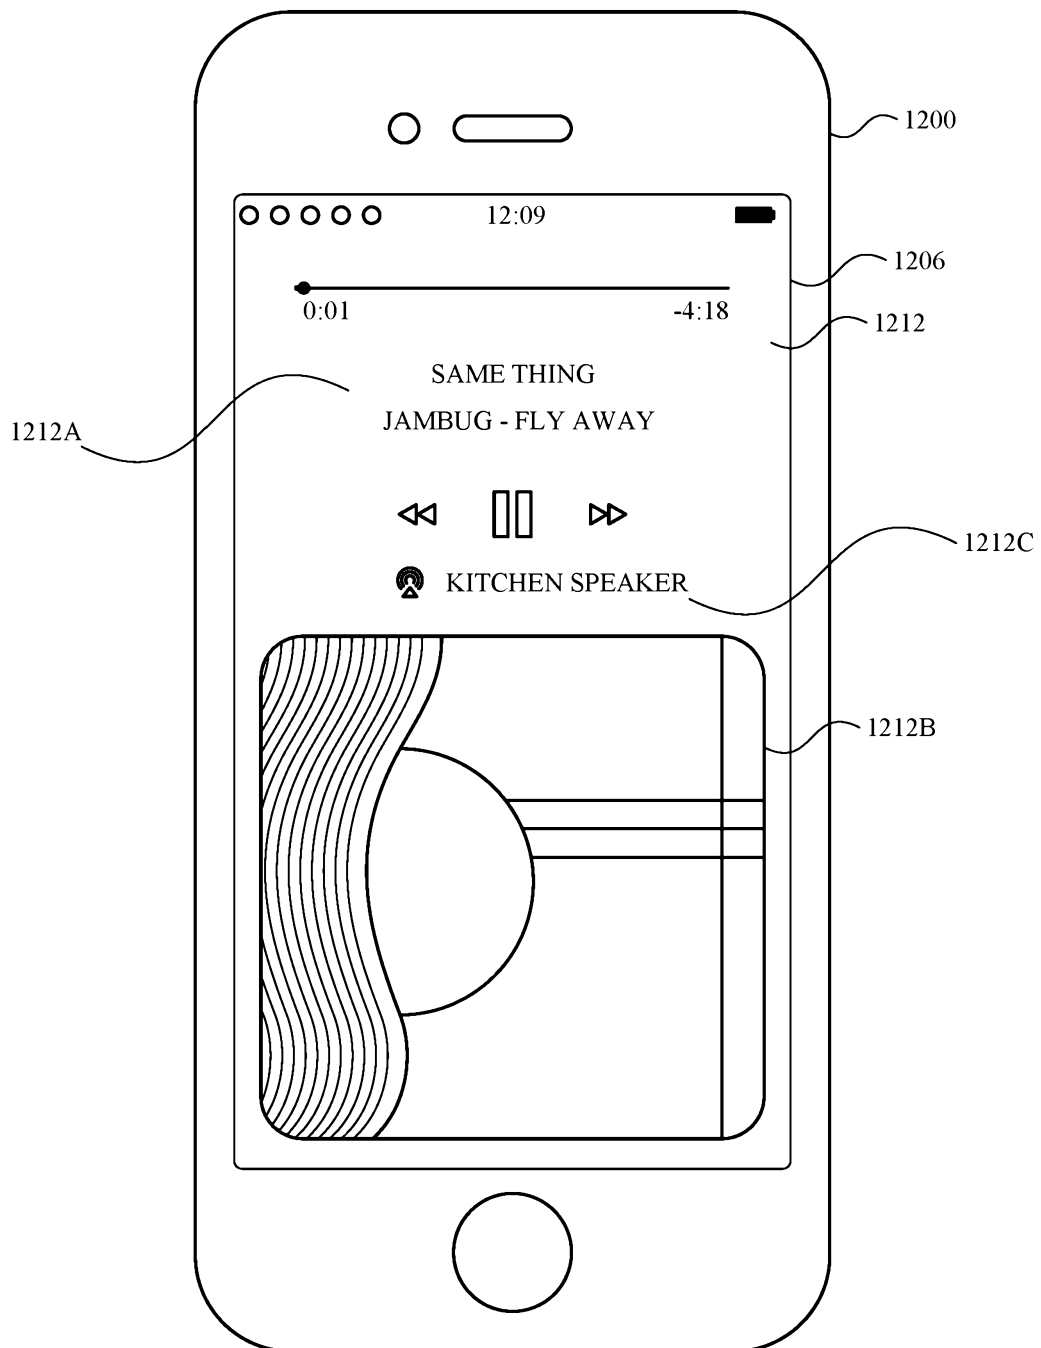
**FIG. 11**

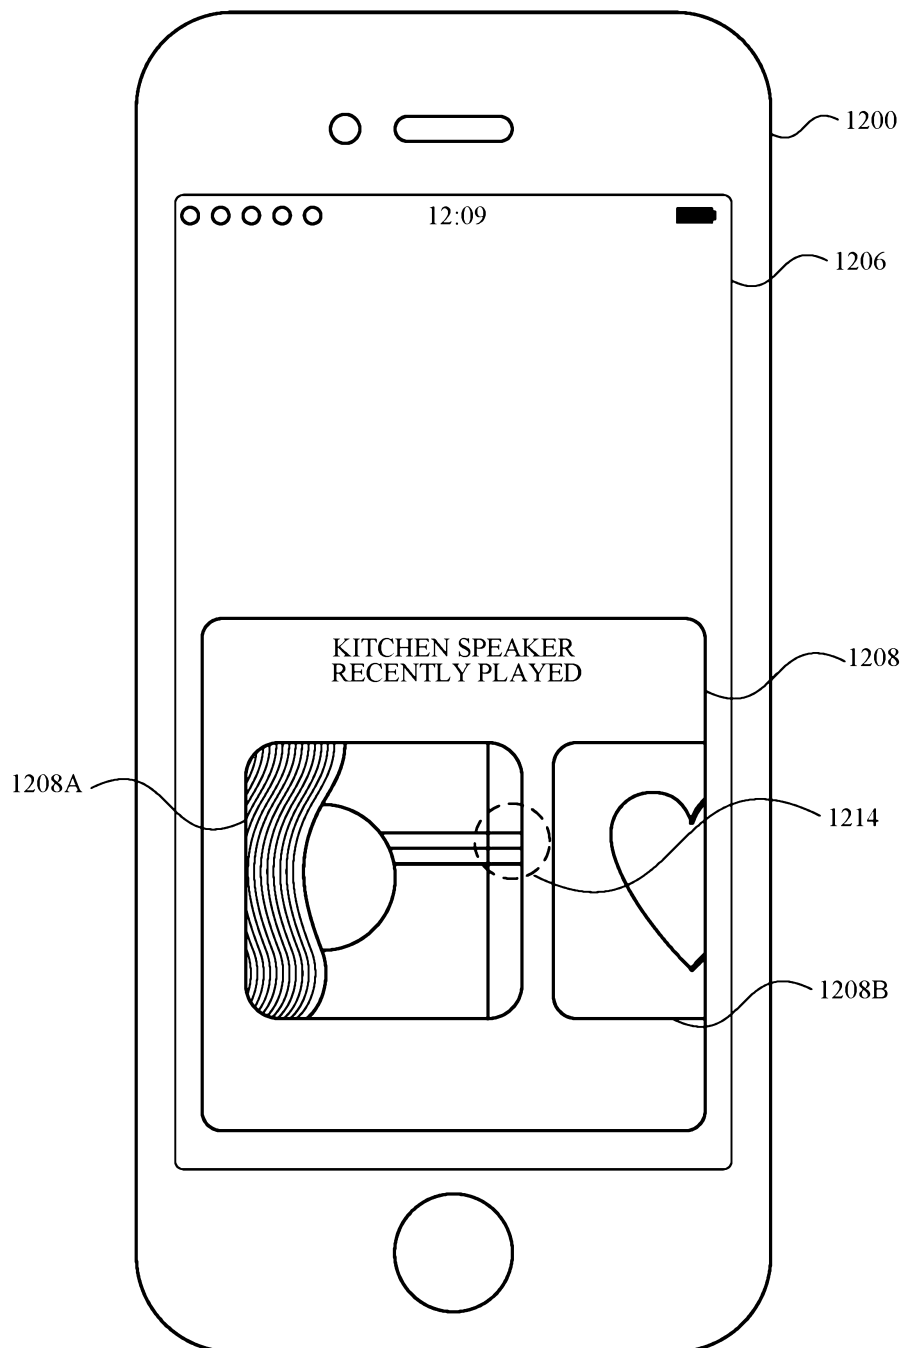
**FIG. 12A**

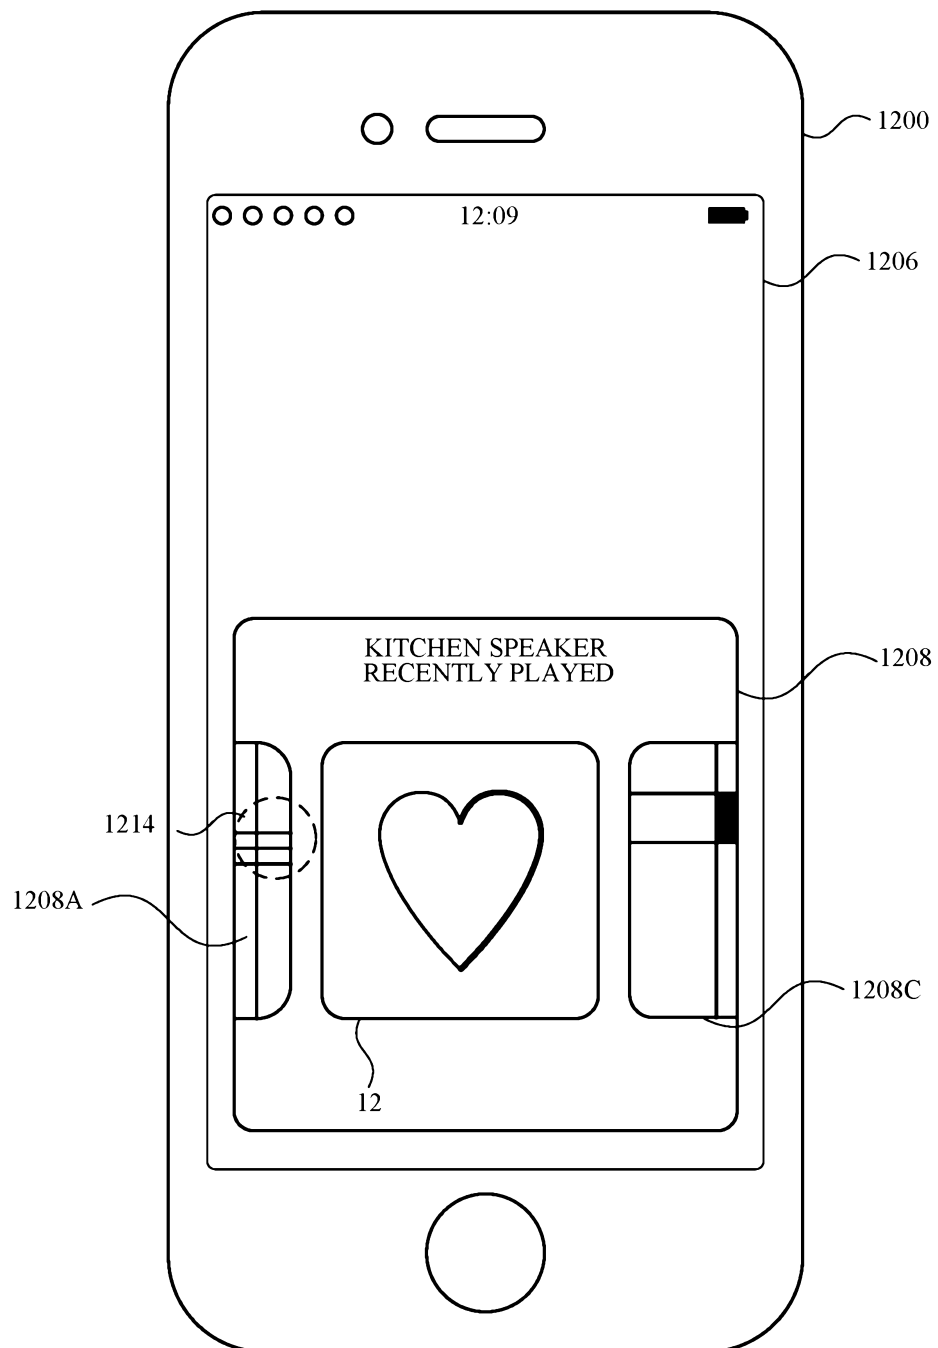
**FIG. 12B**

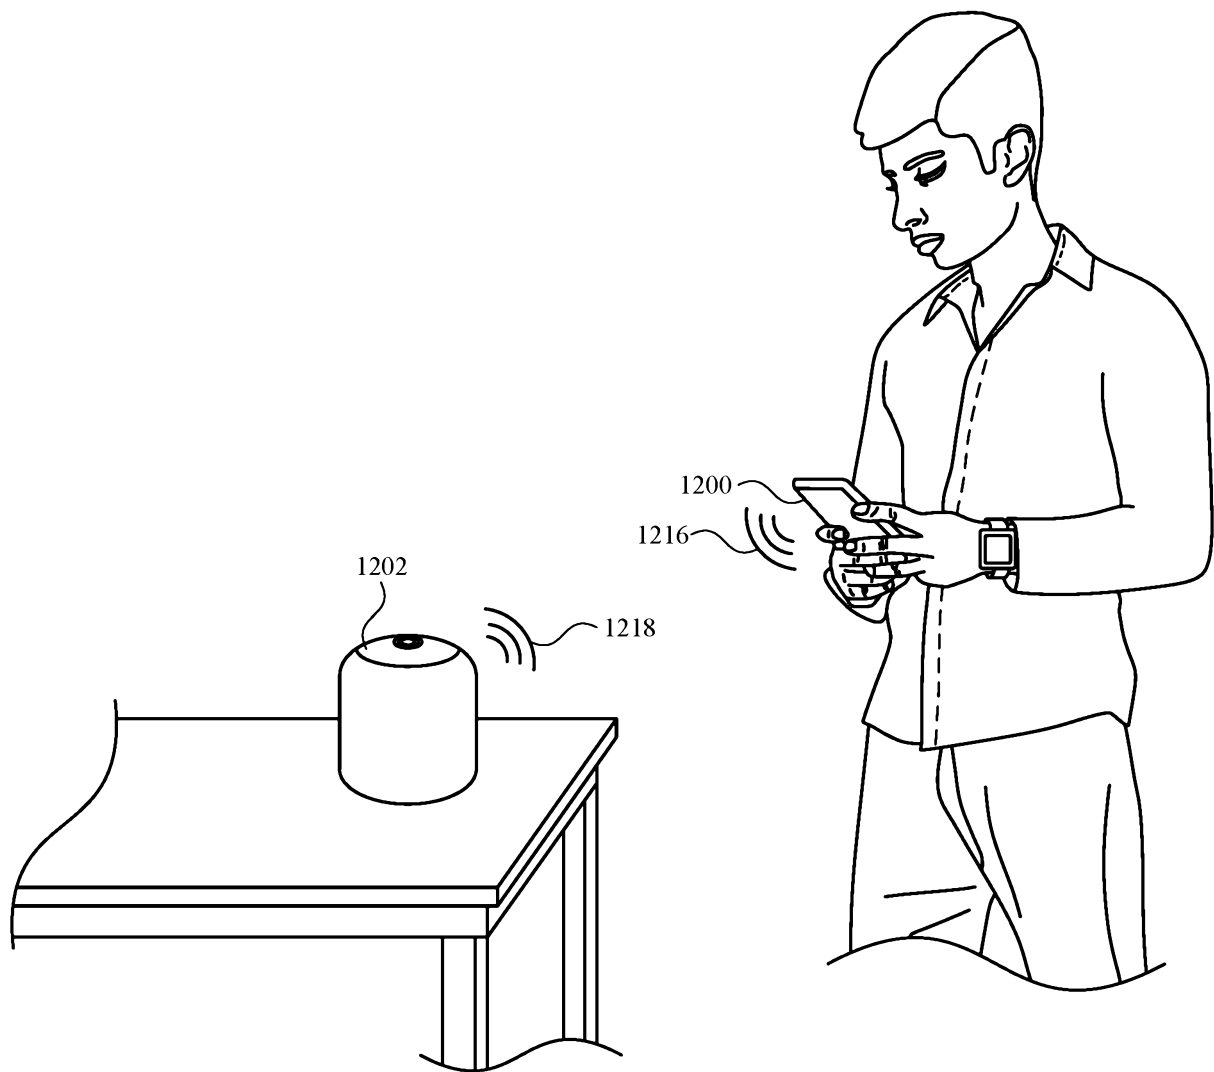
**FIG. 12C**



**FIG. 12D**

**FIG. 12E**

**FIG. 12F**

**FIG. 12G**

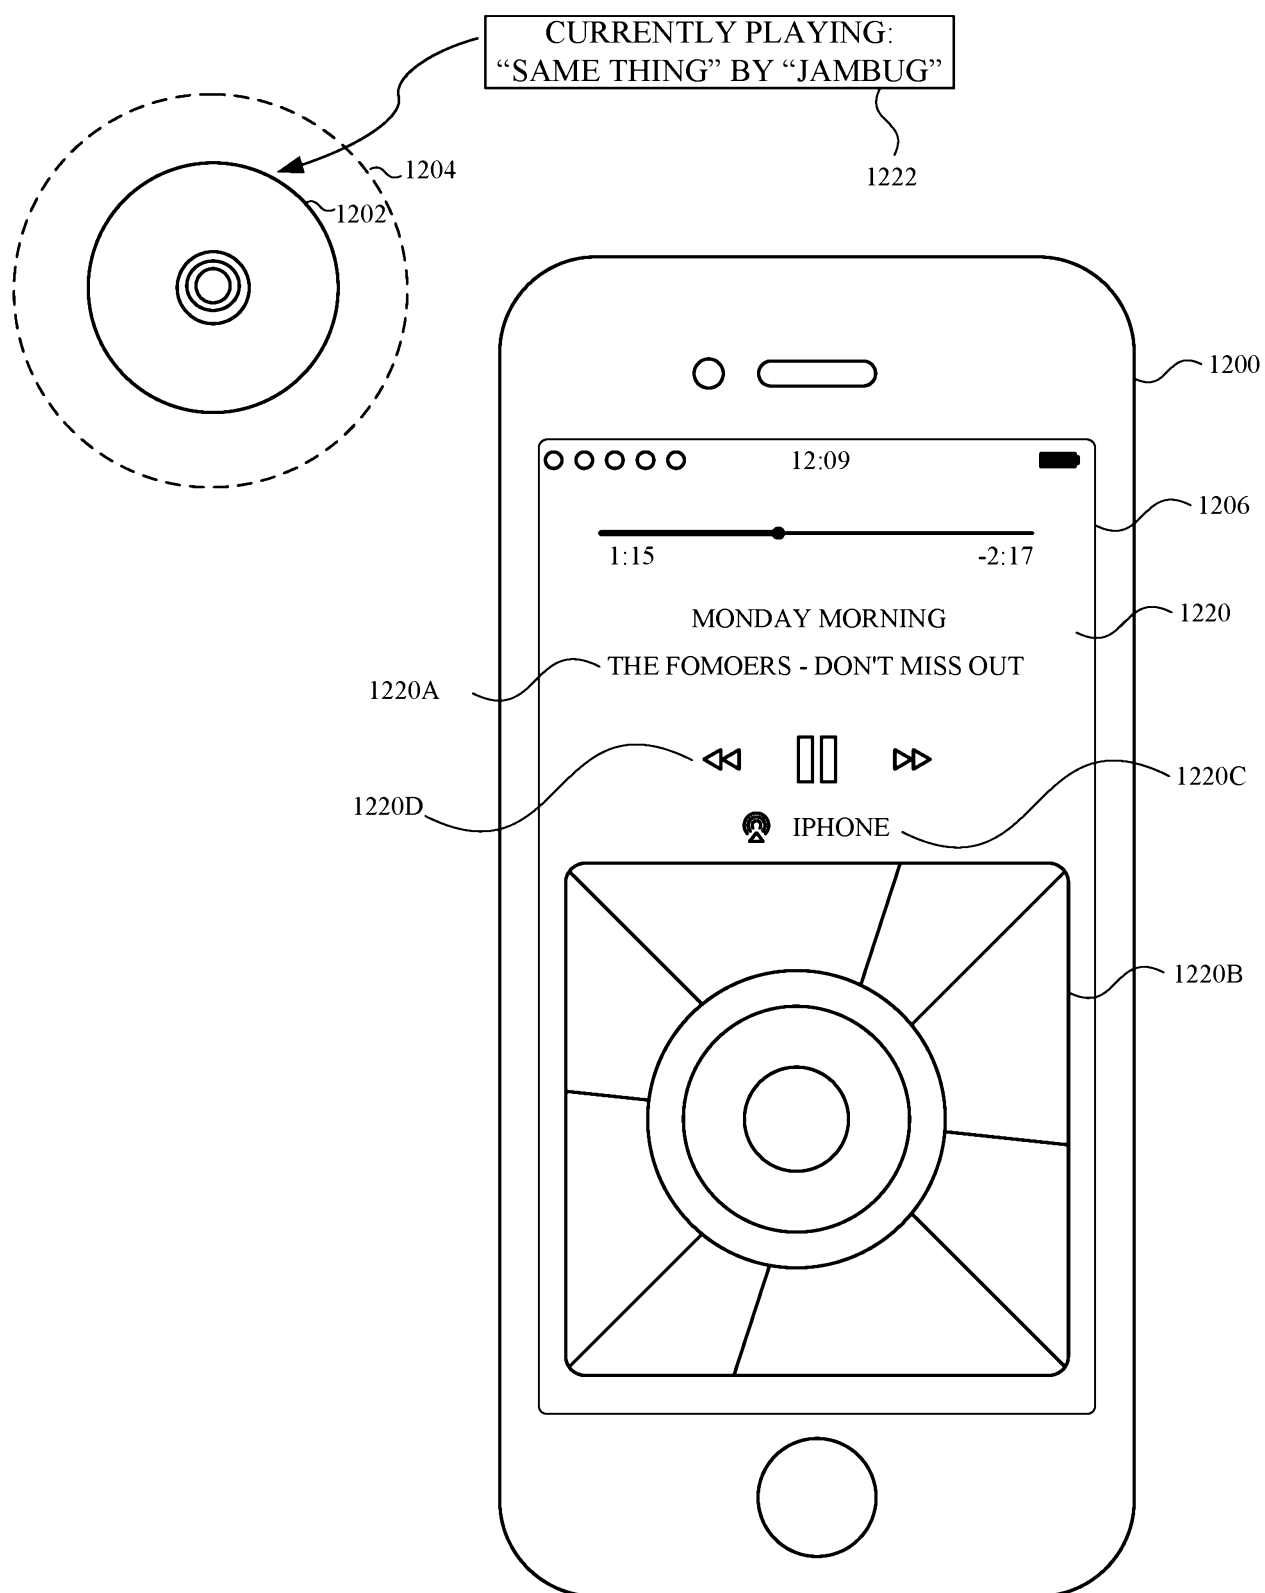


FIG. 12H

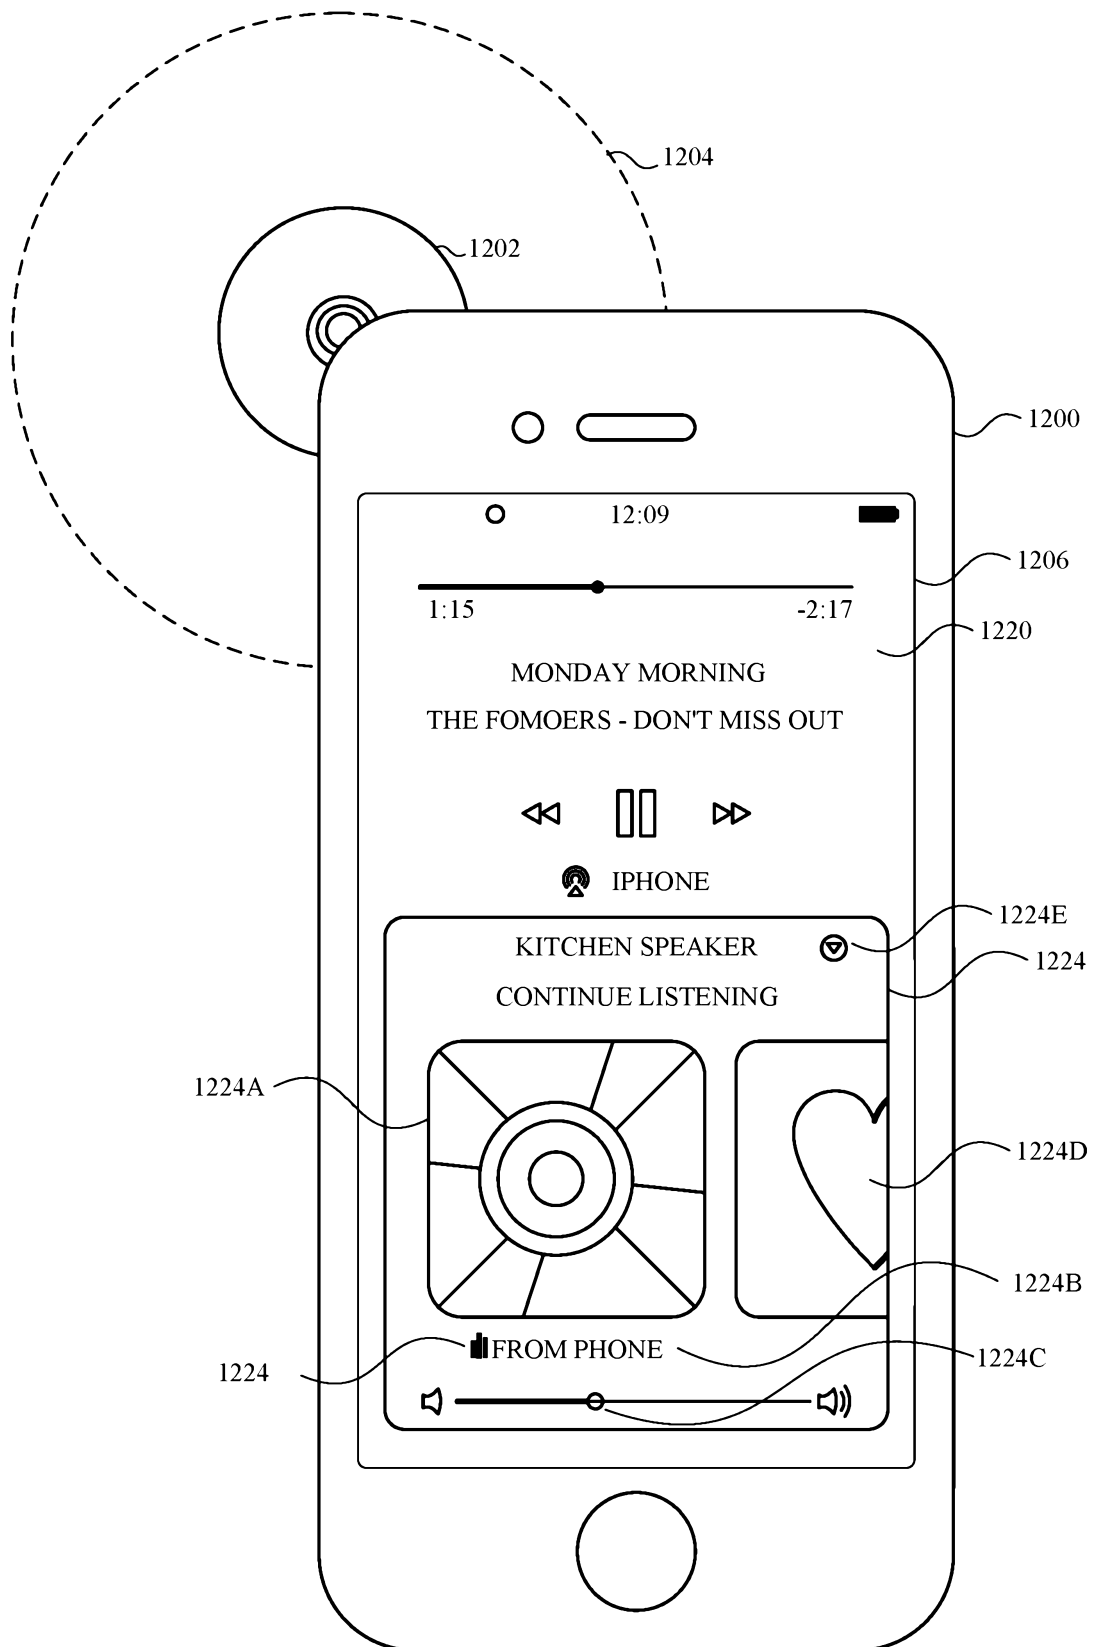
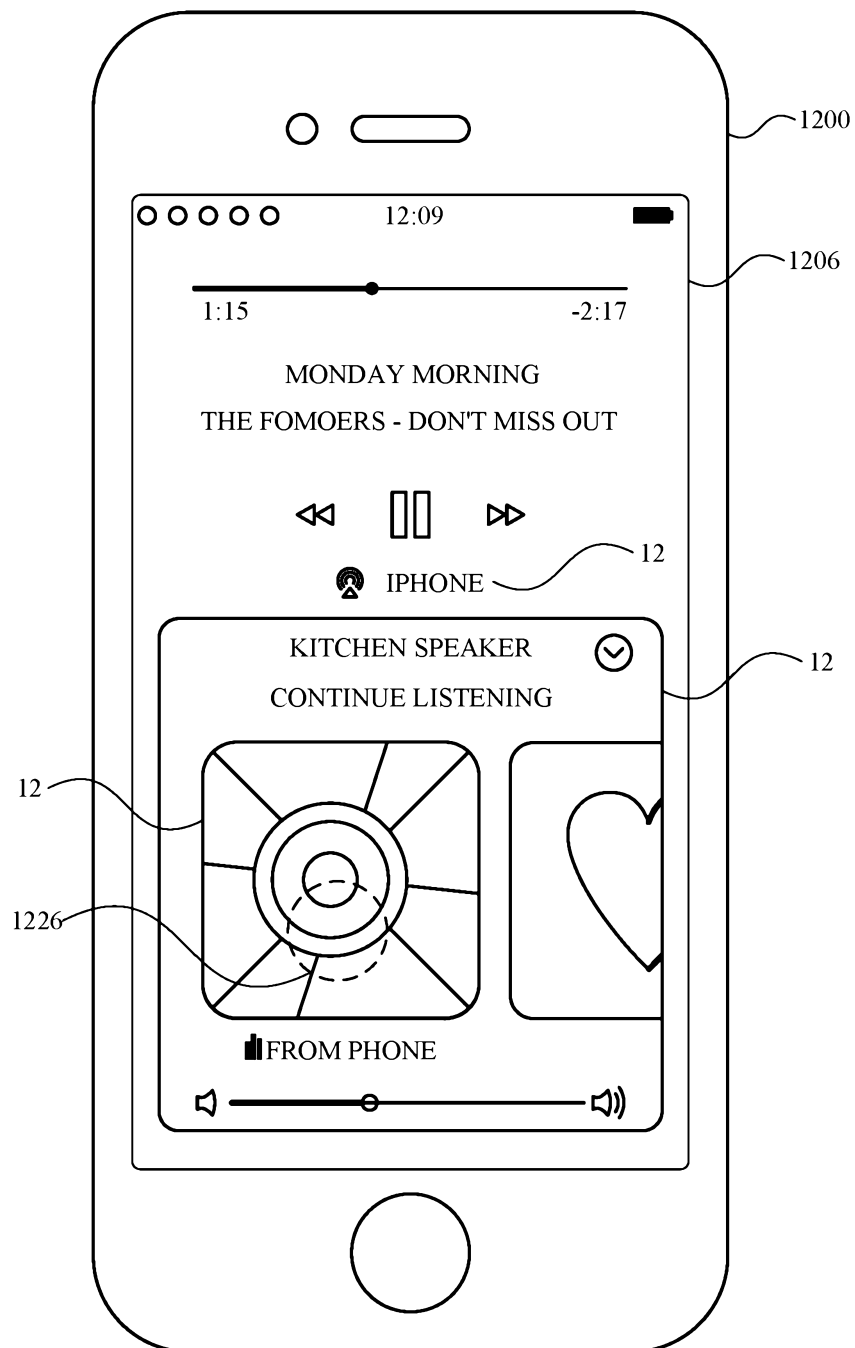
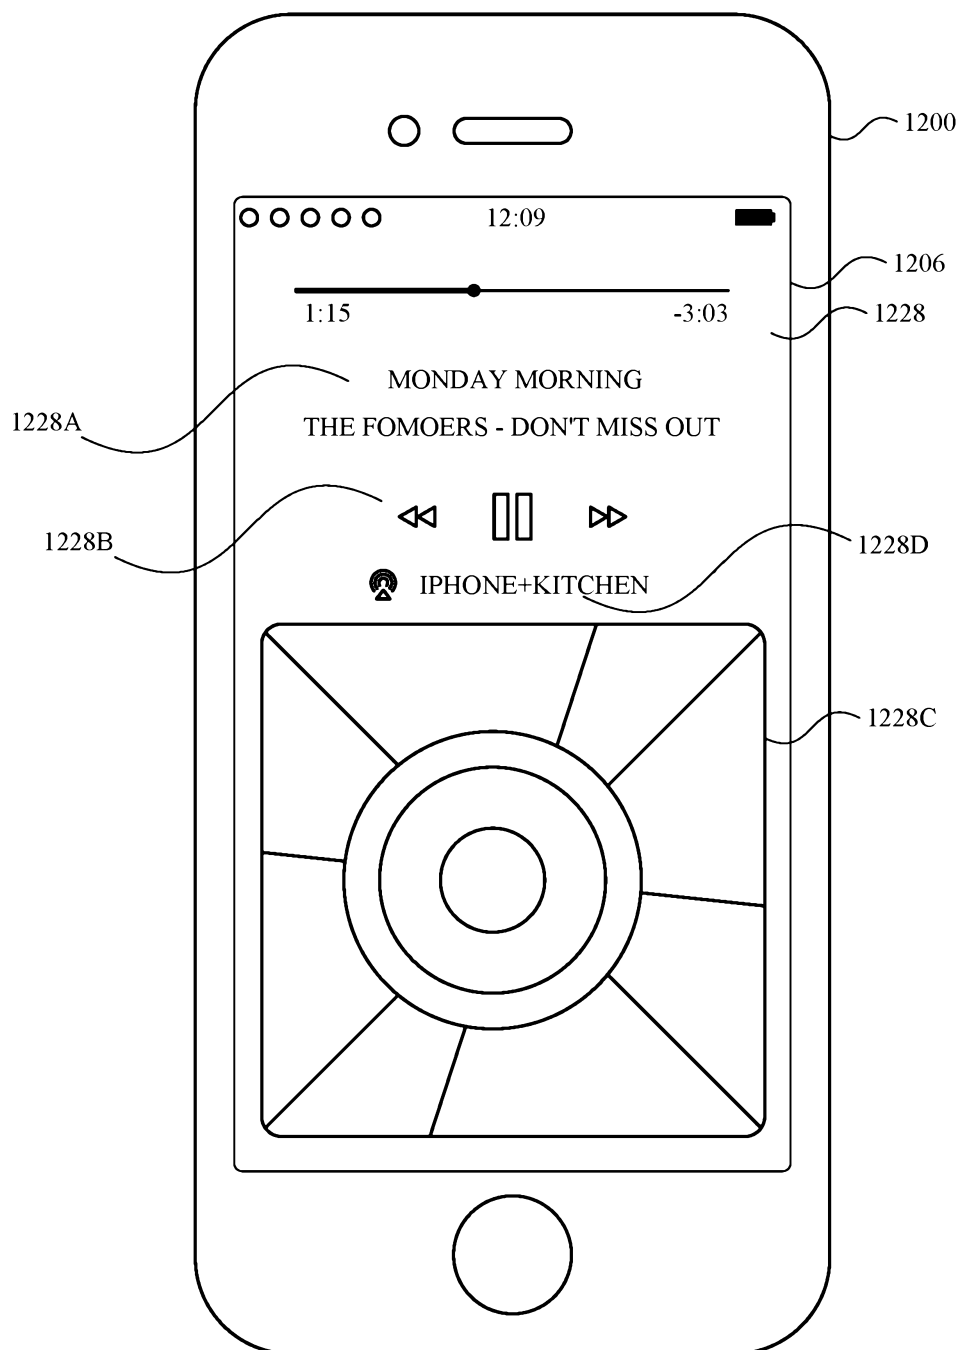


FIG. 12I

**FIG. 12J**

**FIG. 12K**



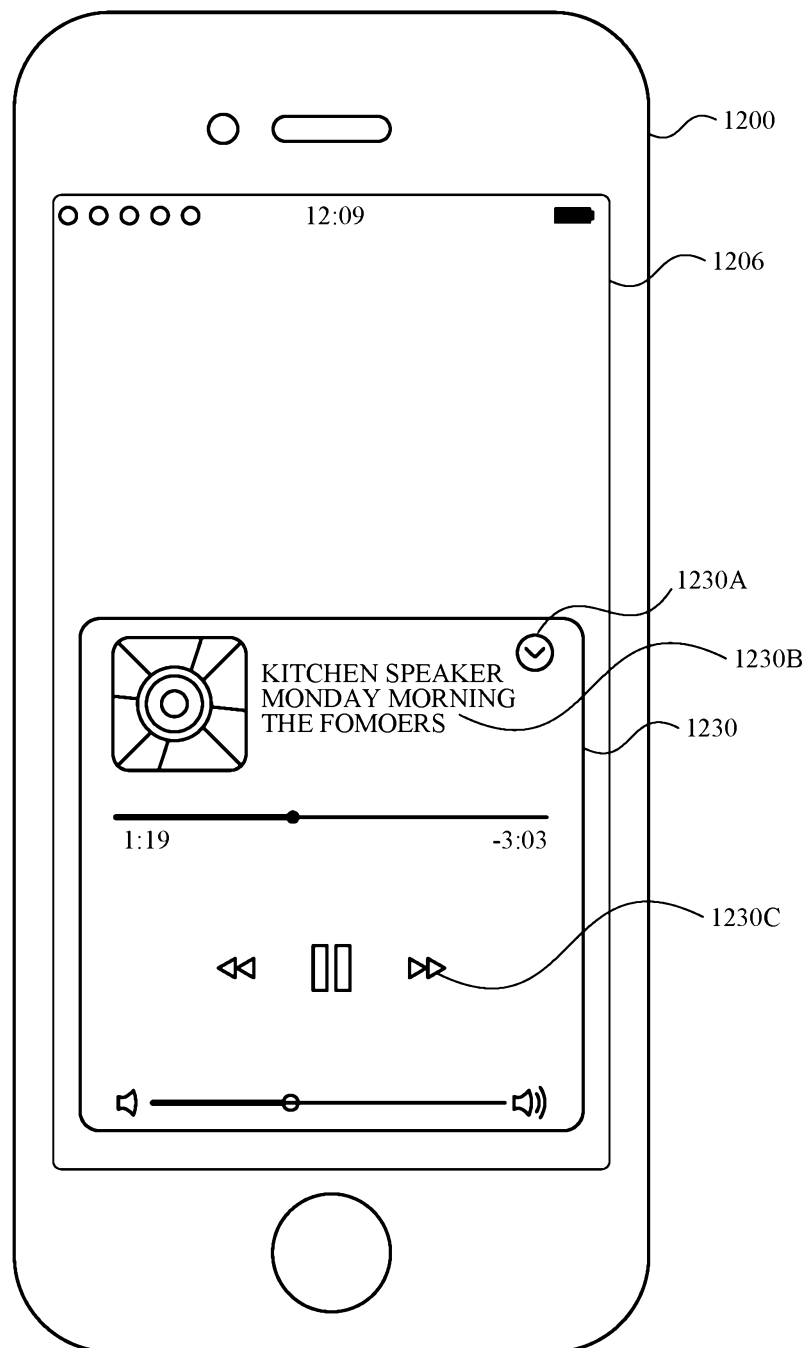
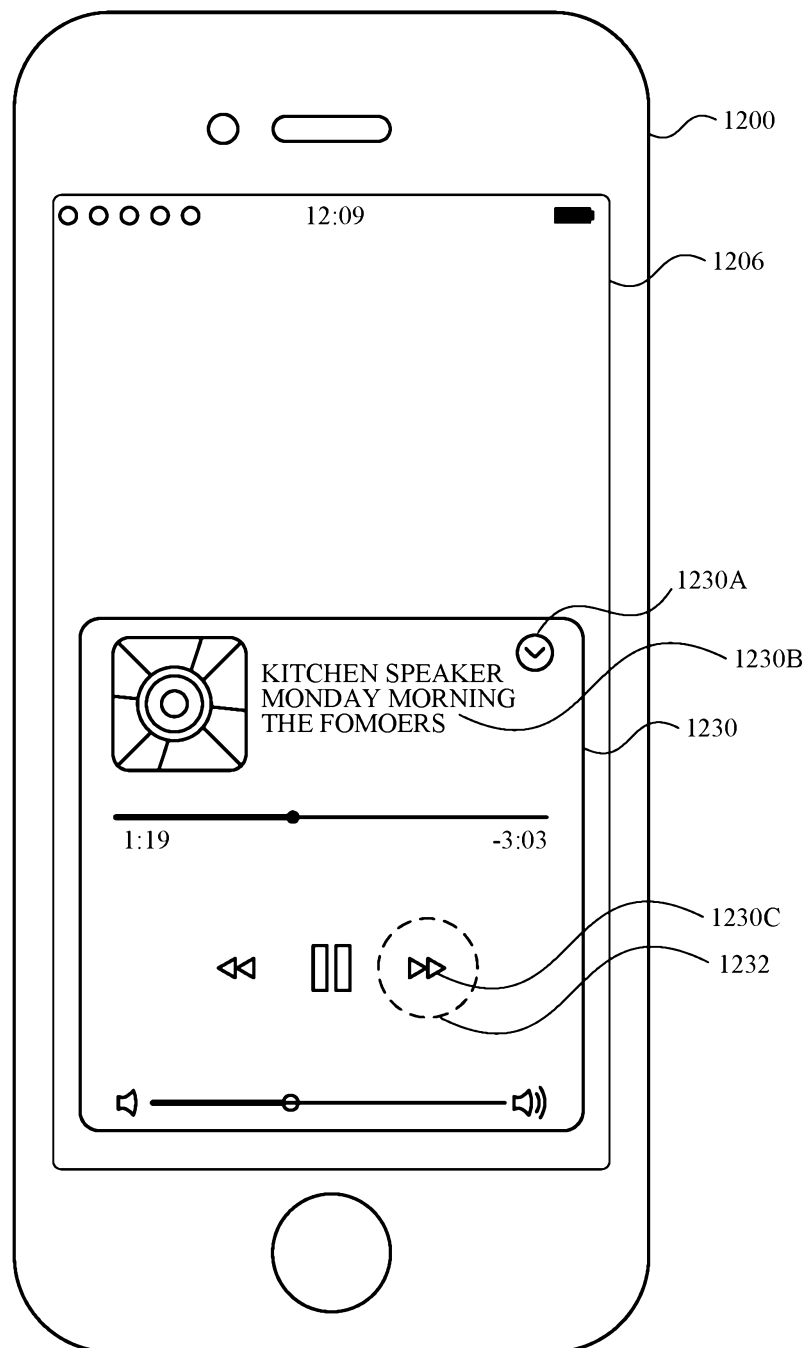


FIG. 12L

**FIG. 12M**

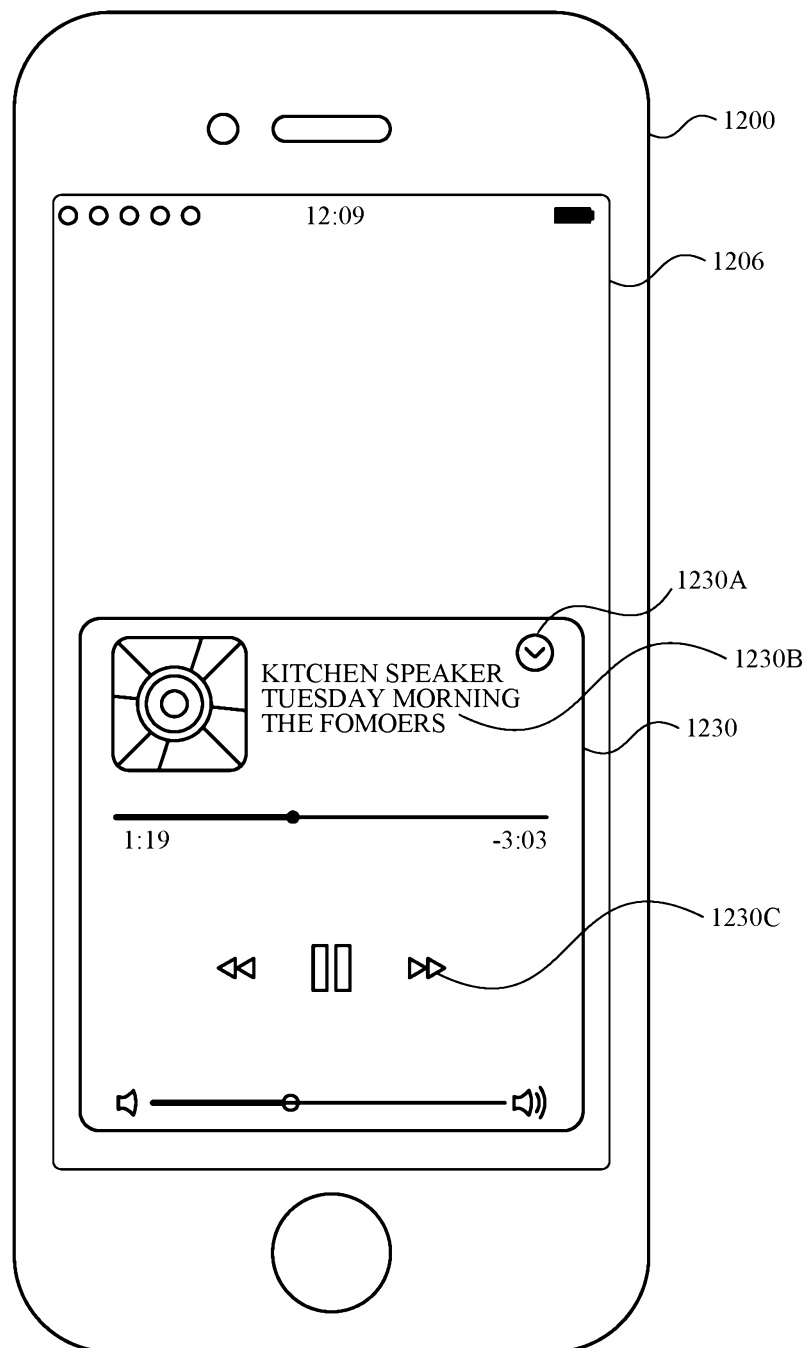
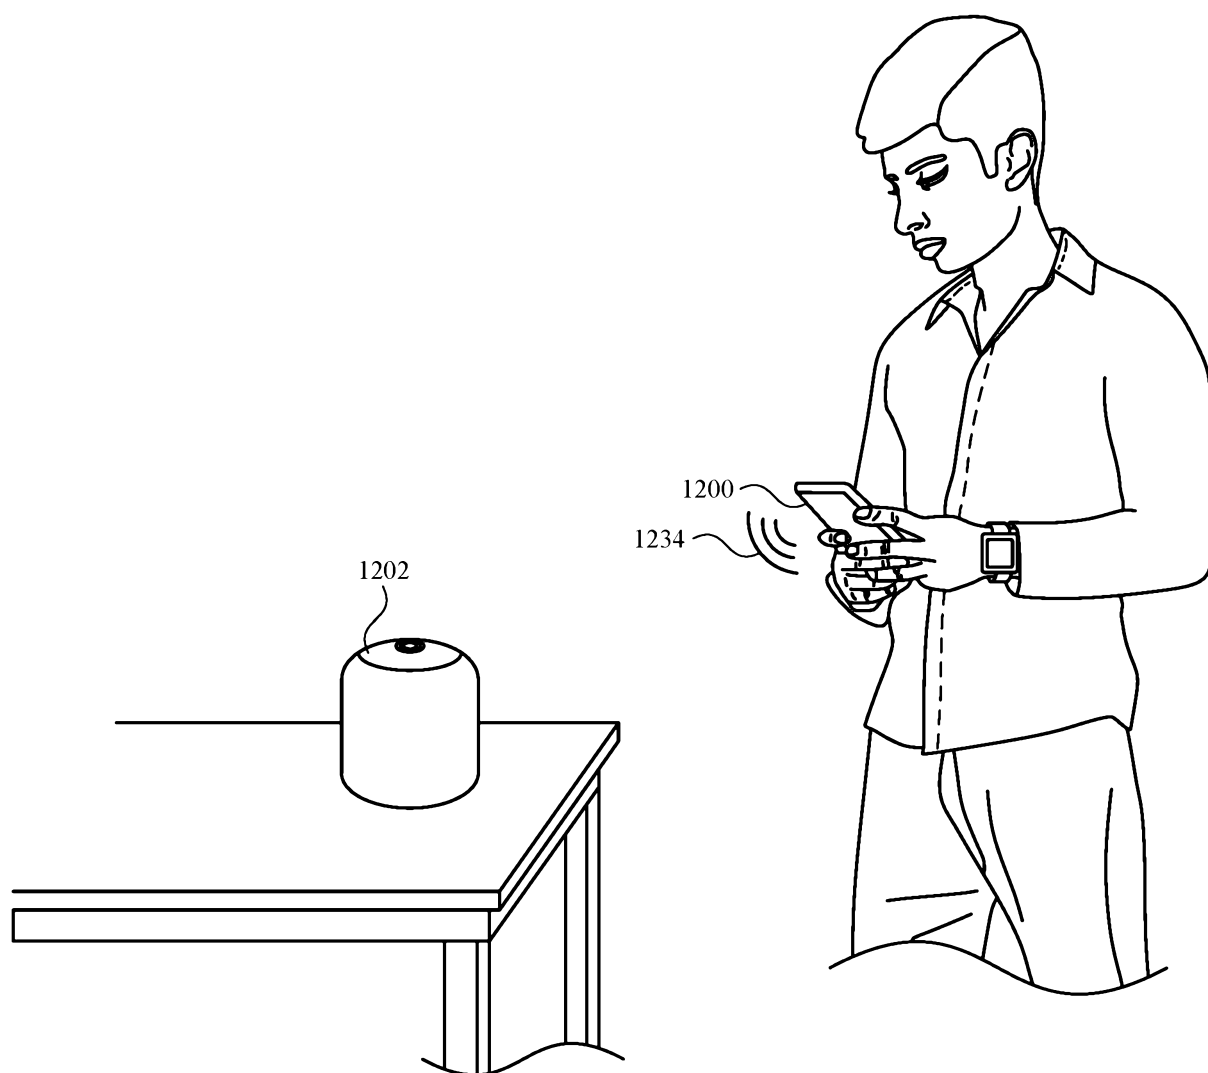
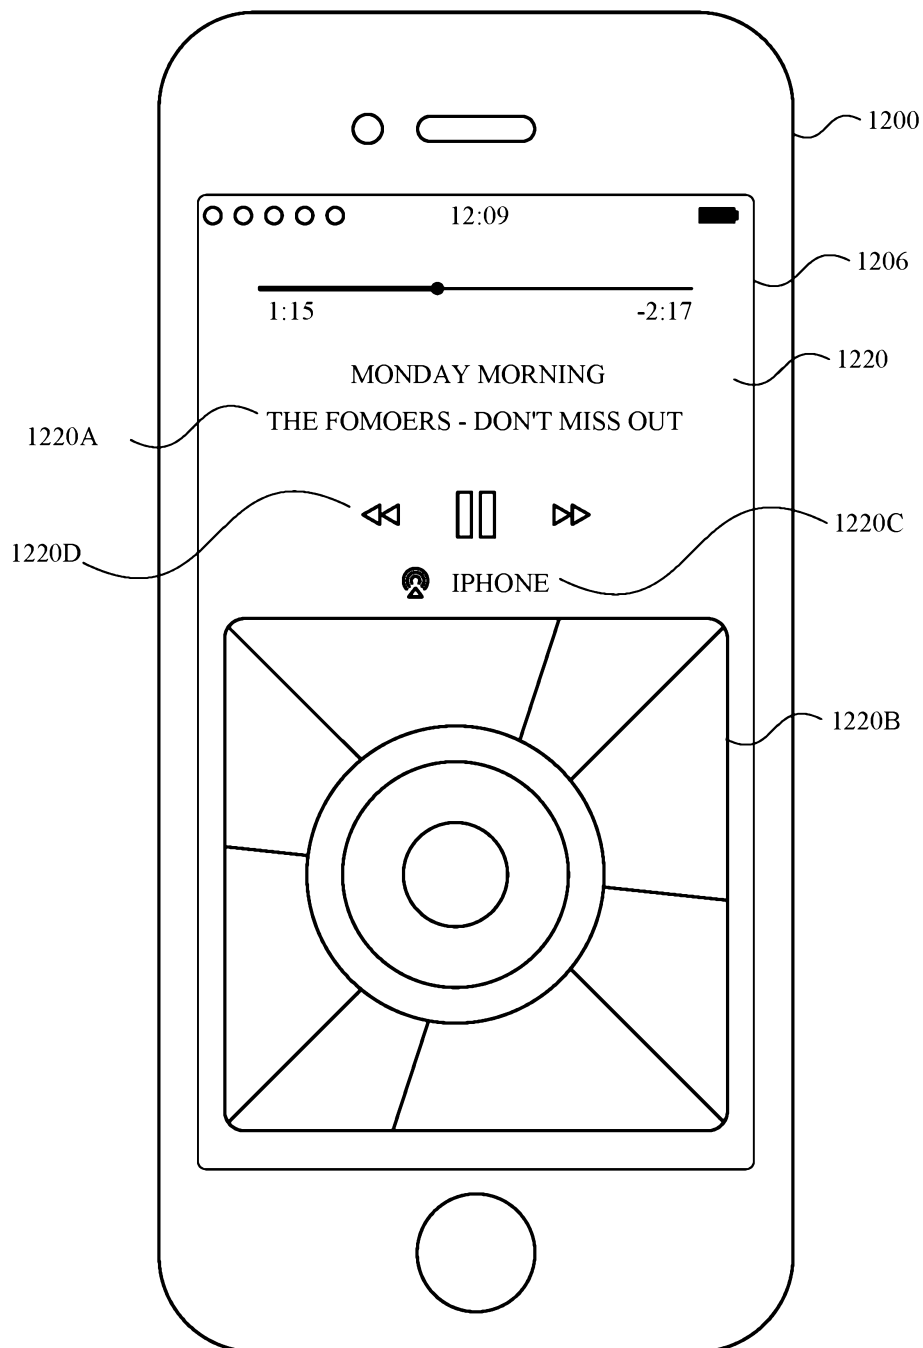


FIG. 12N

**FIG. 120**

**FIG. 12P**

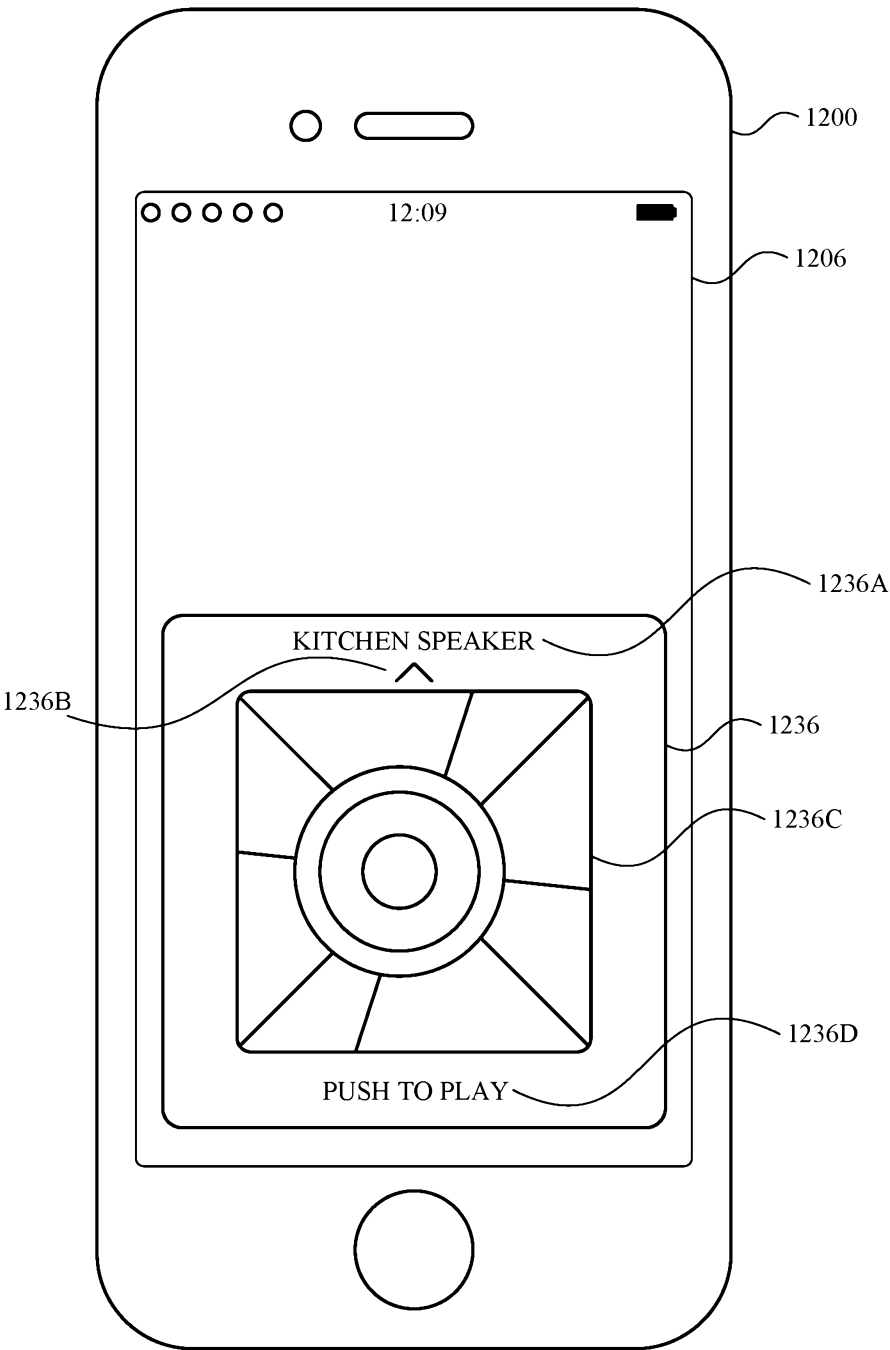
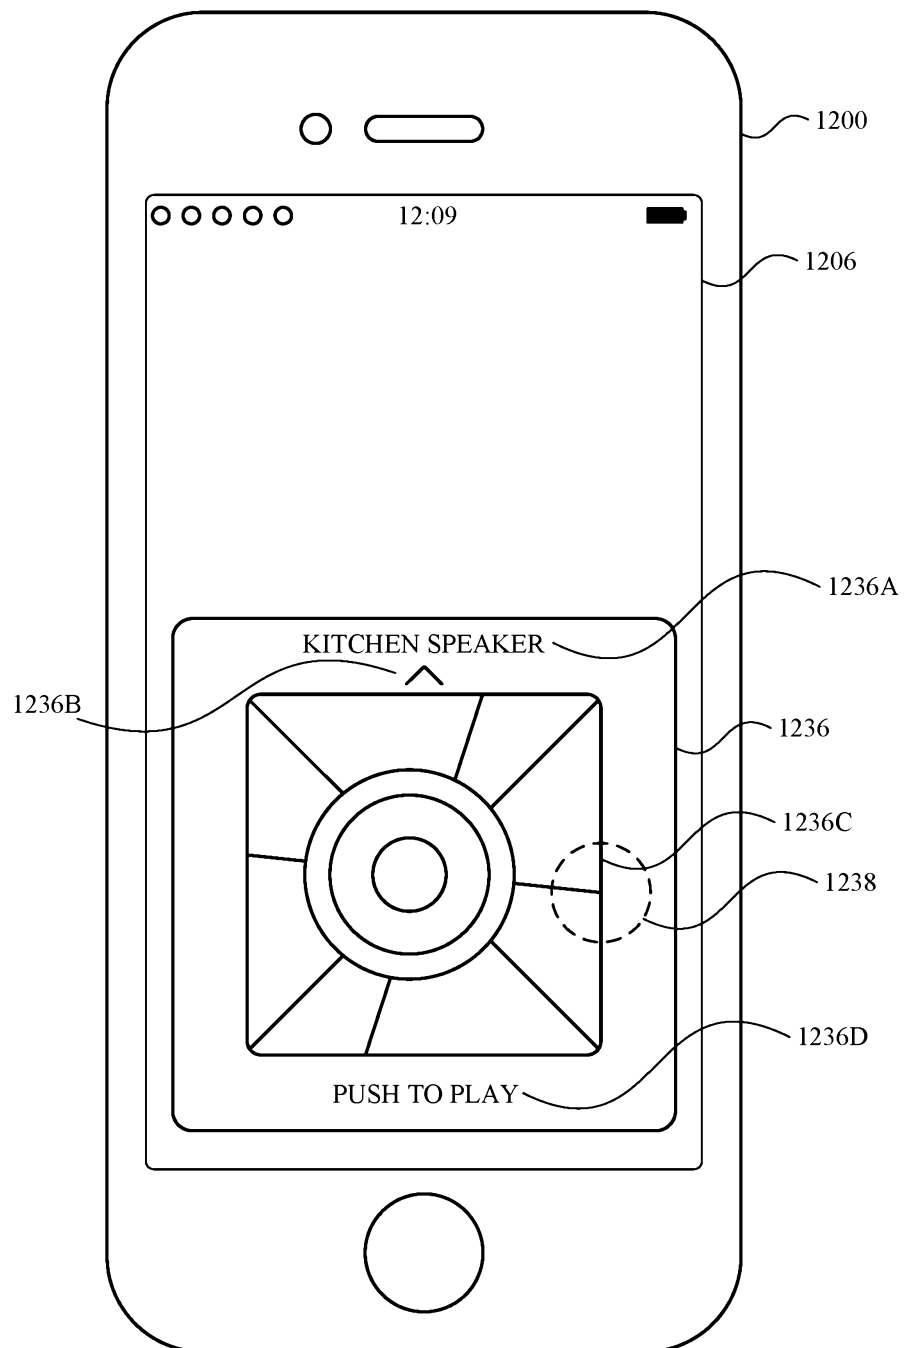
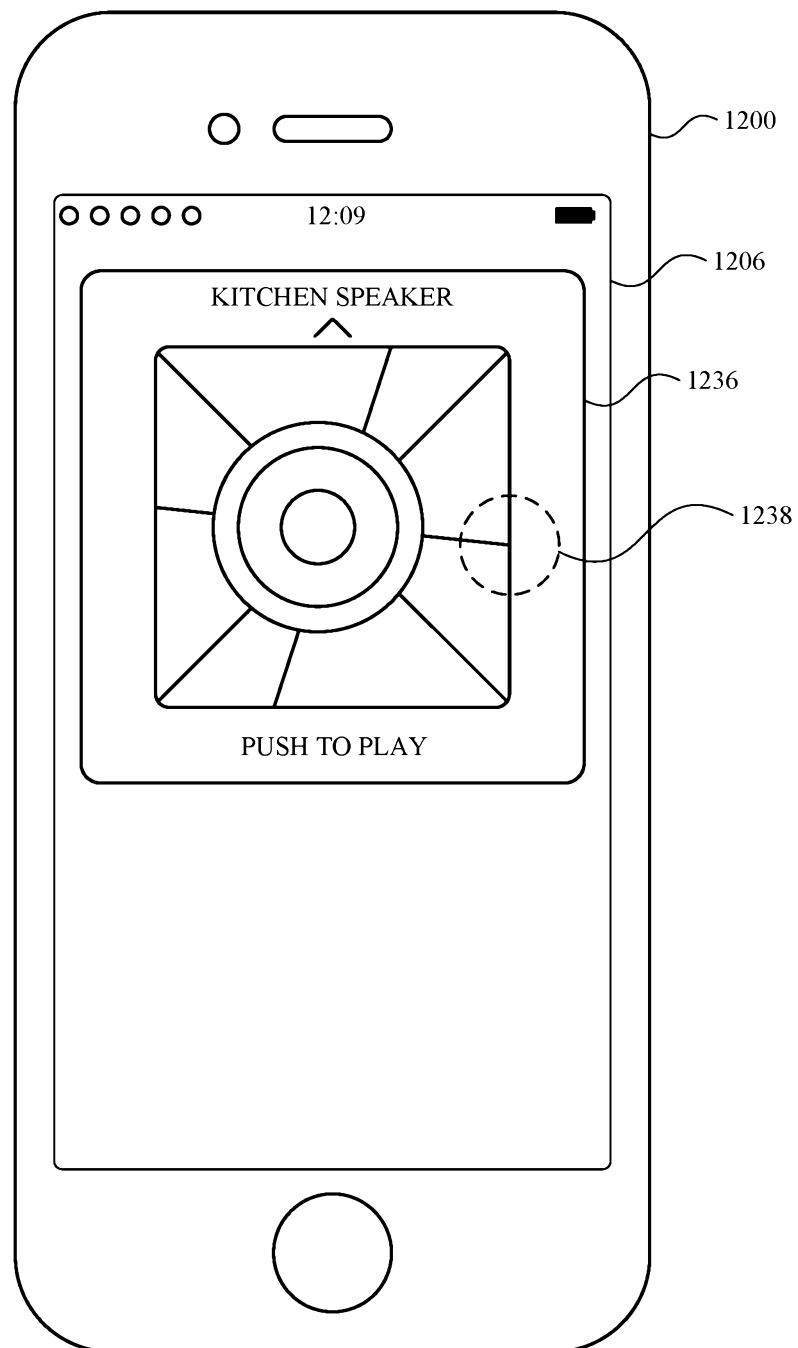
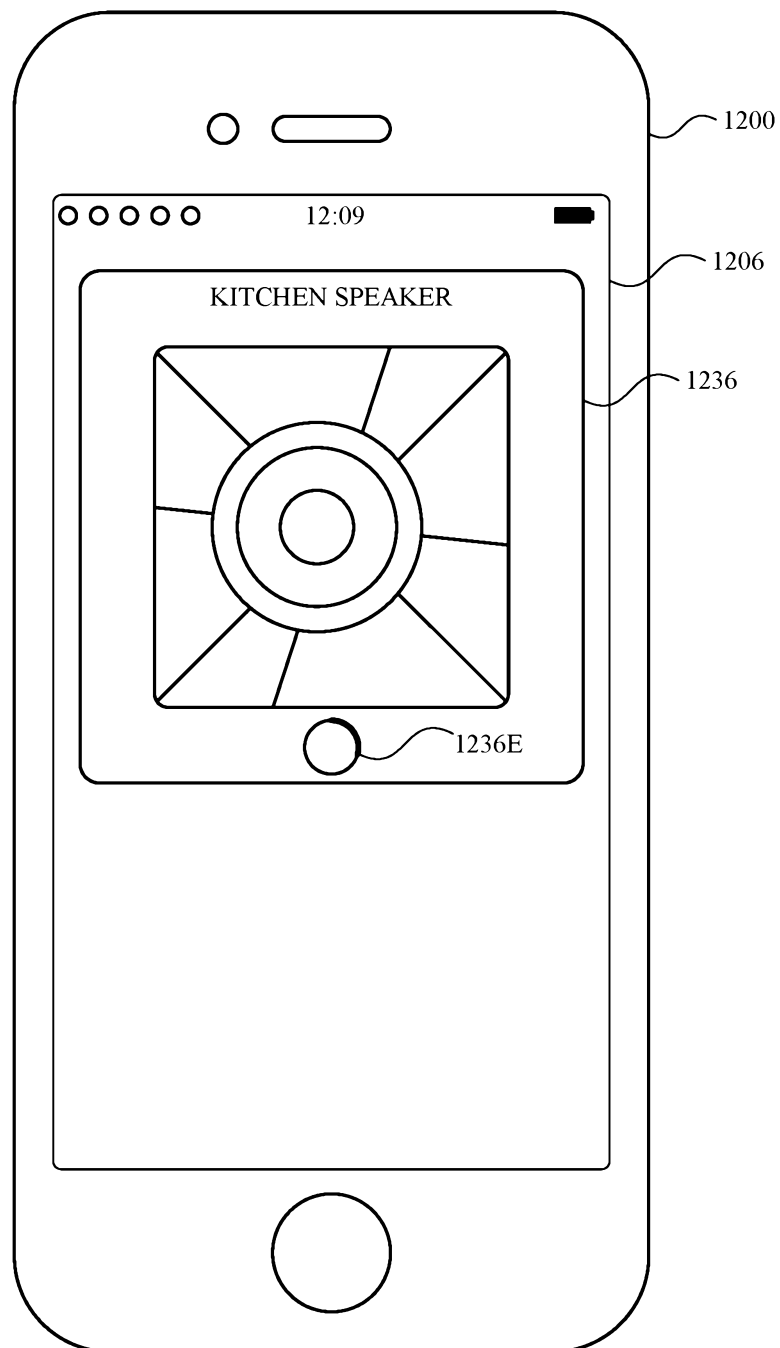


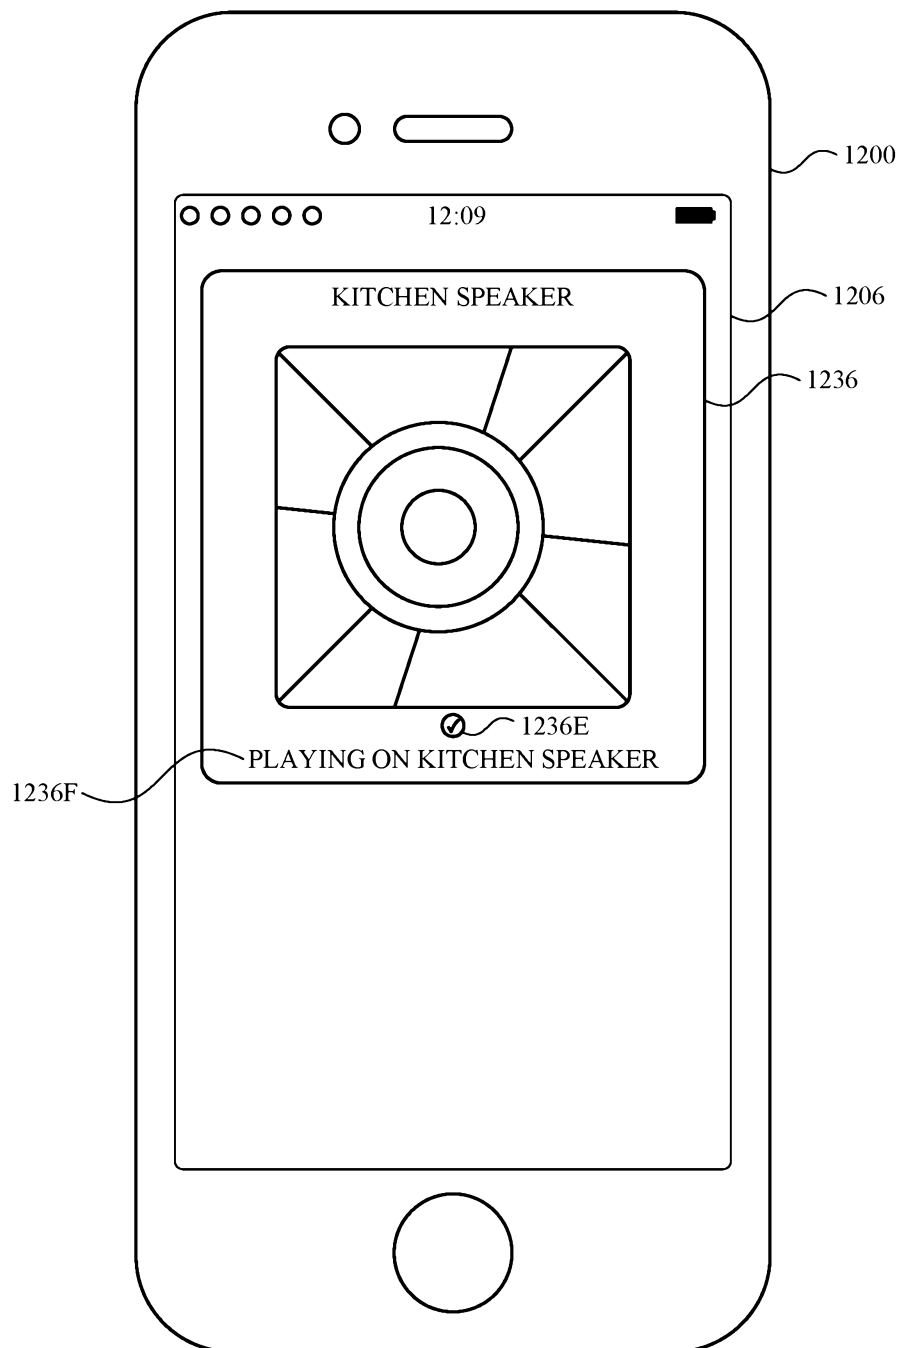
FIG. 12Q

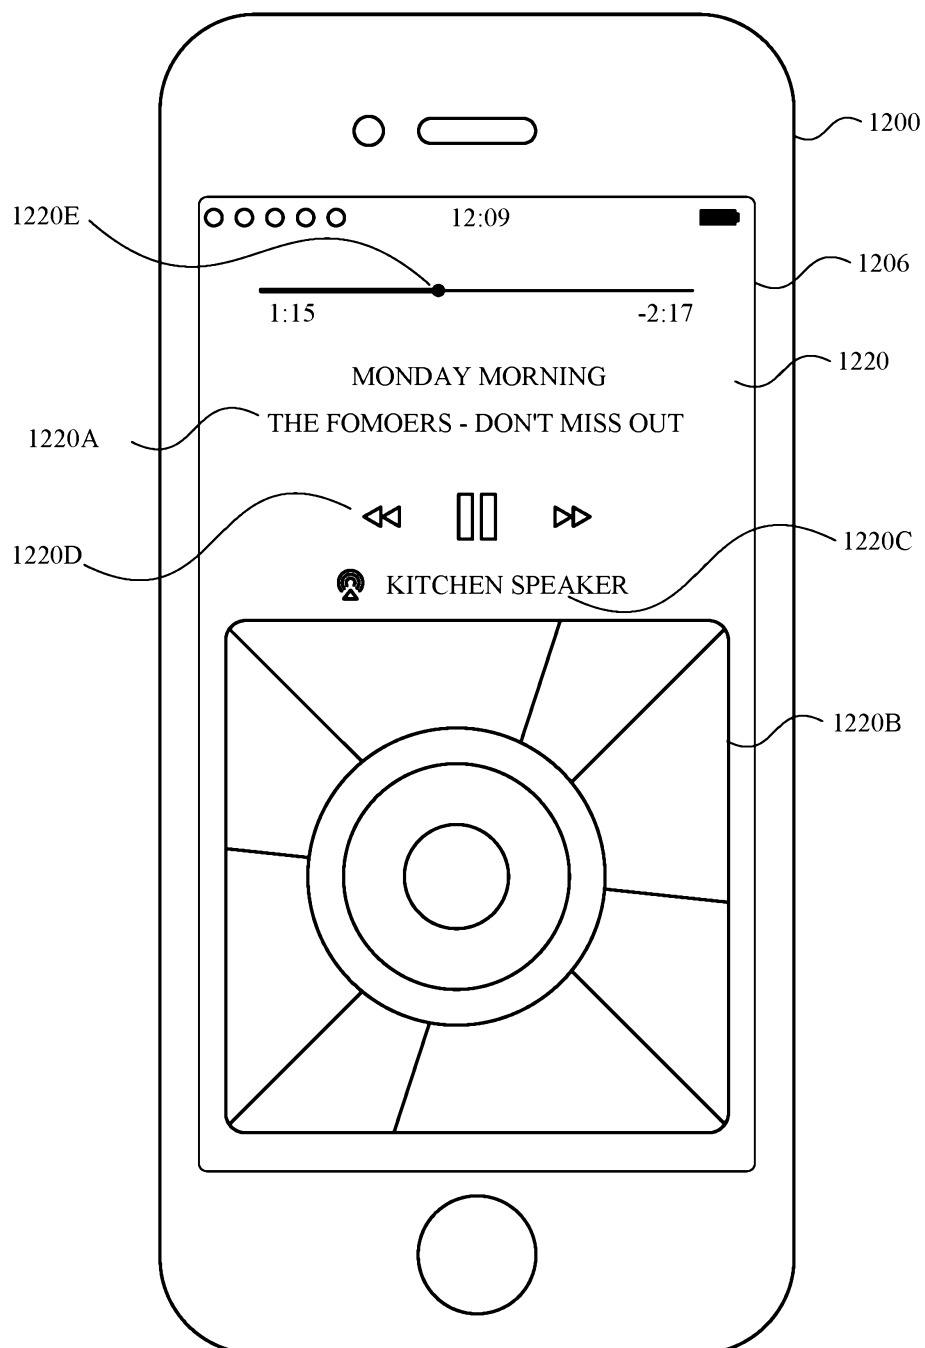
**FIG. 12R**

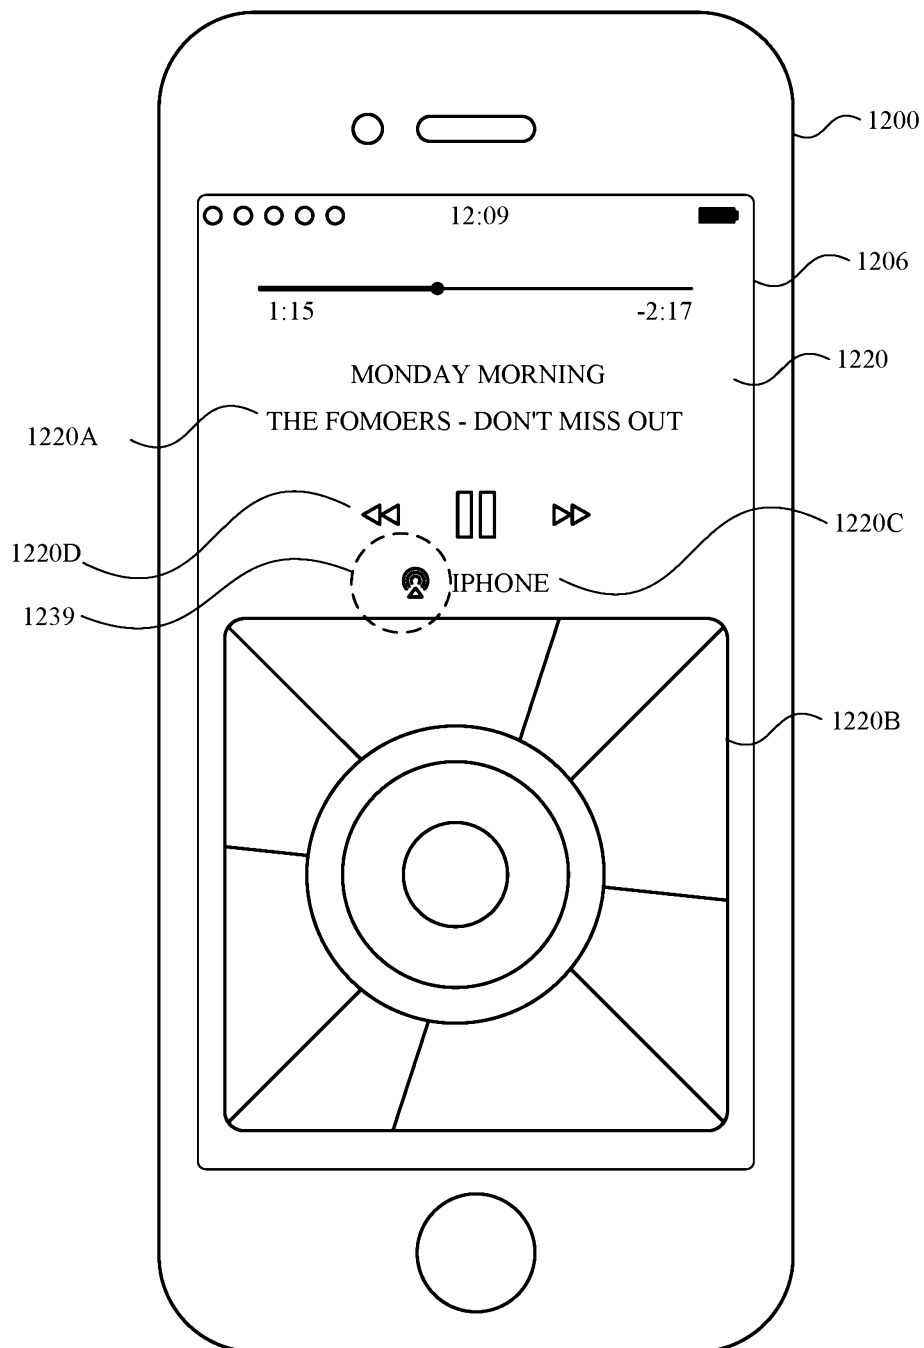
**FIG. 12S**

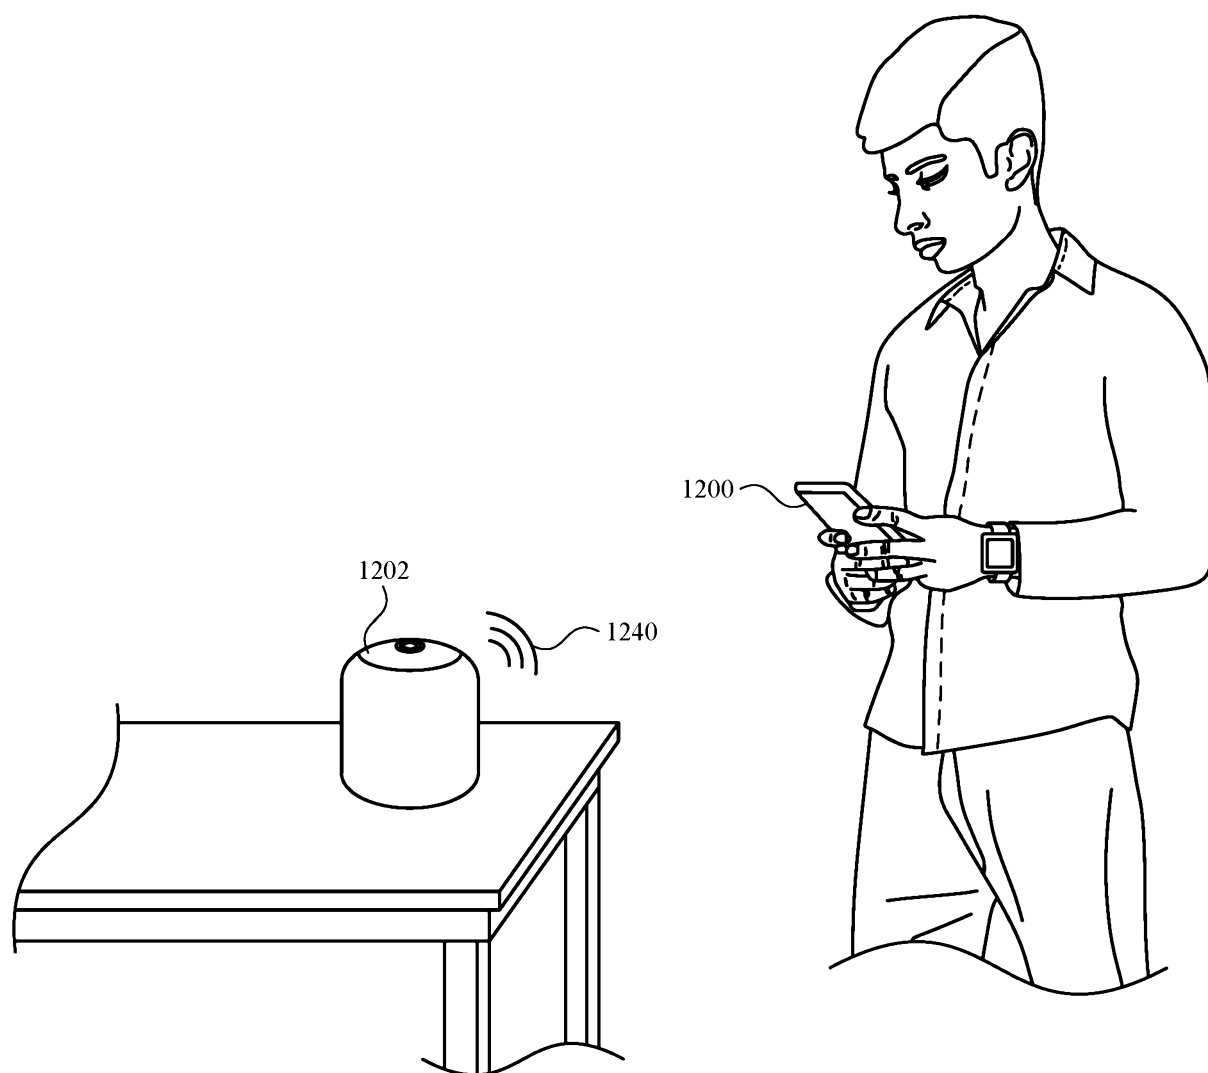


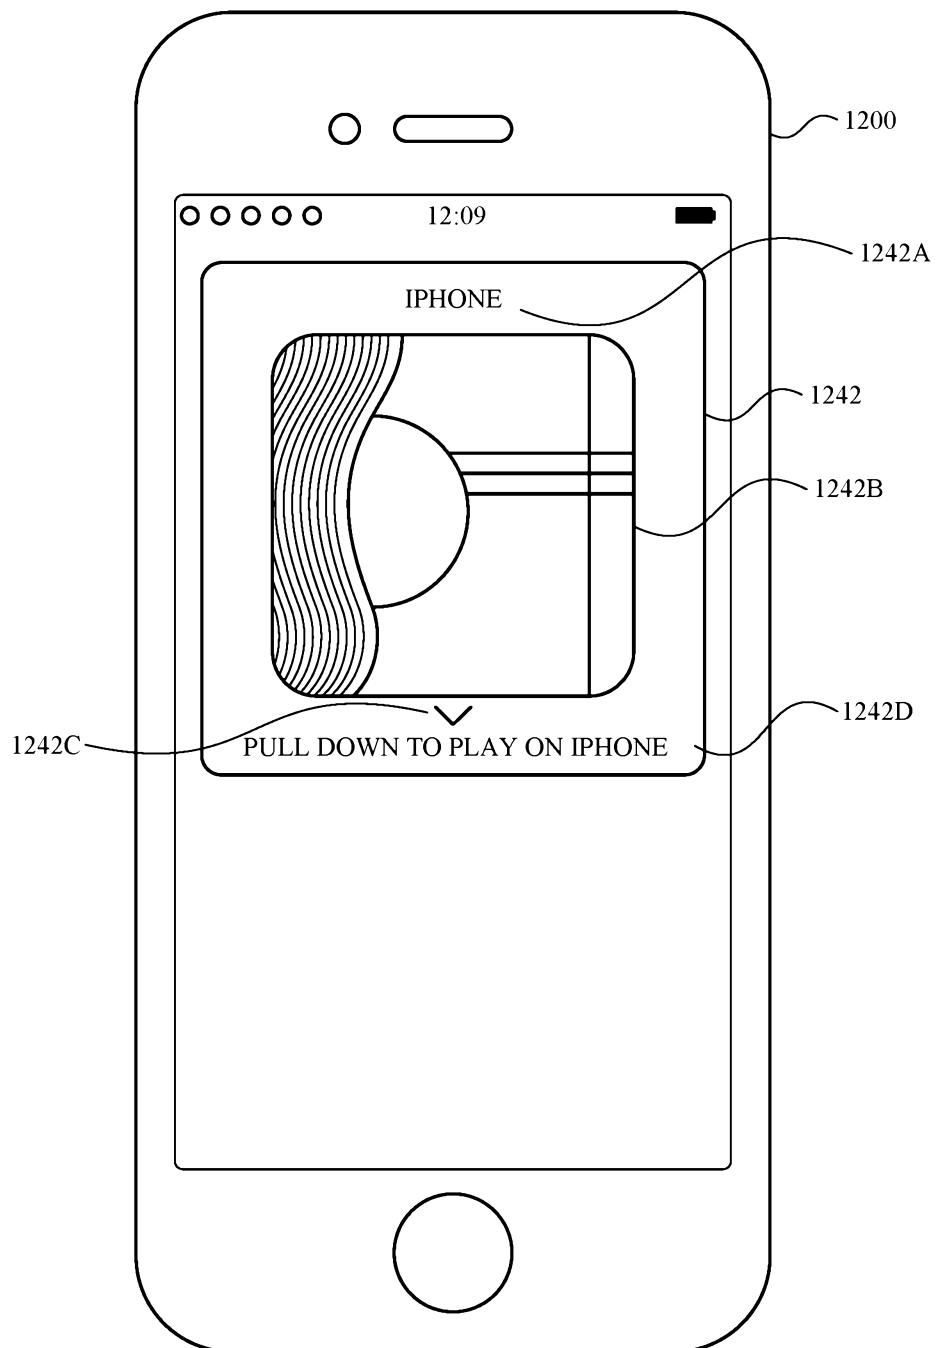
**FIG. 12T**

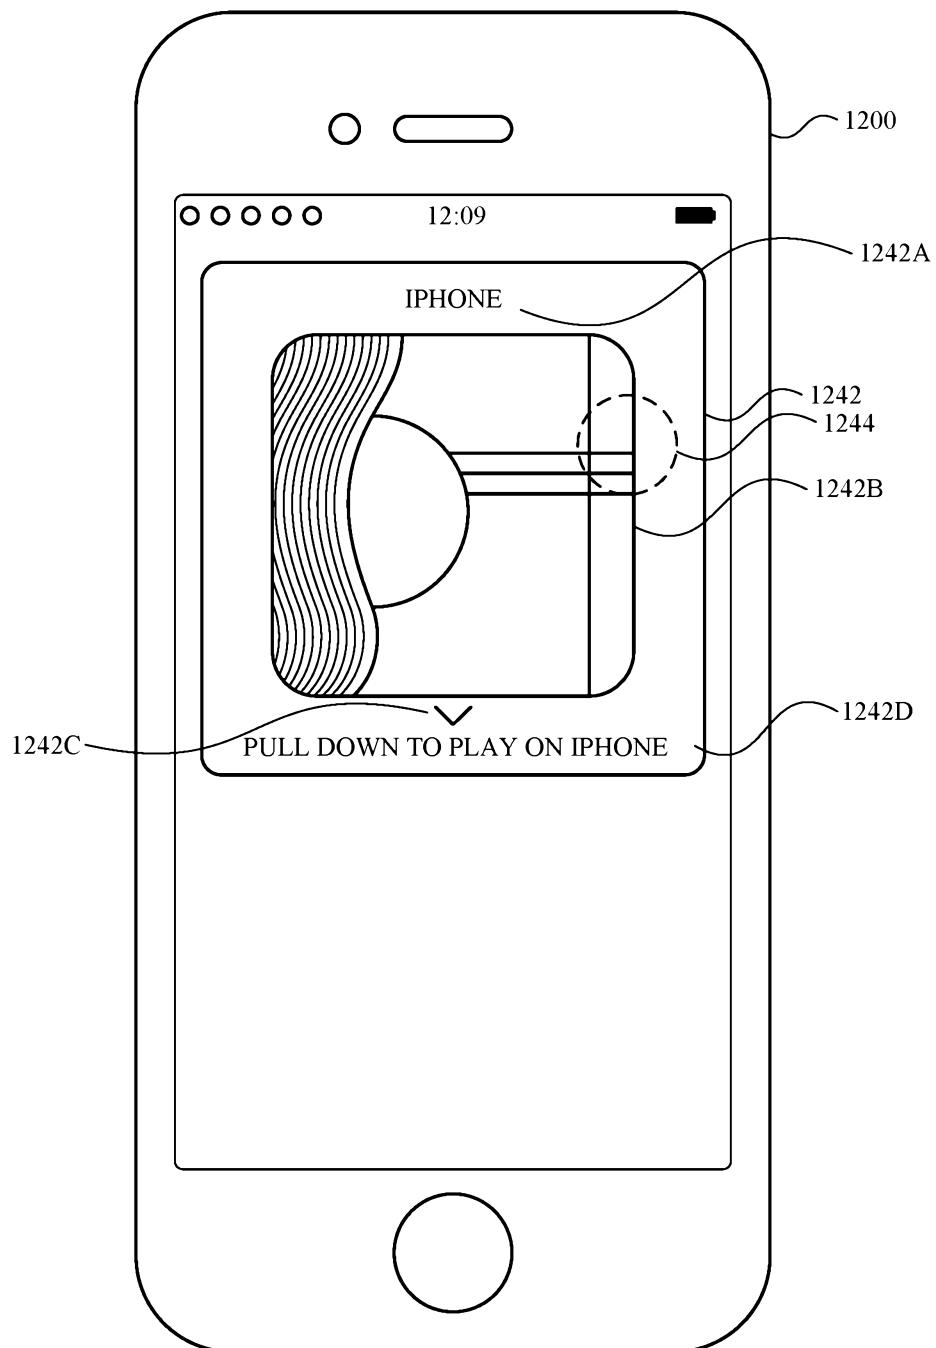
**FIG. 12U**

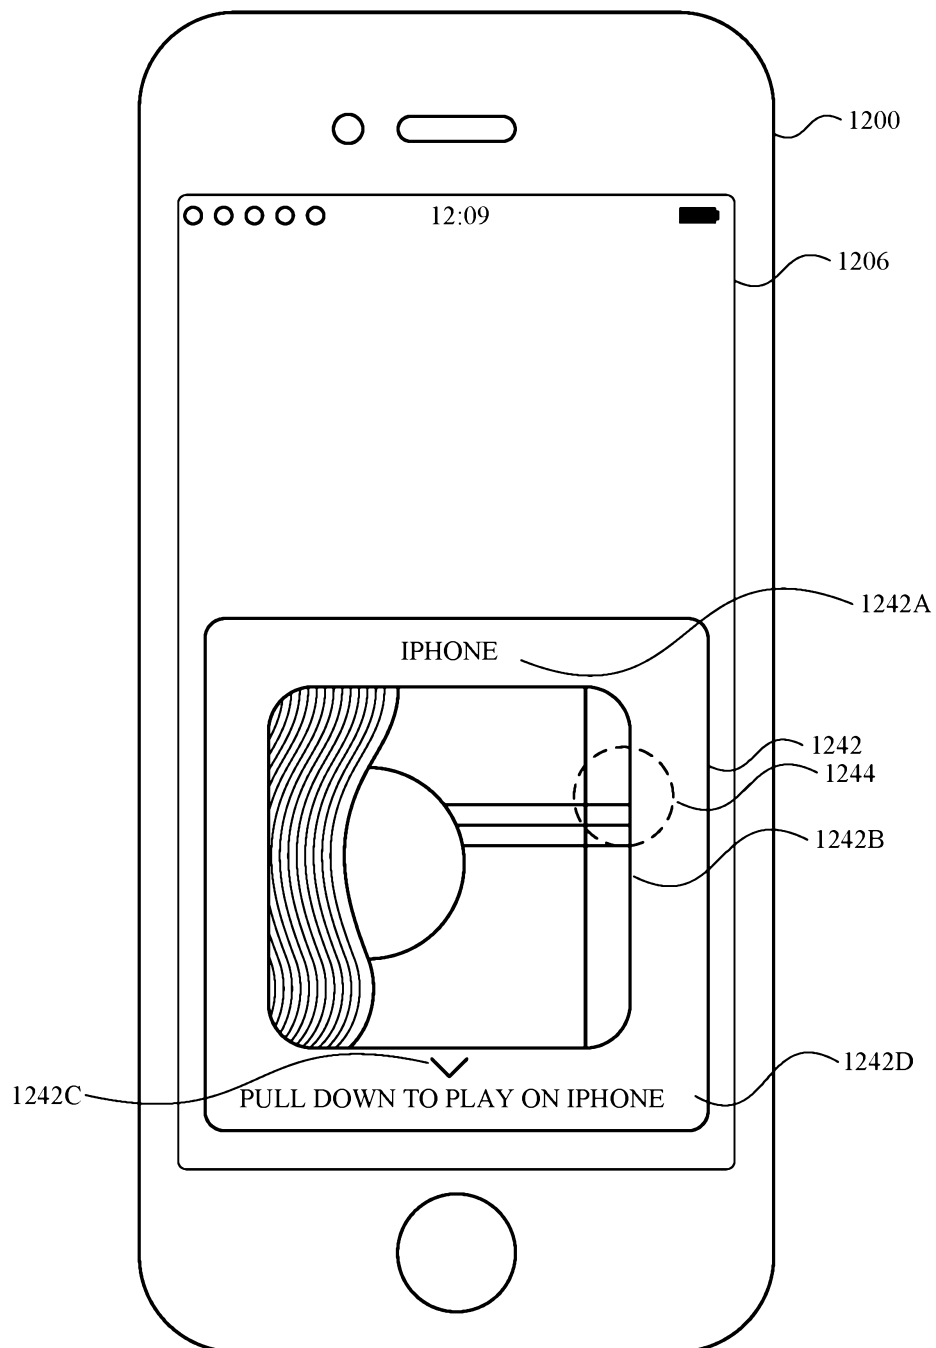
**FIG. 12V**

**FIG. 12W**

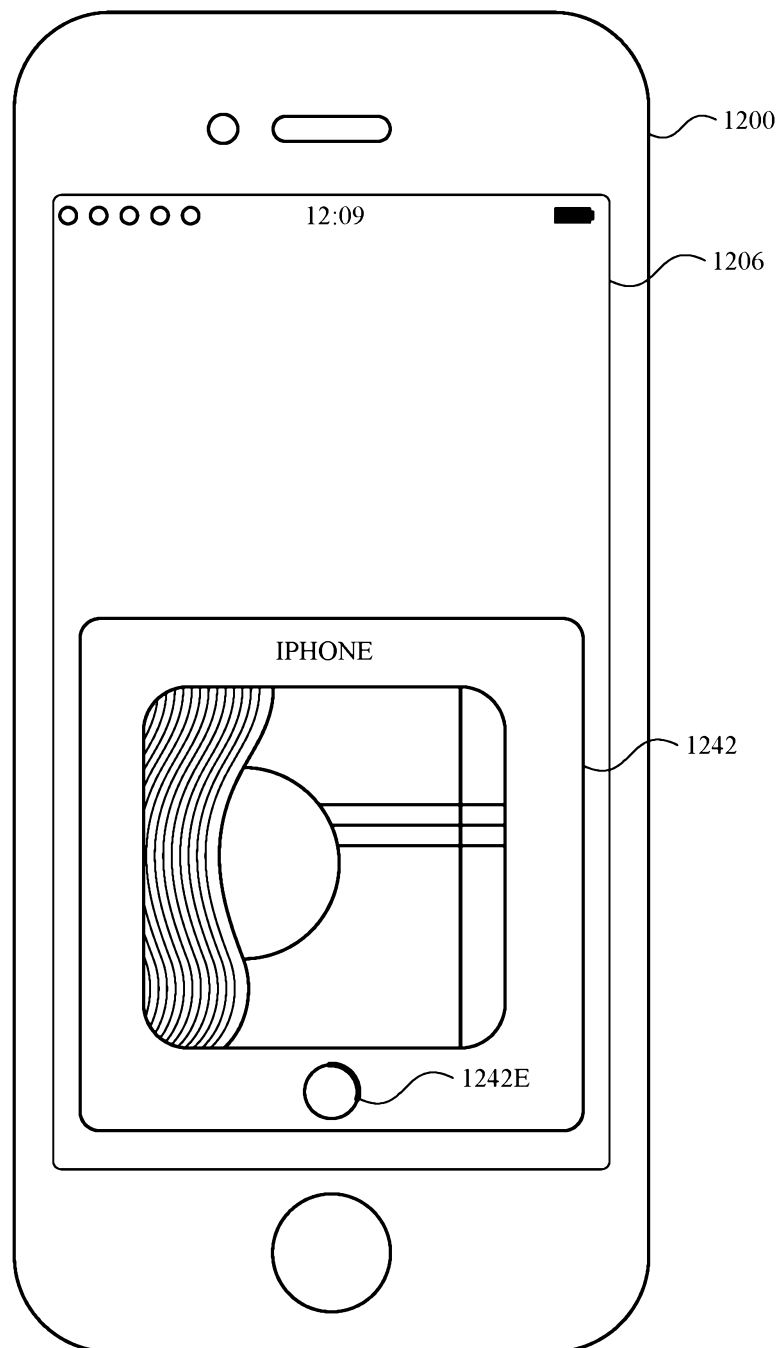
**FIG. 12X**

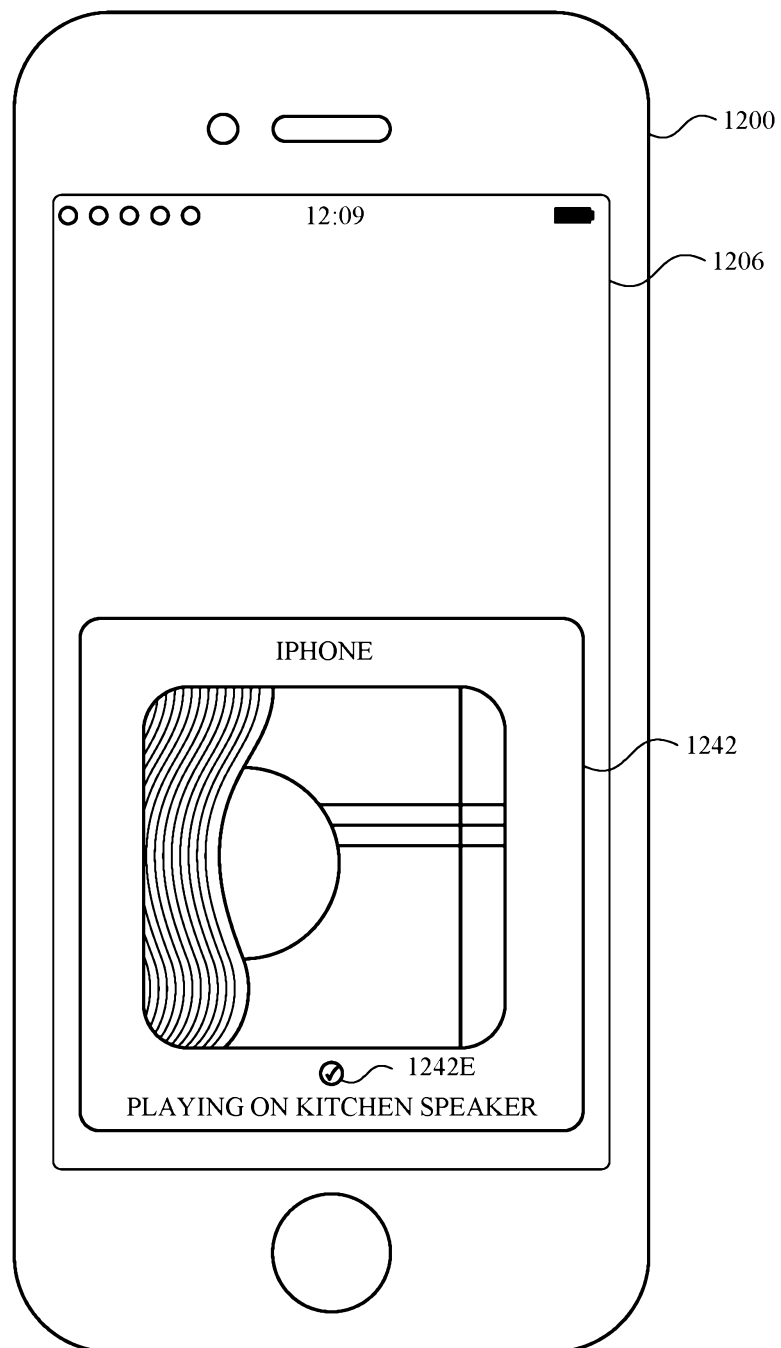
**FIG. 12Y**

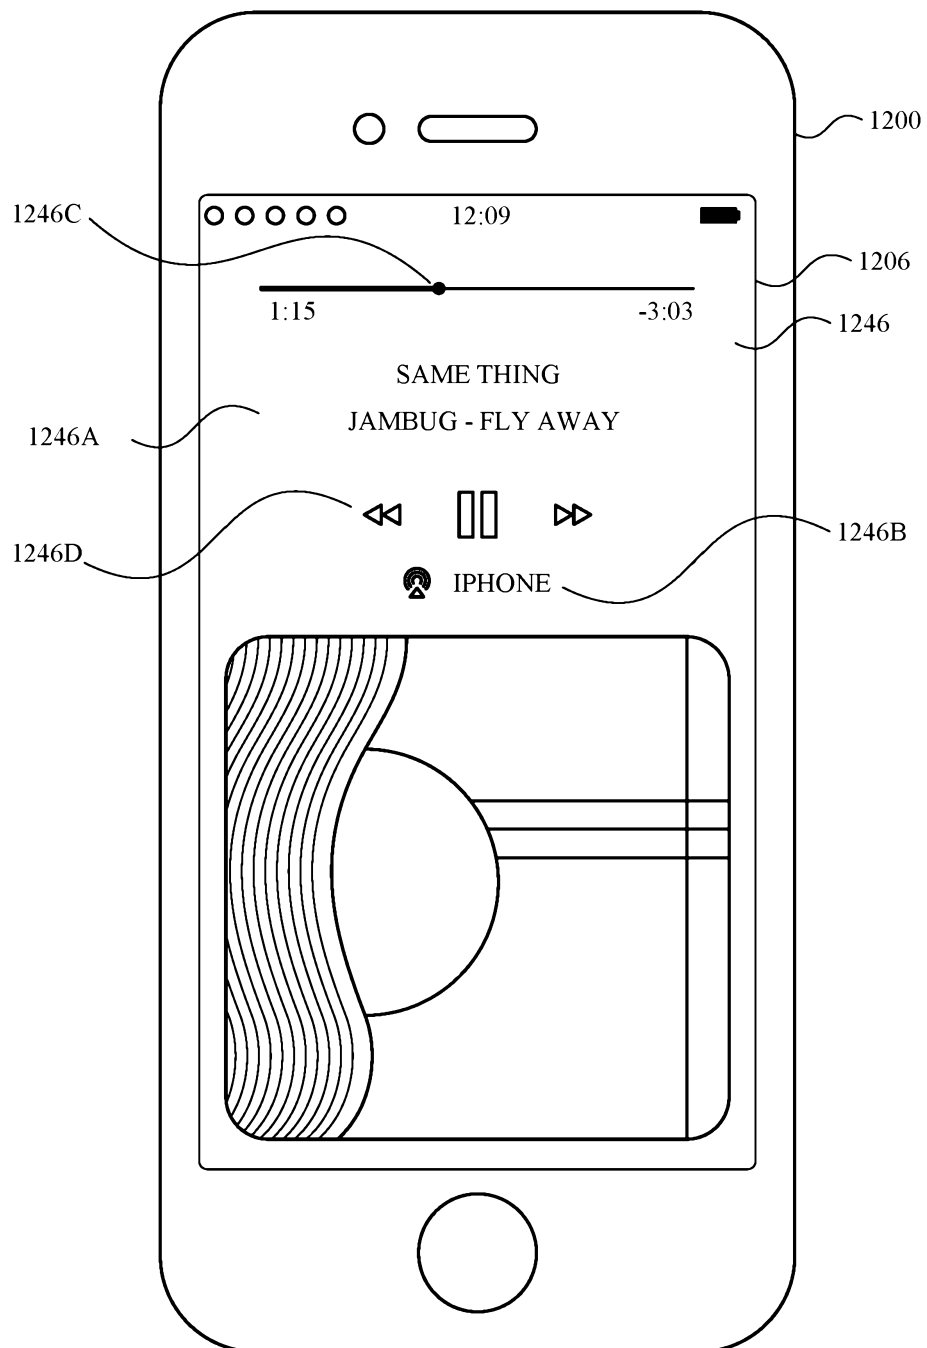
**FIG. 12Z**

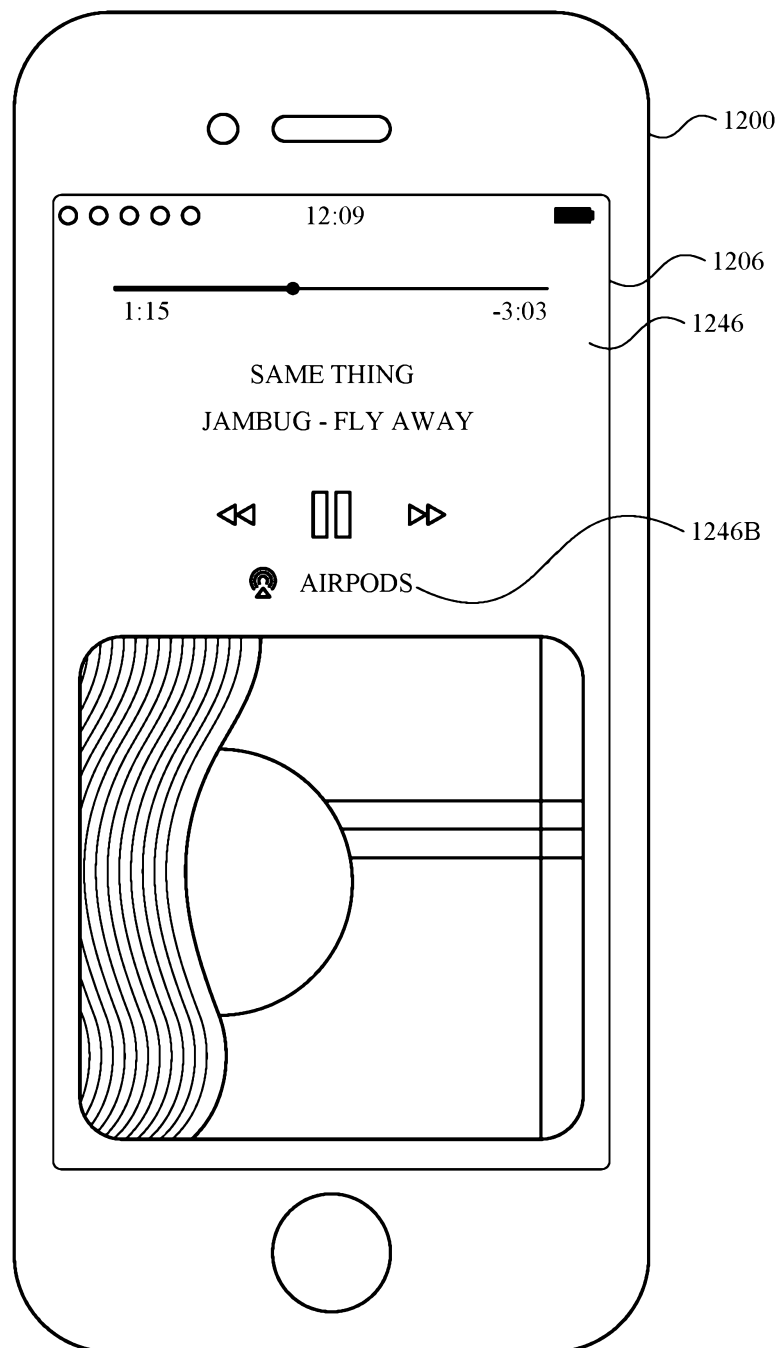
**FIG. 12AA**

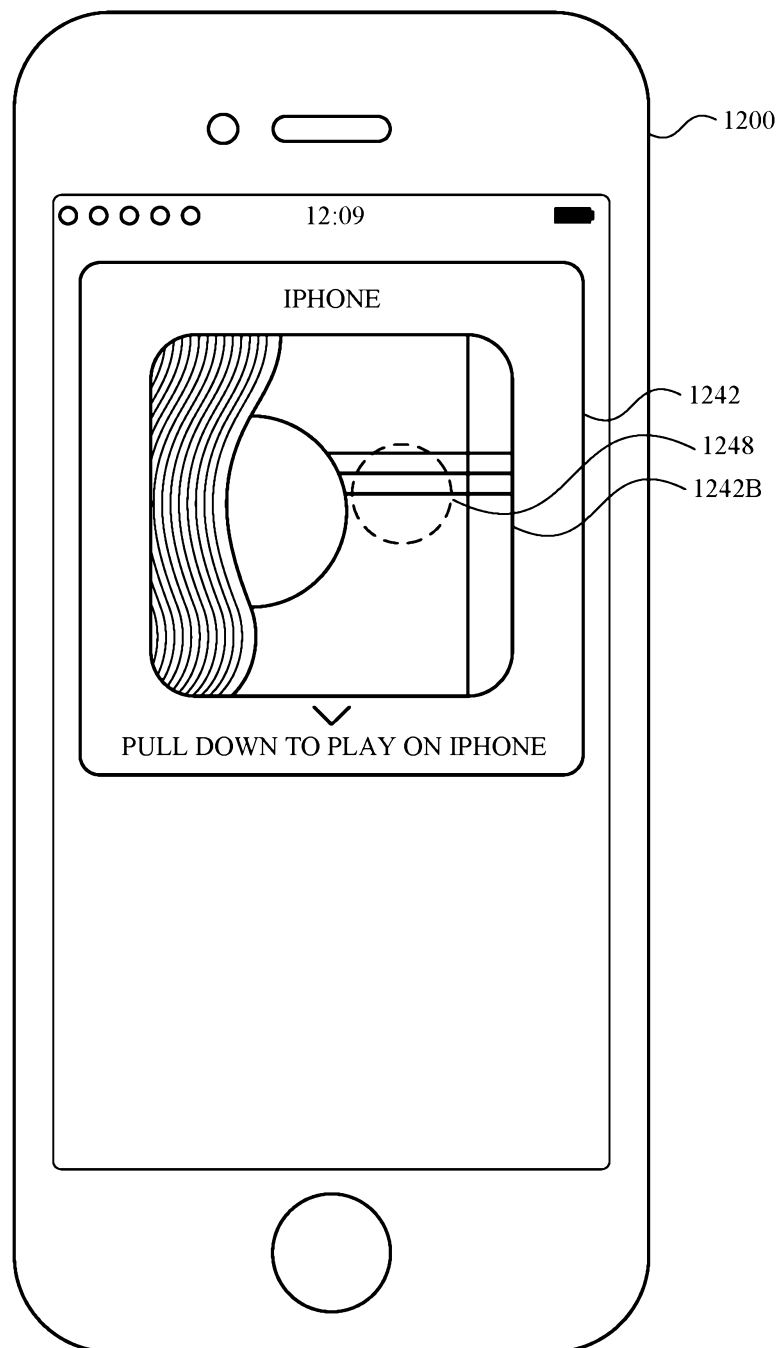


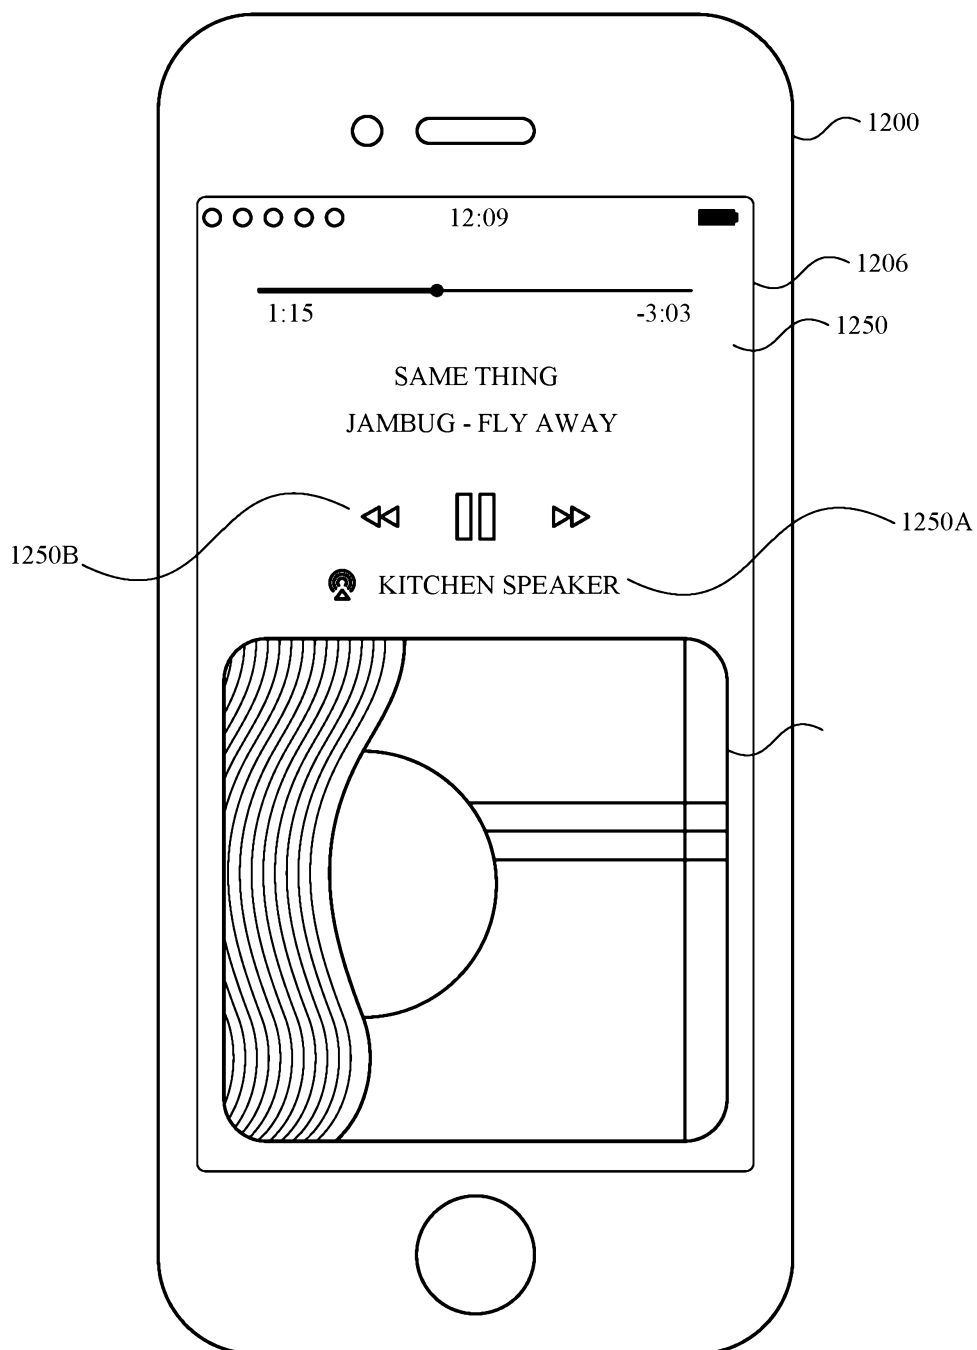
**FIG. 12AB**

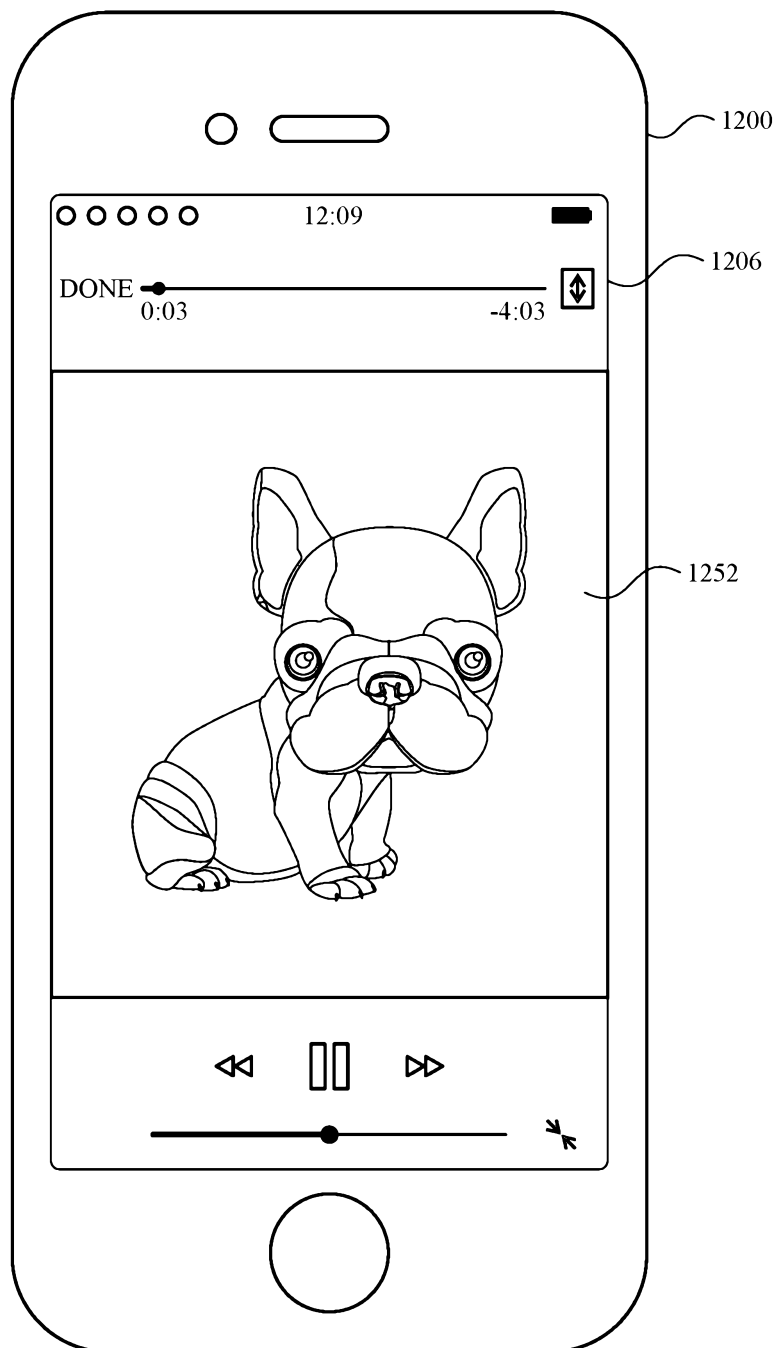
**FIG. 12AC**

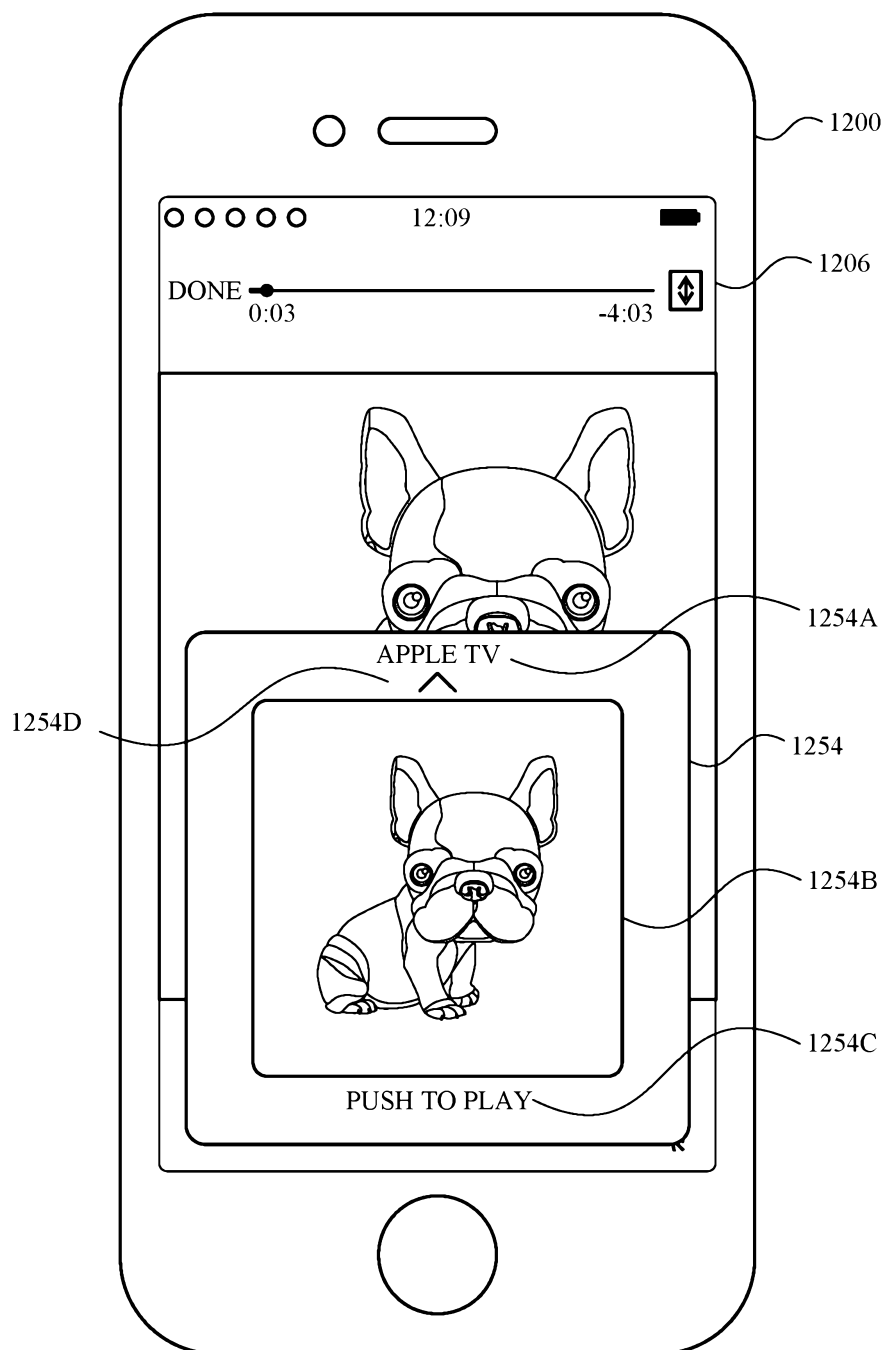
**FIG. 12AD**

**FIG. 12AE**

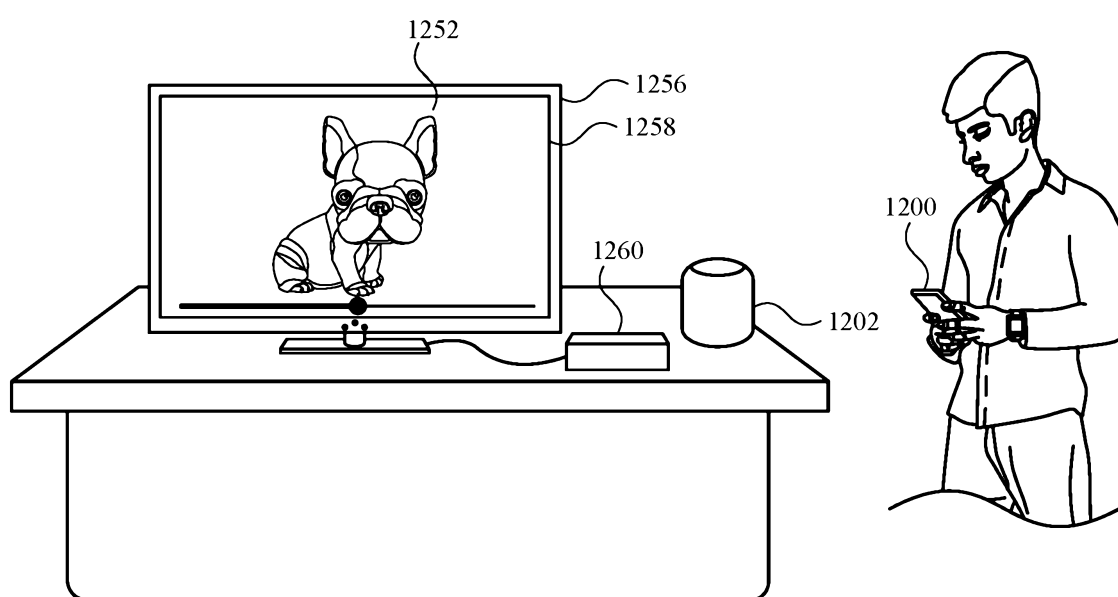
**FIG. 12AF**

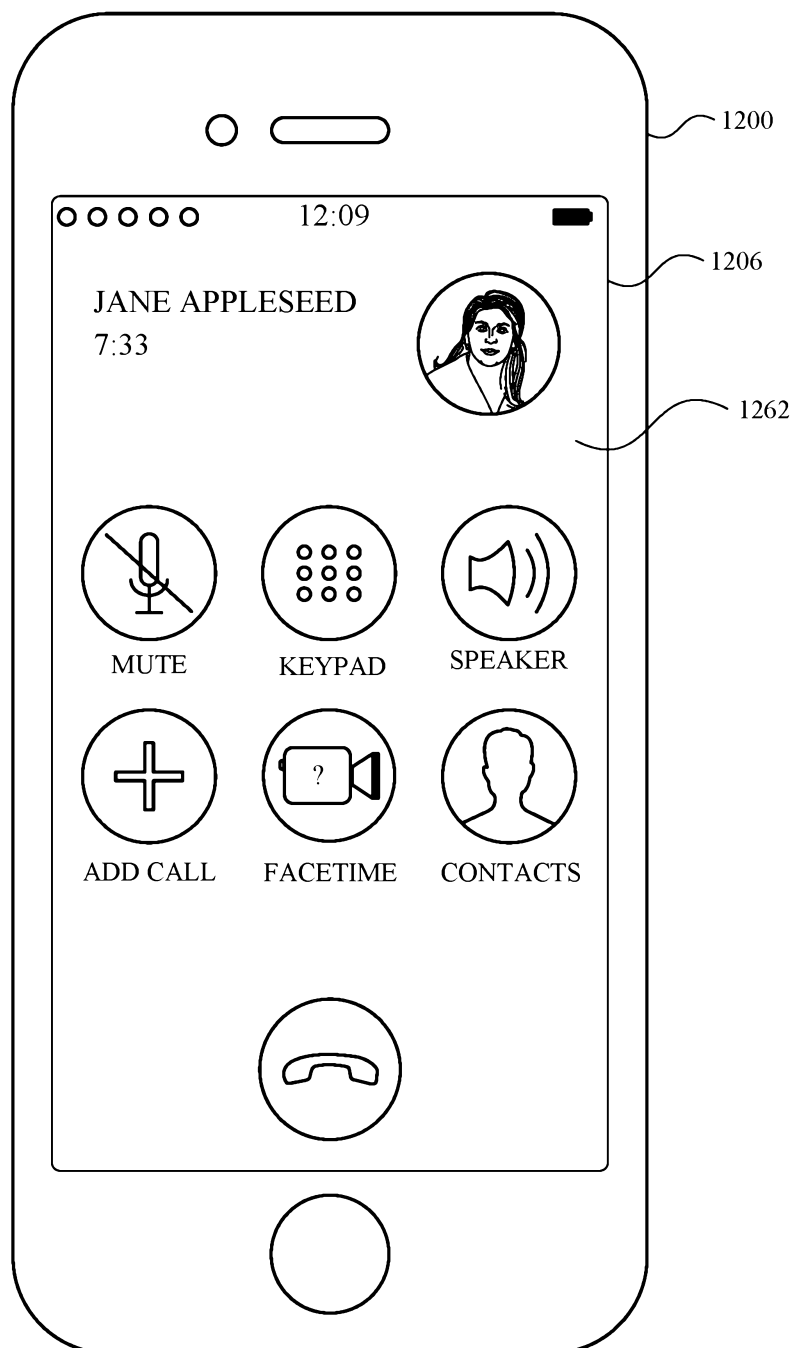
**FIG. 12AG**

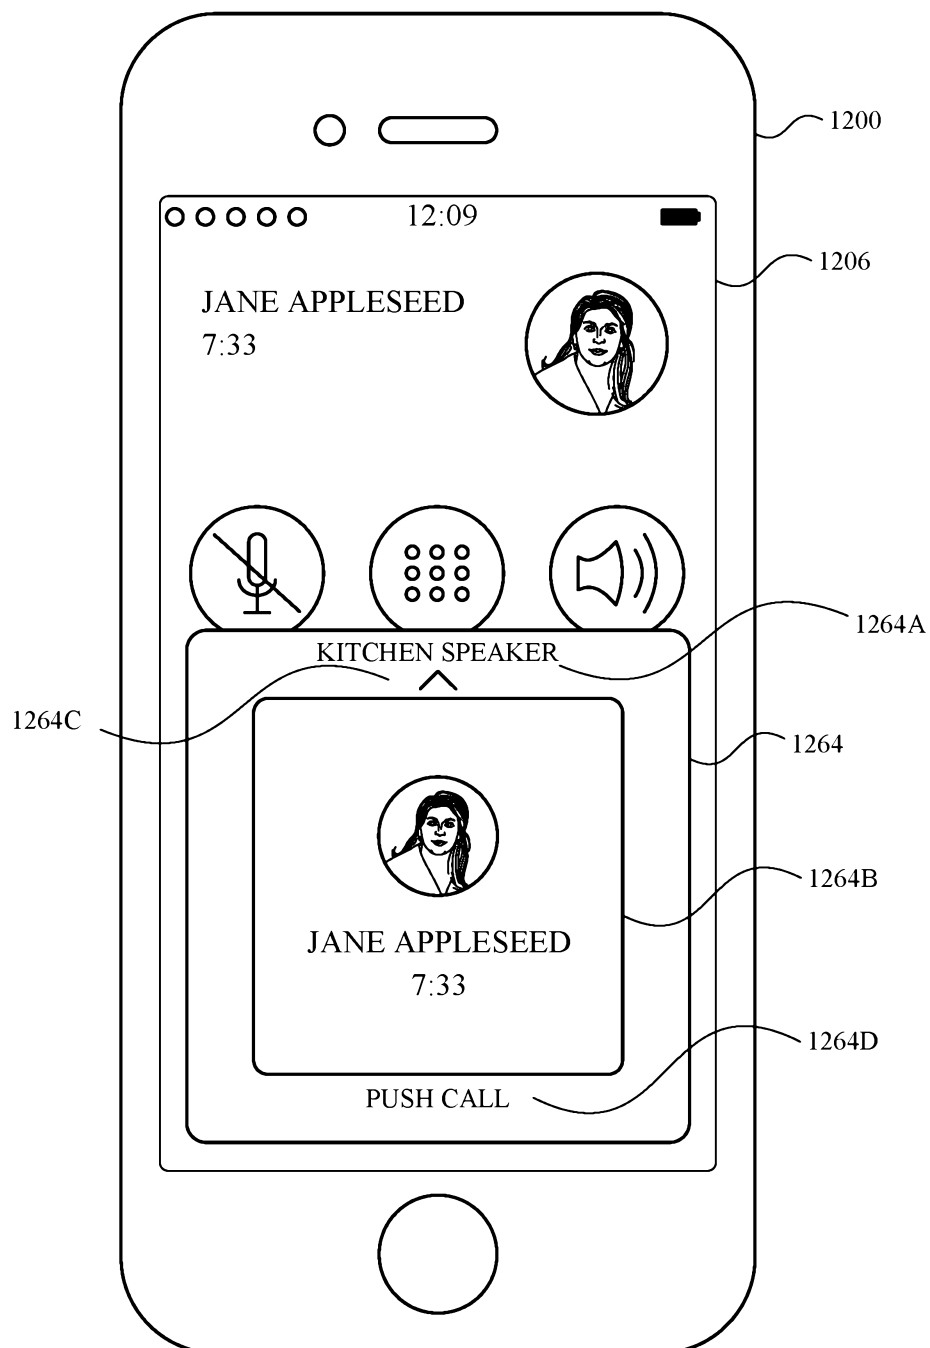
*FIG. 12AH*

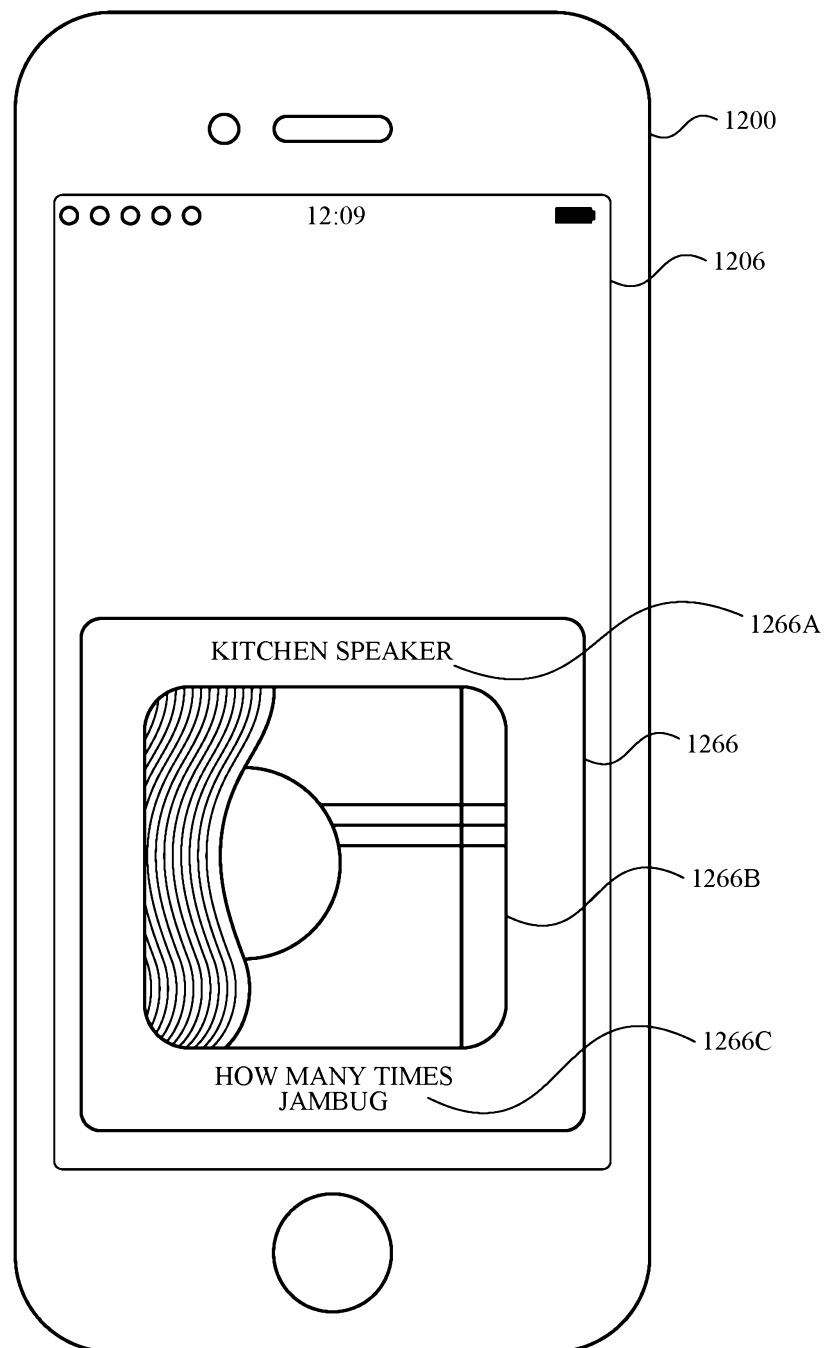
**FIG. 12AI**

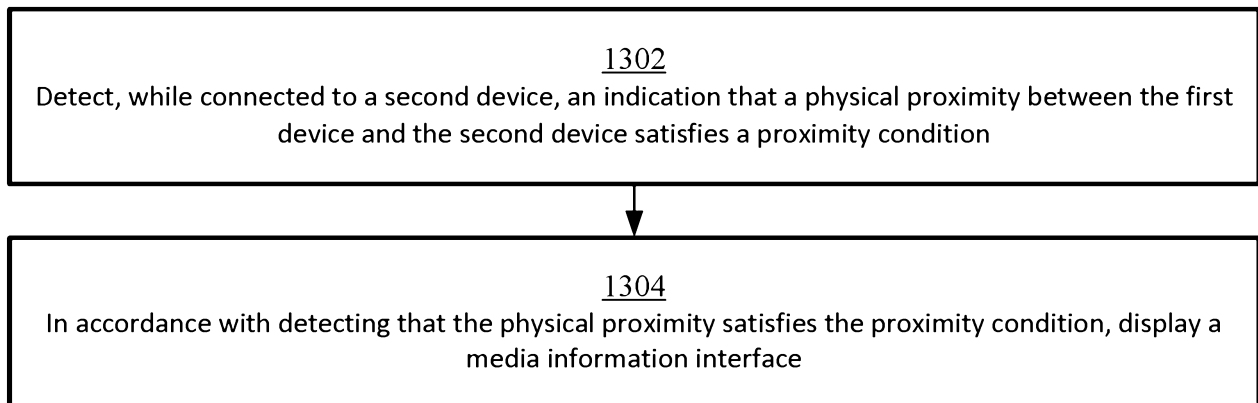


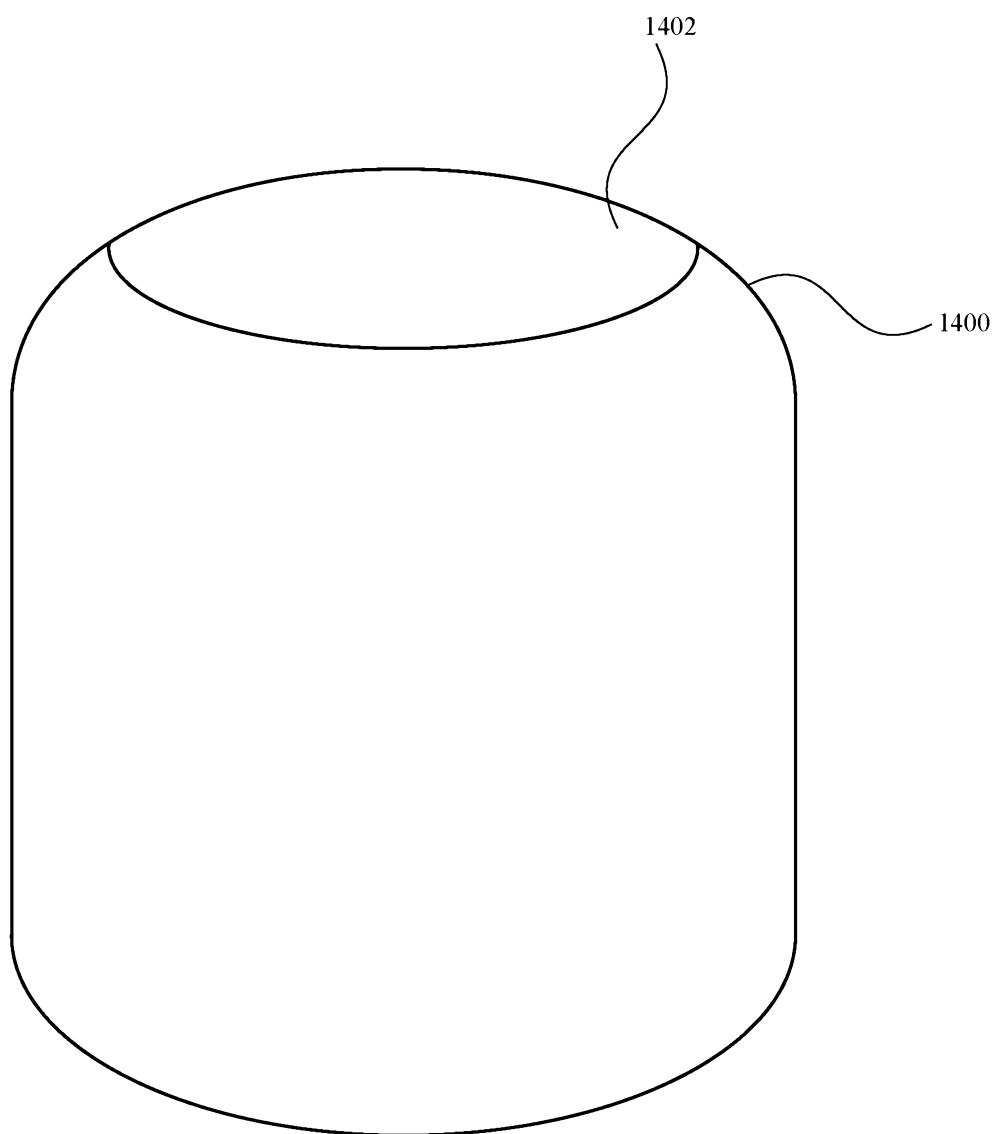
*FIG. 12AJ*

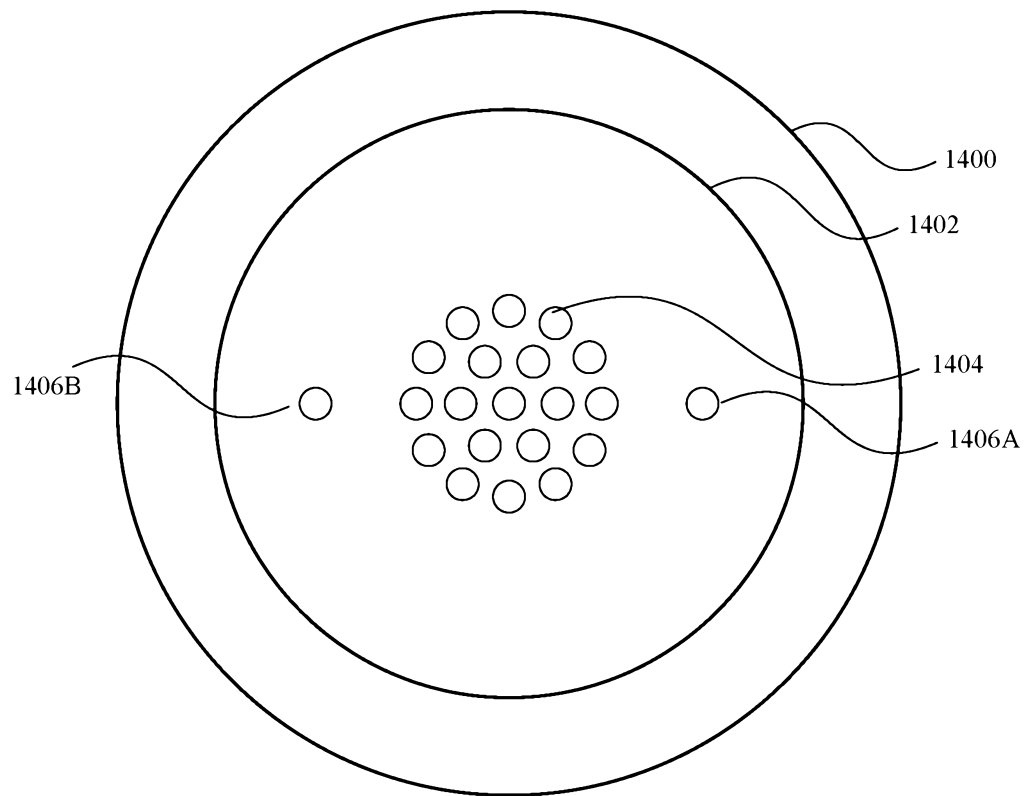
**FIG. 12AK**

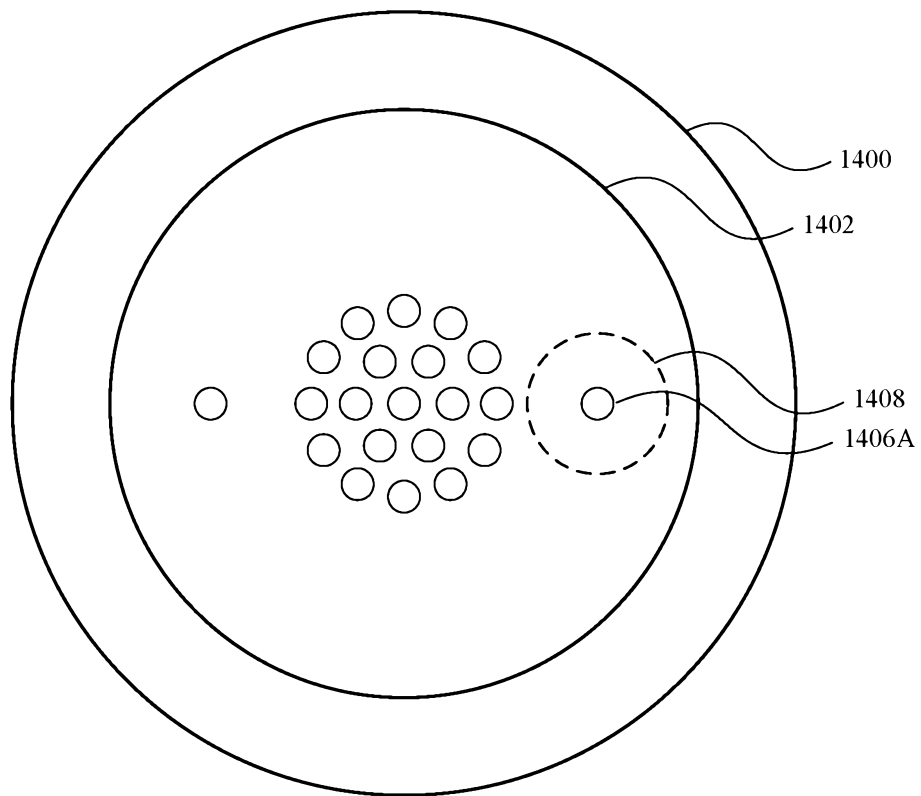
**FIG. 12AL**

**FIG. 12AM**

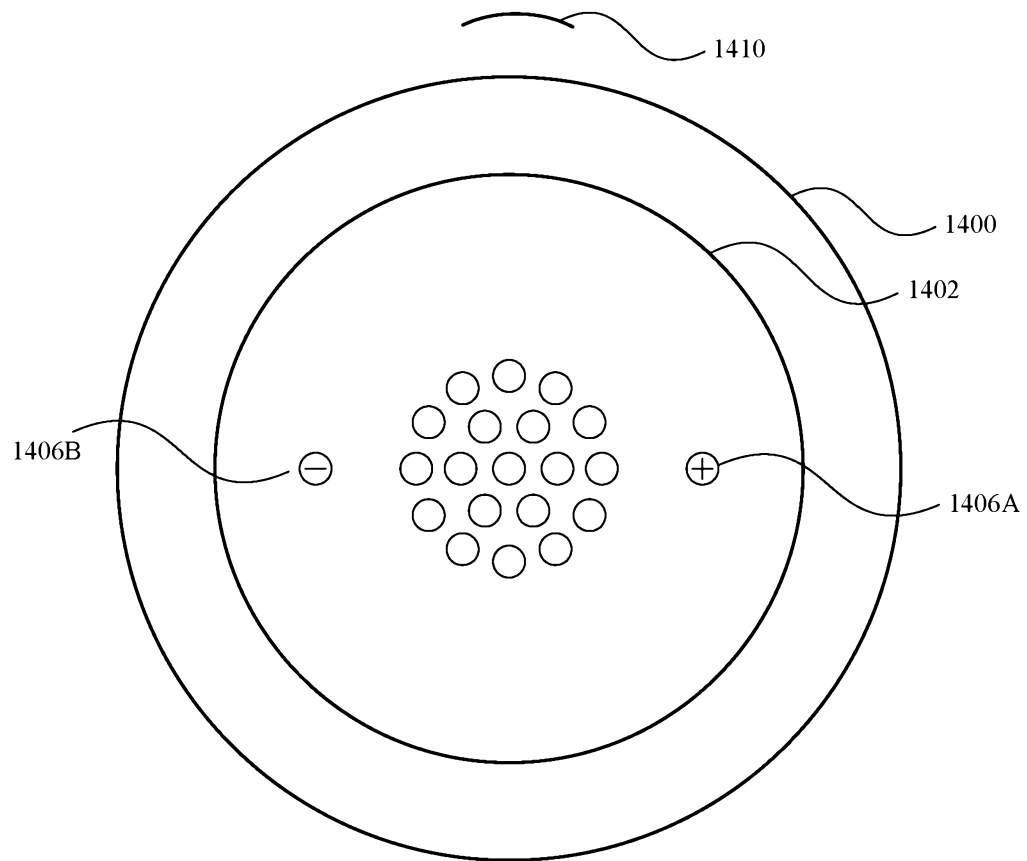
1300 **FIG. 13**

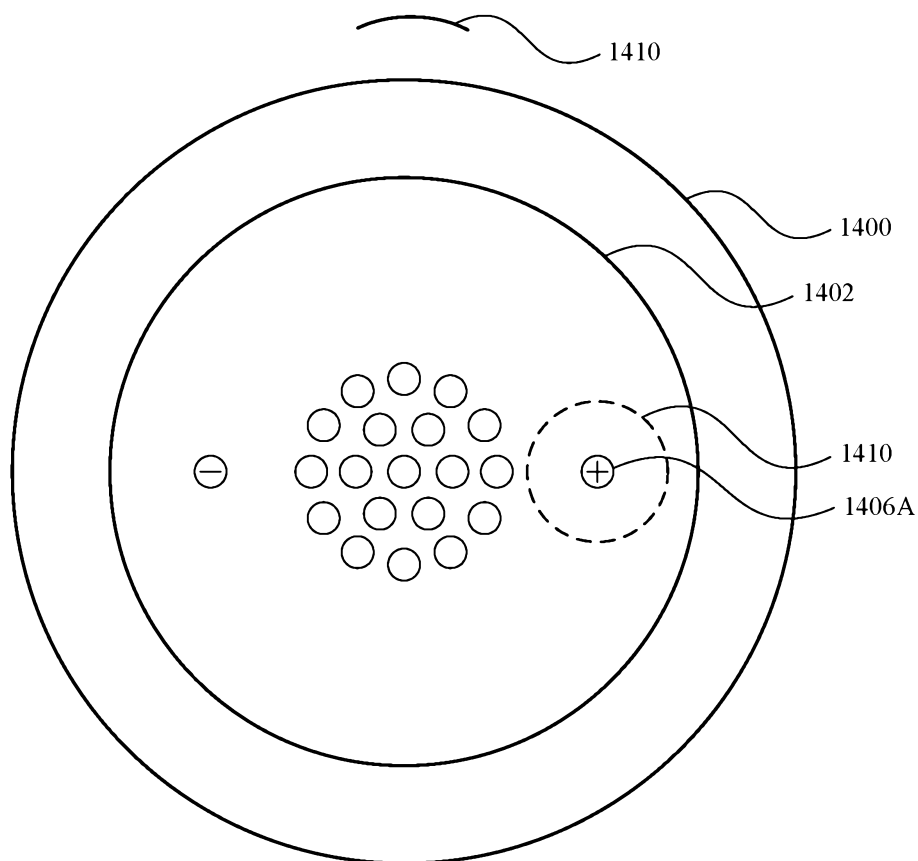
***FIG. 14A***

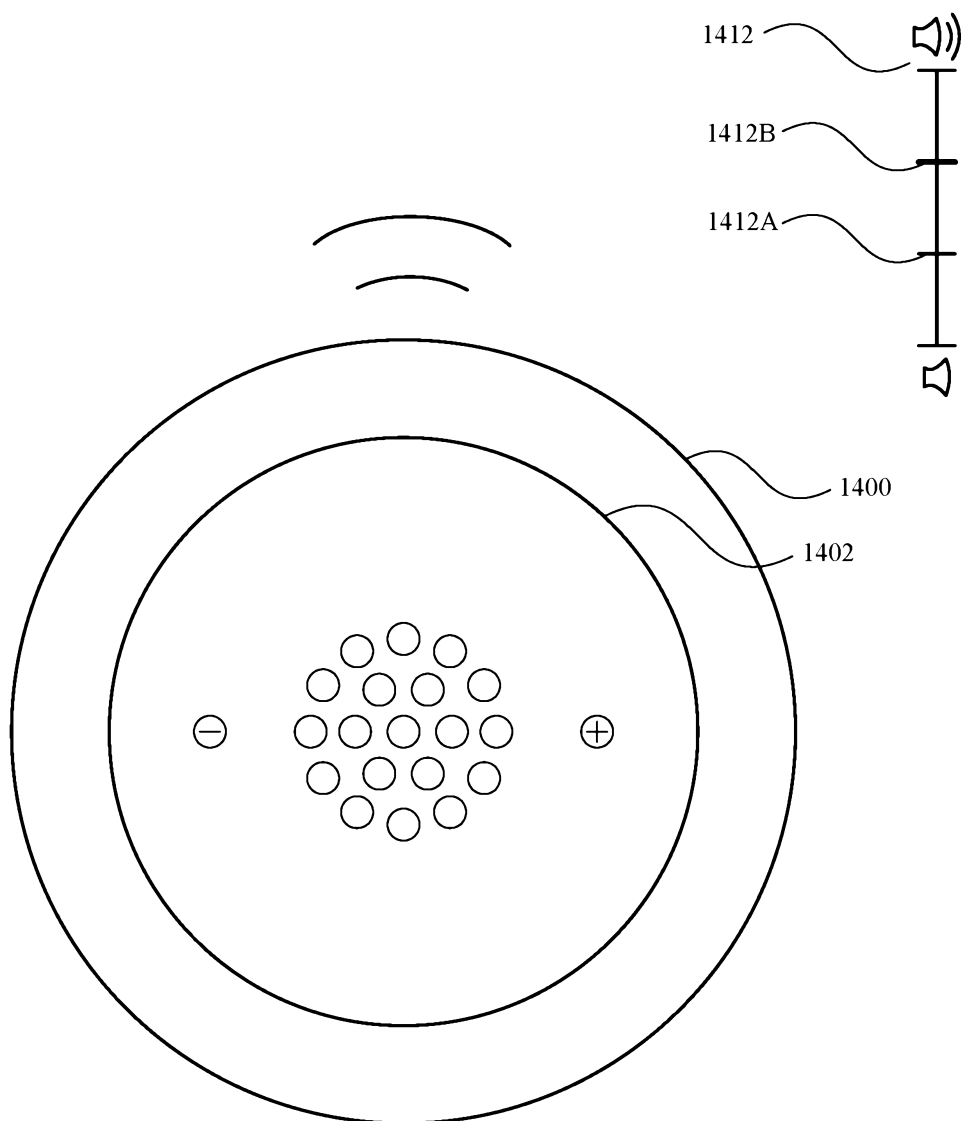
**FIG. 14B**

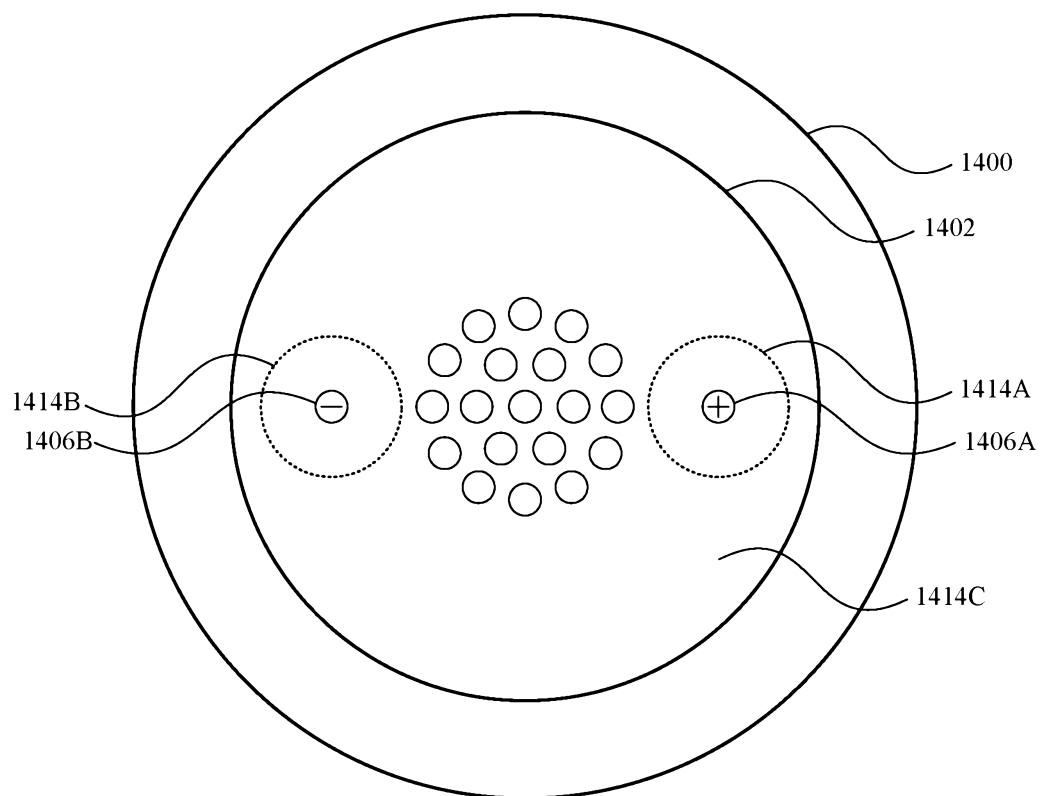
**FIG. 14C**

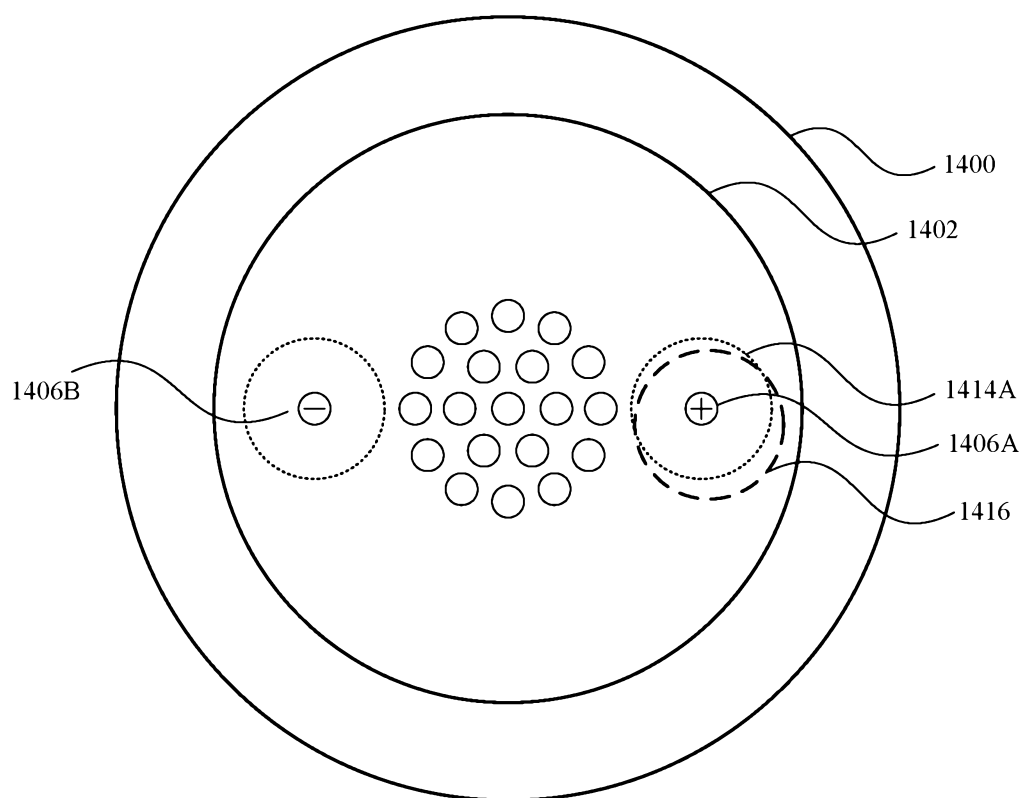


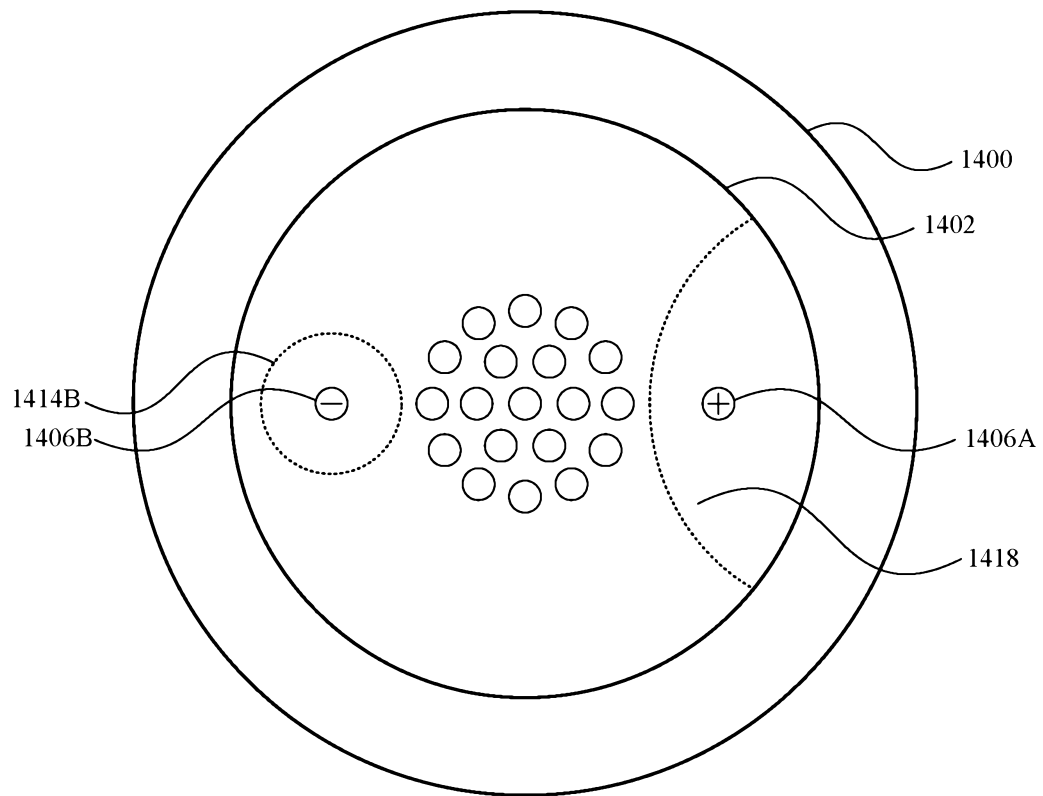
**FIG. 14D**

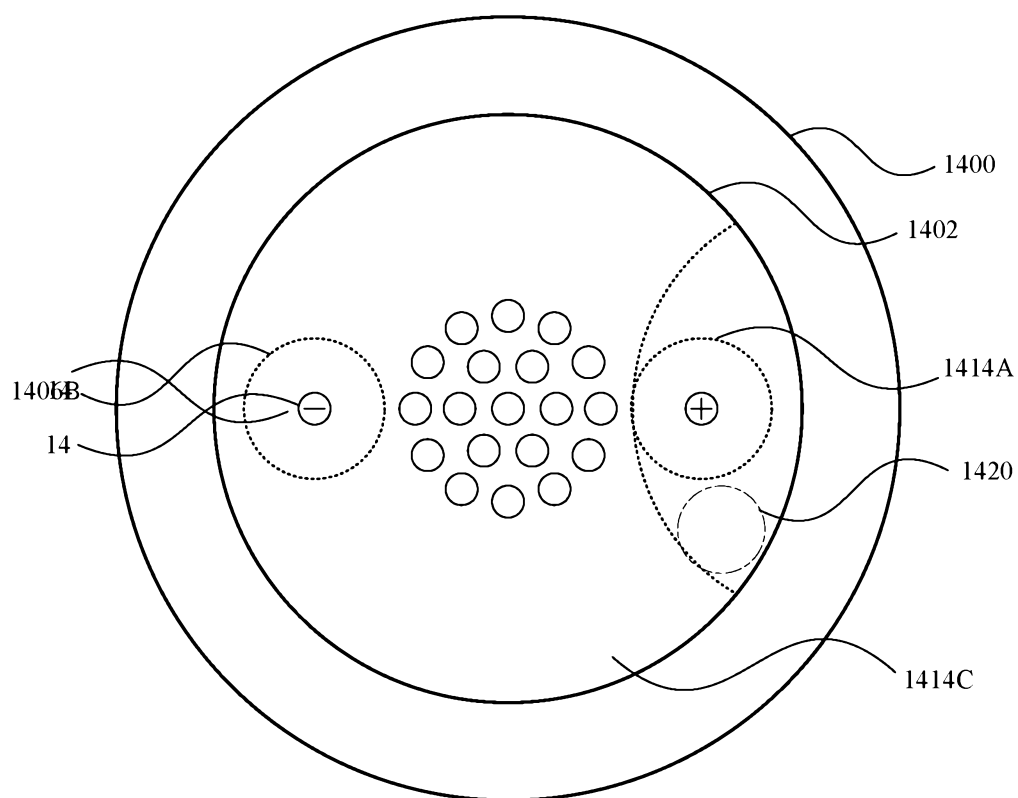
**FIG. 14E**

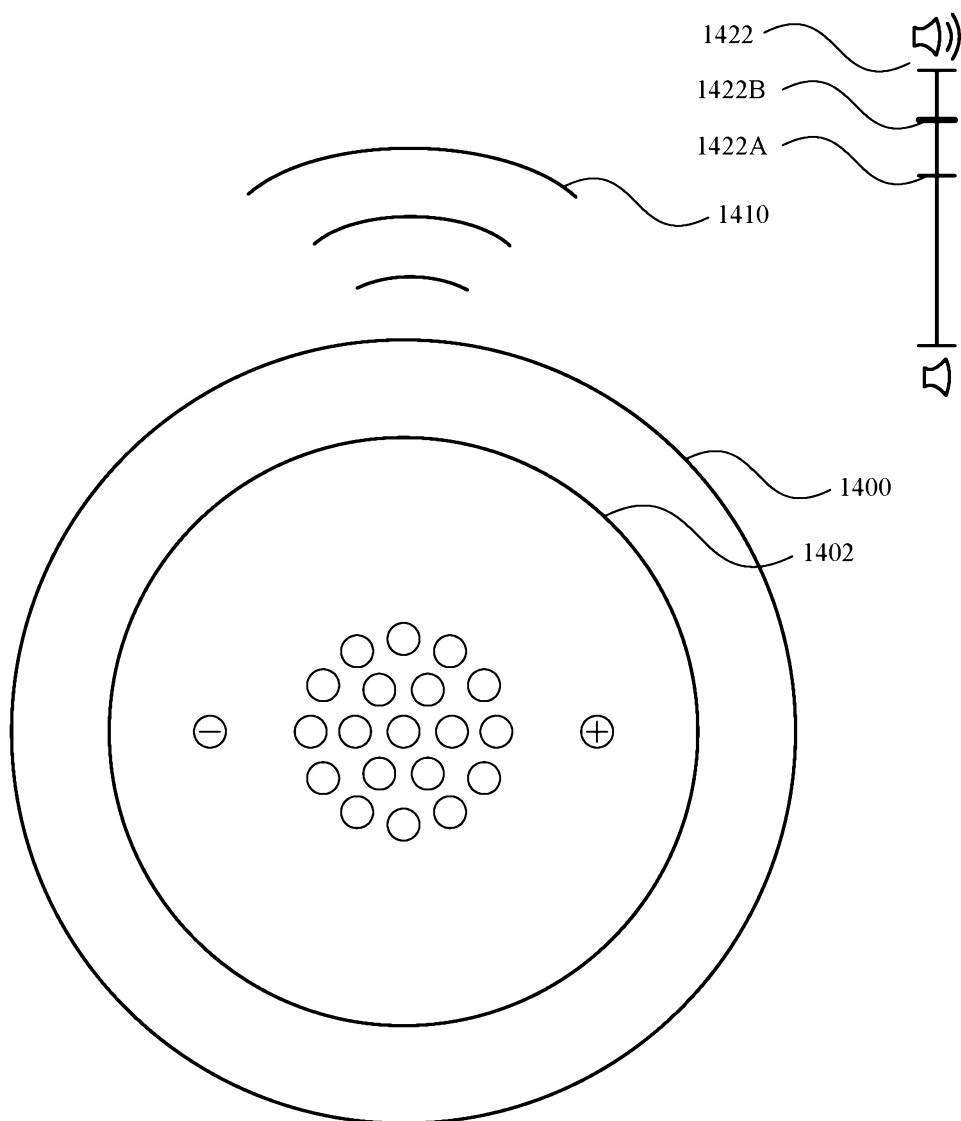
**FIG. 14F**

**FIG. 14G**

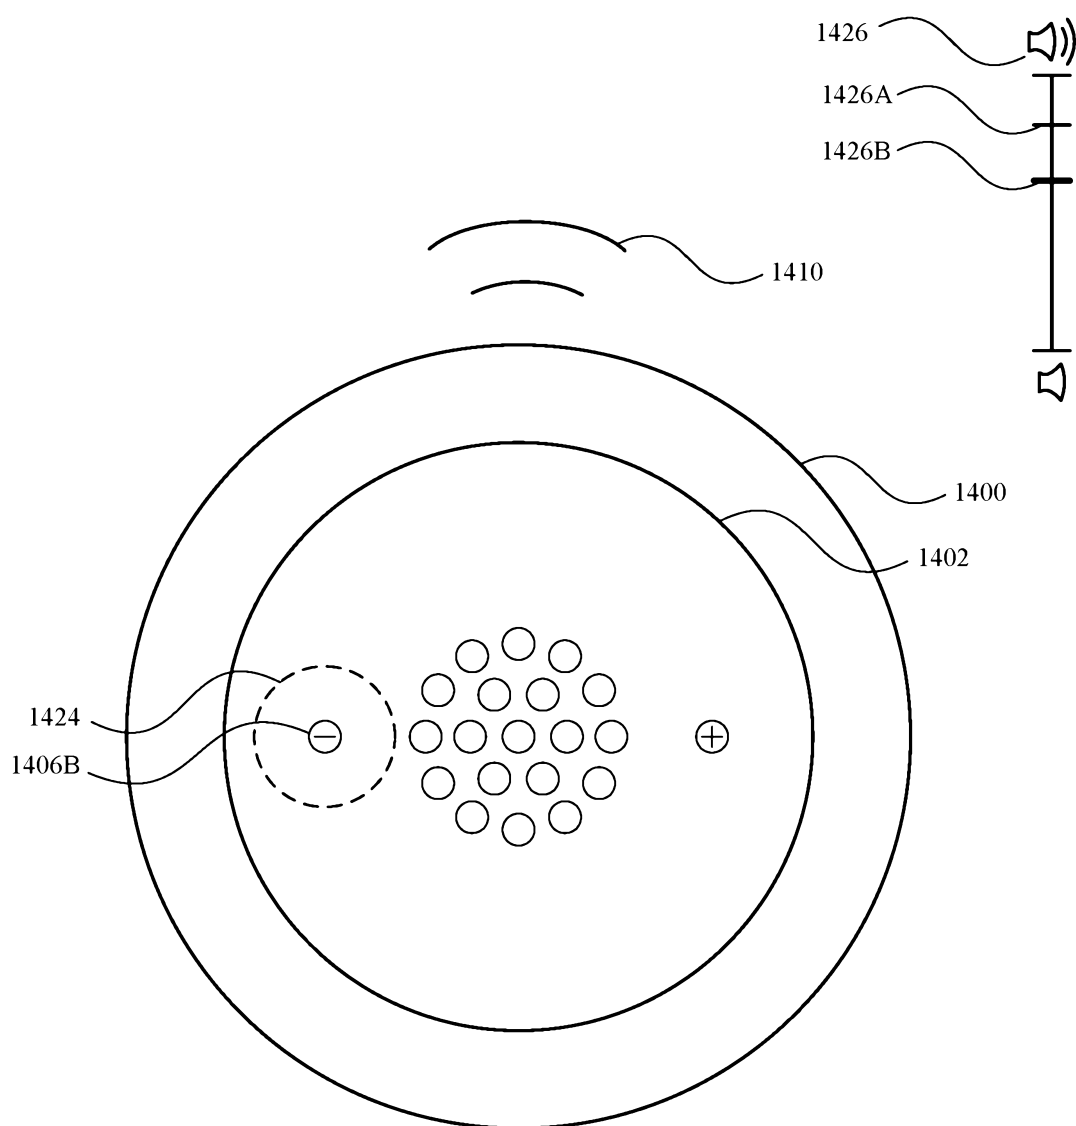
**FIG. 14H**

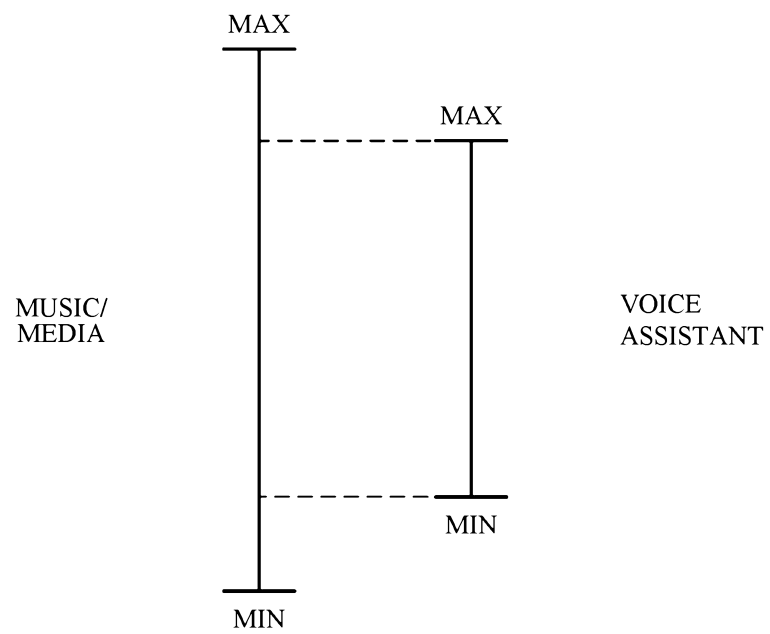
**FIG. 14I**

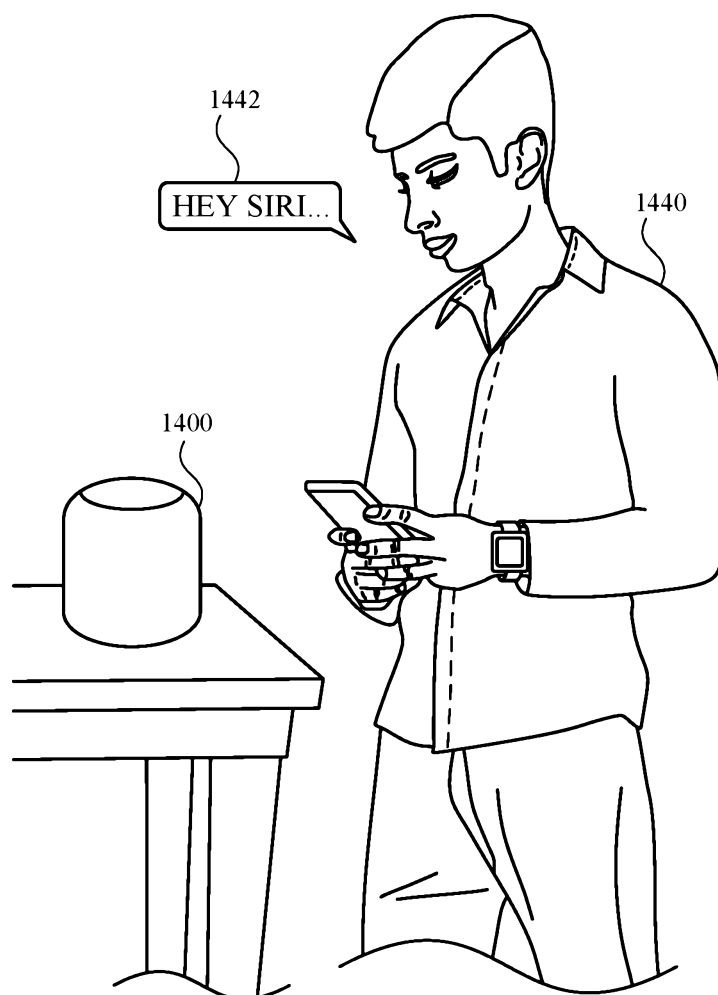
**FIG. 14J**

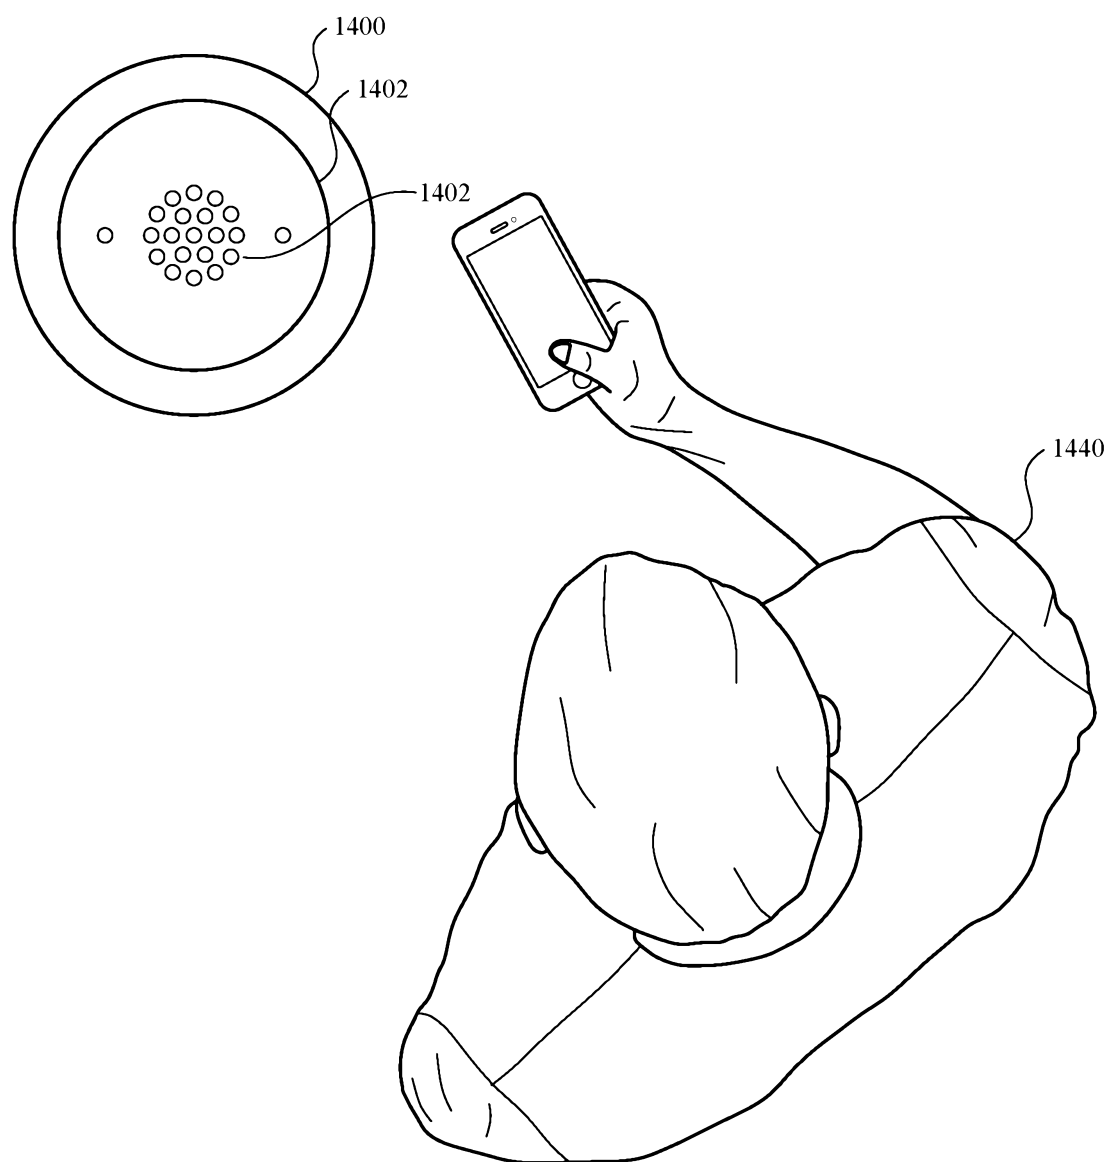
**FIG. 14K**

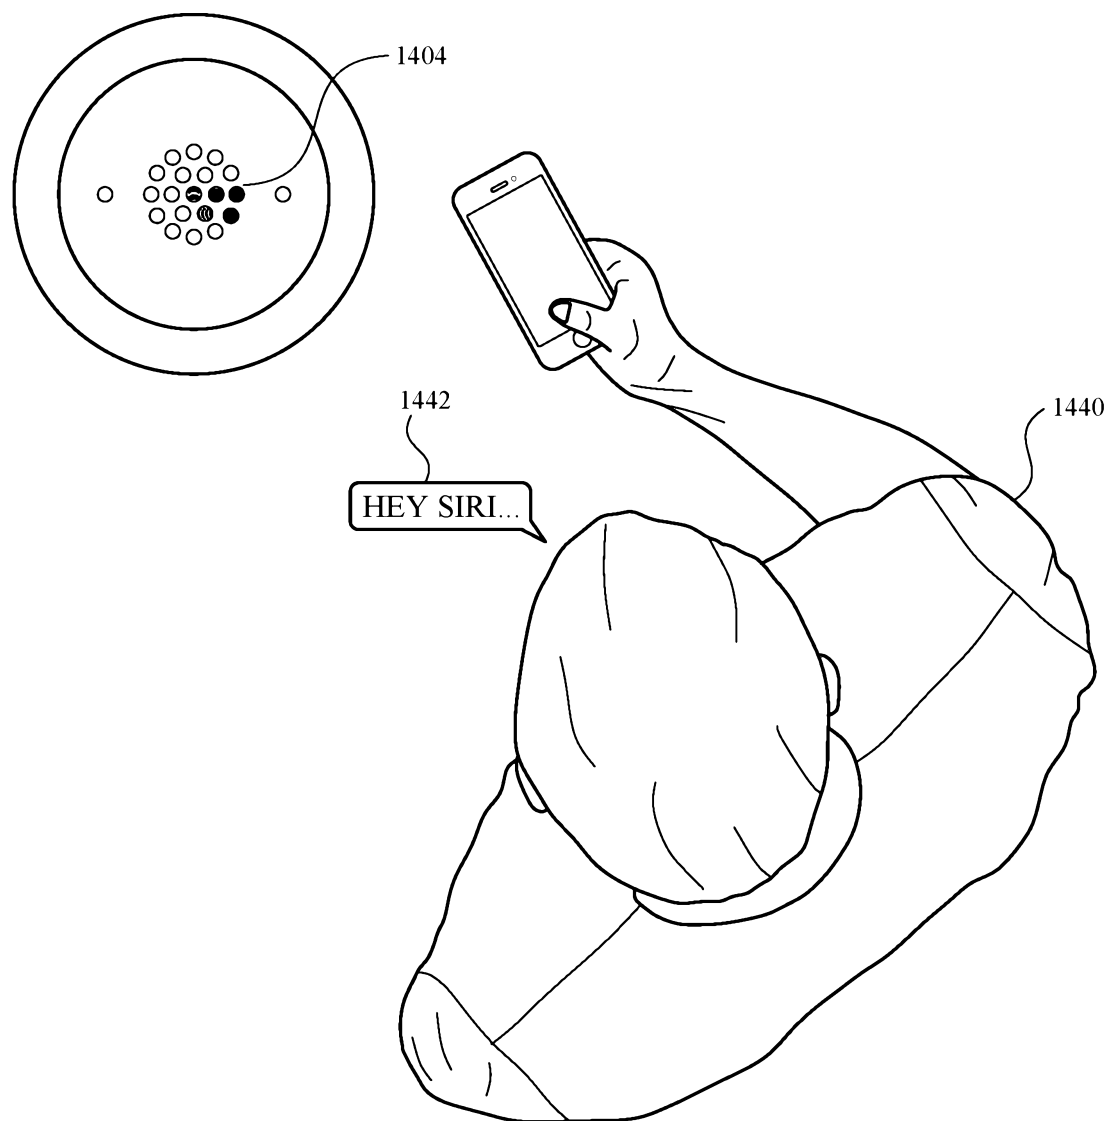


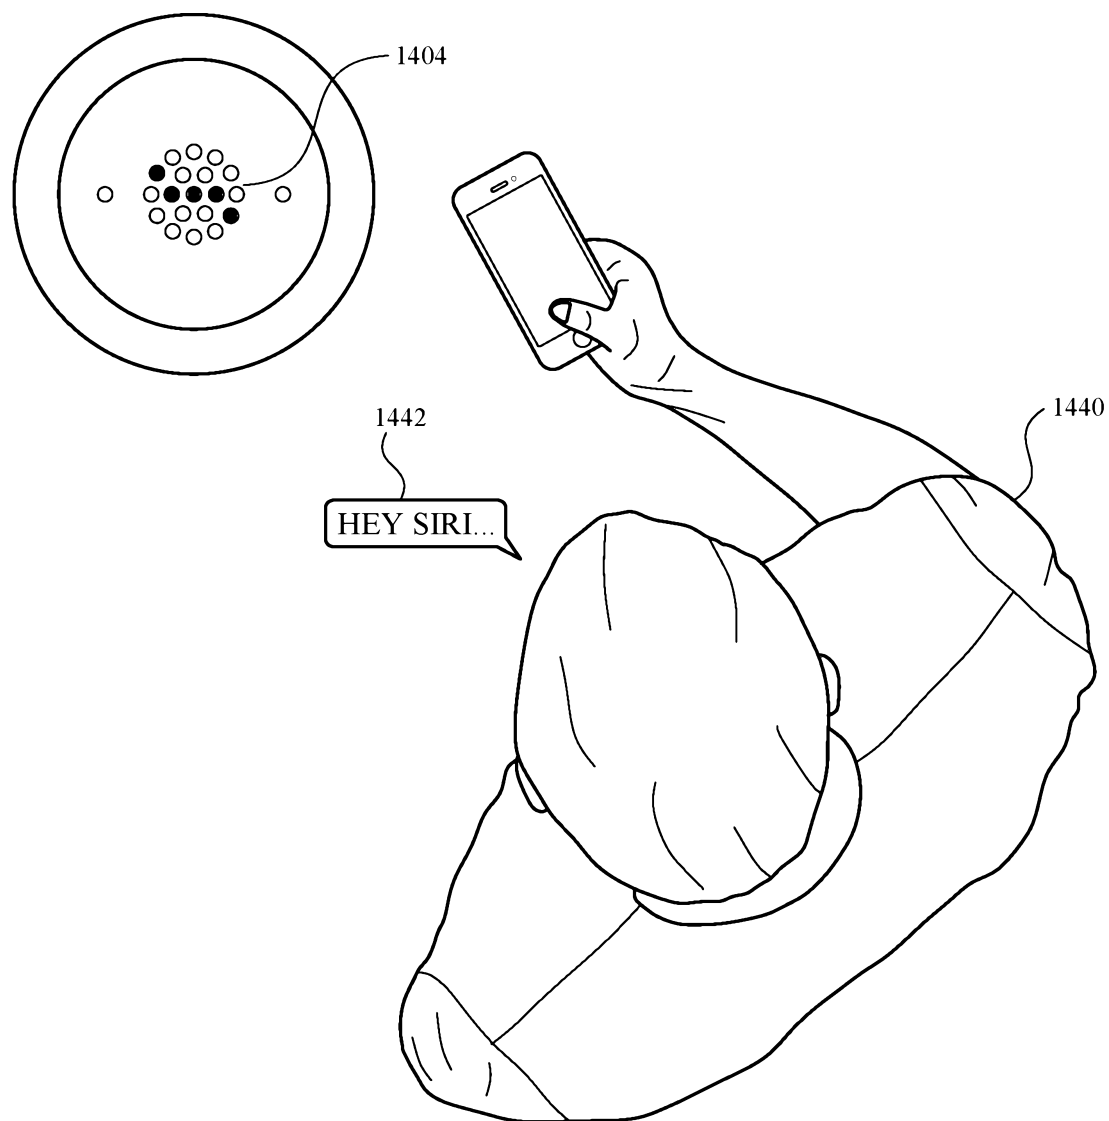
**FIG. 14L**

***FIG. 14M***

*FIG. 14N*

**FIG. 140**

**FIG. 14P**

**FIG. 14Q**

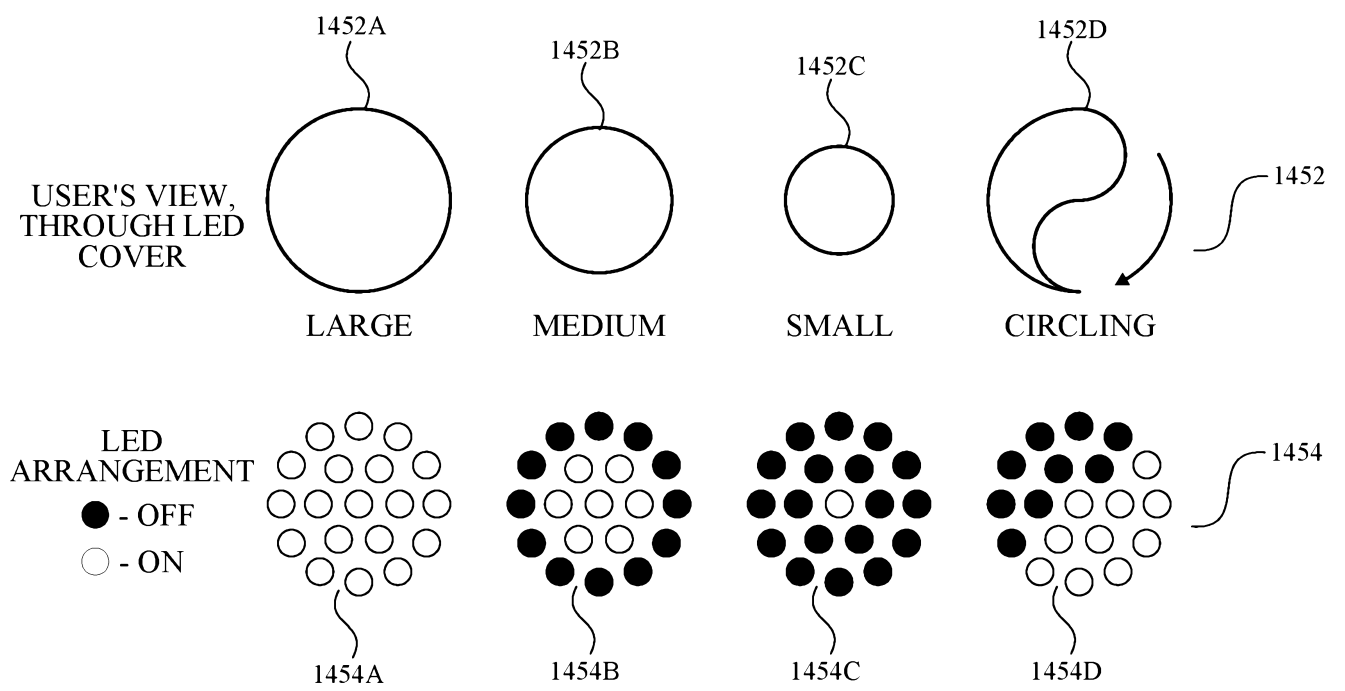


**FIG. 14R**

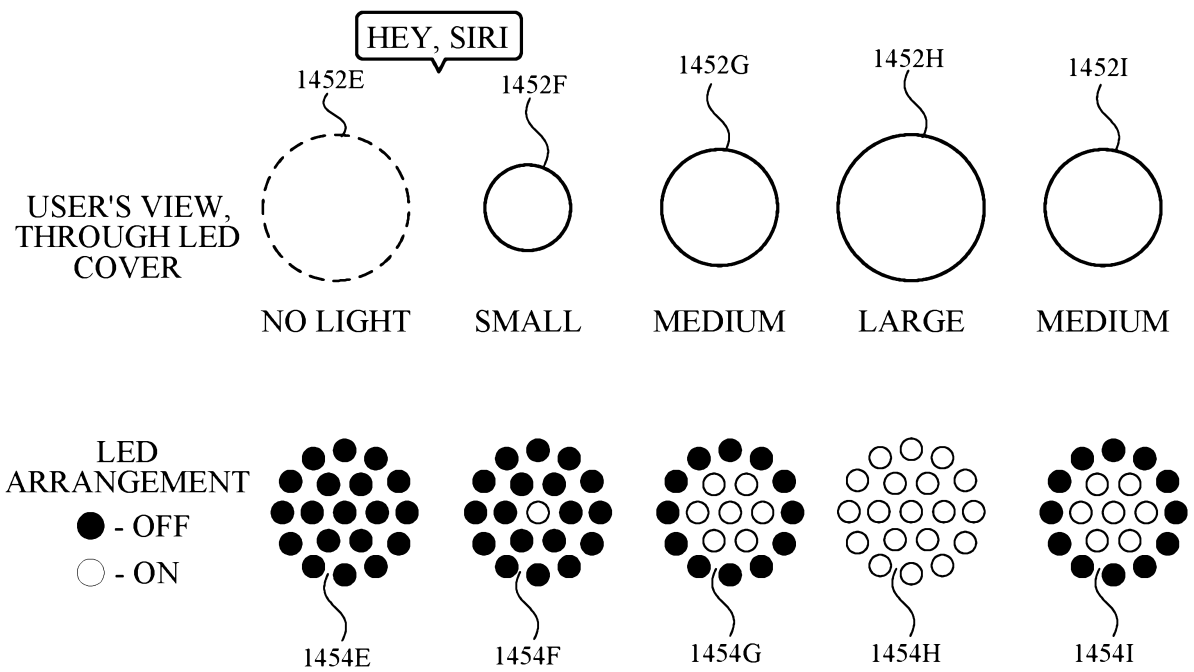


FIG. 14S



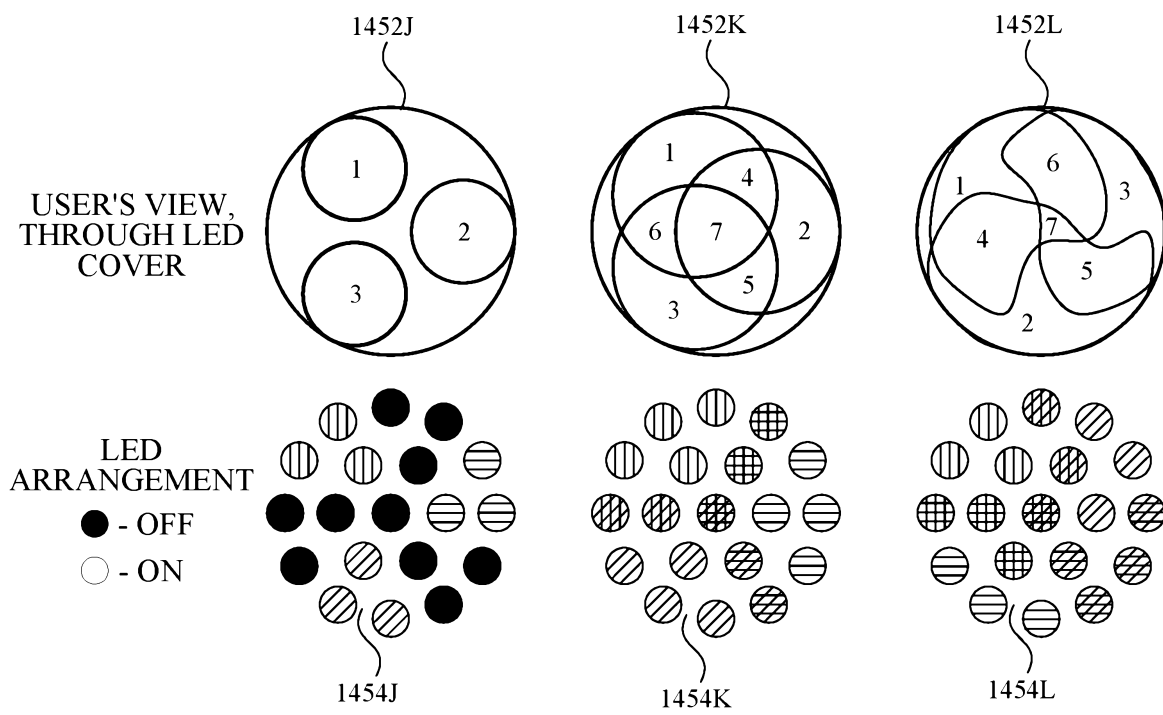
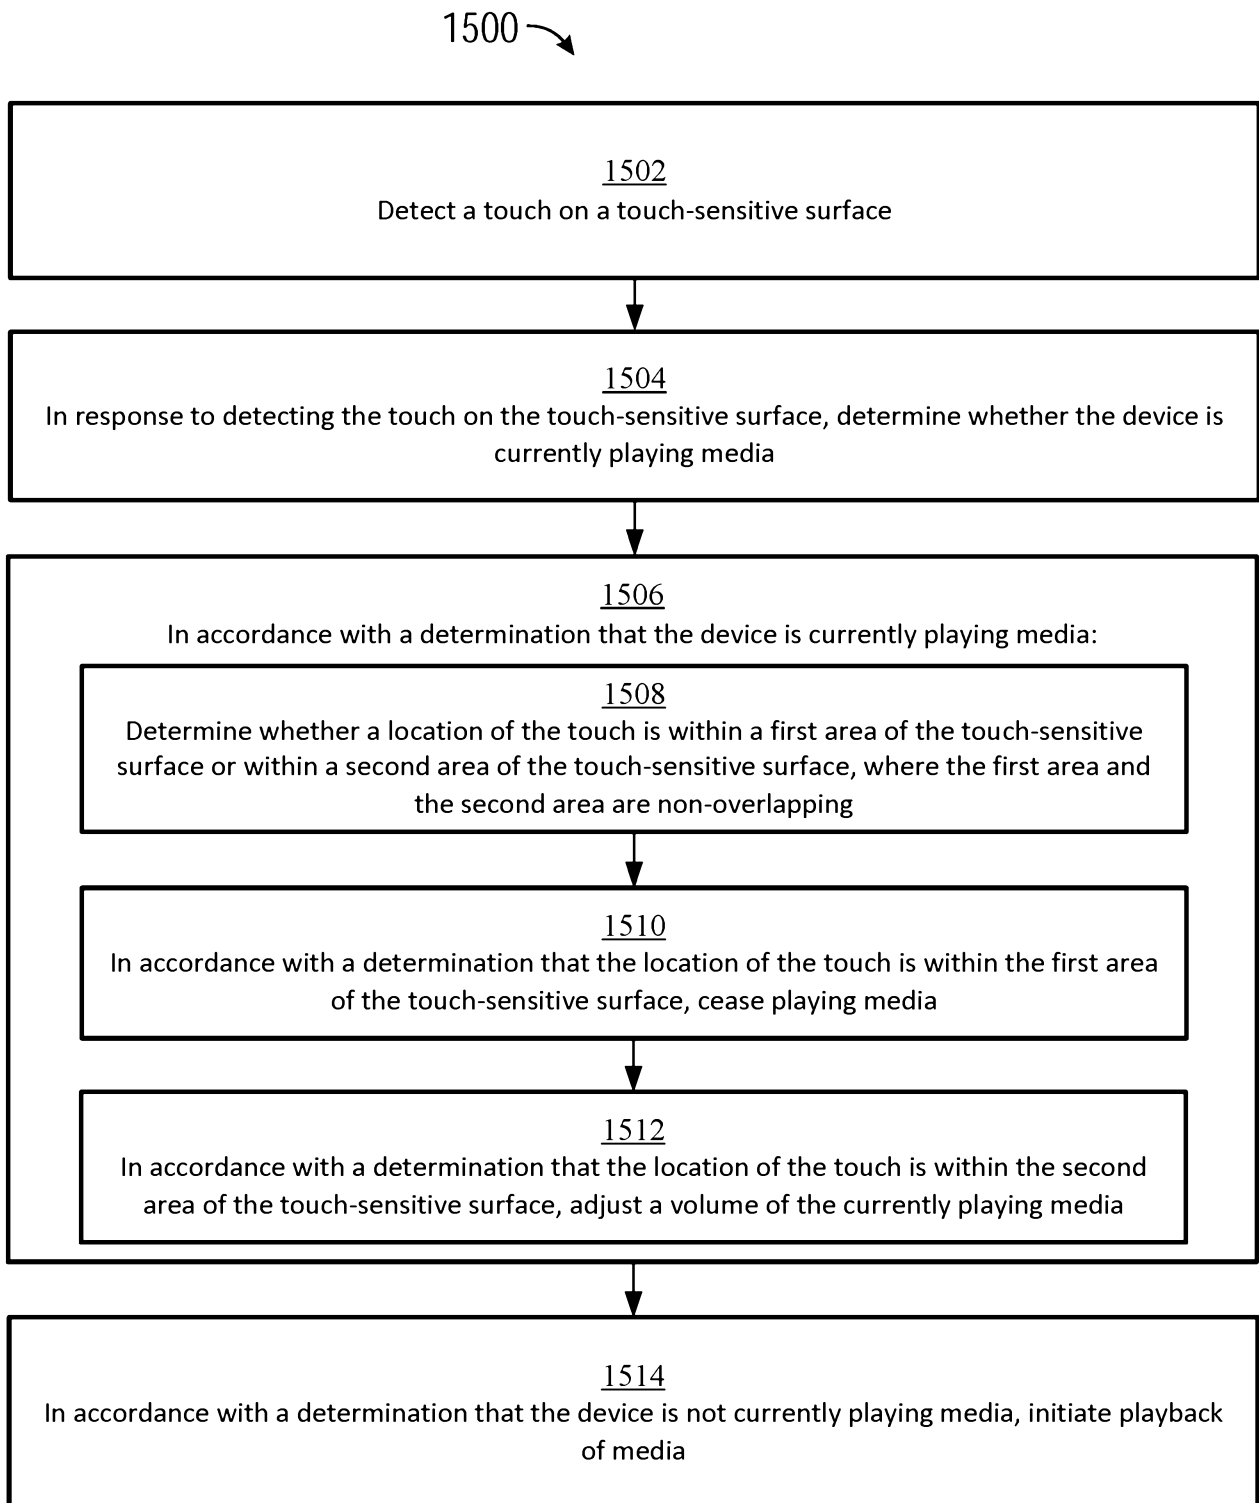
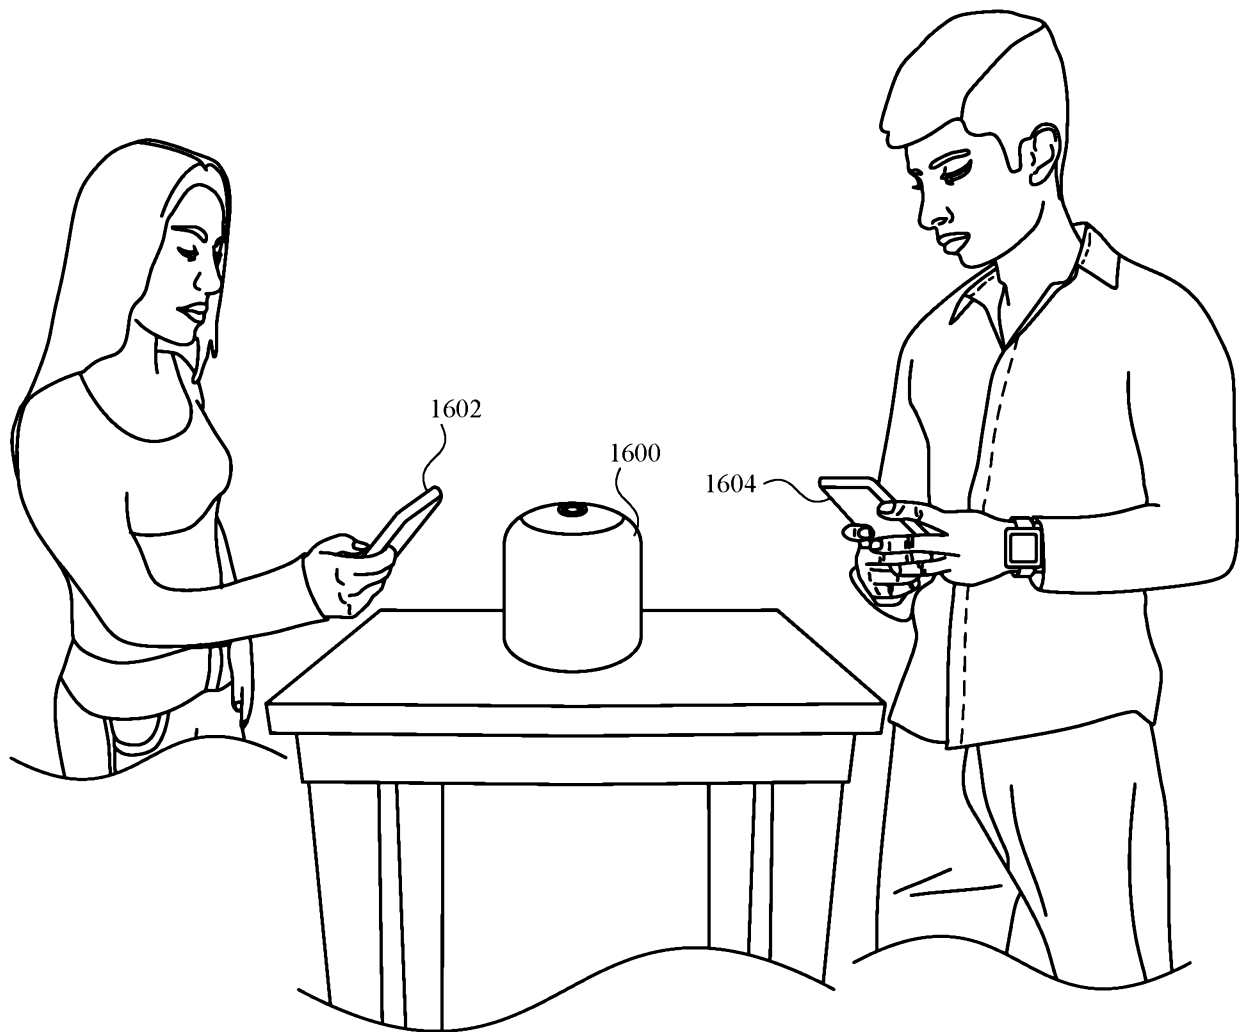
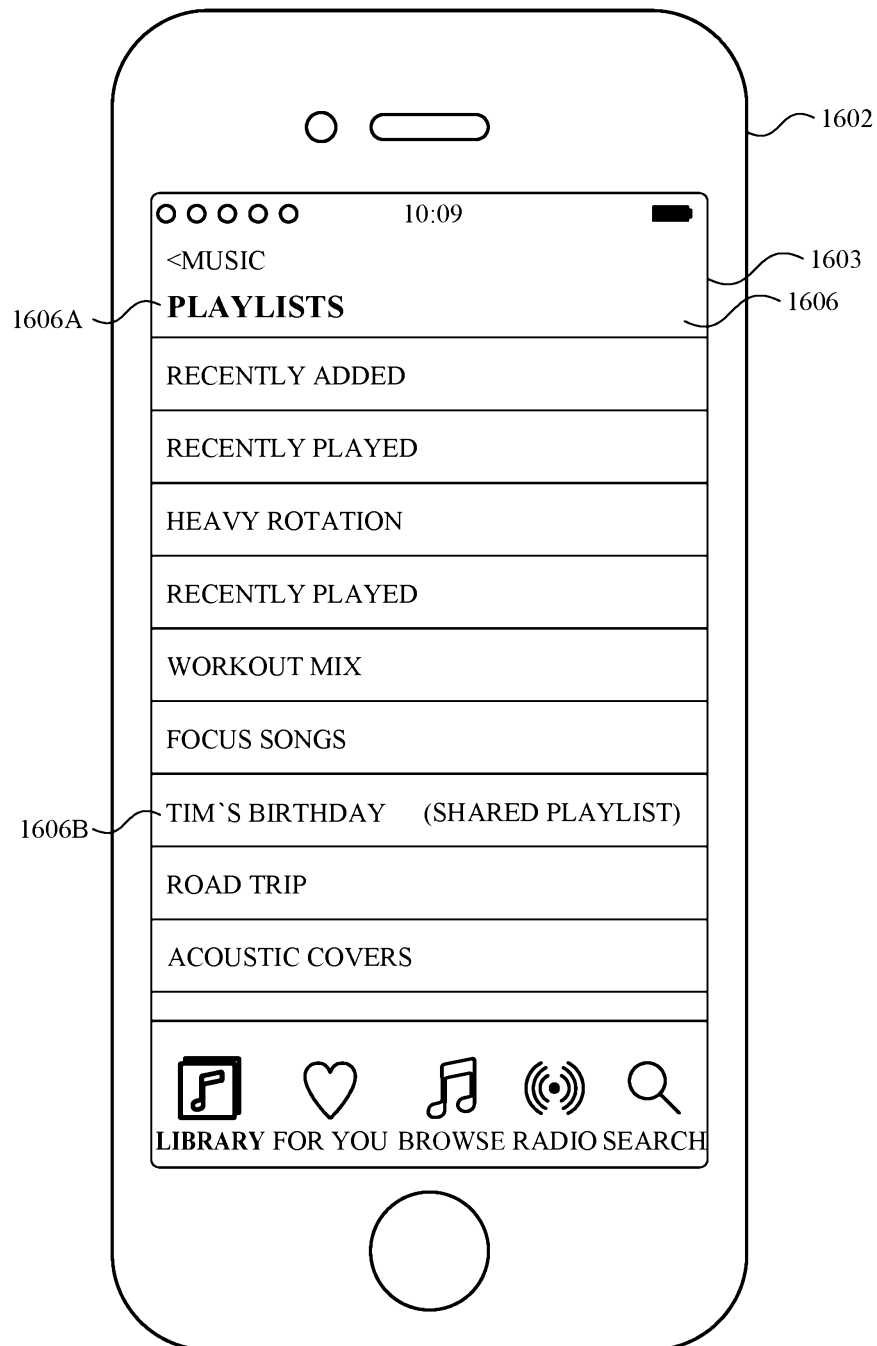
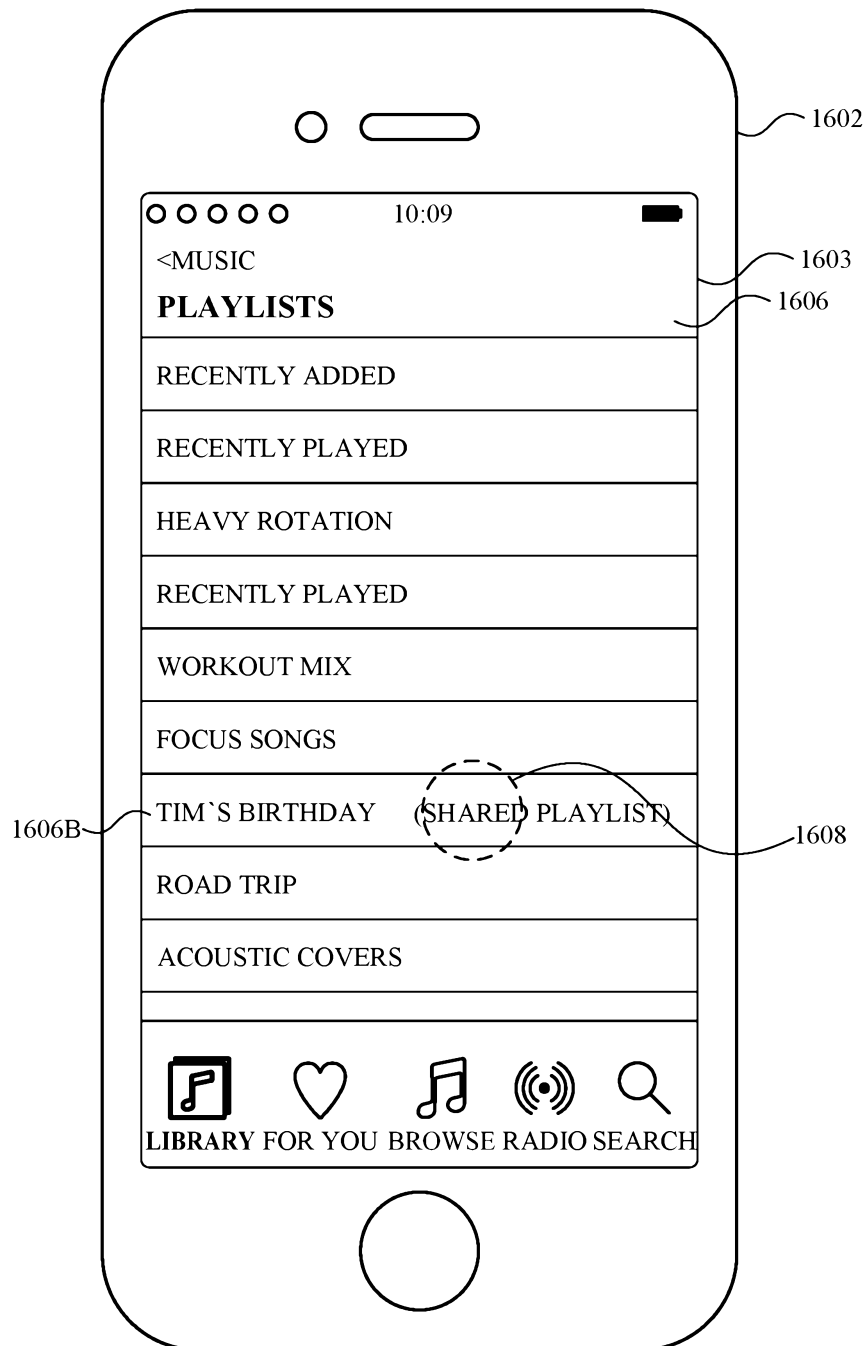


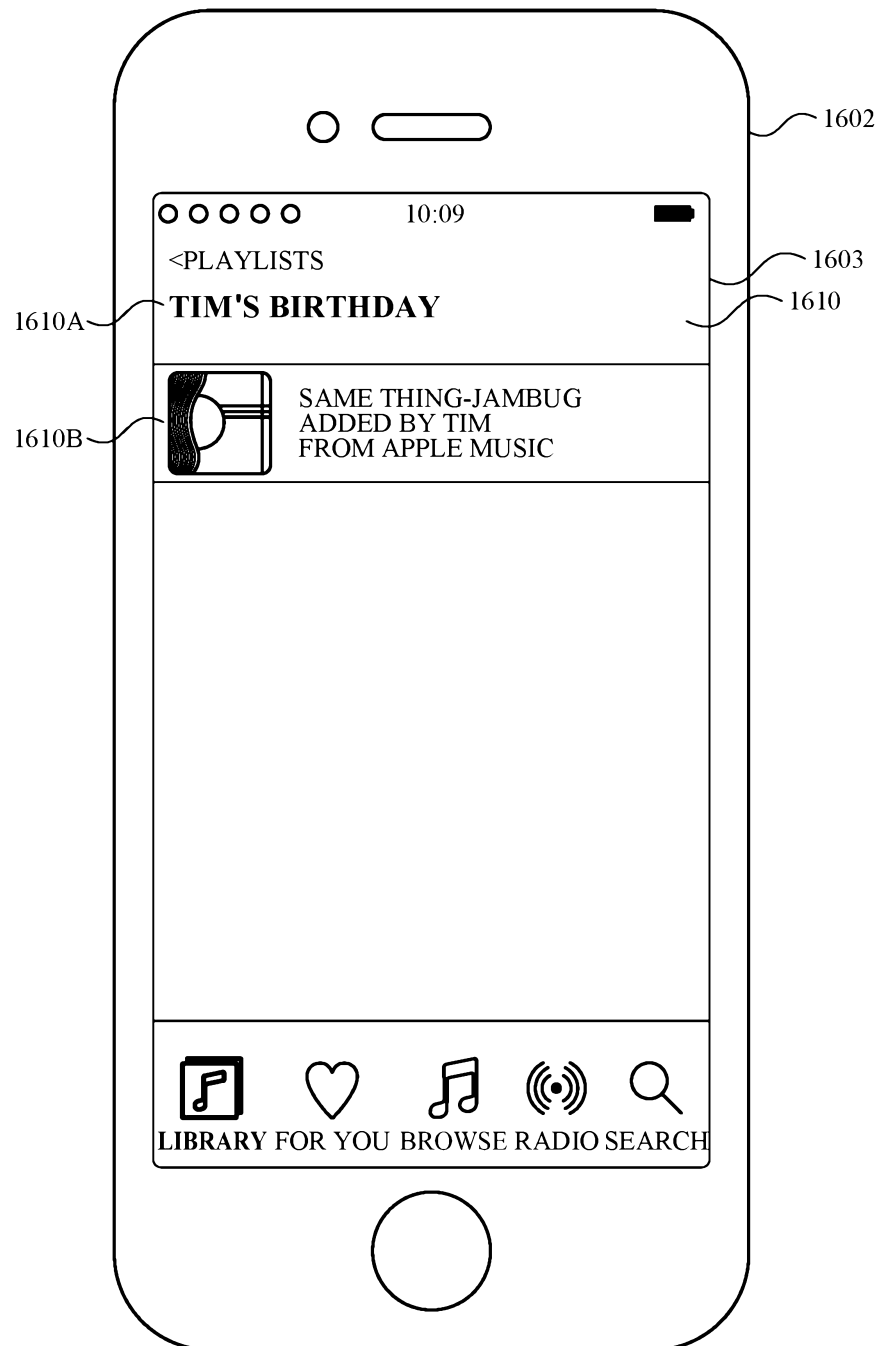
FIG. 14T

**FIG. 15**

**FIG. 16A**

**FIG. 16B**

**FIG. 16C**

**FIG. 16D**

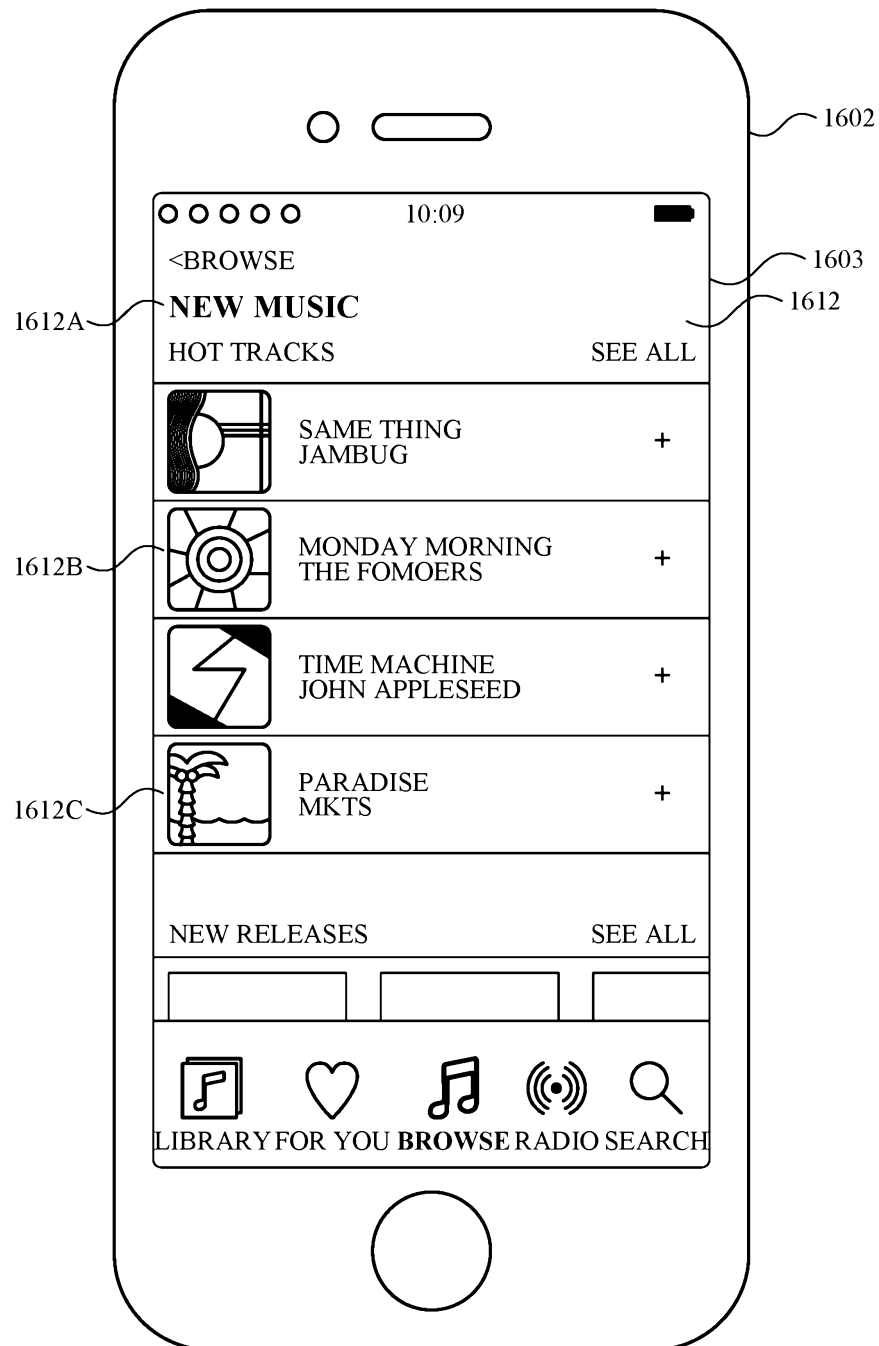


FIG. 16E

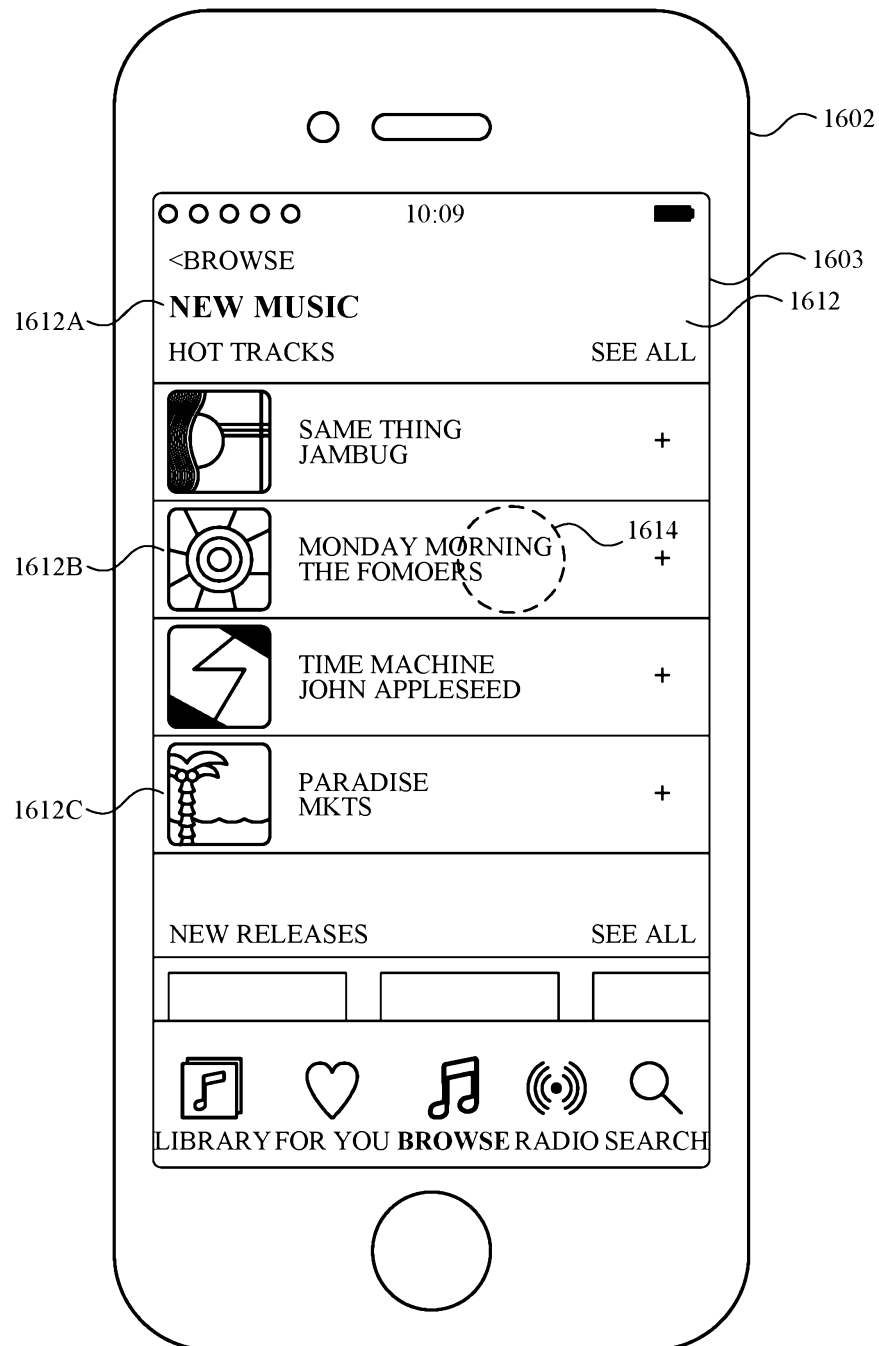


FIG. 16F



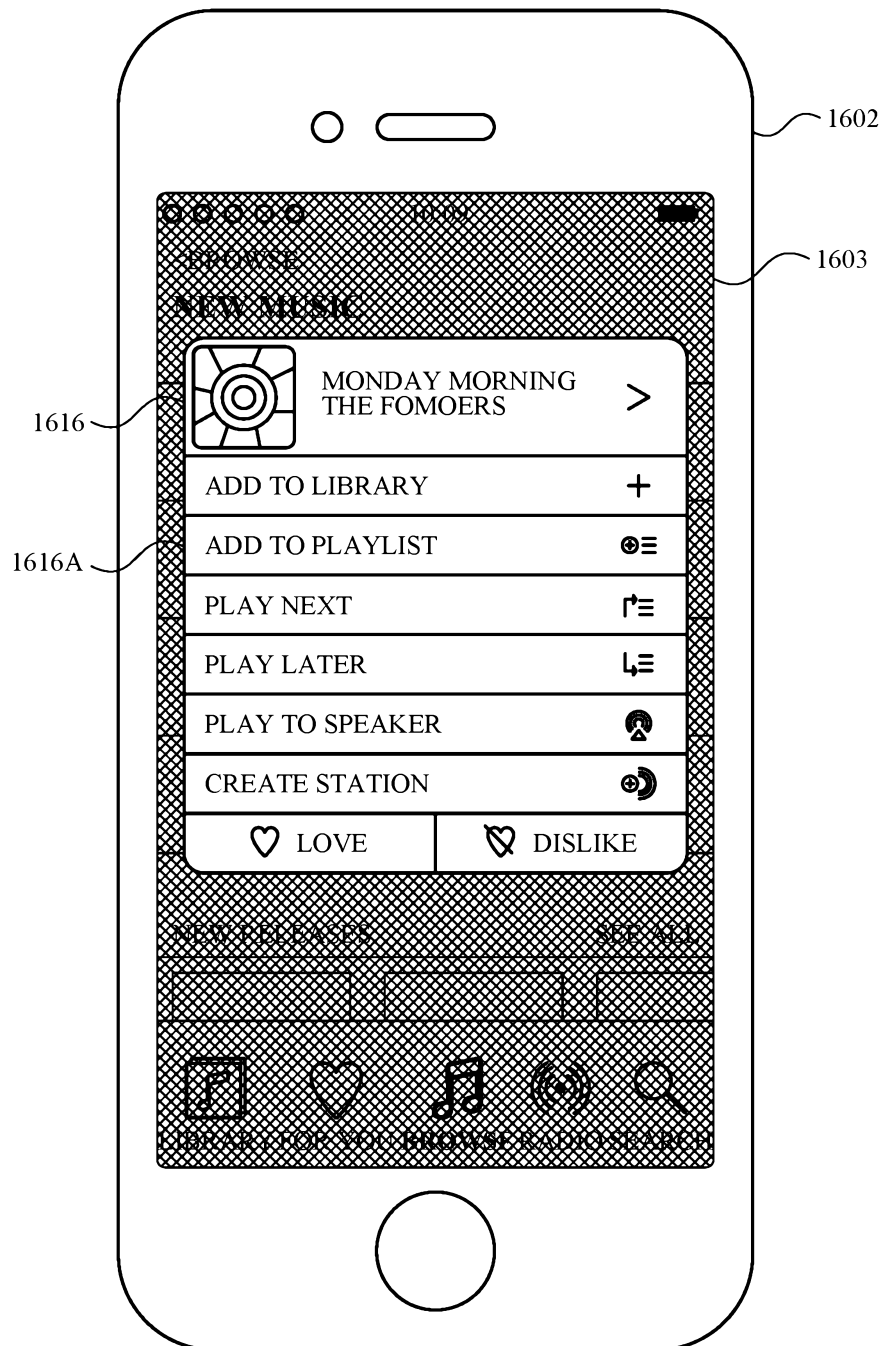


FIG. 16G

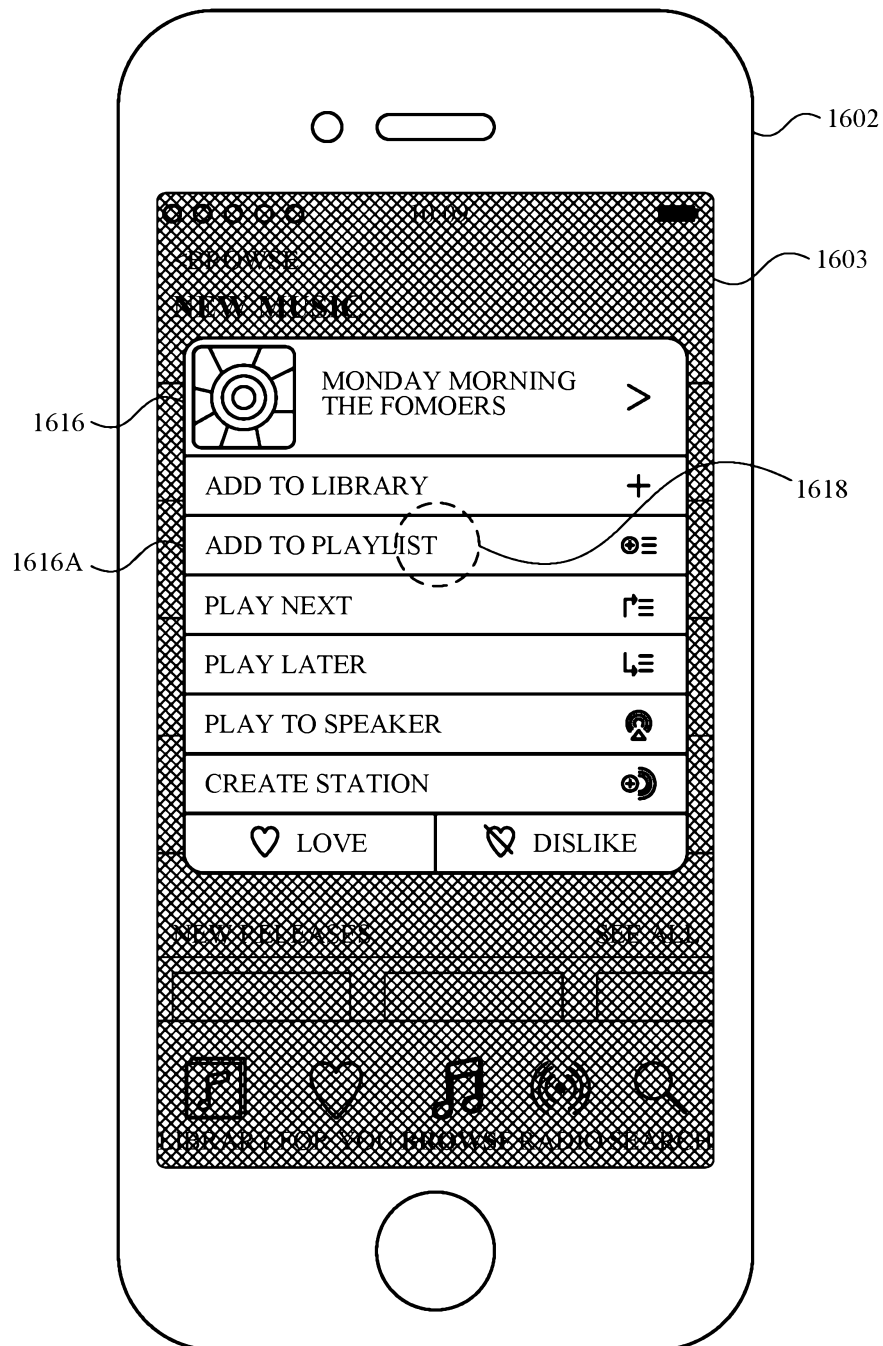


FIG. 16H

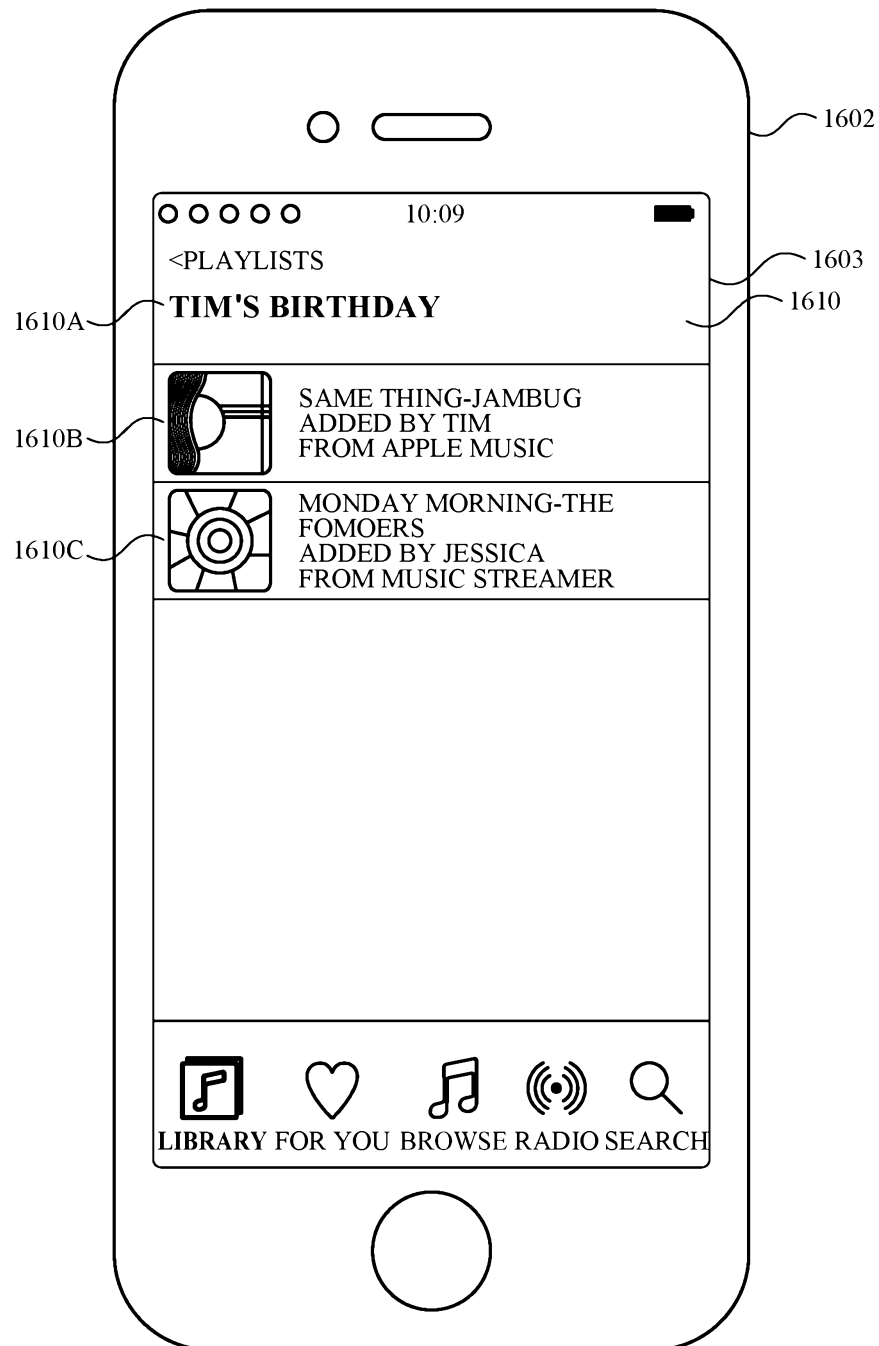


FIG. 16I

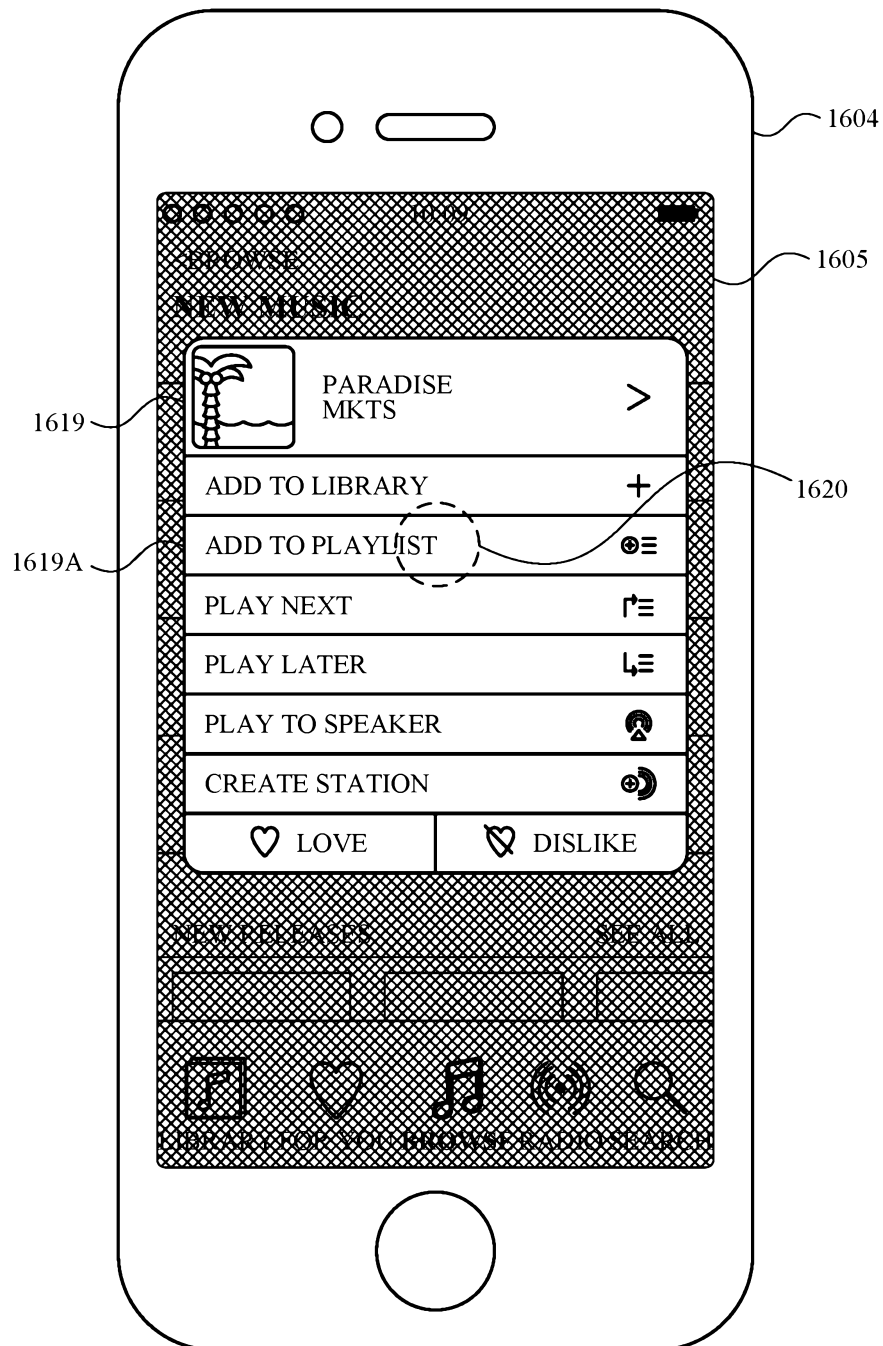


FIG. 16J

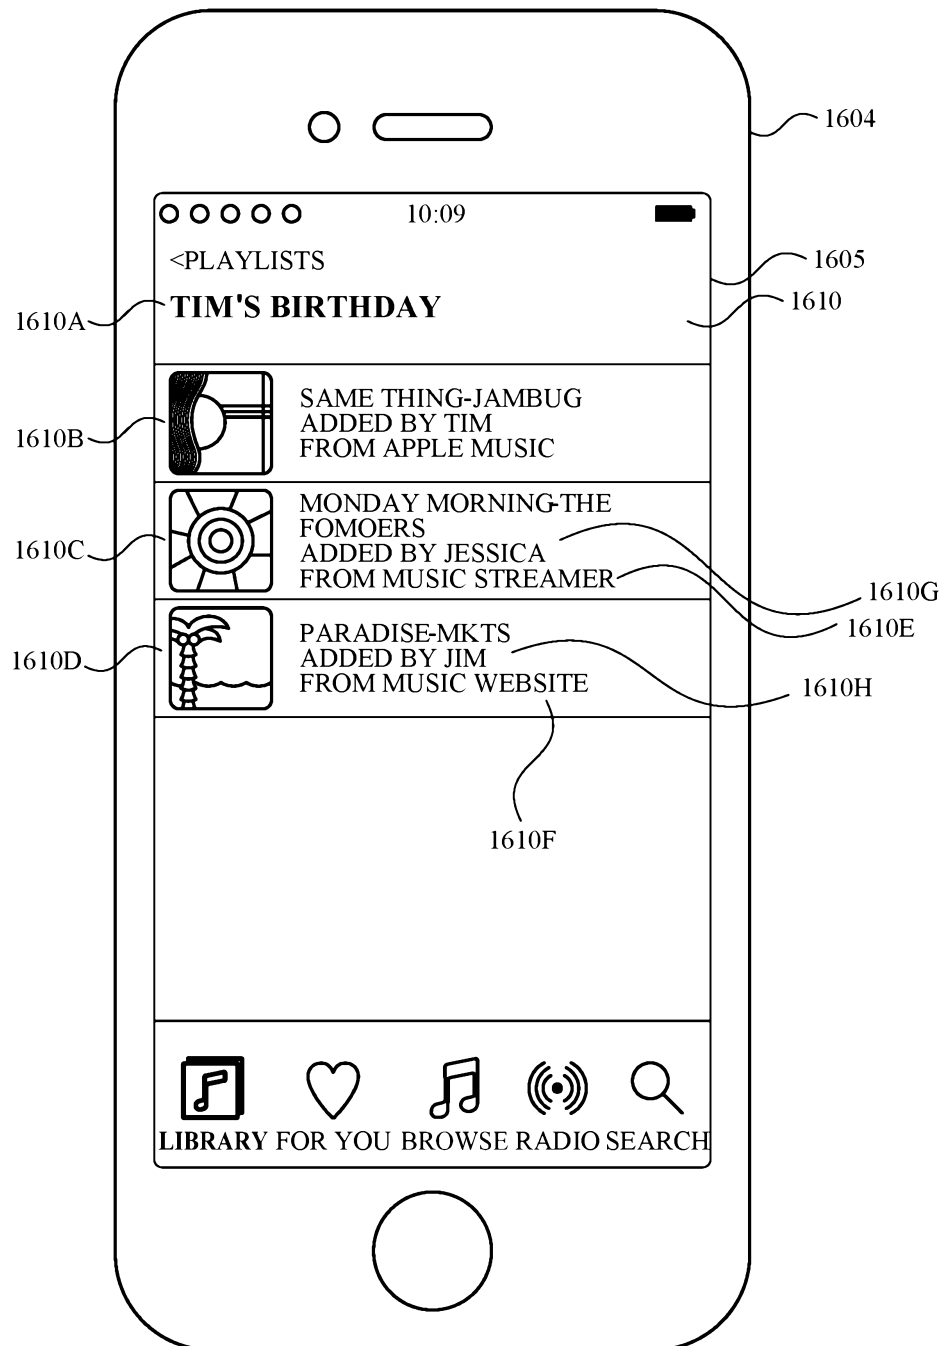


FIG. 16K

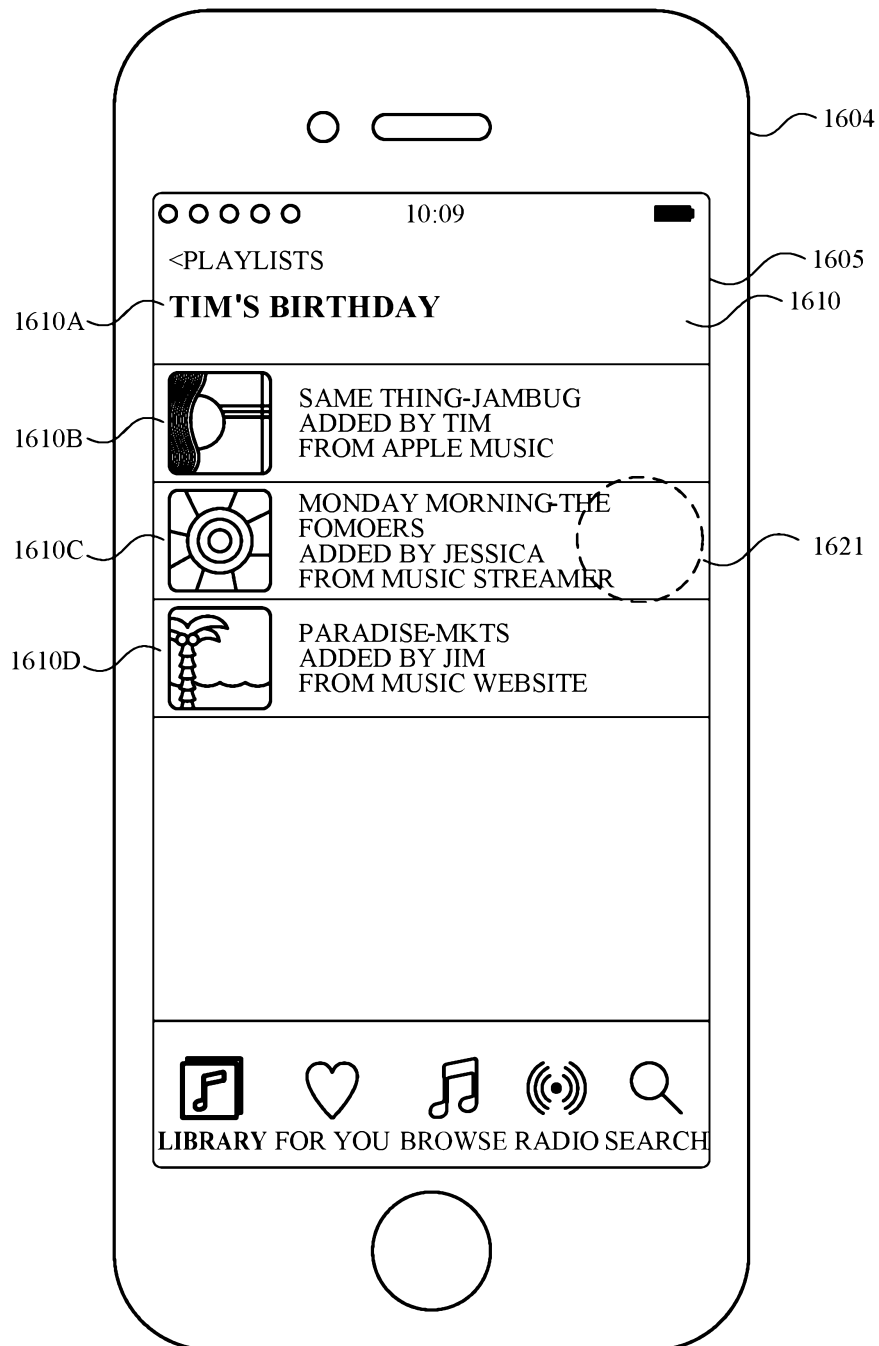


FIG. 16L

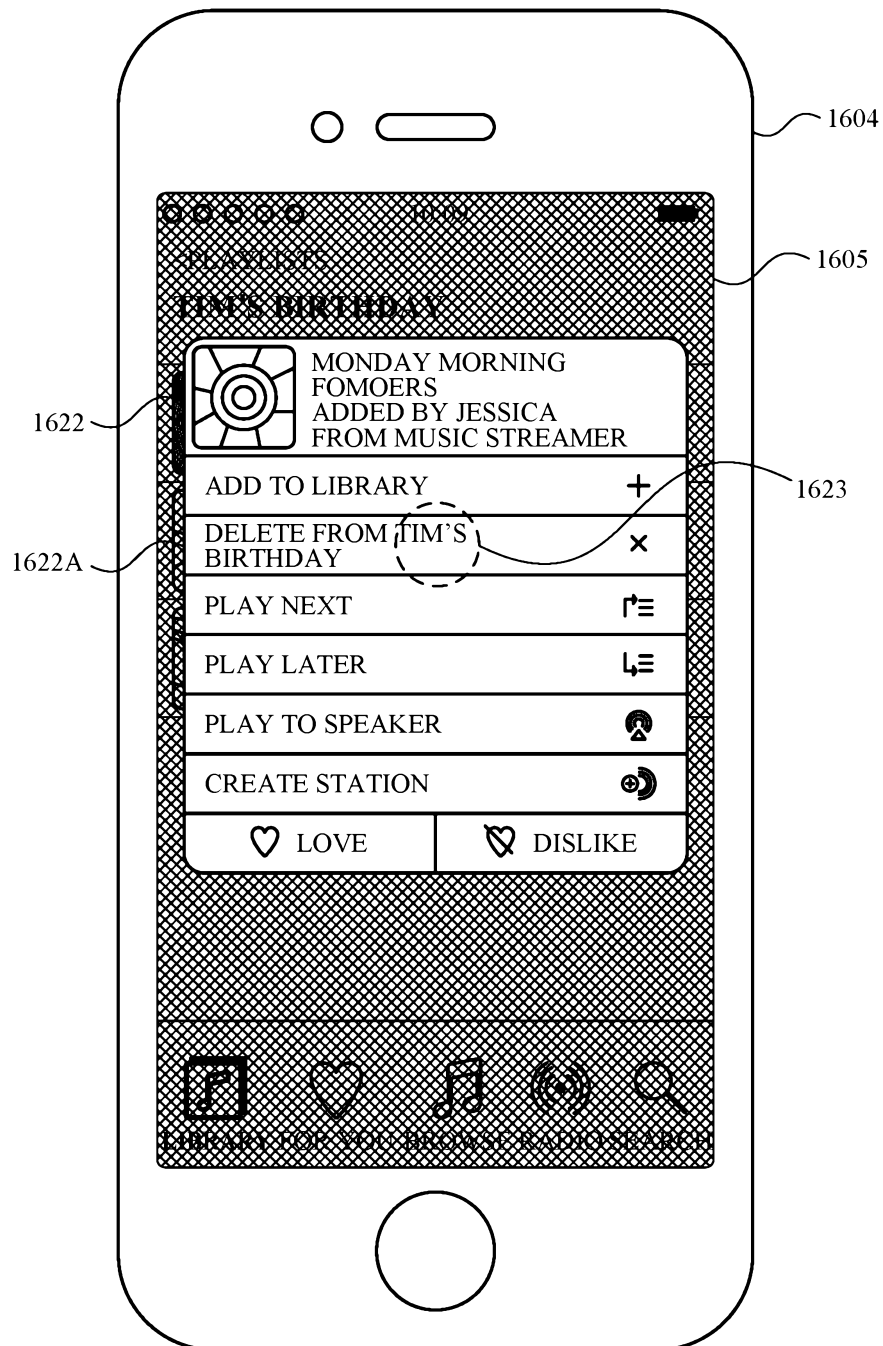
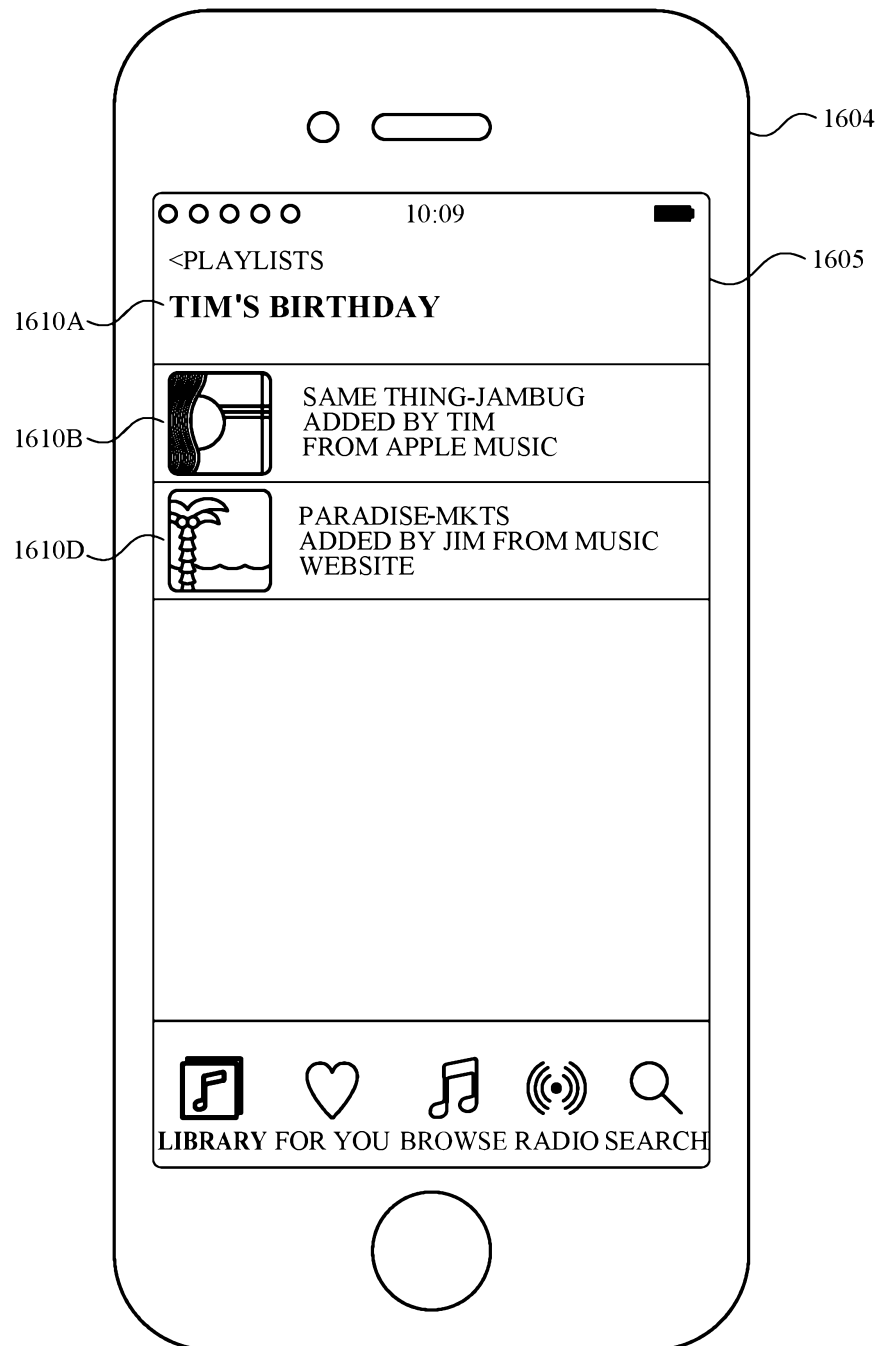
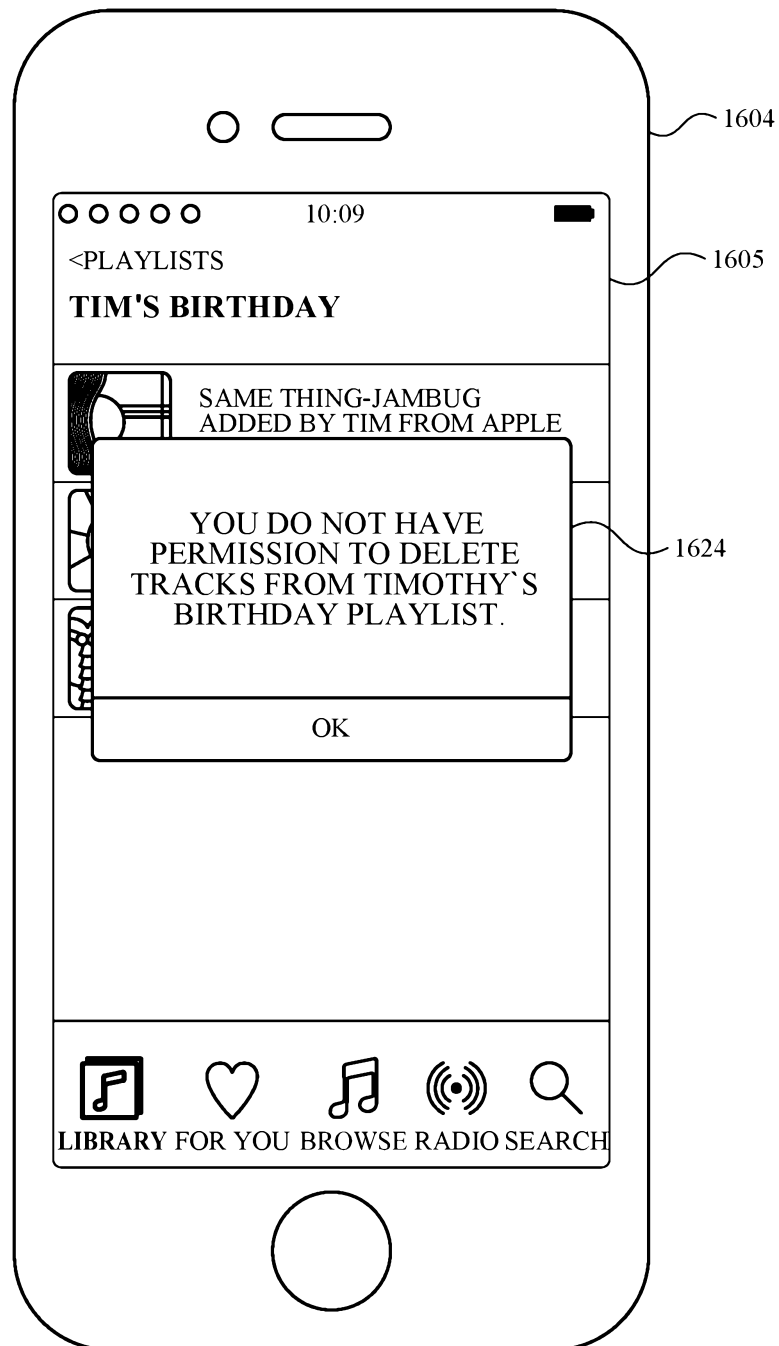


FIG. 16M

*FIG. 16N*



**FIG. 160**

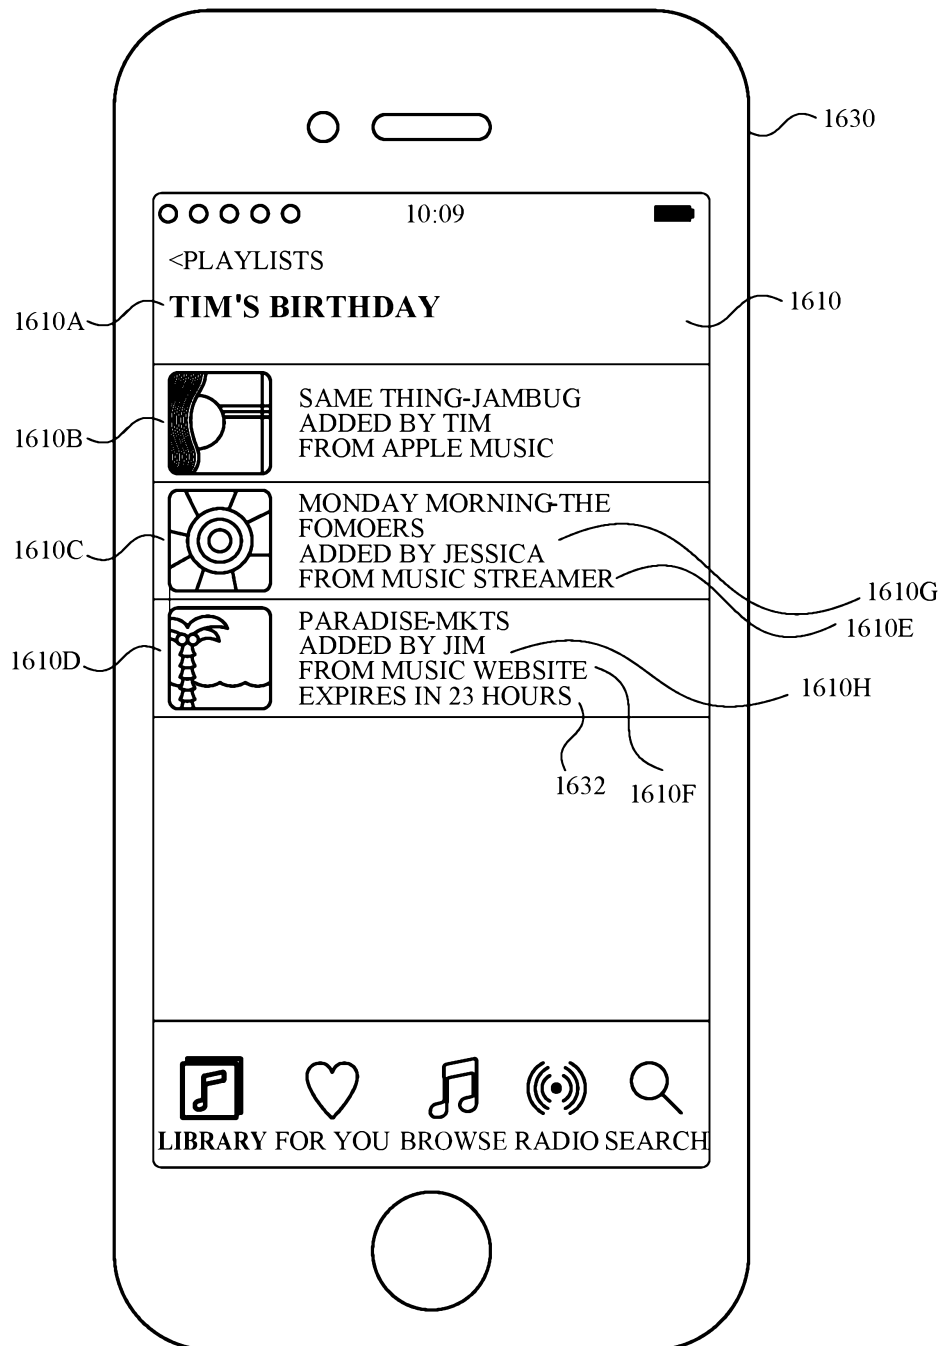
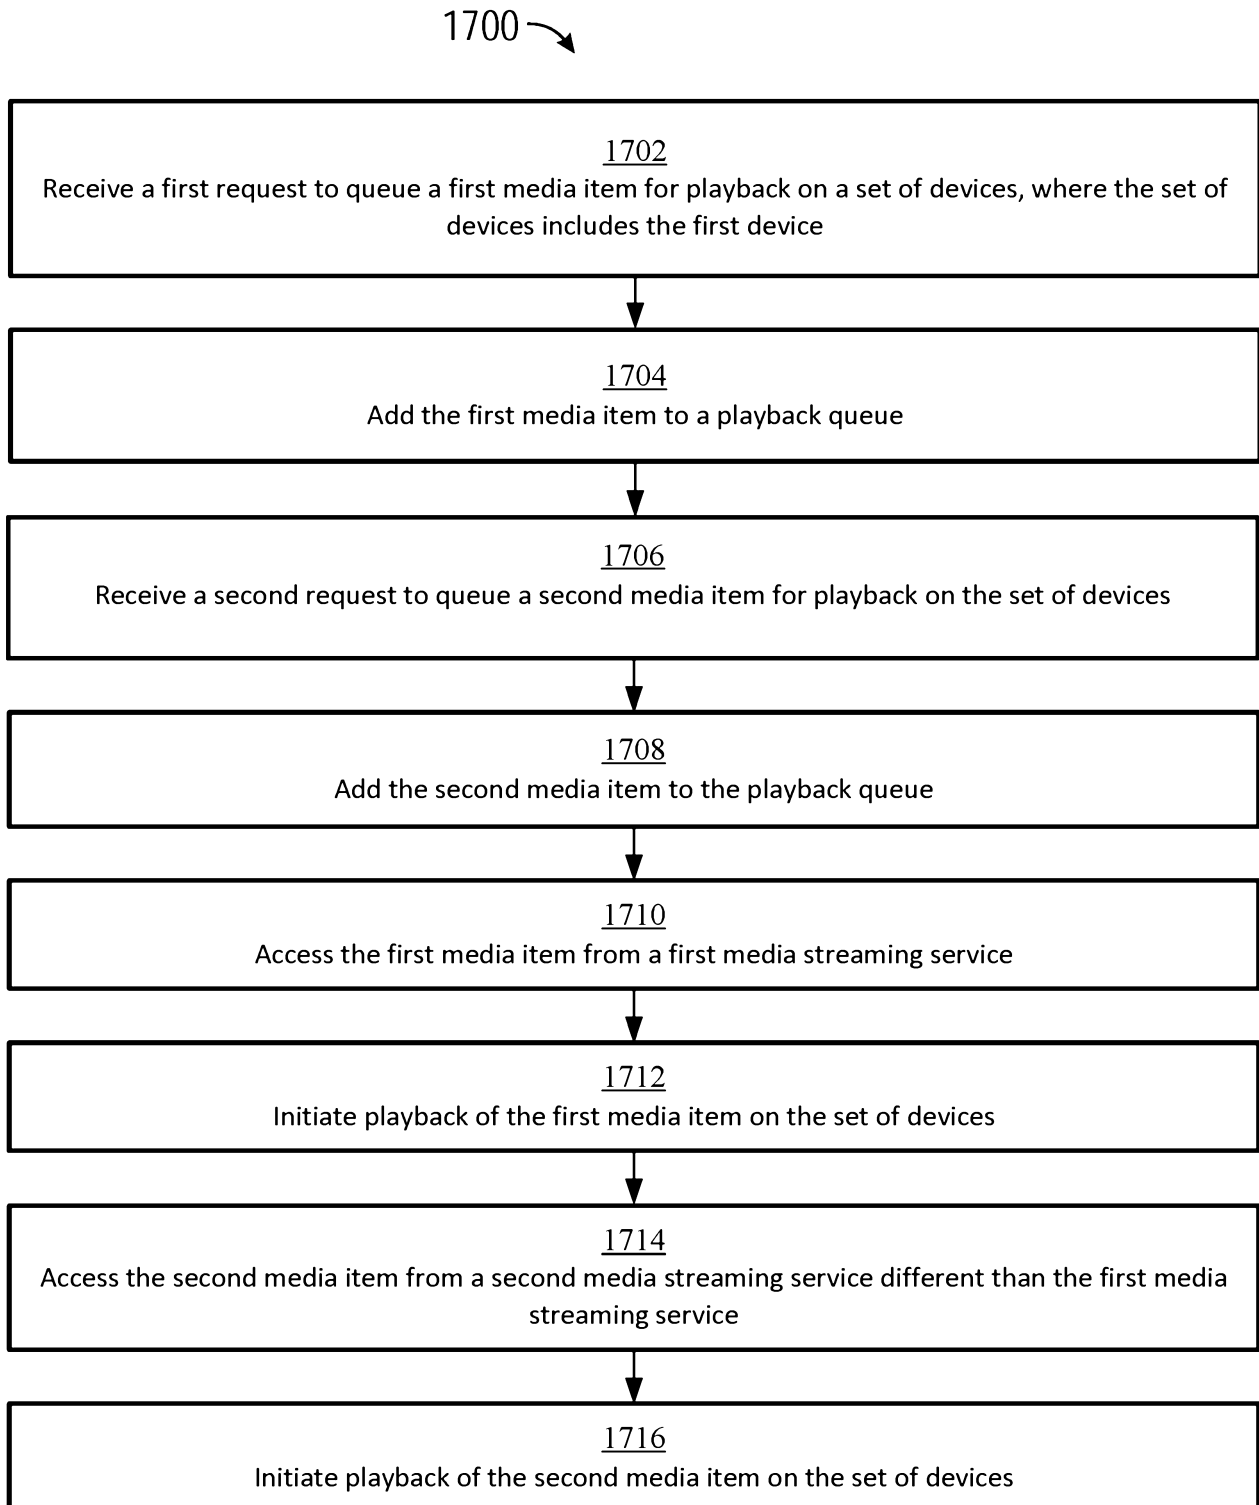
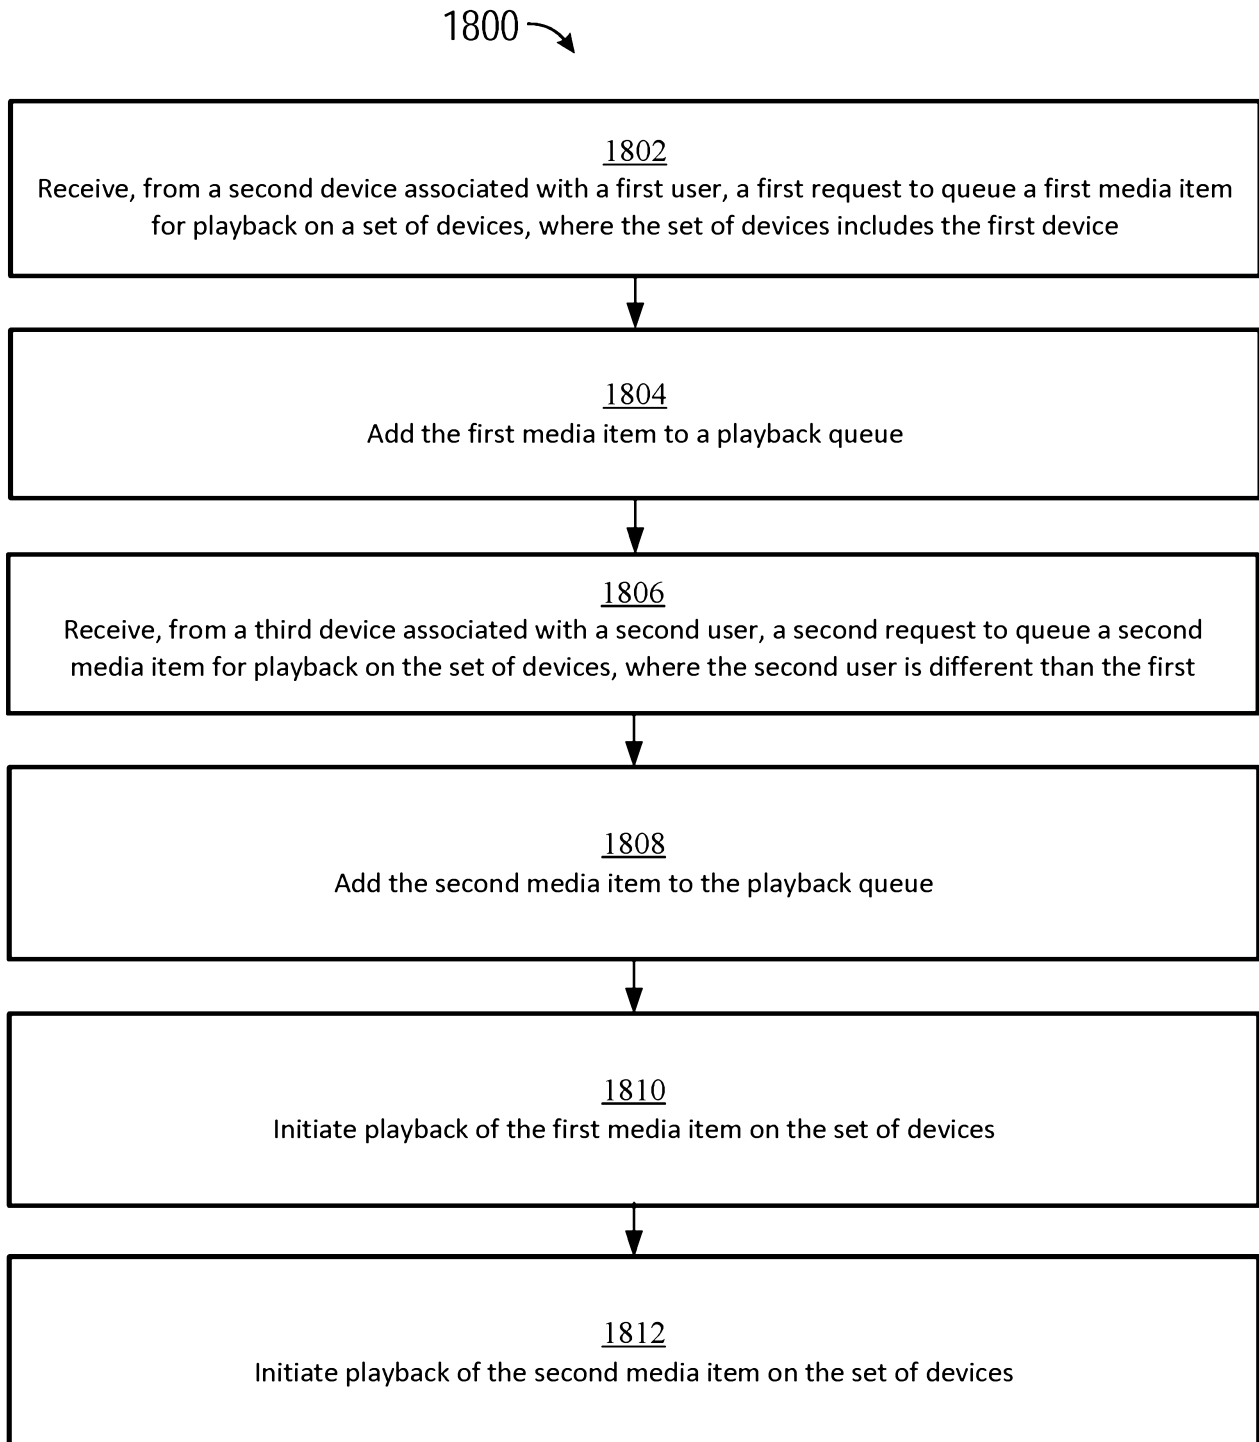
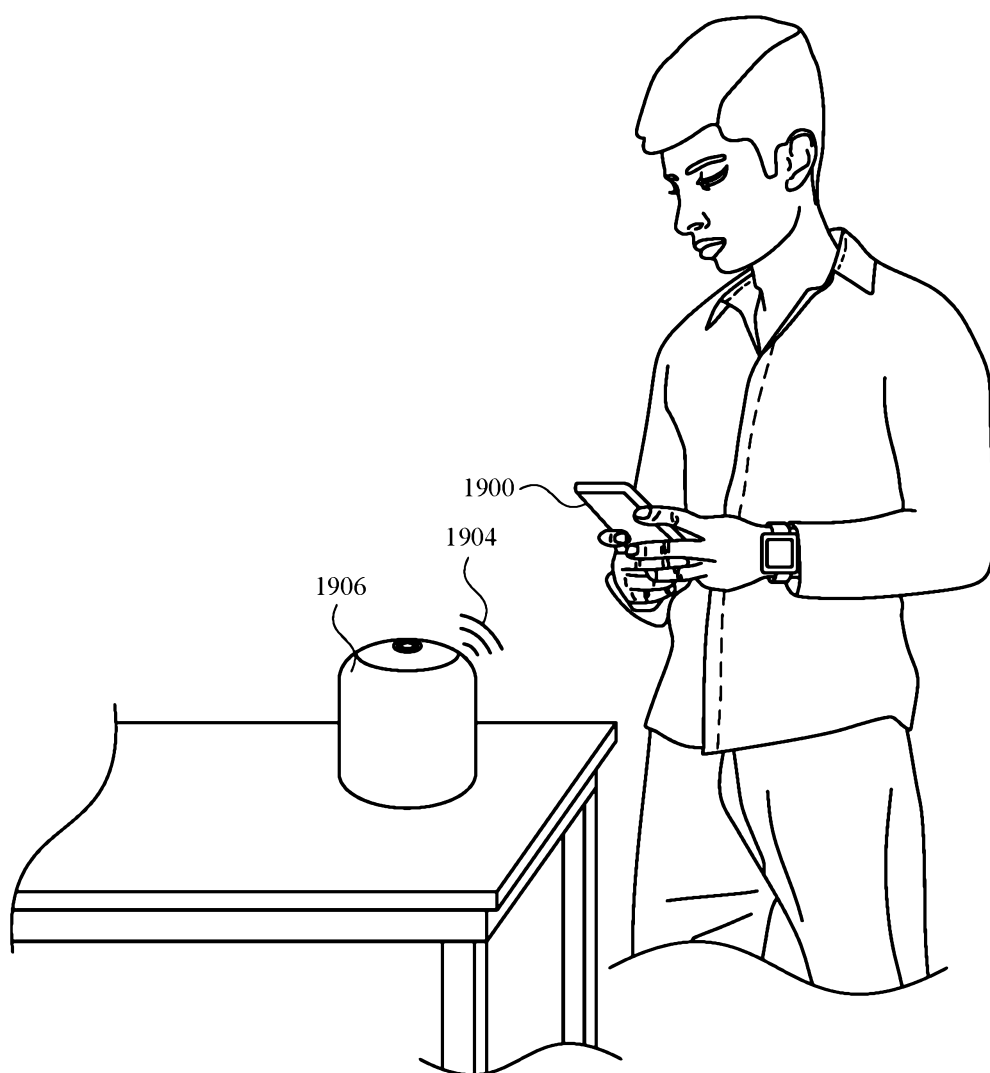
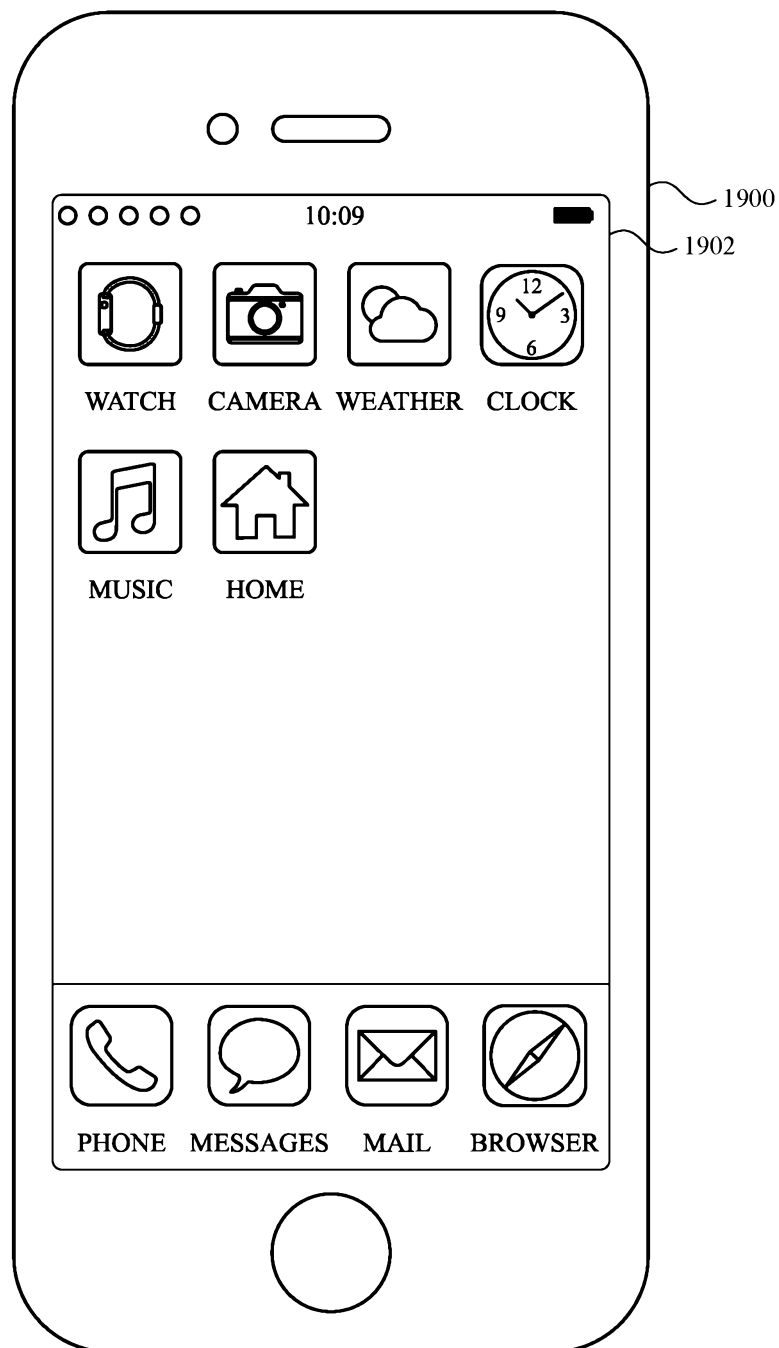


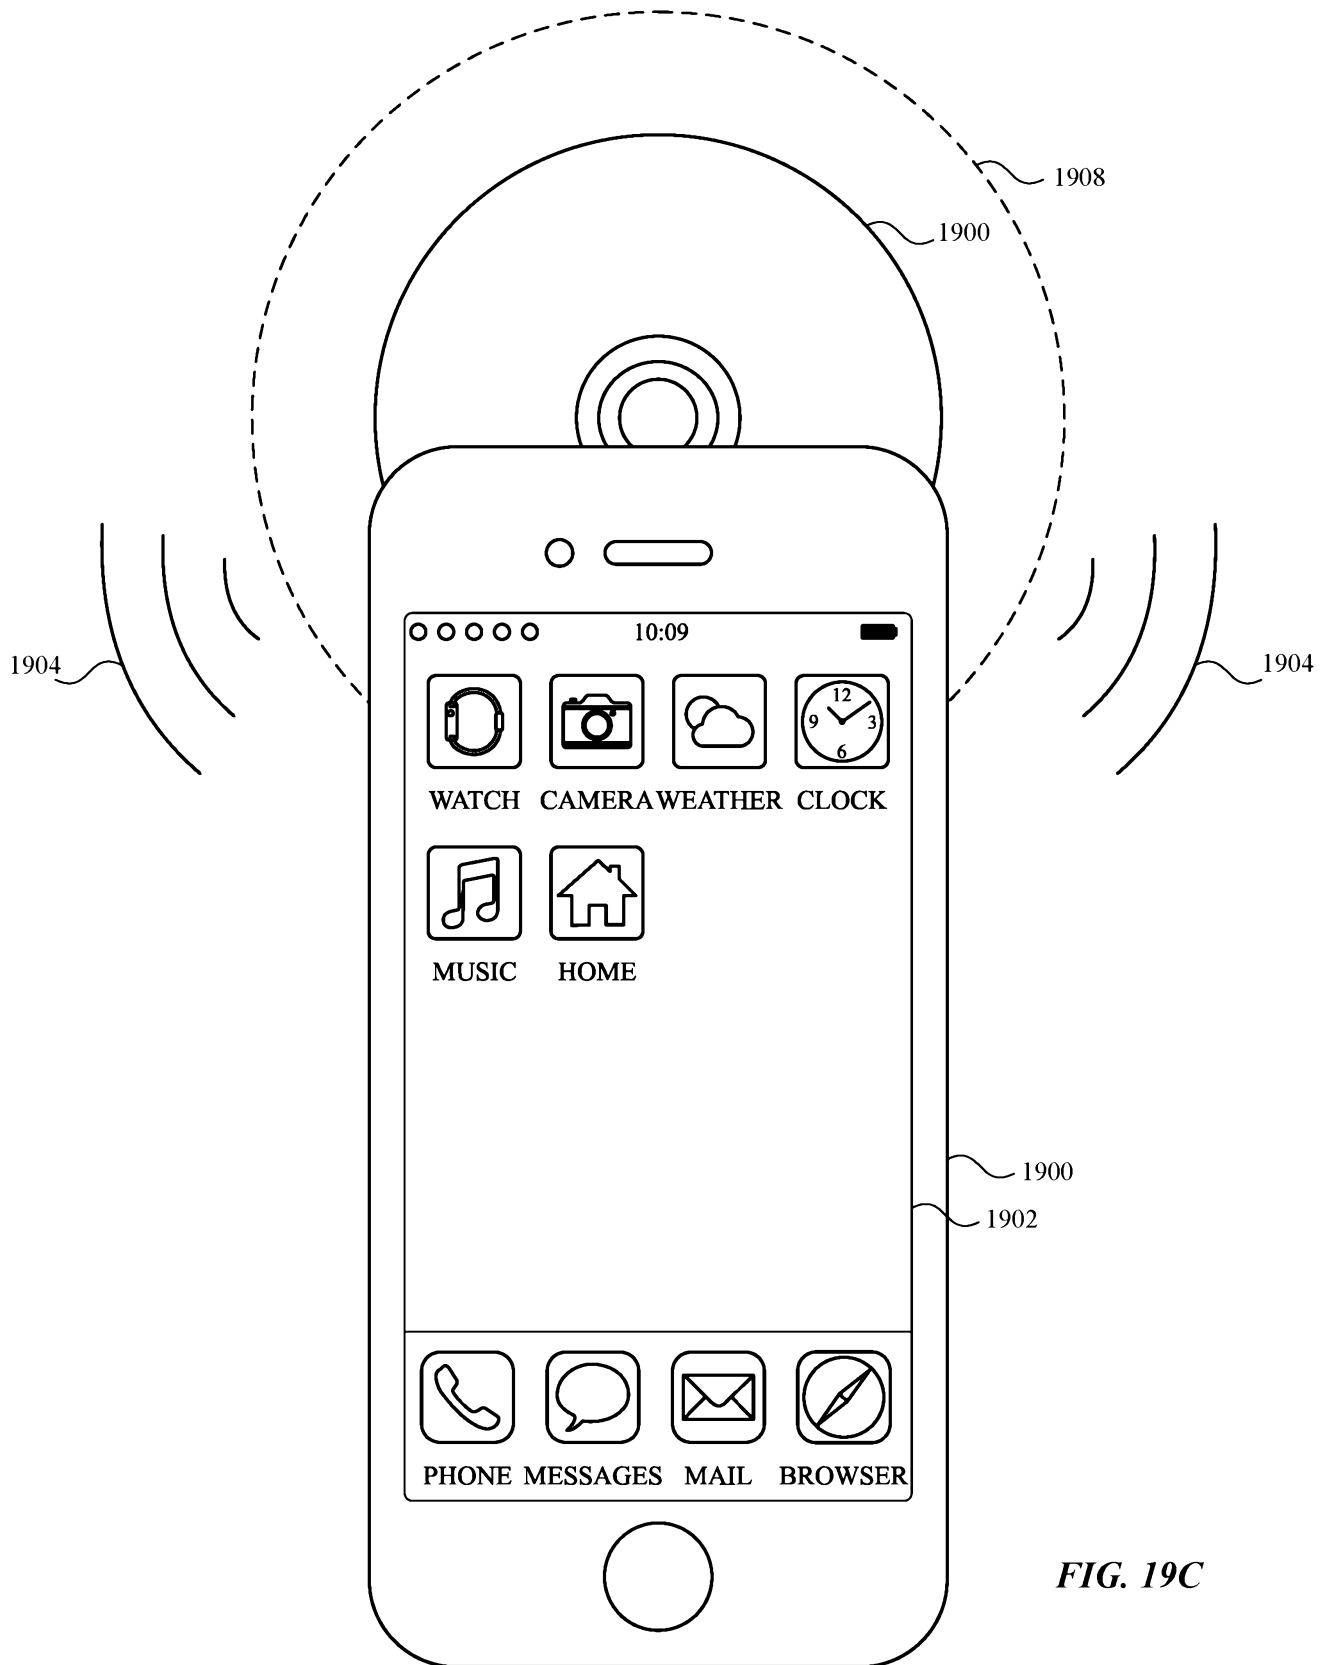
FIG. 16P

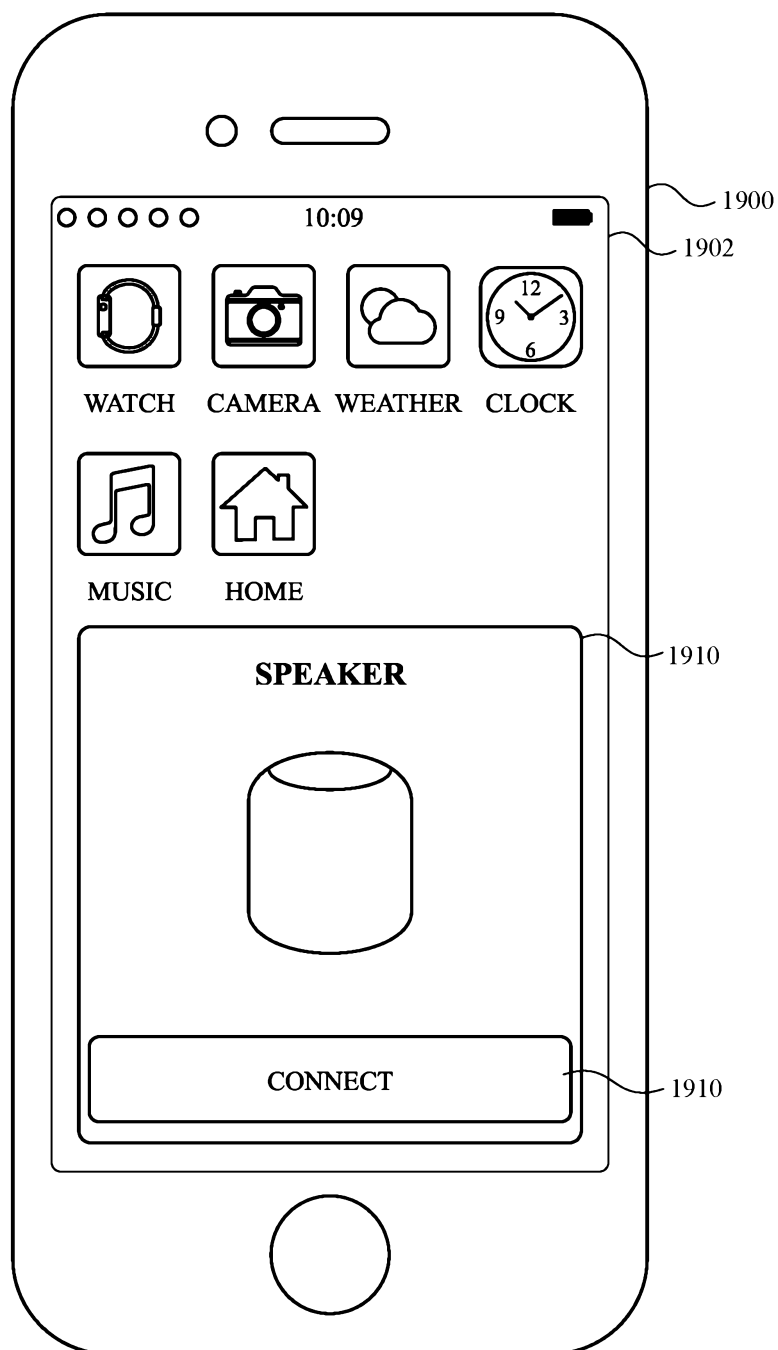
**FIG. 17**

**FIG. 18**

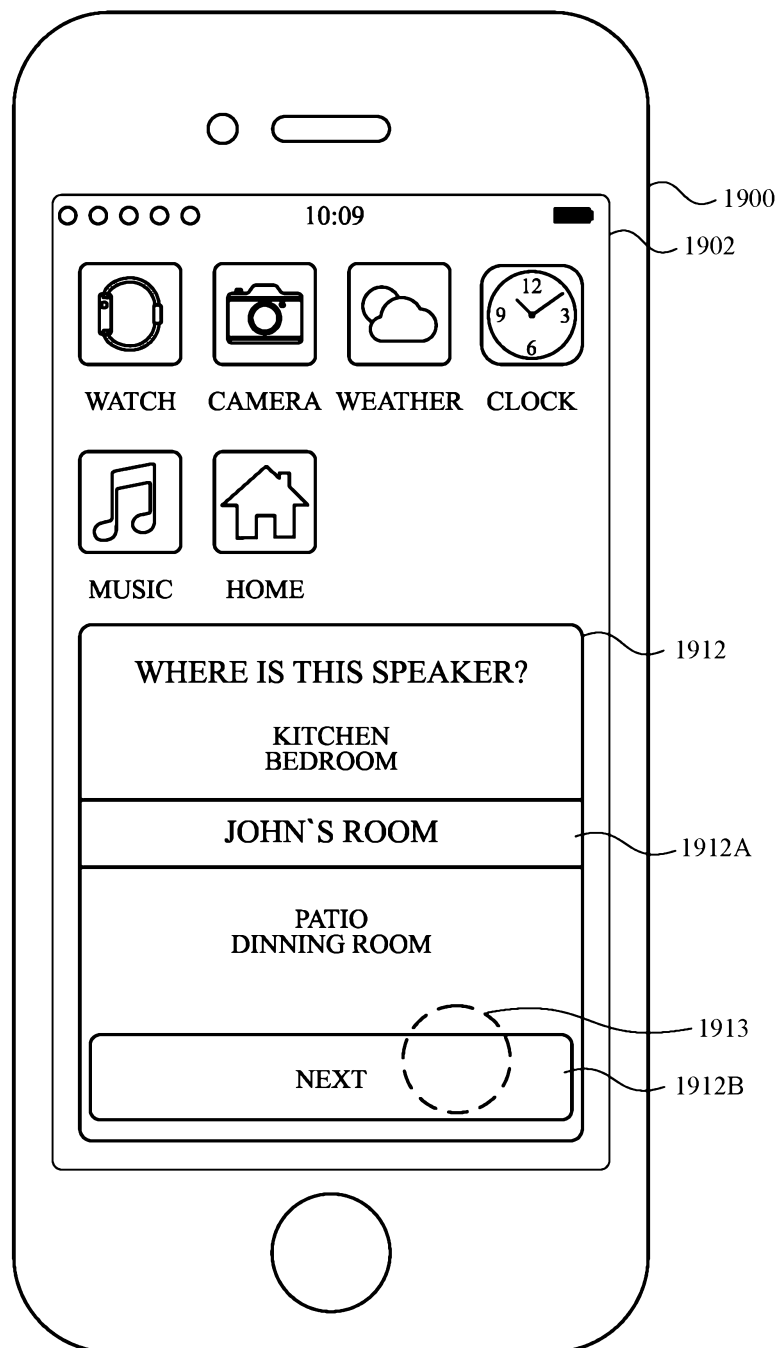
**FIG. 19A**

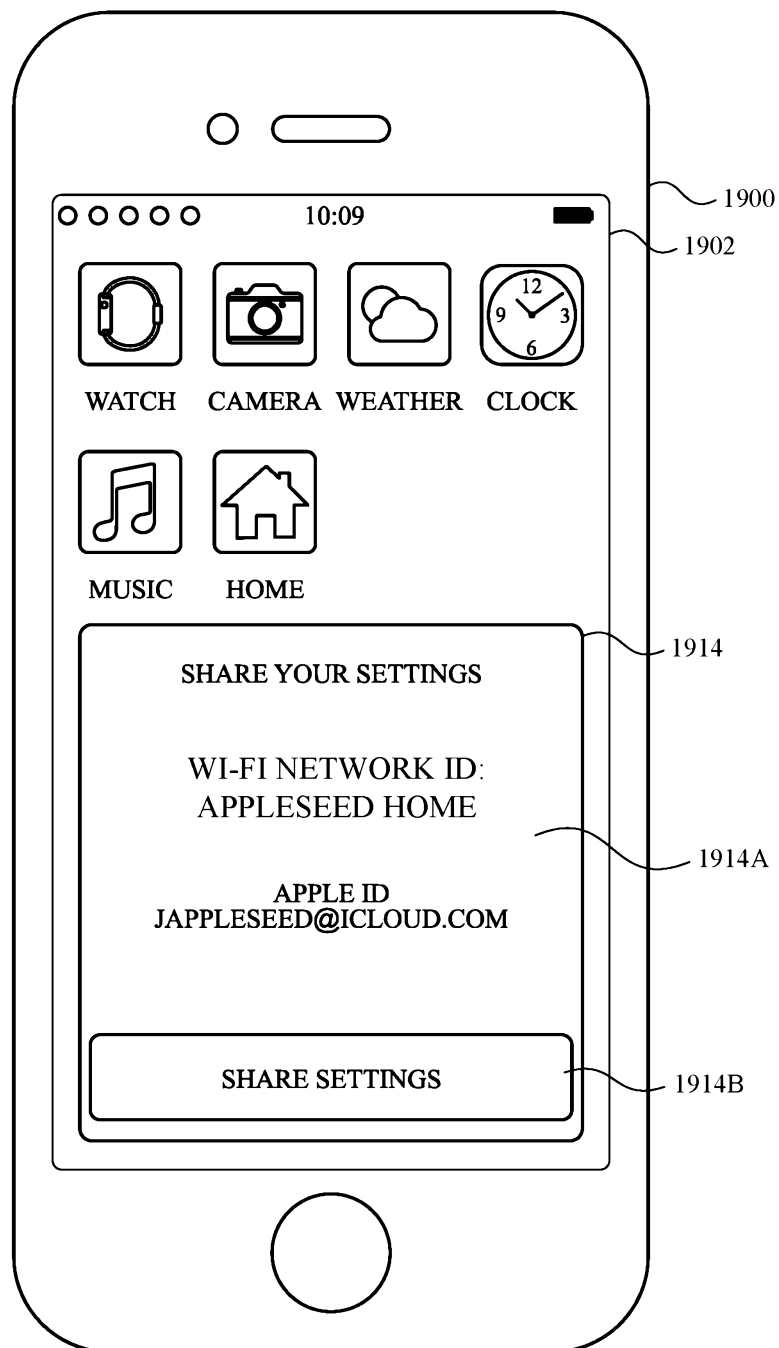
**FIG. 19B**

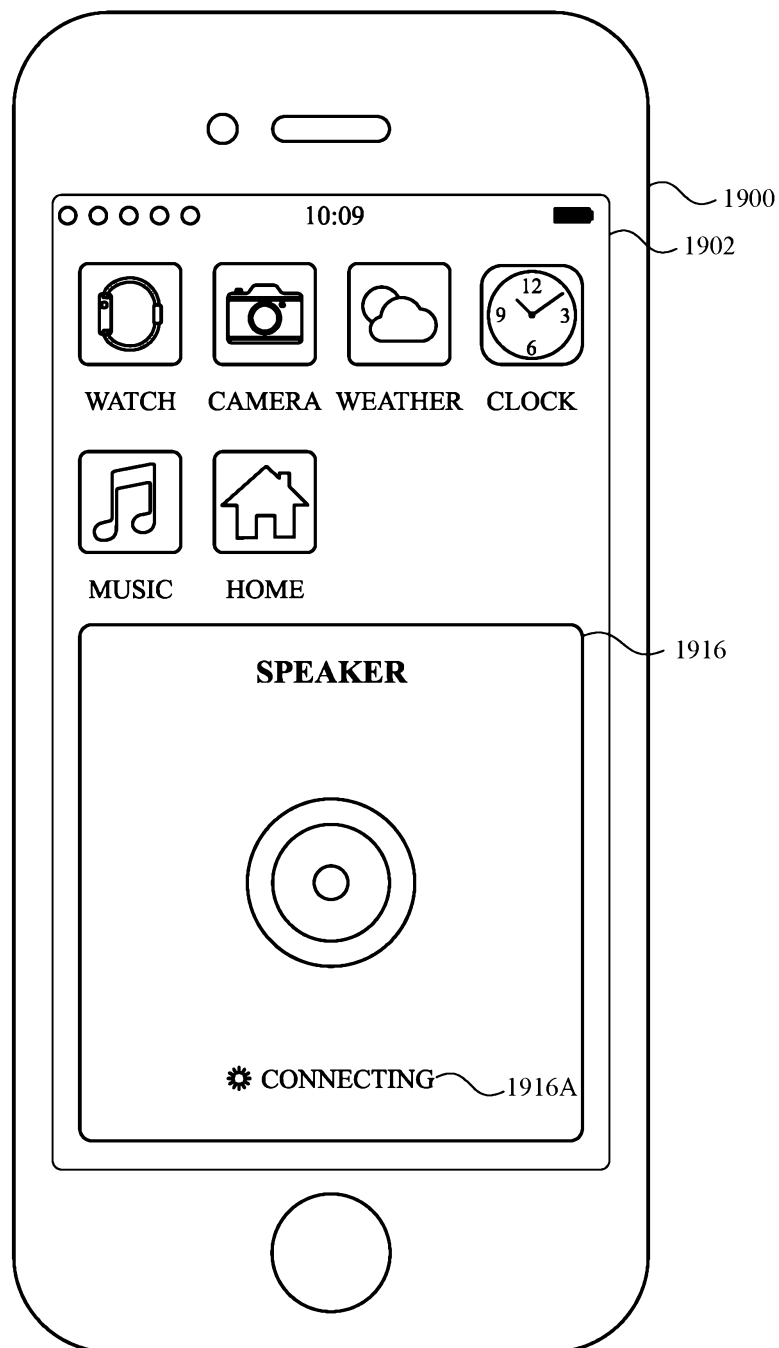
**FIG. 19C**

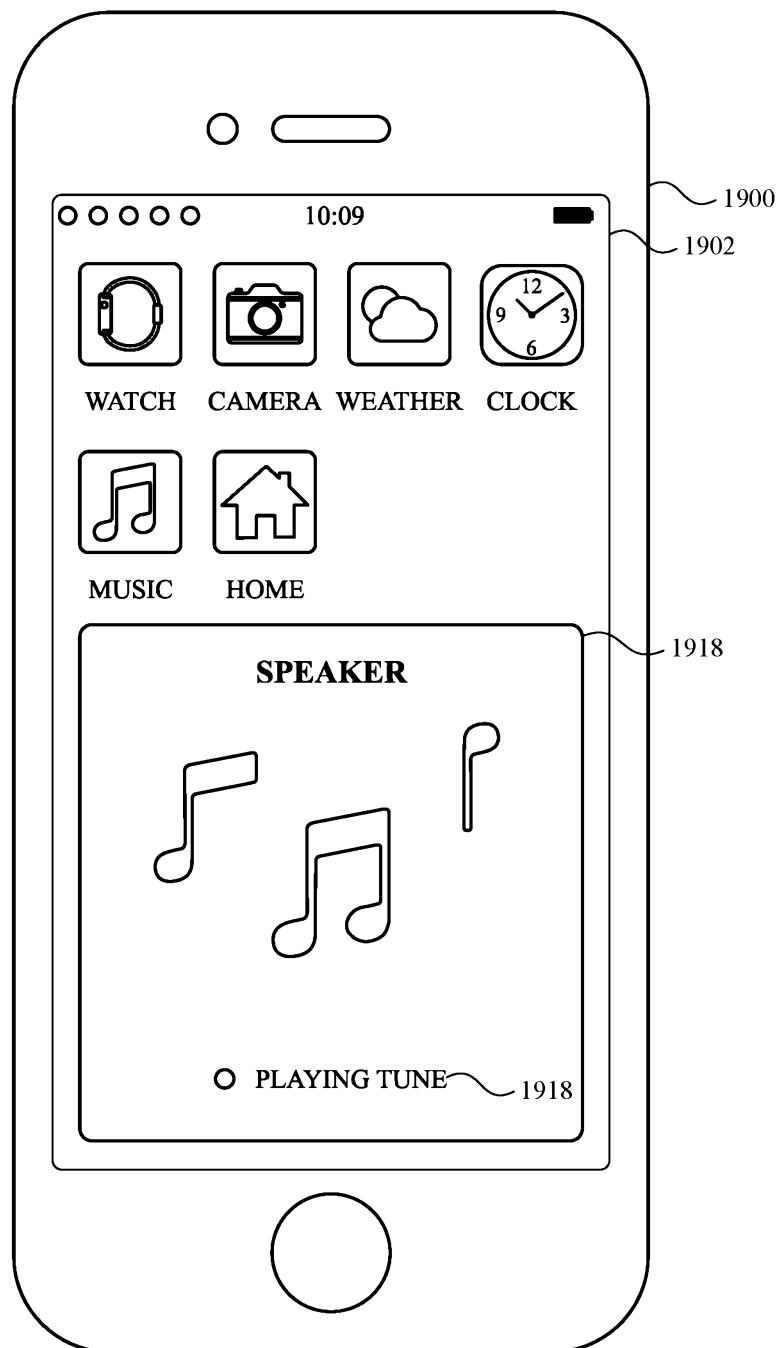
**FIG. 19D**

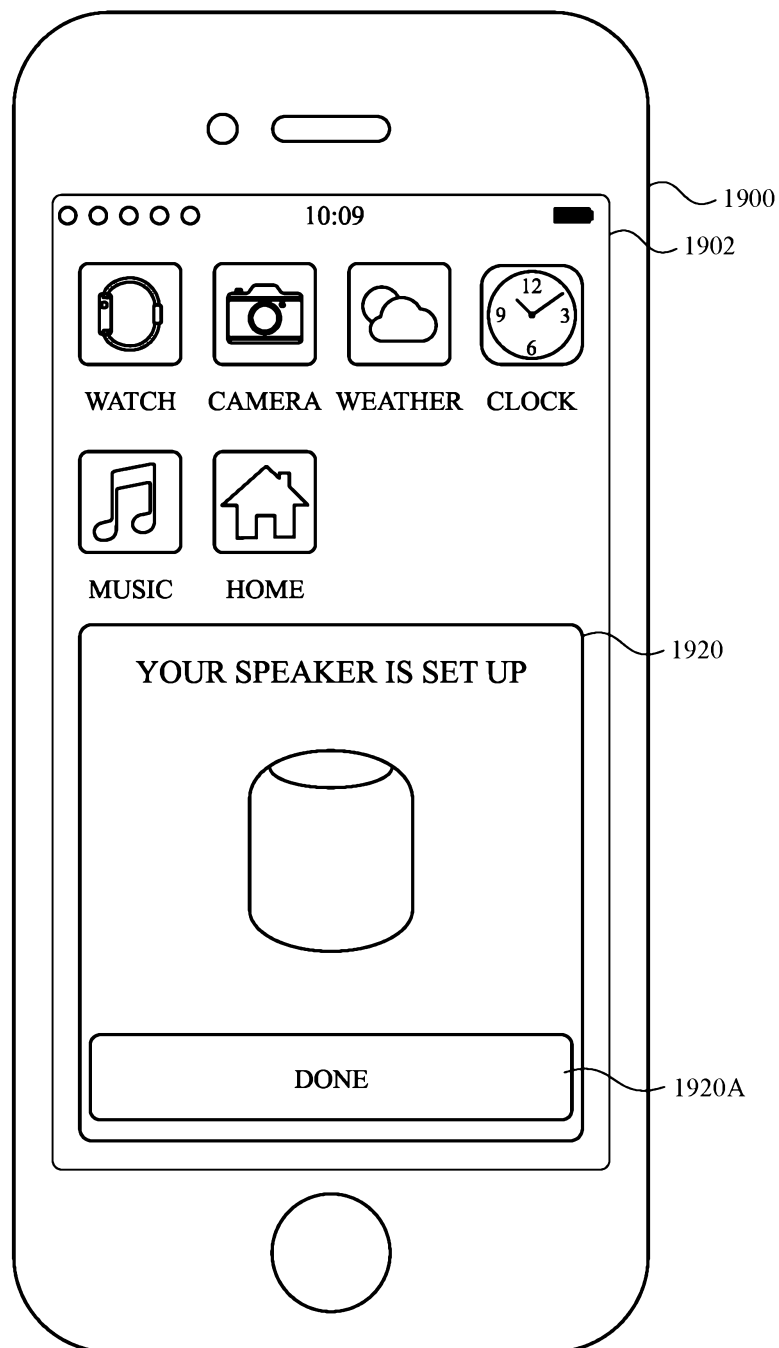


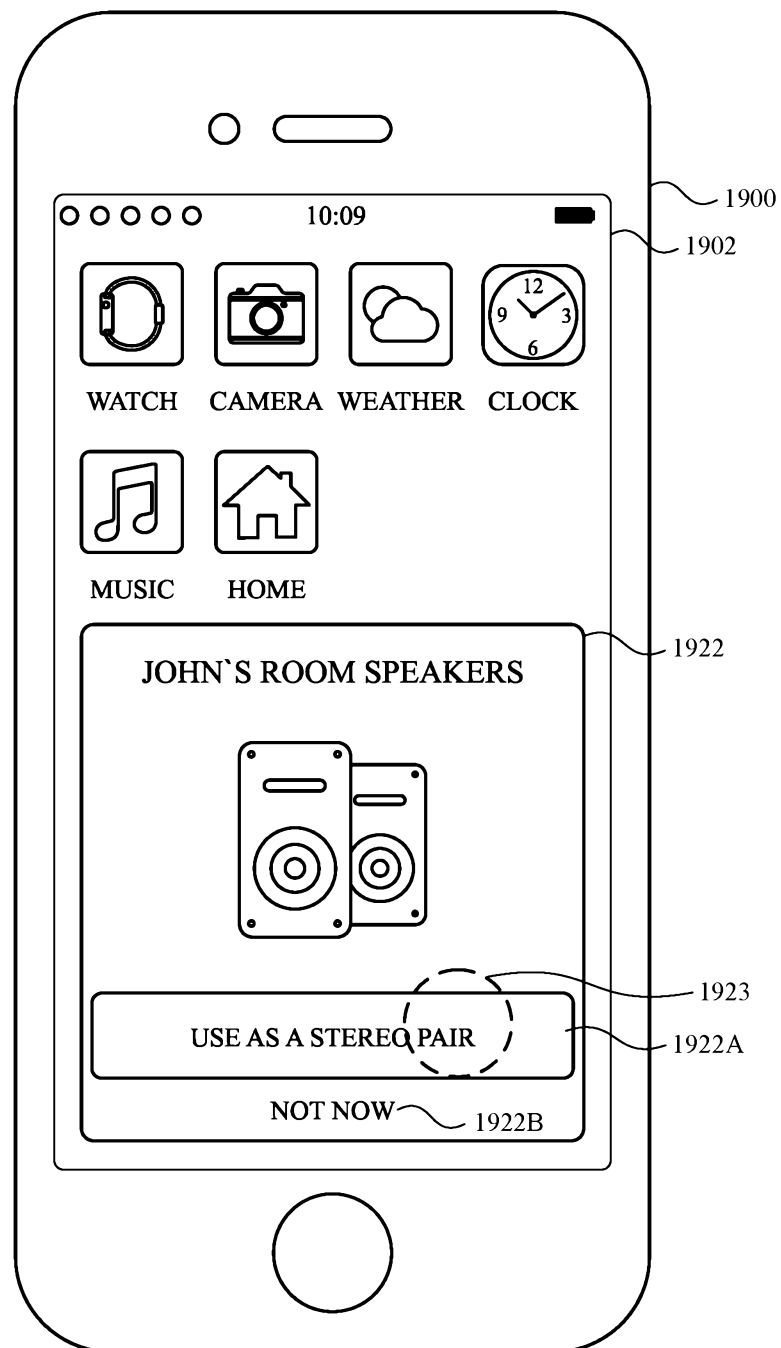
**FIG. 19E**

**FIG. 19F**

**FIG. 19G**

**FIG. 19H**

**FIG. 19I**

**FIG. 19J**

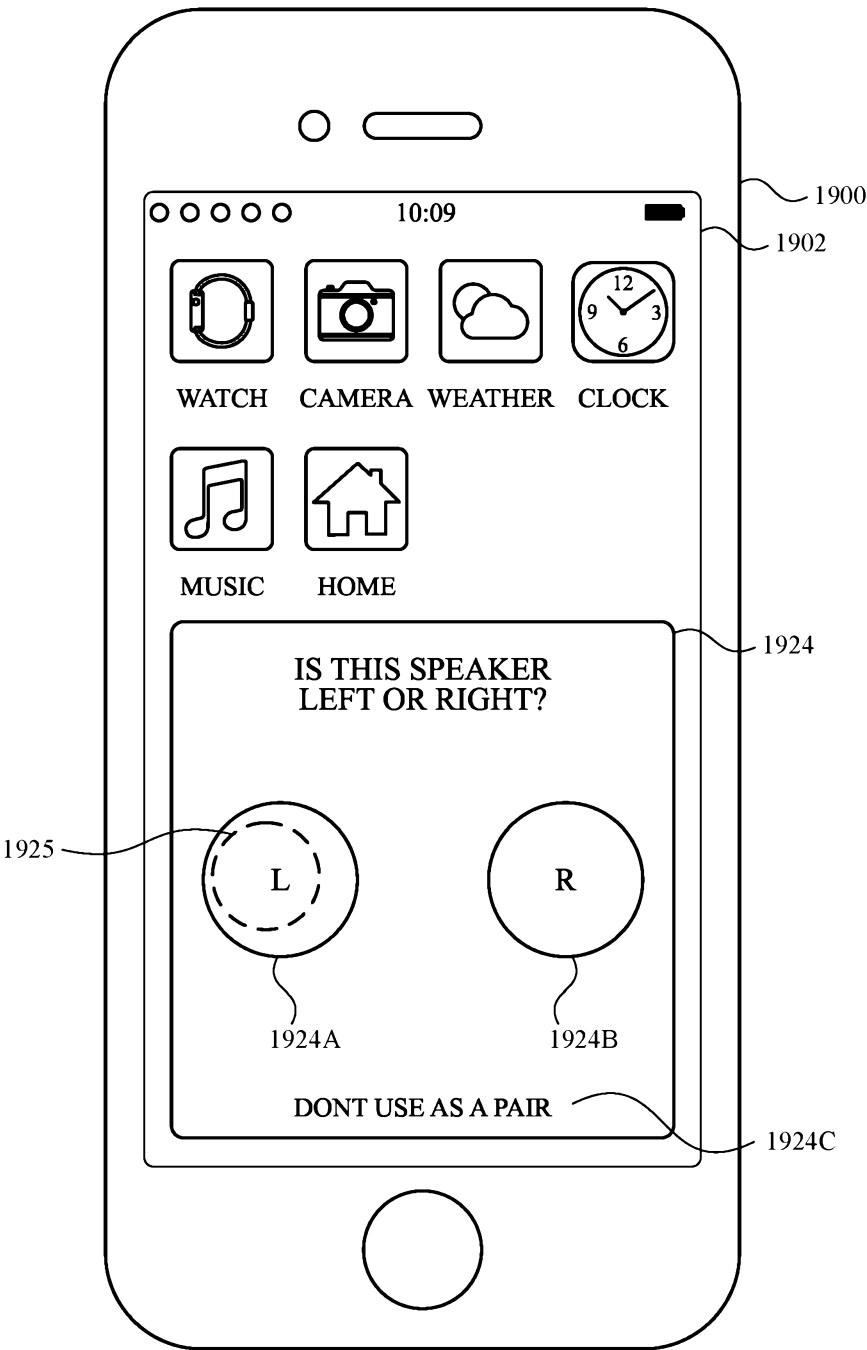
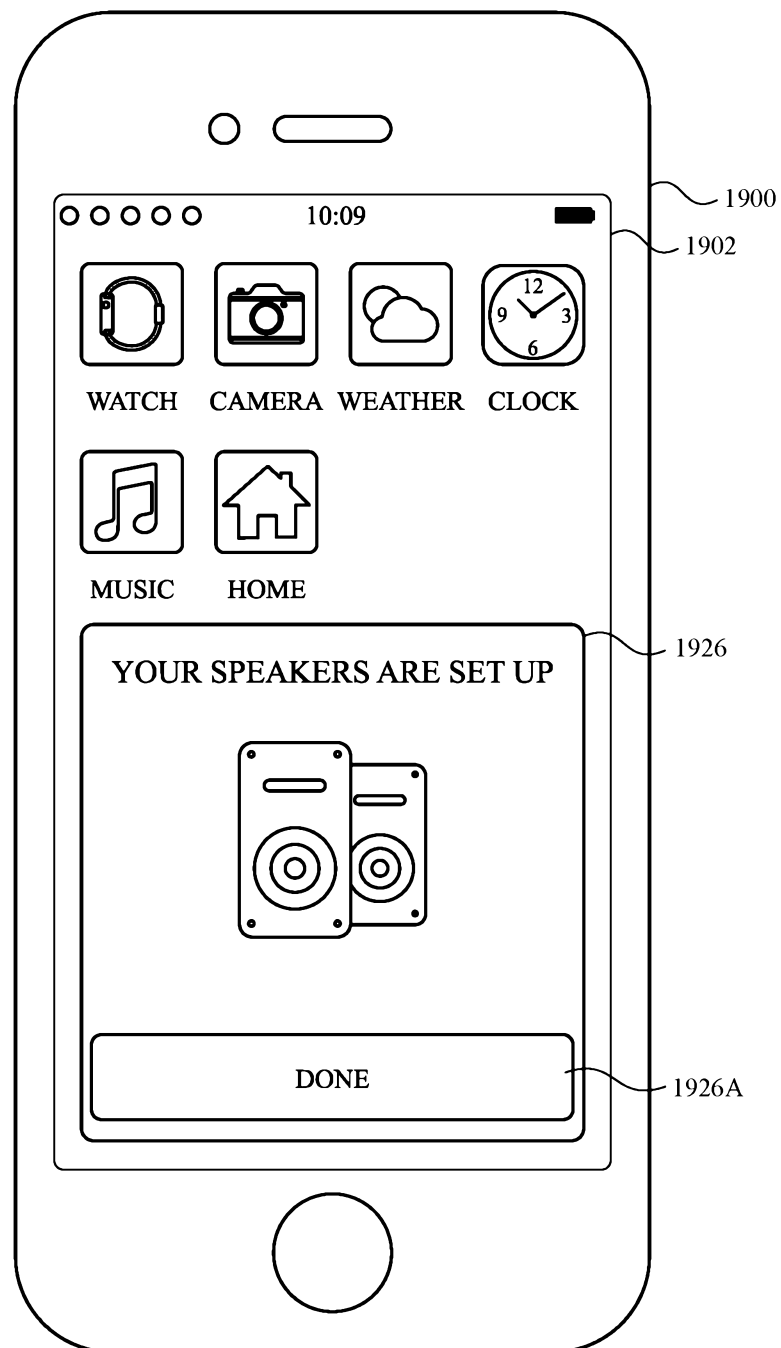
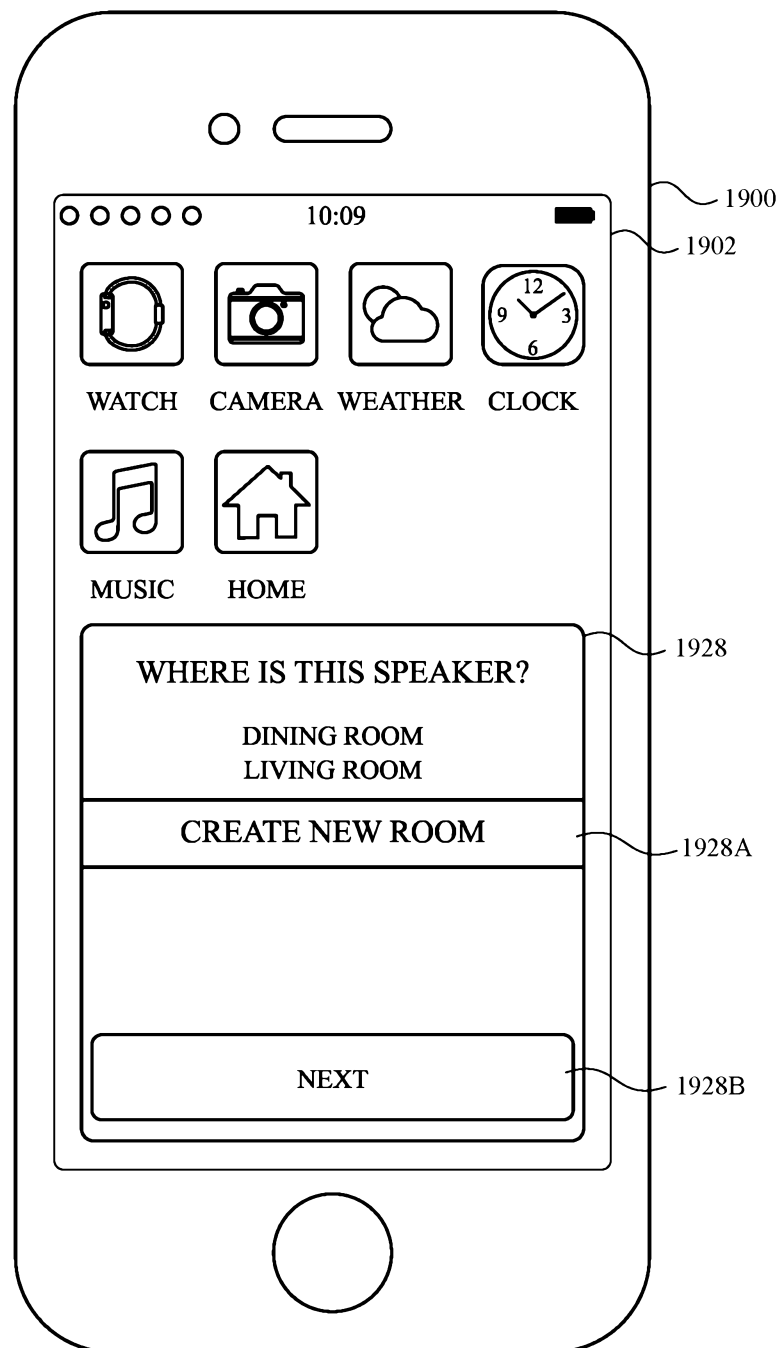


FIG. 19K

**FIG. 19L**



**FIG. 19M**

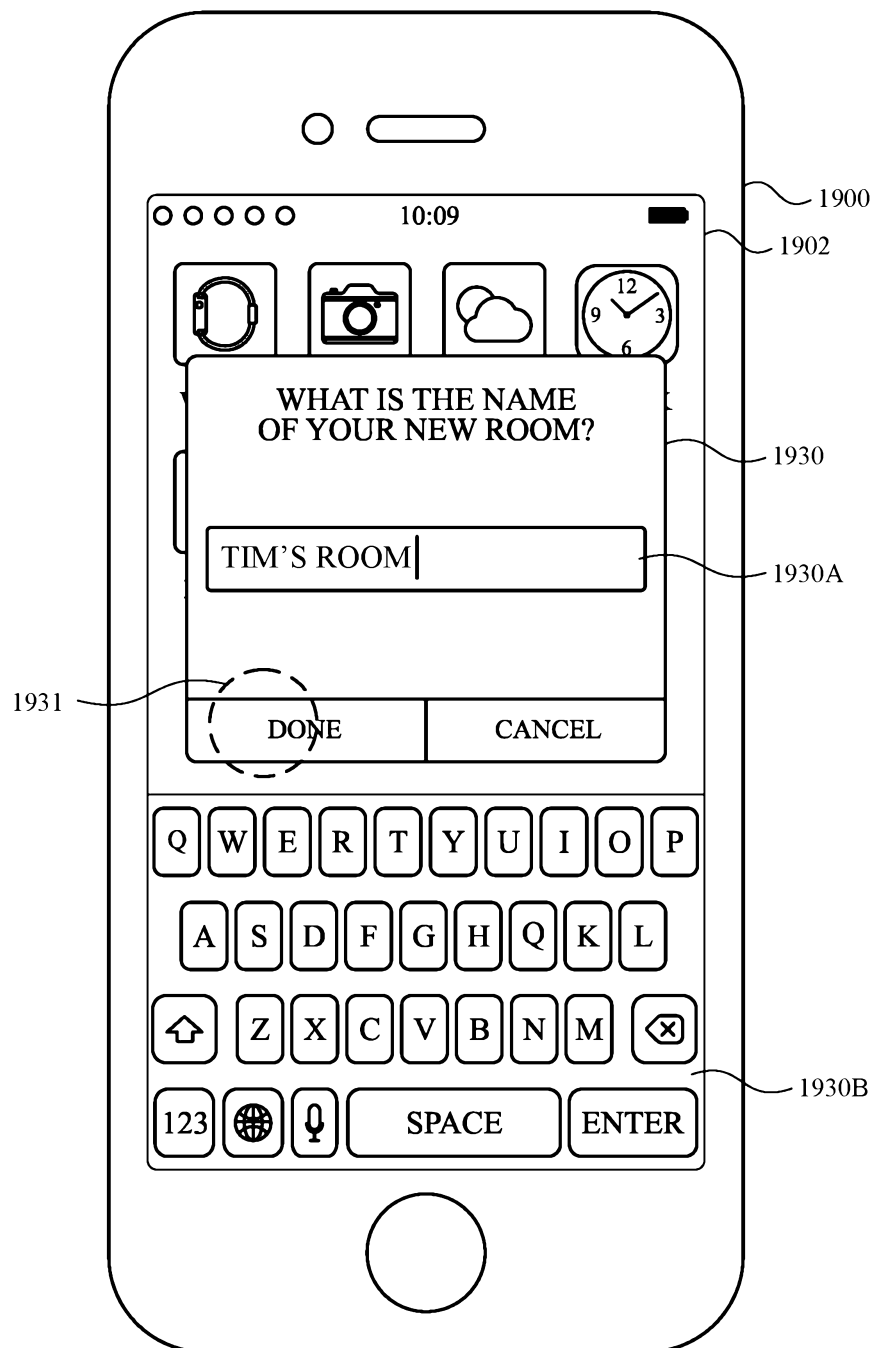
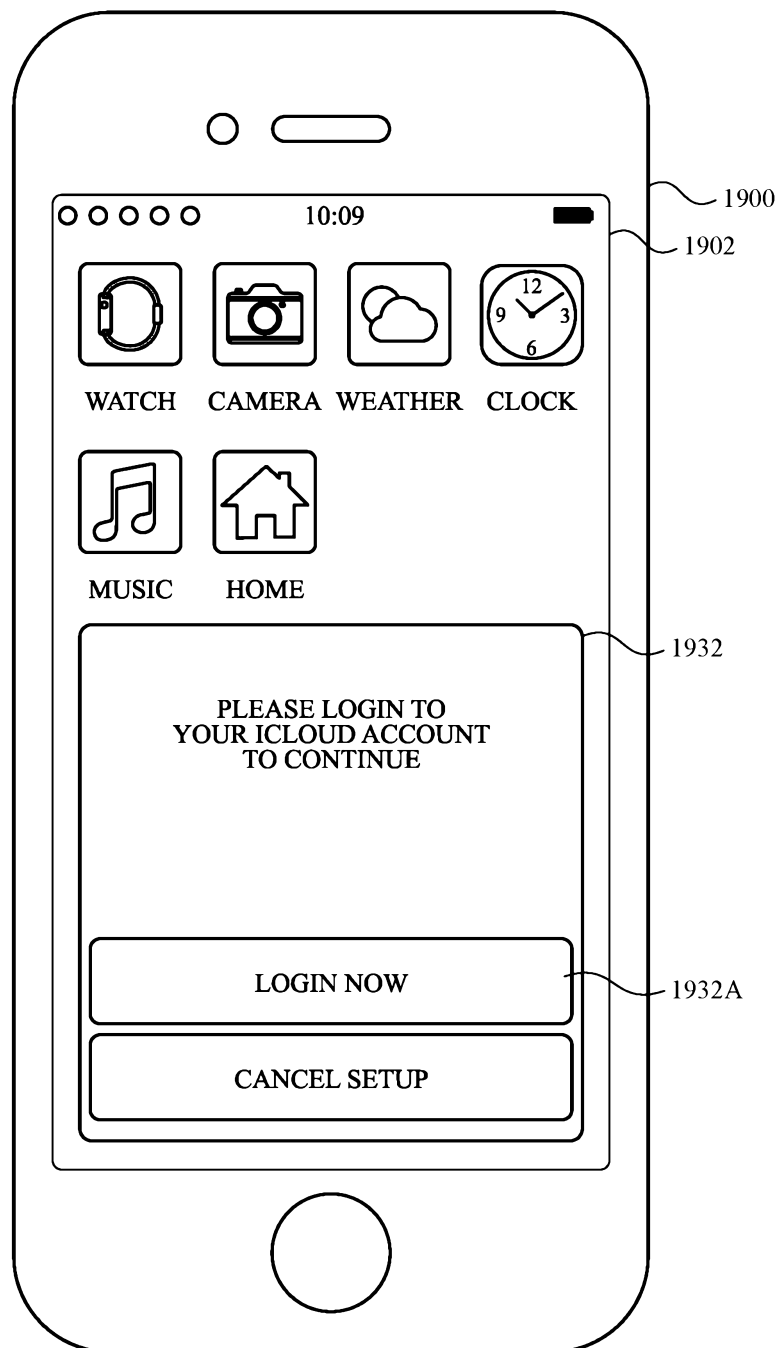
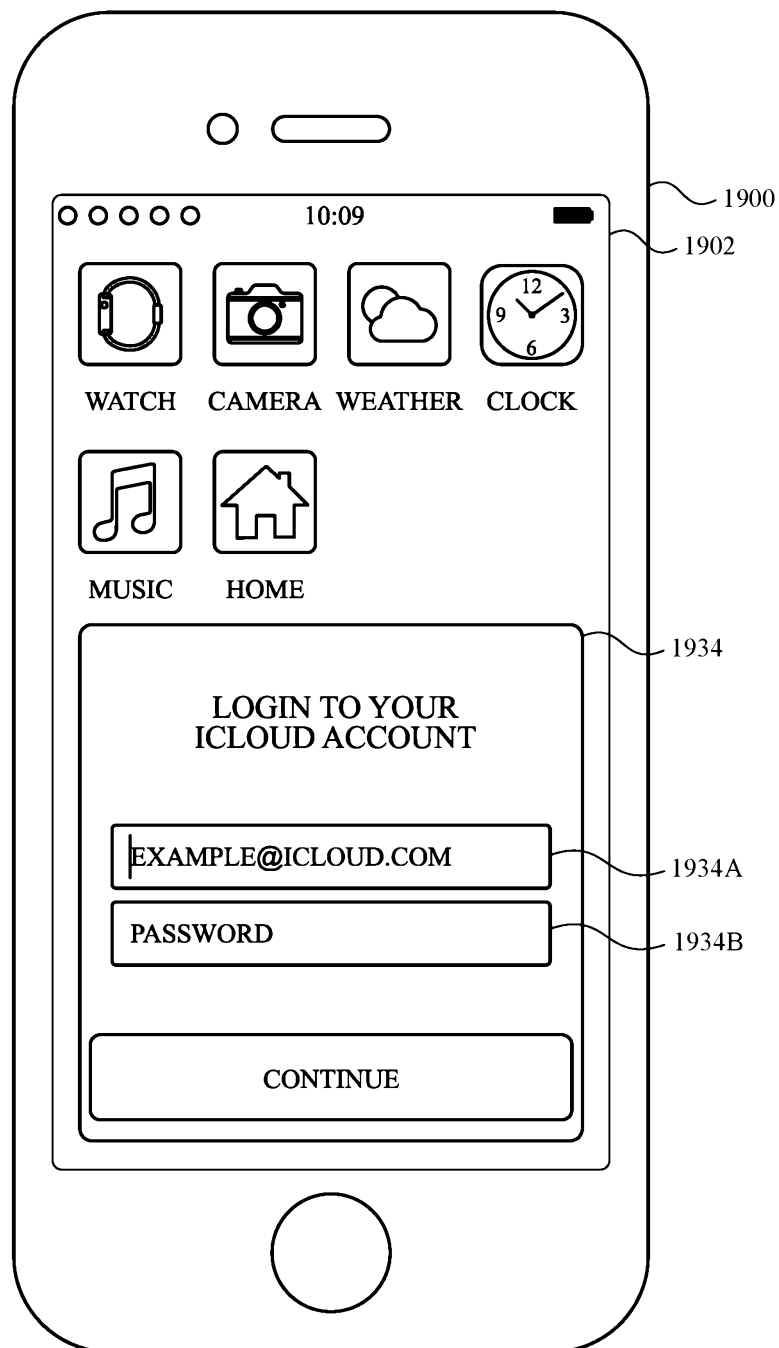
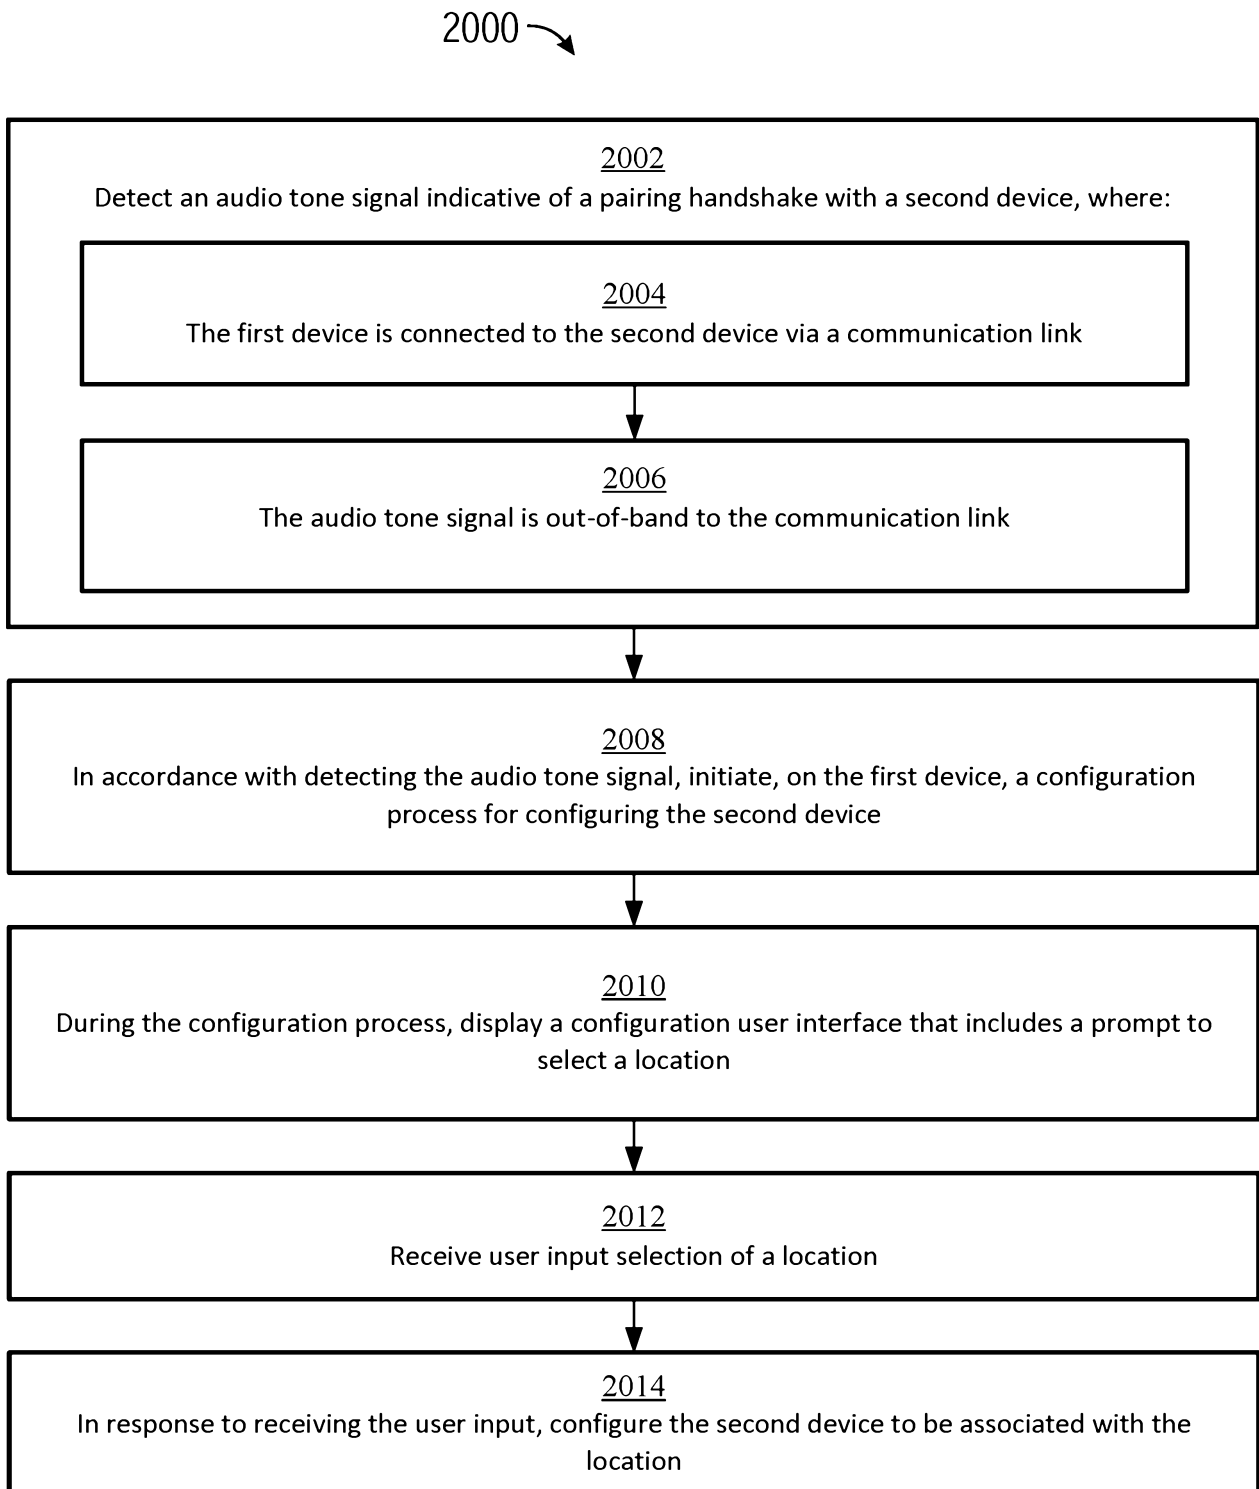
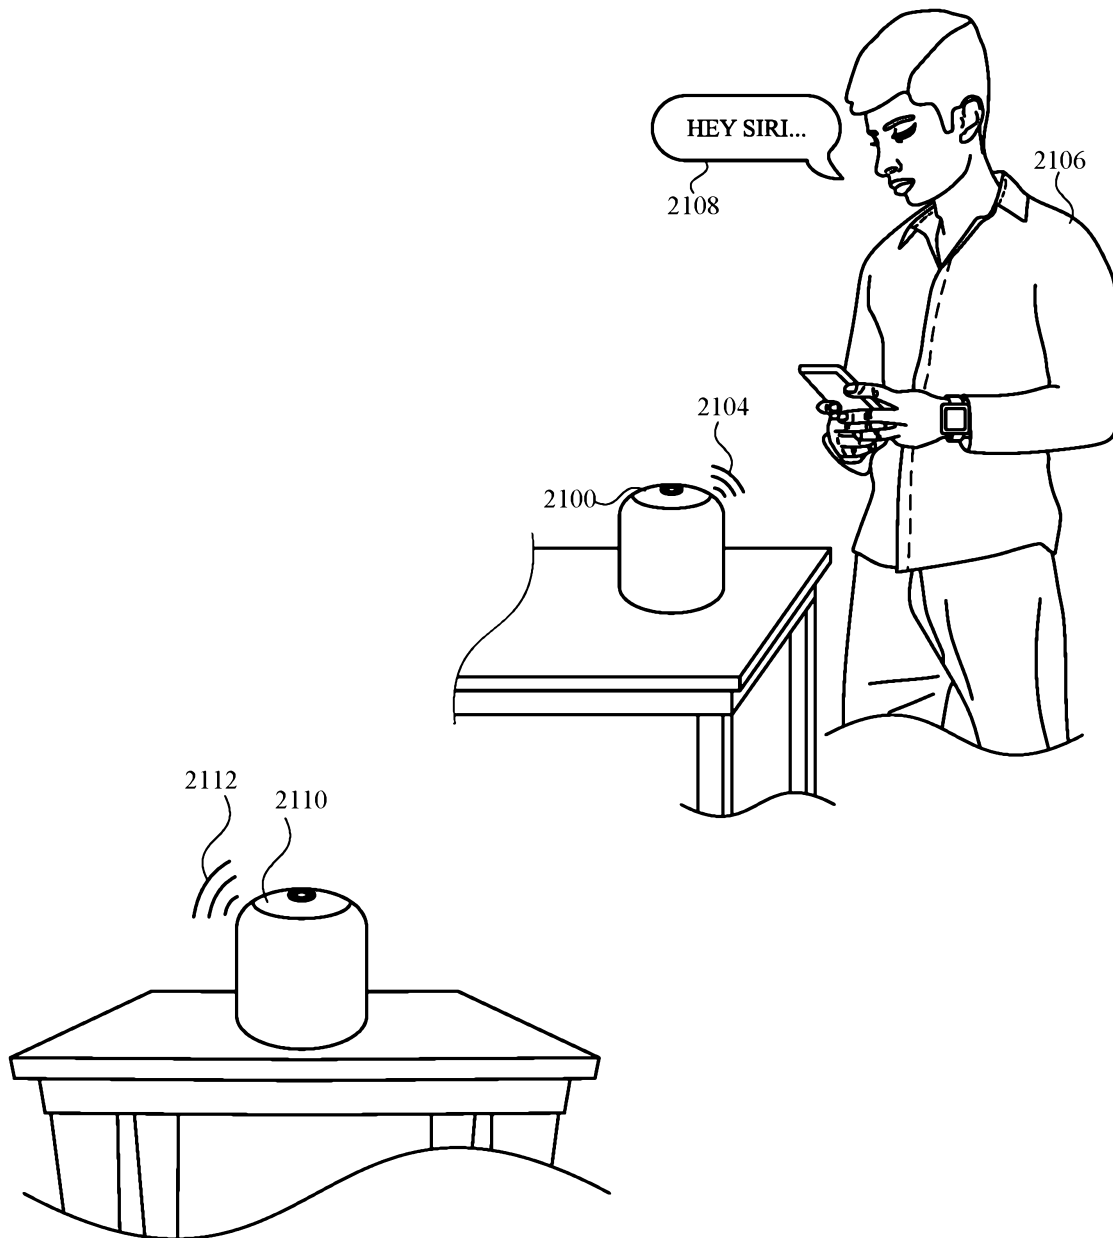


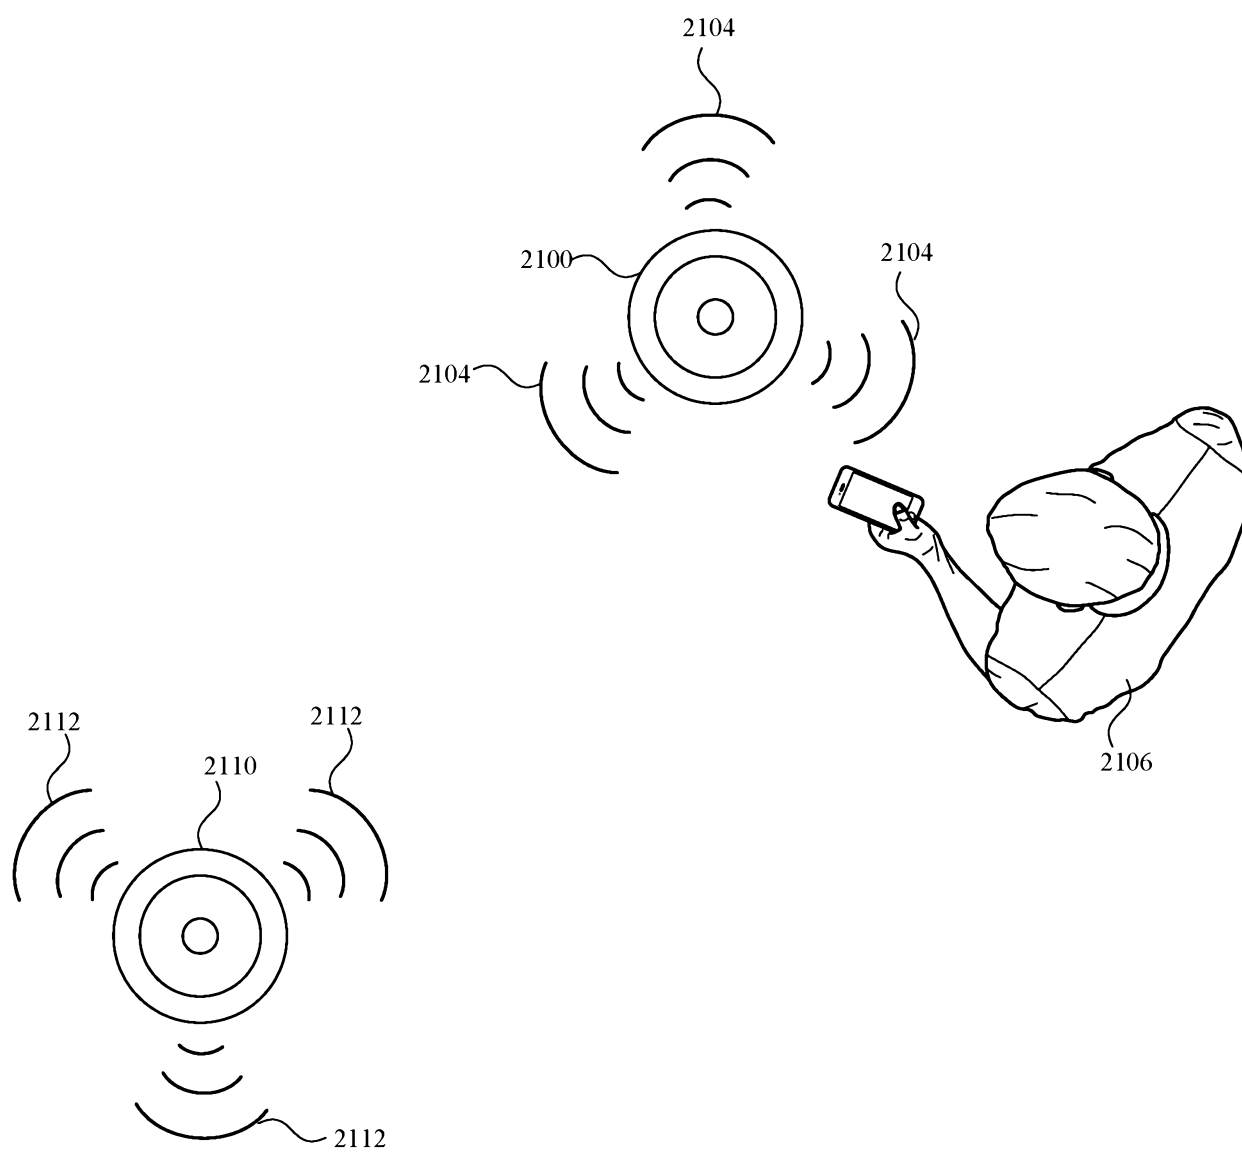
FIG. 19N

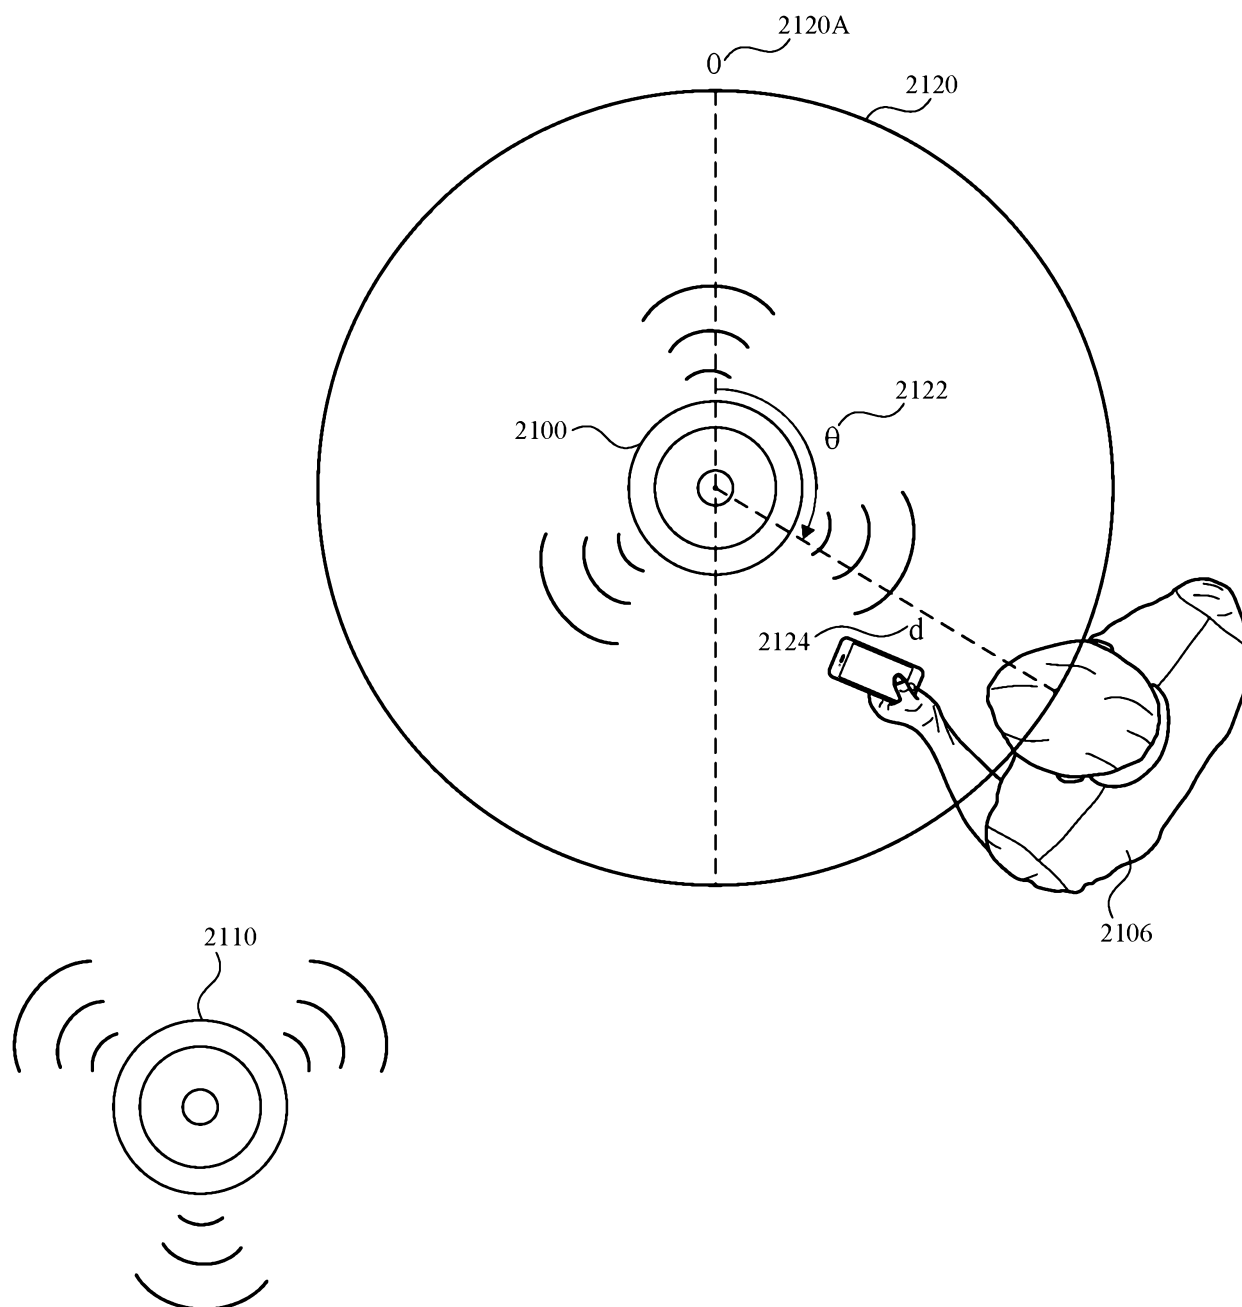
**FIG. 190**

**FIG. 19P**

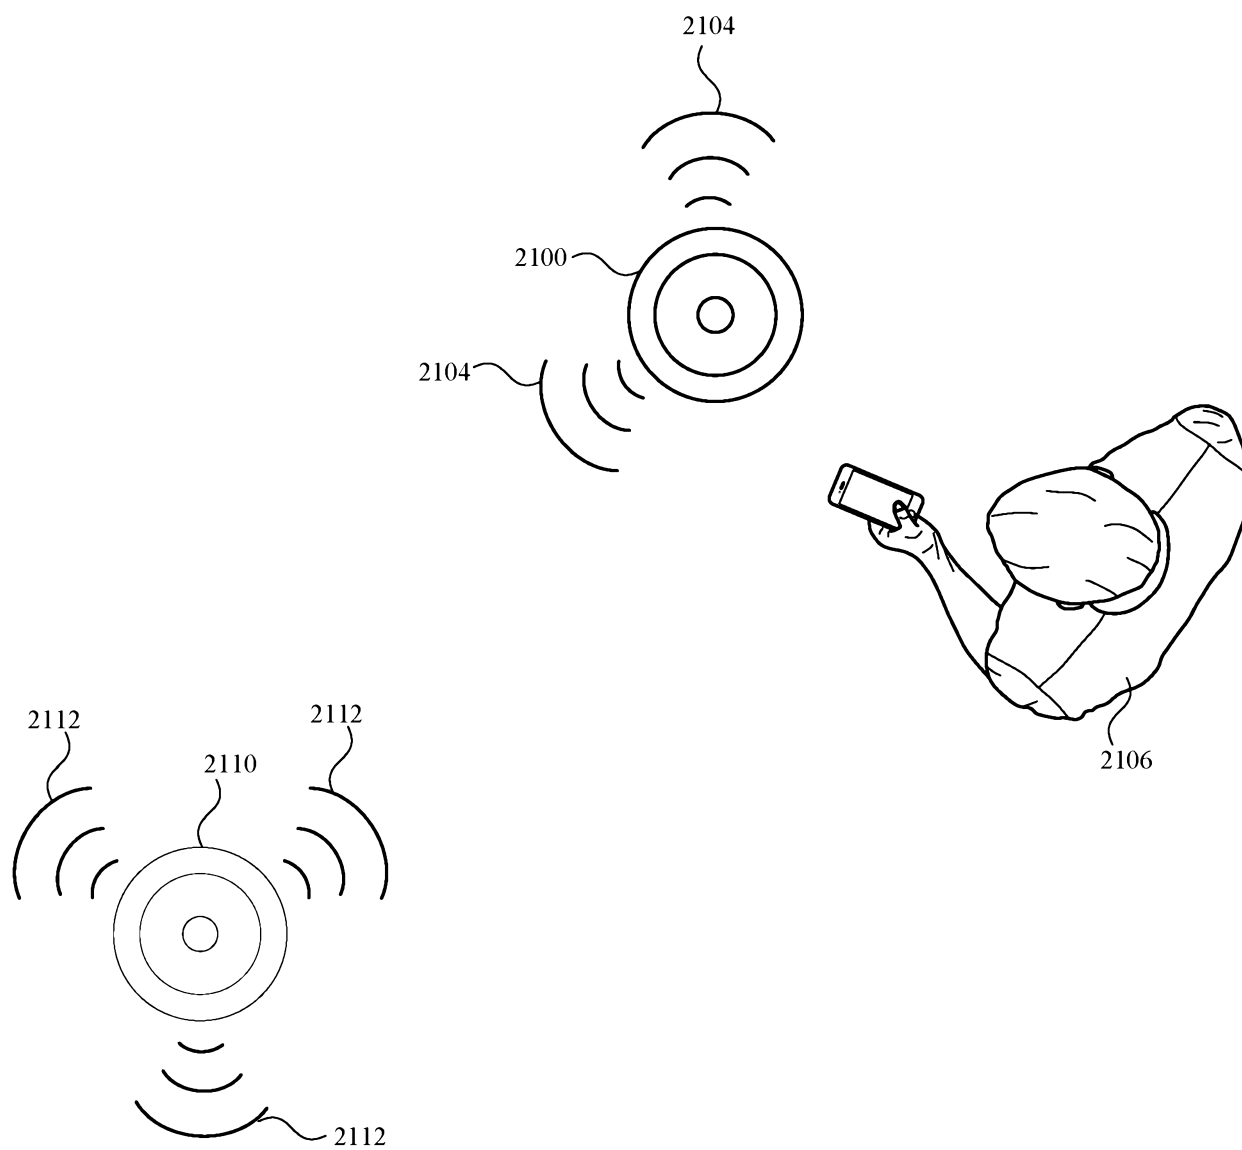
**FIG. 20**

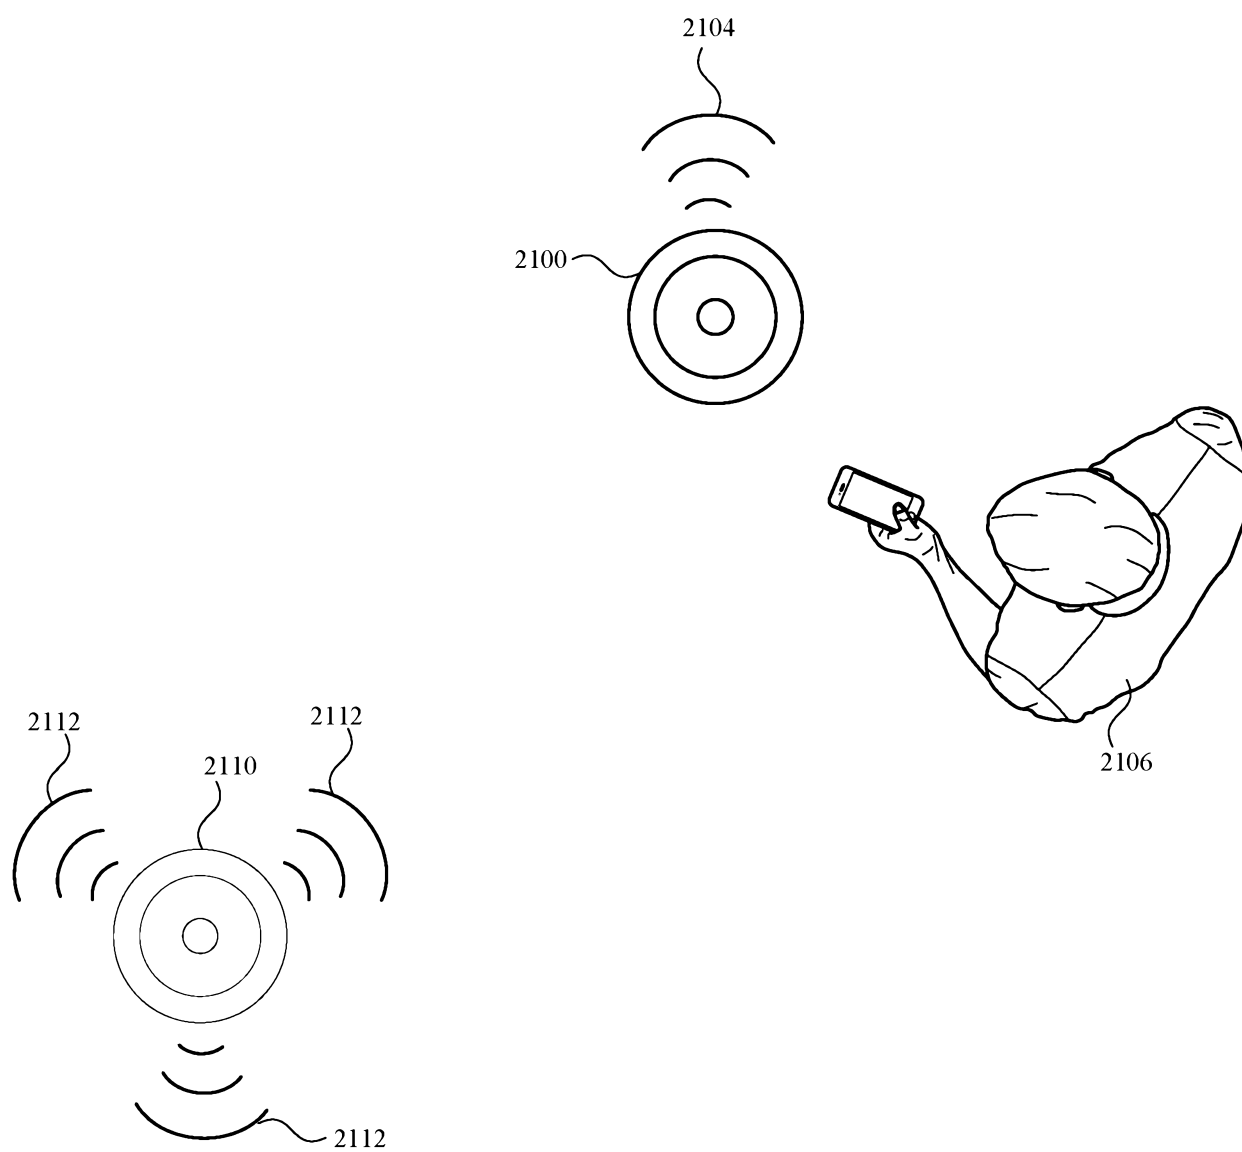
**FIG. 21A**

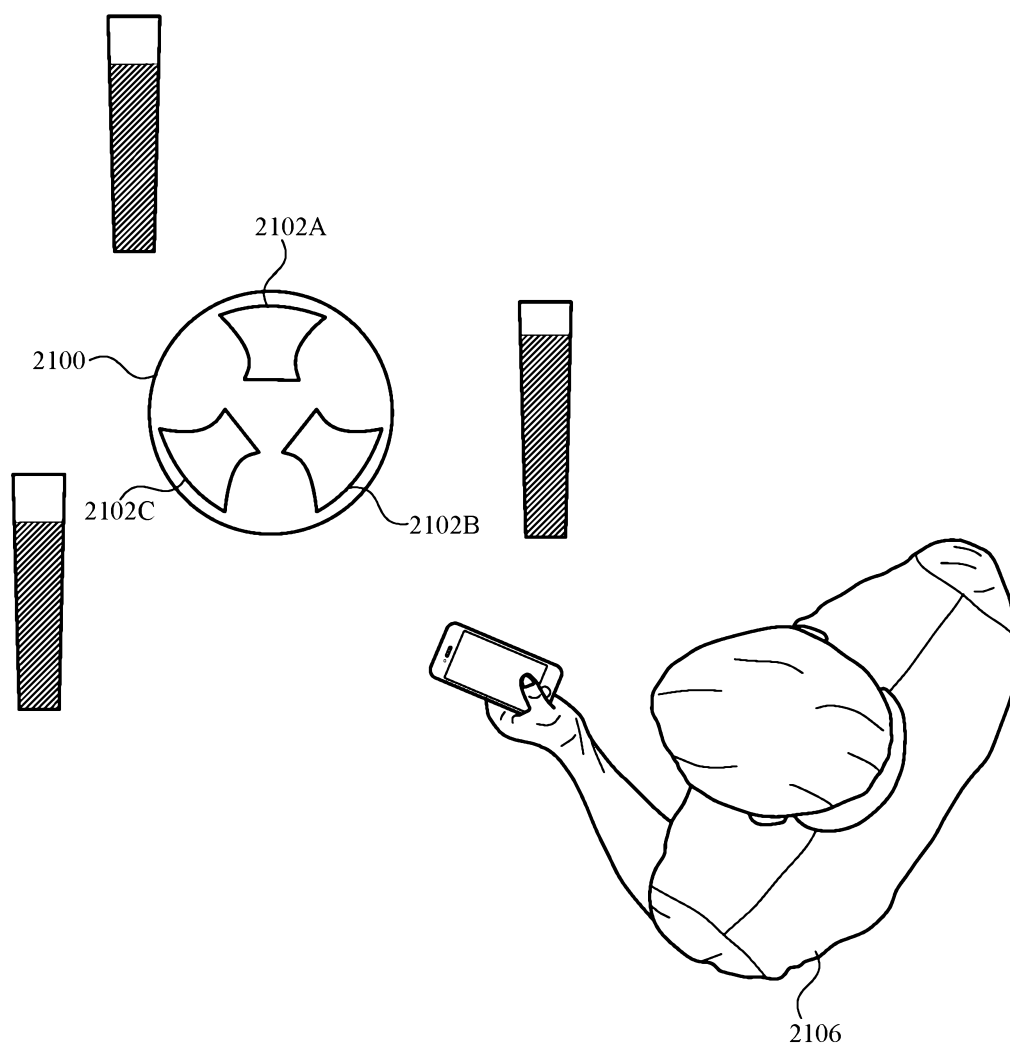
**FIG. 21B**

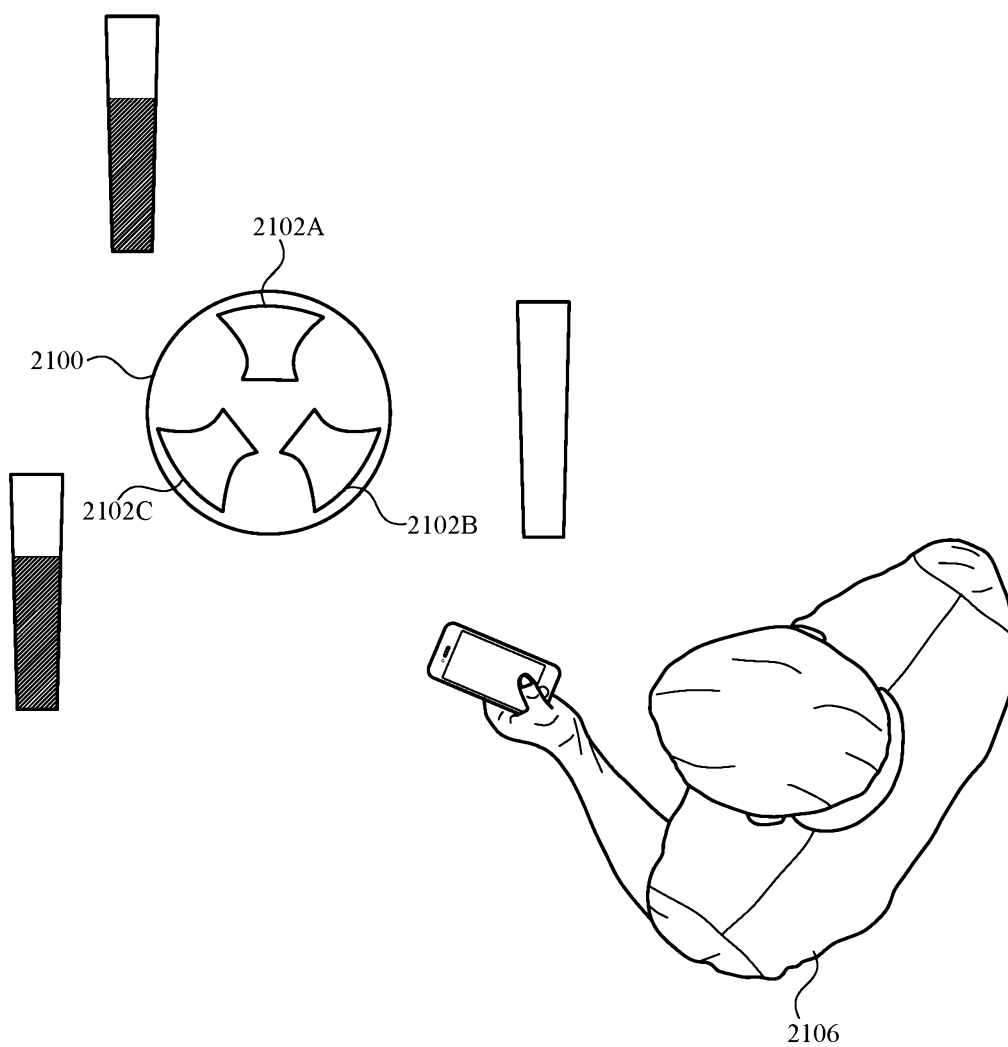
**FIG. 21C**

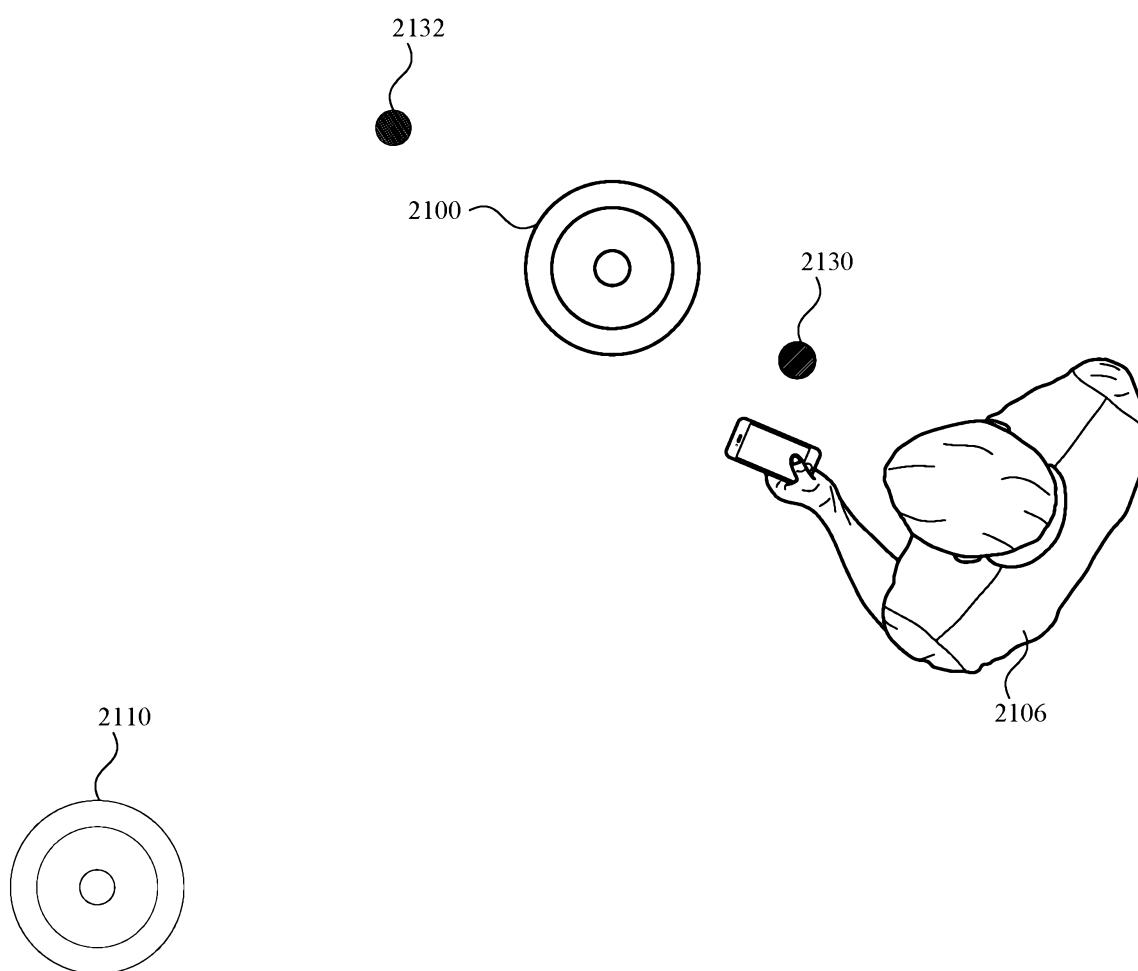


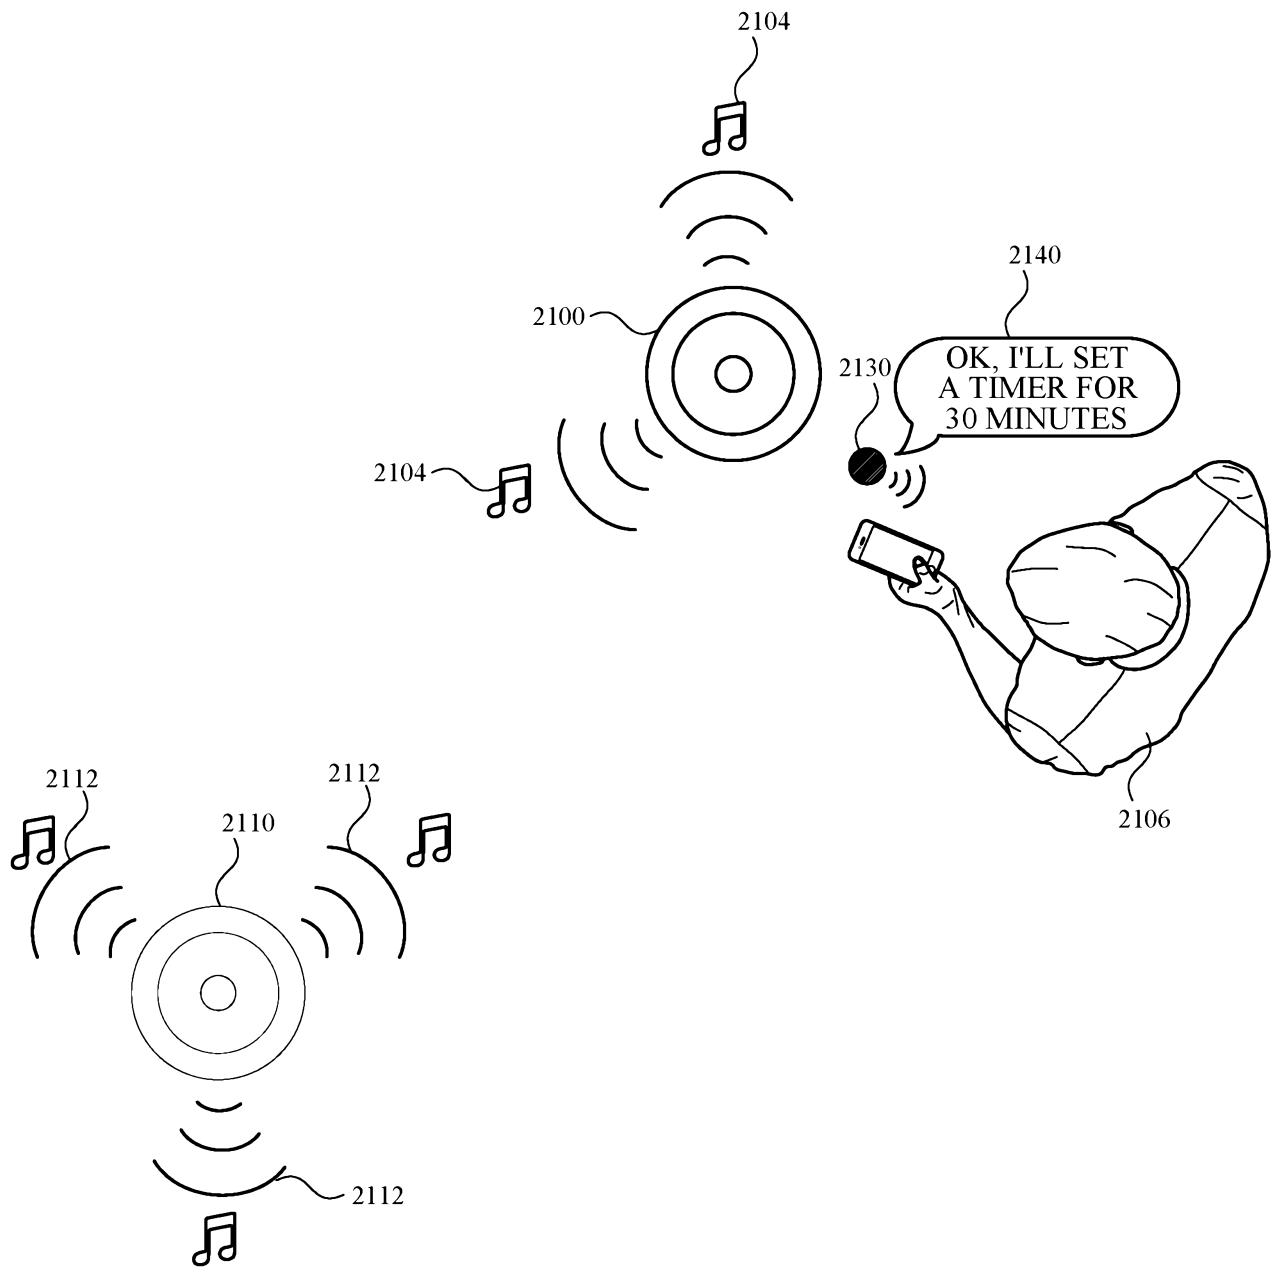
**FIG. 21D**

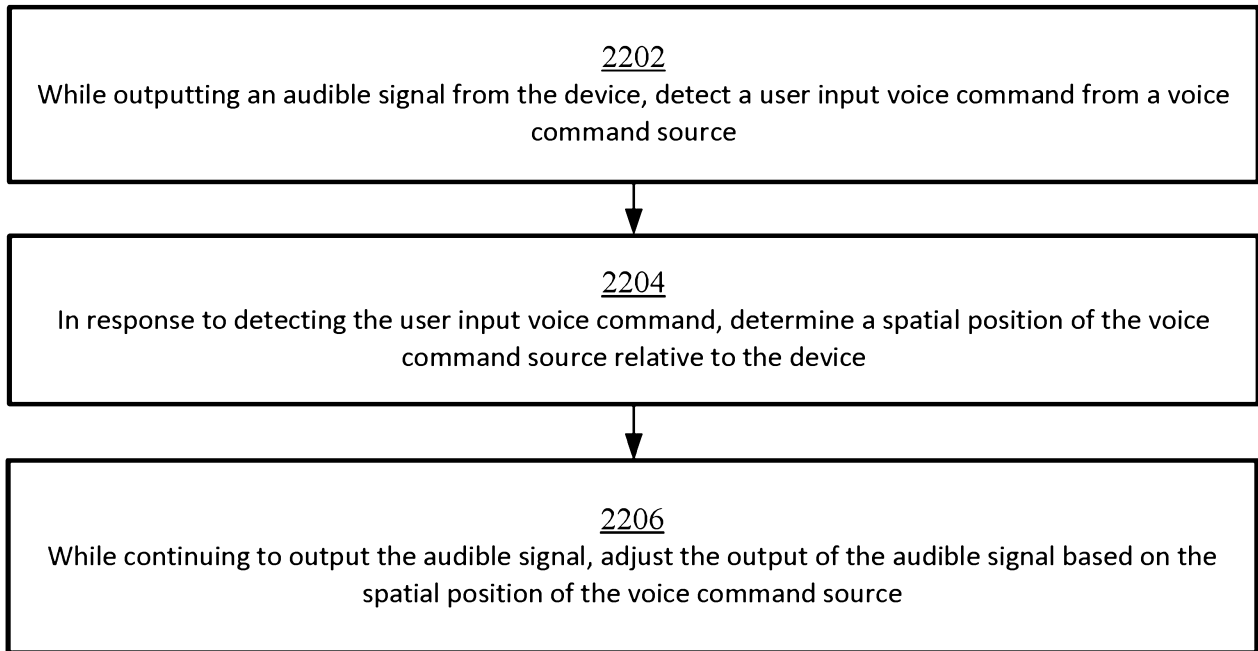
**FIG. 21E**

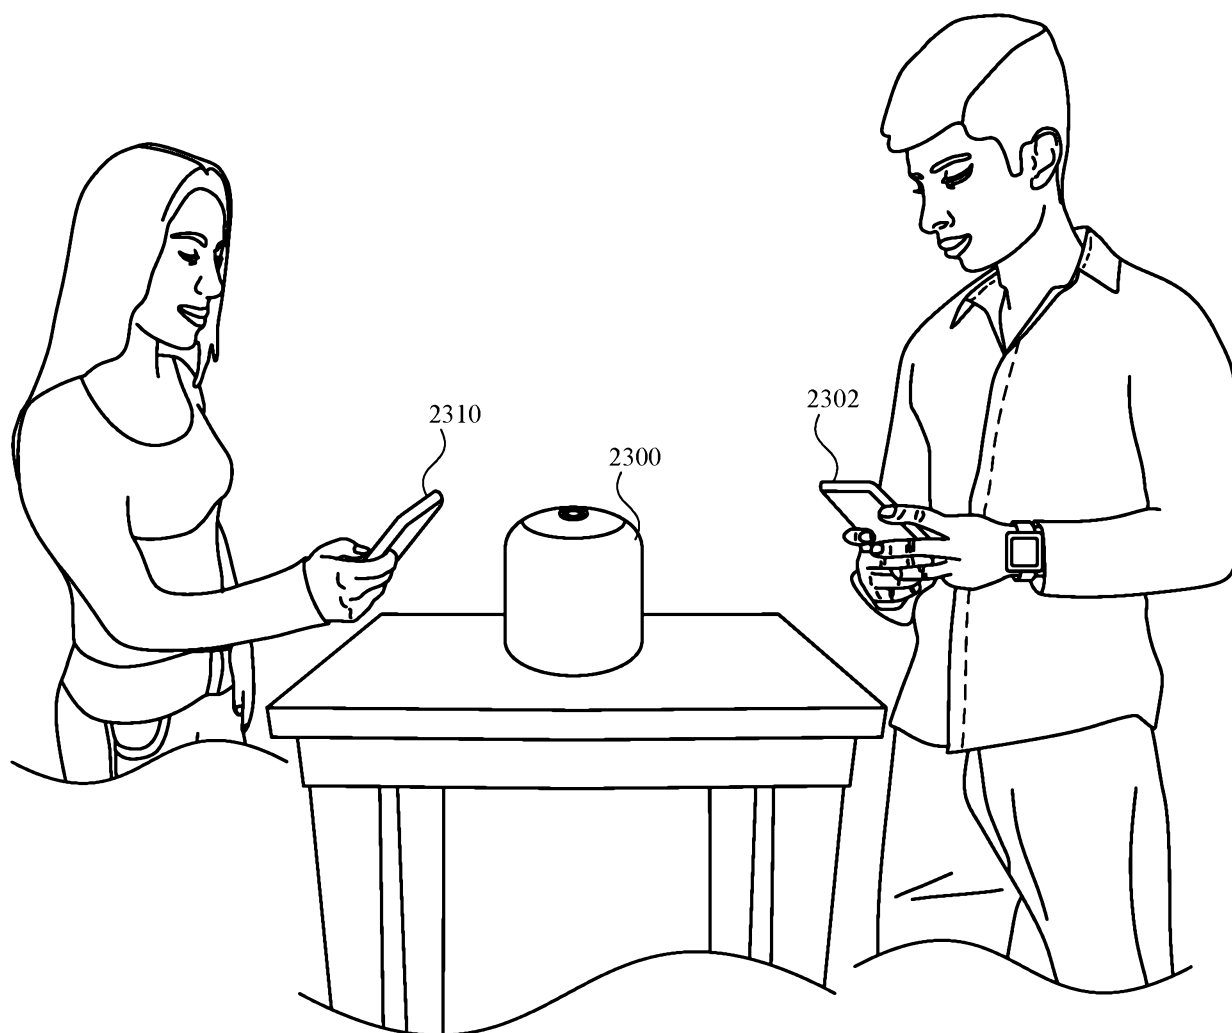
**FIG. 21F**

**FIG. 21G**

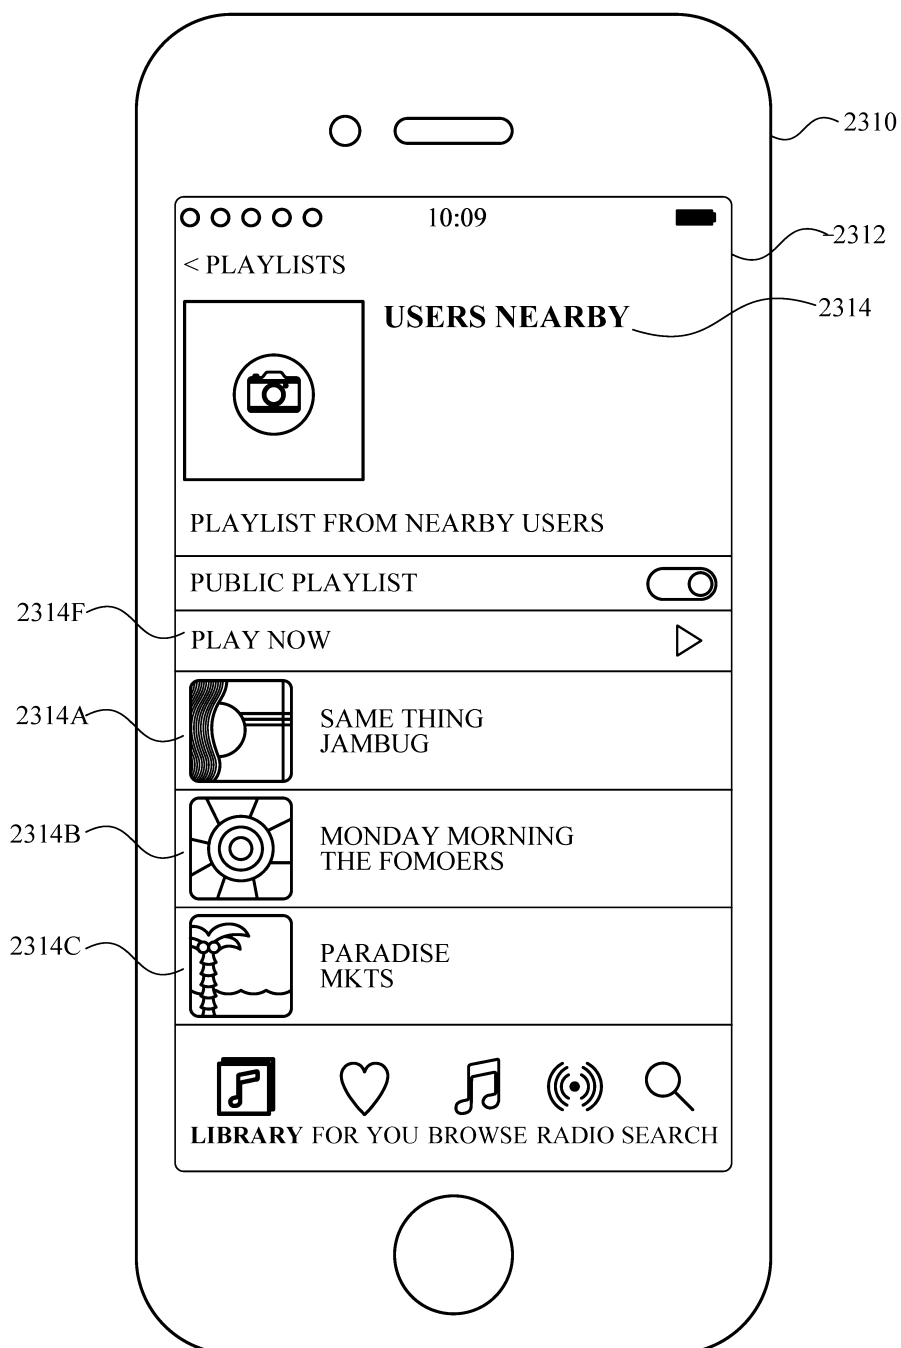
**FIG. 21H**

**FIG. 211**

2200 **FIG. 22**

**FIG. 23A**



**FIG. 23B**

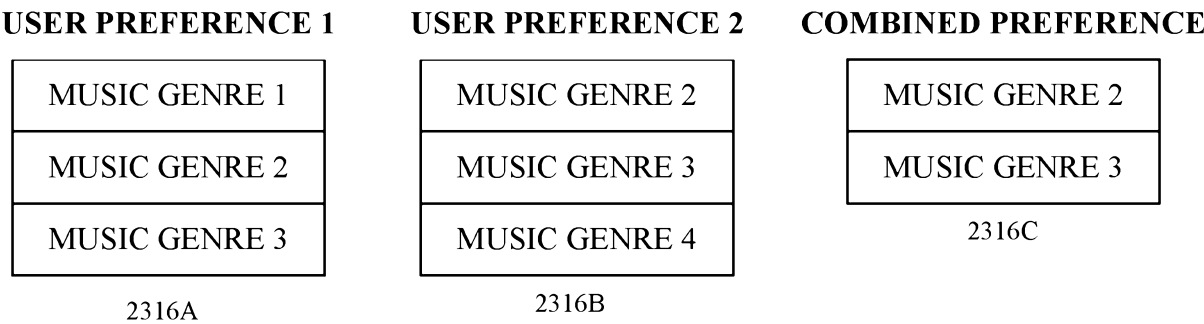


FIG. 23C

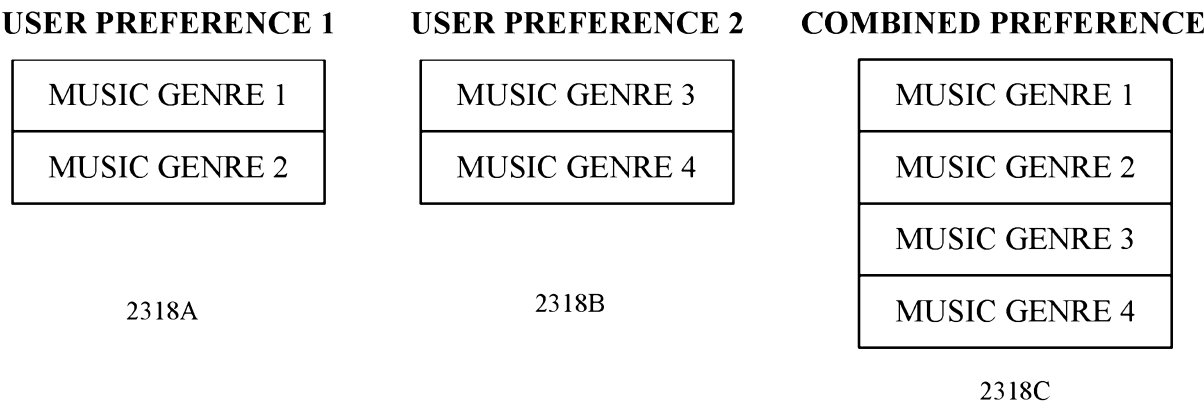
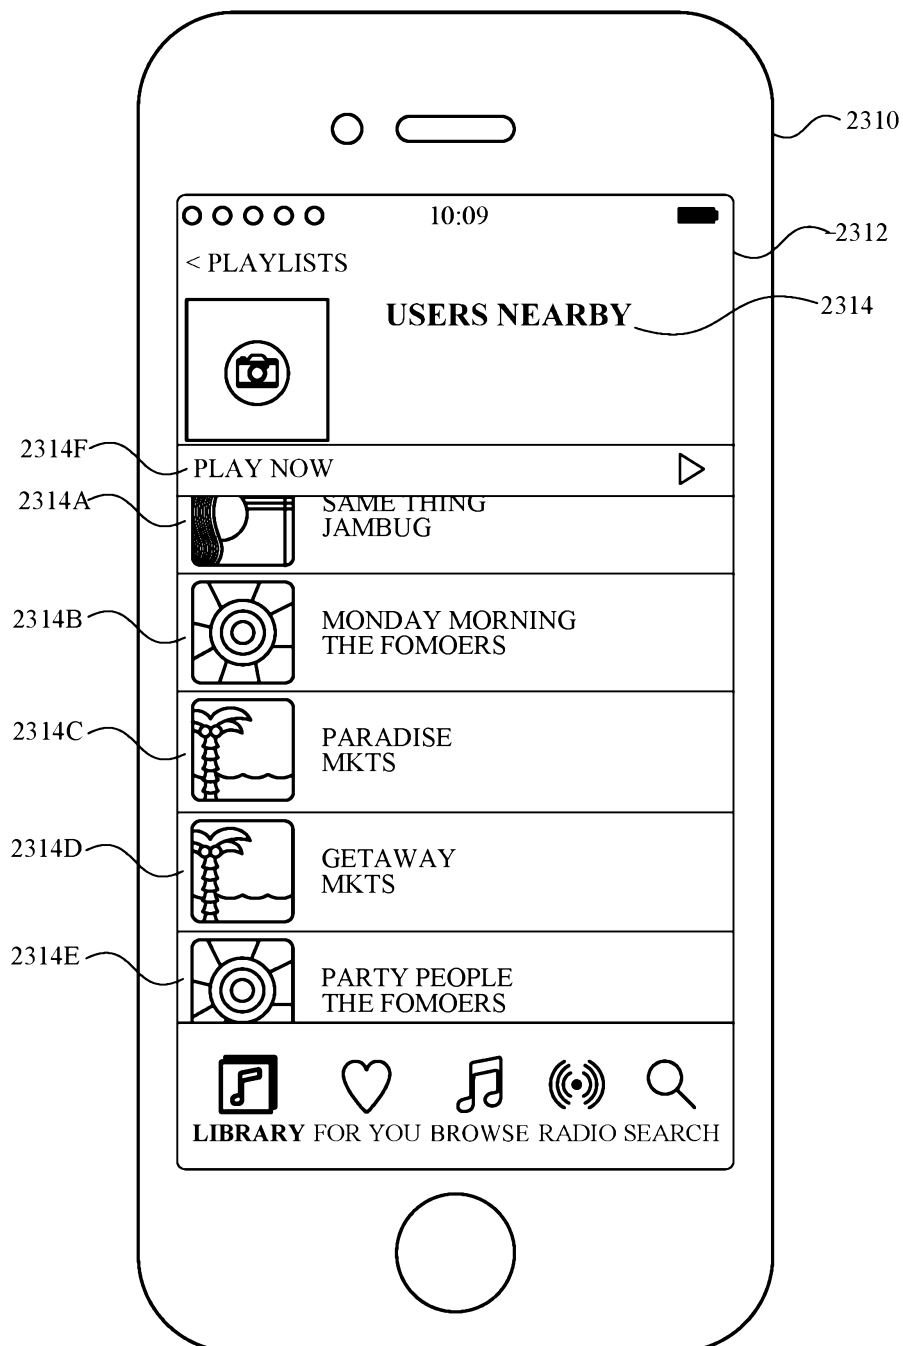
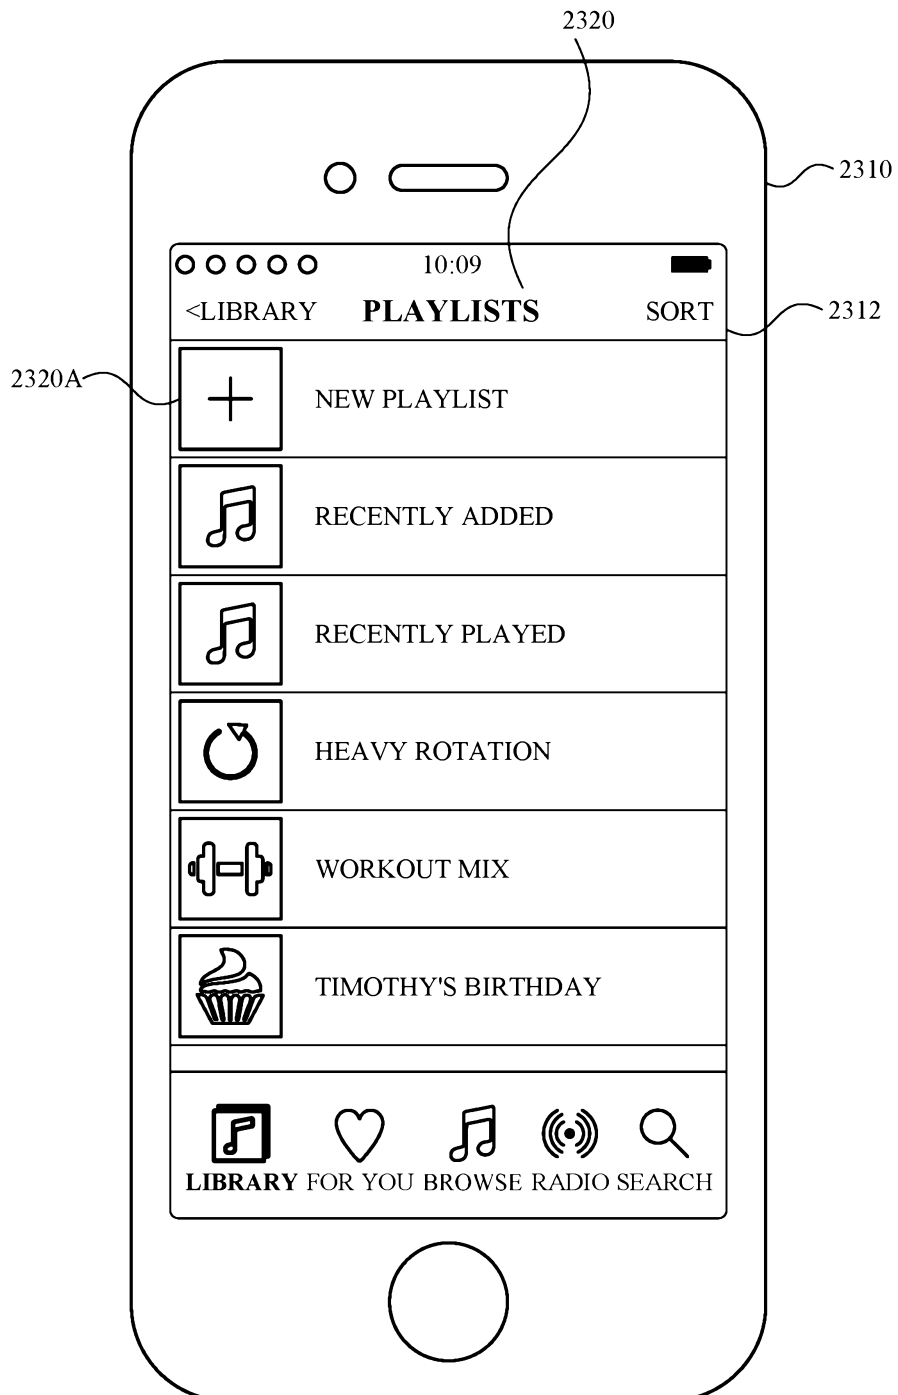
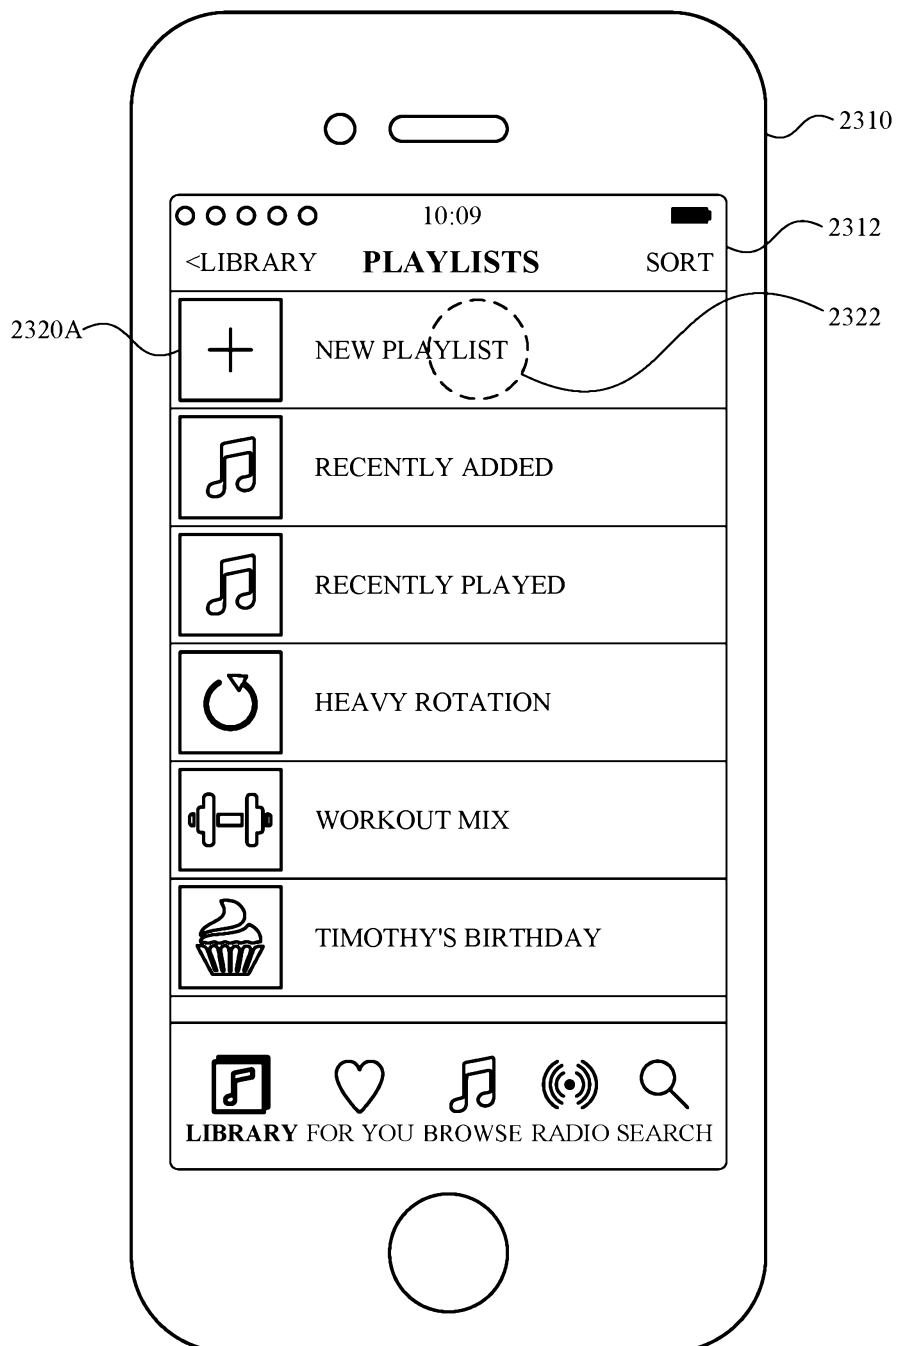
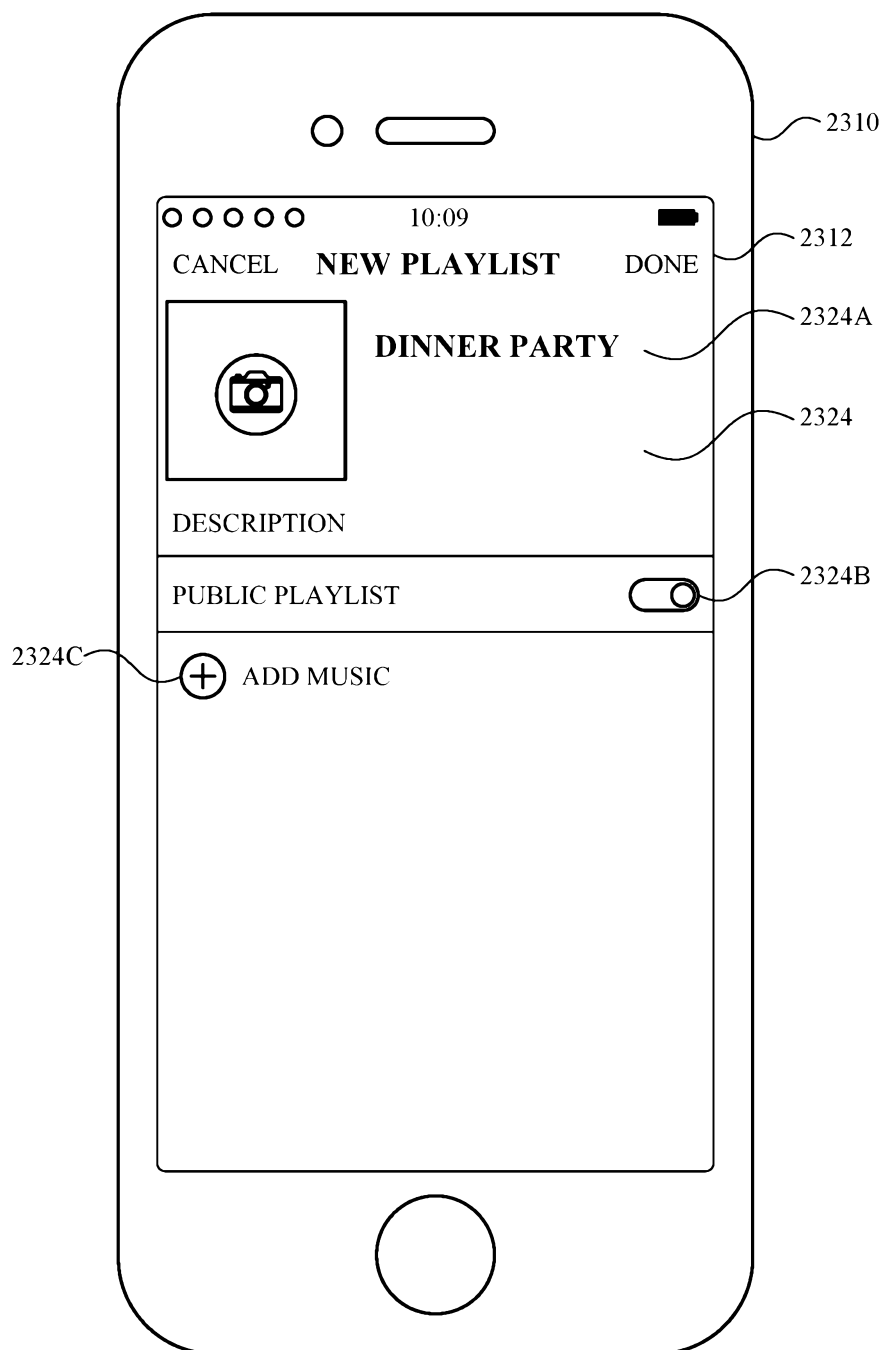


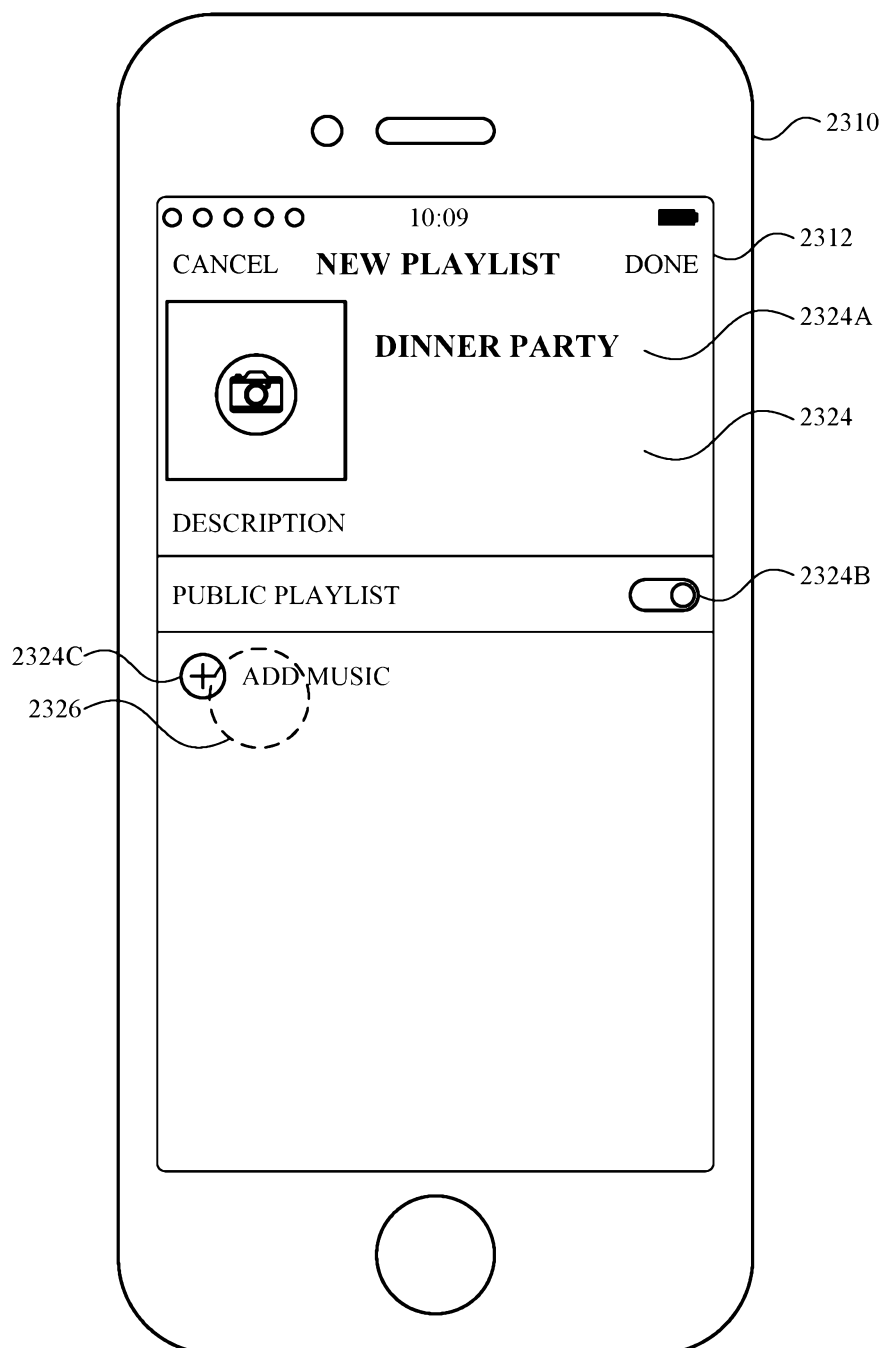
FIG. 23D

**FIG. 23E**

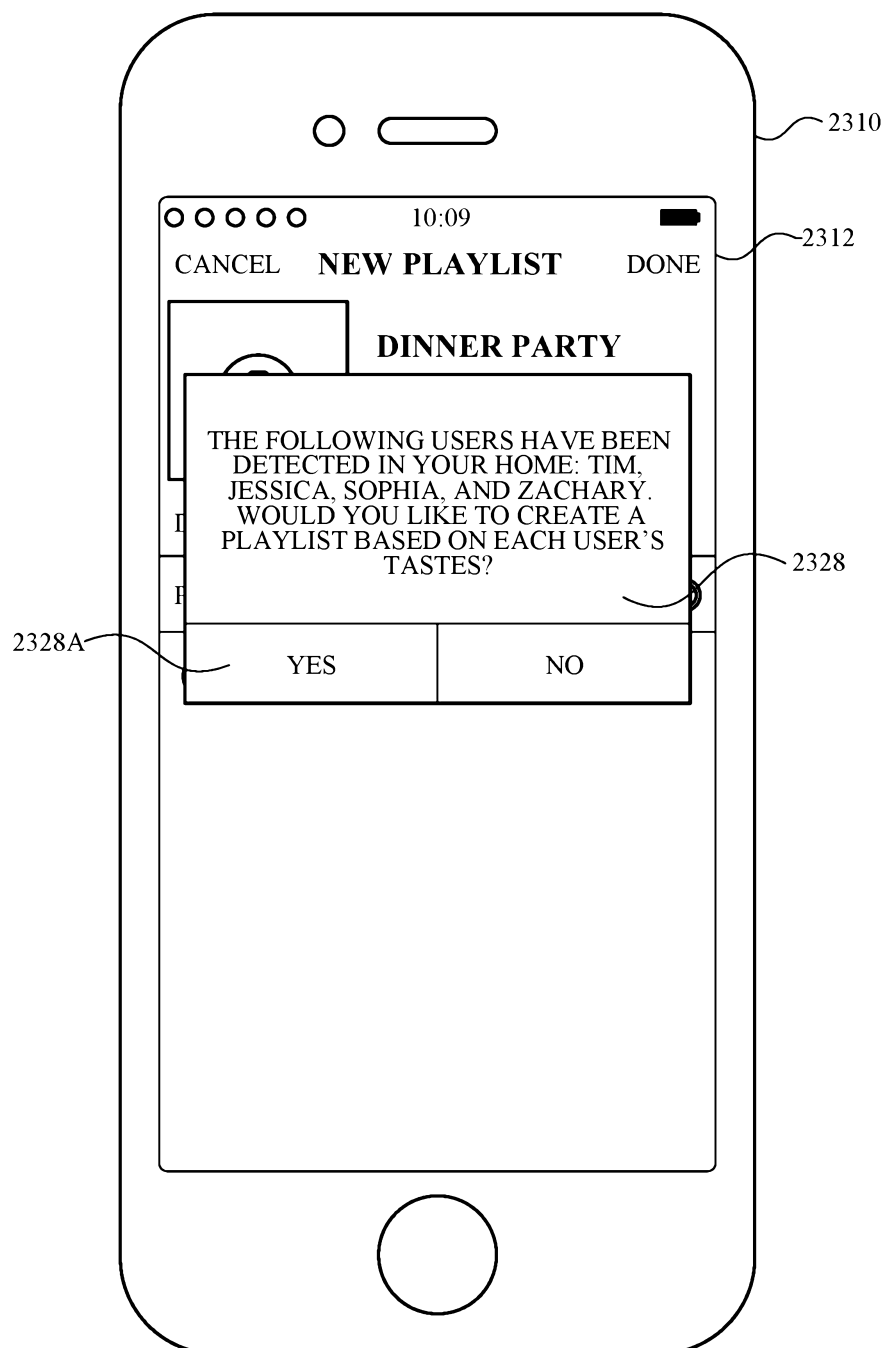
**FIG. 23F**

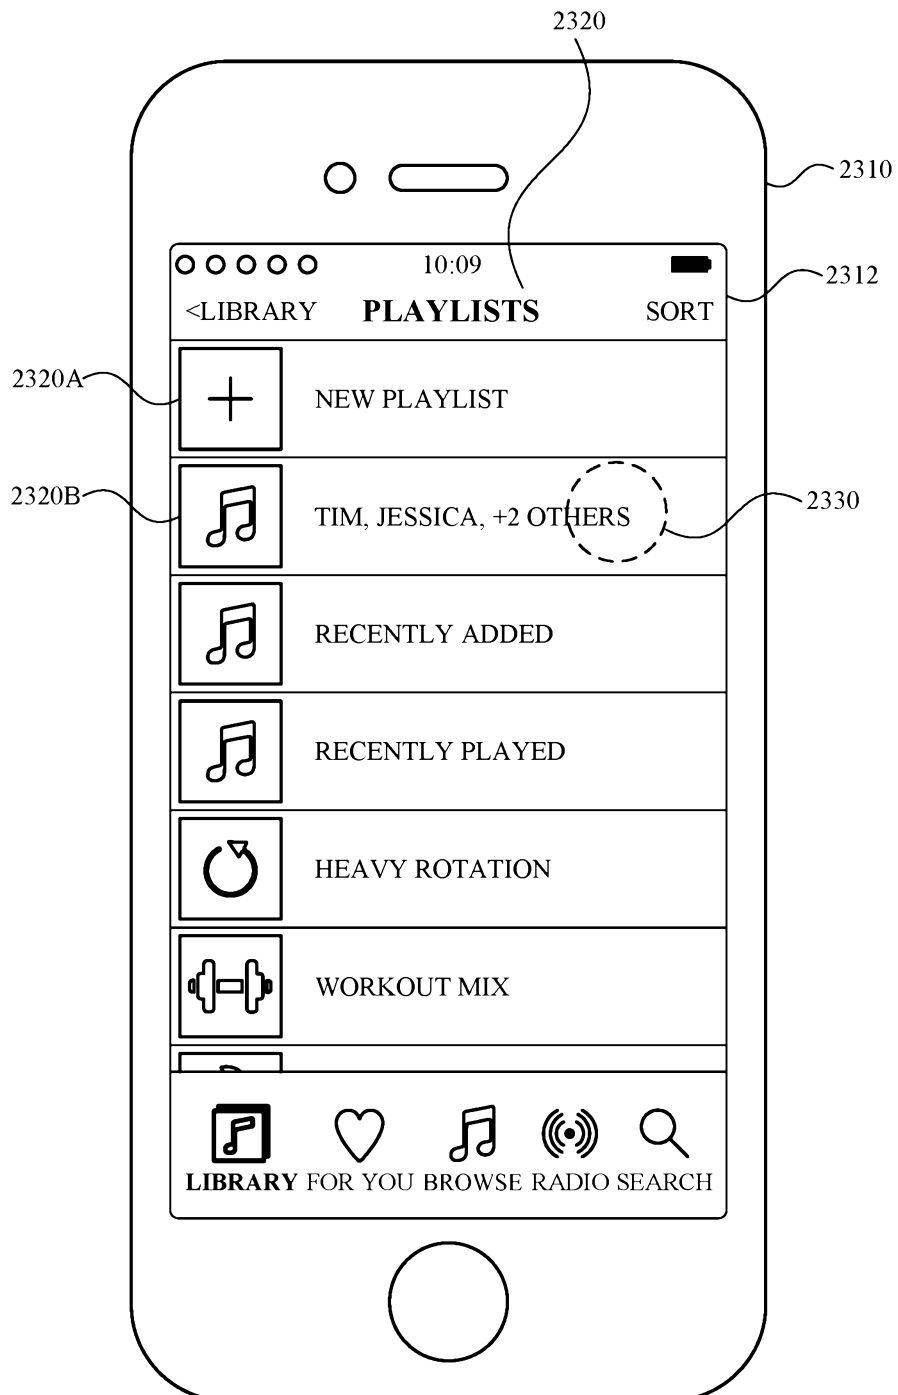
**FIG. 23G**

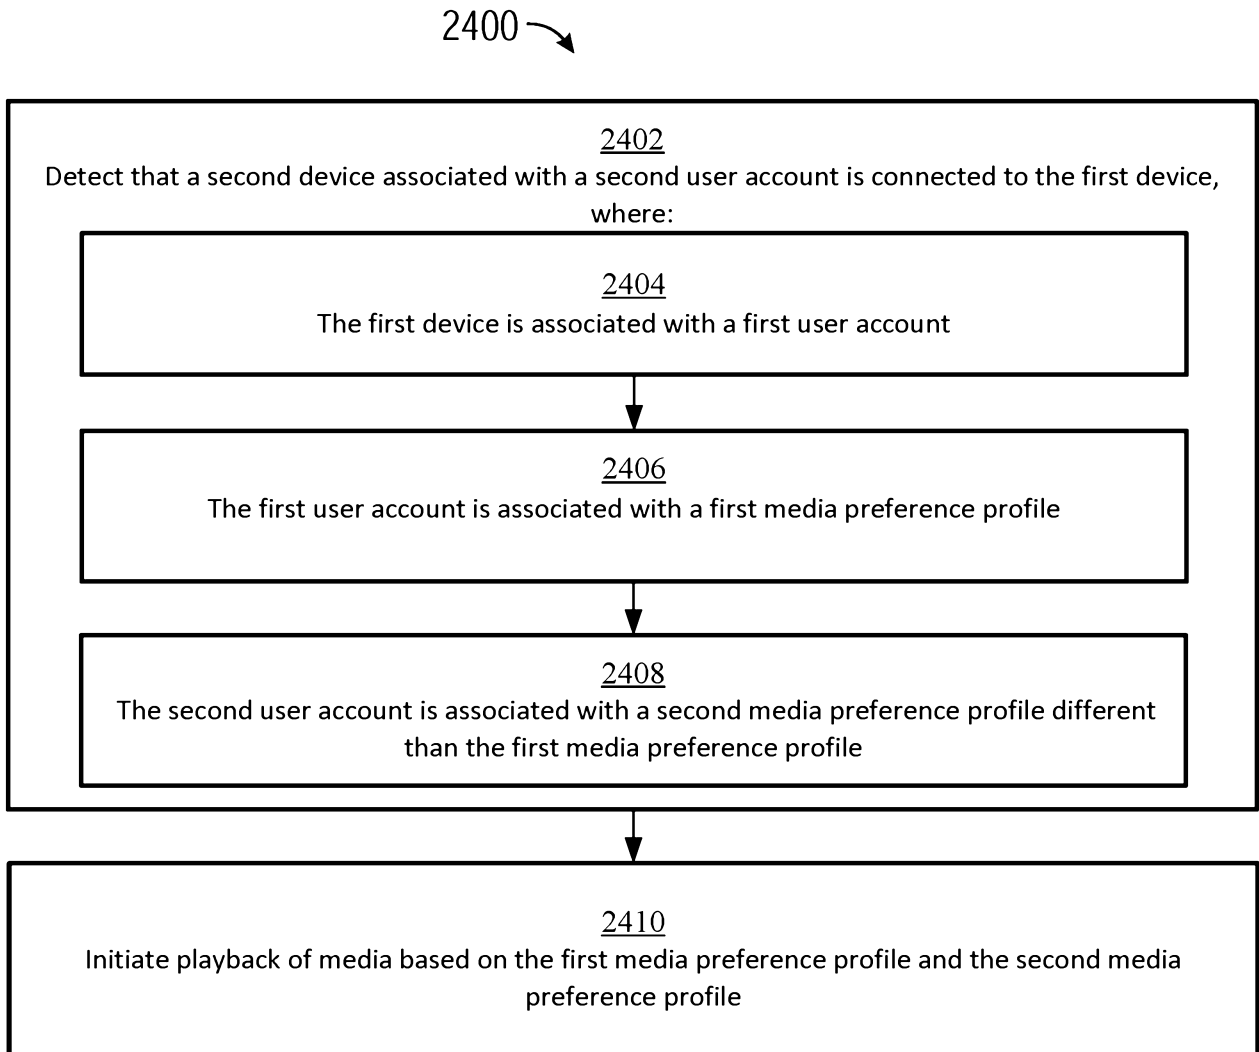
**FIG. 23H**

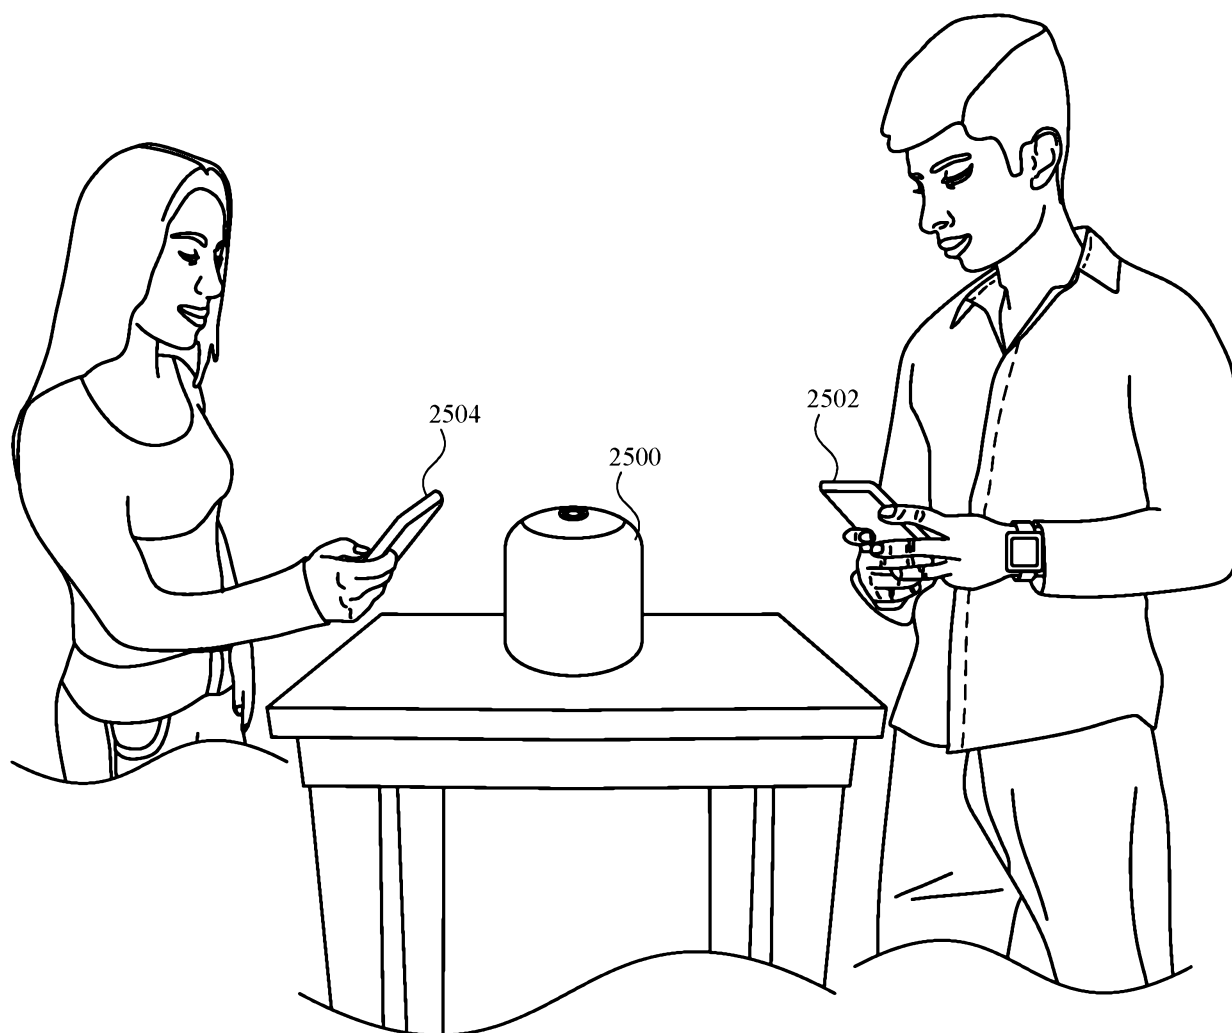
**FIG. 23I**

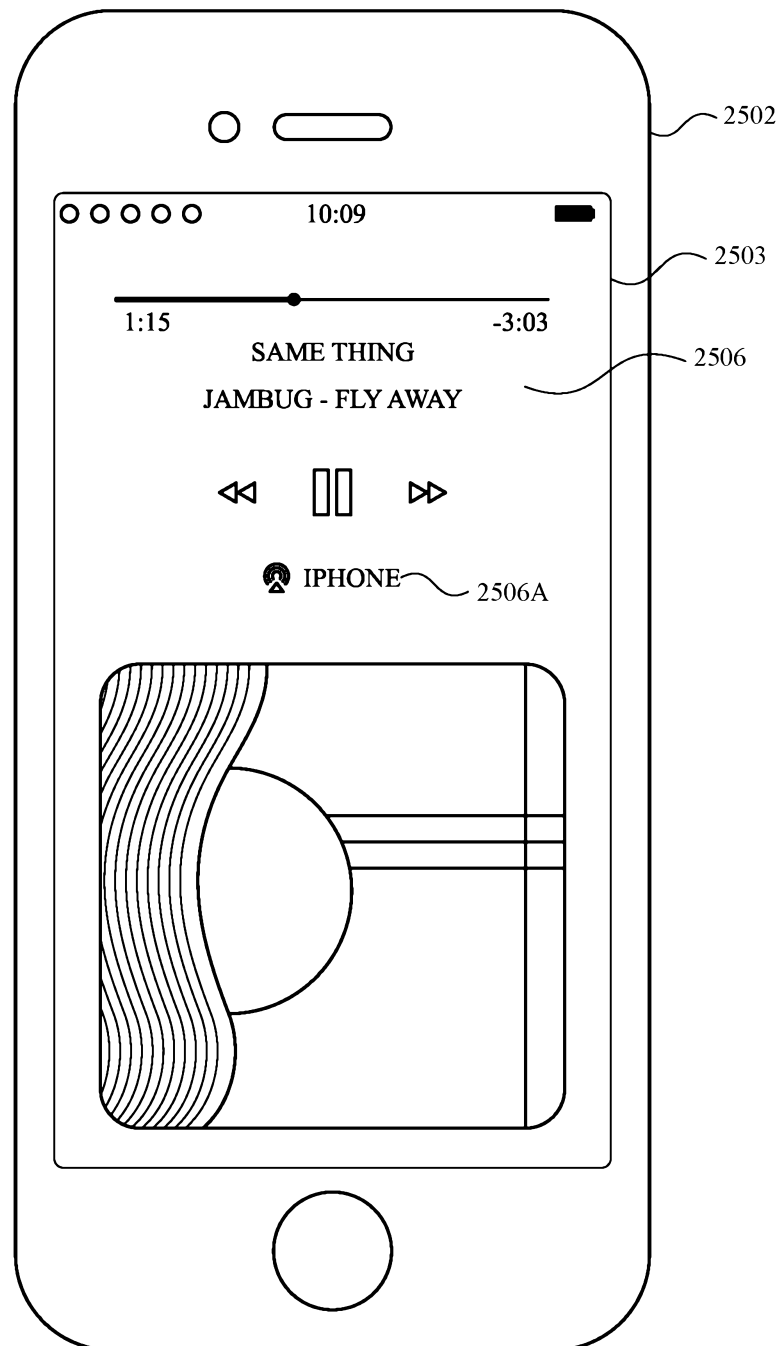


**FIG. 23J**

**FIG. 23K**

**FIG. 24**

**FIG. 25A**

**FIG. 25B**

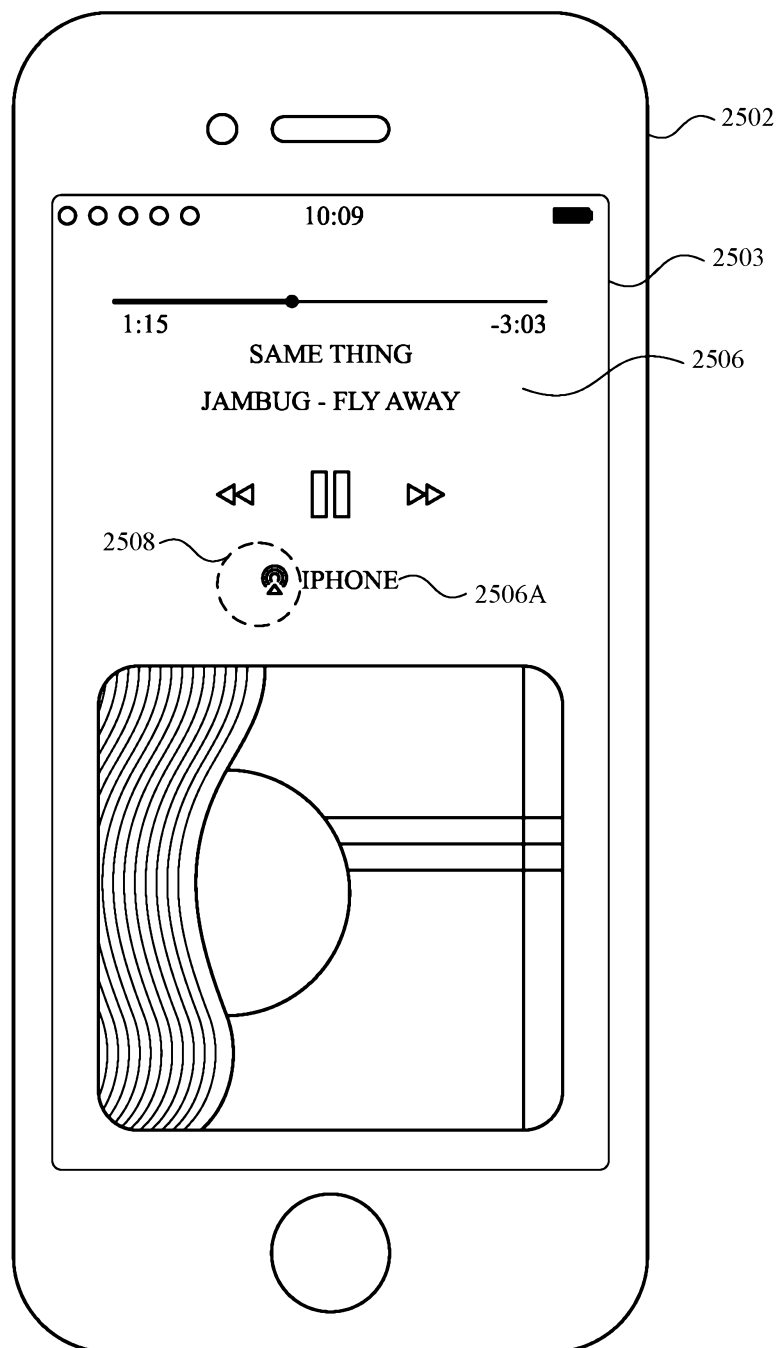


FIG. 25C

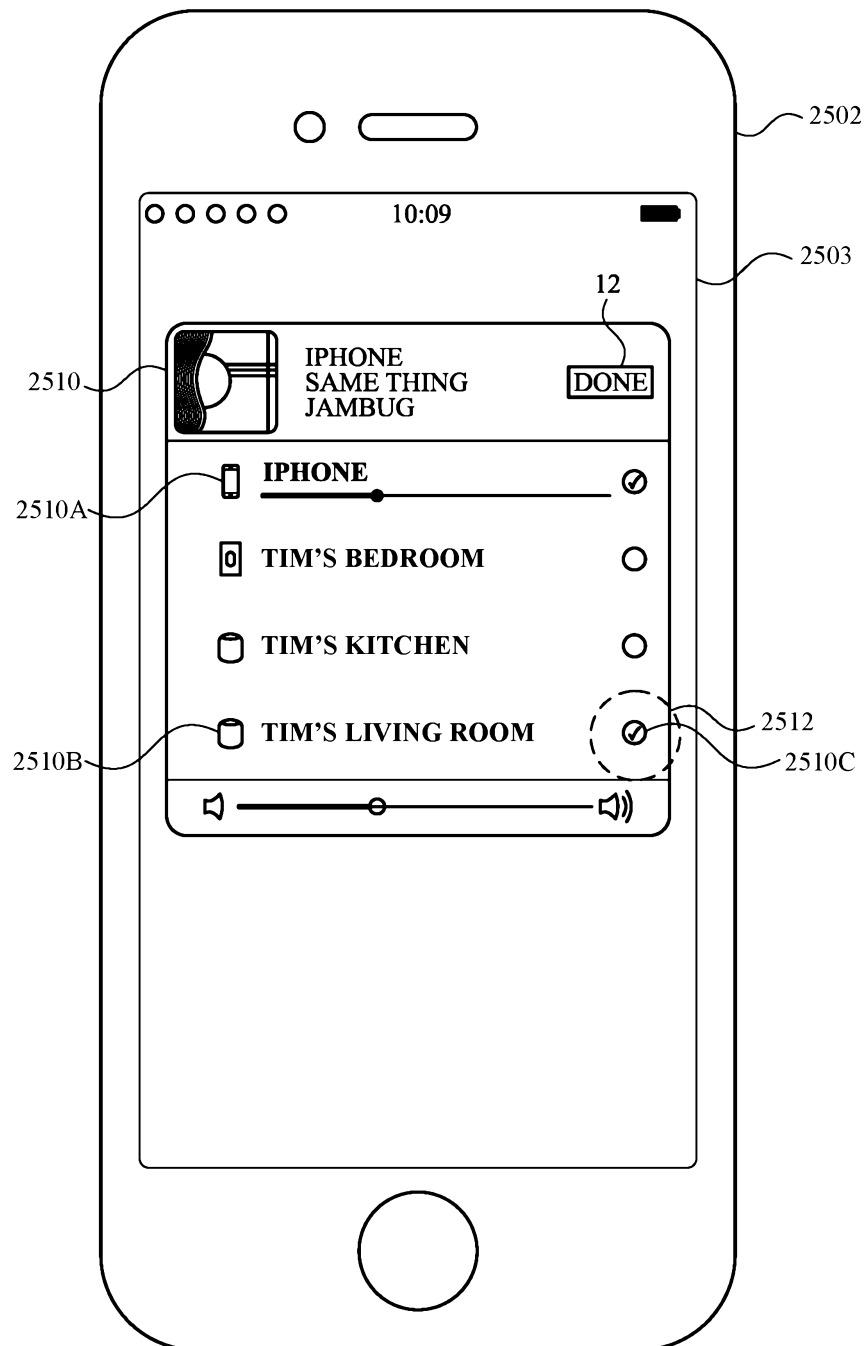
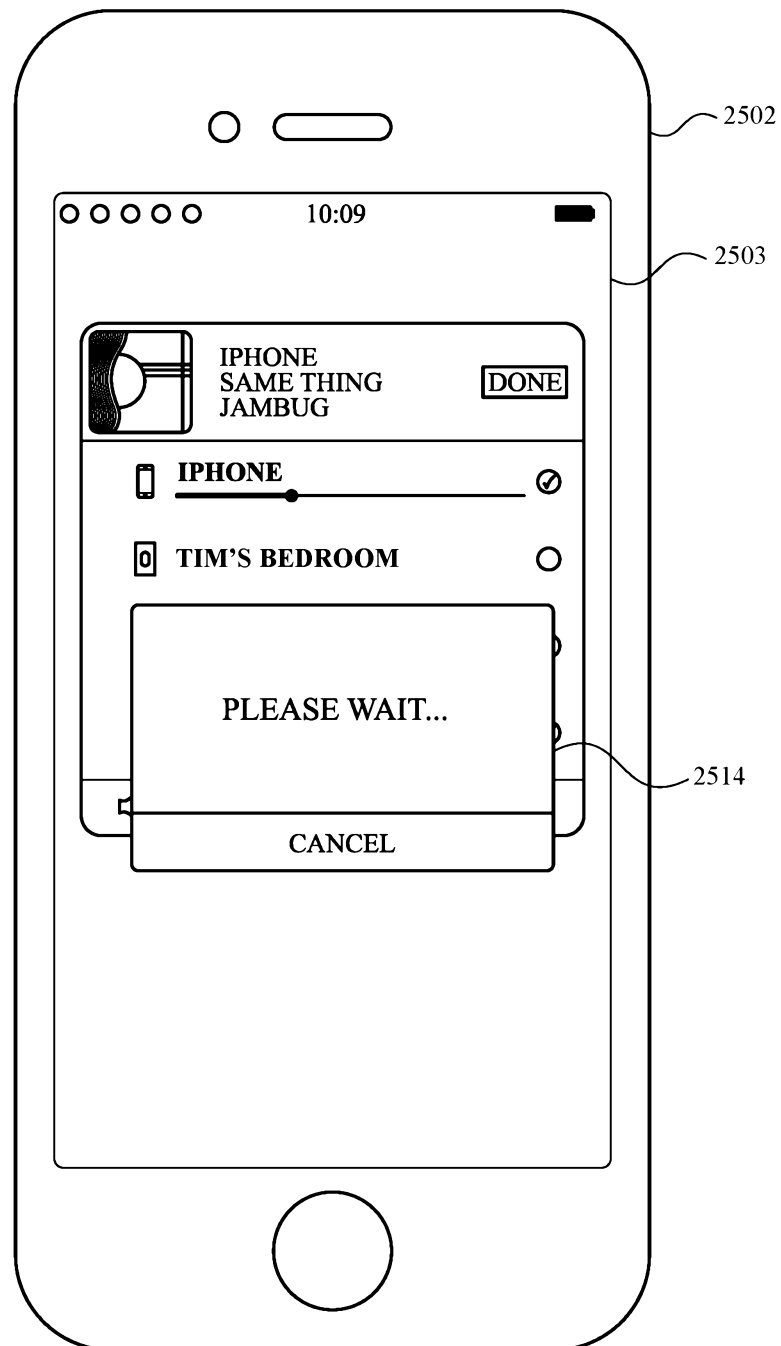
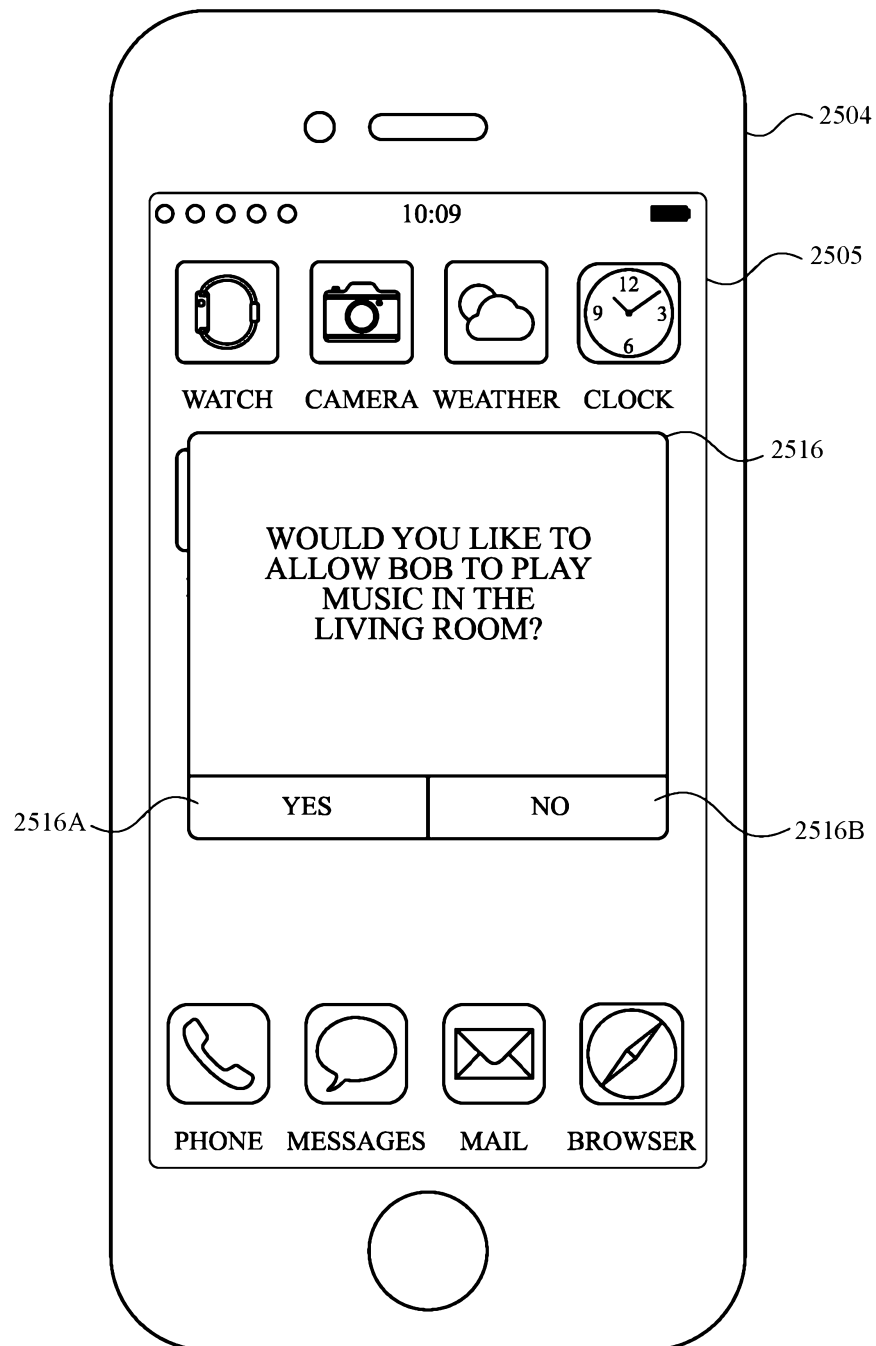
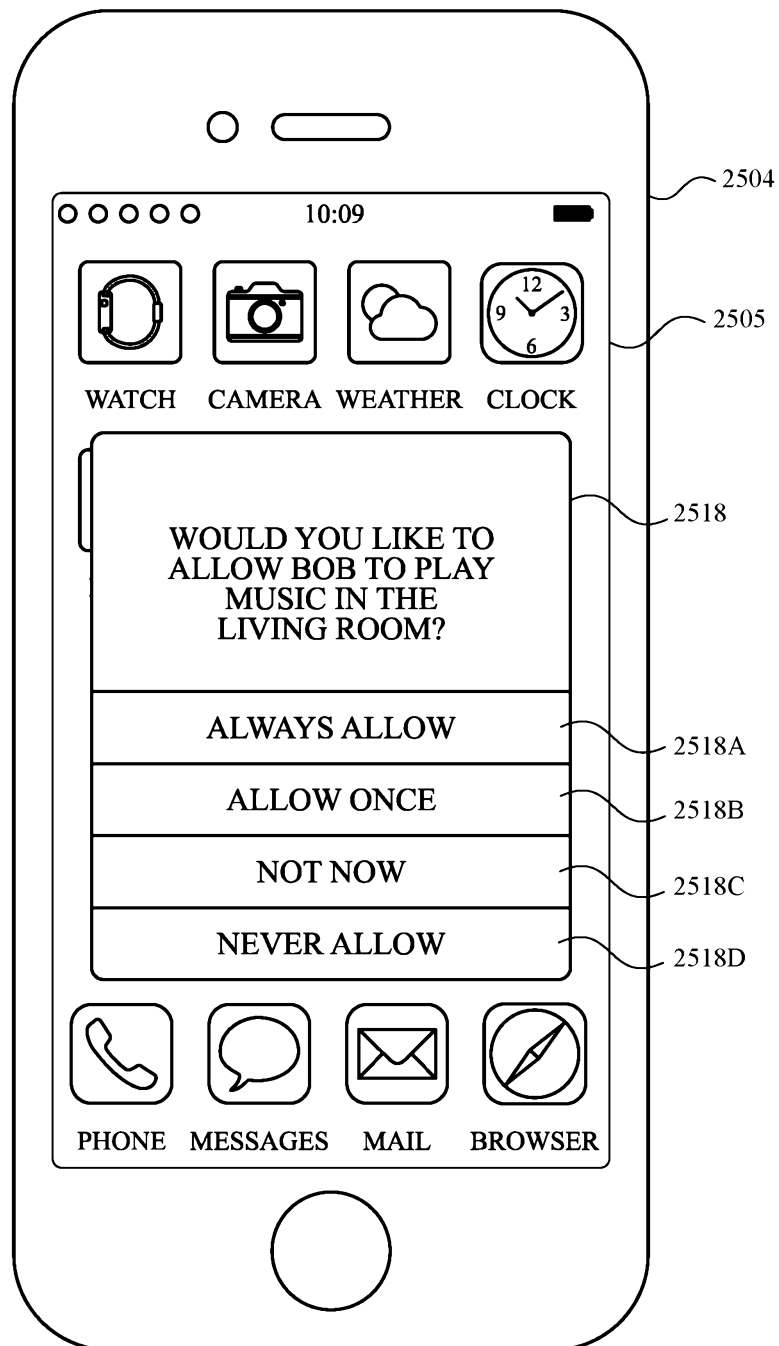


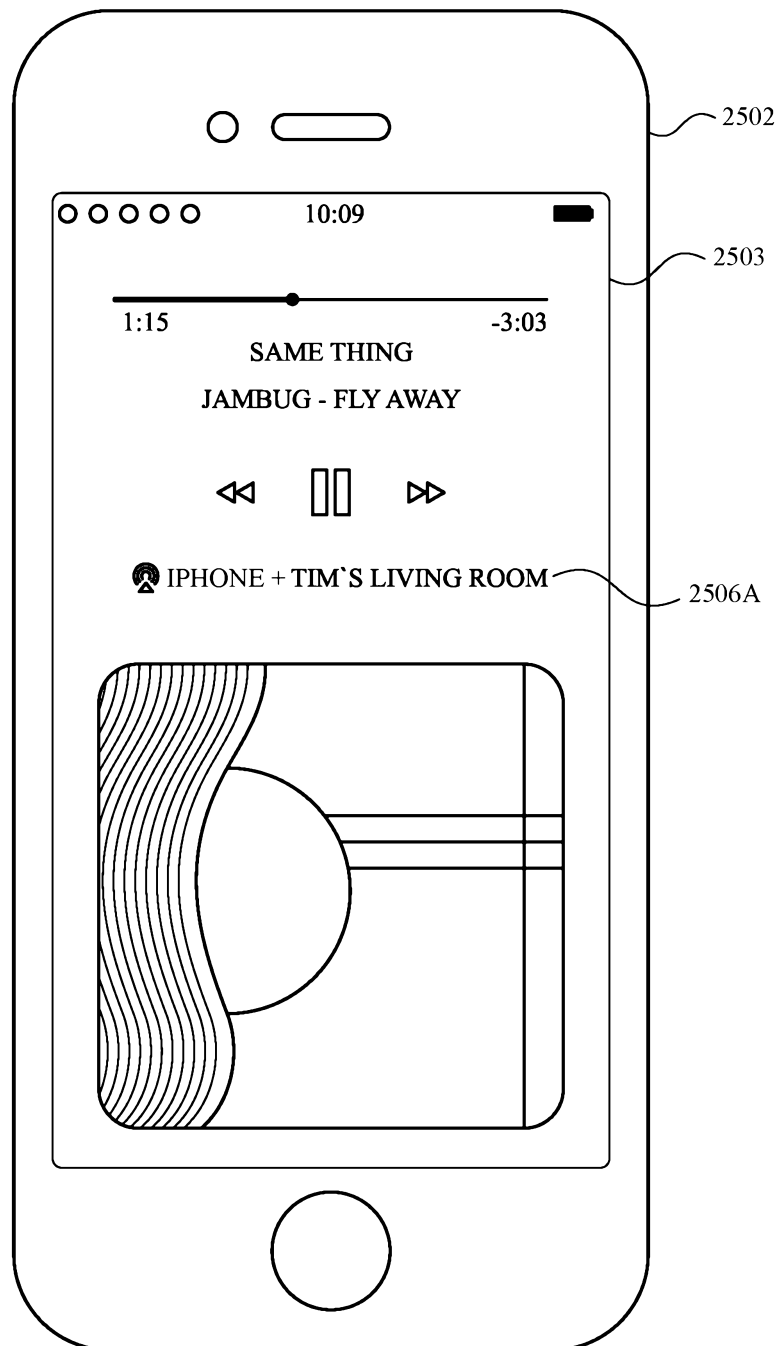
FIG. 25D

*FIG. 25E*



**FIG. 25F**

**FIG. 25G**

**FIG. 25H**

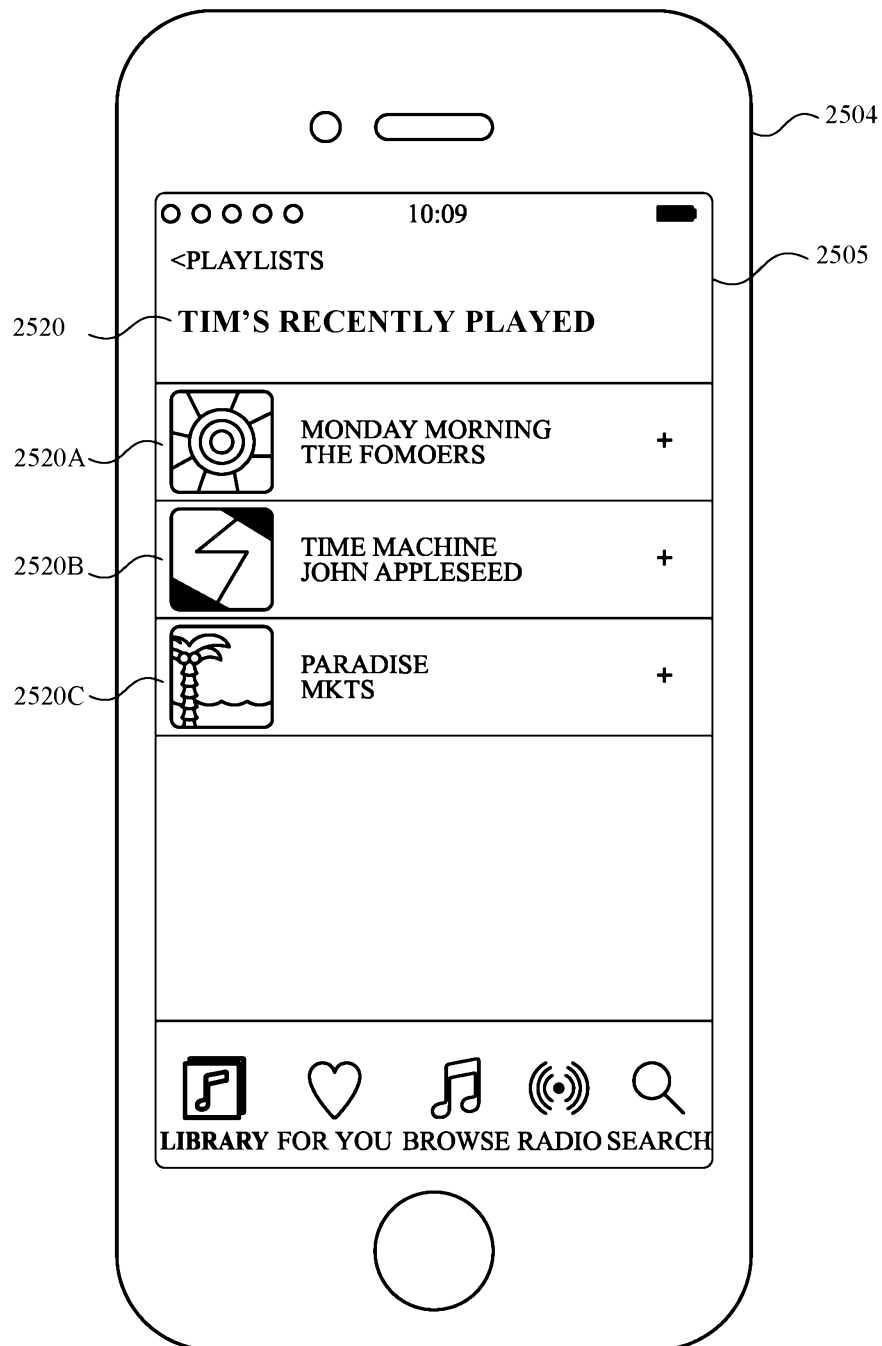


FIG. 25I

2600 →

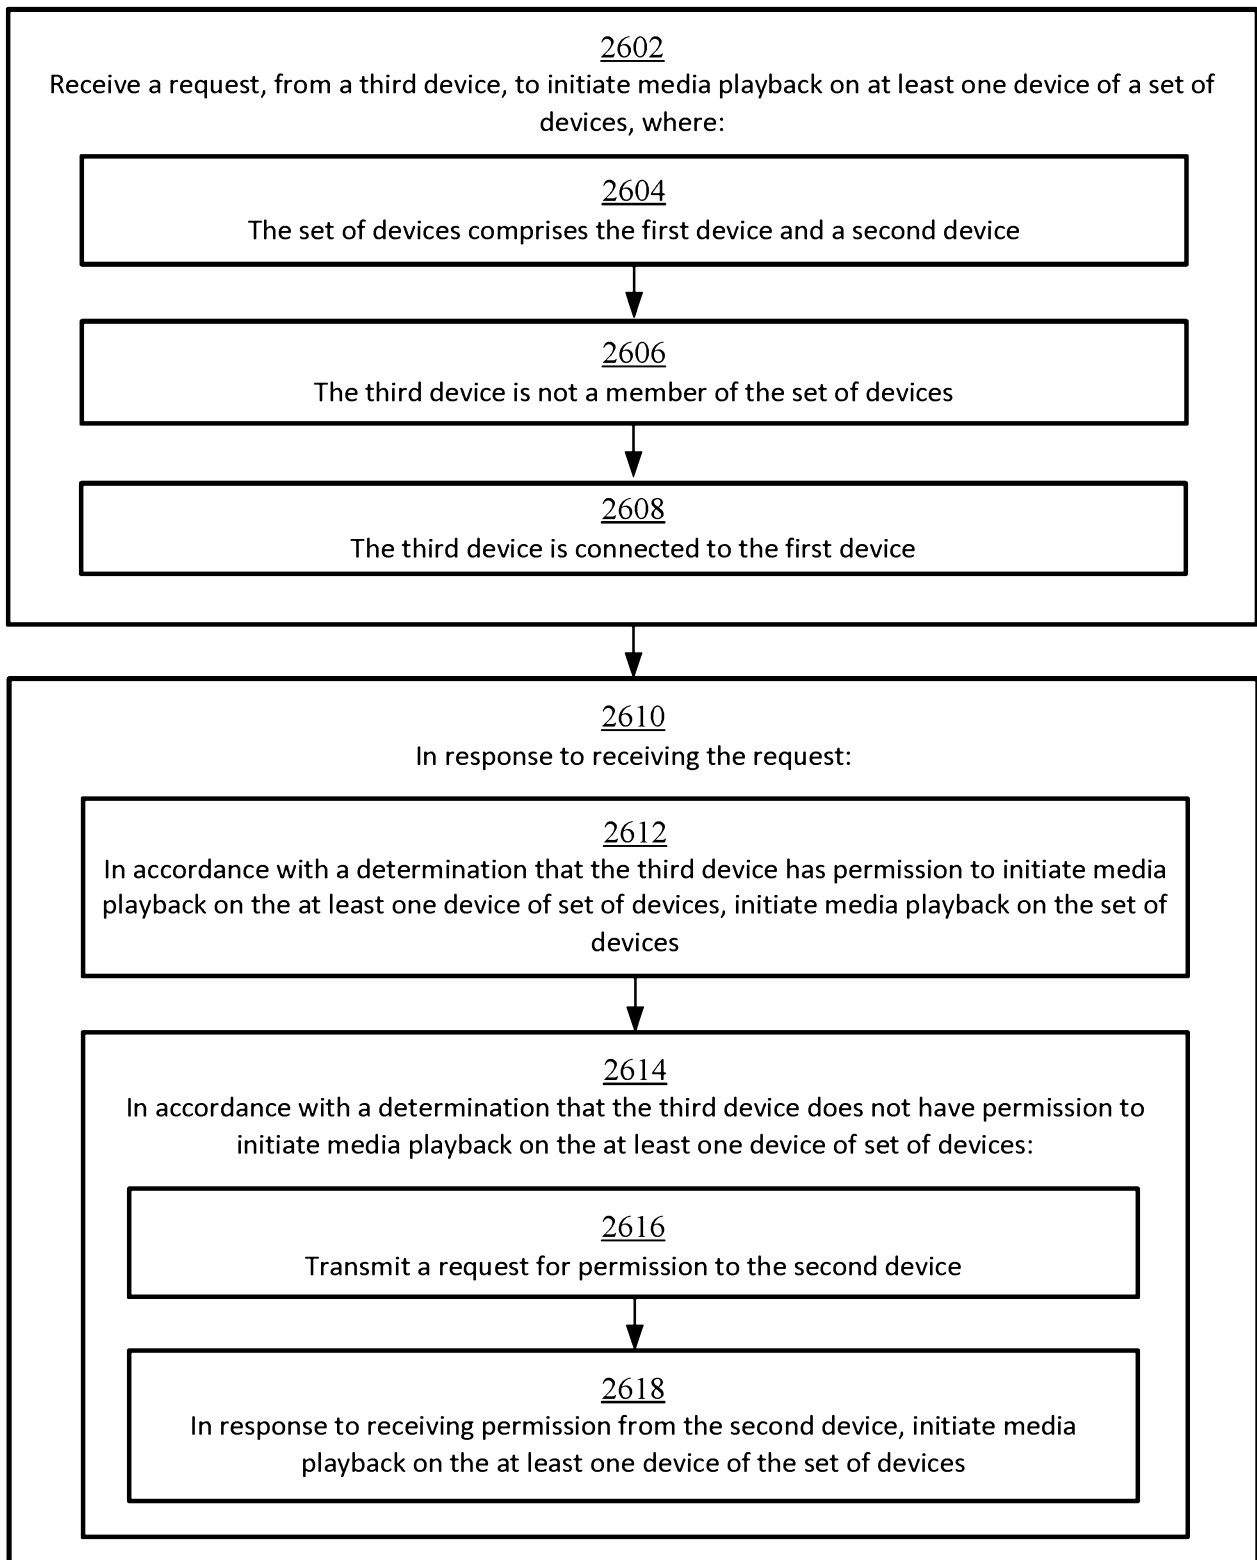
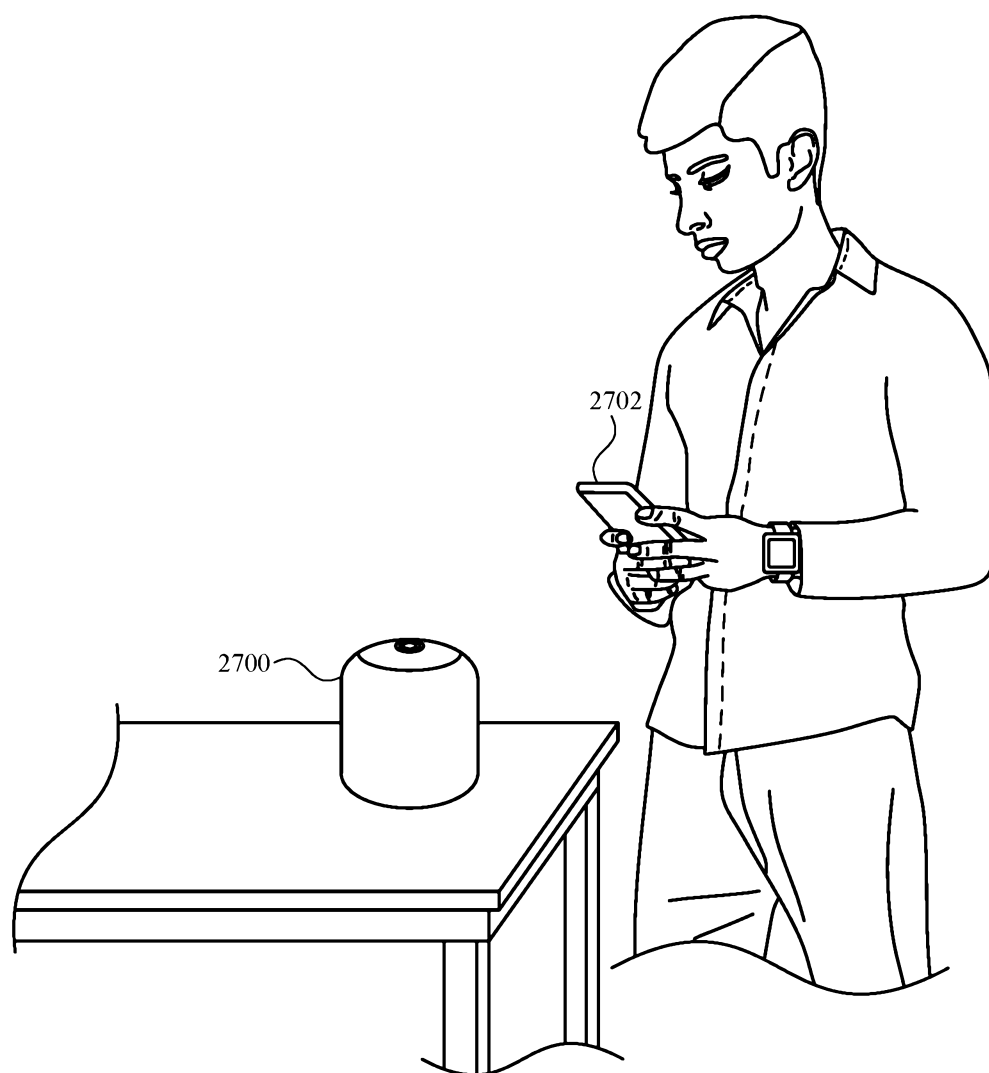
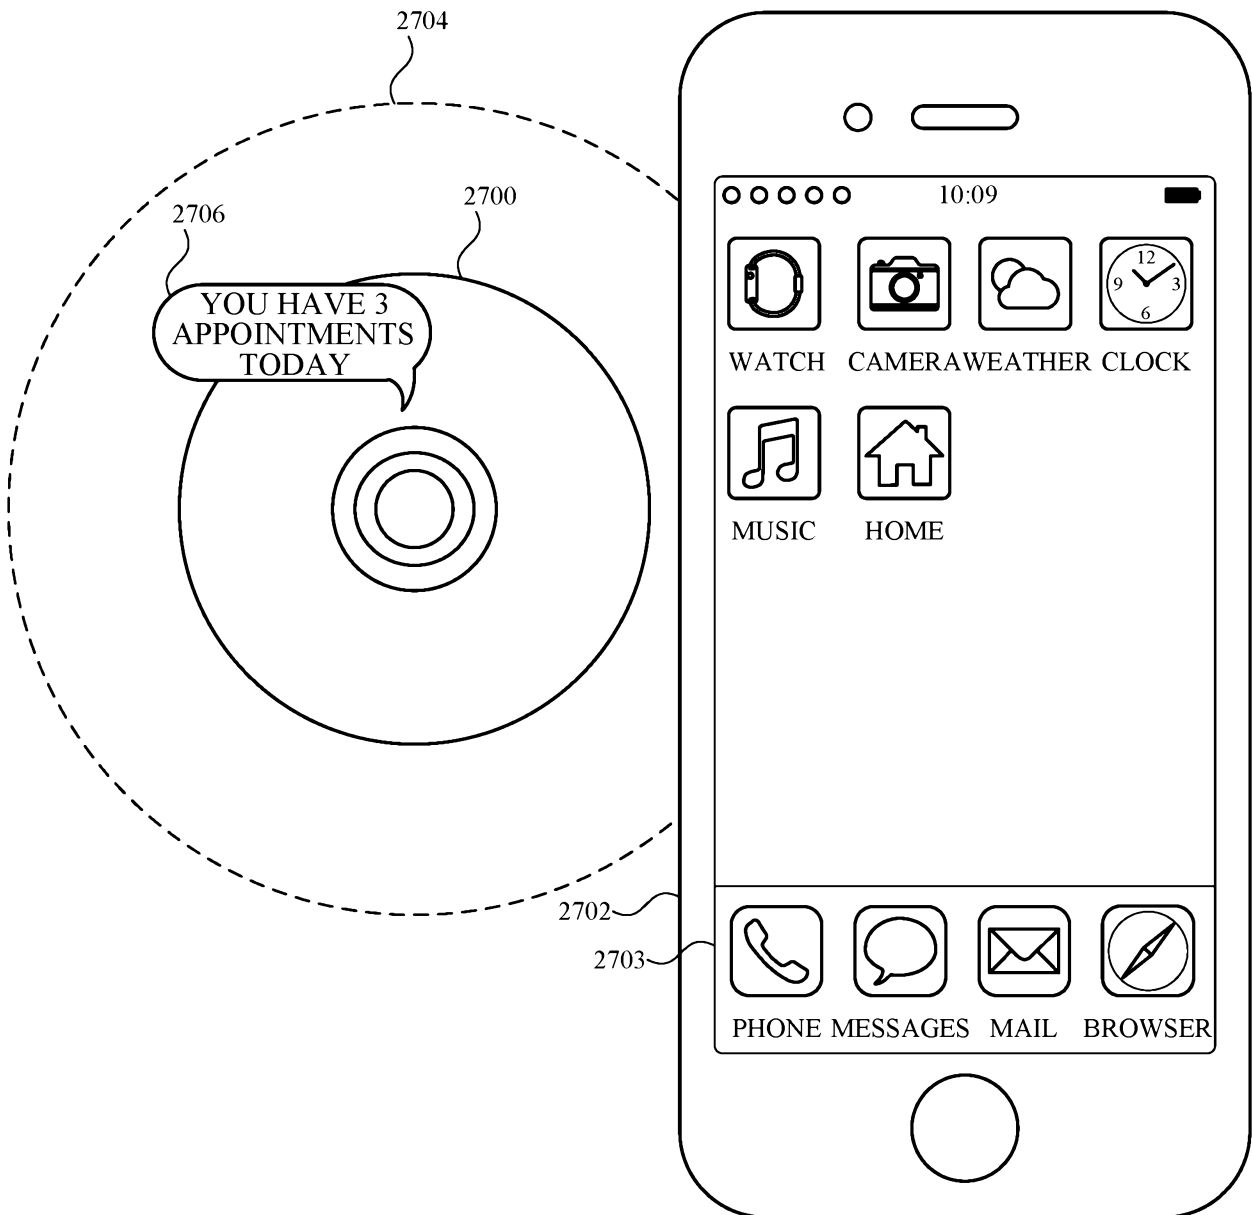


FIG. 26

**FIG. 27A**

**FIG. 27B**

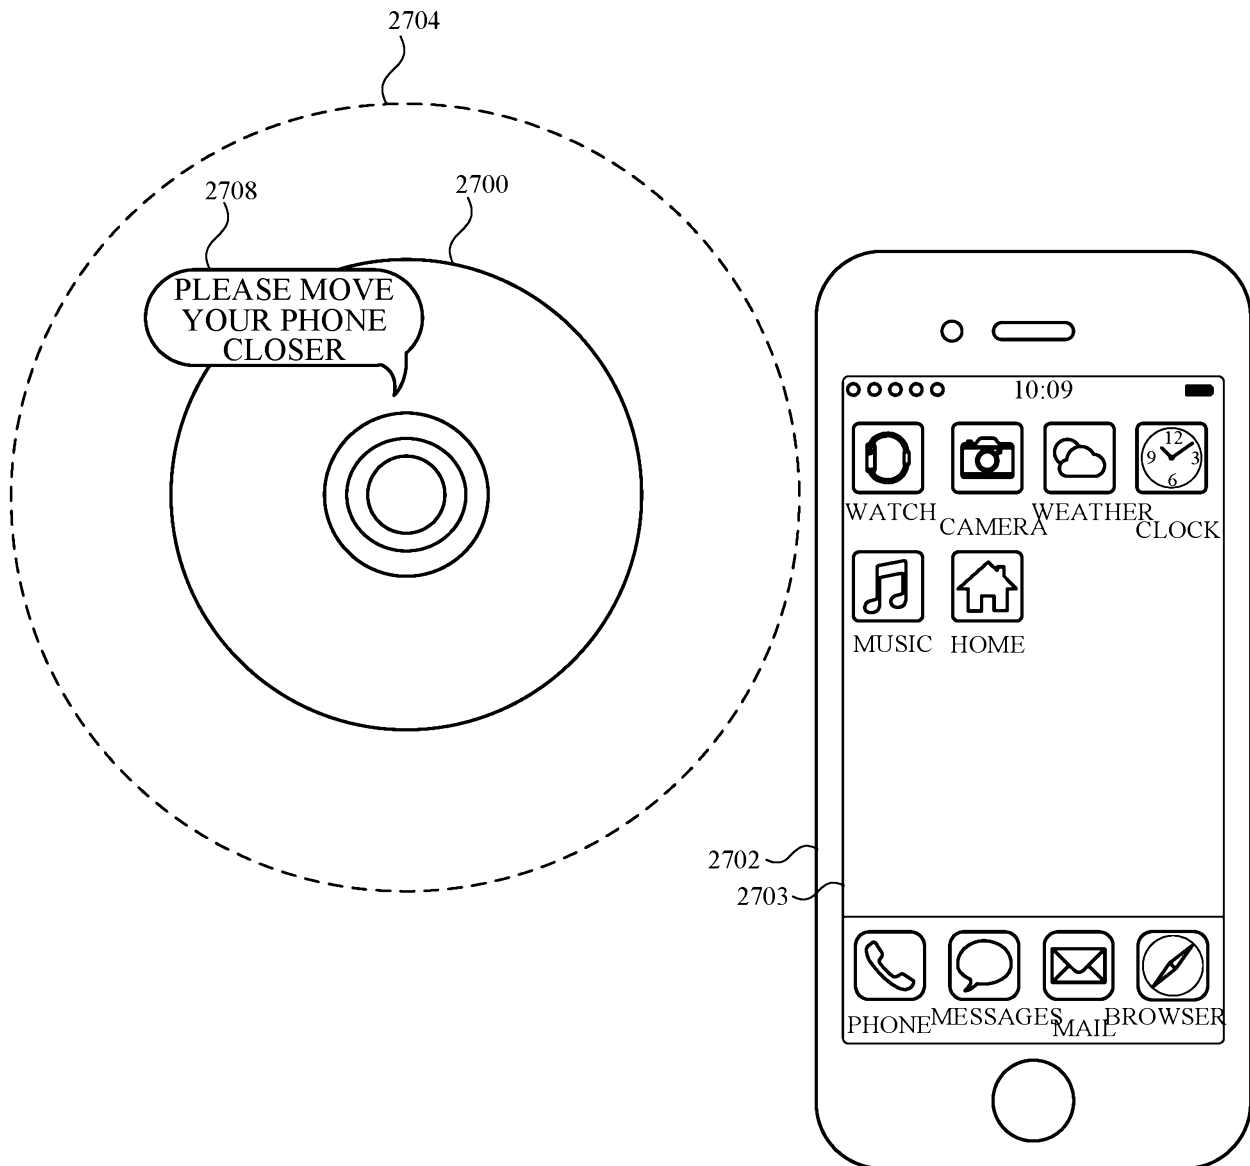
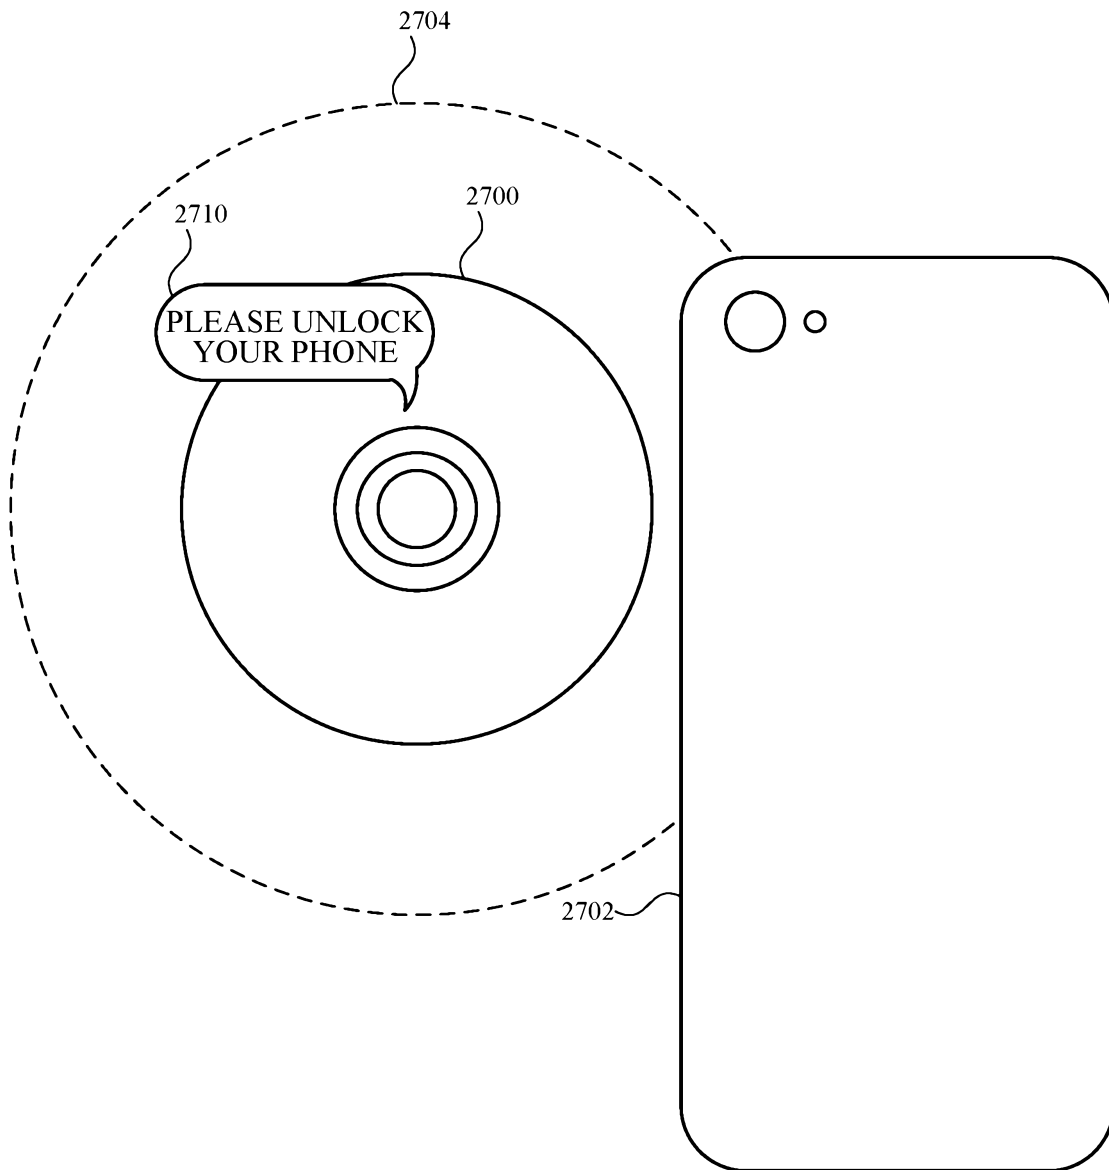
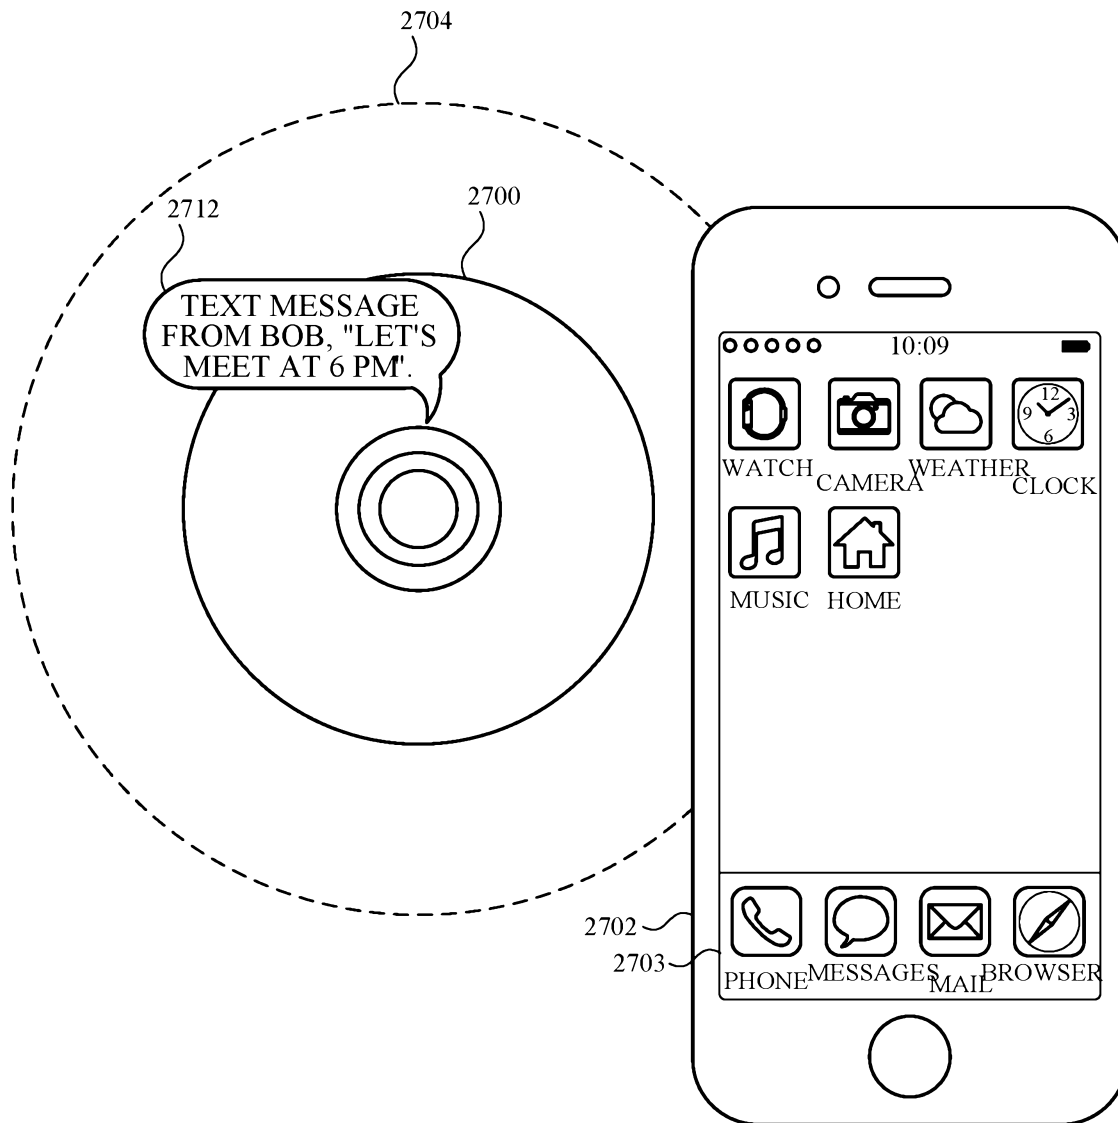


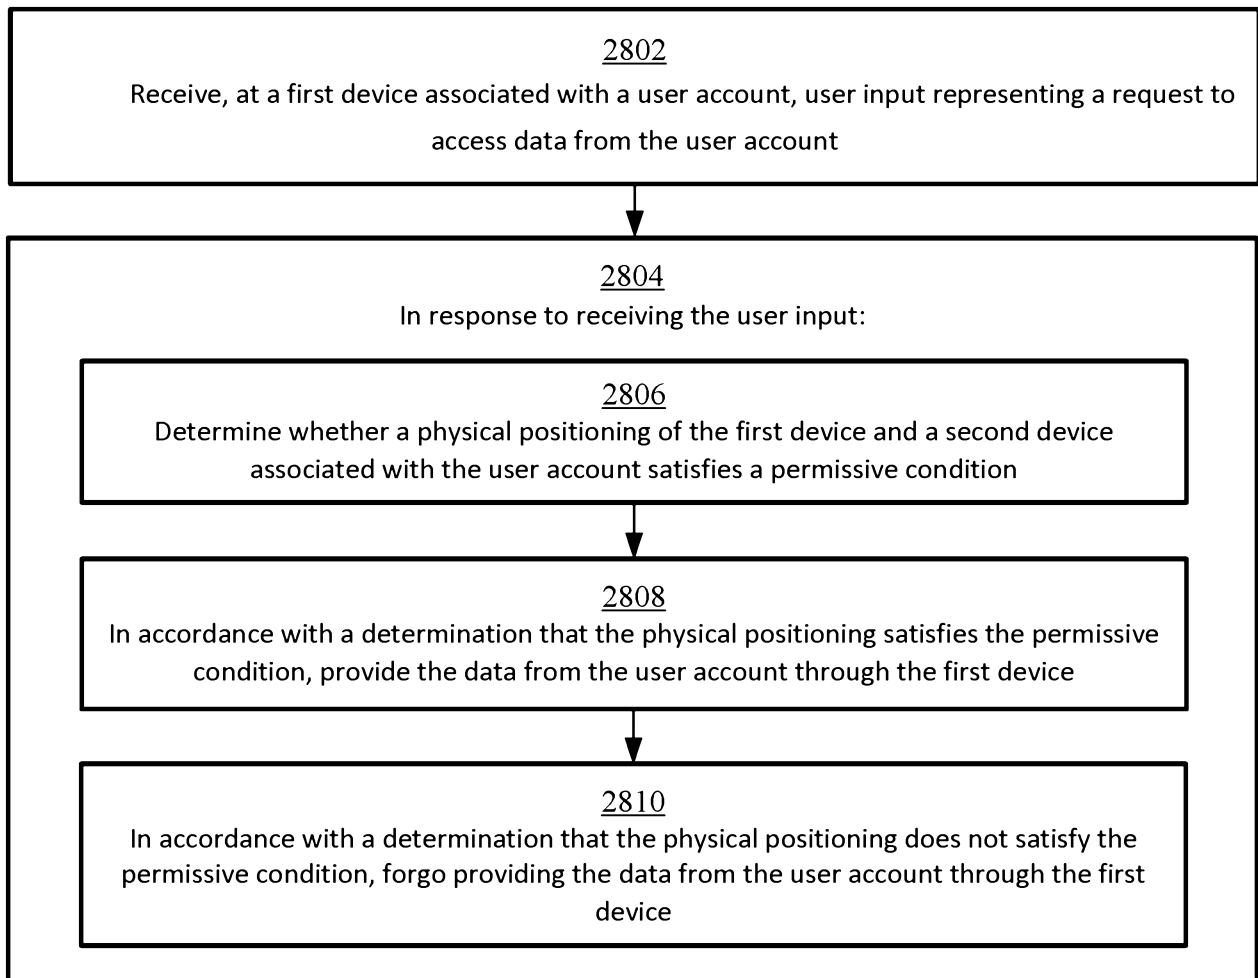
FIG. 27C



**FIG. 27D**

**FIG. 27E**

2800 →

**FIG. 28**

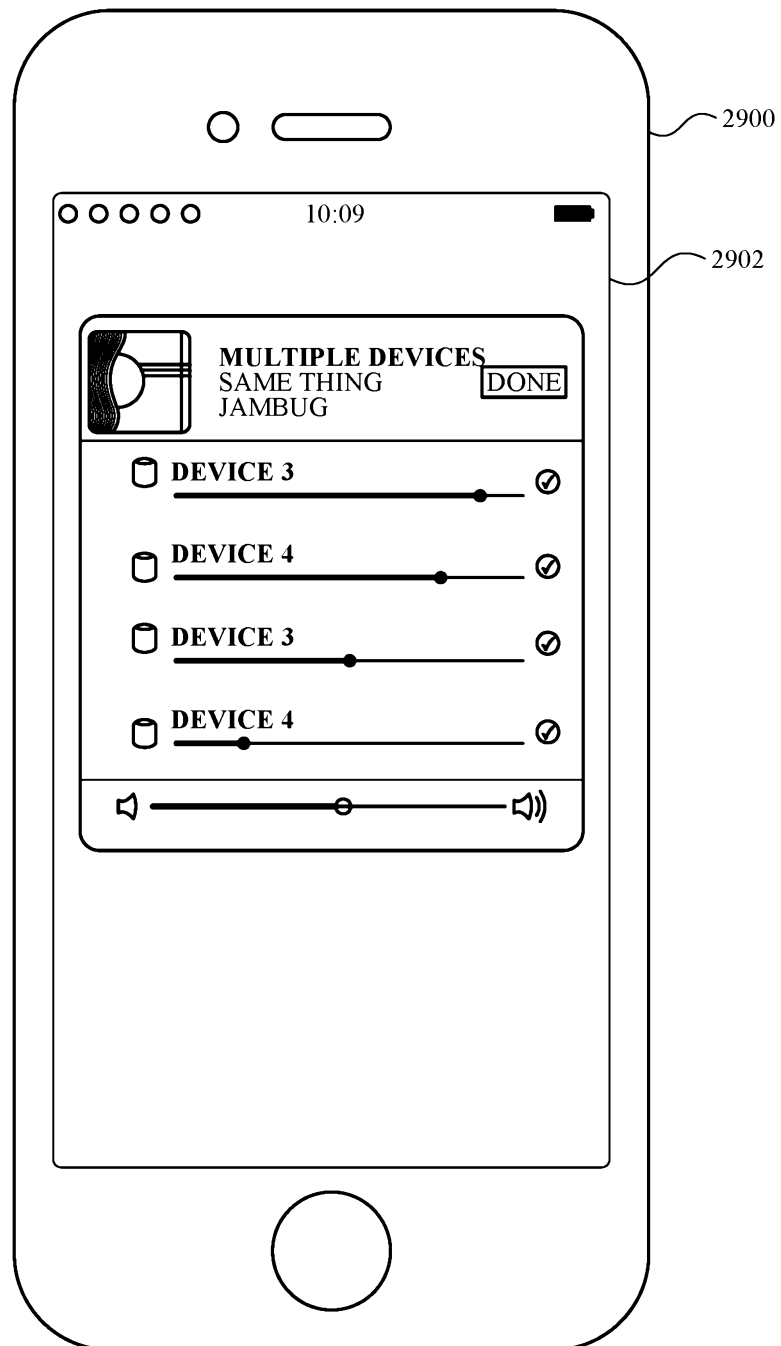
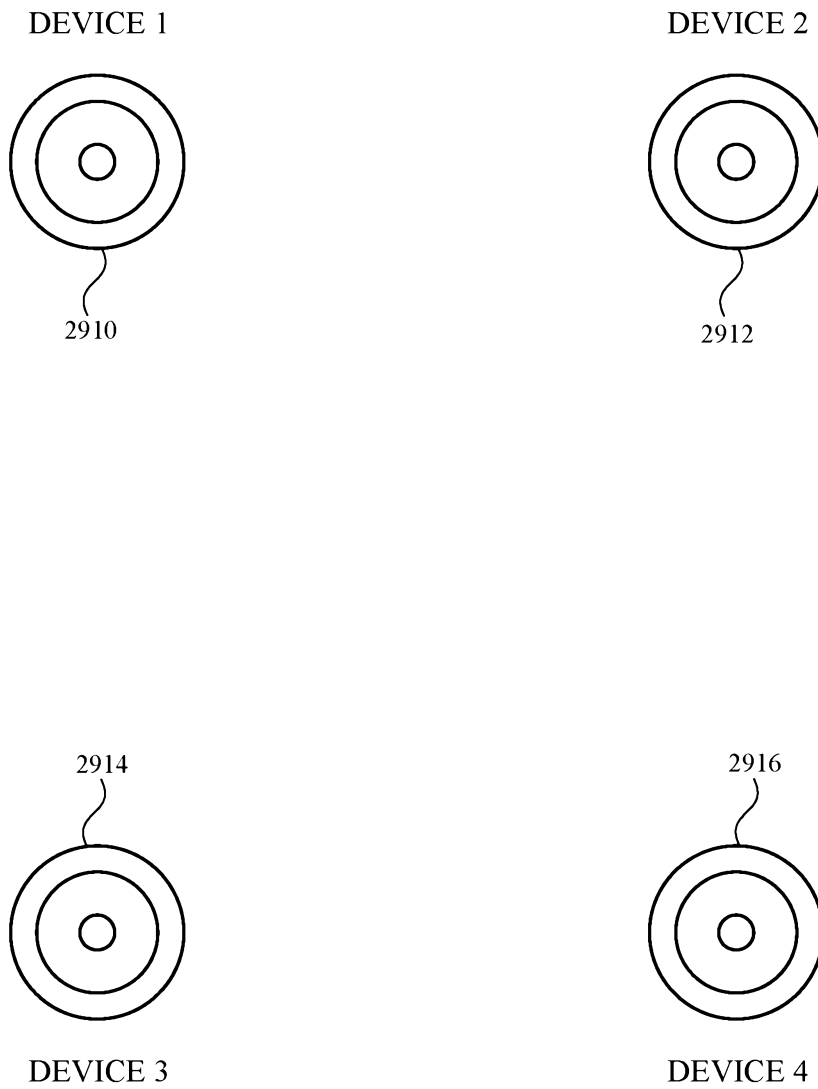
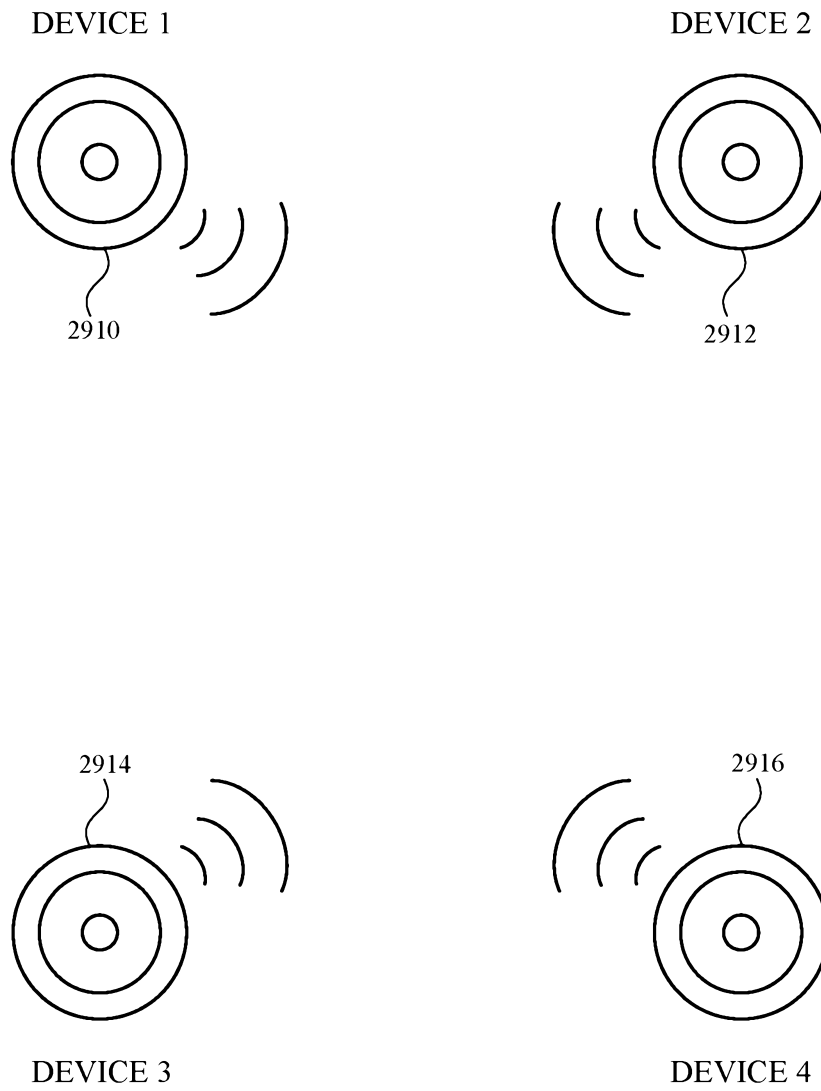
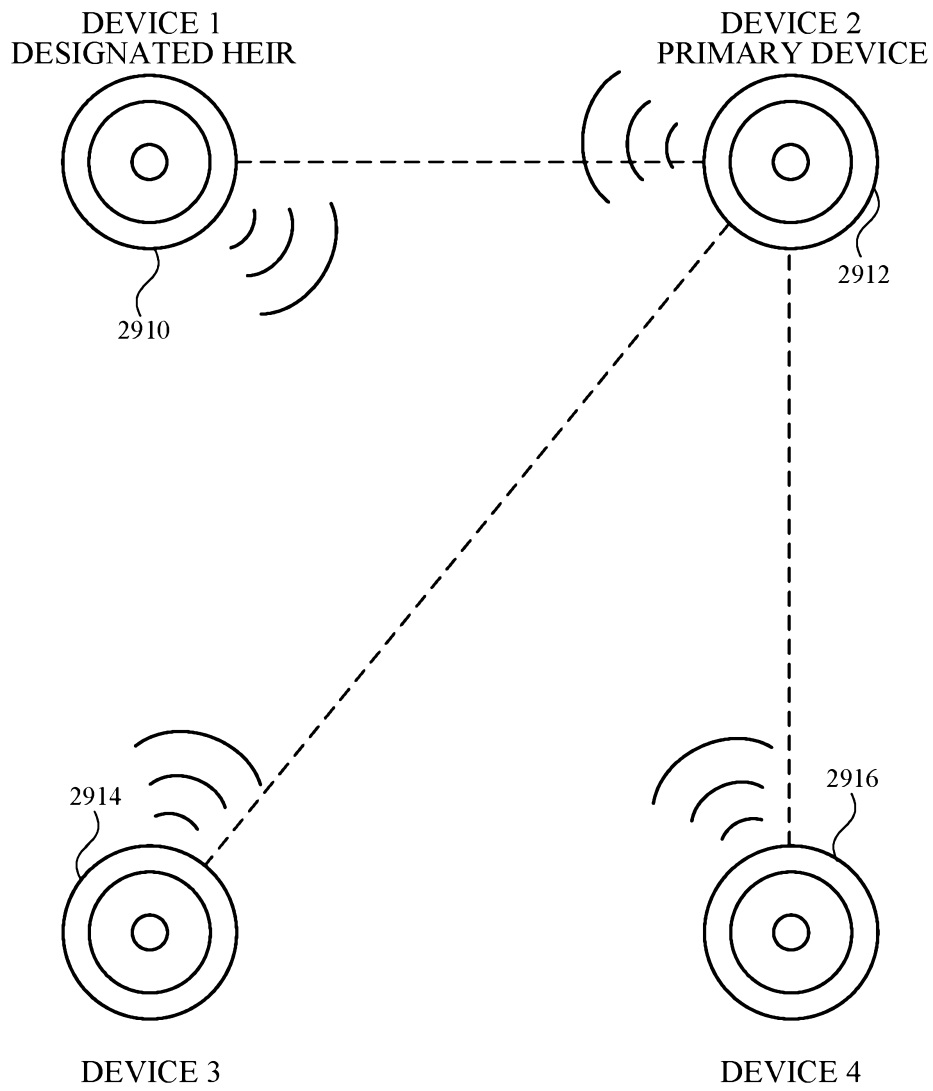
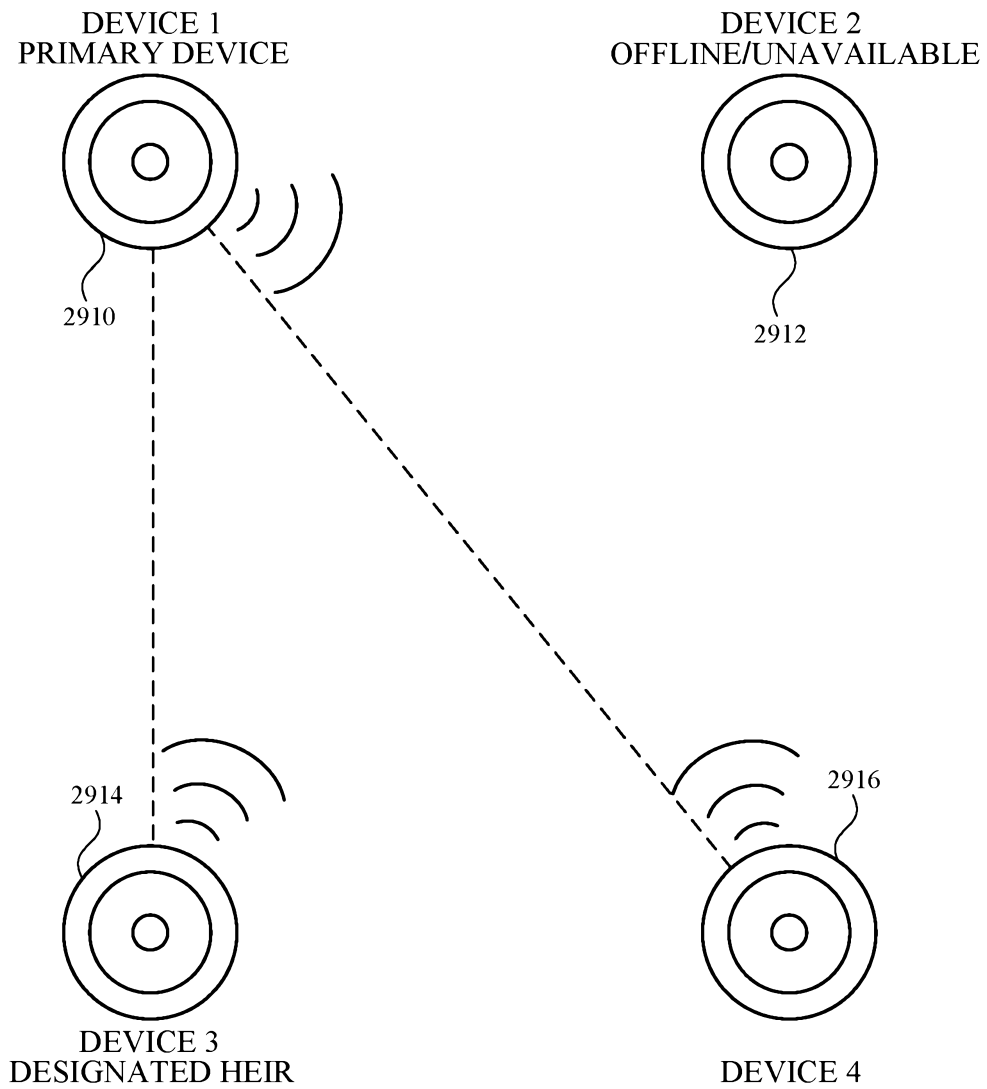


FIG. 29A

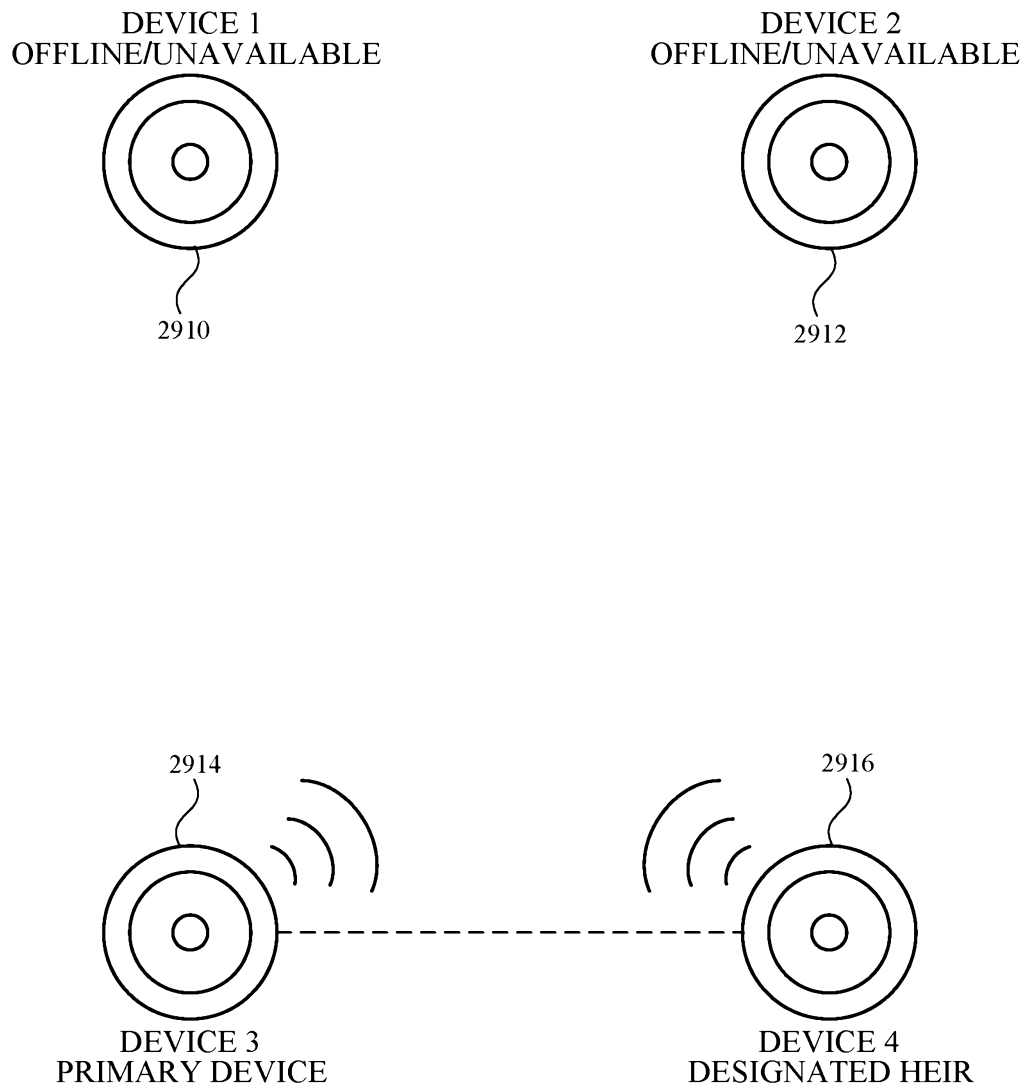
**FIG. 29B**

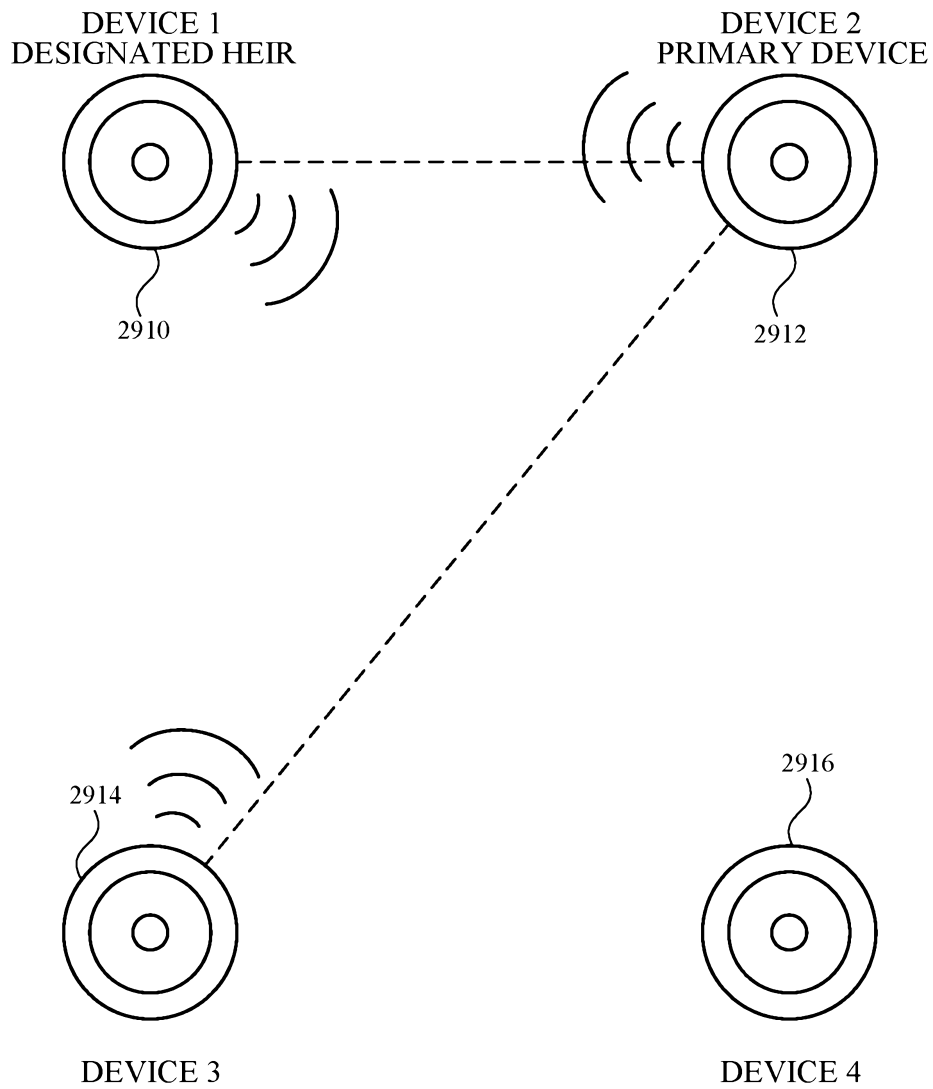
**FIG. 29C**

**FIG. 29D**

**FIG. 29E**



**FIG. 29F**

**FIG. 29G**

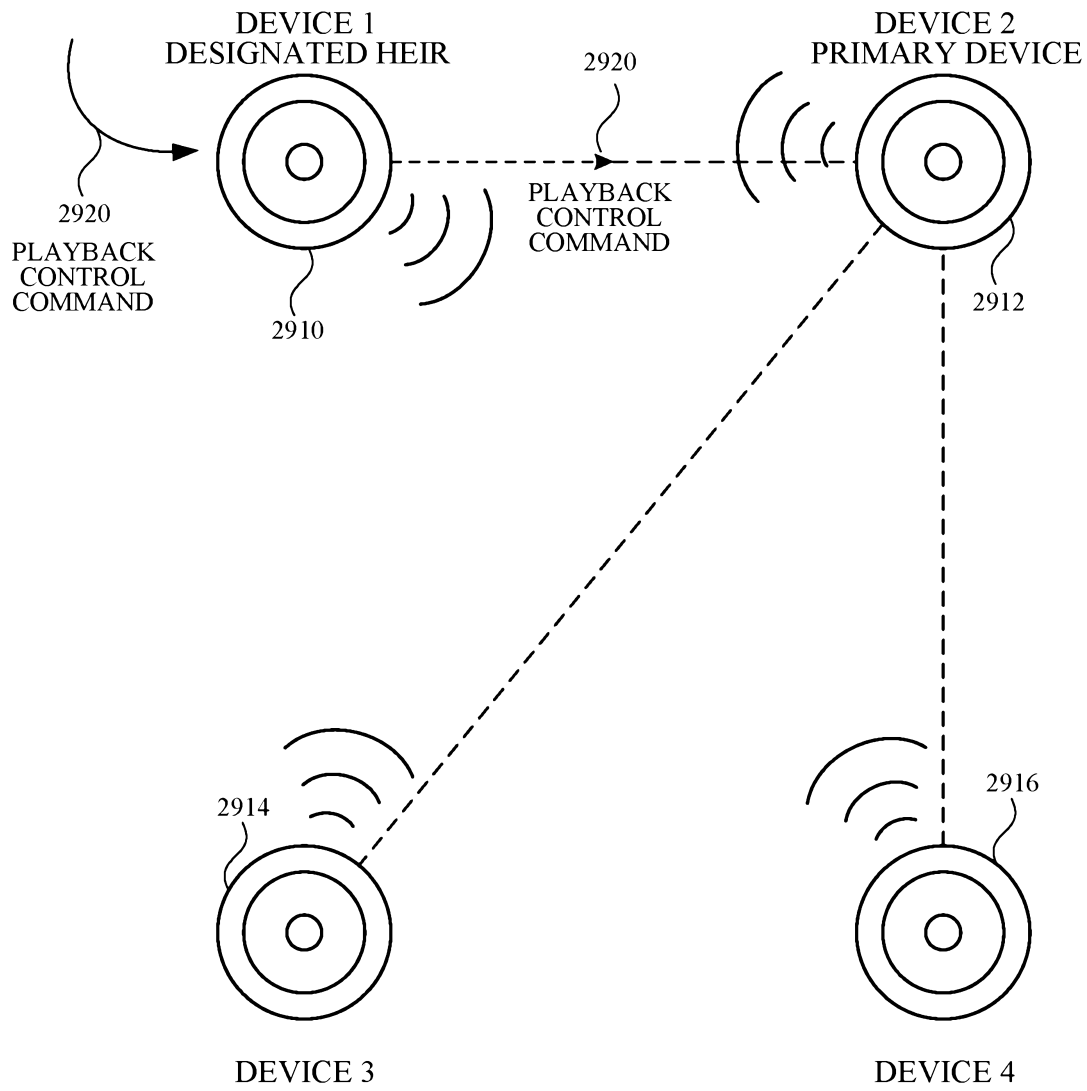
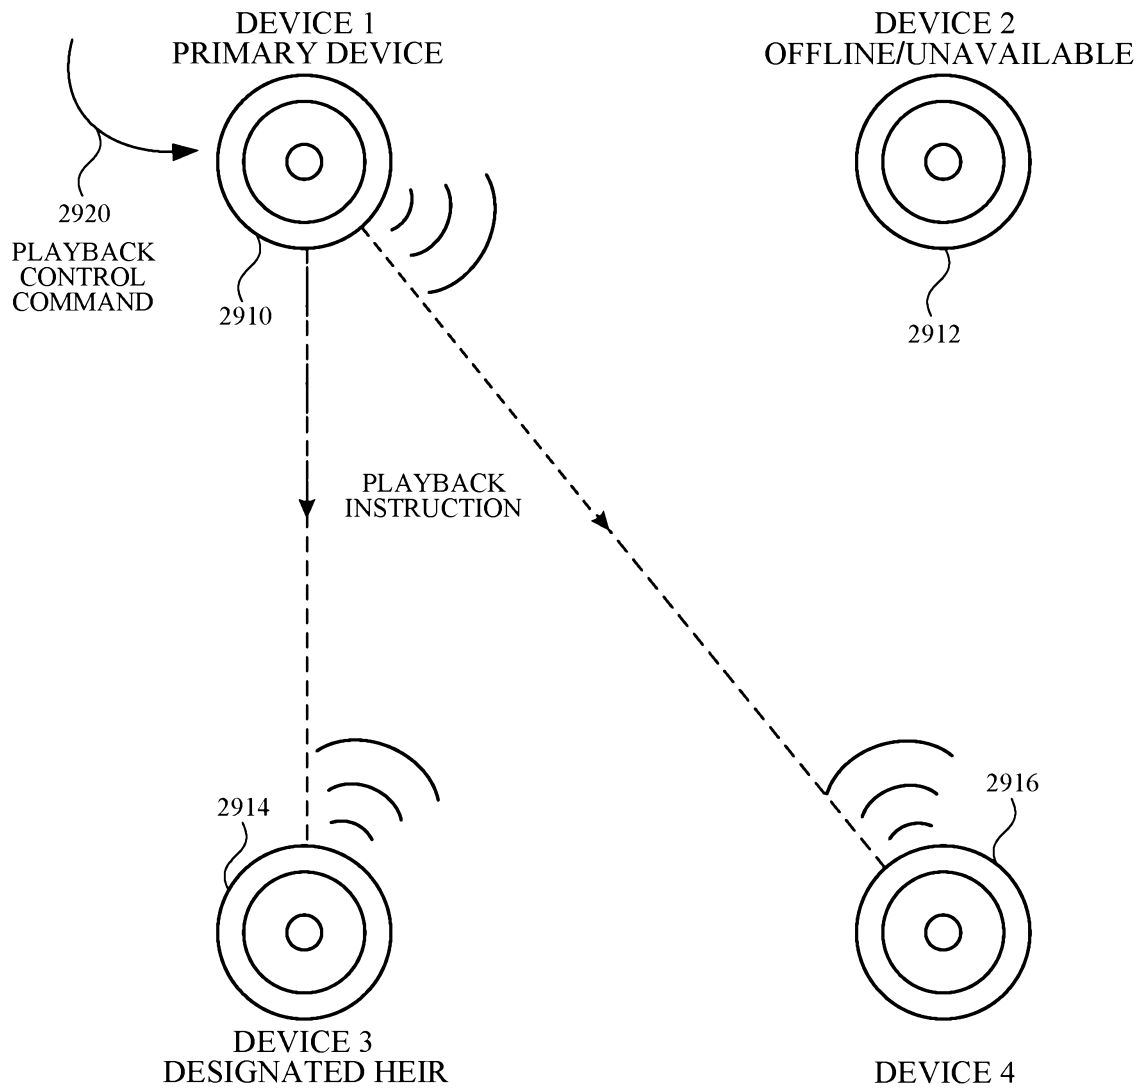
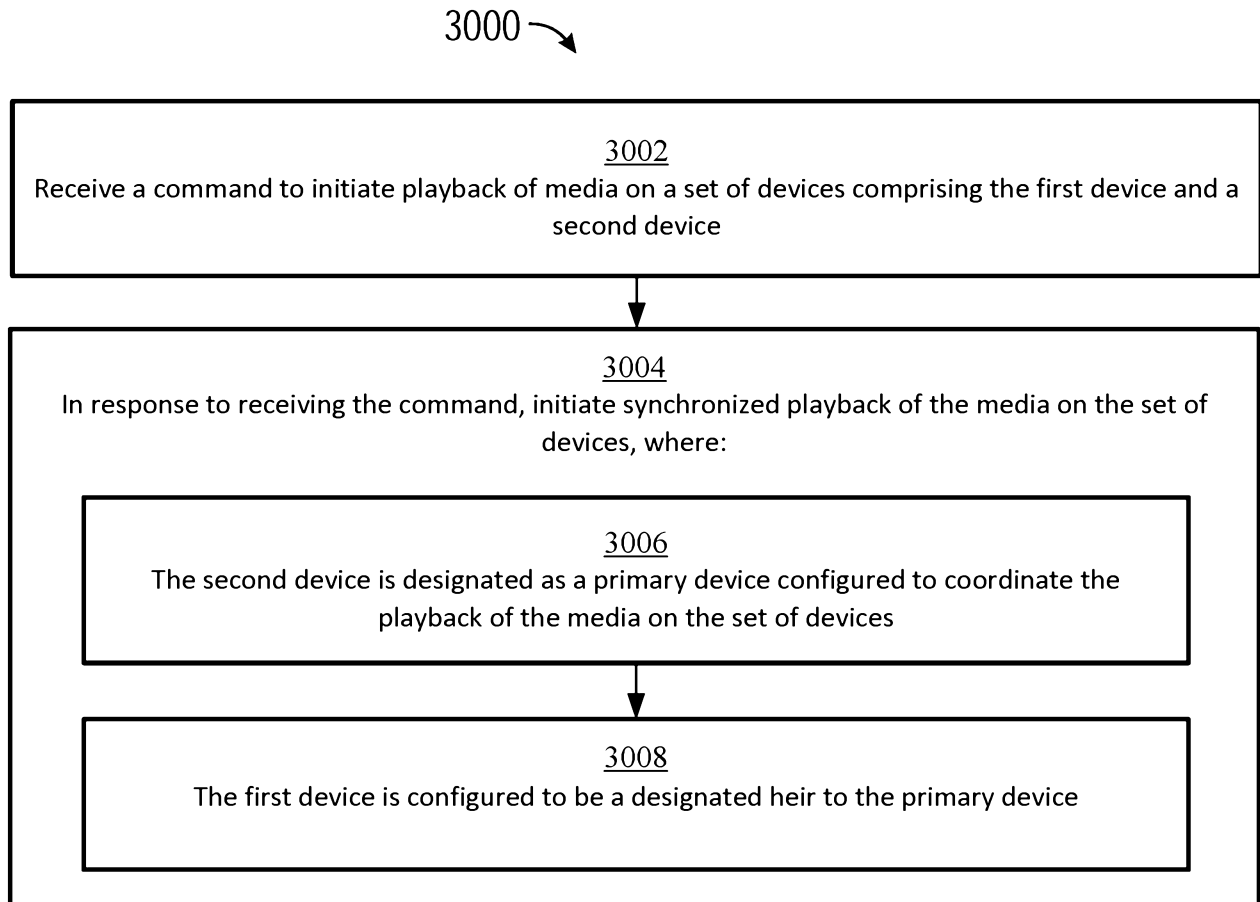
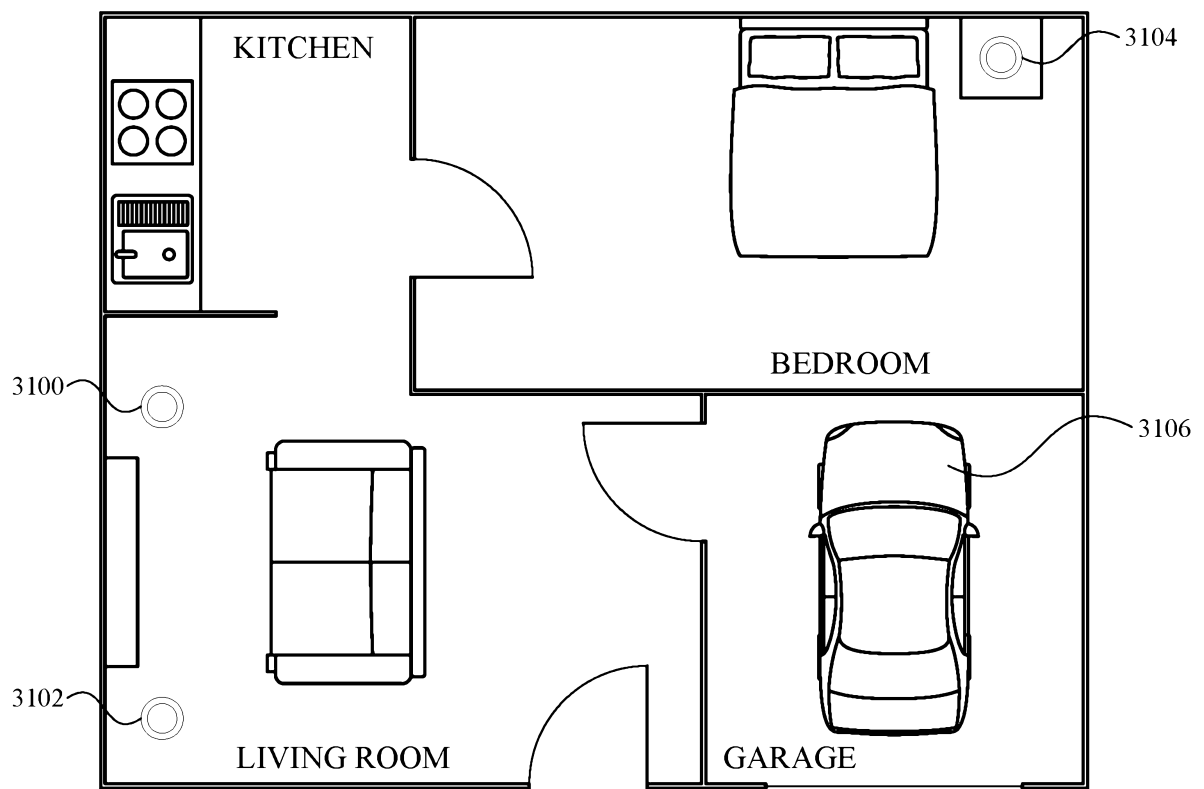
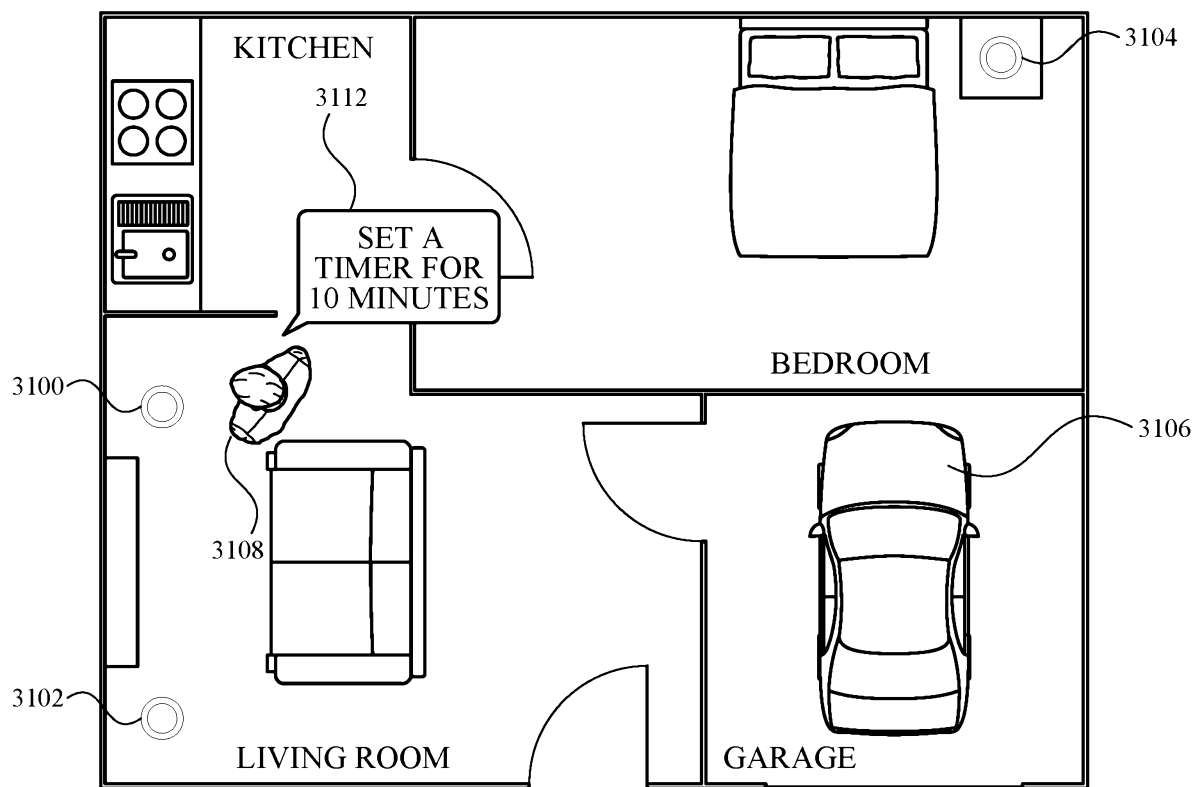


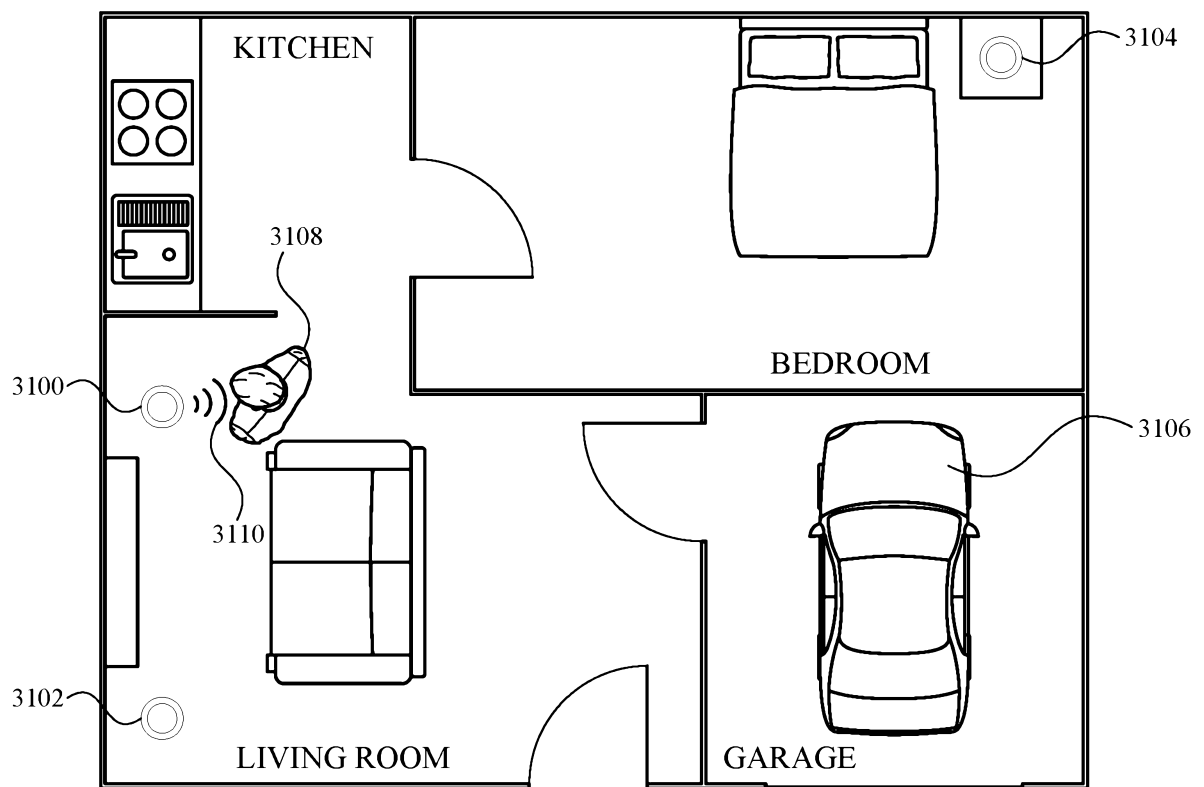
**FIG. 29H**

**FIG. 29I**

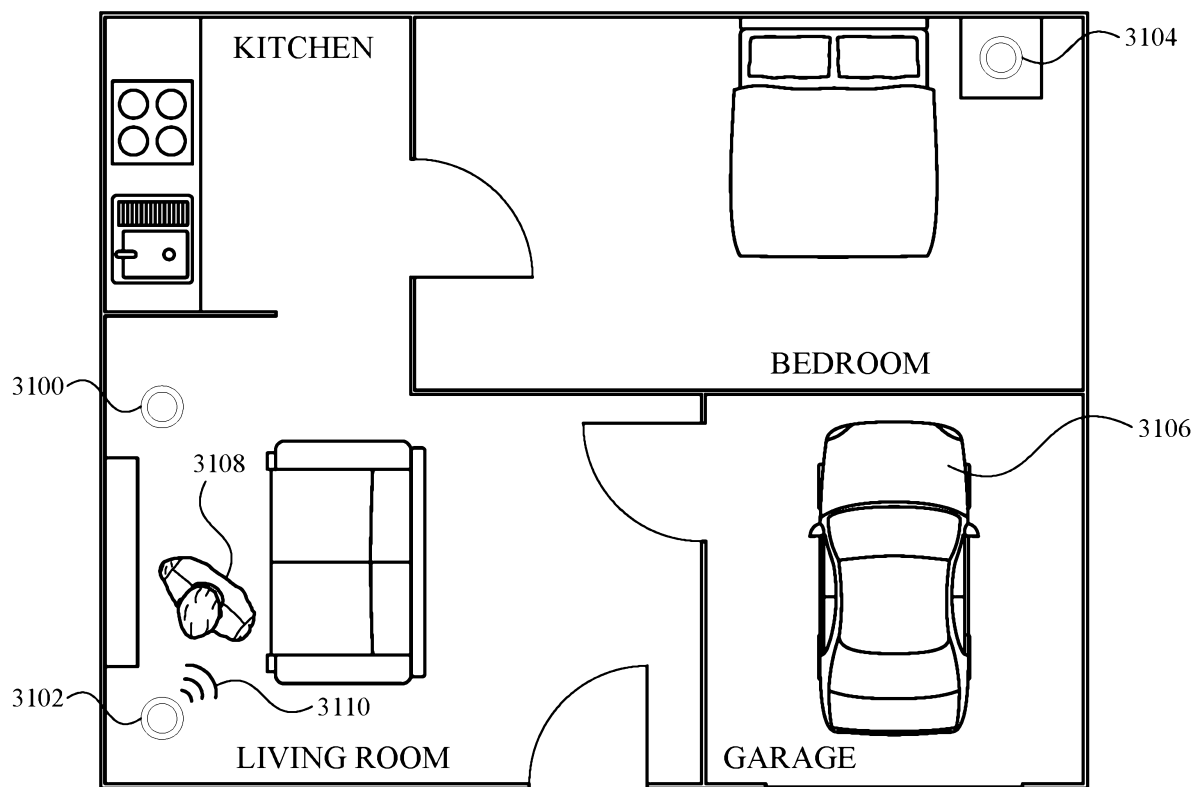
**FIG. 30**

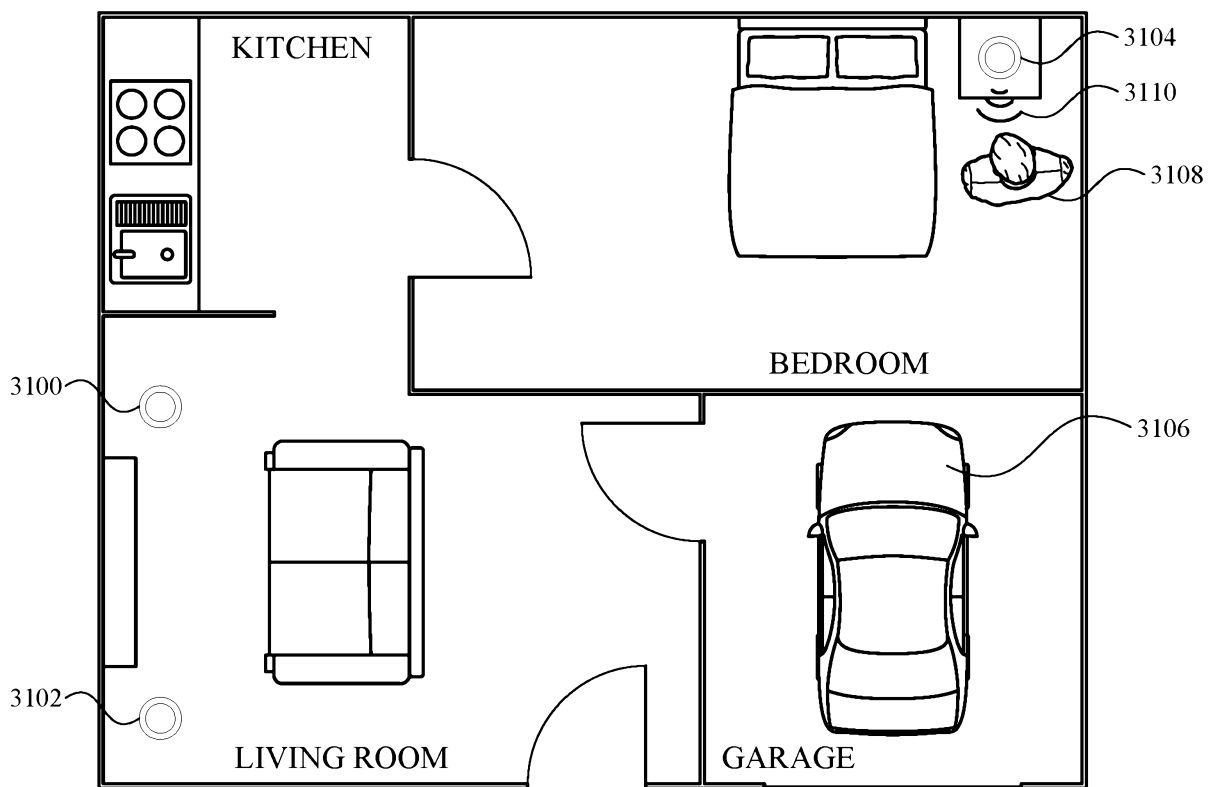
**FIG. 31A**

**FIG. 31B**

*FIG. 31C*



**FIG. 31D**

**FIG. 31E**

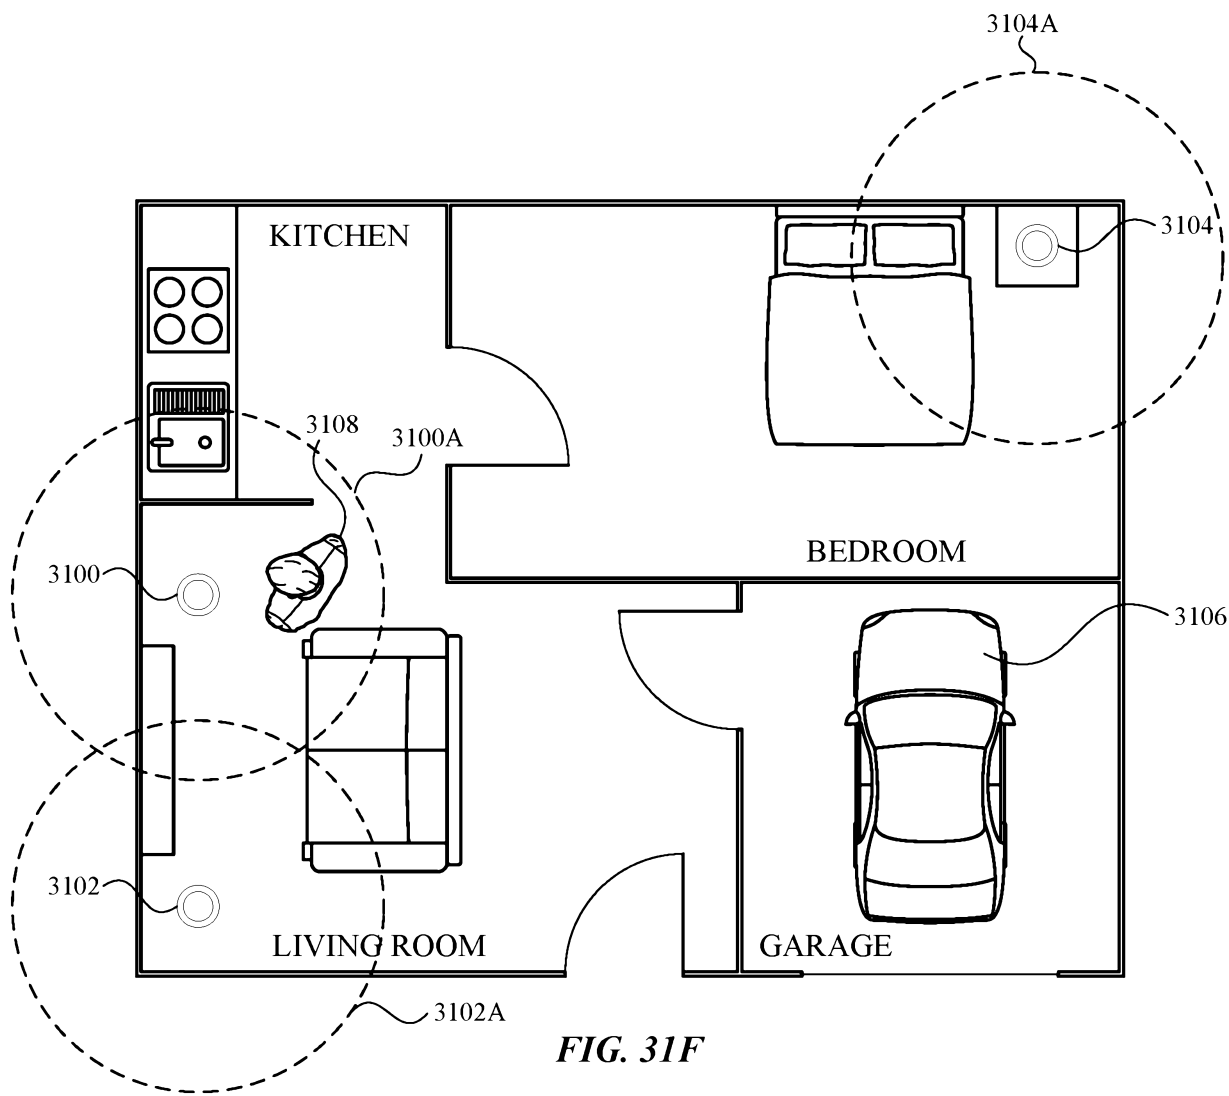
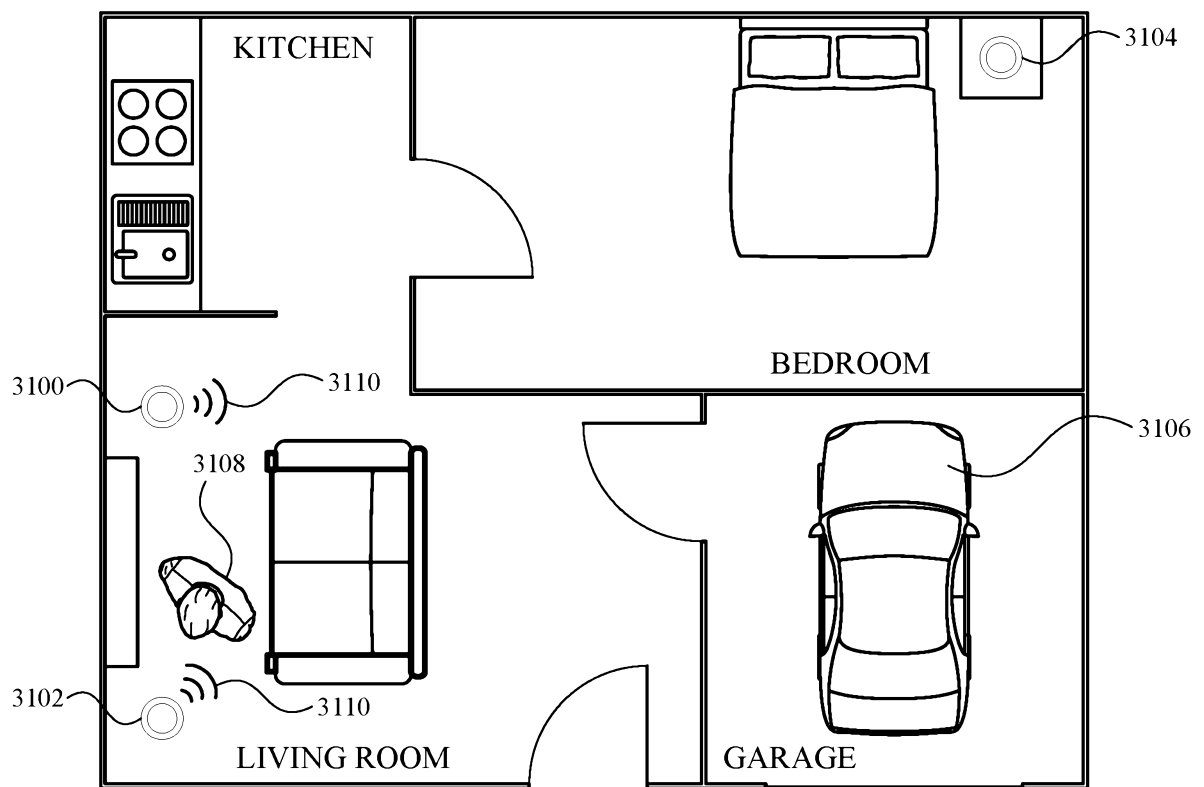
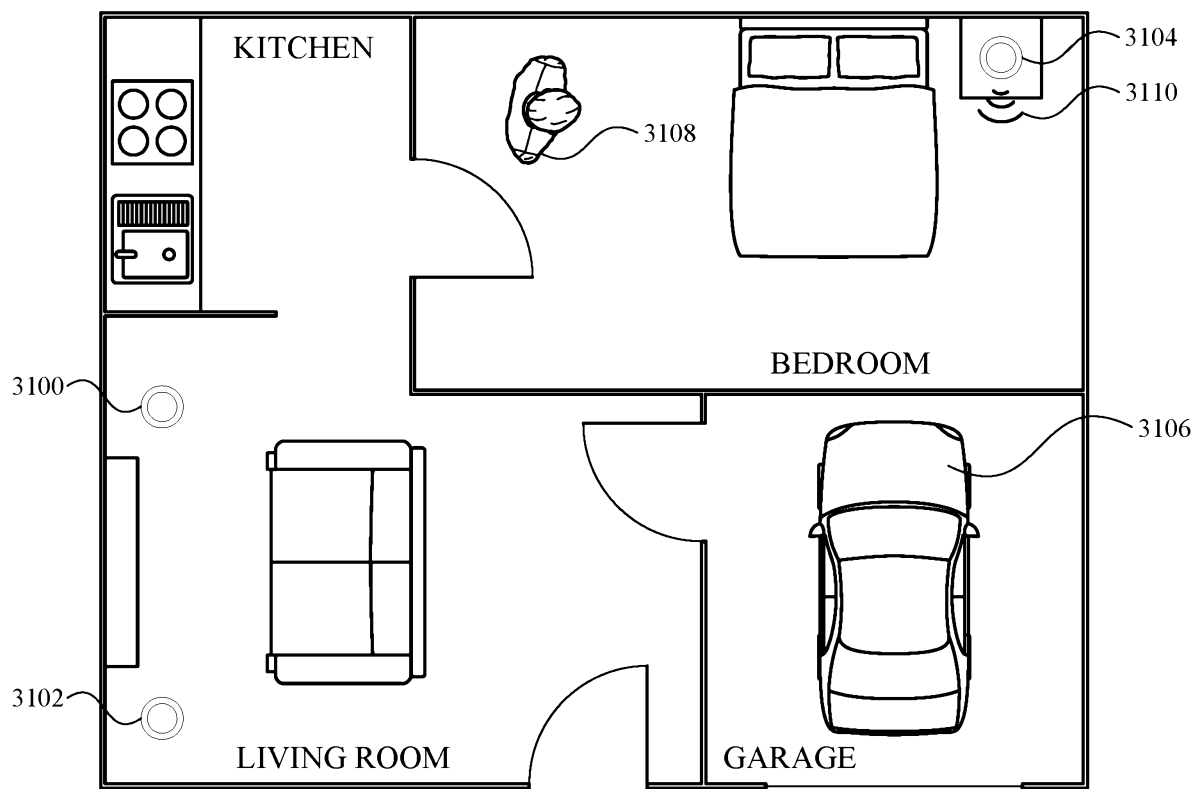
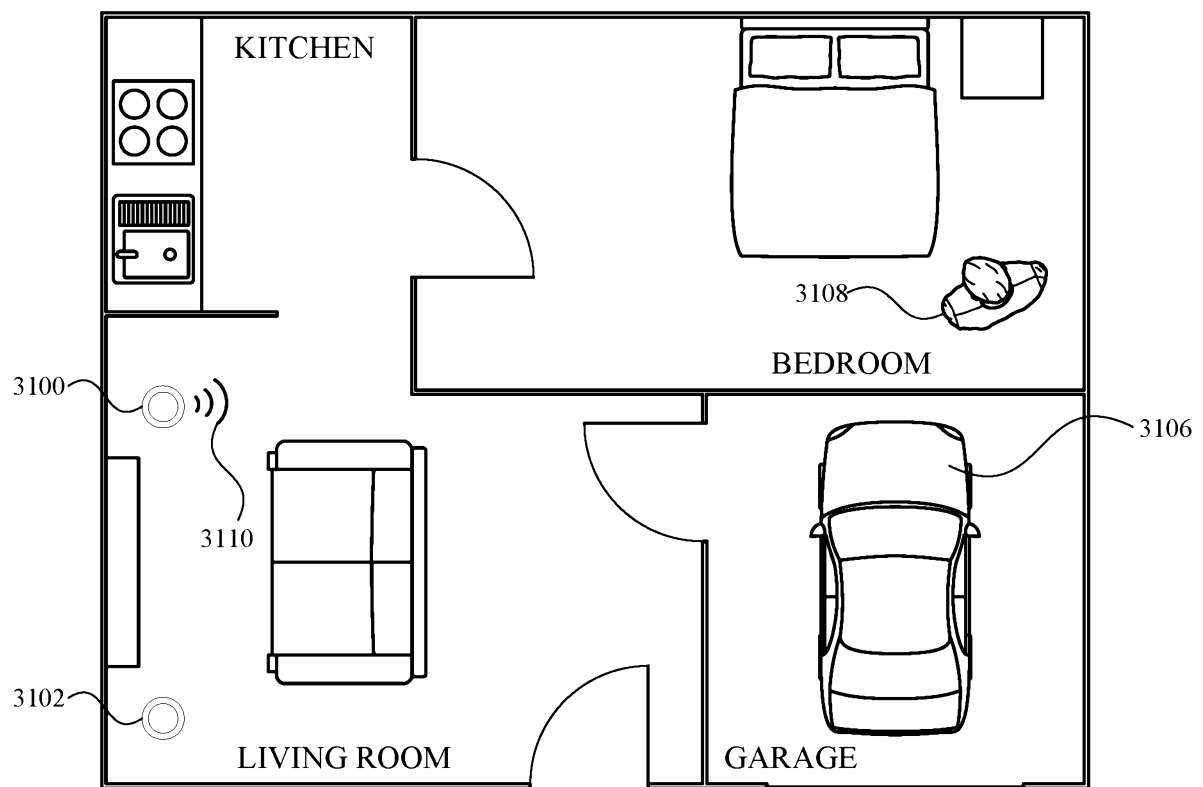
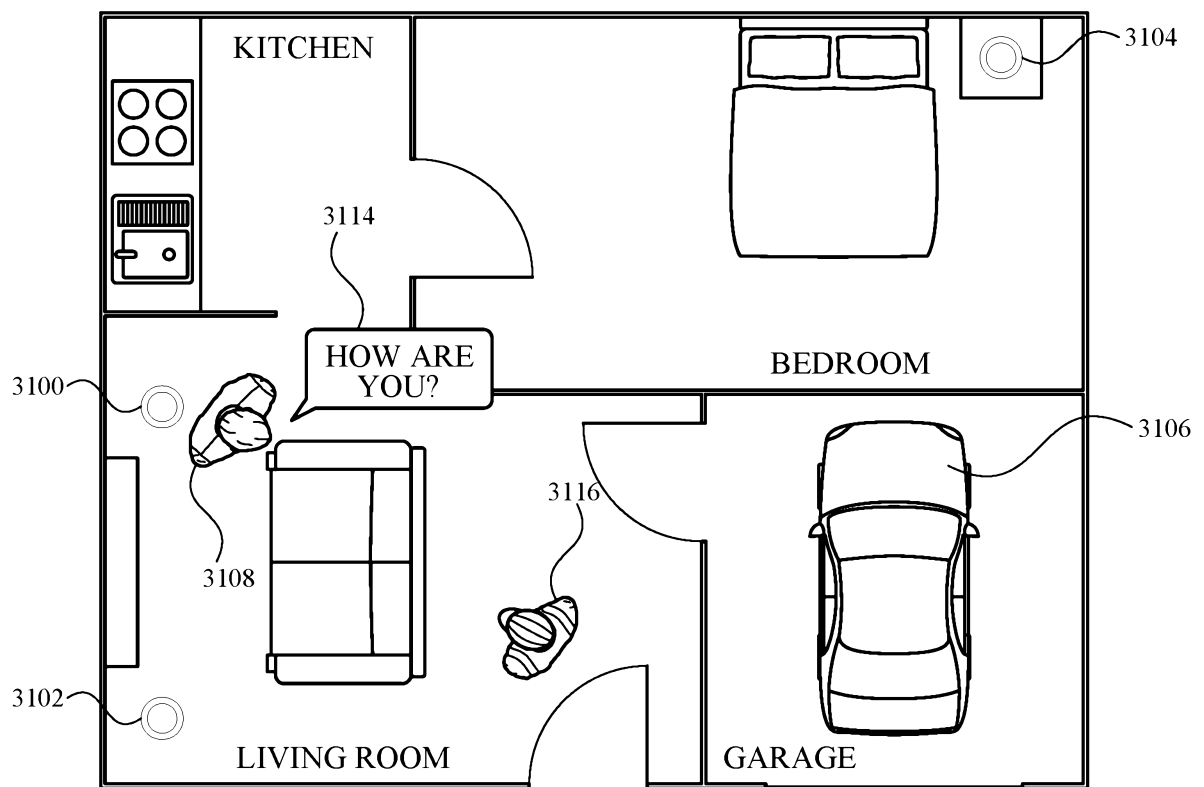


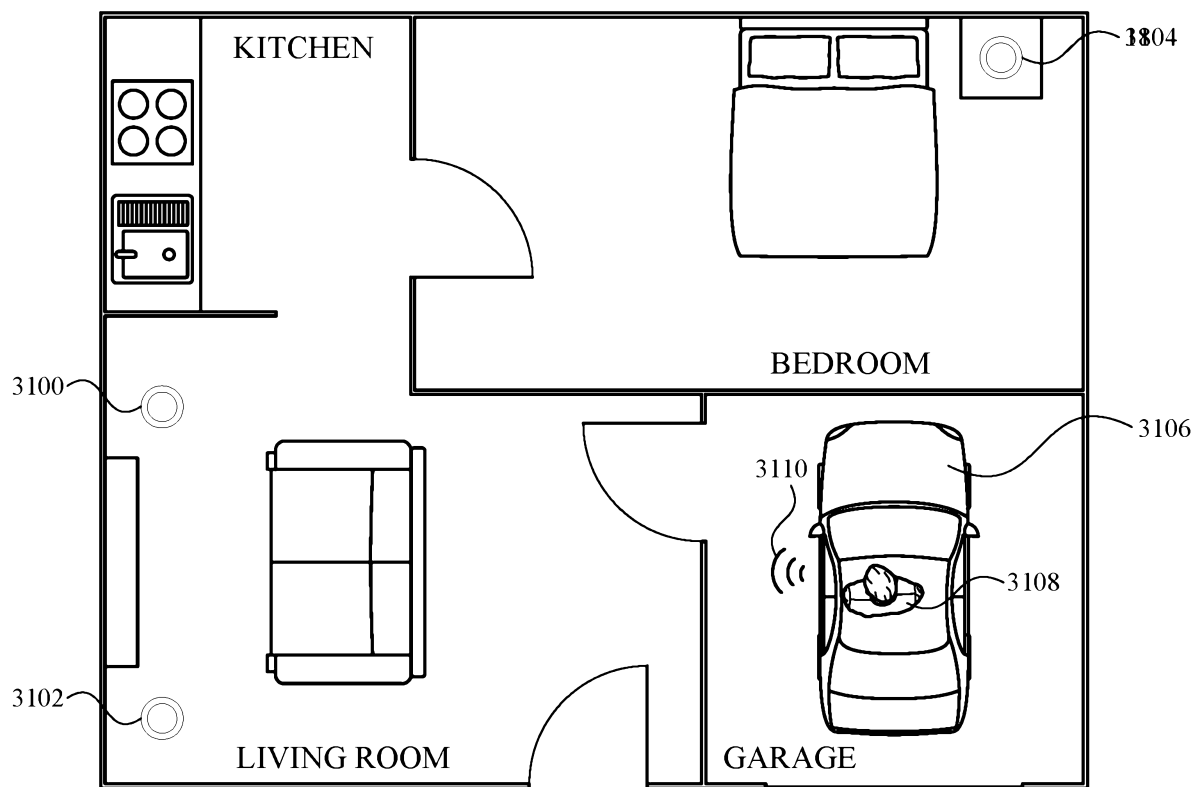
**FIG. 31F**

**FIG. 31G**

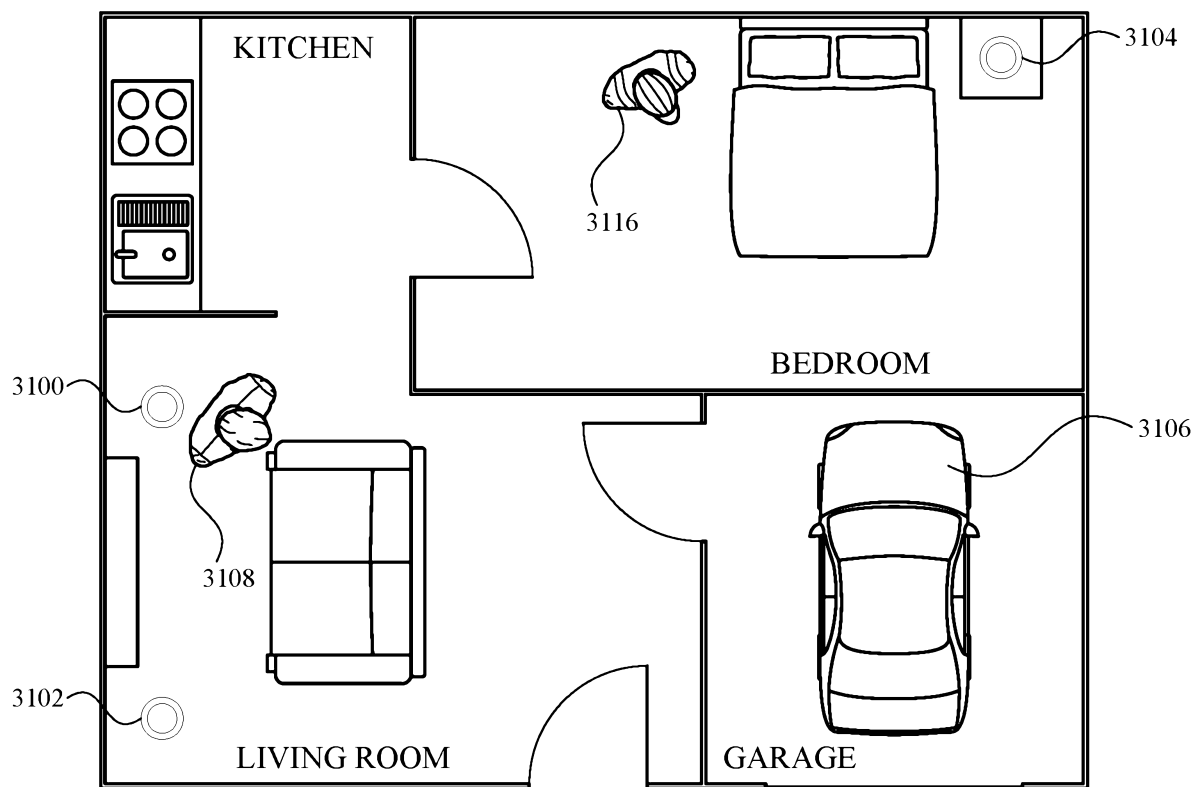
**FIG. 31H**

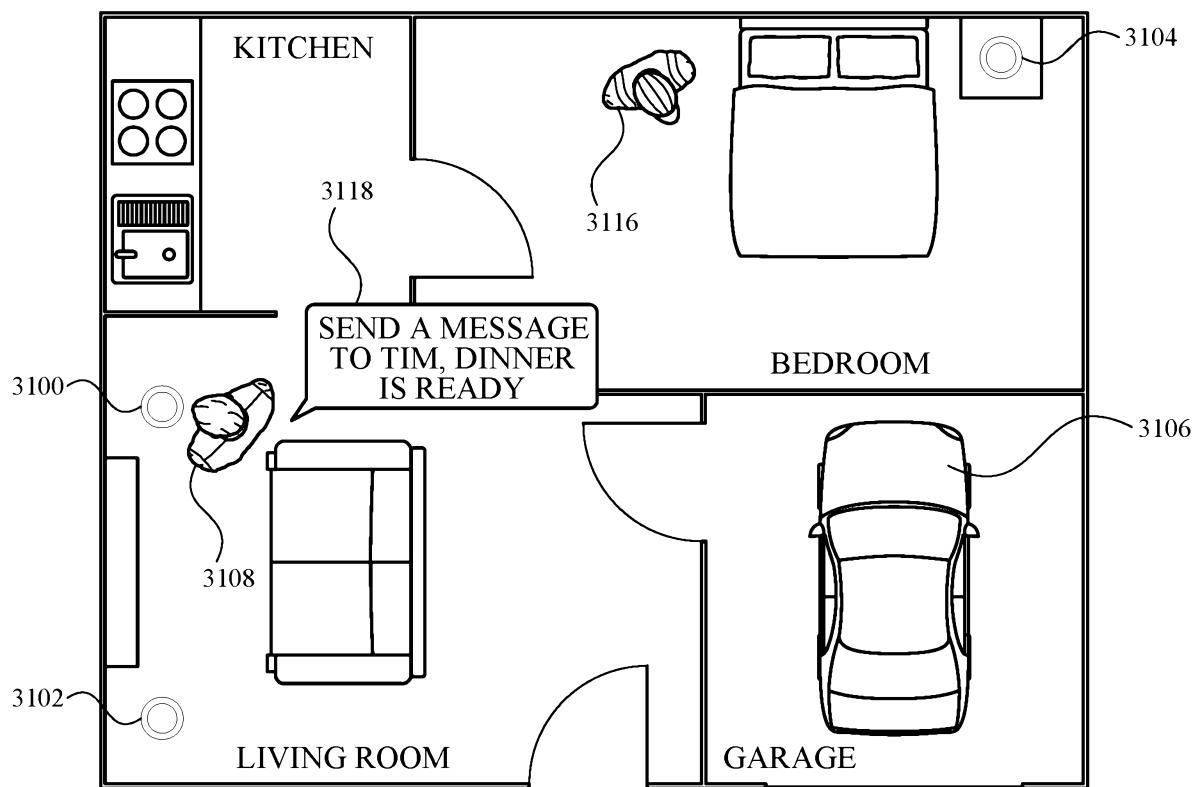
**FIG. 311**

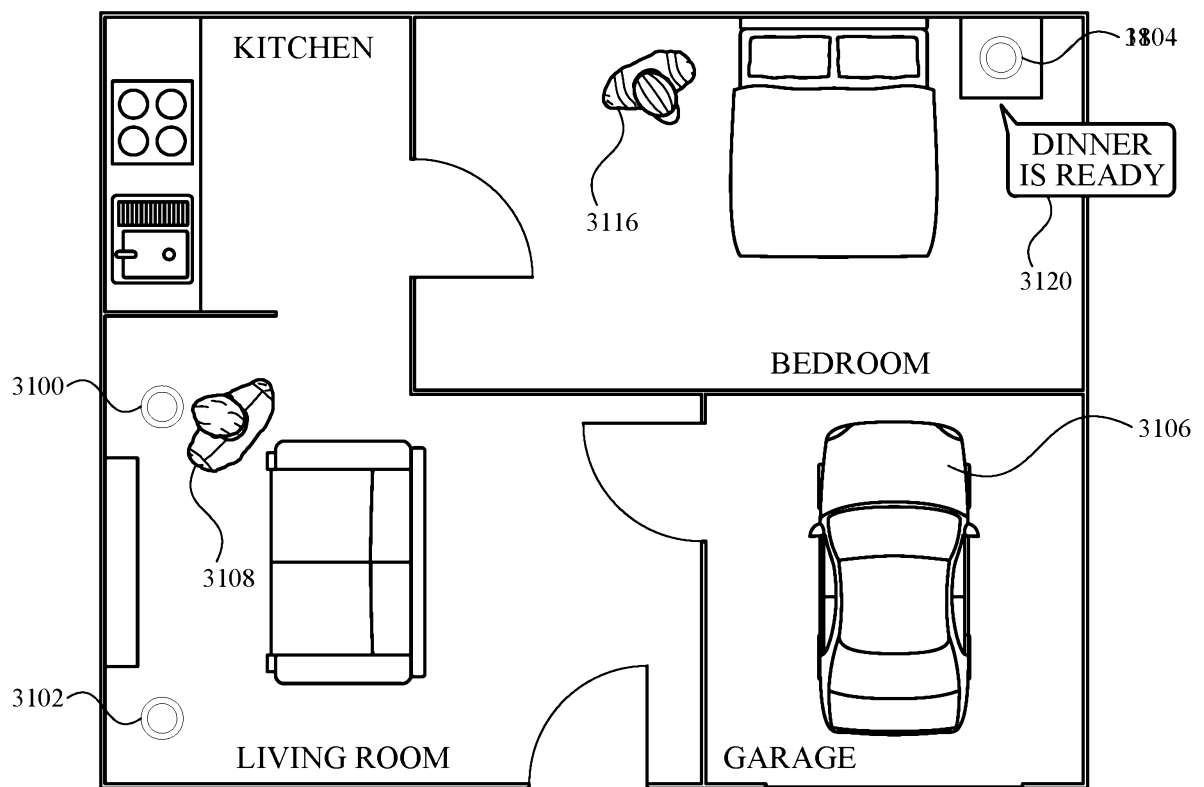
**FIG. 31J**

**FIG. 31K**

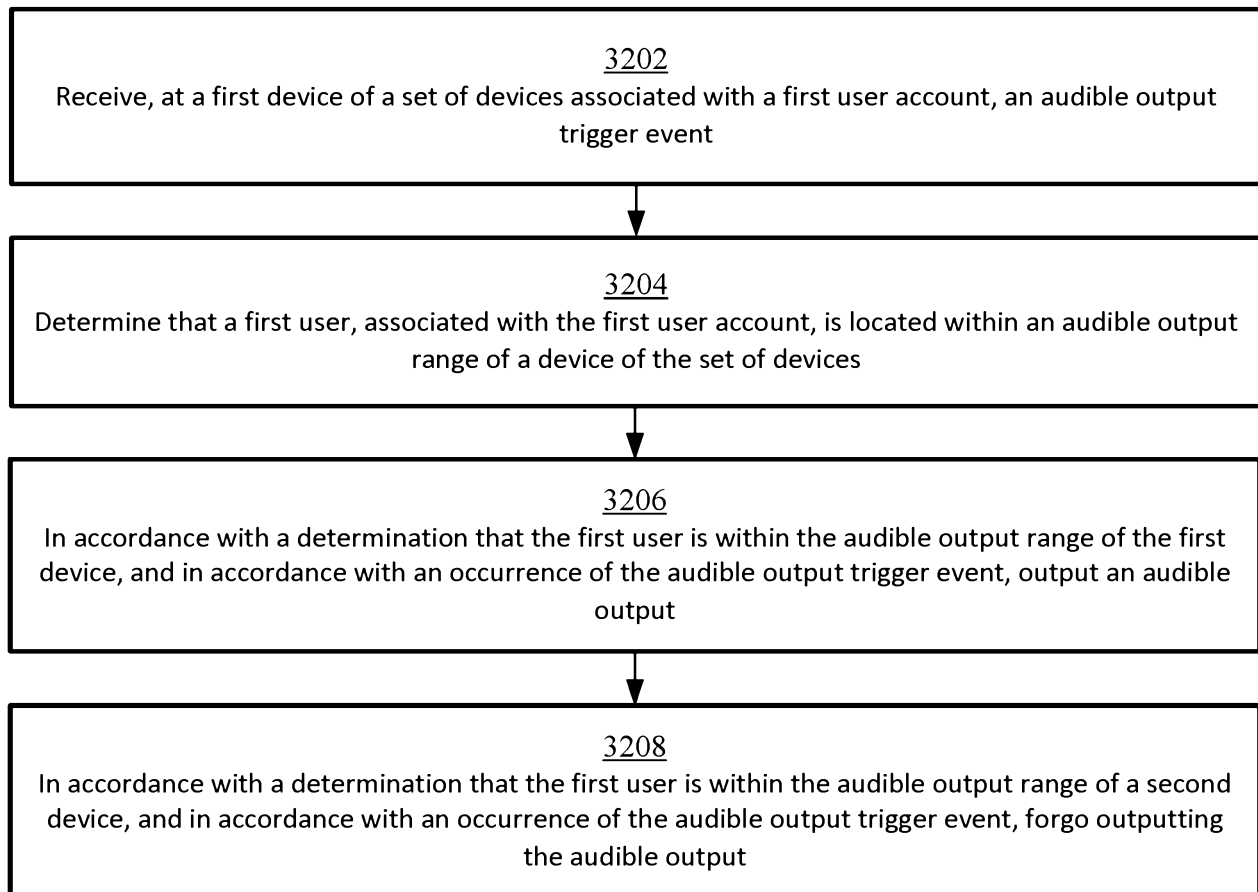


**FIG. 31L**

**FIG. 31M**

**FIG. 31N**

3200 →

**FIG. 32**