



(11)

EP 1 553 910 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
09.04.2008 Bulletin 2008/15

(51) Int Cl.:
A61J 3/07 (2006.01) **B65B 35/06 (2006.01)**

(21) Application number: **03784408.1**

(86) International application number:
PCT/IB2003/003566

(22) Date of filing: **04.08.2003**

(87) International publication number:
WO 2004/014286 (19.02.2004 Gazette 2004/08)

(54) A CAPSULE FILLING MACHINE

KAPSELFÜLLMASCHINE

MACHINE DE REMPLISSAGE DE CAPSULES

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **08.08.2002 IT BO20020525**

(72) Inventors:

- TREBBI, Roberto**
40055 Castenaso (IT)
- ZERBINATI, Enrico**
40017 Monterenzio (IT)

(43) Date of publication of application:
20.07.2005 Bulletin 2005/29

(74) Representative: **Lanzoni, Luciano**
c/o BUGNION S.p.A.
Via Goito, 18
40126 Bologna (IT)

(73) Proprietor: **I.M.A. INDUSTRIA MACCHINE
AUTOMATICHE S.p.A.**
I-40064 Ozzano Emilia (IT)

(56) References cited:

WO-A-01/70171	DE-A- 2 050 885
US-A1- 2002 002 809	US-B1- 6 363 801

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Technical Field**

[0001] The present invention relates to a capsule filling machine for the production of hard gelatin capsules containing pharmaceutical material.

[0002] In particular, the pharmaceutical material in the hard gelatin capsules of the type with a capsule lid and a capsule body to which the present invention advantageously refers is in the form of particles, that is to say, micro-tablets or pellets.

Background Art

[0003] Generally speaking, a capsule filling machine of the known type currently used basically comprises a central turret or carrousel rotating with discontinuous or stepping motion and equipped with a plurality of operating units located along the edge of the turret and driven by the turret by means of reciprocating drive parts. See for example WO 01/70171.

[0004] Each operating unit on the turret comprises a slide supporting element for holding one or more capsules to be carried to a plurality of work stations in which successive operating steps take place, in accordance with a known method. For example, closed capsule feed and angled positioning, subsequent opening of each capsule, that is to say, separation of the capsule body from the capsule lid, feeding a quantity of pharmaceutical material into the capsule body, then closing each capsule body with the relative capsule lid and, finally, discharge of the closed filled capsule obtained in this way.

[0005] In this process cycle, dosing units of known type, each comprising a hollow punch which forms a cylinder and houses a piston (normally pneumatically driven), pick up the pharmaceutical material by lowering the cylinder into a tank containing the material which is attached to the turret, together with an upward movement of the piston to allow dosing, that is to say, to allow the pharmaceutical material to be held in the cylinder previously immersed in the tank.

[0006] The cylinder is then lifted out of the tank and, after a scraping or brushing step to remove any excess micro-tablets, the piston downstroke is activated to push the product, dosed according to the volume of the cylindrical chamber, into the capsule body, aligned in succession with the corresponding cylinder.

[0007] At present, the above-mentioned dosing units are used for efficient, precision dosing of pharmaceutical material in powder form, whilst if capsules are to be filled with particulate material such as micro-tablets or pellets, dosing is not as precise.

[0008] Whilst the piston can pick up precise and constant volumes of powdered pharmaceutical material in the hollow cylinder, in the case of micro-tablets, the piston cannot exert sufficient pick up force on the micro-tablets to guarantee a given and constant number of micro-tab-

lets which will then be released into each capsule body.

Disclosure of the Invention

[0009] The aim of the present invention is to produce a capsule filling machine which can overcome the above-mentioned disadvantage of the prior art.

[0010] In particular, the aim of the present invention is to produce a capsule filling machine which guarantees high precision dosing.

[0011] Another aim of the present invention is to propose a capsule filling machine which, together with the above-mentioned precision dosing, continues to guarantee the reliability, productivity and safety levels required of such machines, as well as the production speed typical of current capsule filling machine, in particular of high productivity continuous-motion capsule filling machines.

[0012] Accordingly, the present invention provides a capsule filling machine for the production of hard gelatin capsules of the type with a capsule lid and a capsule body containing particles of pharmaceutical material, in particular micro-tablets or pellets, the machine comprising a first rotary carrousel, which supports a plurality of slide units for picking up and handling the capsules in order to open then close the capsules by separating then joining the capsule lids and the capsule bodies; a second carrousel, which rotates in such a way that it is synchronised with the first carrousel, having a plurality of reciprocating doser means moving between a first operating position in which the doser means are designed to pick up pharmaceutical material from a tank containing the material which is attached to the machine and a second operating position in which they release the material into the capsule bodies. The machine is characterised in that the doser means each comprise a hollow nozzle with a plurality of seats on its edge for picking up and holding the particulate pharmaceutical material, each seat communicating with pneumatic means. The pneumatic means comprise pneumatic vacuum means which, in the first operating position, suck up and hold individual particles of the pharmaceutical material in respective seats of the nozzle, and pressurised pneumatic means which generate a flow that discharges the particles from the seats in the second operating position to allow the above-mentioned release of material into the capsule bodies.

Brief Description of the Drawings

[0013] The features and advantages of the invention are more clearly illustrated in the detailed description which follows, with reference to the accompanying drawings, which illustrate a preferred embodiment of the invention without limiting the scope of the inventive concept, and in which:

Figure 1 is a diagram illustrating the operating cycle of a capsule filling machine made according to the present invention;

Figures 2 and 3 are side views with some parts cut away and others in cross-section of a detail of the capsule filling machine made according to the present invention in two different operating configurations;

Figure 4 is a front view with some parts in cross-section of a detail of a particular component of the capsule filling machine illustrated in Figures 2 and 3; Figure 5 is a cross-section of the component illustrated in Figure 4;

Figure 6 is a detail of a part of the capsule filling machine illustrated in Figure 1.

Detailed Description of the Preferred Embodiments of the Invention

[0014] With reference to Figure 1, the capsule filling machine disclosed, labelled 10 as a whole, is used for filling capsules C of the known type with a capsule lid and a capsule body, labelled 13 and 14 respectively, with given quantities of particles 12 of pharmaceutical material, specifically pharmaceutical micro-tablets 12 or pellets.

[0015] As illustrated in Figures 1, 2 and 3, the capsule filling machine 10 comprises a first carrousel rotating about a vertical axis Z in the direction indicated by the arrow L and having radial arms 2a, 2b supporting a plurality of slide units 3 for picking up capsule bodies 14 of capsules C and moving them in a horizontal direction, and a tank 11 with a known, substantially toroidal shape, located at the base of the capsule filling machine 10 and designed to hold a mass of micro-tablets 12 supplied from a feed hopper 30.

[0016] The machine 10 also comprises a second carrousel 4 (Figure 2), also rotating about the vertical axis Z, again in the direction indicated by arrow L in Figure 1 and synchronised with the first rotary carrousel 2. The carrousel 4 is equipped with a plurality of micro-tablet 12 doser means 21.

[0017] As illustrated in Figures 2, 3 and 6, the doser means 21 are mobile in a vertical direction parallel with the axis Z alternatively between a first, pick up operating position (Figures 2 and 6), in which the means 21 are inside the tank 11 containing the micro-tablets 12 for picking up quantities consisting of a given number of individual micro-tablets 12 and, a second operating position for releasing the quantities of micro-tablets 12 into the capsule body 14 of a capsule C (Figure 3).

[0018] According to a known method, illustrated in Figures 1, 2 and 3, the first rotary carrousel 2 picks up the capsules C from an upper hopper (of the known type and not illustrated), containing the empty capsules C, then the capsules C are individually placed in the pick up means 3, each of the means comprising two bushings 15 and 17 for angling and guiding the capsules C. Each capsule C is handled in successive operating steps consisting of capsule C opening by separating the capsule lid 13 from the relative capsule body 14, filling the capsule

body 14 with a quantity of micro-tablets 12 by means of the dosers 21, closing the capsule body 14 with the capsule lid 13 and, finally, discharge of the finished capsule C from the capsule filling machine 10 at an outfeed and unloading zone S (Figure 1).

[0019] As is better illustrated in Figure 4, each of the doser means 21 comprises a cylindrical rod 20 with a free end 20a having a plurality of seats or openings 25 on the edge, for picking up and holding individual micro-tablets 12.

[0020] Each of the openings 25 on the edge is also controlled by pneumatic means 24 (Figure 2), specifically first pneumatic means for generating a vacuum and second pneumatic means for generating a pressurised air jet. The first means are designed so that, in the first operating position, they pick up by suction a given number of micro-tablets 12 held in corresponding openings 25 on the edge, whilst the second means are designed so that, in the second operating position, they discharge and release the micro-tablets 12 into a capsule body 14 thanks to a pneumatic thrust coming out of the openings 25.

[0021] More specifically, each opening 25 preferably has dimensions corresponding to the dimensions of the micro-tablets 12 contained in the tank 11. In this way, positioning and holding the individual micro-tablet 12 at the opening 25 results in precision sealed closing of the opening 25.

[0022] Again as illustrated in Figure 4, each opening 25 is preferably circular in shape, so that it forms a cylindrical cavity communicating with the pneumatic means 24 through pipes 27.

[0023] As is better illustrated in Figure 4 and Figure 5, the openings 25 on the edge are arranged in such a way that they are separated by angular spaces which are equal and relative to a longitudinal axis Z' of the cylindrical rod 20. They are arranged in two or more adjacent horizontal planes.

[0024] The angular spaces separating the openings preferably have an angle α of around 120° between one opening 25 on the edge and the next.

[0025] The pneumatic means 24 also comprise a central channel, inside the cylindrical rod 20, for the circulation of air, whether pressurised or forming a vacuum, to the openings 25 on the edge by means of the pipes 27.

[0026] The above-mentioned free pick up end 20a consists of a nozzle 22 with a tubular body whose central cylindrical cavity 23 has a constriction at the end, designed to form the central channel for the passage of air forming a vacuum.

[0027] The top of the nozzle 22 with the tubular body is, in turn, attached to a vertical hollow rod, forming the cylindrical rod 20, by a connecting zone 26.

[0028] As illustrated in Figure 2, the hollow rod 20 is connected to selection valve means 50 controlling the pneumatic means 24.

[0029] The selection valve means 50 are preferably located on the second carrousel 4 and connect the suc-

tion means to the openings 25 in the first, pick up operating position illustrated in Figure 2, that is to say, with the nozzle 22 immersed in the mass of micro-tablets 12 contained in the tank 11 and, alternatively, switch to the connection between the openings 25 and the pressurised air means 24b, in the second operating position in which the micro-tablets 12 are released in to the capsule body 14 by pneumatic discharge of the micro-tablets 12.

[0030] In particular, to allow a correct release of the micro-tablets 12 into the capsule body 14, the arm 2a of the first carousel 2 (Figures 2 and 3) has a chamber 19 which is substantially funnel-shaped, designed to engage with the nozzle 22 in the second, release operating position, allowing and facilitating micro-tablet 12 infeed into the capsule body 14.

[0031] Operation of the capsule filling machine 10 described so far can be easily inferred from the description above.

[0032] With micro-tablet 12 feed into the tank 11 guaranteed by suitably loading the turret 30, the capsule filling machine 10 automatically performs all of the guided capsule C filling operations, according to the successive steps of opening, filling, closing and, finally, discharge from the machine 10.

[0033] In particular, the filling step is performed by means of an operation whereby a predetermined number of micro-tablets 12 is picked up from the tank 11.

[0034] This is done by lowering the hollow rod 20, equipped with the nozzle 22, into the mass of micro-tablets 12, then activating the suction means designed to create a vacuum with a predetermined value, so that the nozzle 22 attracts and holds micro-tablets 12 at the openings 25.

[0035] The rod 20 is then lifted in the known way to the position illustrated in Figure 3, and the bushing 17 with the capsule body 14 is moved horizontally to bring the capsule body precisely into position below the funnel-shaped chamber 19.

[0036] At this point, the selection valve means 50 switch the hollow rod 20 connection from the suction means 24a to the pressurised air means 24b.

[0037] This causes the release of each of the micro-tablets 12 held in the relative opening 25 into the funnel-shaped chamber 19 and, from here, into the capsule body 14 of the capsule C being filled.

[0038] At this point the bushing 17 supporting the capsule body 14 is again moved, to the position illustrated in Figure 2, continuing the rotary path illustrated in the diagram in Figure 1 with the upper bushing 15.

[0039] Therefore, the machine described above achieves the preset aims thanks to a simple feed nozzle structure which allows precise dosing of the number of micro-tablets to be inserted in the capsules. During testing, optimum dosing results were obtained with a number of openings 25 for each nozzle 22, and therefore, a number of micro-tablets 12, varying between thirteen and thirty.

[0040] Thanks to the construction of the pick up nozzle,

the precise and constant number of micro-tablets 12 which fills the capsule body 14 of each capsule C is precisely determined by the number of openings 25 in the nozzle 22, since a single micro-tablet 12 is held by suction in each opening 25.

[0041] Obviously, varying the number of openings in the pick up means varies the number, and therefore the dosage, of the micro-tablets.

[0042] The dimensions of the openings may vary, as may the profile of the cavities formed by the openings in the nozzle body.

[0043] In addition to the total number of openings in each nozzle, the number of openings distributed in each plane and, therefore, their angular distribution, may also vary. There may be alternative embodiments of the nozzle body, including the connecting zone and the lower channel.

[0044] The pneumatic means for suction and pressurised air connected to the hollow rod may be of various types and powers, depending on the applications.

[0045] The invention described can be subject to other practical - application modifications without thereby departing from the scope of the inventive concept as described in the claims.

25

Claims

1. A capsule filling machine (10) for the production of hard gelatin capsules (C) of the type with a capsule lid and a capsule body (13, 14) containing particles (12) of pharmaceutical material, in particular micro-tablets (12) or pellets, the machine (10) comprising a first rotary carousel, which supports a plurality of slide units (3) for picking up and handling the capsules (C) in order to open then close the capsules (C) by separating then joining the capsule lids (13) and the capsule bodies (14); a second carousel (4), which rotates in such a way that it is synchronised with the first carousel (2), having a plurality of reciprocating doser means (21) moving between a first operating position in which the doser means (21) are designed to pick up particulate material (12) from a tank (11) containing the material which is attached to the machine (10) and a second operating position in which they release the material into the capsule (C) bodies (14); the machine being **characterised in that** the doser means (21) each comprise a hollow nozzle (22) with a plurality of seats (25) on its edge for picking up and holding the particulate pharmaceutical material (12), each seat (25) communicating with pneumatic means (24), the pneumatic means (24) comprising pneumatic vacuum means which, in the first operating position, suck up and hold individual particles (12) of the material in respective seats (25) of the nozzle (22), and pressurised pneumatic means which generate a flow that discharges the particles (12) from the seats (25) in the second op-

erating position to allow the above-mentioned release into the capsule (C) bodies (14).

2. The capsule filling machine according to claim 1, **characterised in that** the seats (25) on the edge are arranged on the surface of the nozzle (22) separated by angular spaces that are equal and relative to a longitudinal axis (Z') of the nozzle (22). 5

3. The capsule filling machine according to claim 2, **characterised in that** the angular spaces have an angle (α) equal to 120° between adjacent seats (25). 10

4. The capsule filling machine according to any of the foregoing claims from 1 to 3, **characterised in that** the first carrousel (2) has a substantially funnel-shaped chamber (19) designed to engage with the nozzle (22) in the second operating position, allowing and facilitating particle (12) infeed into the capsule (C) body (14). 15

2. Kapselfüllmaschine nach Patentanspruch 1, **dadurch gekennzeichnet, dass** die Sitze (25) an dem Rand an der Oberfläche der Düse (22) angeordnet sind, getrennt durch Winkelabstände, die gleich oder im Verhältnis zu einer Längsachse (Z') der Düse (22) sind. 20

3. Kapselfüllmaschine nach Patentanspruch 2, **dadurch gekennzeichnet, dass** die Winkelabstände einen Winkel (α) entsprechend 120° zwischen den aneinander grenzenden Sitzen (25) haben. 25

4. Kapselfüllmaschine nach einem beliebigen der vorstehenden Patentansprüche von 1 bis 3, **dadurch gekennzeichnet, dass** das erste Karussell (2) eine im wesentlichen trichterförmige Kammer (19) hat, dazu bestimmt, sich in der zweiten Betriebsposition mit der Düse (22) zu verbinden und somit das Einfüllen der Partikel (12) in den Körper (14) der Kapsel (C) zu ermöglichen und zu erleichtern. 30

Patentansprüche

1. Kapselfüllmaschine (10) zur Herstellung von Hartgelatinekapseln (C) vom Typ mit einem Kapseldeckel und einem Kapselkörper (13, 14), enthaltend Partikel (12) eines pharmazeutischen Produktes, insbesondere Mikrotabletten (12) oder Kügelchen, wobei die Maschine (10) ein erstes drehendes Karussell enthält, welches eine Anzahl von Schlitteneinheiten (3) zum Aufnehmen und Handhaben der Kapseln (C) trägt, um die Kapseln (C) zu öffnen und dann zu schliessen, und zwar durch das Trennen und dann das Verbinden der Kapseldeckel (13) mit den Kapselköpfen (14); ein zweites Karussell (4), welches sich auf solche Weise dreht, dass es mit dem ersten Karussell (2) synchronisiert ist, wobei es eine Anzahl von wechselweisen Dosiermitteln (21) enthält, die sich bewegen zwischen einer ersten Betriebsposition, in welcher die Dosiermittel (21) dazu bestimmt sind, Partikelmaterial (12) aus einem das Material enthaltenden Behälter (11) aufzunehmen, welcher an der Maschine (10) befestigt ist, und einer zweiten Betriebsposition, in welcher sie das Material in die Körper (14) der Kapseln (C) freigeben; wobei die Maschine **dadurch gekennzeichnet ist, dass** die Dosiermittel (21) je eine hohle Düse (22) enthalten, mit einer Anzahl von Sitzen (25) an ihrem Rand zum Aufnehmen und Festhalten des pharmazeutischen Partikelmaterials (12), wobei jeder Sitz (25) mit pneumatischen Mitteln (24) in Verbindung steht, und wobei die pneumatischen Mittel (24) pneumatische Vakuummittel enthalten, welche in der ersten Betriebsposition die einzelnen Partikel (12) des Materials in den jeweiligen Sitzen (25) der Düse (22) ansaugen und festhalten, sowie unter Druck stehende pneumatische Mittel, welche einen Fluss erzeugen, 35

40

45

50

55

der die Partikel (12) in der zweiten Betriebsposition aus den Sitzen (25) ausstösst, um die oben erwähnte Freigabe in die Körper (14) der Kapseln (C) zu erlauben.

2. Kapselfüllmaschine nach Patentanspruch 1, **dadurch gekennzeichnet, dass** die Sitze (25) an dem Rand an der Oberfläche der Düse (22) angeordnet sind, getrennt durch Winkelabstände, die gleich oder im Verhältnis zu einer Längsachse (Z') der Düse (22) sind. 20

3. Kapselfüllmaschine nach Patentanspruch 2, **dadurch gekennzeichnet, dass** die Winkelabstände einen Winkel (α) entsprechend 120° zwischen den aneinander grenzenden Sitzen (25) haben. 25

4. Kapselfüllmaschine nach einem beliebigen der vorstehenden Patentansprüche von 1 bis 3, **dadurch gekennzeichnet, dass** das erste Karussell (2) eine im wesentlichen trichterförmige Kammer (19) hat, dazu bestimmt, sich in der zweiten Betriebsposition mit der Düse (22) zu verbinden und somit das Einfüllen der Partikel (12) in den Körper (14) der Kapsel (C) zu ermöglichen und zu erleichtern. 30

Revendications

30 1. Une machine (10) de remplissage de capsules pour la production de capsules (C) de gélatine dure du type comprenant un chapeau de capsule et un corps de capsule (13, 14) contenant des particules (12) de matériau pharmaceutique, en particulier des micro-comprimés (12) ou pellets, la machine (10) comprenant un premier carrousel rotatif qui supporte une pluralité de groupes coulissants (3) de prise et de manipulation des capsules (C) servant à ouvrir puis à fermer lesdites capsules (C) en séparant puis en joignant les chapeaux de capsule (13) et les corps de capsule (14) ; un deuxième carrousel (4) qui tourne en synchronisation avec le premier carrousel (2) et est doté d'une pluralité de moyens doseurs (21) à mouvement alternatif qui sont mobiles entre une première position opérationnelle dans laquelle les moyens doseurs (21) sont destinés à prélever le matériau particulaire (12) dans un réservoir (11) contenant ledit matériau et associé à la machine (10), et une deuxième position opérationnelle dans laquelle ils déposent le matériau dans les corps (14) des capsules (C) ; la machine étant **caractérisée en ce que** les moyens doseurs (21) comprennent chacun une buse creuse (22) dotée, sur son pourtour, d'une pluralité de logements (25) pour prélever et retenir le matériau pharmaceutique particulaire (12), chaque logement (25) communiquant avec des moyens pneumatiques (24), lesdits moyens pneumatiques (24) comprenant des moyens de vide pneumatiques

qui, dans la première position opérationnelle, aspirent et retiennent des particules individuelles (12) dudit matériau dans les logements (25) respectifs de la buse (22), et des moyens pneumatiques sous pression qui génèrent un flux servant à expulser, 5 dans la deuxième position opérationnelle, les particules (12) des logements (25) afin de permettre la dépose susmentionnée dans les corps (14) des capsules (C).

10

2. La machine de remplissage de capsules selon la revendication 1, **caractérisée en ce que** les logements (25) de pourtour sont disposés sur la surface de la buse (22) selon des espaces angulaires qui sont égaux entre eux et par rapport à un axe longitudinal (Z') de la buse (22). 15
3. La machine de remplissage de capsules selon la revendication 2, **caractérisée en ce que** les espaces angulaires ont un angle (α) égal à 120° entre des logements (25) adjacents. 20
4. La machine de remplissage de capsules selon l'une quelconque des revendications précédentes de 1 à 3, **caractérisée en ce que** le premier carrousel (2) comporte une chambre (19), essentiellement en forme d'entonnoir, destinée à venir en prise avec la buse (22) dans la deuxième position opérationnelle de manière à permettre et à faciliter l'alimentation des particules (12) dans le corps (14) de la capsule (C). 25 30

35

40

45

50

55

FIG.1

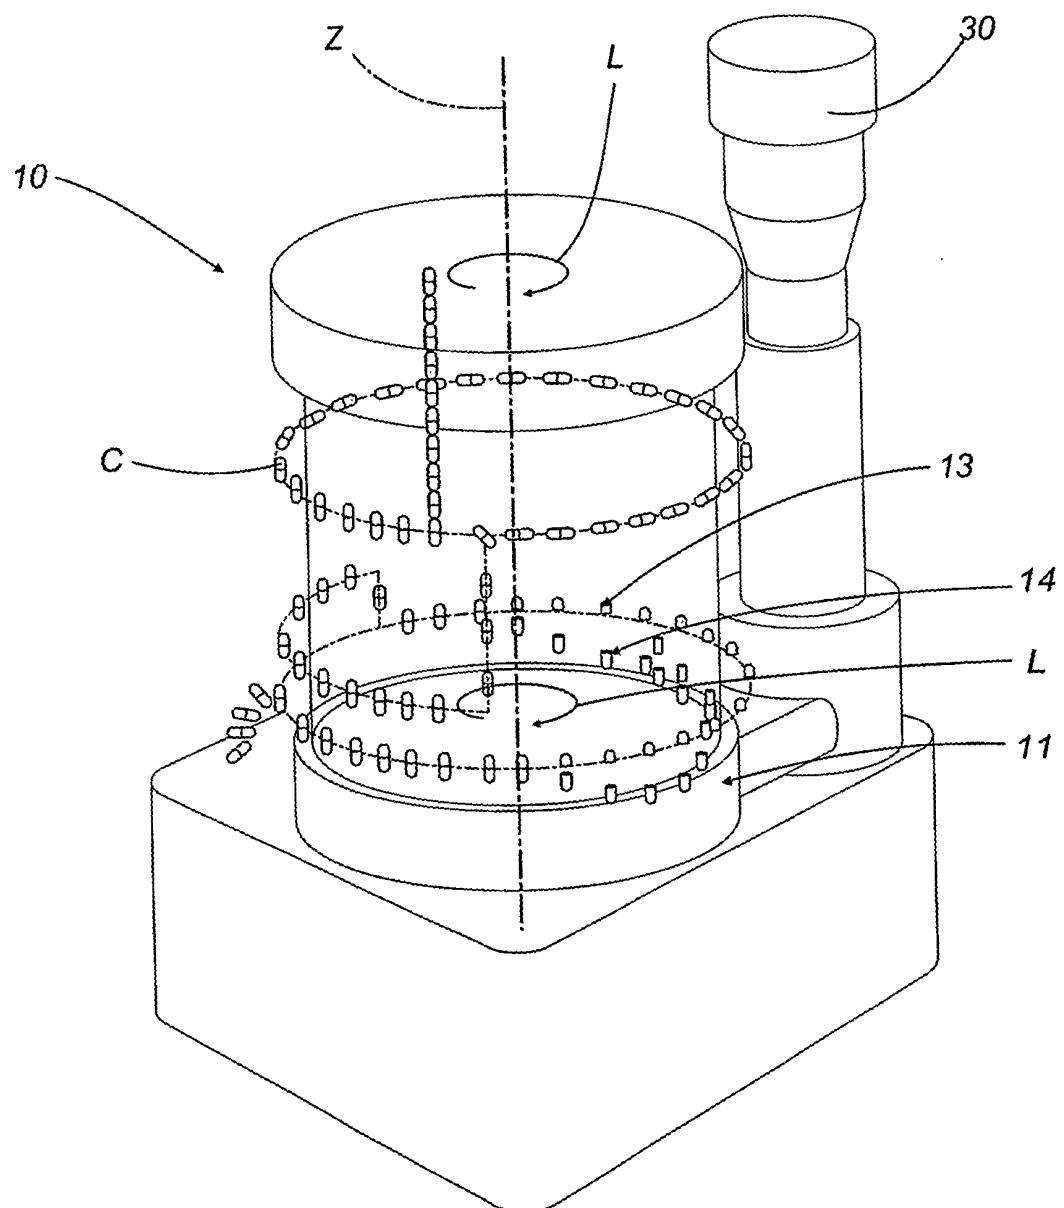


FIG.2

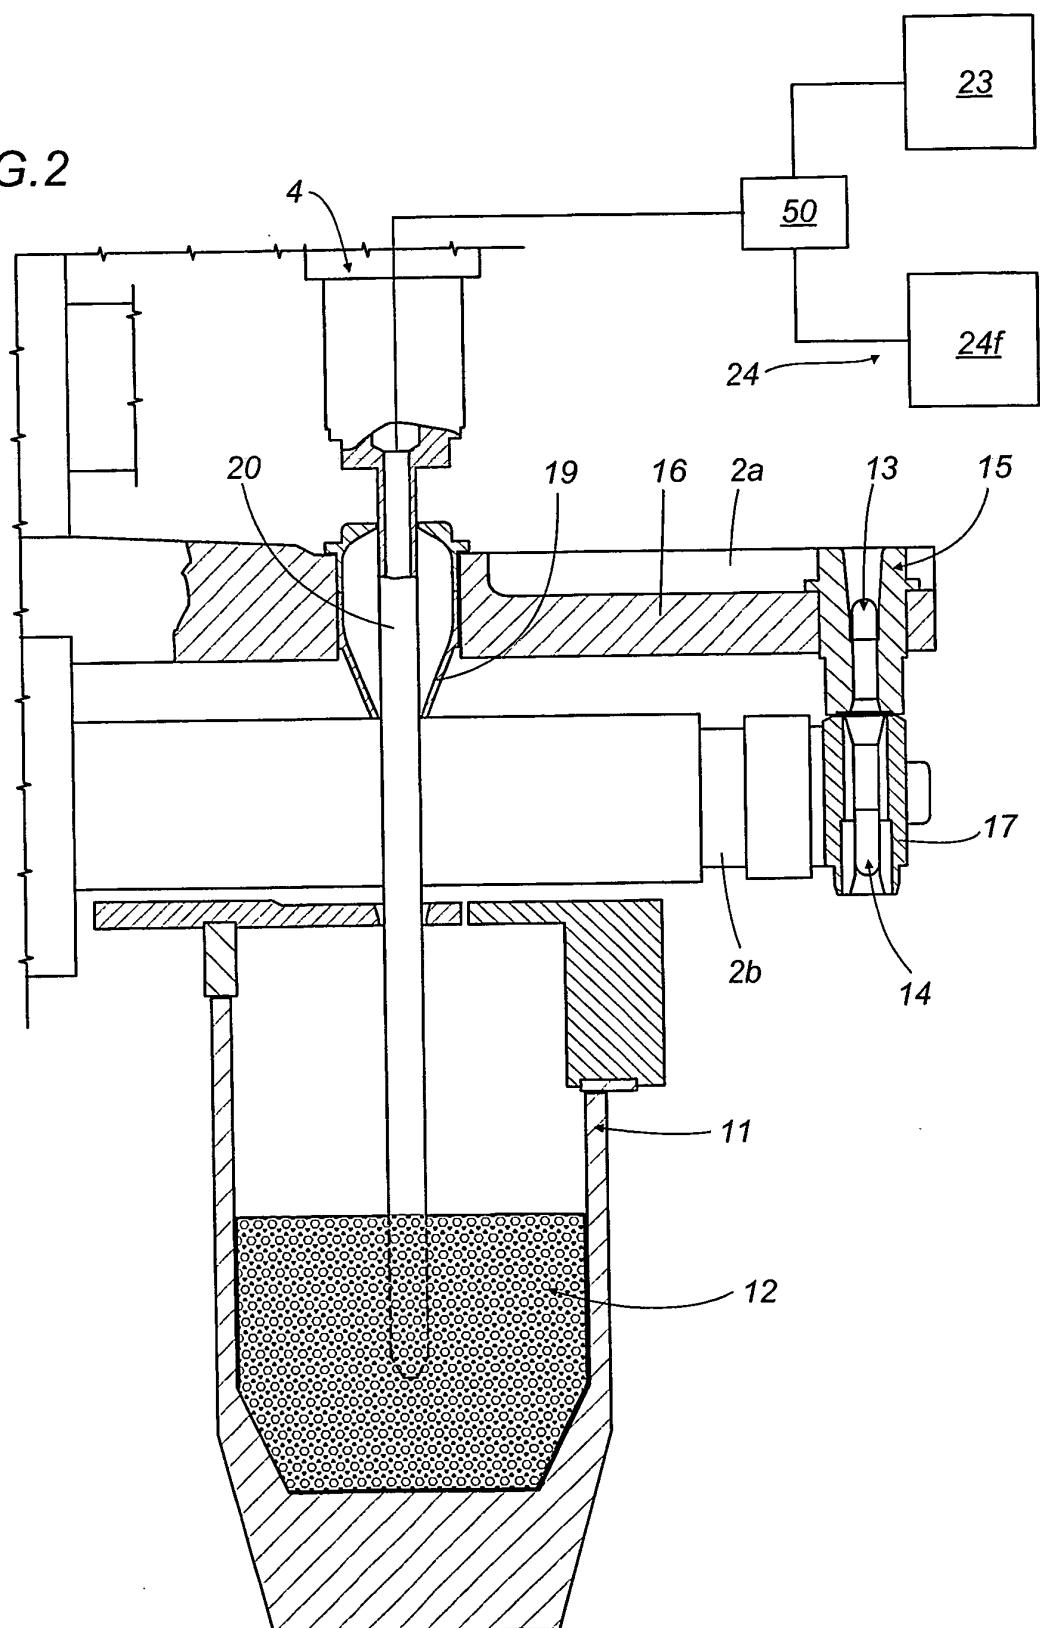


FIG.3

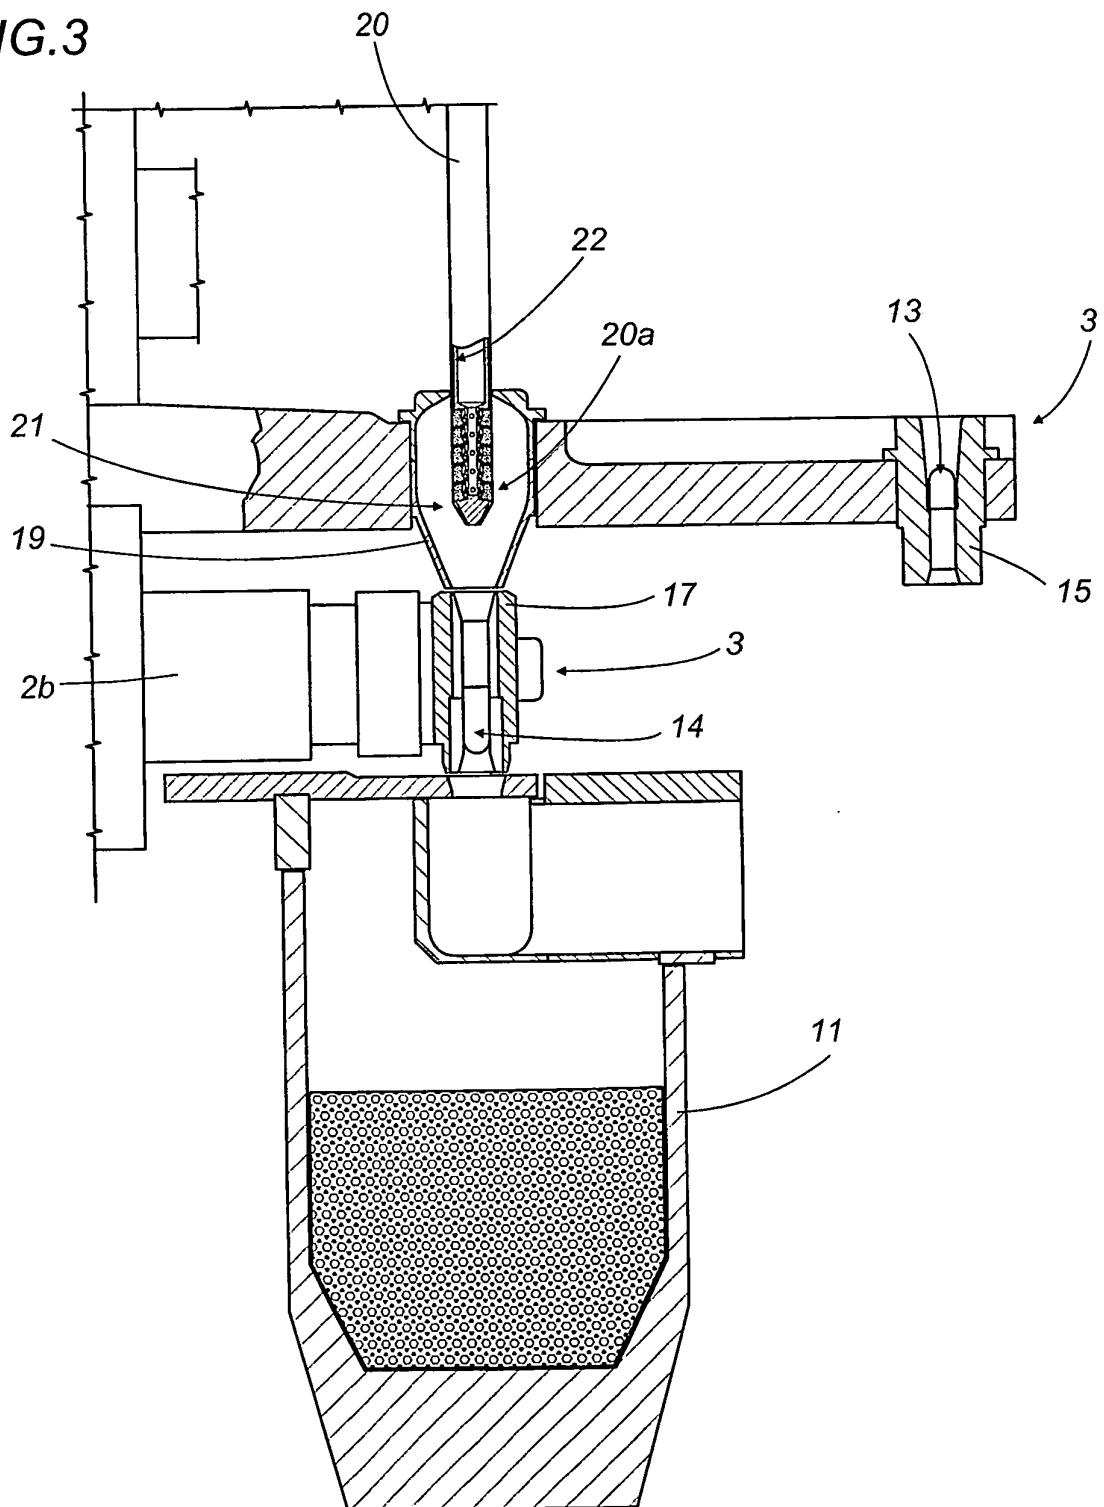


FIG.4

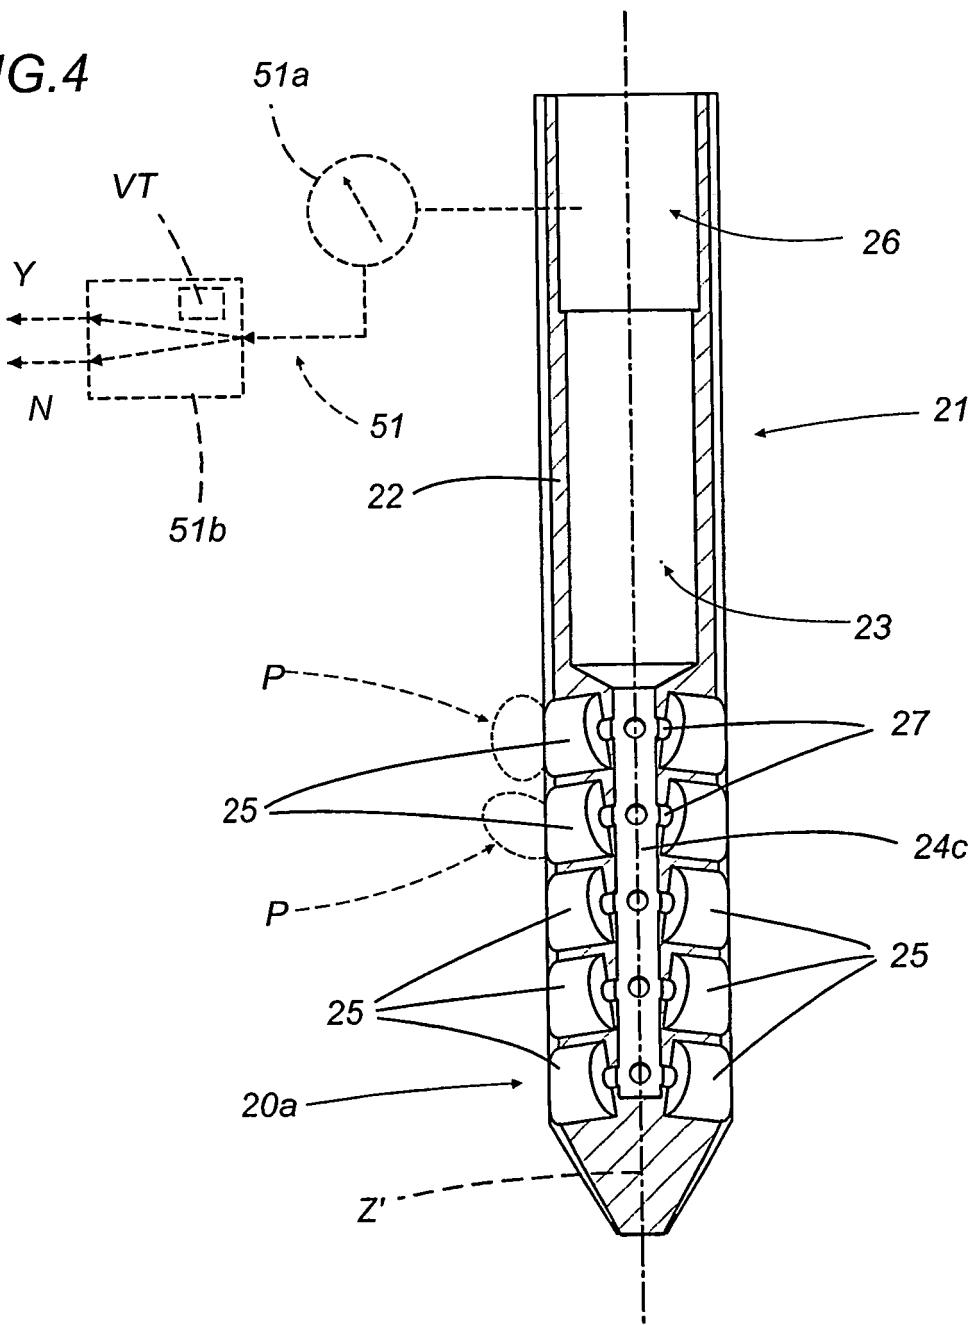


FIG.5


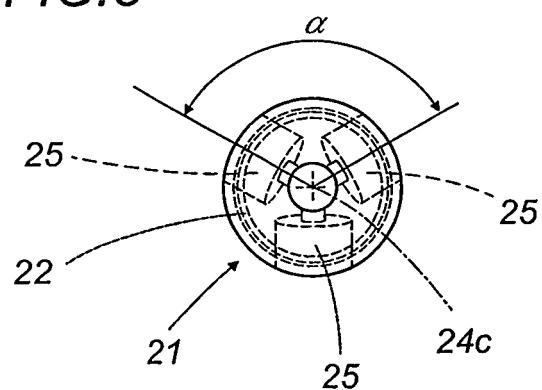


FIG.6

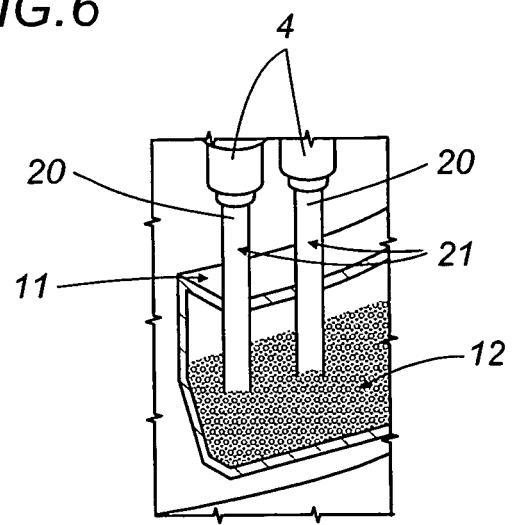

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 0170171 A [0003]