



(43) International Publication Date
28 January 2016 (28.01.2016)

- | | |
|--|--|
| <p>(51) International Patent Classification:
 <i>E21B 10/26</i> (2006.01) <i>E21B 7/28</i> (2006.01)
 <i>E21B 10/32</i> (2006.01)</p> | <p>(71) Applicant (for all designated States except AE, AO, BH, CA, CN, FR, GB, GH, IN, JP, LY, MA, MZ, NA, NG, NL, PH, SD, SY, US, VN): SCHLUMBERGER TECHNOLOGY B.V. [NL/NL]; Parkstraat 83-89m, NL-2514 JG The Hague (NL).</p> |
| <p>(21) International Application Number:
 PCT/US2015/040295</p> | <p>(71) Applicant (for AE, AO, BF, BH, BJ, CF, CG, CI, CM, CN, GA, GH, GN, GQ, GW, IN, KM, LY, MA, ML, MR, MZ, NA, NE, NG, PH, SD, SN, SY, TD, TG, VN only): PRAD RESEARCH AND DEVELOPMENT LIMITED; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Islands, British, 1110 (VG).</p> |
| <p>(22) International Filing Date:
 14 July 2015 (14.07.2015)</p> | <p>(71) Applicant (for US only): SCHLUMBERGER TECHNOLOGY CORPORATION [US/US]; 300 Schlumberger Drive, Sugar Land, Texas 77478 (US).</p> |
| <p>(25) Filing Language: English</p> | <p>(72) Inventors: HIRD, Jonathan Robert; High Cross, Madingley Road, Cambridge Cambridgeshire CB3 0EL (GB). JOHNSON, Ashley Bernard; High Cross, Madingley Road, Cambridge Cambridgeshire CB3 0EL (GB). TUNC, Gokturk; High Cross, Madingley Road, Cambridge Cambridgeshire CB3 0EL (GB).</p> |
| <p>(26) Publication Language: English</p> | <p>(74) Agent: GAHLINGS, Steven; 10001 Richmond Avenue, IP Administration Center of Excellence, Room 4720, Houston, Texas 77042 (US).</p> |
| <p>(30) Priority Data:
 1412930.8 21 July 2014 (21.07.2014) GB
 1503380.6 27 February 2015 (27.02.2015) GB</p> | <p>(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,</p> |
| <p>(71) Applicant (for CA only): SCHLUMBERGER CANADA LIMITED [CA/CA]; 125 - 9 Avenue SE, Calgary, Alberta T2G 0P6 (CA).</p> | |
| <p>(71) Applicant (for FR only): SERVICES PETROLIERS SCHLUMBERGER [FR/FR]; 42 rue Saint Dominique, F-75007 Paris (FR).</p> | |
| <p>(71) Applicant (for GB, JP, NL only): SCHLUMBERGER HOLDINGS LIMITED; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Islands, British, 1110 (VG).</p> | |

[Continued on next page]

(54) Title: REAMER

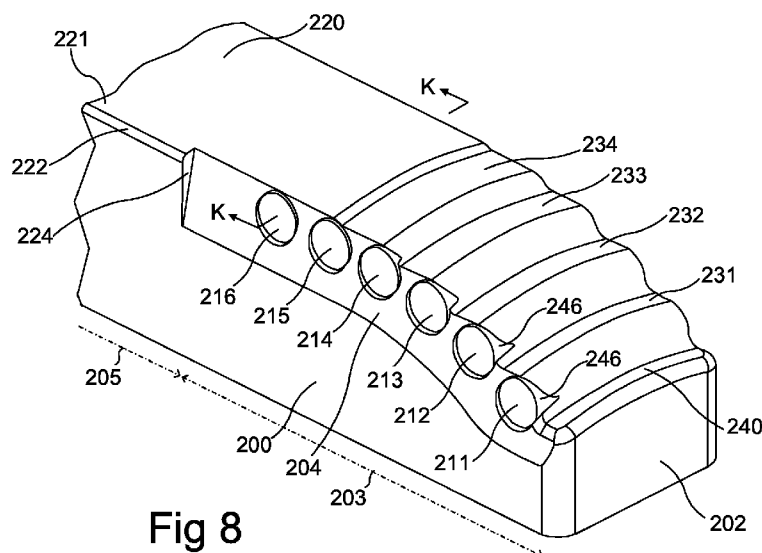


Fig 8

(57) Abstract: A reamer for enlarging an underground borehole comprises a plurality of cutter assemblies distributed azimuthally around a longitudinal axis of the tool. Each cutter assembly comprises a supporting structure and a plurality of hard faced cutters secured therein with a hard surface of each cutter exposed and facing in a direction of rotation of the tool and extending radially outwards from the tool axis to a radially outward extremity. These cutters are arranged in a sequence extending axially along the tool. In contrast with conventional cutter assemblies, the supporting structure comprises at least one radially outward-facing surface which is positioned to follow behind the leading face of at least one cutter as the tool rotates and which is aligned with the radially outer extremity of the cutter at the same radial distance from the tool axis. Thus the surface area available to contact the borehole wall and stabilise the positioning and motion of the rotating reamer is enhanced.



AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

REAMER

BACKGROUND

[0001] One practice which may be employed when drilling a borehole is to enlarge a hole with a reamer. A reamer may be constructed to have a fixed diameter, in which case the reamer must start cutting at the surface or at the end of an existing hole of equal or greater size. Alternatively a reamer can be constructed so as to be expandable so that it can enlarge a borehole to a greater diameter than that of the hole through which the (unexpanded) reamer was inserted.

[0002] Enlarging a borehole with a reamer may be done as a separate operation to enlarge an existing borehole drilled at an earlier time. Enlarging with a reamer may also be done at the same time as using a bottom hole assembly which has a drill bit at its bottom end. The drill bit makes an initial hole, sometimes referred to as pilot hole, and a reamer positioned at some distance above the drill bit increases the hole diameter.

[0003] There is more than one type of reaming tool. Some reamers are constructed to be eccentric, relative to the drill string to which they are attached and the borehole which they are enlarging. Other reamers are constructed to remain concentric with the drill string and the borehole. These different types of reamers tend to be used in different circumstances. There are many instances where concentric reamers are the appropriate choice.

[0004] A reamer may have a plurality of cutter assemblies, each comprising a support structure with attached cutters, arranged azimuthally around the axis of the tool. In the case of an expandable reaming tool it is common to have a plurality of radially expandable support elements bearing cutters positioned around the axis of the tool. Often the tool has three such cutter assemblies which extend axially and are arranged at 120° intervals azimuthally around the tool axis. A mechanism is provided for expanding these cutter assemblies radially outwardly from the axis and this mechanism typically uses hydraulic pressure to force the support structures of the cutter assemblies outwardly.

[0005] This tool construction has commonly been used for concentric reamers. In some constructions, each of the individual cutter assemblies arranged around the tool axis is an assembly of parts attached together so as to move bodily as one piece, in which case the

assembly is often referred to as a “block” (one part of this assembly may be a shaped monolithic block) although the term “arm” has also been used for such an assembly. The individual cutter assemblies (i.e. individual blocks) may be moved outwards in unison by one drive mechanism acting on them all, or may be moved outwards by drive mechanism(s) which does not constrain them to move in unison.

[0006] Cutters attached to the supporting structure may be hard faced and may be PDC cutters having body with a polycrystalline diamond section at one end. The body may be moulded from hard material such as tungsten carbide particles infiltrated with metallic binder. The polycrystalline diamond section which provides the cutting part may then comprise particles of diamond and a binder. In many instances, the polycrystalline diamond section is a disc so that the hardest end of a cutter is a flat surface but other shapes can also be used.

[0007] Reamer designs customarily position at least some cutters with their cutting faces at the leading face of a support structure and with the cutters projecting radially outwardly from the support structure. The parts of the cutter which project outwardly beyond the support structure may be the parts of the cutter principally involved in cutting as the rotating reamer is advanced and/or as an expandable reamer is expanded.

[0008] The greatest radius swept by a reamer (so-called full gauge) may be the radial distance from the axis to the extremity of the outermost cutter(s). In order to position a reamer centrally in the reamed bore, it is customary for a supporting structure to include a section which does not include cutters but has a so-called gauge pad (alternatively spelt “gage pad”) which is a surface positioned to confront and slide on the wall of the reamed bore. In an expandable reamer, it is known to position gauge pads at a radius which is slightly less than full gauge so as to facilitate cutting during the period when the reamer is being expanded.

[0009] It is desirable that a reamer maintains stable cutting behaviour, centred on the axis of the existing bore, even though it has significant mass of collars and other drill string components placed above and/or below it. Yet frontal area in frictional contact with the formation, which helps to dampen oscillations, is smaller than with a drill bit of the same diameter. It has been observed that reamers tend to be more prone to the phenomenon of

whirling than are drill bits. In this context, whirling refers to a motion in which the tool axis moves around a centre line rather than staying on it, leading to a mis-shaped or oversized borehole.

SUMMARY

[0010] This summary is provided to introduce a selection of concepts that are further described below. This summary is not intended to be used as an aid in limiting the scope of the subject matter claimed.

[0011] In one aspect, the subject matter disclosed here provides a reaming tool for enlarging an underground borehole, comprising a plurality of cutter assemblies distributed azimuthally around a longitudinal axis of the tool, wherein each cutter assembly comprises support structure with one or more regions, each of which has at least one cutter secured therein with a leading face of the cutter at least partially exposed and facing in a direction of rotation of the tool and wherein an outward-facing surface of the said region of the support structure, behind the leading face of the cutter, is aligned with an outer extremity of the cutter so that the cutter does not project outwardly beyond the notional surface swept out by the support structure as the reamer rotates. Cutters may be at least partially embedded in the support structure.

[0012] Such features may enhance stability during cutting in either or both of two ways. The surface which is aligned with the extremity of a cutter may function as a gauge pad at the same gauge as the cutter and so there is an increase in the gauge pad area compared with an otherwise similar cutter assembly which has the embedded cutter projecting outwardly beyond the support structure around the cutter. Secondly, placing the outward-facing surface at the same radius as the cutter extremity reduces opportunity for a projecting cutter extremity to act as a point around which the tool transiently pivots.

[0013] A surface of the support structure which is at the radius of a cutter extremity and so is aligned with that extremity may comprise an area extending directly back from the leading face of the cutter. Such a surface may overlie at least part of the embedded body of a cutter.

Such a surface of the support structure may occupy an area adjacent to a cutter, and this may be behind its leading face but alongside the cutter body.

[0014] Each cutter assembly may have a plurality of cutters associated with one or more outward-facing surfaces aligned with the outer extremities of the cutters. One possibility is that a region of the supporting structure has a row of cutters embedded or otherwise held in it, all with outer extremities at the same radius. The support structure may then have a surface at the same radius which extends behind the leading faces of the row of cutters and so is associated with the whole row. The extremities of the cutters in the row, and the aligned outward surface of the support structure may be at the maximum radius swept by the tool as it rotates, so that the outward surface provides a gauge pad at full gauge.

[0015] Another possibility is that the support structure has a succession of regions each having one or more embedded cutters and an outward surface aligned with the cutter extremities, but where the radii of the cutter extremities and the aligned outward surfaces differs from one region to the next. The radii may increase progressively from one end of the cutter assembly (i.e. diminishes progressively towards one end) thus providing a sequence of cutters positioned to cut at progressively increasing radii as the reamer advances axially, and eventually reach a region with the maximum radius swept by the tool so the outward surface at this region is a gauge pad at full gauge. The outward surfaces of the regions at smaller radii may serve as secondary gauge pads, sliding over areas of formation which will subsequently be cut into as the tool advances axially.

[0016] Another aspect of the subject matter disclosed here may be defined as a reaming tool for enlarging an underground borehole, comprising a plurality of cutter assemblies distributed azimuthally around a longitudinal axis of the tool, wherein each cutter assembly comprises a supporting structure and a plurality of cutters secured therein with a leading surface facing in a direction of rotation of the tool and extending radially outwards from the tool axis to a radially outward extremity, and the supporting structure providing one or more radially outward facing surfaces positioned to follow behind the leading surface of at least one cutter as the tool rotates and aligned with the radially outer extremity of the cutter at the same radial distance from the tool axis.

[0017] Another feature which may be employed to enhance stability in the borehole is to provide one or more gauge surfaces ahead of cutters. Thus in a further inventive aspect of subject matter disclosed here, a reaming tool comprises a plurality of cutter assemblies each of which comprises a supporting structure and a plurality of hard faced cutters secured therein with a hard face of each cutter at least partially exposed and facing in a direction of rotation of the tool, wherein each cutter assembly includes at least one outward-facing gauge surface which extends in the direction of rotation circumferentially ahead of the extremity of the radially outer extremity of at least one cutter. This gauge surface may be aligned with the outer extremity of the hard face of the cutter. The extremity of the hard face of the cutter (or cutters) may be set back from a leading face of the cutter assembly while the gauge surface extends forwardly of the cutter or cutters towards the leading side face. The gauge surface may connect to a side face of the assembly through an inclined or curved surface.

[0018] When the support structure has outward facing surfaces at differing radii, some zones of the surface of the support structure will face obliquely or directly towards the end of the tool and hence towards formation rock which is to be removed as the reamer advances axially. Such zones are potentially a point where contact with formation rock will impede axial advance. To facilitate axial advance of the tool, zones of the outer face of the cutter assembly which face generally towards the end of the tool may be shaped so that their distance from the end of the tool increases as they extend back (i.e. extend oppositely to the direction of rotation) from leading faces of the cutters. This allows the tool to advance axially although it may also limit or control the rate of advance.

[0019] A surface zone facing in such a direction towards the axial end of the tool such that it may potentially impede axial advance may possibly be defined as an area of the outer surface of the cutter assembly within which all lines perpendicular to the zone surface are at no more than 45° to the tool axis.

[0020] Axial advance of the tool may also be facilitated by employing cutter assemblies which are similar, but not identical. Cutters and axially facing zones of the outer face of one cutter assembly may be further from the end of that assembly than is the case for the corresponding cutters and surface zones of another cutter assembly.

[0021] A combination of features which is a further aspect of novel subject matter disclosed here is a reaming tool for enlarging an underground borehole, comprising a plurality of cutter assemblies distributed azimuthally around a longitudinal axis of the tool, wherein each cutter assembly includes a supporting structure bearing a *sequence* of cutters which have leading surfaces facing in a direction of rotation of the tool, the outer face of each cutter assembly includes one or more zones facing axially towards the end of the tool, and the distance between each said zone on a assembly and the axial end of the assembly increases in a direction extending circumferentially back from the leading surfaces of the cutters, and wherein an arrangement of the relative positions of cutters and axially facing zones is the same on a plurality of cutter assemblies but is positioned at differing distances from an axial end of the assemblies, such that the axially facing zones on the assemblies lie on a helix around the axis of the tool.

[0022] An arrangement in which surface zones facing in a direction which is axial or partly axial relative to the tool are positioned on a helix rather than having their circumferential extent directly transverse to the tool axis will permit axial advance of the tool, but will also place a limit on the rate of advance. The inventors have found that this is not a problem, because the rate of advance can be at least as good as a rate achieved with conventional cutter assemblies. Such an arrangement can be an advantage, especially when a reamer is used to enlarge an existing borehole drilled at an earlier time. If the formation which is being cut has variable resistance to being removed and there is no limitation on the speed of advance, energy which has become stored in the drill string can be released as an abrupt jerk forward, adding to vibration.

[0023] Cutters used in accordance with the concepts disclosed above may have hard surfaces exposed or partially exposed as the leading faces of the cutters. These hard surfaces may be planar but other shapes, such as a domed or conical shape, are possible. Hard surfaced cutters may be polycrystalline diamond (PDC) cutters which have diamond crystals embedded in a binder material providing a hard face at one end of a cutter body. The radially outer extremity of a cutter may be located at a point at which the circular or other shape of the exposed leading face reaches its maximum distance from the tool axis. However, another possibility is that the cutter is shaped and positioned so that its outer extremity is not a point

but is a linear edge parallel to the tool axis or an approximately planar face extending back from such an edge.

[0024] Conventional cutter assemblies have sometimes provided cutters in two sequences extending axially along the assembly, one behind the other in the direction of rotation. Within each sequence, each cutter is alongside, but axially spaced from another cutter of the sequence. The inventors have found that good results can be obtained when the cutters of a cutter assembly are arranged as a single sequence of cutters.

[0025] In further aspects, this disclosure includes methods of enlarging a borehole by rotating any reaming tool as defined above in the borehole and advancing the tool axially. The method may include expanding a reaming tool which has expandable cutter assemblies and then rotating the tool while also advancing the expanded tool axially.

[0026] In such a method the reaming tool may cut into the geological formation through which the borehole extends. It is also possible to ream and enlarge the internal diameter of tubing inserted within a borehole, even to the extent that tubing is removed.

BRIEF DESCRIPTION OF DRAWINGS

[0027] Fig. 1 is a schematic, cross-sectional view of a drilling assembly in a borehole;

[0028] Fig. 2 is a cross-sectional elevation view of one embodiment of expandable reamer, showing its expandable cutter blocks in collapsed position;

[0029] Fig. 3 is a cross-sectional elevation view of the expandable reamer of Fig. 2, showing the cutter blocks in expanded position;

[0030] Fig. 4 is a perspective view of a cutter block for the expandable reamer of Figs 2 and 3;

[0031] Fig. 5 is a schematic, cross-sectional view of the reamer expanded in a pre-existing borehole;

[0032] Fig 6 is a detail view of a PDC cutter;

[0033] Fig 7 is a cross section on line J-J of Fig 4;

[0034] Fig 8 is an isometric drawing of the lower cutting portion of the outer part of a cutter block, shown with the axial direction of the tool horizontal;

[0035] Fig 9 is a side view of the lower cutting portion shown in Fig 8, also with the axial direction of the tool horizontal;

[0036] Fig 10 is a cross section on the line K-K of Figs 8 and 9;

[0037] Fig 11 is a diagrammatic enlarged view showing one cutter of Fig 9;

[0038] Fig 12 is an enlarged radial view onto the end portion of a cutter block in the direction of arrow R in Fig 9;

[0039] Fig 13 is a radial view onto the lower cutting portions of three cutter blocks;

[0040] Fig 14 is a radial view onto the lower cutting portion of a cutter block, similar to that in Fig 12 but with the axis of the tool vertical;

[0041] Fig 15 diagrammatically illustrates positioning on a helix;

[0042] Fig 16 shows the outer parts of three cutter blocks in three-quarter view;

[0043] Fig 17 is a section on line K-K of any of the three cutter blocks of Fig 16;

[0044] Fig 18 is an isometric drawing showing a modification to the block of Fig 8;

[0045] Fig 19 is a cross section similar to Fig 10 but showing other modifications;

[0046] Figs 20 and 21 are isometric drawings showing further modifications to the block of Fig 8;

[0047] Fig 22 is a section on line K-K of Fig 21;

[0048] Fig 23 is a perspective view of a cutter block for a further embodiment of expandable reamer;

[0049] Fig 24 is a cross sectional elevation showing part of a tool with cutter blocks as in Fig 23, in use to remove tubing; and

[0050] Fig 25 is a cross section on the line M-M of Fig 24.

DETAILED DESCRIPTION

[0051] Fig. 1 shows an exemplary drilling assembly which includes an expandable under-reamer 122. A drill string 112 extends from a drilling rig 110 into a borehole. An upper part of the borehole has already been lined with casing and cemented as indicated at 114. The drill string 112 is connected to a bottomhole assembly 118 which includes a drill bit 120 and an under-reamer 122 which has been expanded beneath the cased section 114. As the drill string 112 and bottomhole assembly 118 are rotated, the drill bit 120 extends a pilot hole 124 downwards while the reamer 122 simultaneously opens the pilot hole 124 to a larger diameter borehole 126.

[0052] The drilling rig is provided with a system 128 for pumping drilling fluid from a supply 130 down the drill string 112 to the reamer 122 and the drill bit 120. Some of this drilling fluid flows through passages in the reamer 122 and flows back up the annulus around the drill string 112 to the surface. The rest of the drilling fluid flows out through passages in the drill bit 120 and also flows back up the annulus around the drill string 112 to the surface. The distance between the reamer 122 and the drill bit 120 at the foot of the bottom hole assembly is fixed so that the pilot hole 124 and the enlarged borehole 126 are extended downwardly simultaneously.

[0053] As shown in Fig 5, it would similarly be possible to use the same reamer 122 attached to drill string 112, although without the drill bit 120 and the part of the bottom hole assembly 118 shown below the reamer 122 in Fig 1, to enlarge a borehole 125 which had been drilled previously. In Fig 5, the initial expansion of the reamer has created a fairly short section where the borehole has enlarged diameter. This enlarged portion of the borehole can then be elongated downwardly by advancing the drill string 112 and reamer 122 downwardly.

[0054] Referring now to Figs. 2 and 3, one embodiment of expandable reaming tool is shown in a collapsed position in Fig. 2 and in an expanded position in Fig. 3. The expandable tool comprises a generally cylindrical tool body 510 with a central flowbore 508 for drilling fluid. The tool body 510 includes upper 514 and lower 512 connection portions for connecting the tool into a drilling assembly. Intermediately between these connection

portions 512, 514 there are three recesses 516 formed in the body 510 and spaced apart at 120° intervals azimuthally around the axis of the tool.

[0055] Each recess 516 accommodates a cutter support element 140 in its collapsed position. This support element has the general form of a block to which cutters are attached. One such cutting block 140 is shown in perspective in Fig. 4. The block 140 has an outer face 144 which confronts the wall of the borehole and side faces with protruding ribs 142 which extend at an angle to the tool axis. These ribs 142 engage in channels 518 at the sides of a recess 516 and thus provide a guide mechanism such that when the block 140 is pushed upwardly relative to the tool body 510, it also moves radially outwardly to the position shown in Fig. 3 in which the blocks 140 extend radially outwardly from the tool body 510. The blocks move in unison and so are all at the same axial positions relative to the tool body. Details of the outer face 144 of a block 140 have been omitted from Figs 2 and 3.

[0056] A spring 540 biases the block 140 downwards to the collapsed position of Fig. 2. The biasing spring 540 is disposed within a spring cavity 545 and covered by a spring retainer 550 which is locked in position by an upper cap 555. A stop ring 544 is provided at the lower end of spring 540 to keep the spring in position.

[0057] Below the moveable blocks 140, a drive ring 570 is provided that includes one or more nozzles 575. An actuating piston 530 that forms a piston cavity 535 is attached to the drive ring 570. The piston 530 is able to move axially within the tool. An inner mandrel 560 is the innermost component within the tool 500, and it slidably engages a lower retainer 590 at 592. The lower retainer 590 includes ports 595 that allow drilling fluid to flow from the flowbore 508 into the piston chamber 535 to actuate the piston 530.

[0058] The piston 530 sealingly engages the inner mandrel 560 at 566, and sealingly engages the body 510 at 534. A lower cap 580 provides a stop for the downward axial movement of piston 530. This cap 580 is threadedly connected to the body 510 and to the lower retainer 590 at 582, 584, respectively. Sealing engagement is provided at 586 between the lower cap 580 and the body 510.

[0059] A threaded connection is provided at 556 between the upper cap 555 and the inner mandrel 560 and at 558 between the upper cap 555 and body 510. The upper cap 555

sealingly engages the body 510 at 505, and sealingly engages the inner mandrel 560 at 562 and 564.

[0060] In operation, drilling fluid flows along path 605, through ports 595 in the lower retainer 590 and along path 610 into the piston chamber 535. The differential pressure between the fluid in the flowbore 508 and the fluid in the borehole annulus surrounding tool 500 causes the piston 530 to move axially upwardly from the position shown in Fig. 2 to the position shown in Fig. 3. A small amount of flow can pass through the piston chamber 535 and through nozzles 575 to the annulus as the tool 500 starts to expand. As the piston 530 moves axially upwardly, it urges the drive ring 570 axially upwardly against the blocks 140. The drive ring pushes on all the blocks 140 simultaneously and moves them all axially upwardly in recesses 516 and also radially outwardly as the ribs 142 slide in the channels 518. The blocks 140 are thus driven upwardly and outwardly in unison towards the expanded position shown in Fig. 3.

[0061] The movement of the blocks 140 is eventually limited by contact with the spring retainer 550. When the spring 540 is fully compressed against the retainer 550, it acts as a stop and the blocks can travel no further. There is provision for adjustment of the maximum travel of the blocks 140. The spring retainer 550 connects to the body 510 via a screwthread at 551. A wrench slot 554 is provided between the upper cap 555 and the spring retainer 550, which provides room for a wrench to be inserted to adjust the position of the screwthreaded spring retainer 550 in the body 510. This allows the maximum expanded diameter of the reamer to be set at the surface. The upper cap 555 is also a screwthreaded component and it is used to lock the spring retainer 550 once it has been positioned.

[0062] Fig 4 is a perspective view of a cutter block 140 showing the outer face of the block and the side face which is the trailing face in the direction of rotation. There is a conventional arrangement of cutters on the outer face. The block is formed of an inner part 145 and an outer part 146 bolted to the part 145 by bolts (not shown). The inner part 145 is steel and incorporates the protruding ribs 142. The outer part 146 of the block 140 is also steel and has polycrystalline diamond (PDC) cutters secured to it.

[0063] As shown in Fig 6 such cutters have a sintered disc 150 of diamond crystals embedded in a binder material. This disc is at one end of a cylindrical body 152 which may

be a sintered mass of tungsten carbide particles and a binder material. The bodies 152 of cutters are secured, for example by brazing, to the outer part 146 of the block 140 so that the hard faces 154 of the cutters are exposed. Although the cutter shown in Fig 6 has a hard surface 154 which is a flat face, other shapes including cones can be used for the hard surface.

[0064] The outer part 146 of the block 140 has upper and lower cutting portions 160, 162 on which PDC cutters are arranged in a leading row of cutters 164 and a following row of cutters 166. It will be appreciated that the upper and lower cutting portions 160, 162 are inclined (they are curved as shown) so that the cutters in these regions extend outwards from the tool axis by amounts which are least at the top and bottom ends of the block 140 and greatest adjacent the middle section 168 which includes stabilising pad 170.

[0065] When a reamer is advanced downwardly within a hole to enlarge the hole, it is the curved lower cutting portions 162 which do the work of cutting through formation rock. This takes place in Figs 1 and 5 as the drill string is advanced. The enlarged portion of the borehole can also be extended upwardly using the cutting portions 160 on the blocks 140 to remove formation rock while pulling upwardly on the drill string 112.

[0066] The stabilising pad 170 does not include cutters but has a generally smooth, part-cylindrical outward surface positioned to face and slide over the borehole wall. To increase resistance to wear, the stabilising pad 170 may have pieces 172 of harder material embedded in it and lying flush with the outward facing surface.

[0067] Fig 7 is a section on line J-J of Fig 4 showing one PDC cutter 167 mounted to the outer part 146 of the block 142. The cutter 167 is partially embedded in the outer part 146 and is oriented so that the hard face 154 will be facing forwards when the reamer is rotated. The direction of rotation is indicated by arrow 180. This hard face extends outwards to an extremity 156 which is at the maximum radius swept by the rotating reamer (i.e. its full gauge). The extremities of the other PDC cutters secured to the middle region 168 are also at the maximum radius swept by the rotating reamer. The outer surface of the stabilising pad 170 is positioned slightly radially inward from the extremities 156 of the cutters. The axially facing surface of the stabilising pad is indicated at 174 and the outer surface of the support structure in which the cutters are embedded is indicated at 176. This arrangement in which

cutter extremities are at full gauge and pads 170 are slightly under gauge is conventionally used with an aim that the cutters protrude slightly and are able to cut as the reamer is being expanded, so that stabilising pads 170 do not impede expansion of the reamer.

[0068] Without limitation as to theory, the inventors believe that the extremity 156 of a cutter can become a pivot point, for instance if the extremity 156 snags briefly on the rock wall of the borehole as the reamer is rotated, rather than cutting steadily through the rock. The reamer may attempt to turn bodily around this pivot point in the direction indicated by arrow 182. The inventors believe this may initiate whirling motion even though other cutter blocks of the reamer may oppose or limit such pivoting.

[0069] The reamer as described above, referring to Figs 1 to 7, is of a conventional construction. Figs 8 onwards show parts of expandable reamers which utilise much of this conventional construction but have cutter arrangements and cutter blocks in accordance with the novel concepts disclosed here. Specifically, the reamers of Figs 8 to 22 utilise the expandable construction shown in Figs 2 and 3 and have cutter blocks with inner and outer parts as in Fig 4. However, the construction of the outer parts of the cutter blocks and the arrangement of the cutters on the blocks is different from that shown in Fig 4 and is in accordance with novel aspects of the present disclosure.

[0070] As with the conventional construction, the outer part of each cutter block is a steel support structure for PDC cutters. Figs 8 to 10 show the lower cutting portion of the outer part of a cutter block. In these figures the tool axis is shown as horizontal. The block has a side face 200 which is the leading face in the direction of rotation and it has a lower axial end face 202. For part of its length indicated 203, the side of the block has an area 204 which is slanted back as shown by Fig 10. The trailing face of the block is indicated 207 in Fig 10.

[0071] A row of PDC cutters 211-216 is positioned with the hard surfaces of the cutters exposed within the slanted area 204 of the leading face of the block. The cutters are fitted into sockets in the steel supporting structure and secured by brazing so that they are embedded in the supporting structure. The cutters 211-215 are positioned at progressively increasing radial distances from the tool axis. The next cutter 216 is at the same radial distance from the tool axis as cutter 215.

[0072] These cutters 211-216 are arranged in a single sequence with the cutters side by side and these are the only cutters on the lower portion of the cutter block. In contrast with Fig 4, there is no second row of cutters behind.

[0073] This length 203 of the block with the slanted area 204 and cutters 211-216 adjoins a length 205 which does not include cutters and provides a stabilising pad with a part-cylindrical outward facing surface 220 which includes a leading region 221 which extends forwardly (in the direction of rotation) of the cutter 216. The leading side surface 200 of the block extends outwards to meet the region 221 of surface 220 at an edge 222 with the consequence that there is a surface 224 facing axially at one end of the slanted area 204. As best seen in the cross-section which is Fig 10, the edge 222 is a curved transition between the surfaces 200 and 220.

[0074] The outer surface 220 of the stabilising pad is at the full gauge of the reamer and so when the cutter blocks are fully expanded, the outer surface 220 is part of a cylinder which is centred on the tool axis and lies on the notional surface swept out by the rotating tool. The outer extremities of the cutters 215 and 216 are also at the full gauge of the reamer and also lie on this notional surface. This notional surface is akin to a surface of revolution, because it is the surface swept out by a rotating body, but of course the reamer may be advancing axially as it rotates.

[0075] The outer surface 220 extends axially over the cutter 216 and over half of cutter 215. Thus, as shown by the cross-section in Fig 11, the cutter 216 (and also cutter 215) has its extremity 218 aligned with outwardly facing surface area which is behind the leading faces of these cutters 215, 216 and follows these leading faces as the reamer rotates.

[0076] The block thus has a surface 220 which faces outwardly at full gauge, which is larger than the surface area within the length 205 of the stabilising pad, and which is available to stabilise the position of the tool within the borehole. Moreover, because this surface 220 lies close to or slides on the borehole wall, the extent of any pivoting around the cutter extremities is reduced.

[0077] A further enhancement of stability is that the shape of the block inhibits any pivoting around the extremities of cutters during rotation. If the extremity 218 snags on the borehole wall, any pivoting around the extremity 218 in the sense seen as clockwise and denoted by

arrow 182 in Fig 10 is limited by the leading region 221 of surface 220 abutting the borehole wall. Pivoting in the opposite sense is less likely but is limited by the trailing part of surface 220 abutting the borehole wall. The leading edge 222 is formed as a smooth curve so as to inhibit this leading edge from snagging on the borehole wall during rotation.

[0078] The cutters 211-214 are embedded in the outer part of the block in a similar manner to the cutters 215, 216. The outer face of the block includes part-cylindrical surfaces 231-234 which extend behind the leading faces of cutters 211-214 respectively and which are aligned radially with the extremities of the respective cutters. Each of the part-cylindrical surfaces 231 -234 has a radius which lies on the tool axis when the cutter blocks are fully expanded.

[0079] These surfaces 231-234 act as secondary gauge areas: the surface 231 slides over rock which has just been cut by the action of cutter 211, surface 232 slides over rock cut by cutter 232 and so on. Of course, the rock surfaces created by cutters 211-214 have only a transient existence. They are cut away by cutters at a greater radius as the reamer advances. Nevertheless, this provision of secondary gauge areas contributes to stabilisation of the position of the rotating reamer.

[0080] The outer face of the block includes portions connecting the part cylindrical surfaces 231-234. Referring to Fig 11, from the surface 232 towards surface 231 the outer face of the block curves through an arc (indicated by angle 242) where it is aligned with the perimeter of cutter 232. It then curves in the opposite sense, as seen at 244, to join the part cylindrical surface 231. There is a similar arrangement between surfaces 234 and 233, between 233 and 232 and also between surface 231 and a part cylindrical surface 240 located between cutter 211 and the axial end of the block. This geometry allows small areas of the cylindrical surfaces of the cutters to remain visible as for example indicated at 246. The surface 220 is connected to surface 234 by a small tapered face 226.

[0081] Fig 13 shows the lower cutting portions of the three cutter blocks of the reamer. The ends 202 of the blocks are aligned axially as indicated by a chain-dotted line. The block shown in Figs 8 to 11 is block 251 at the bottom of the diagram. The lower cutting portions of the other two blocks are indicated at 252 and 253. These follow block 251 as the reamer is rotated and of course block 251 follows block 253. The configuration of cutters 211-214 and the supporting structure around them, as described above with reference to Figs 8 to 11 for

block 251, is reproduced on blocks 252 and 253. Thus the axial and radial positions of cutters 211-214 and the surrounding support structure including surfaces 231-234 are the same relative to each other on all three cutter blocks, but the axial distances between these functional parts and the ends of the blocks and the radial distances from these functional parts to the tool axis differs from one block to another. Since the blocks are aligned and move in unison, the axial distances between functional parts and the end of the tool, or any other reference point on the tool, differ from one block to another in the same way as the distances between these functional parts and the ends 202 of the blocks.

[0082] As indicated by the arrows 254, 255, 256 the axial distances from the end of each block to the edge of cutter 211, and likewise the distances to the other cutters, increase in the order: block 251, block 252, block 253. However, the distance indicated by arrow 256 to the edge of cutter 211 of block 253 is not as great as the distance 257 to the edge of cutter 212 of block 251. The cutters 211-214 of the block 252 are positioned radially slightly further from the axis of the tool than the corresponding cutters of block 251. Similarly the cutters 211-214 of block 253 are positioned slightly further from the axis of the tool than the corresponding cutters 211-214 of block 252. Axial distances from the ends of the blocks to the cutters 215 also increase in the order block 251, block 252, block 253, but the cutters 215 are at full gauge and so are at the same radial distance from the tool axis.

[0083] The axial distances are such that corresponding points on the three cutter blocks, for instance the radial extremities of the cutters 211 on the three blocks, lie on an imaginary helix around the tool axis. Moreover, in this embodiment the axial and radial distances and the spacing between cutters of the sequence on each block is such that the outer extremities of all the cutters 212-214 also lie on a continuation of the same helix, as is illustrated diagrammatically by Figs 14 and 15.

[0084] Fig 14 shows the lower portion of a cutter block which is almost identical to the block 251, although with an additional cutter 261 at full gauge alongside cutter 216. In this figure the tool axis is vertical. The radially outer extremities of the cutters are indicated by the heads of arrows 263. Fig 15 shows the path of a helix as a solid line 265. This helix has progressively increasing diameter as it winds upwards around axis 267. The block 251 is positioned so that (when expanded) the radial extremities of its cutters 211-214 lie on the helix 265 at its intersections with vertical line 269. The block 252 is positioned so that the

radial extremities of its cutters 211-214 are on the helix 265 at its intersections with vertical line 271, which is 120° around the axis from line 269. The block 253 is positioned so that the radial extremities of its cutters 211-214 also lie on the helix 265 at its intersections with a further vertical line (not shown) which is 120° around the axis from line 271 and so would be at the back of the helix as depicted in Fig 15. The cutters 215, 216 at full gauge lie on a continuation of this helix at constant diameter, which is indicated in Fig 15 as dashed helix 273. Further cutters such as 261 at full gauge may also lie on the helix 273.

[0085] Thus, as distances of the cutters 211-214 from the ends of the blocks increase, the radial distances from the tool axis increase also. This arrangement enables all cutters 211-214 of the lower cutting portions of the blocks to cut into the rock as the tool rotates. As the reamer advances axially, the first cutter able to contact rock is the lowest cutter, which is cutter 211 of block 251. Because of the helical arrangement, this is followed by cutter 211 of block 252 at slightly greater distance from the tool axis, then by cutter 211 of block 253 and then by cutter 212 of block 251, cutter 212 of block 252 and so on.

[0086] Referring again to Fig 11, it can be seen that the portions of the outer face of the block between surfaces 231-234 have zones, such as indicated at 288 between the chain lines 248, which face in a generally axial direction and so face towards formation rock which is to be cut away as the reamer advances axially. Facing in a generally axial direction may be taken to mean that a line normal (i.e. perpendicular) to the surface is at an angle of no more than 45° to the tool axis. In order that contact between these zones and the rock does not prevent axial advance of the reamer, these zones are configured so that their circumferential extent does not run exactly orthogonal to the reamer axis.

[0087] This is shown by Fig 12 which is an enlarged view, looking radially inwards as indicated by arrow R in Fig 9, onto the cutter block 251 of Figs 8 to 11. Directions orthogonal to the axis of the reamer are shown by notional lines 249. The lines 250 aligned with edges of cutters 211-213 in Fig 12 are the inflection where curvature through arc 242 changes to curvature through arc 244. The portions of outer surface which face generally axially are shaped to taper away from the end of the cutter block (and also the end of the reamer) as they extend circumferentially around the tool axis, in the backward direction from the leading faces of the cutters. Thus the lines 250 are at an angle to the orthogonal direction indicated by the lines 249.

[0088] The angles between lines 250 and 249 are arranged so that the axially facing zones of the blocks' outer faces lie approximately on a helix around the reamer axis which is similar to the helix 265. As the reamer rotates, the axially facing zones contact the newly cut rock but because they are positioned on a helix, rather than being orthogonal to the axis, they do not prevent axial advance of the reamer even though they do impose some control of the rate of advance.

[0089] The inventors have found that the controlled rate of advance can be approximately the same as the rate of uncontrolled advance achieved with a conventional reamer construction. For example a reamer with an expanded diameter of 150mm may have angle of slightly less than 1 degree between the lines 250 and 249 and advance by 6mm in each revolution. The axial spacing between the cutters may then be approximately equal to this distance of 6mm. A reamer may have a diameter larger than 150mm, for instance up to 600 mm or even more with the same designed rate of advance of 6mm.

[0090] Fig 16 shows the whole of the outer parts of the three cutter blocks of another reamer. These use a number of features already shown by Figs 8-13 and the same reference numerals are used where appropriate. There are also some differences. As before the general structure of the reamer and the mechanism which expands it are as shown by Figs 2, 3 and 4. Fig 17 shows a section, which could be on any of the lines K-K of Fig 16.

[0091] The blocks 301, 302, 303 have cutters 211-215 at their lower cutting portions as in Figs 8 to 13. At the upper cutting portion, which is used to enlarge a borehole when pulling up on a drill string, there are a group of cutters 306 mounted conventionally, similarly to those in upper cutting portion 160 of Fig 4.

[0092] A middle section between these two ends has an outer surface 320 which is a part-cylindrical surface at full gauge. Within this middle section, each block includes a length 305 without cutters which is a full gauge stabilising pad. As in Fig 8, within the lengths 305 which are the stabilising pads, the outer surface 320 has a leading region 221 which extends to a leading edge 222 which is ahead, in the direction of rotation, of the leading surfaces of the cutters and is curved as shown in Fig 15.

[0093] As disclosed in copending GB patent application GB2520998A, these lengths 305 which provide stabilising pads are at different axial positions on the blocks in order to

provide stabilisation without preventing expansion of the reamer. As the reamer is expanded, each stabilising pad presses on the borehole wall. The pads cannot cut into the wall but the other two cutter blocks have cutters at the corresponding axial position and these do cut into the wall. This arrangement avoids placing three stabilising pads at the same axial position on the reamer, which does prevent expansion.

[0094] The remainder of each middle section of each block is provided with a row of cutters which are embedded so that their faces are exposed in a slanted area 304 and their radial extremities are aligned with the outer surface 320. However, these cutters are made with a truncated cylindrical shape and are secured to the support structure such that, as seen in Fig 15, their extremities are an area 312 which is flush with surface 320. It will be appreciated that the cutters on each block form a single sequence of cutters distributed axially along the block with each cutter alongside another.

[0095] As can be seen from the drawing, the cutters in the lower cutting portions of blocks 302, 303 are positioned axially further from the end of the block than the corresponding cutters on block 301.

[0096] Near the trailing edge of surface 320, each block has a row of hard inserts 324 which are set flush with the surface 320 and are harder than the surface 320 of the steel outer part of the block, so as to resist wear. These hard inserts may be made of tungsten carbide particles sintered with a binder. There are also hard inserts 326 embedded to be flush with surfaces 231-234.

[0097] Fig 18 shows a possible variation on the arrangement of Fig 8. The block has leading face 200, slanted area 204, stabilising pad in the length 205, and embedded cutters 214, 215 and 216 all as in Fig 8. However in place of the cutters 211-213 there are three cutters 330 which are embedded in conventional manner so as to project outwardly beyond the surface 332 of the support structure around them.

[0098] To allow axial advance of a reamer with these cutter blocks, the zone 334 which faces generally axially is oriented to taper back from a direction orthogonal to the axis in a manner similar to that described with reference to Figs 12 and 13. Such a reamer may have three cutter blocks in which the cutters 214, 215 and 216 are at differing distances from the end of the block, as in Fig 13, while the cutters 330 next to the lower ends of the three blocks

may possibly be at the same distances from the axial end of the blocks or at different distances from the ends of the blocks.

[0099] Fig 19 is a cross-section analogous to Fig 10 and used to illustrate two further variations from the arrangement of Figs 8-10. The curved edge 222 is here replaced with a flat surface 342 at about 45° to the leading surface 200 of the block. Separately, the support structure in which the cutter 216 is embedded has a surface area 344 which is at full gauge in the trailing half of the block, and a surface area 346 which slopes outwardly between the cutter and the mid point of the block's width. Extremity 218 of the cutter 216 is at full gauge. Consequently the extremity 218 is aligned with a surface area 344 which follows behind it but it is spaced from this area.

[0100] Fig 20 shows another possible variation. The lower cutting portion of a cutter block has a number of features similar to those in Fig 8. However, the axial distance between cutters 212 and 213 is increased, compared to Fig 8, so that the secondary gauge surface 232 has a larger axial extent. Of course this increases the overall axial length of the tool. This surface 232 extends forwardly of cutters 212 and 213 and joins an outward continuation of the planar leading surface 200 through a curved edge 222. The cutters 350 at full gauge are truncated cylinders positioned similarly to cutters 310 seen in Fig 16, so that their radial extremities are faces 312. These are each exposed at slanting surfaces 354, but between each of these cutters the gauge surface 352 extends forwardly and joins outward continuations 356 of the plane surface 200 at edges 222.

[0101] Figs 21 and 22 show a further form of cutter block which is another variation on Fig 8. The leading surface 200 with slanted surface 204 and embedded cutters 211-216 are the same as in Fig 8. The extremities of the cutters 215 and 216 are aligned with surface 320 at full gauge and the cutters 211-214 are aligned with surfaces 231-234. The surface 360 has a leading region 221 which joins the side face 200 of the cutter block at a curved leading edge 222. This is all as shown in Figs 8 to 13 except that the surfaces 231-234 extend across only the leading half of the cutter block and also a part 362 of the full gauge surface 360 which continues axially from the stabilising pad over cutters 216 and 215 extends across only the leading half of the cutter block.

[0102] The trailing half of the cutter block, behind the cutters 211-214, has a structure similar to that shown in Fig 4 with a row of cutters 366 partially embedded in support structure, like the row 166 and projecting beyond the surface 364 of this part of the support structure so that their radial extremities 369 are at full gauge. A face of the stabilising pad is indicated at 368.

[0103] Figs 23 to 25 show a reamer which is used for reaming material from the inside of tubing, increasing the amount removed in successive steps until the tubing is destroyed. This reamer also uses the tool body 510, with three azimuthally distributed cutter blocks in recesses 516 and mechanism for expansion of these blocks as shown in Figs 2 and 3.

[0104] The three cutter blocks are identical in construction and dimensions. One such cutter block is shown in perspective in Fig. 23. The block is formed of a steel inner block part 402 with a projecting lug 404 along its outer surface and an outer block part 406 astride the lug 404 and bolted to the inner part 402 by bolts (not shown) inserted through the apertures 408 into threaded holes in the inner part 402. The inner block part incorporates the protruding ribs 142.

[0105] Referring to the perspective view which is Fig 23, the outer part 406 of each cutter block is a steel structure with a side face 200 which is the leading face in the direction of rotation. An area 204 is slanted back and cutters 411-416 are secured, partially embedded in the block outer part 406 as shown by Fig 25 and exposed within the area 204. The cutters are cylindrical in shape and comprise a hard material: for instance they may be formed of sintered tungsten carbide. The cylindrical cutters are secured by brazing in cylindrical pockets formed in the outer block part 406.

[0106] The outward facing surface of the outer block part 406 comprises a part-cylindrical outward facing surface 421 with a radius such that the surface 421 is centered on the tool axis when the cutter blocks are fully extended. The cutter 411 is positioned so that its radially outer extremity is at the same distance from the tool axis as the surface 421. There is also a part-cylindrical outward facing surface 422 which is further out from the tool axis and again is centered on the tool axis when the cutter blocks are fully extended. The extremity of cutter 412 is at the same distance from the tool axis as the surface 422. This pattern of a part-cylindrical outward facing surface aligned with a radial extremity of the cutter at the same

distance from the tool axis is repeated along the block by cutter 413 and surface 423, cutter 414 and surface 424 and so on at progressively greater radial distances from the tool axis. Transitional surfaces 428 connecting adjacent surfaces 421 and 422, similarly 422 and 423 and so on, have the same curvature as, and are aligned with, the curved edges of cutters 411-416.

[0107] Fig 24 shows the outer part 406 of a cutter block in use to remove tubing 450 within a borehole. There is cement 451 outside the tubing 450 between it and the surrounding rock formation. The tool has already been placed in the borehole and expanded from the tool body while rotating the tool so as to cut into and through the tubing 450. An edge of the outer wall of the tool body 510, exposed at the side of a recess 516, is indicated 409 in Fig 24. The tool is now advancing axially in the downward direction shown by arrow D. The tubing 450 may have some corrosion and deposited material on its inside surface as depicted schematically at 452. In the fully expanded position of the cutter blocks, the leading cutters 411 on each cutter block are positioned to remove this material 452 and also remove some material from the inside wall of the tubing 450, thus exposing a new inward facing surface 454.

[0108] It should be appreciated that the expansion of the cutter blocks by the mechanism within the tool body proceeds as far as the drive mechanism in the tool body will allow. If necessary, the amount of expansion is limited as mentioned above by adjusting the screwthreaded spring retainer 550 in the body 510, using a wrench in the wrench slot 554 while the tool is at the surface, so that expansion goes no further than required. The adjustment of expansion is arranged such that when the cutter blocks are fully expanded, the surfaces 421 and the outer extremities of the leading cutters 411 are at a radial distance from the tool axis which is slightly greater than the inner radius of the tubing 450 but less than the outer radius of the tubing. The curvatures of the part-cylindrical outward facing surfaces 421 to 426 are such that each of them is centred on the tool axis when the cutter blocks have been expanded.

[0109] The new internal surface 454 is at a uniform radius which is the radial distance from the tool axis to the extremities of the leading cutters 411. Because the part-cylindrical outward facing surfaces 421 of the three blocks have a curvature which is centred on the tool axis and at the same radial distance from the tool axis as the extremities of the leading cutters 411, they are a close fit to this surface 454 created by the cutters 411, as is shown in Fig 25,

and act as guide surfaces which slide over this new internal surface 454 as the tool rotates. The tool axis is thus positioned accurately, relative to the tubing 450. This reduces vibration of the tool as it rotates and cuts compared with a conventional tool whose position in the tubing is less accurately controlled by components in the drill string which are undergauge (i.e. dimensioned to provide clearance between their exterior and the inside surface of the tubing).

[0110] As the tool advances axially, the cutters 412 which extend outwardly beyond the surfaces 421 remove further thickness from the tubing outside the new surface 454 and in the example shown the cutters 413 remove the remaining thickness so that the full thickness of the tubing 450 has been removed. The cutters 414 to 416 cut into any cement or other material which was around the outside of the tubing. In this example shown, some cement outwardly from cutters 416 remains in place. If it is necessary to remove this and expose formation rock, an under-reamer for the purpose, constructed as shown by Figs 8 to 15, may be included further up the drill string. Alternatively the dimensions may be arranged such that the outermost cutters 416 contact and cut into the formation rock around the borehole.

[0111] Because the part-cylindrical surface 421 is centred on the tool axis when the cutter blocks are fully expanded, the tool is configured for removing tubing of a specific internal diameter. However, the tool can be used to remove tubing within a range of internal diameters by preparation at the surface, before it is put into a borehole. The tool is configured by fitting the cutter blocks with outer parts 406 dimensioned so that the radius of curvature of the surface 421 is the same as or slightly larger than the original (i.e. as manufactured) internal radius of the tubing to be removed. Also, at the surface, spring retainer 550 is adjusted, using a wrench in slot 554, so that expansion of the tool is limited to the extent required, at which the cutters 411 create the new internal surface on line 454 and the surfaces 421 are a close fit against this surface.

[0112] Modifications to the embodiments illustrated and described above are possible, and features shown in the drawings may be used separately or in any combination. The arrangements of stabilising pads and cutters could also be used in a reamer which does not expand and instead has cutter blocks at a fixed distance from the reamer axis. Other mechanisms for expanding a reamer are known and may be used. Cutters may be embedded or partially embedded in supporting structure. They may be secured by brazing or in other

ways. The hard faces of the cutters will of course need to be exposed so that they can cut rock, but the radially inner part of a cylindrical cutters' hard face may possibly be covered or hidden by a part of the support structure so that the hard face is only partially exposed.

Experimental test

[0113] A comparative test was carried out using two reamers to enlarge holes previously drilled through rock test pieces. One reamer had cutter blocks of conventional construction with the cutters projecting radially outwardly from the support structure as illustrated in Fig 4. The other reamer had cutter blocks of type similar to those shown by Figs 8 to 11. For the purpose of carrying out this comparative test the reamers were of fixed diameter and were not constructed to be expandable.

[0114] The magnitude of vibration with each reamer was monitored using accelerometers and the rate of penetration (i.e. speed of axial advance) was measured. The reamer with conventional cutter blocks displayed significant vibration. By contrast when the reamer with blocks as in Figs 8 to 11 was driven at the same speed of rotation, with the same weight on the tool (weight applied to push the reamer forward) there was negligible vibration and the rate of penetration was 2.5 times the rate of penetration achieved with conventional cutter blocks.

[0115] The dramatic reduction in vibration was immediately apparent in the vicinity of the test rig. With conventional cutter blocks there was so much vibration of the building in the vicinity of the test rig that objects were shaken off tables. With cutter blocks as in Figs 8-11, people in the vicinity of the test rig experienced no noticeable vibration.

CLAIMS

1. A reaming tool for enlarging an underground borehole, comprising a plurality of cutter assemblies distributed azimuthally around a longitudinal axis of the tool,
wherein each cutter assembly comprises supporting structure and a plurality of hard faced cutters, the supporting structure comprising at least one region with at least one cutter secured therein with a hard face of the cutter facing in a direction of rotation of the tool,
wherein the said region of the supporting structure provides an outward-facing surface behind the leading face of the embedded at least one cutter and aligned with a radially outward extremity of the cutter so that the cutter does not project outwardly beyond the said outward-facing surface.
2. A reaming tool according to claim 1 wherein the outward-facing surface of the said at least one region of the supporting structure is a gauge surface at the maximum radius swept by the tool during rotation.
3. A reaming tool according to claim 1 wherein the outward-facing surface of the said at least one region of the supporting structure and the aligned extremity of the cutter are positioned so that they both lie on a notional surface swept out by the tool as it rotates.
4. A reaming tool according to claim 1, claim 2 or claim 3 wherein the said region of the supporting structure has a plurality of cutters secured therein with radially outward extremities at equal distance from the tool axis and has a common outward-facing surface behind the leading faces of the cutters and aligned with the said extremities.
5. A reaming tool according to any one of claims 1 to 4 wherein the supporting structure comprises a sequence of regions where each region has at least one cutter secured therein with a leading face of the cutter exposed and facing in a direction of rotation of the tool and each region has an outward-facing surface aligned with the outward extremity of the at least one cutter secured in the region, the radial distances from the axis to the outward-facing surfaces of the regions increasing in a direction away from an end of the cutter assembly.

6. A reaming tool according to claim 5 wherein the extremity of at least one cutter and an outward-facing surface following the at least one cutter are at the maximum radius swept by the tool as it rotates.

7. A reaming tool according to claim 5 wherein the radially outward extremities of a row of cutters and a single outward-facing surface following the row of cutters are at the maximum radius swept by the tool as it rotates.

8. A reaming tool according to claim 5, claim 6 or claim 7 wherein an axial end portion of the cutter assembly comprises a sequence of cutters which have hard surfaces exposed as leading faces facing in the direction of rotation of the tool but which extend radially outwards to respective cutter extremities at radial distances from the axis of the tool which are less than the said maximum radius and progressively increase with distance from the axial end of the cutter assembly, and

the cutter assembly has radially outward-facing surfaces behind at least some cutters of the sequence and positioned at radial distances from the tool axis which align the outward facing surfaces with the radially outer extremities of respective cutters.

9. A reaming tool for enlarging an underground borehole, comprising a plurality of cutter assemblies distributed azimuthally around a longitudinal axis of the tool, wherein

each cutter assembly comprises a supporting structure and a plurality of hard faced cutters secured therein with a hard surface of each cutter exposed and facing in a direction of rotation of the tool and extending radially outwards from the tool axis to a radially outward extremity, and

the supporting structure comprises at least one radially outward-facing surface positioned to follow behind the leading face of at least one cutter as the tool rotates and aligned with the radially outer extremity of the cutter at the same radial distance from the tool axis.

10. A reaming tool according to any one of claims 1 to 9 wherein at least one outward-facing surface of the support structure which is aligned with the radial extremity of a cutter

has surface area which is alongside the cutter body as well as behind the hard leading face of the cutter.

11. A reaming tool according to any one of claims 1 to 10 wherein the cutter assembly includes at least one surface zone which follows the leading faces of the cutters, faces towards an end of the assembly and is positioned with distance from the end of the assembly which increases as the surface extends circumferentially back from the leading faces of the cutters.

12. A reaming tool for enlarging an underground borehole, comprising a plurality of cutter assemblies distributed azimuthally around a longitudinal axis of the tool, wherein each cutter assembly comprises a supporting structure and a plurality of hard faced cutters secured therein as a sequence of cutters which each have a hard surface facing in a direction of rotation of the tool and extending radially outwards from the tool axis to a radially outer extremity;

the said sequence of cutters including a row of cutters whose leading faces extend radially outwards for an equal distance from the tool axis and the supporting structure includes a radially outward facing gauge surface following behind the leading faces of the cutters in the row and positioned at a radial distance from the tool axis which aligns the gauge surface with the radially outer extremities of the cutters in the row at the maximum radius swept by the tool as it rotates;

the said sequence of cutters also including a further plurality of cutters between the said row and an end of the assembly, where the leading faces of the further cutters extend radially outwards to respective cutter extremities at radial distances from the longitudinal axis of the tool which progressively diminish towards the end of the cutter assembly;

the supporting structure including radially outward facing secondary gauge surfaces following behind the further cutters and positioned at radial distances from the tool axis which align the outward facing surfaces with the radially outer extremities of the cutters which they follow;

the outward face of the cutter assembly further including portions which connect adjacent gauge surfaces, and have zones which face axially towards the said end of the assembly and extend circumferentially back from the leading faces of the cutters while tapering away from the end of the assembly.

13. A reaming tool according to claim 12 wherein the plurality of cutter assemblies of the tool are each in accordance with claim 12 and have sequences of cutters which are positioned at different axial distances from ends of the assemblies, such that the zones which face axially towards the ends of the assemblies lie on a helix around the tool axis.

14. A reaming tool according to any one of claims 1 to 13 wherein the radially outward extremities of at least some cutters are surface areas extending parallel to the tool axis.


15. A reaming tool according to any one of claims 1 to 14 wherein the outer face of an assembly includes surface area at the same radial distance from the tool axis as the extremity of a said cutter but located beside the cutter and extending circumferentially forwardly of the leading face of the cutter.

16. A reaming tool according to any one of claims 1 to 15 wherein the cutter assemblies are expandable radially from the tool axis.

17. A method of enlarging a borehole by rotating a reaming tool as defined in any one of the preceding claims in the borehole and advancing the tool axially.

18. A method according to claim 17 wherein the reaming tool cuts into formation around the borehole.

19. A method according to claim 17 wherein the reaming tool cuts into tubing within the borehole.

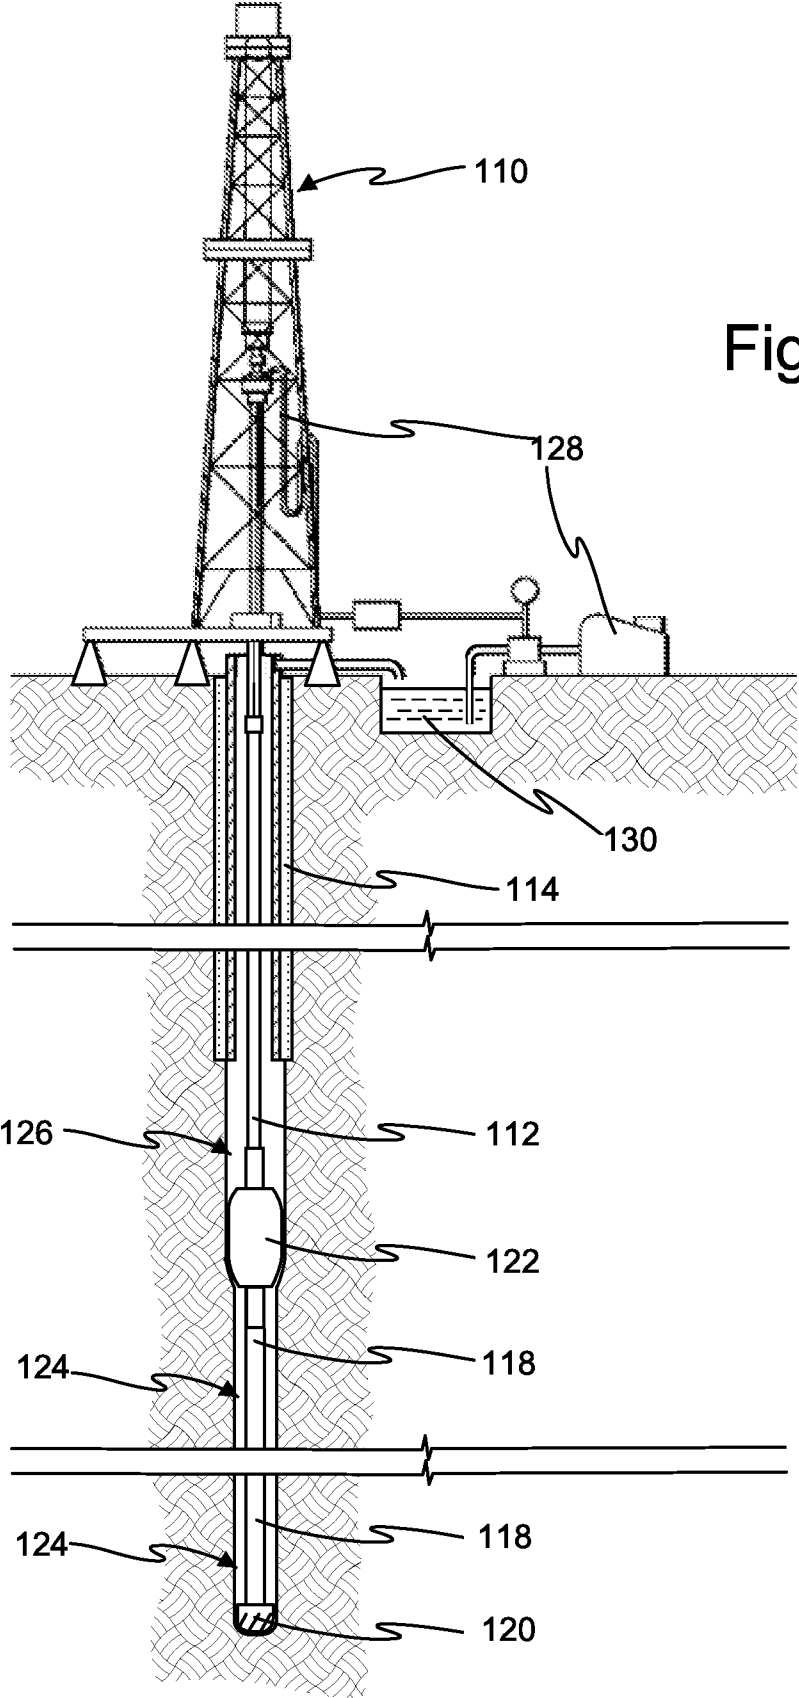

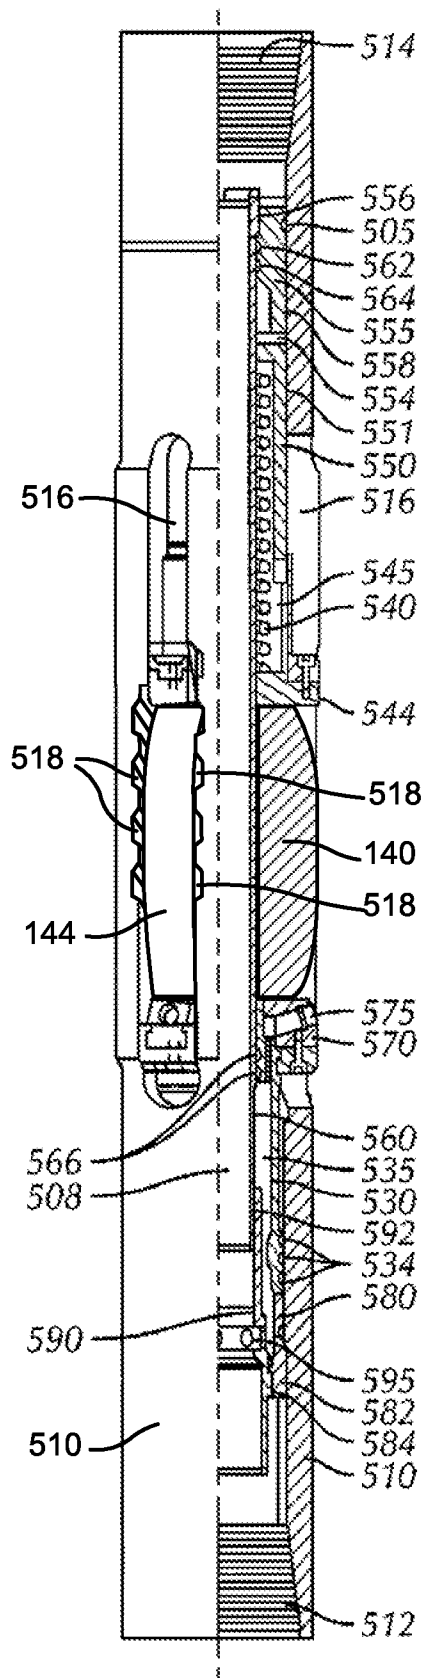


Fig 2

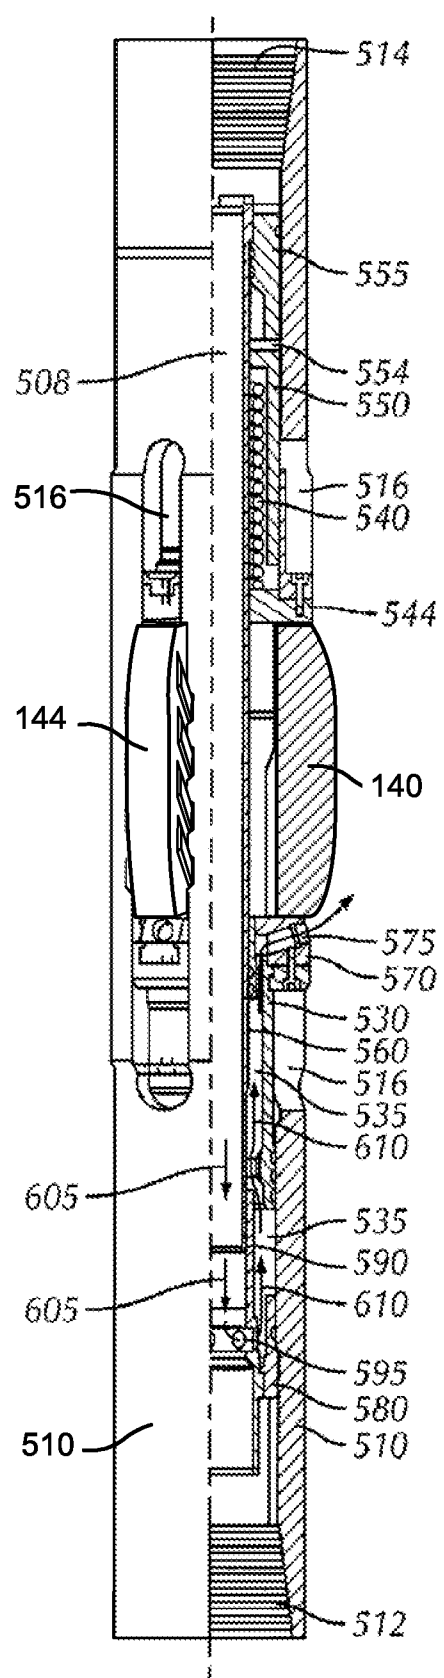


Fig 3

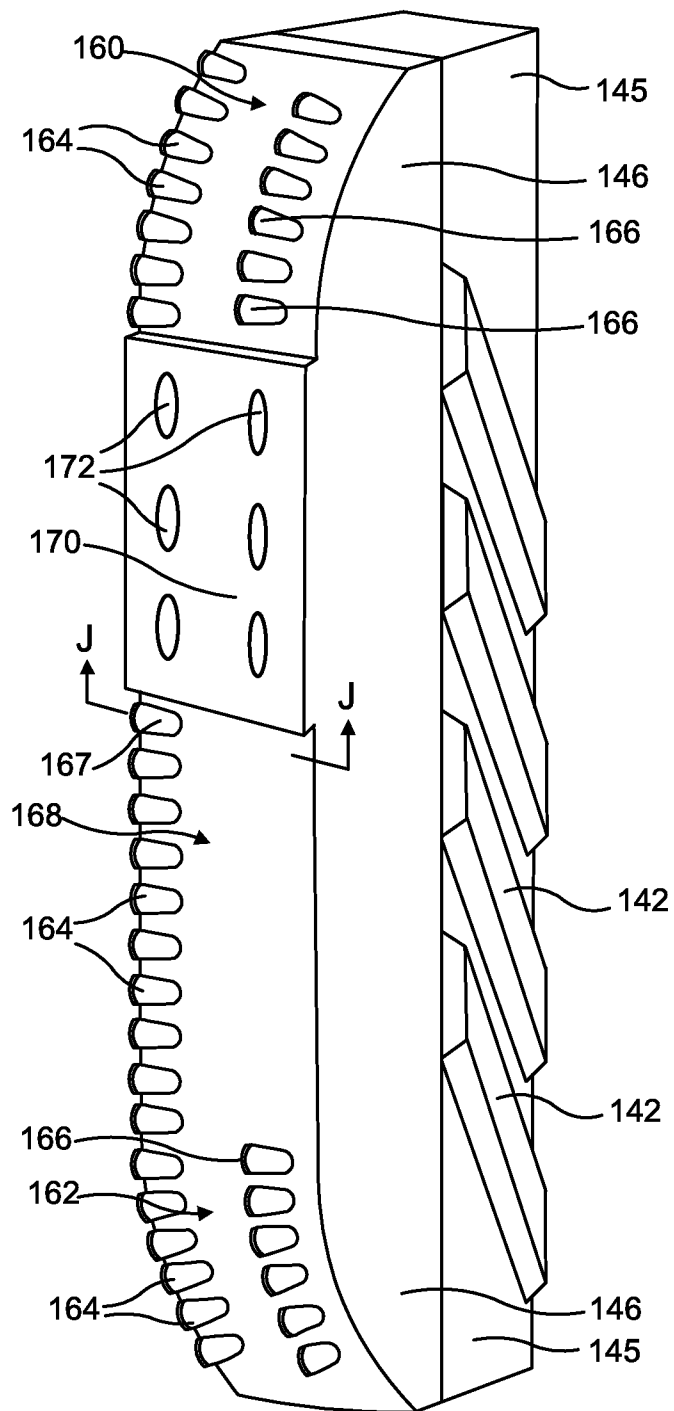


Fig 4
(prior art)

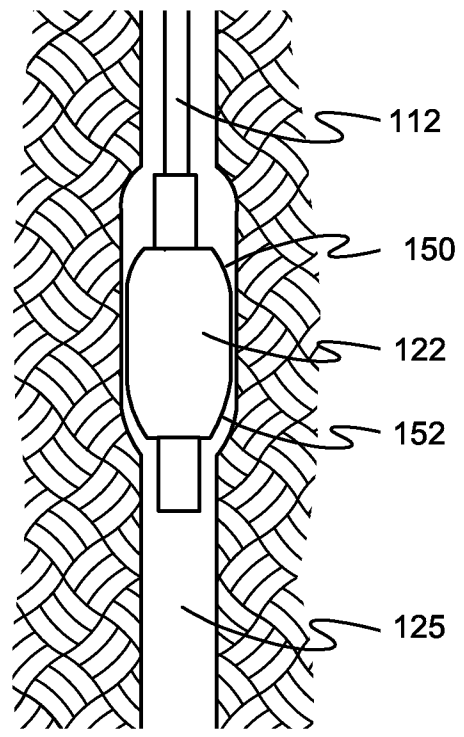


Fig 5



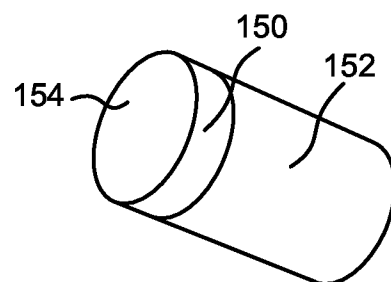


Fig 6

4/14

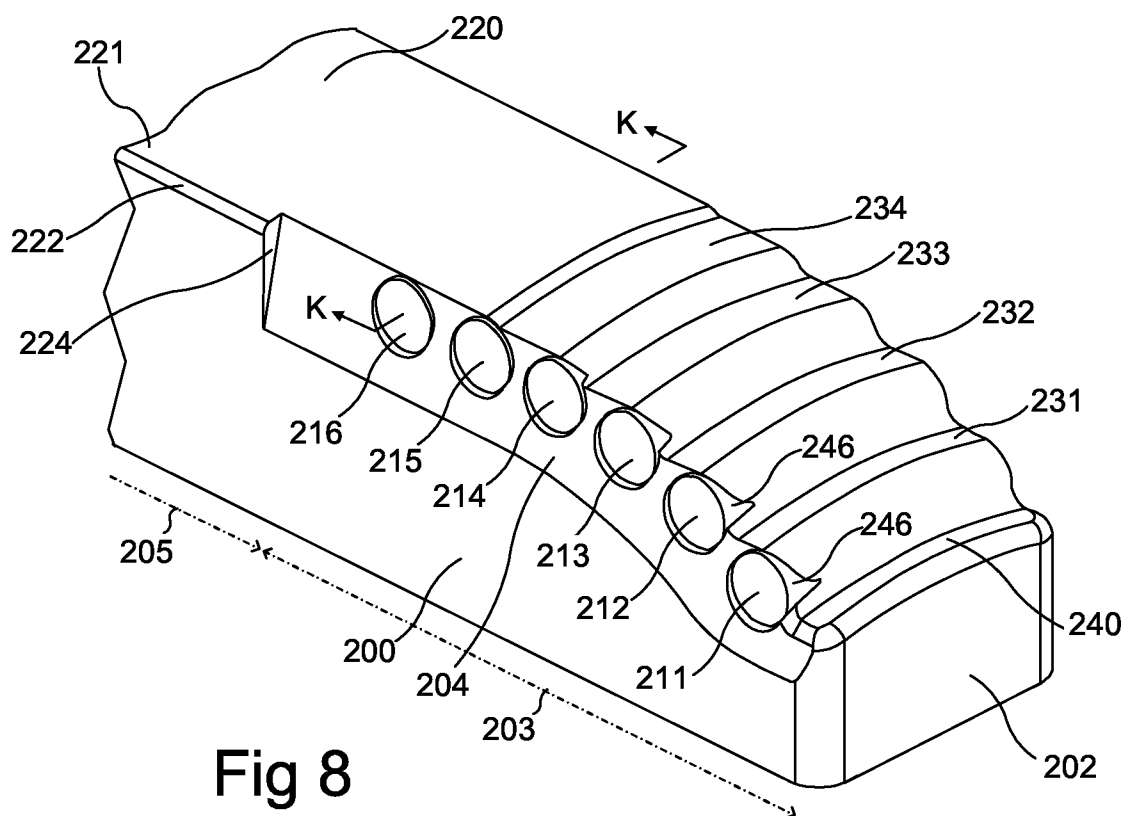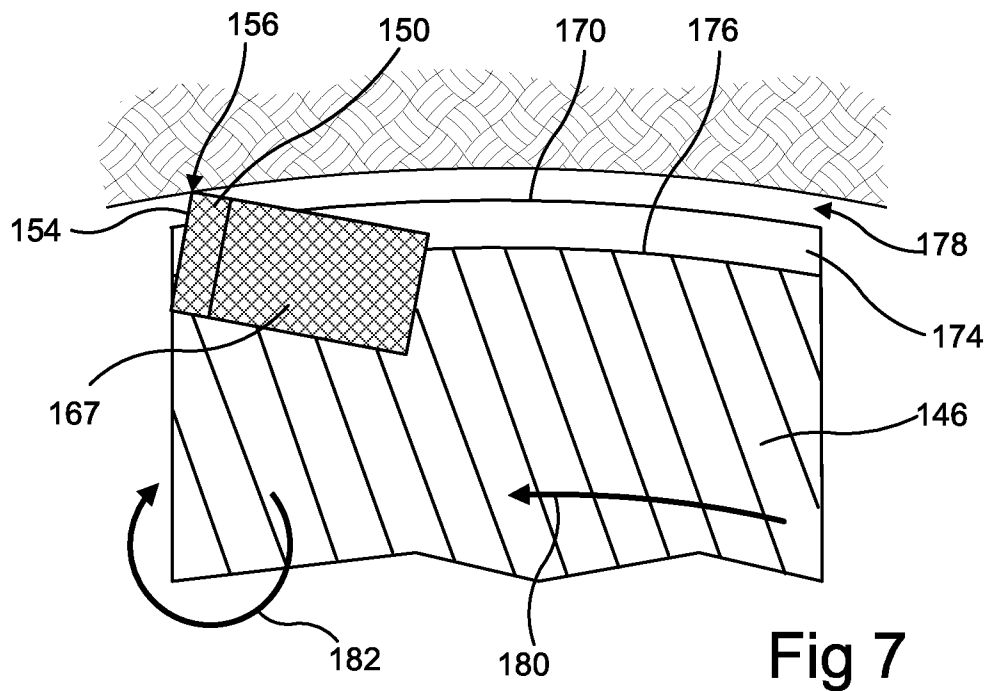

5/14

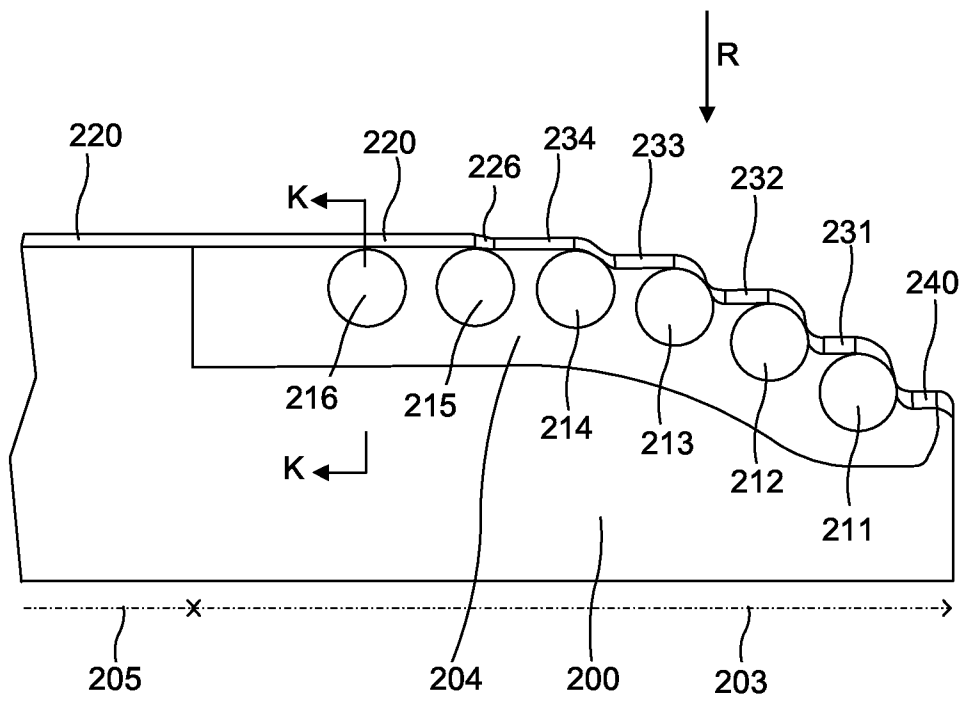


Fig 9

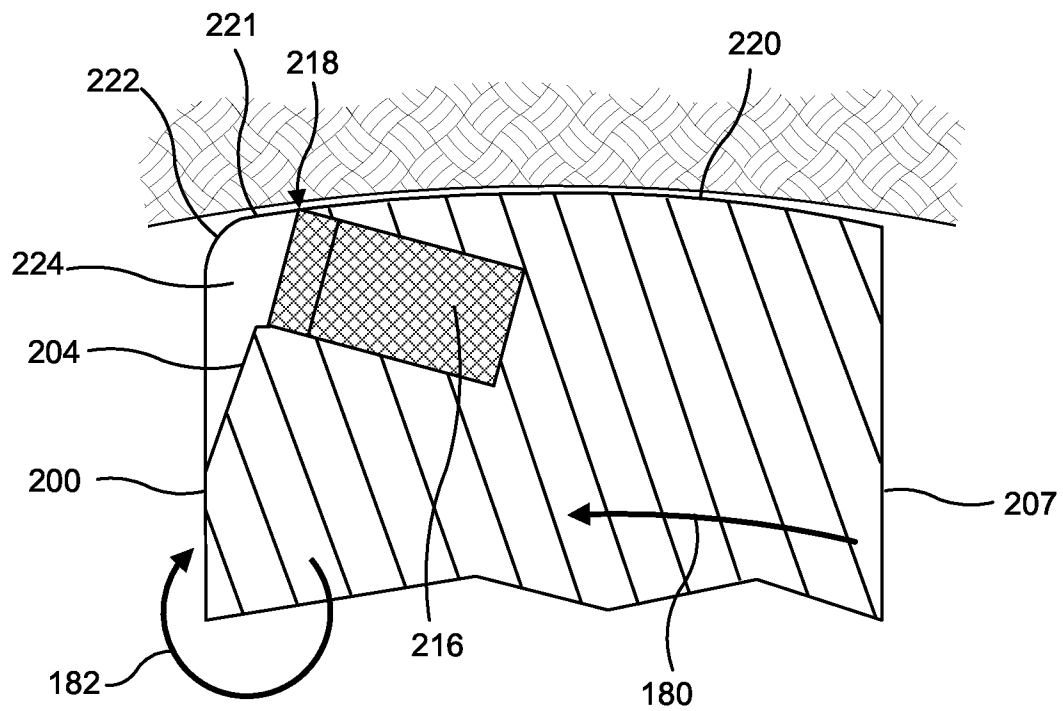


Fig 10

6/14

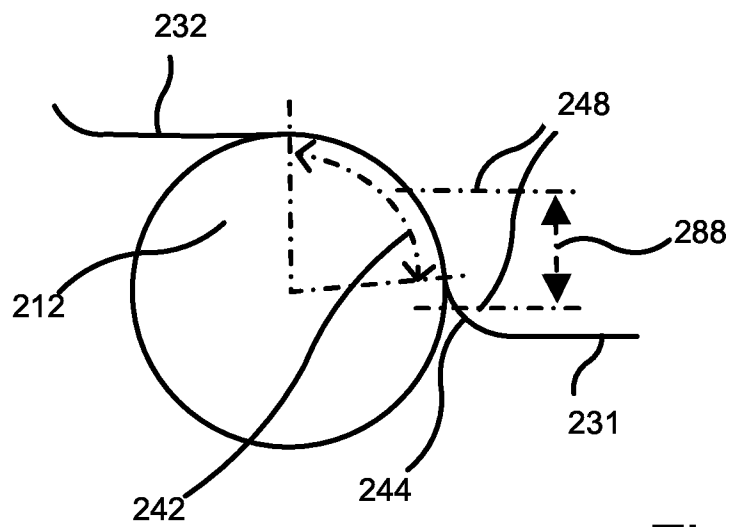


Fig 11

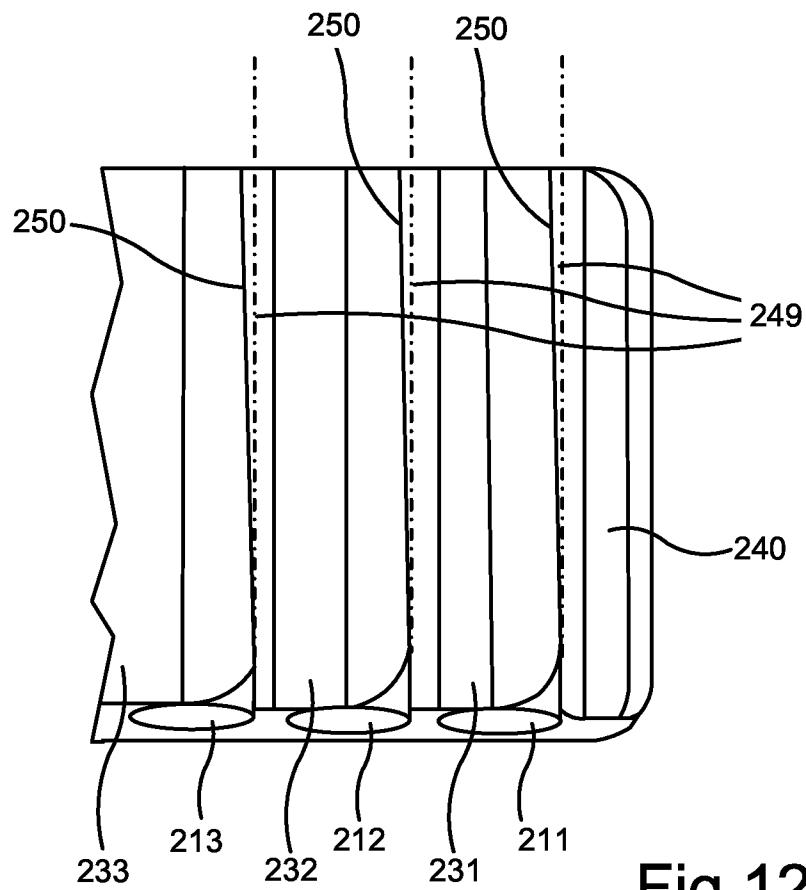


Fig 12

7/14

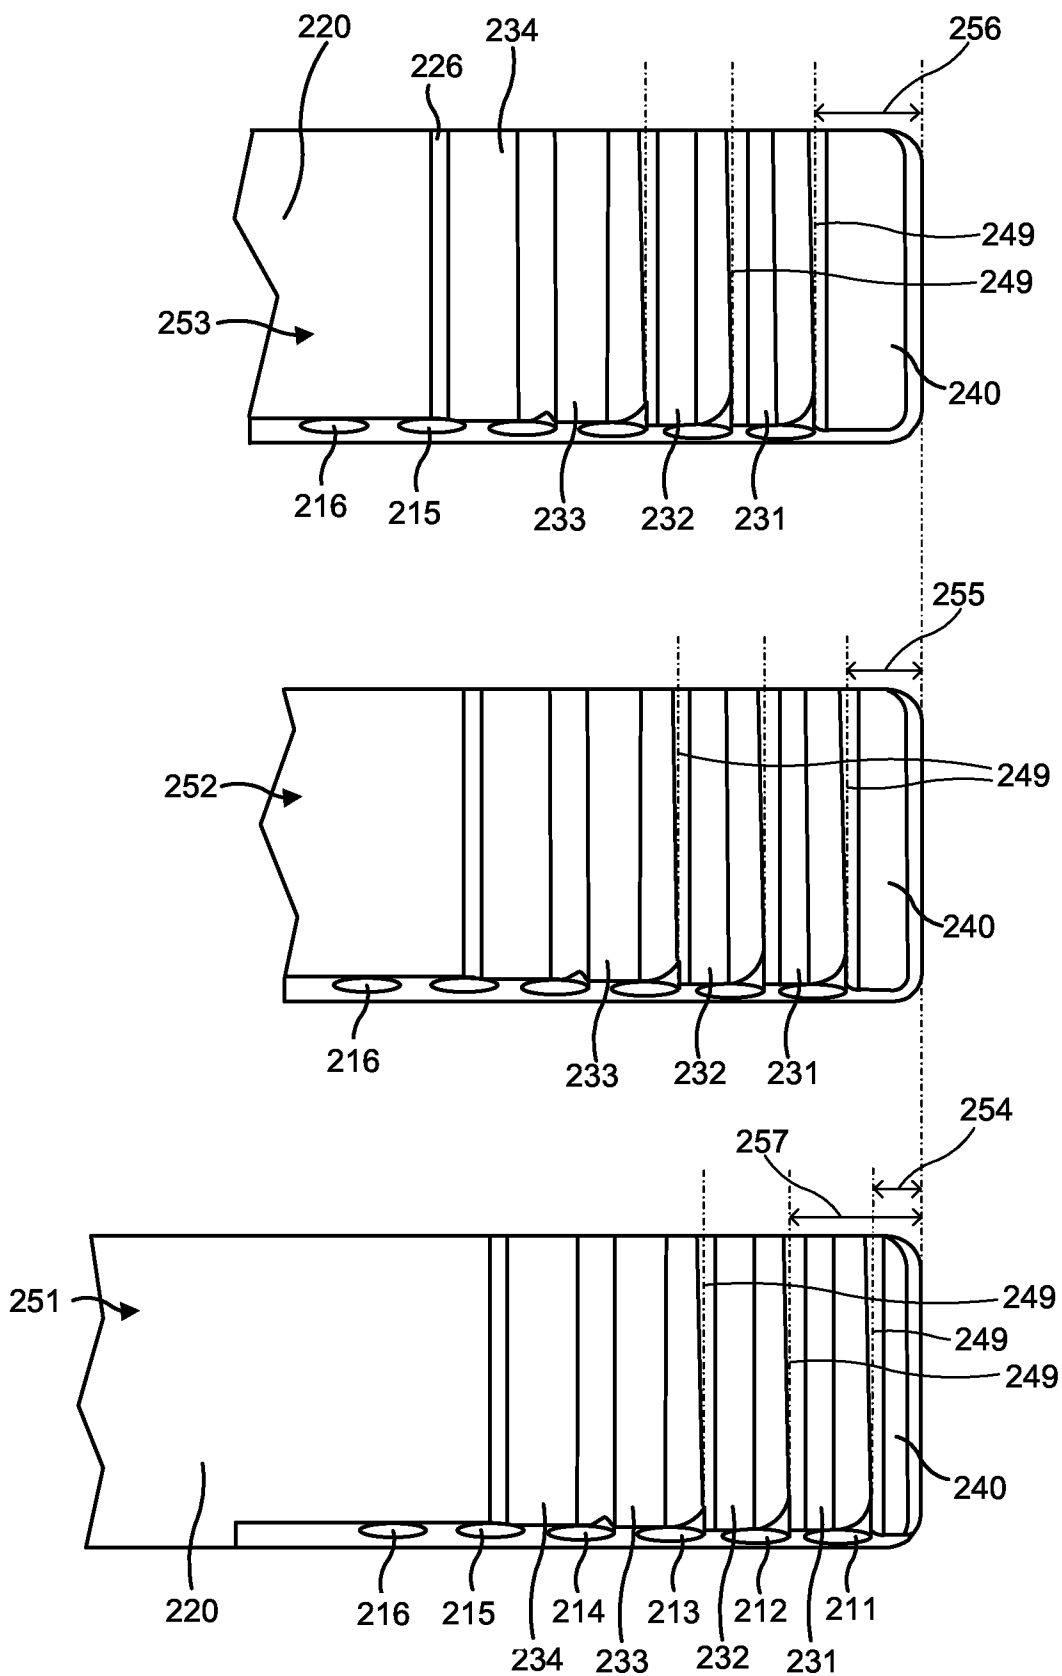


Fig 13

8/14

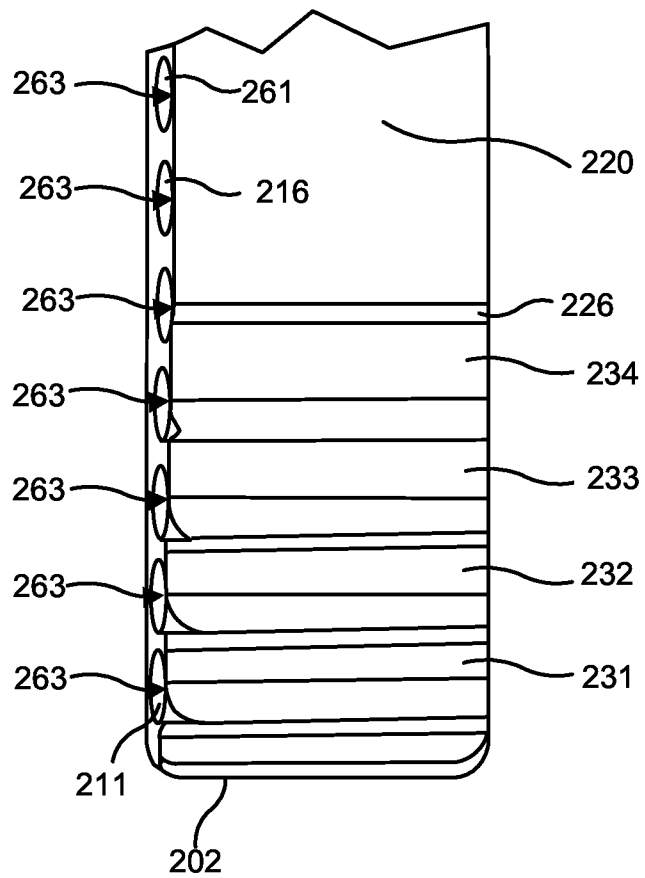


Fig 14

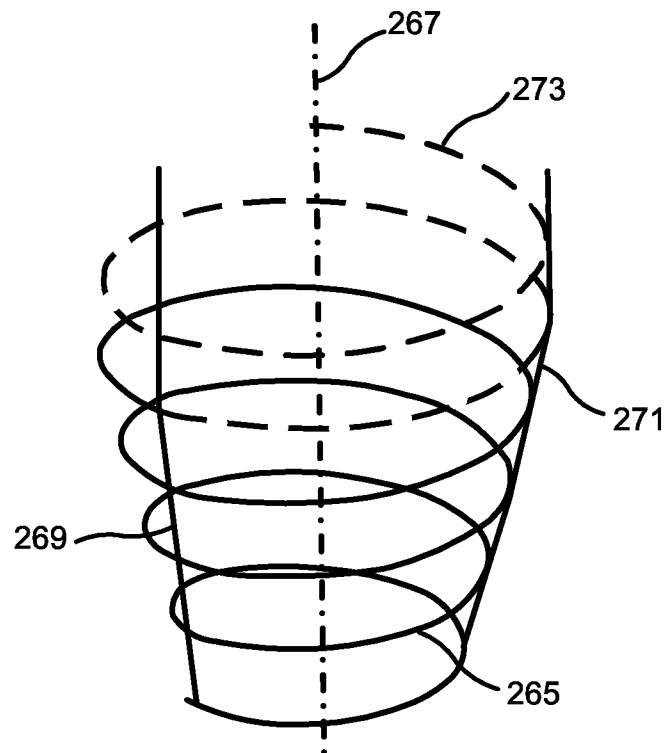


Fig 15

9/14

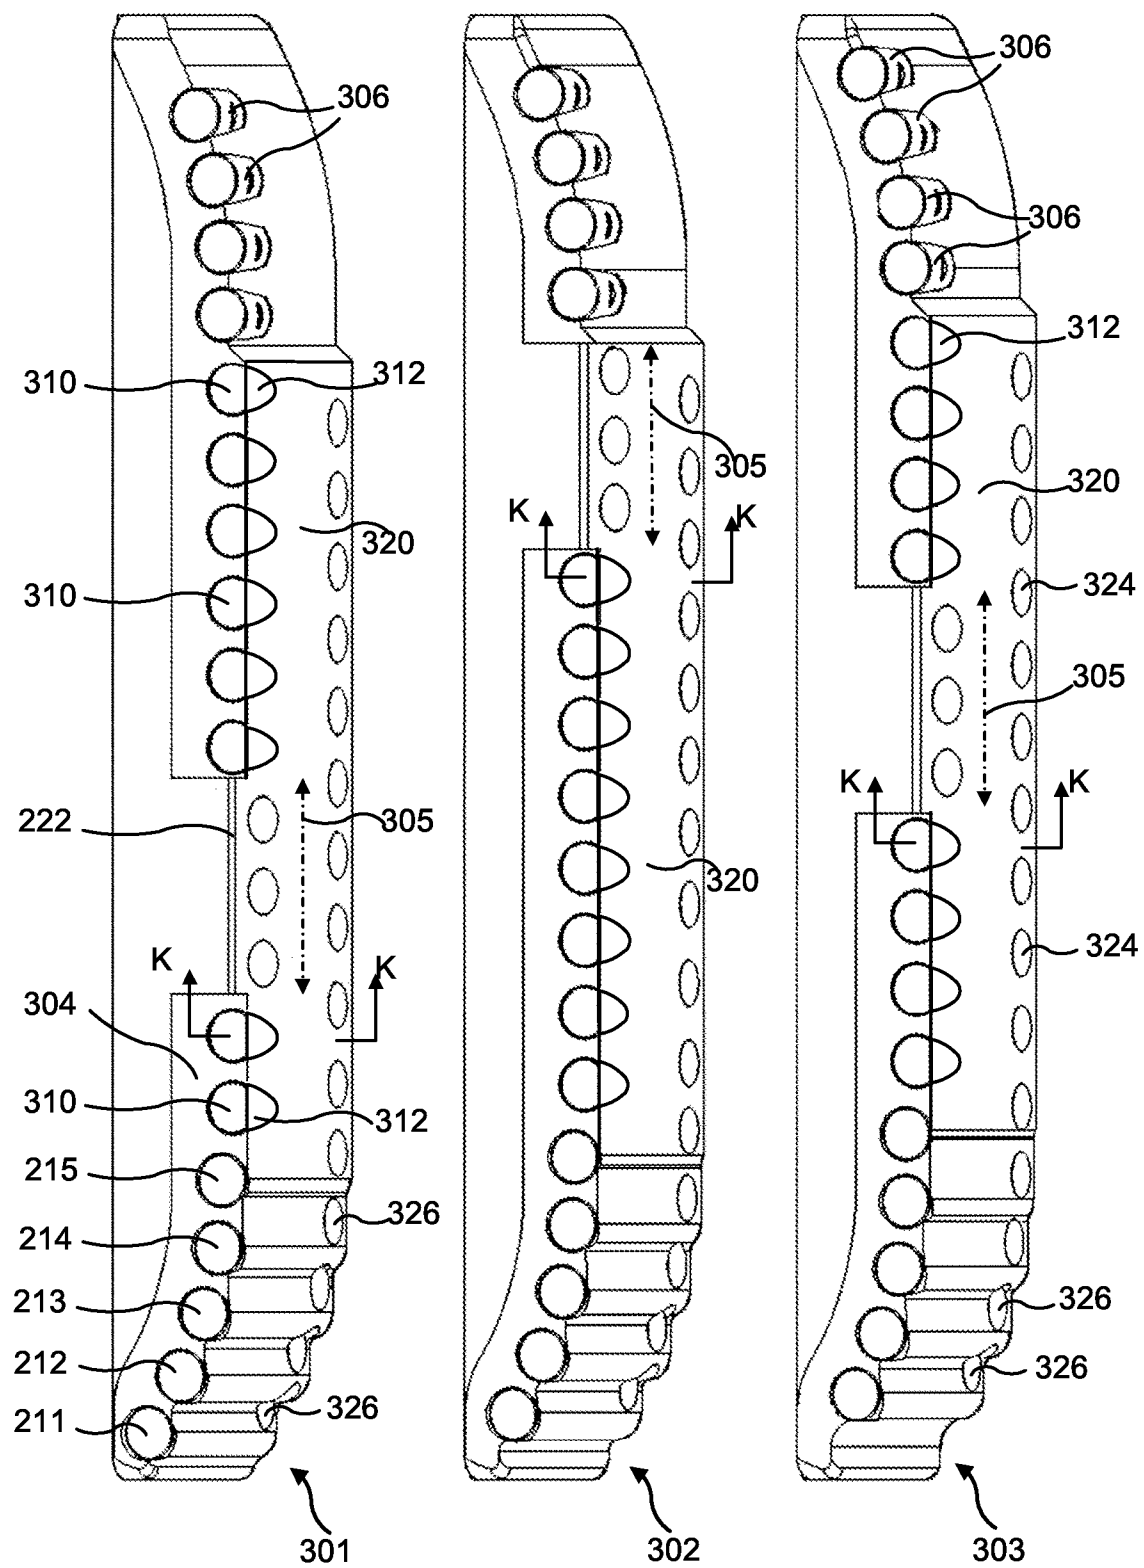


Fig 16

10/14

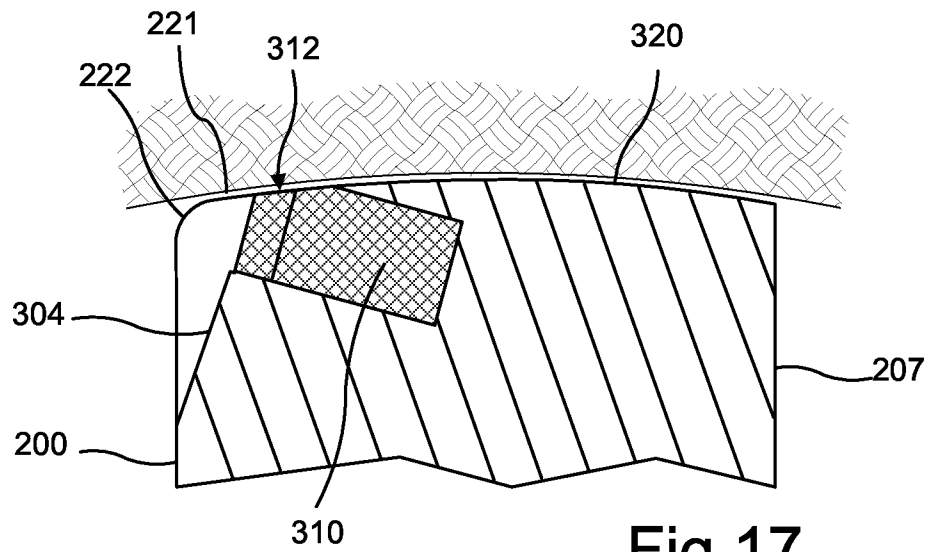


Fig 17

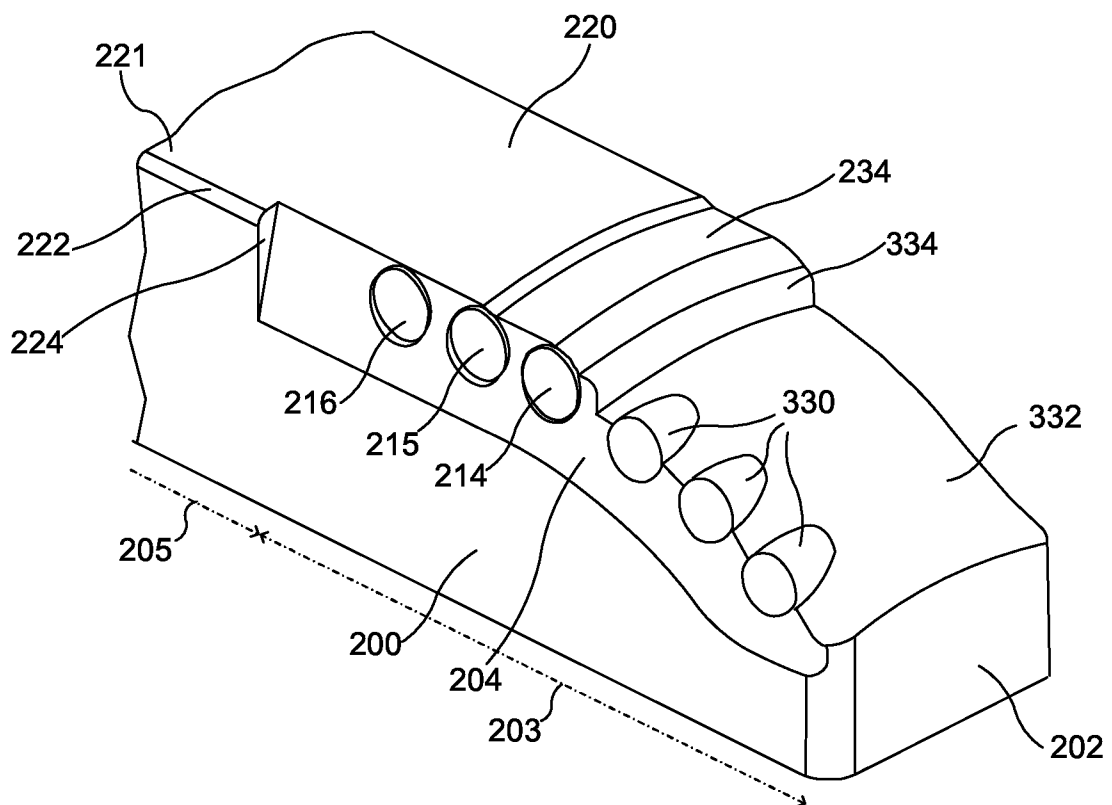


Fig 18

11/14

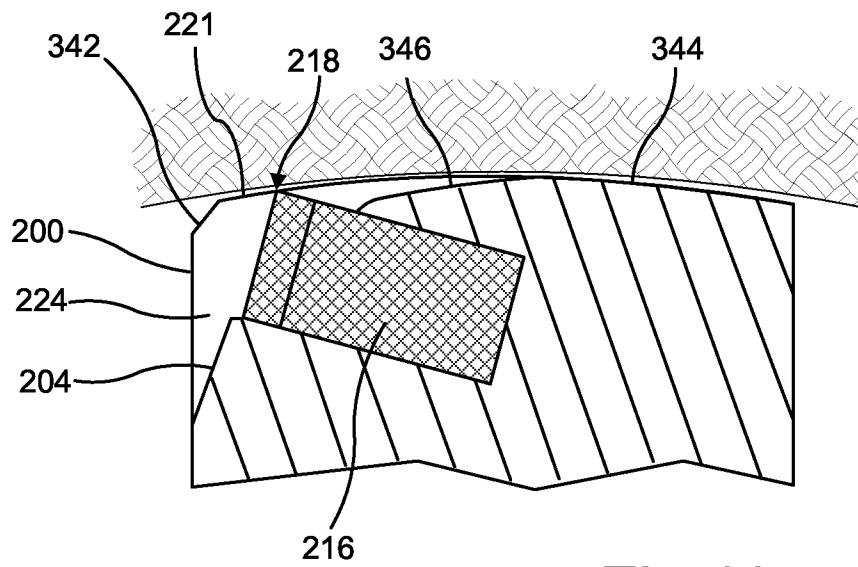


Fig 19

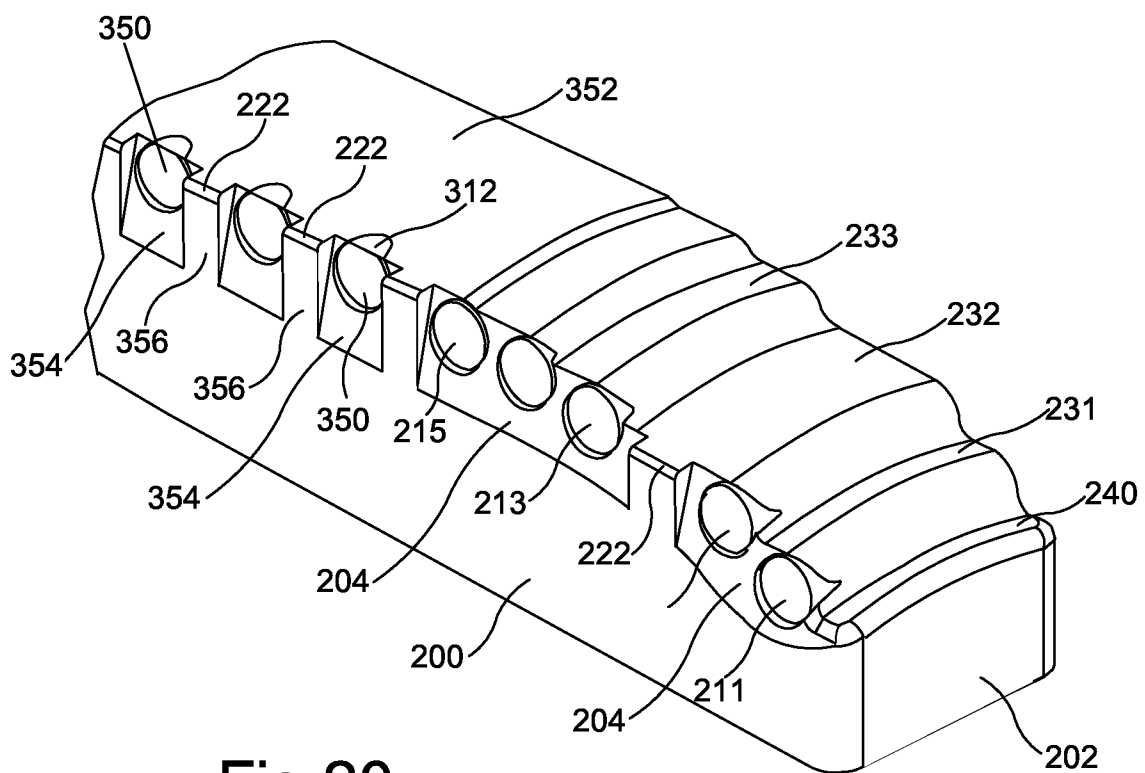


Fig 20

12/14

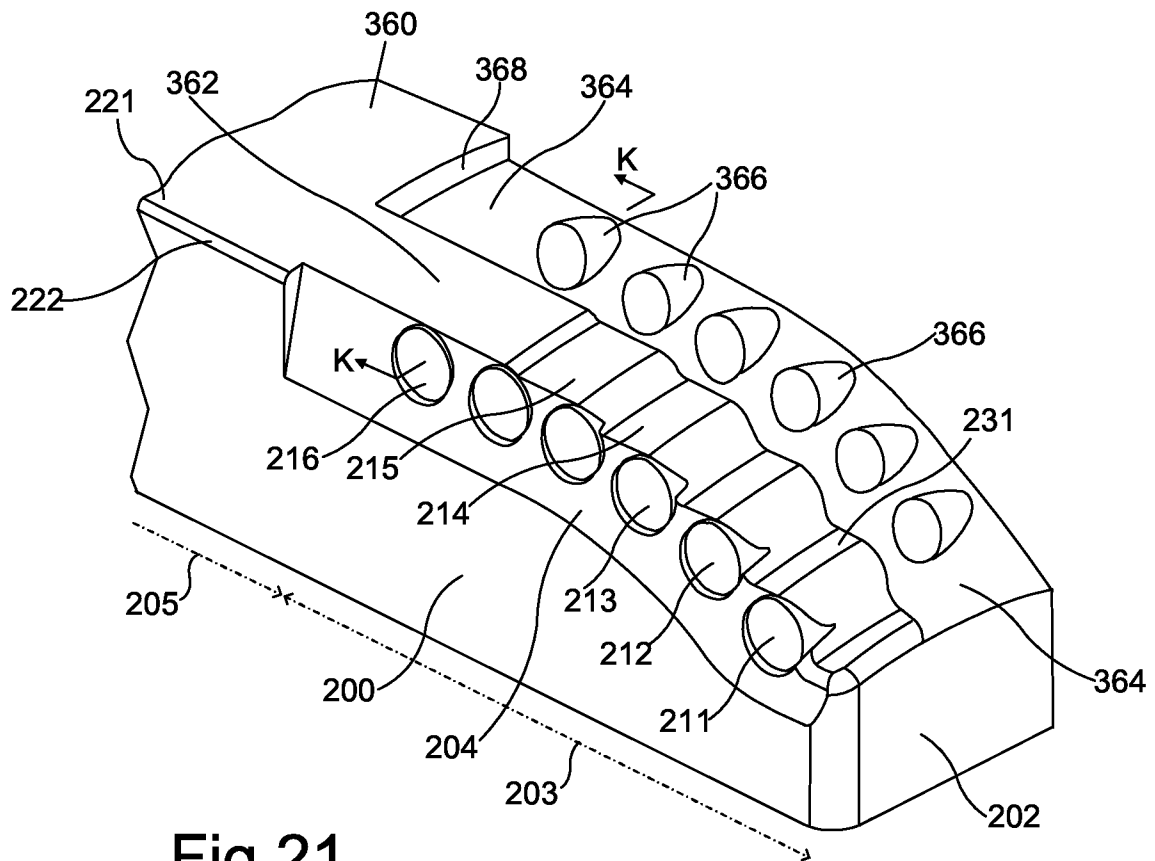


Fig 21

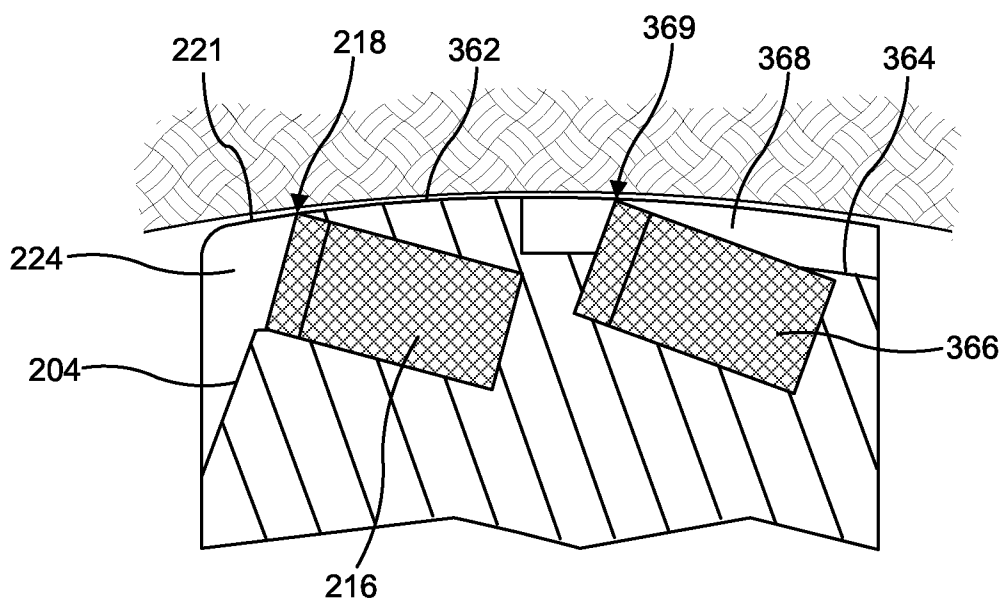


Fig 22

13/14

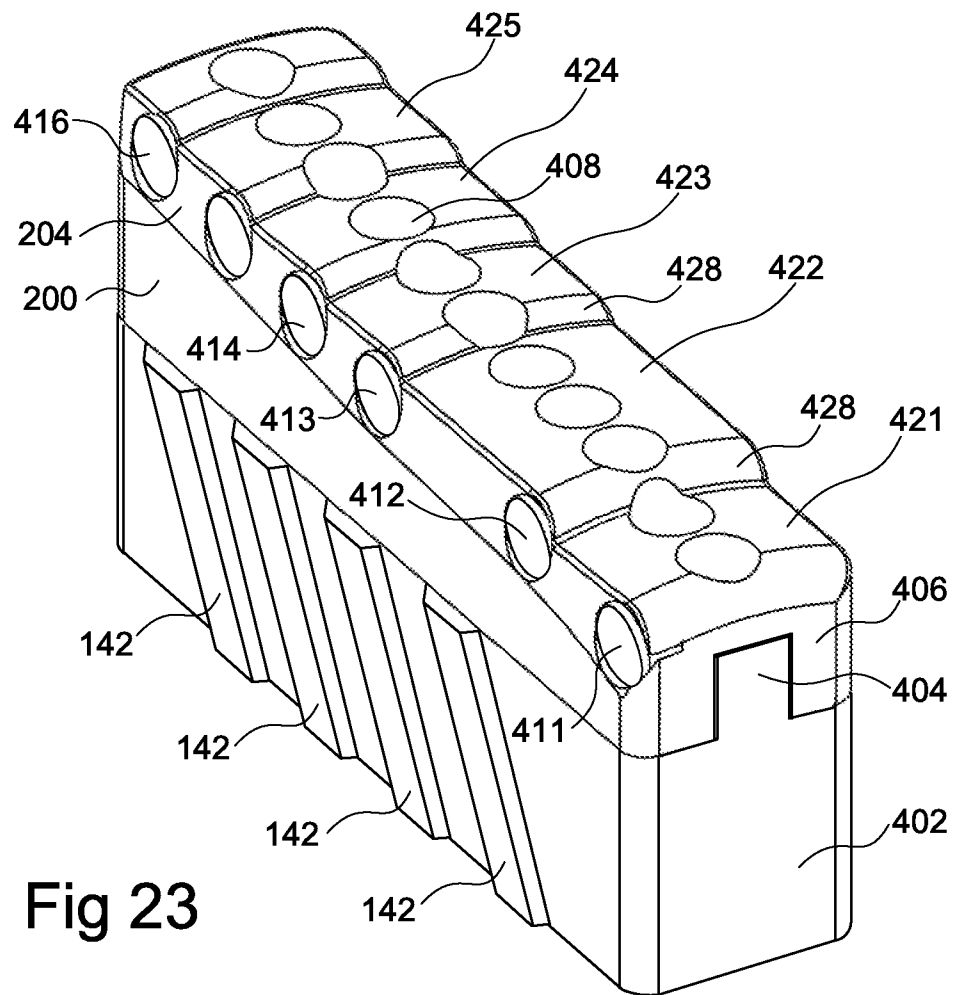


Fig 23

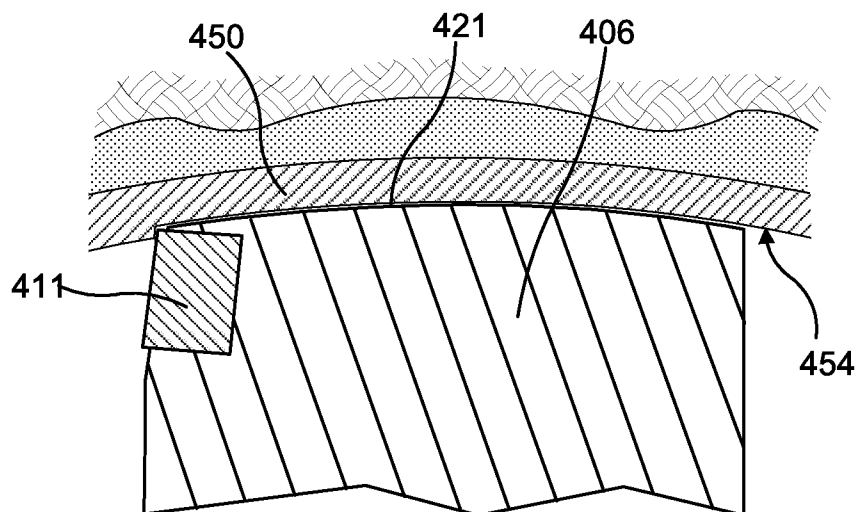


Fig 25

14/14

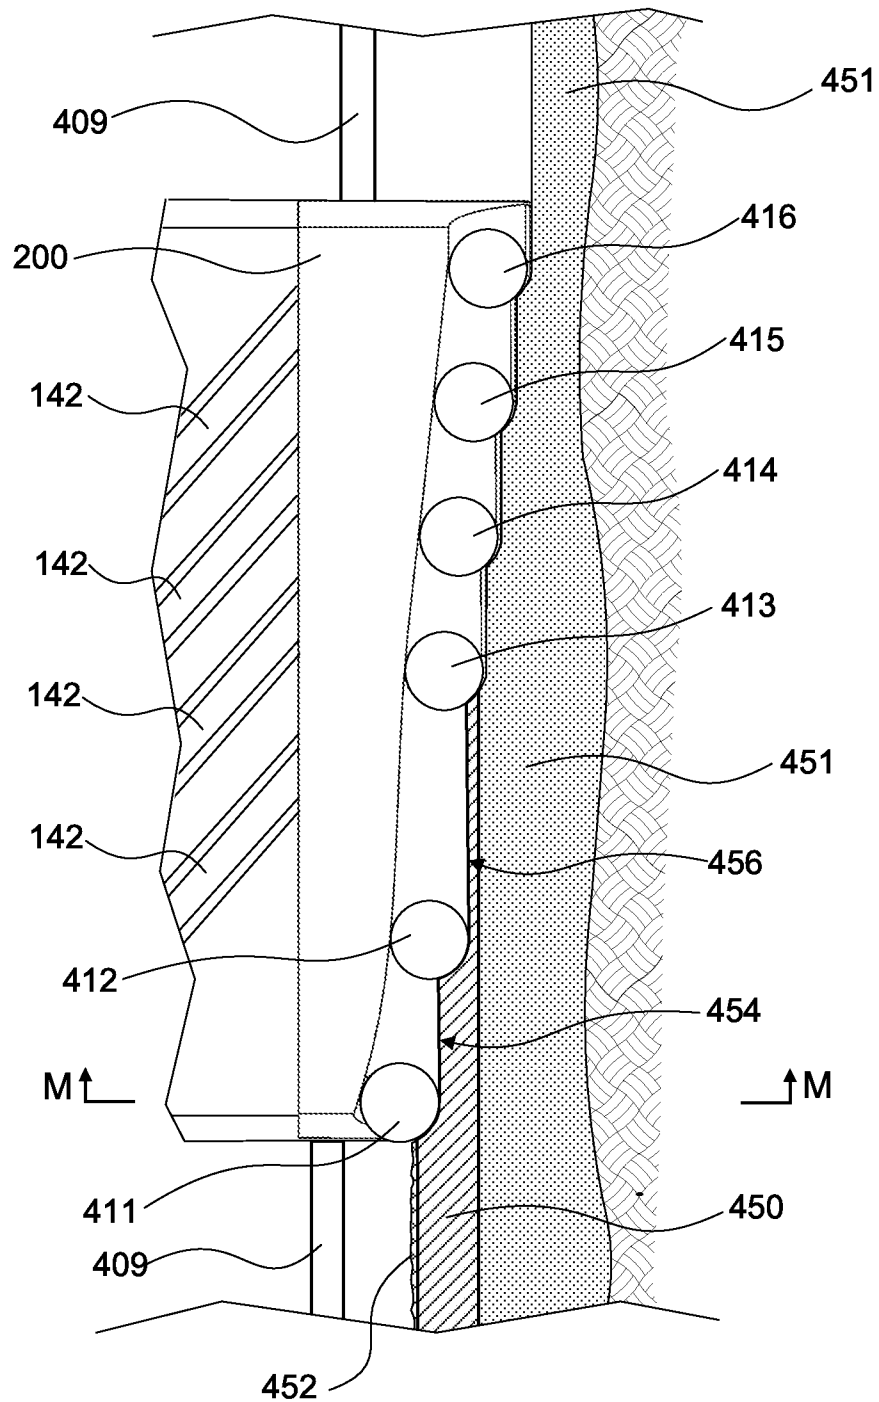


Fig 24

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/040295**A. CLASSIFICATION OF SUBJECT MATTER****E21B 10/26(2006.01)i, E21B 10/32(2006.01)i, E21B 7/28(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
E21B 10/26; E21B 7/00; E21B 10/00; E21B 10/46; E21B 10/32; E21B 10/48; E21B 7/28Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & keywords: reamer, cutter, surface, borehole, enlarge, expandable, arrange, sequence, and block**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2010-0051349 A1 (BALLARD et al.) 04 March 2010 See abstract, paragraphs [0017]-[0019], claim 1 and figure 1.	1-4,9
A		12-13
Y	US 4593777 A (BARR, JOHN D.) 10 June 1986 See abstract, column 7, line 7 - column 8, line 19 and figure 6.	1-4,9
A	US 4499959 A (GRAPPENDORF et al.) 19 February 1985 See abstract, column 5, line 25 - column 6, line 61 and figure 2.	1-4,9,12-13
A	US 4431065 A (ANDREWS, THOMAS L.) 14 February 1984 See abstract, column 6, line 28 - column 7, line 64 and figure 6.	1-4,9,12-13
A	US 2012-0255786 A1 (ISENHOOR, JAMES D.) 11 October 2012 See paragraphs [0027]-[0034] and figure 6.	1-4,9,12-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 October 2015 (12.10.2015)

Date of mailing of the international search report

12 October 2015 (12.10.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 35208,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

HWANG, Chan Yoon

Telephone No. +82-42-481-3347



International application No.
PCT/US2015/040295

PCT/US2015/040295

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 6-7 and 18-19
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
Claims 6-7 and 18-19 are unclear, because they refer to multiple dependent claims which do not comply with PCT Rule 6.4(a).
Therefore, claims 6-7 and 18-19 do not meet the requirements of PCT Article 6.
3. ☒ Claims Nos.: 5,8,10-11,14-17
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/040295

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0051349 A1	04/03/2010	US 8162081 B2	24/04/2012
US 4593777 A	10/06/1986	US 4558753 A	17/12/1985
		US 4593777 A	10/06/1986
US 4499959 A	19/02/1985	EP 0121802 A2	17/10/1984
		EP 0121802 B1	28/02/1990
		JP 60-016691 A	28/01/1985
US 4431065 A	14/02/1984	None	
US 2012-0255786 A1	11/10/2012	AU 2012-364877 A1	24/10/2013
		CA 2832726 A1	18/07/2013
		CN 103748308 A	23/04/2014
		EP 2694767 A1	12/02/2014
		MX 2013011646 A	17/02/2014
		US 2014-284109 A1	25/09/2014
		US 2014-345952 A1	27/11/2014
		US 8752649 B2	17/06/2014
		US 8813877 B1	26/08/2014
		US 8851205 B1	07/10/2014
		WO 2013-106048 A1	18/07/2013