



US009073019B2

(12) **United States Patent**  
**Isenberg et al.**

(10) **Patent No.:** **US 9,073,019 B2**

(45) **Date of Patent:** **Jul. 7, 2015**

(54) **BLADE ARRANGEMENT FOR A FOOD PROCESSING VAT**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(75) Inventors: **Timothy J. Isenberg**, Marshfield, WI (US); **John E. Zirbel**, Marshfield, WI (US)

2,009,238	A	7/1935	Parsons	
2,029,691	A *	2/1936	Robinson	196/14.52
3,498,762	A *	3/1970	Van Der Schee et al.	159/22
3,580,162	A	5/1971	Pontecorvo	
3,640,509	A *	2/1972	Inamura et al.	366/300
3,734,468	A	5/1973	Cheng et al.	
3,752,447	A	8/1973	Chen	

(73) Assignee: **Cheese & Whey Systems, Inc.**, Marshfield, WI (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1090 days.

(Continued)

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **13/088,934**

AT	384523	11/1987
DE	1150360	6/1963

(22) Filed: **Apr. 18, 2011**

(Continued)

(65) **Prior Publication Data**

US 2011/0252982 A1 Oct. 20, 2011

**Related U.S. Application Data**

(60) Provisional application No. 61/325,612, filed on Apr. 19, 2010.

OTHER PUBLICATIONS

"Horizontal Cheese Vat (HCV)" Brochure, Sherping Systems, undated.

(Continued)

(51) **Int. Cl.**

<b>B01F 7/04</b>	(2006.01)
<b>A01J 25/06</b>	(2006.01)
<b>B01F 7/00</b>	(2006.01)
<b>B01F 15/00</b>	(2006.01)

(52) **U.S. Cl.**

CPC ..... **B01F 7/042** (2013.01); **A01J 25/06** (2013.01); **B01F 7/00275** (2013.01); **B01F 7/00283** (2013.01); **B01F 15/00714** (2013.01)

(58) **Field of Classification Search**

CPC ..... A01J 25/00; A01J 25/06; A01J 25/04; A01J 25/08; A01J 25/10; A01J 25/16; B01F 7/00; B01F 7/00008; B01F 7/00233; B01F 7/0025; B01F 7/00255; B01F 7/00275

See application file for complete search history.

Primary Examiner — Lore Jarrett


(74) Attorney, Agent, or Firm — Boyle Fredrickson, S.C.

(57)

**ABSTRACT**

A food processing vat is provided with blade assemblies that extend from opposing sides of a rotating shaft. The blade assemblies may be curved or otherwise face different directions at different locations along their respective lengths. The vat may have a pair of rotating shafts and the rotation of the shafts may be timed so that the blade assemblies of the shafts simultaneously travel through a common swept volume. The blade assemblies may be positioned on the shafts so that they intermesh through each other while simultaneously moving through the common volume.

**16 Claims, 11 Drawing Sheets**

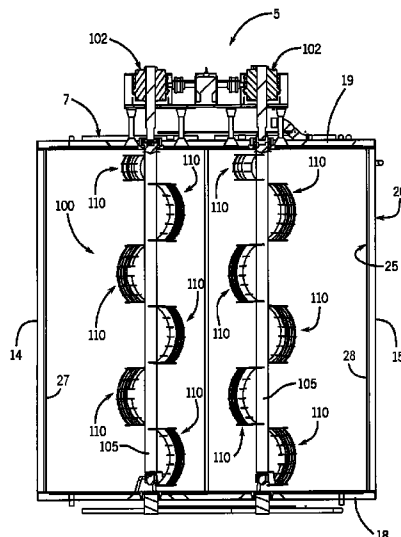

(56)

## References Cited

## FOREIGN PATENT DOCUMENTS

## U.S. PATENT DOCUMENTS

3,858,855 A	1/1975	Hazen	
3,927,983 A	12/1975	Gordon et al.	
3,964,874 A	6/1976	Maruko et al.	
4,004,785 A *	1/1977	Kajimoto et al.	366/147
4,050,369 A	9/1977	Mulvihill et al.	
4,108,058 A	8/1978	Sjoholm et al.	
4,130,053 A	12/1978	Sjoholm et al.	
RE29,967 E	4/1979	Hazen	
4,206,880 A	6/1980	Stanton	
4,312,596 A	1/1982	Maetzawa et al.	
4,321,860 A	3/1982	Hazen	
4,493,557 A	1/1985	Nayak et al.	
4,584,934 A	4/1986	De Fockert	
4,612,853 A	9/1986	Kostiainen et al.	
4,776,703 A	10/1988	Oda et al.	
4,859,074 A	8/1989	Asai et al.	
4,893,554 A	1/1990	Gasbjerg	
4,938,424 A	7/1990	Pittelko	
4,989,504 A	2/1991	Jay	
5,178,060 A *	1/1993	Rusch et al.	99/453
5,178,459 A	1/1993	Christensen	
5,513,559 A	5/1996	Jay	
5,606,907 A	3/1997	Jay	
5,953,983 A	9/1999	McCormick et al.	
5,985,347 A	11/1999	Ejnik	
6,257,129 B1	7/2001	Sipma et al.	
6,367,375 B2	4/2002	Sipma et al.	
6,418,836 B2	7/2002	Sipma et al.	
6,539,845 B2	4/2003	Sipma et al.	
7,305,917 B2	12/2007	Sipma et al.	
2001/0019515 A1 *	9/2001	Schmidt et al.	366/310
2003/0147304 A1 *	8/2003	Schuchardt et al.	366/299
2006/0081133 A1	4/2006	Schmitz	
2006/0251554 A1 *	11/2006	Doucet et al.	422/224
2007/0277680 A1	12/2007	van der Meulen	
2008/0047442 A1	2/2008	Sipma et al.	
2008/0094939 A1	4/2008	Wenger et al.	
2008/0127834 A1	6/2008	Bokelmann et al.	
2008/0130406 A1 *	6/2008	Rosso et al.	366/342
2008/0131313 A1	6/2008	Bokelmann et al.	
2008/0131570 A1	6/2008	Bokelmann et al.	

DE	2002428	7/1971
DE	3037333	5/1982
EP	0770333	5/1977
FR	877964	1/1943
GB	189502	11/1922
GB	1313075	4/1973
NZ	209238	8/1986
NZ	230774	6/1991
WO	8904116	5/1989
WO	9200665	1/1992
WO	9422294	10/1994

## OTHER PUBLICATIONS

“The Unique Concept of the Scherping HCV has Many . . .”, 1 page, undated.

“Cheese Vat, Performance Advantages Over Other Cheese Vats” 1 page, undated.

“The Horizontal Cheese Vat is an integral piece in a line of state-of-the-art cheese making equipment that will help your plant achieve the quality standard of cheese and the profits you demand”, Scherping Systems 9/00, 2000.

“The Ultimate Tracking, Maintenance Management & Data Acquisition System Your Plant Can Have”, Scheming Systems, undated.

“Scherping’s Data Acquisition/Plant Management System gives you your plant’s progress at a moments notice right at your fingertips!”, Scherping Systems, Sep. 1997.

EP Appln. No. 11162954.9, Nov. 11, 2010, Partial Search, 9 pages.

EP Appln. No. 11162954.9, Mar. 19, 2012, EPO Communication, 13 pages.

EP Appln. No. 11162954.9, Apr. 23, 2012, EPO Communication, 2 pages.

EP Appln. No. 11162954.9, Dec. 5, 2012, EPO Communication, 5 pages.

EP Appln. No. 11162954.9, Jul. 26, 2013, EPO Communication, 5 pages.

\* cited by examiner

FIG. 1

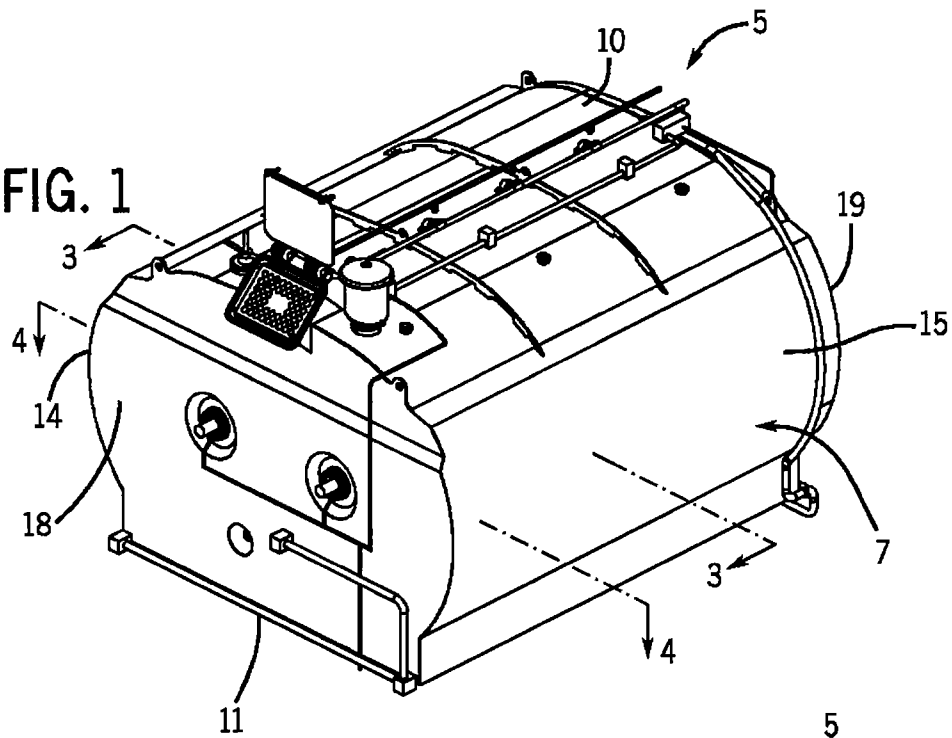
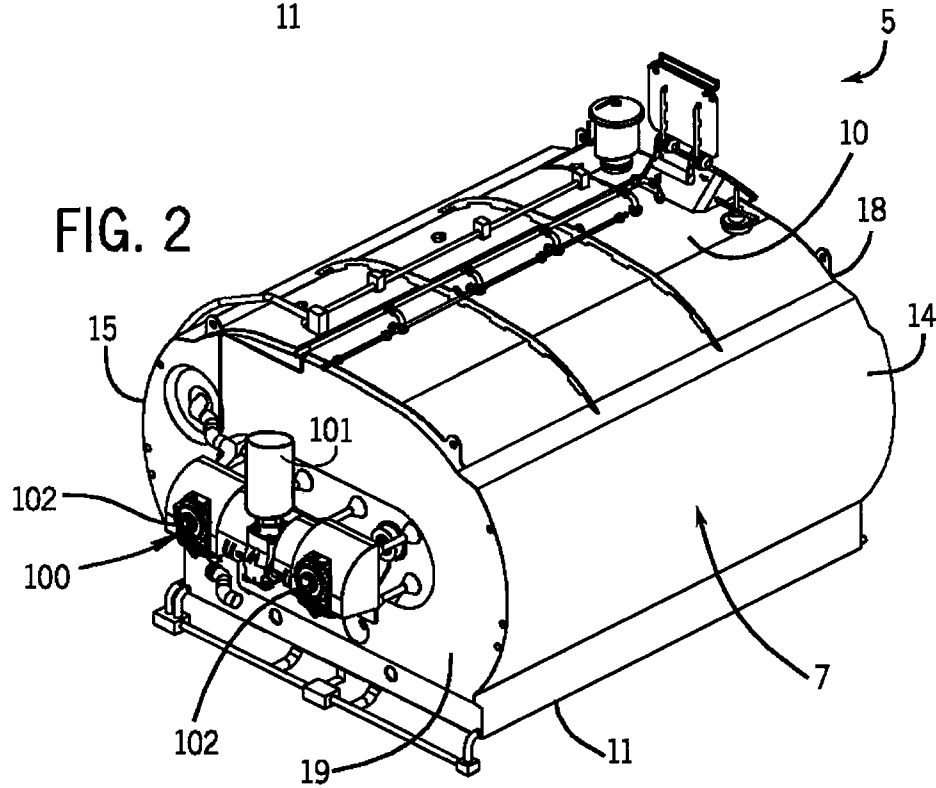


FIG. 2



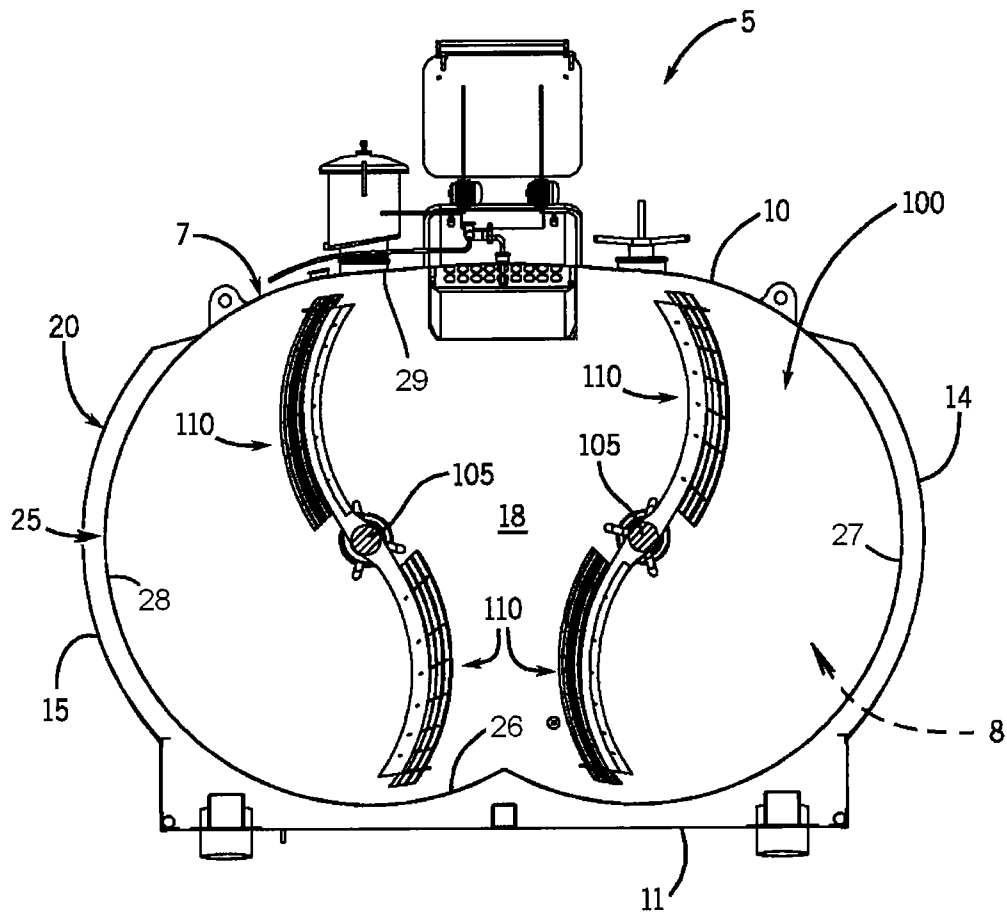


FIG. 3

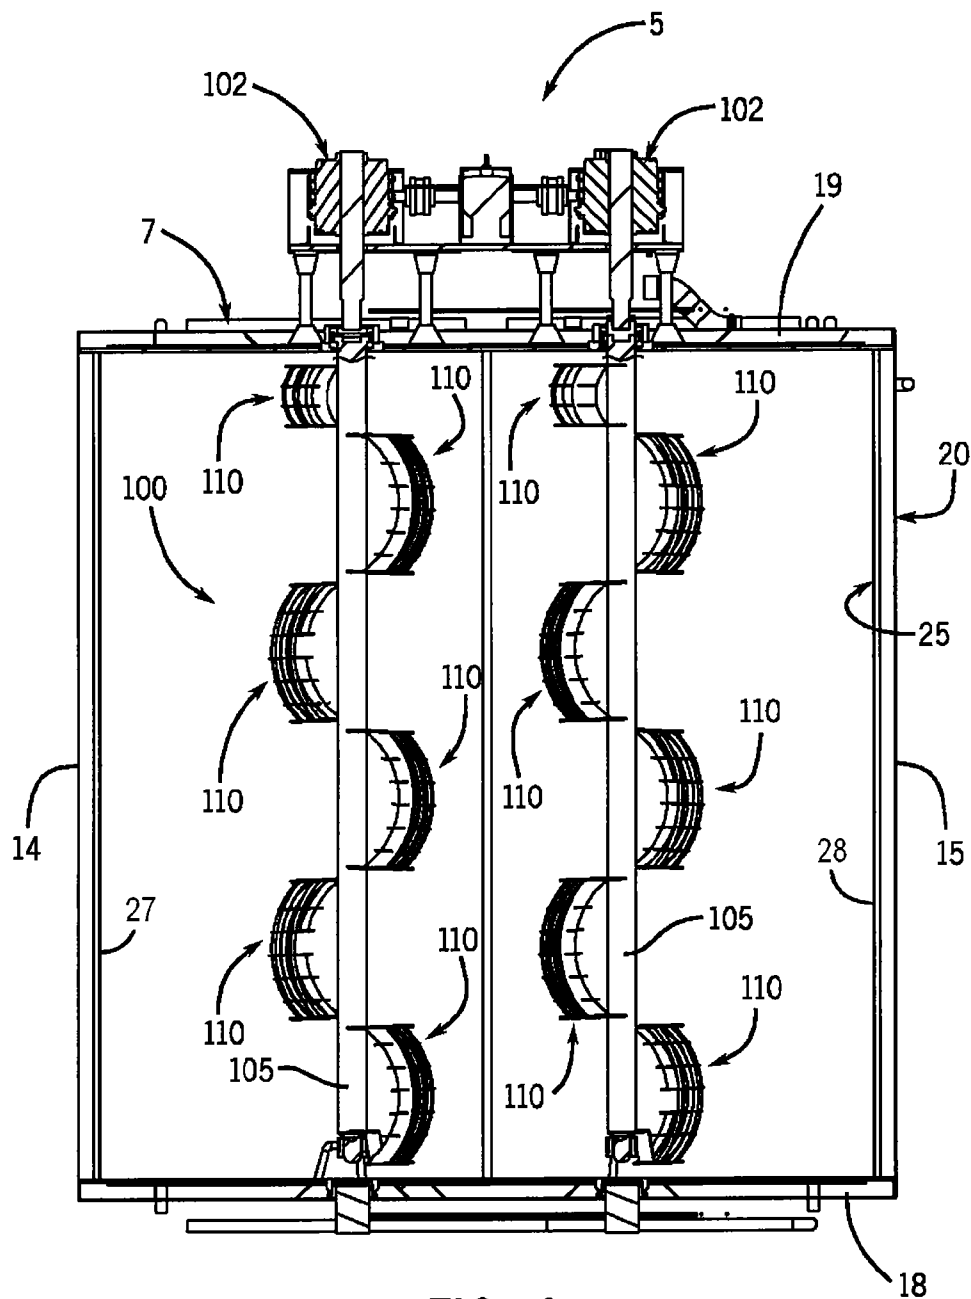


FIG. 4

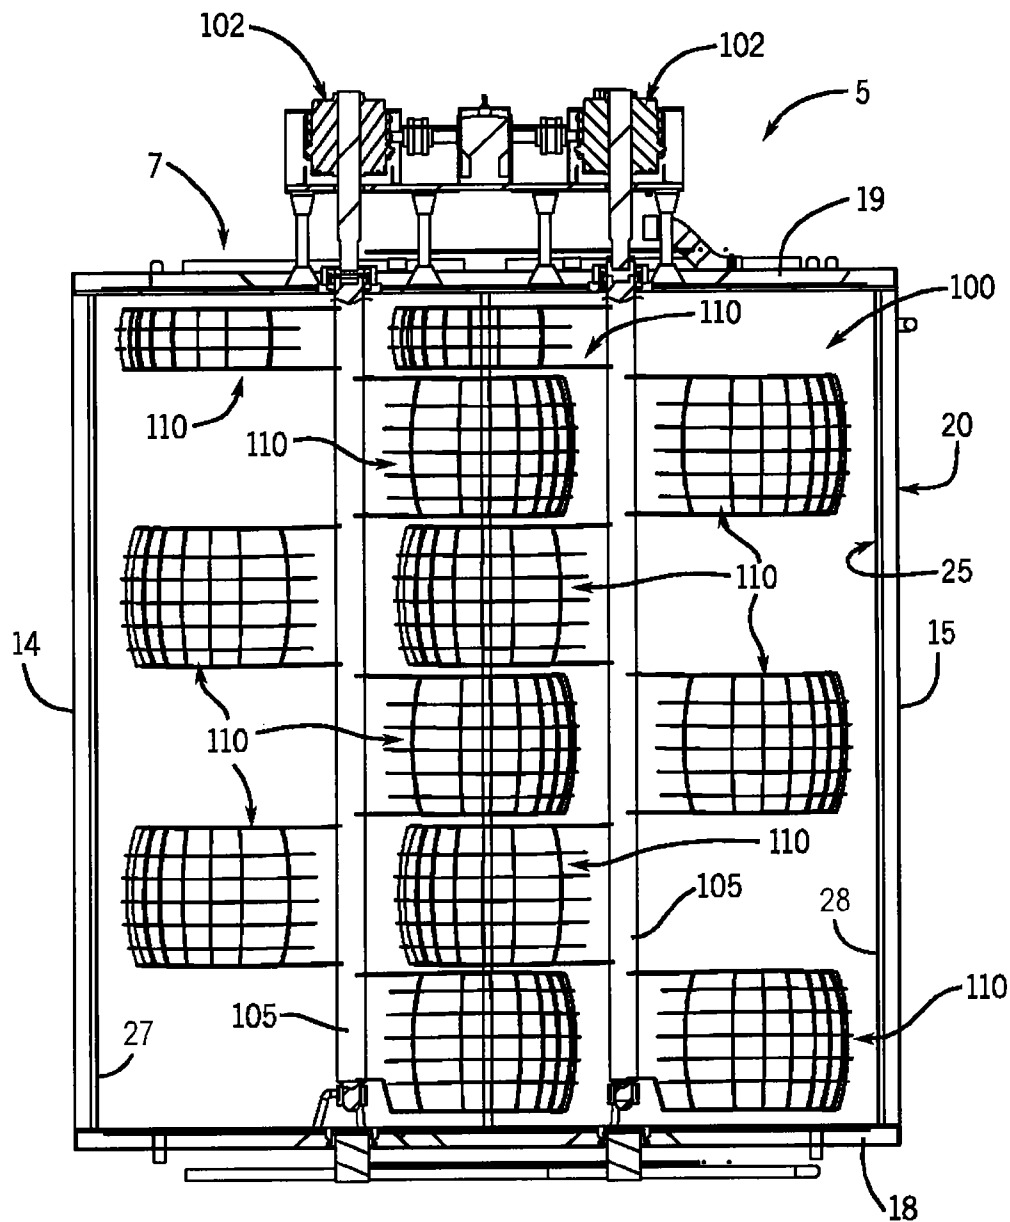


FIG. 5

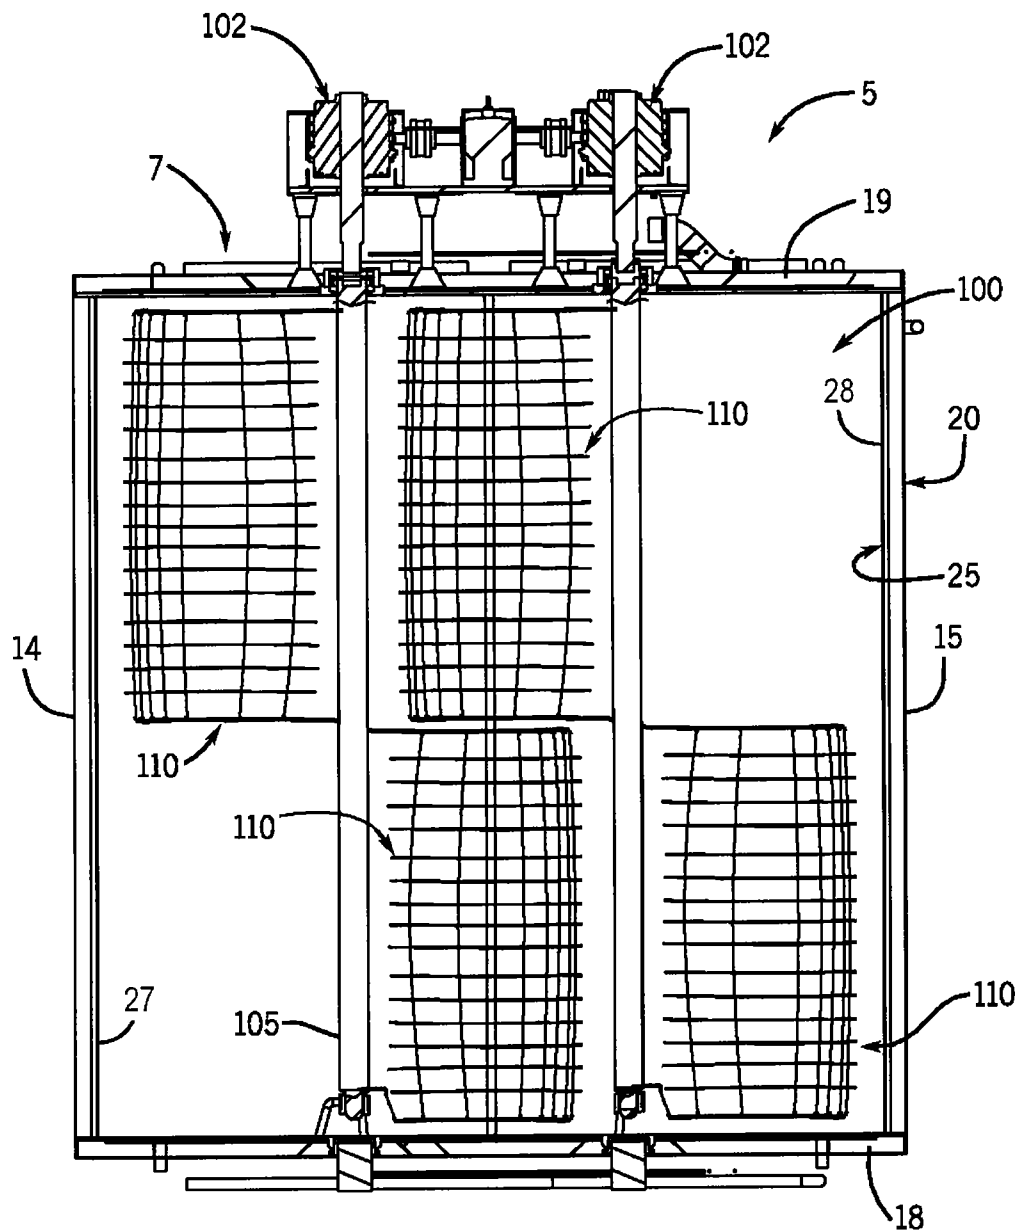


FIG. 6

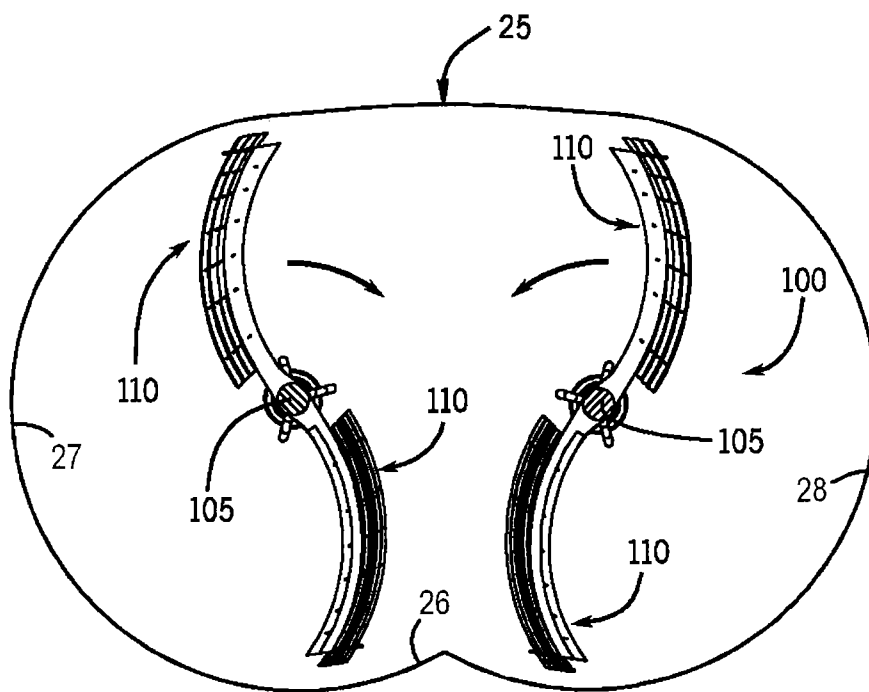


FIG. 7



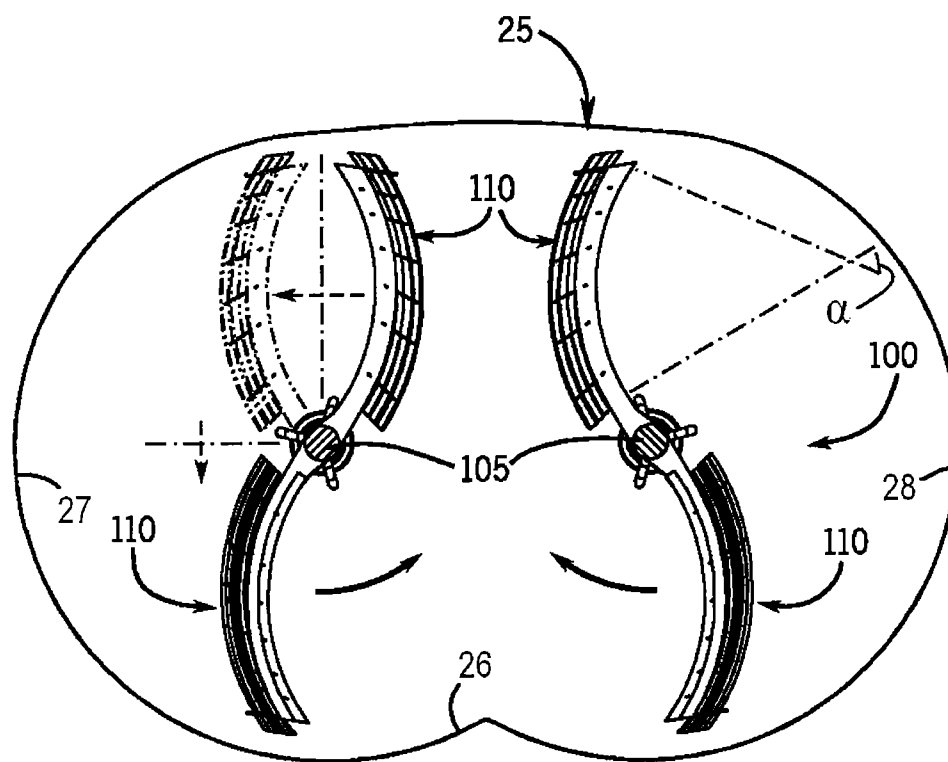


FIG. 8

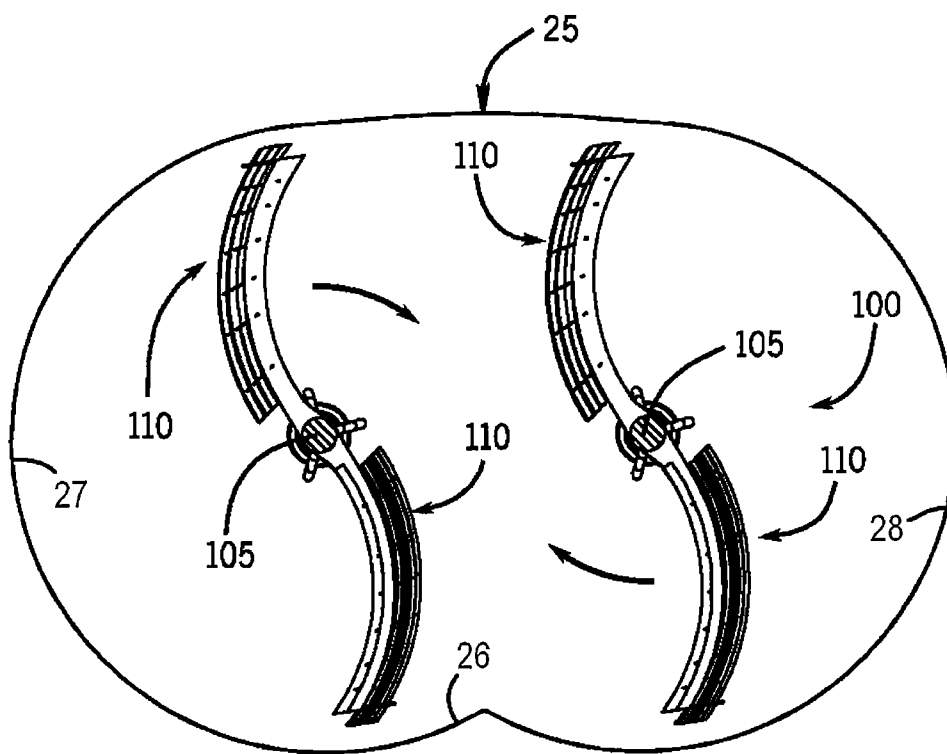


FIG. 9






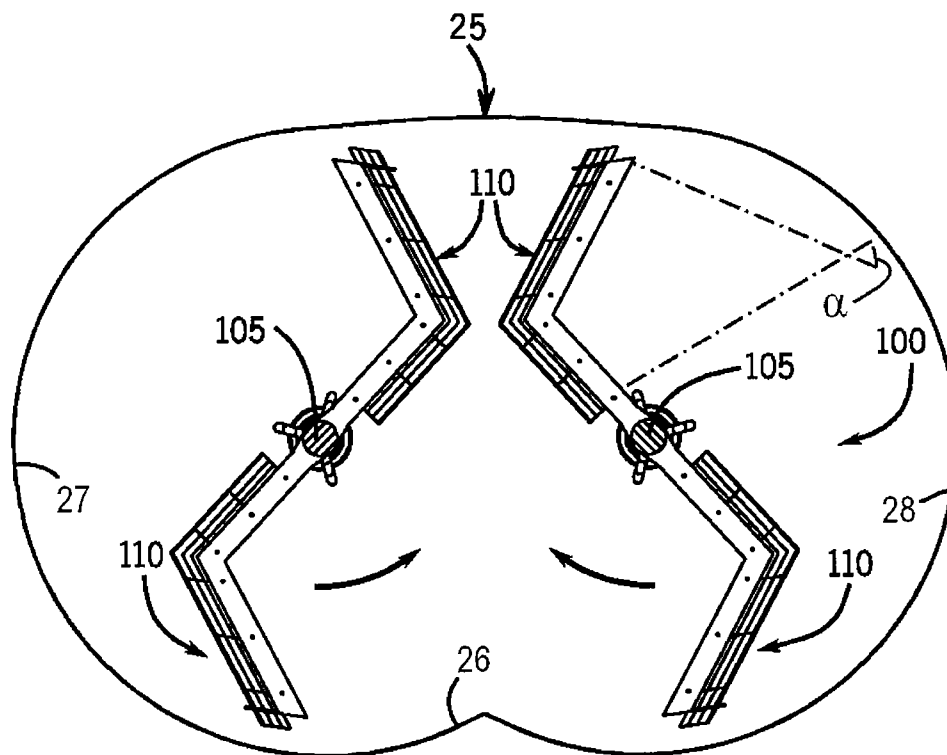


FIG. 10

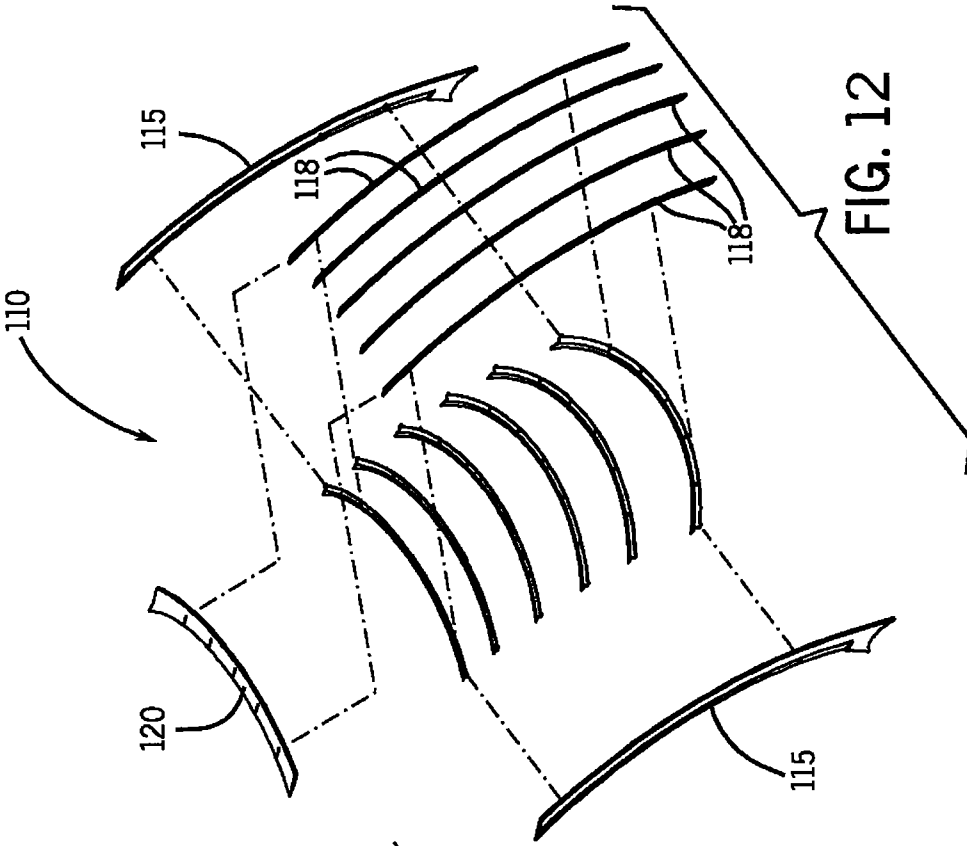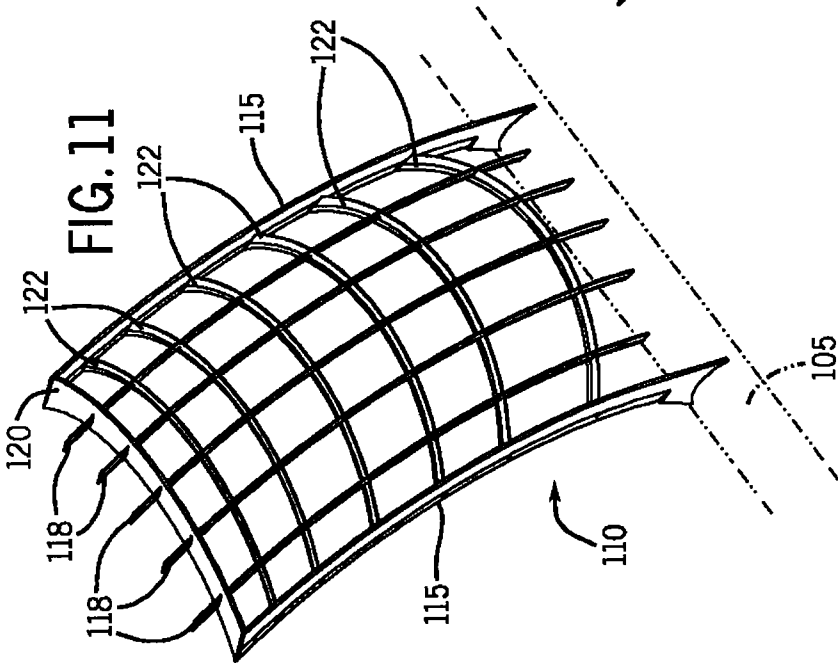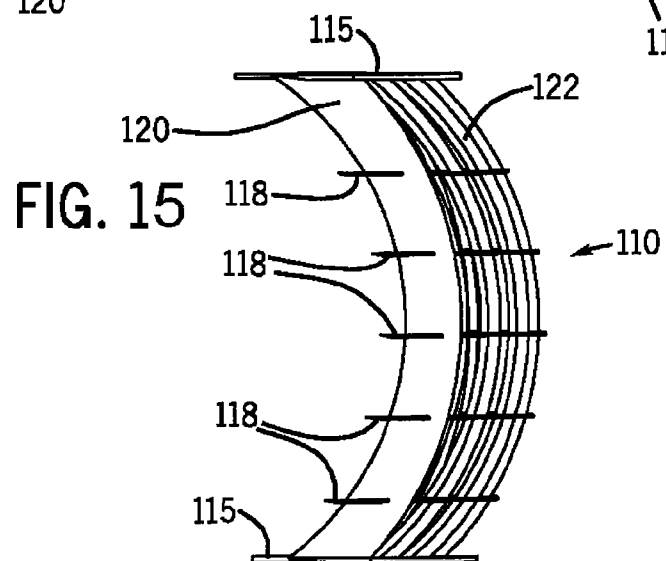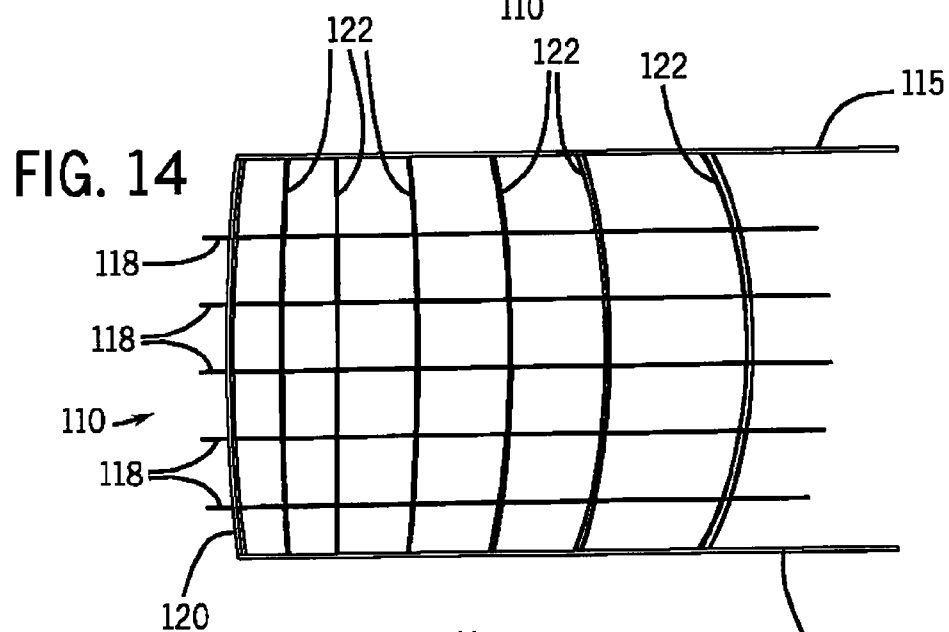

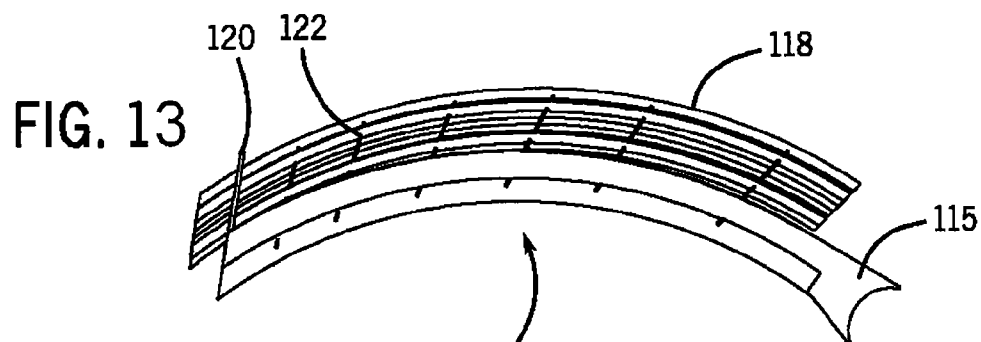

# BLADE ARRANGEMENT FOR A FOOD PROCESSING VAT

## CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority from U.S. Provisional Patent Application Ser. No. 61/325,612 filed on Apr. 19, 2010, the entirety of which is expressly incorporated by reference herein.

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The invention relates to food processing vats and, more particularly, to agitation and cutting systems of food processing vats.

### 2. Discussion of the Related Art

Agitation and cutting systems for use in food processing vats are known in the food processing industries. Such systems are widely used in equipment for processing semi-liquid food products, such as cheese vats.

Agitation and cutting systems used in cheese vats typically have panels mounted on and rotating with shafts. The panels have sharp edges on one surface and dull edges on an opposing surface. This allows the panels to rotate in the direction(s) that the sharp edges face to cut the contents of the food processing vat. Rotating the panels in the opposite direction(s), which the dull edges face, is done to stir the contents of the cheese vat.

## SUMMARY OF THE INVENTION

The inventors have recognized that in typical vats having two horizontal shafts, the agitators of the two shafts pass through a common swept volume in an alternating sequence from opposing sides of the vat. The inventors have also recognized that (i) such passing the agitators of the two shafts in an alternating sequence through the common swept volume imparts alternating directional changes to the vat contents moving within the vat, (ii) after each directional change, the vat contents and the respective agitator move in the same direction, and (iii) the efficiency of cutting or stirring when the agitator and vat contents move in the same direction is less than if they are moving in different directions. The inventors have further recognized that with typical flat-panel agitators, when the agitator and vat contents move in the same direction, e.g., circumferentially around a shaft that supports the flat-panel agitator, the vat contents move with a centrifugally directed flow component which forces the contents radially away from the shafts. The inventors have recognized that the centrifugal flow component imparts movement of the contents a direction that is tangential with the cutting or stirring surfaces of the flat-panel agitator, whereby the contents may at least partially slide outwardly along the flat-panel agitators, which may reduce the efficiency of the cutting or stirring. The inventors have also recognized that in typical vats, the agitators extend from a single side of or in substantially a single direction from the shafts and that this may cause rotational imbalances during use. The present invention contemplates a blade arrangement for a food processing vat that addresses these and other inventor identified problems and drawbacks of the prior art.

In accordance with an aspect of the invention, a food processing vat is provided with blade assemblies mounted on two horizontal shafts that define a common swept volume between them. Blade assemblies of the two shafts simulta-

neously move through the common volume, working the contents from both sides of the vat. This may enhance stirring or cutting of the contents by imparting a turbulent flow of the contents in the common volume which may ensure that the contents and blade assemblies are moving at least somewhat in different directions.

In accordance with another aspect of the invention, the blade assemblies define curved baskets and each shaft may include multiple curved baskets extending from it. Adjacent curved baskets on one shaft may be spaced from each other and in staggered alignment with corresponding spaced-apart curved baskets on the other shaft. This allows the multiple curved baskets of the pair of shafts to intermesh and simultaneously pass through the common volume between the shafts, whether the shafts rotate in the same or opposite directions, which may impart a cutting or stirring action that enhances turbulent flow of the vat contents in the common volume.

In accordance with another aspect of the invention, the blade assemblies extend generally in an axial direction away from the respective shafts. Each blade assembly faces different directions at different locations along its length. In this way, even if the vat contents and a blade assembly as a whole are moving in the same direction, since different portions of the blade assembly face different directions, the contents may be contacted by the different portions of the blade assembly in at least angularly different directions, which enhances cutting or stirring. Centrifugally flowing vat contents may encounter a portion of the blade assembly that faces angularly toward the shaft, such that the contents centrifugally flow in a direction which may be closer to normal with respect to that portion of blade assembly than tangential. This may enhance the cutting or stirring of the vat contents because the contents may be centrifugally forced through the blade assembly instead of sliding along it.

In accordance with another aspect of the invention, the blade assemblies have curved knives with different portions that face different directions along the length of the curved knives. The curved knives may cumulatively define a curved basket. The curved basket may be curved longitudinally and transversely so that it has a dish-in or concave side and an opposing dish-out or convex side. The longitudinal and transverse curvatures may be provided by curved longitudinal knives and curved transverse knives, respectively, of the curved basket. The curved baskets may enhance the cutting or stirring of the vat contents because the contents may be centrifugally forced through the curved basket instead of sliding along it.

In accordance with another aspect of the invention, a food processing vat is provided with blade assemblies that extend in opposing directions from the shaft(s). This may improve the rotational balance of the shaft(s) which may extend the use-life of bearings, bushings, and/or other shaft supporting structures.

In accordance with another aspect of the invention, the knife assemblies define curved baskets that extend in opposite directions, with respect to each other, from the shaft(s). The curved baskets may be mounted so that those extending in one direction are positioned as a result of a double reflection, a horizontal and a vertical reflection about the shaft when the shaft is viewed from an end view, with respect to the curved baskets extending in the opposite direction. The curved baskets that extend in opposite directions from the shaft, when viewed from an end view of the shaft, may define an S-shaped or sigmoidal profile so that their weights are substantially symmetrical about a centerline of the shaft. This may improve the rotational balance of the shaft during use.

3

Various other features, objects, and advantages of the invention will be made apparent from the following description taken together with the drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The drawings illustrate the best mode presently contemplated of carrying out the invention.

In the Drawings:

FIG. 1 is an isometric view from above and in front of a vat system incorporating a blade arrangement in accordance with the present invention;

FIG. 2 is an isometric view from above and in back of the vat system of FIG. 1;

FIG. 3 is a sectional view of the vat system of FIG. 1, taken at line 3-3 of FIG. 1;

FIG. 4 is a sectional view of the vat system of FIG. 1, taken at line 4-4 of FIG. 1;

FIG. 5 is the sectional view of the vat system of FIG. 1 as shown in FIG. 4, with the blade assemblies rotated to a different position than that shown in FIG. 4;

FIG. 6 is the sectional view of the vat system of FIG. 1 as shown in FIG. 4, with a variant of the blade assemblies;

FIG. 7 is a partially schematic sectional view of the shell and agitator system of the vat system of FIG. 1, facing toward the drives;

FIG. 8 is a partially schematic sectional view of the shell and a variant of the agitator system of the vat system of FIG. 1, facing toward the drives;

FIG. 9 is a partially schematic sectional view of the shell and another variant of the agitator system of the vat system of FIG. 1, facing toward the drives;

FIG. 10 is a partially schematic sectional view of the shell and another variant of the agitator system of the vat system of FIG. 1, facing toward the drives;

FIG. 11 is an isometric view of a blade assembly of the vat system of FIG. 1;

FIG. 12 is an exploded, isometric, view of the blade assembly of FIG. 11;

FIG. 13 is a side elevation view of the blade assembly of FIG. 11;

FIG. 14 is a front elevation view of the blade assembly of FIG. 11; and

FIG. 15 is a top plan view of the blade assembly of FIG. 11.

#### DETAILED DESCRIPTION OF THE INVENTION

FIGS. 1 and 2 illustrate a vat system 5 that can be used for processing food and related products (collectively referred to as "vat contents") by mechanically manipulating and heating or cooling the vat contents, depending on the particular food or related product being processed. In a representative application, the vat system 5 may be used in the production of cheese, although it is understood that the vat system 5 may be used in processing other types of food products. The system 5 includes a vat 7 that has a heat transferring system to perform such heating and cooling, and an agitation system 100 (FIG. 2) that performs the mechanical manipulations tasks.

Referring now to FIGS. 1-4, vat 7 defines an enclosure having a top wall 10, a bottom wall 11, and side walls 14, 15, all of which extend longitudinally between a pair of end walls 18 and 19 (FIGS. 1 and 3). The walls 10, 11, 14, are 15 are multilayered, having an outer jacket 20 and an inner shell 25 that are spaced from each other as shown best in FIGS. 3 and 4. Insulation and various components of the heat transferring system are housed between the jacket 20 and shell 25. The shell 25 is the inmost structure of the vat 7, so that its inner

4

surface surrounds and defines an outer periphery of a void or inside space 8 within the vat 7.

Referring now to FIGS. 3 and 4, a lower part of the inside space 8 resembles two horizontal parallel cylinders that transversely intersect each other, being defined by a bottom wall 26 (FIG. 3) of the shell 25 that has a pair of arcuate depressions which extend along the length of the vat 7, on opposing sides of a longitudinally extending raised middle segment. From the opposing sides of the shell bottom wall 26, opposing shell side walls 27, 28 extend in an outwardly bowed manner, arching away from each other in a transverse direction of the vat 7. A shell top wall 29 (FIG. 3) arcs gradually between top edges of the shell side walls 27, 28 and defines an upper perimeter of the inside space 8 of vat 7.

Referring now to FIGS. 2, 4, and 5, agitation system 100 includes a motor 101 that delivers power to a pair of drives 102 that rotate a pair of shafts 105 that are parallel to and spaced from each other, extending between the end walls 18, 19. Each rotating shaft 105 has multiple blade assemblies 110 that extend generally radially from the shaft 105, in opposing directions. In the embodiment of FIGS. 4 and 5, on each shaft 105, the blade assembly 110 that is closest to the drive(s) 102 is narrower than the other blade assemblies 110. In the embodiment of FIG. 6, the blade assemblies 110 are substantially the same widths and are wider than the blade assemblies 110 shown in FIGS. 4 and 5. In another embodiment (not illustrated), the blade assemblies 110 are slightly wider than the wider blade assemblies 110 shown in FIGS. 4 and 5 so that the blade assemblies 110 collectively extend entirely between the end walls 18, 19 of the vat 7, without using narrower blade assemblies 110 near the drives 102 or elsewhere along the shafts 105. Respective common direction facing sets of blade assemblies 110 of the shafts 105 travel simultaneously through a common swept volume between the shafts.

Referring now to FIGS. 3-5, on each of the shafts 105, each blade assembly 110 is spaced from adjacent blade assemblies 110 on that shaft 105. The blade assemblies 110 of the two different shafts 105 are staggered with respect to each other along the lengths of the shafts 105. This staggered alignment of the blade assemblies 110 allows them to intermesh through each other (FIG. 5) while they travel through the common volume as the shafts 105 to which they are mounted rotate. Stated another way, the rotational timing and relative positions of the blade assemblies 110 and spaces between them of each shaft 105 correspond, in a staggered way, to the positions of the blade assemblies 110 and intervening spaces of the other shaft 105, allowing the respective sets of blade assemblies 110 to intermesh through each other (FIG. 5). FIG. 5 shows a point in the rotation of the shafts 105 in which the blade assemblies 110 of the shafts 105 intermesh with each other, by simultaneously pointing toward the other shaft 105, whereby each blade assembly 110 points toward the shaft 105 to which it is not mounted. At such point in the rotation of the shafts 105, while the blade assemblies 110 intermesh, substantially an entire area between the two shafts 105 is occupied with blade assemblies 110 that extend into such area from the two shafts and thus from different directions.

Referring now to FIG. 6, in this embodiment, each shaft 105 has two blade assemblies 110 which face in opposing radial directions with respect to the shaft 105. It is understood, however, that each shaft 105 may have any number of blade assemblies 110 along its length such as, for example, three, four or more blade assemblies 110. When the blade assemblies 110 of this embodiment intermesh, half of the area between the shafts 105 is occupied by a blade assembly 110

5

from one of the shafts **105** and the other half of the area between the shafts **105** is occupied by a blade assembly **110** from the other shaft **105**.

Referring now to FIGS. **8-10**, each blade assembly **110** of these embodiments faces different directions and different locations along its length. In other words, the blade assemblies **110** are not flat when viewed from a side elevation. The embodiment shown in FIG. **10** has straight segments that angularly intersect, whereas the embodiments of FIGS. **8** and **9** are curved along their lengths, giving the blade assemblies curved profiles. As shown in FIGS. **8** and **10**, an angle  $\alpha$  of at least about 50 degrees, optionally at least about 60 degrees, is defined between the different directions faced by the blade assembly at the different locations. This is seen by the intersecting dashed lines that extend normal to the surfaces of the blade assemblies **110** and such different locations.

Still referring to FIGS. **8-10**, on each shaft **105**, the blade assemblies **110** extending in one direction are positioned as a result of a double reflection, a horizontal and a vertical reflection about the shaft **105**. This is shown with dashed reflecting lines and arrows in FIG. **8**, in which (i) a horizontal reflection of the left-side blade assembly **110** about a vertical axis extending through the shaft, and (ii) a vertical reflection of such horizontal reflection about a horizontal axis extending through the shaft are projected onto the right-side blade assembly. The double-reflected position of the blade assemblies **110** about the shaft **105** give the blade assemblies **110** a generally S-shaped or sigmoidal profile when viewed from an end view of the shaft **105**.

Referring now to FIGS. **3** and **4**, blade assembly **110** of this embodiment is curved along its length and along its width so that the corresponding curved length and width profiles define an overall curved basket configuration of the blade assembly **110**. Accordingly, this blade assembly **110** (i) faces different directions at different locations along its length, and (ii) faces different directions at different locations along its width. Thus, lines projected normal to the blade assembly **110** at different locations along its width will extend in different directions, similar to the dashed arrows showing different facing directions along the length of the blade assembly **110**, described above with respect to FIGS. **8** and **10**. Furthermore, the blade assembly **110** of the embodiment shown in FIG. **10** may face different directions at different location across its width. For example, the blade assembly of FIG. **10** may be angled or V-shaped in cross-section, instead of being flat in cross-section like it is in some implementations of this embodiment.

Referring now to FIGS. **11-14**, this blade assembly **110** includes two outer longitudinal knives **115** that connect to the shaft **105**, defining the lateral outer sides of the blade assembly **110**. Each of the outer longitudinal knives **115** has a wider bottom end that connects to the shaft. The wider bottom end has a curved cutout that corresponds in shape to the contour of the outer circumferential surface of the shaft **105**. Multiple intermediate longitudinal knives **118** that are spaced from each other are provided between the outer longitudinal knives **115**. The intermediate longitudinal knives **118** have the same radius of curvature as the outer longitudinal knives **115**. The intermediate longitudinal knives **118** are narrower, for example, about one-half or about one-third as wide, as the outer longitudinal knives **115**.

Referring now to FIGS. **11** and **14**, at the bottom of the blade assembly **110**, the intermediate longitudinal knives **118** are spaced from the shaft **105**, defining a generally rectangular opening between the (i) shaft **105**, (ii) inwardly facing surfaces of the lower ends of the outer longitudinal knives **115**, and (iii) lower ends of the intermediate longitudinal

6

knives **118**. At the top of the blade assembly **110**, upper ends of the intermediate longitudinal knives **118** project beyond a transverse end knife **120** that connects the outer and intermediate longitudinal knives **115**, **118** to each other. In other words, the upper ends of the intermediate longitudinal knives **118** project beyond the transverse end knife **120** and the rest of the blade assembly **110** in a claw-like manner.

Referring now to FIGS. **11**, **12**, and **14**, multiple lower transverse knives **122** that are spaced from each other extend between the outer longitudinal knives **115**, below or being closer to the shaft **105** than the transverse end knife **120**. The lower transverse knives **122** have the same radius of curvature as the transverse end knife **120**. The lower transverse knives **122** are narrower, for example, about one-half or about one-third as wide, as the transverse end knife **120**.

Referring again to FIGS. **11-14**, together, the interconnected curved longitudinal and transverse knives **115**, **118**, **120**, **122** define the curved basket configuration of the blade assembly, with opposing dish-in or concave and dish-out or convex sides. Within this curved basket of the blade assembly **110**, the edges of the longitudinal and transverse knives **115**, **118**, **120**, **122** that are on the concave side are chisel-sharpened or ground to sharp and thin edges, such that these sharpened edges cumulatively define a concave cutting surface of the blade assembly **110**. The edges are sharpened to angles of less than about 25 or 20 degrees, for example, about 19 degrees. The longitudinal and transverse knives **115**, **118**, **120**, **122** are made from stainless steel, for example, from a **2205** stainless steel alloy which can hold a sharp edge of about a 19 degree sharpened angle for extended periods of use. The opposing edges, i.e. those on the convex side of the longitudinal and transverse knives **115**, **118**, **120**, **122** are flat, such that these unsharpened edges cumulatively define a convex stirring surface of the blade assembly **110**.

Accordingly and referring now to FIG. **7**, during use of this embodiment, the shafts **105** rotate in opposite directions and the arrows indicate the direction of rotation during a cutting procedure. While cutting, toward the middle of the vat **7**, the blade assemblies **110** of both shafts **105** push downwardly, as a unit, against and cut through a horizontally extending columnar mass of the vat contents, while the blade assemblies **110** intermesh through each other (FIG. **5**). Toward the outsides of the vat **7**, the blade assemblies **110** simultaneously pull up and through the vat contents, adjacent the side walls **27**, **28**, while the shafts **105** rotate the blade assemblies **110** upwardly out of the vat contents and toward each other for collectively pushing downwardly through the common swept volume during the next rotational phase, in which the blade assemblies **110** again intermesh through each other. While performing a stirring procedure, the shafts **5** are rotated in the directions that are opposite those shown by the arrows. In so doing, the convex stirring surfaces face the direction of rotation of the shafts **5**.

Referring now to FIGS. **8** and **10**, as in FIG. **7**, the arrows indicate the direction of rotation of the shafts **105** during a cutting procedure. Unlike the embodiment of FIG. **7**, in the embodiments of FIGS. **8** and **10** the intermeshing cutting is performed while the blade assemblies **110** lift upwardly between the shafts **105**. Accordingly, in the embodiments of FIGS. **8** and **10**, while cutting, the blade assemblies **110** of both shafts **105** lift upwardly, as a unit, against and cut through a horizontally extending columnar mass of the vat contents in the middle common volume, while the blade assemblies **110** intermesh through each other (FIG. **5**). Toward the outsides of the vat **7**, the blade assemblies **110** simultaneously push down and through the vat contents, adjacent the side walls **27**, **28**, while the shafts **105** rotate the blade



7

assemblies **110** toward each other for collectively scooping under the common swept volume during the next rotational phase in which the blade assemblies **110** intermesh through each other, again. While performing a stirring procedure, the shafts **5** are rotated in the directions that are opposite those shown by the arrows. In so doing, the convex stirring surfaces face the direction of rotation of the shafts **5**.

Referring now to FIG. 9, in this embodiment, the shafts **105** rotate in the same direction and the arrows indicate the direction of rotation during a cutting procedure. The blade assemblies **110** on the right-side shaft **105** are flipped with respect to those seen in FIG. 3. This ensures that all of the concave cutting surfaces of the blade assemblies **110** will face the direction of rotation of the respective shafts **105**. In this embodiment, while cutting, the blade assemblies **110** of shafts **105** converge toward each other from above and below the common volume, cleaving through the mass of vat contents in the middle common volume, while the blade assemblies **110** intermesh through each other. Toward the outsides of the vat **7**, the blade assemblies **110** of the shaft **105** shown on the left side push up through the vat contents along side wall **27** while the blade assemblies **110** of the shaft **105** shown on the right side push down through the vat contents along wall **28**. Here too, a stirring operation is performed by rotating the shafts **105** in the directions that are opposite those shown by the arrows, so that the convex stirring surfaces face the direction of rotation of the shafts **5**. In another embodiment, not shown, the convex side is the sharpened cutting surface and the concave side is the unsharpened stirring surface.

Various alternatives and embodiments are contemplated as being within the scope of the following claims particularly pointing out and distinctly claiming the subject matter regarded as the invention.

We claim:

1. A food processing vat system comprising:  
a vat defining an inside space therein;  
first and second shafts configured to rotate in respective first and second directions of rotation within the inside space of the vat; and  
blade assemblies mounted to the shafts so that the blade assemblies travel through a common swept volume between the shafts, rotation of the shafts being timed so that at least some of the blade assemblies of each of the shafts simultaneously travel through the common swept volume, wherein each of the blade assemblies includes a first set of knives that are curved and extend in a longitudinal direction with respect to the blade assembly and a second set of knives that are curved and extend in a transverse direction with respect to the blade assembly and intersect the first set of knives defining a curved basket of interconnected knives at each of the blade assemblies, wherein each of the blade assemblies has a concave side and an opposing convex side defined by the curved basket of interconnected knives facing toward or away from the respective direction of rotation of the corresponding shaft to which the blade assembly is mounted.
2. The food processing vat system of claim 1, wherein the shafts rotate in opposite directions.
3. The food processing vat system of claim 2, the blade assemblies on each of the shafts being spaced from adjacent ones of the blades assemblies on the respective shaft.
4. The food processing vat system of claim 1, wherein the shafts rotate in the same direction.

8

5. The food processing vat system of claim 1, wherein the blade assemblies of the shafts intermesh through each other while simultaneously traveling through the common swept volume.

6. The food processing vat system of claim 5, the blade assemblies on one of the shafts being in staggered alignment with corresponding blade assemblies on the other one of the shafts.

7. The food processing vat system of claim 1, each of the shafts having blade assemblies that extend in opposite directions.

8. A food processing vat system comprising:

a vat defining an inside space therein;

a shaft configured to rotate within the inside space of the vat; and

a blade assembly mounted to the shaft and having a length and a width, the blade assembly defining a curved basket of interconnected knives including interconnected longitudinally extending curved knives extending along the length of the blade assembly and interconnected transversely extending curved knives extending along the width of the blade assembly, wherein the longitudinally extending curved knives and the transversely extending curved knives include sharpened edges facing different directions at different locations along both the length and the width of the blade assembly, wherein the blade assembly is not flat when viewed from a side elevation of the blade assembly facing toward an end of the shaft.

9. The food processing vat system of claim 8, wherein an angle of at least about 50 degrees is defined between the different directions faced by the blade assembly at the different locations.

10. The food processing vat system of claim 8, wherein opposing ends of the curved basket of interconnected knives face directions that define an angle of at least about 50 degrees therebetween.

11. The food processing vat system of claim 8, wherein the longitudinally extending curved knives extend in a generally radial direction from the shaft and are spaced from each other along a width of the curved basket.

12. A food processing vat system comprising:

a vat defining an inside space therein;

a shaft configured to rotate within the inside space of the vat, defining a direction of rotation of the shaft;

a first blade assembly mounted to and extending generally radially from the shaft in a first direction; and

a second blade assembly mounted to and extending generally radially from the shaft in a second, opposite direction; and

wherein each of the first and second blade assemblies defines a curved basket of interconnected knives including interconnected longitudinally extending curved knives and interconnected transversely extending curved knives and wherein each curved basket of interconnected knives of the first and second blade assemblies has a concave side and an opposing convex side arranged with the concave side or the convex side facing toward the direction of rotation of the shaft.

13. The food processing vat system of claim 12, wherein each of the blade assemblies (i) has a length and a width, and (ii) faces different directions at different locations along both the length and the width.

14. The food processing vat system of claim 12, wherein the first and second blades assemblies are mounted to the shaft so that when viewed from an end of the shaft, the second blade assembly is in a position of double reflection that is (i) a horizontal reflection of the first blade assembly about a

vertical axis extending through the shaft, and (ii) a vertical reflection of the horizontal reflection about a horizontal axis extending through the shaft.

**15.** The food processing vat system of claim **14**, wherein the longitudinally extending curved knives are spaced from each other along the width of the blade assembly. 5

**16.** The food processing vat system of claim **14**, the blade assemblies defining a generally S-shaped profile when viewed from an end view of the shaft.

\* \* \* \* \*