

(57) **Abrégé(suite)/Abstract(continued):**

independently of the speed limiter (9), in travel path by means of a switchable stop device. This limitation causes an actuation of the cage safety brake device in the corresponding travel direction. The construction of the abutment allows a functionally appropriate stopping of the cage

Abstract

In the case of this lift installation with a shortened cage travel path the furnishing of a temporary protective space below and/or above the cage (1) is carried out by activation of the cage safety brake device. In that case the speed limiter cable is limited, independently of the speed limiter (9), in travel path by means of a switchable stop device. This limitation causes an actuation of the cage safety brake device in the corresponding travel direction. The construction of the abutment allows a functionally appropriate stopping of the cage (1).

(Fig. I)

Lift installation with a device for furnishing a temporary protective space, a method for mounting the device and a method for furnishing the temporary protective space

FIELD OF THE INVENTION

The invention relates to a lift installation with a device for furnishing a temporary zone of protection, a method for mounting the device and a method for furnishing the temporary zone of protection, according to the introductory part of the independent patent claims, which is preferably used for modernisation of existing buildings or for new installations.

BACKGROUND OF THE INVENTION

The lift installation is installed in a shaft. It essentially consists of a cage which is connected with a counterweight by way of support means. The cage is moved along a substantially vertical cage travel path by means of a drive which selectably acts on the support means or directly on the cage or the counterweight. For protection of maintenance personnel, minimum protective spaces are to be guaranteed in the end zones of the cage travel path. The protective space ensures that the maintenance personnel, who stand in the protective space or on the cage, are not put at risk even in the case of unexpected movements of the cage. If in the case of existing buildings a lift installation is newly fitted or the travel speed of the cage is increased, in many instances an insufficient length of cage travel path is available. The necessary minimum protective spaces cannot be guaranteed.

If only an insufficient protective space is available, the cage travel path is usually limited at the time of maintenance or when a person stands in the shaft or on the cage so that the requisite protective space can be temporarily guaranteed. The cage travel path limited in that matter is termed shortened shaft region.

A lift installation is known from EP 1 118 574 in which a temporary protective space is ensured under the travel frame by activation of at least one braking device which is present. The activation is effected by, for example, the speed limiter.

The problem of this solution is now to be seen in that an activation by the speed limiter presupposes taking into consideration the positional information of the cage, since the cage, as long as it is not located in the critical end zones, has to carry on travelling. This causes an increase in cost of the drive control. In addition, the drive control is not readily obvious and thereby makes visual checking by the maintenance expert difficult. Due to the conventionally usual method of triggering the speed limiter there is uncertainty with respect to the instant of actuation of the braking device, since the blocking distance of the speed limiter, for example cam distance and build up of frictional force at the speed limiter, can be difficult to define.

SUMMARY OF THE INVENTION

Accordingly, it is an object of this invention to at least partially overcome some of the disadvantages of the prior art.

The invention has the object of proposing a simple actuation of the cage braking device for furnishing a temporary protection space and a method of furnishing the same, which eliminates the problems outlined in the foregoing, is economic and permits simple mounting.

In that case the cage safety brake device attached to the cage and acting at one side or at both sides is actuated by the speed limiter cable. The speed limiter cable is connected at one end with the actuating unit of the cage safety brake device. It is led in a first portion to the speed limiter, loops the speed limiter arranged in the shaft head or engine room and runs, in the counter run, parallel to the first portion to the deflecting and tensioning roller, which is arranged in the shaft pit, of the speed limiter system. From there the speed limiter cable is led in the second portion back to the connecting point at the actuating unit of the cage safety brake device and fastened. On stopping of the speed limiter cable, the cage safety brake device is actuated in correspondence with the travel direction of the cage and the cage safety brake device brings the cage to a safe stop. Depending on the mode of construction of the cage safety brake device, the stopping function is given only in downward travel direction or is given in both travel directions. According to the invention an abutment is fastened in the speed limiter cable. The abutment follows a travel path corresponding with the cage travel path. Fixedly mounted in the shaft is at least one stop device which can be moved out and which, in moved-out setting (the stopping position), stops the abutment, which is fastened to the

speed limiter cable, in the corresponding travel direction so that the speed limiter cable stops, whereby the cage safety brake device is actuated. The fastening point of the stop device in the shaft thus limits the travel path of the cage in the associated travel direction. Through arrangement of a respective stop device in the upper region of the shaft and in the lower region of the shaft a temporary protective space can be furnished at both ends of the cage travel path if a cage safety brake device acting at both sides is used at the cage. The temporary protection space at the lower end of the cage travel path is termed lower temporary protection space and the temporary protection space at the upper end of the cage travel path is termed upper temporary protection space.

The illustrated solution gives an economic possibility for creation of a temporary protection space. It is simple to install and the function can be visually checked by maintenance personnel at any time, since the setting of the stop device is readily apparent in visual terms.

In the stopping position, i.e. in the moved-out setting of the stop device, the normal operation of the lift installation is blocked. Depending on the control figuration, journeys at low speed are possible as long as the lift cage is located within the now shortened shaft region. An optimum service-friendliness of the lift installation is thereby given. A further positional checking before engagement of the stop device is redundant, since the cage can move at any time within the shortened shaft region.

Accordingly, in one of its aspects, this invention resides in a device for an elevator installation having a car movable in a shaft, and a car safety brake device acting on the car and being actuable by a speed limiter cable, the device comprising: at least one abutment fastened to one of the speed limiter cable and an actuating unit for the safety brake device; and at least one stop device switchable between an open position and a stopping position and fastened in the shaft for blocking movement of the speed limiter cable when in said stopping position and in cooperation with said at least one abutment to actuate the safety brake device and prevent movement of the car whereby said at least one stop device is not switched to said stopping position in response to an overspeed condition of the car.

In another aspect, the present invention resides in a method of mounting a device for providing a temporary protection space in an existing or new elevator installation shaft in which a car is braked by a car safety brake device actuable by blocking a speed limiter

cable, comprising the steps of: a) fastening at least one abutment to the speed limiter cable; and b) mounting at least one switchable stop device in the shaft relative to the speed limiter cable whereby when the at least one stop device is switched to a stopping position, the at least one stop device engages the at least one abutment and blocks the speed limiter cable, said at least one stop device not being switched to said stopping position in response to an overspeed condition of the car.

In a further aspect, the present invention resides in a method of furnishing a temporary protection space above and/or below a car in an elevator shaft in which the car is braked by a car safety brake device actuable by blocking a speed limiter cable, comprising the steps of: a) fastening at least one abutment to the speed limiter cable; b) mounting at least one switchable stop device in the shaft; and c) switching the at least one switchable stop device to a stopping position whereby the at least one switchable stop device engages the at least one abutment to limit travel of the speed limiter cable and prevent the car from entering a protection space in the shaft, said at least one stop device not being switched to said stopping position in response to an overspeed condition of the car.

Further aspects of the invention will become apparent upon reading the following detailed description of the drawings, which illustrate the invention and preferred embodiments of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is explained in more detail in the following on the basis of an example of embodiment in conjunction with the drawings, in which:

- Fig. I shows a view of the lift installation with reduced shaft pit depth and reduced shaft head height,
- Fig. II shows a view of the first blocking device,
- Fig. III shows a view of the second blocking device,
- Fig. IV shows a detail embodiment of a fork,
- Fig. V shows an example of embodiment of an abutment and

Fig. VI shows an example of embodiment of a resilient abutment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the invention and its advantages can be understood by referring to the present drawings. In the present drawings, like numerals are used for the like and corresponding parts of the accompanying drawings.

One possible overall arrangement is illustrated in Fig. I. The illustrated lift installation requires a temporary protective space at both ends of the cage travel path (4b, 4a). A cage (1) is provided with a cage safety brake device (5) acting at both sides. The cage safety brake device (5) is actuated by a speed limiter (9) by way of an associated actuating unit safety brake device (6) and a speed limiter cable (10) in the case of excess speed of the cage (1). The actuated cage safety brake devices (5) bring the cage (1) to a standstill.

According to the invention an abutment (13) is fastened in the speed limiter cable (10). A first stop device (14) is fastened at the top, and a second stop device (17) at the bottom, in a shaft (4). Forks (15, 18) at the top and bottom are brought by an actuating element (16, 19) into a stopping position (S) or into an open position (O). In the open position (O) the abutment (13) can pass the stop devices (14, 17) unhindered. The cage (1) can reach the end positions provided in accordance with the lift installation. In the stopping position (S), the abutment (13) is limited in its travel path by the stop devices (14, 17). The abutment (13) fastened to the speed limiter cable (10), on reaching one of the stop devices (14 and 17), stops the speed limiter cable (10), which thus actuates the cage safety brake device (5) and necessarily leads the cage (1) to standstill. The cage (1) can no longer reach the end positions. The requisite temporary protective spaces (4b, 4a) at the lower and upper end of the cage travel path are guaranteed. The illustrated solution gives an economic possibility for securing the requisite temporary protective space. It is simple to install and the function can be visually checked at any time by the maintenance personnel, since the setting of the stop devices (14, 17) is readily apparent visually.

In a preferred version, the stop device (14, 17) is additionally designed in such a manner, as shown in Figs. II and III, that it can apply the required actuating force in only one travel direction and does not obstruct movement in the opposite travel direction. This allows

that a special monitoring unit does not have to observe the location of the cage (1) on movement out of the stop device (14, 17). If, for example, the cage is disposed at the lowermost stop when the stop device (14) is moved out, i.e. within the space (4b) to be protected, the stop device (14) nevertheless can be moved out. A risk does not thereby arise, since access to the shaft pit via the cage (1) standing at the lowermost stop is blocked. However, the cage (1) can now be moved at low speed to outside the protective space (4b) without this being prevented by the stop device (14). However, after travelling past the stop device (14) in the opposite direction return travel into the protective space is prevented.

The advantage of this solution is to be seen in that on the one hand the lift installation can be moved in simple manner for maintenance purposes, but, also in evacuation operation, the evacuation is not prevented by the illustrated solution.

In a preferred version the abutment (13) is, as illustrated in Fig. I, arranged in the counter run (10a) of the speed limiter cable (10). This has the advantage that a large measure of freedom exists in placement of the stop devices (14, 17), since there is no collision with the actuating unit safety brake device (6).

Alternatively, the abutment (13) together with a coupling point (7) at the actuating unit safety brake device (6) can form a subassembly. In the individual case this enables a better possibility of placement of the stop devices (14, 17).

The abutment (13) is constructed, as shown in Fig. V by way of example, in the form of a cylinder with rounded end regions. It is clamped onto the speed limiter cable (10) in the counter run (10a) of the speed limiter cable (10) or forms, together with the coupling point (7), a subassembly. The embodiment shown in Fig. V, without a specific resilient characteristic, is primarily suitable for cage safety brake devices (5) with a blocking function. This embodiment is particularly economic to realise and simple to install.

In the case of the abutment (13) shown in Fig. VI, abutment ends (22) are connected with an abutment block (20) by means of biased springs (21). The abutment block (20) is clamped onto the speed limiter cable (10) in the counter run (10a) of the speed limiter cable or forms, together with the coupling point (7), a subassembly. The abutment ends (22) are guided in a guide (23). This embodiment makes possible for the speed limiter cable (10), after actuation of the cage safety brake device (5), a further movement in

correspondence with the stopping travel of the cage (1), wherein the abutment ends, after resetting of the cage (1) into the shortened shaft region, automatically return to the starting setting. This embodiment is preferably suitable for cage safety brake devices (5) with a braking characteristic (braking safety brake devices).

The stop device (14, 17) is preferably constructed, as shown in Fig. IV, in the form of a fork (15). The fork (15) in the stopping position (S) of the stop device (14, 17) encloses the speed limiter cable (10) on three sides. The speed limiter cable (10) is thereby substantially guided. This embodiment is economic and simple to execute.

If the fork (15) of the stop device (17, 14) is supported, for example as shown in Fig. III, by means of a resilient element on the wall support, there is similarly made possible for the speed limiter cable (10) a further movement in correspondence with the stopping travel of the cage (1). The proposed construction allows the fork (15) to push back into the desired setting as soon as the cage (1) is reset into the shortened shaft region.

The position of the stop device (14, 17) is, as illustrated in Figs. II and III, preferably controlled in each instance by a stroke magnet (16). This enables a reliable and cost-optimal actuation of the stop devices (14, 17) in correspondence with the desired control.

If a cage safety brake system acting at both sides is used, a respective stop device is employed for limiting the travel path in both end zones. In the case of fastening of the abutment (13) in the counter run (10), the stop device (14) installed in the upper shaft region is, as shown in Figs. I, II and III, used for furnishing a temporary protective space at the bottom and in the case of a corresponding requirement the stop device (17) is selectably employed in the lower shaft region for furnishing a temporary protective space at the top. The association is correspondingly changed with the arrangement of the abutment (13) at the coupling point (7). The optional use of the stop devices (14, 17) allows a solution, which is appropriate to requirements and thus cost-efficient, for furnishing a temporary protective zone.

The parts required for furnishing a temporary protective zone, such as abutment (13), one or more stop devices (14, 17) and switching elements, can be mounted in simple manner in the lift installation. The function is readily apparent. The invention is suitable for existing installations and also for new installations.

The stopping position (S) of the abutments (14, 17) is electrically monitored (not illustrated in the figures). A normal travel is thus prevented in the stopping position (S). On actuation of the cage safety brake device (5) a safety contact of the cage safety brake device (5) is necessarily opened, which leads to an electrical switching-off of the drive. A provided evacuation device enables a return movement of the cage from the overrun zone into the shortened shaft region. A rapid evacuation of trapped persons is thereby possible.

Several possibilities exist for controlling or switching the stop device for the stop devices (14, 17). The stop devices (14, 17) are advantageously moved out on manual opening of a shaft closure, for example for carrying out maintenance operations within the shaft. A resetting of the stop devices (14, 17) can be undertaken only from outside the shaft by an authorised person. Checking of the authorisation is carried out by known elements such as a key, input of a code or a similar method. Alternatively, the resetting can be blocked by additional systems such as, for example, detectors of presence in the shaft space. In the case of multiple shafts, the stop devices (14, 17) can additionally be checked by monitoring of the intermediate barriers. The intermediate barriers are, for example, gratings which are installed between two adjacent cage travel paths and which are usually provided with passage openings.

With knowledge of the present invention the lift expert can change the set forms and arrangements as desired. For example, the illustrated pivot format of the stop devices can also be replaced by a thrust format or there can be used, for switching the stop device, apart from stroke magnets, also other mechanical elements such as, for example, Bowden pulls, or electromagnetic elements such as, for example, setting motors, other electromagnets or further elements.

What is claimed is:

1. A device for an elevator installation having a car movable in a shaft, and a car safety brake device acting on the car and being actuable by a speed limiter cable, the device comprising:

at least one abutment fastened to one of the speed limiter cable and an actuating unit for the safety brake device; and

at least one stop device switchable between an open position and a stopping position and fastened in the shaft for blocking movement of the speed limiter cable when in said stopping position and in cooperation with said at least one abutment to actuate the safety brake device and prevent movement of the car whereby said at least one stop device is not switched to said stopping position in response to an overspeed condition of the car.

2. The device according to claim 1 wherein said at least one stop device is mounted in an upper end of the shaft and said at least one stop device cooperates with said at least one abutment to provide a lower temporary protection space in the shaft when said at least one stop device is in said stopping position.

3. The device according to claim 2 including another stop device mounted in a lower end of the shaft and wherein said at least one abutment and said another stop device cooperate to provide an upper temporary protection space in the shaft when said another stop device is in an associated stopping position.

4. The device according to claim 1 wherein said at least one stop device is mounted in a lower end of the shaft and said at least one abutment and said at least one stop device in said stopping position cooperate to provide an upper temporary protection space in the shaft.

5. The device according to any one of claims 1 to 4 wherein said at least one abutment is fastened to a counter run of the speed limiter cable.

6. The device according to any one of claims 1 to 5 including a coupling point attached to the actuating unit, said coupling point and said at least one abutment being connected to form a subassembly.

7. The device according to claim 6 wherein when said at least one stop device is mounted in an upper end of the shaft, said at least one abutment and said at least one stop device cooperate to provide an upper temporary protection space in the shaft when said at least one stop device is in said stopping position.
8. The device according to claim 7 including another stop device mounted in a lower end of the shaft and wherein said at least one abutment and said another stop device cooperate to provide a lower temporary protection space in the shaft when said another stop device is in an associated stopping position.
9. The device according to claim 6 wherein when said at least one stop device is mounted in a lower end of the shaft, said at least one abutment and said at least one stop device cooperate to provide a lower temporary protection space in the shaft when said at least one stop device is in said stopping position.
10. The device according to any one of claims 1 to 9 wherein said at least one abutment has a cylinder shape with round ends and is clamped to the speed limiter cable.
11. The device according any one of claims 1 to 10 wherein said at least one abutment includes means providing a further limited movement of the car when said at least one abutment engages said at least one stop device.
12. The device according claim 11 wherein said means providing a further limited movement includes a spring biasing an abutment end of said at least one abutment.
13. The device according to any one of claims 1 to 12 wherein said at least one stop device includes a fork shaped to enclose the speed limiter cable on three sides and block said at least one abutment in said stopping position.
14. The device according to any one of claims 1 to 13 wherein said at least one stop device includes an electrically actuated magnet for switching into said stopping position.

15. A method of mounting a device for providing a temporary protection space in an existing or new elevator installation shaft in which a car is braked by a car safety brake device actuable by blocking a speed limiter cable, comprising the steps of:

- a) fastening at least one abutment to the speed limiter cable; and
- b) mounting at least one switchable stop device in the shaft relative to the speed limiter cable whereby when the at least one stop device is switched to a stopping position, the at least one stop device engages the at least one abutment and blocks the speed limiter cable, said at least one stop device not being switched to said stopping position in response to an overspeed condition of the car.

16. A method of furnishing a temporary protection space above and/or below a car in an elevator shaft in which the car is braked by a car safety brake device actuable by blocking a speed limiter cable, comprising the steps of:

- a) fastening at least one abutment to the speed limiter cable;
 - b) mounting at least one switchable stop device in the shaft; and
 - c) switching the at least one switchable stop device to a stopping position
- whereby the at least one switchable stop device engages the at least one abutment to limit travel of the speed limiter cable and prevent the car from entering a protection space in the shaft, said at least one stop device not being switched to said stopping position in response to an overspeed condition of the car.

1

Fig 1

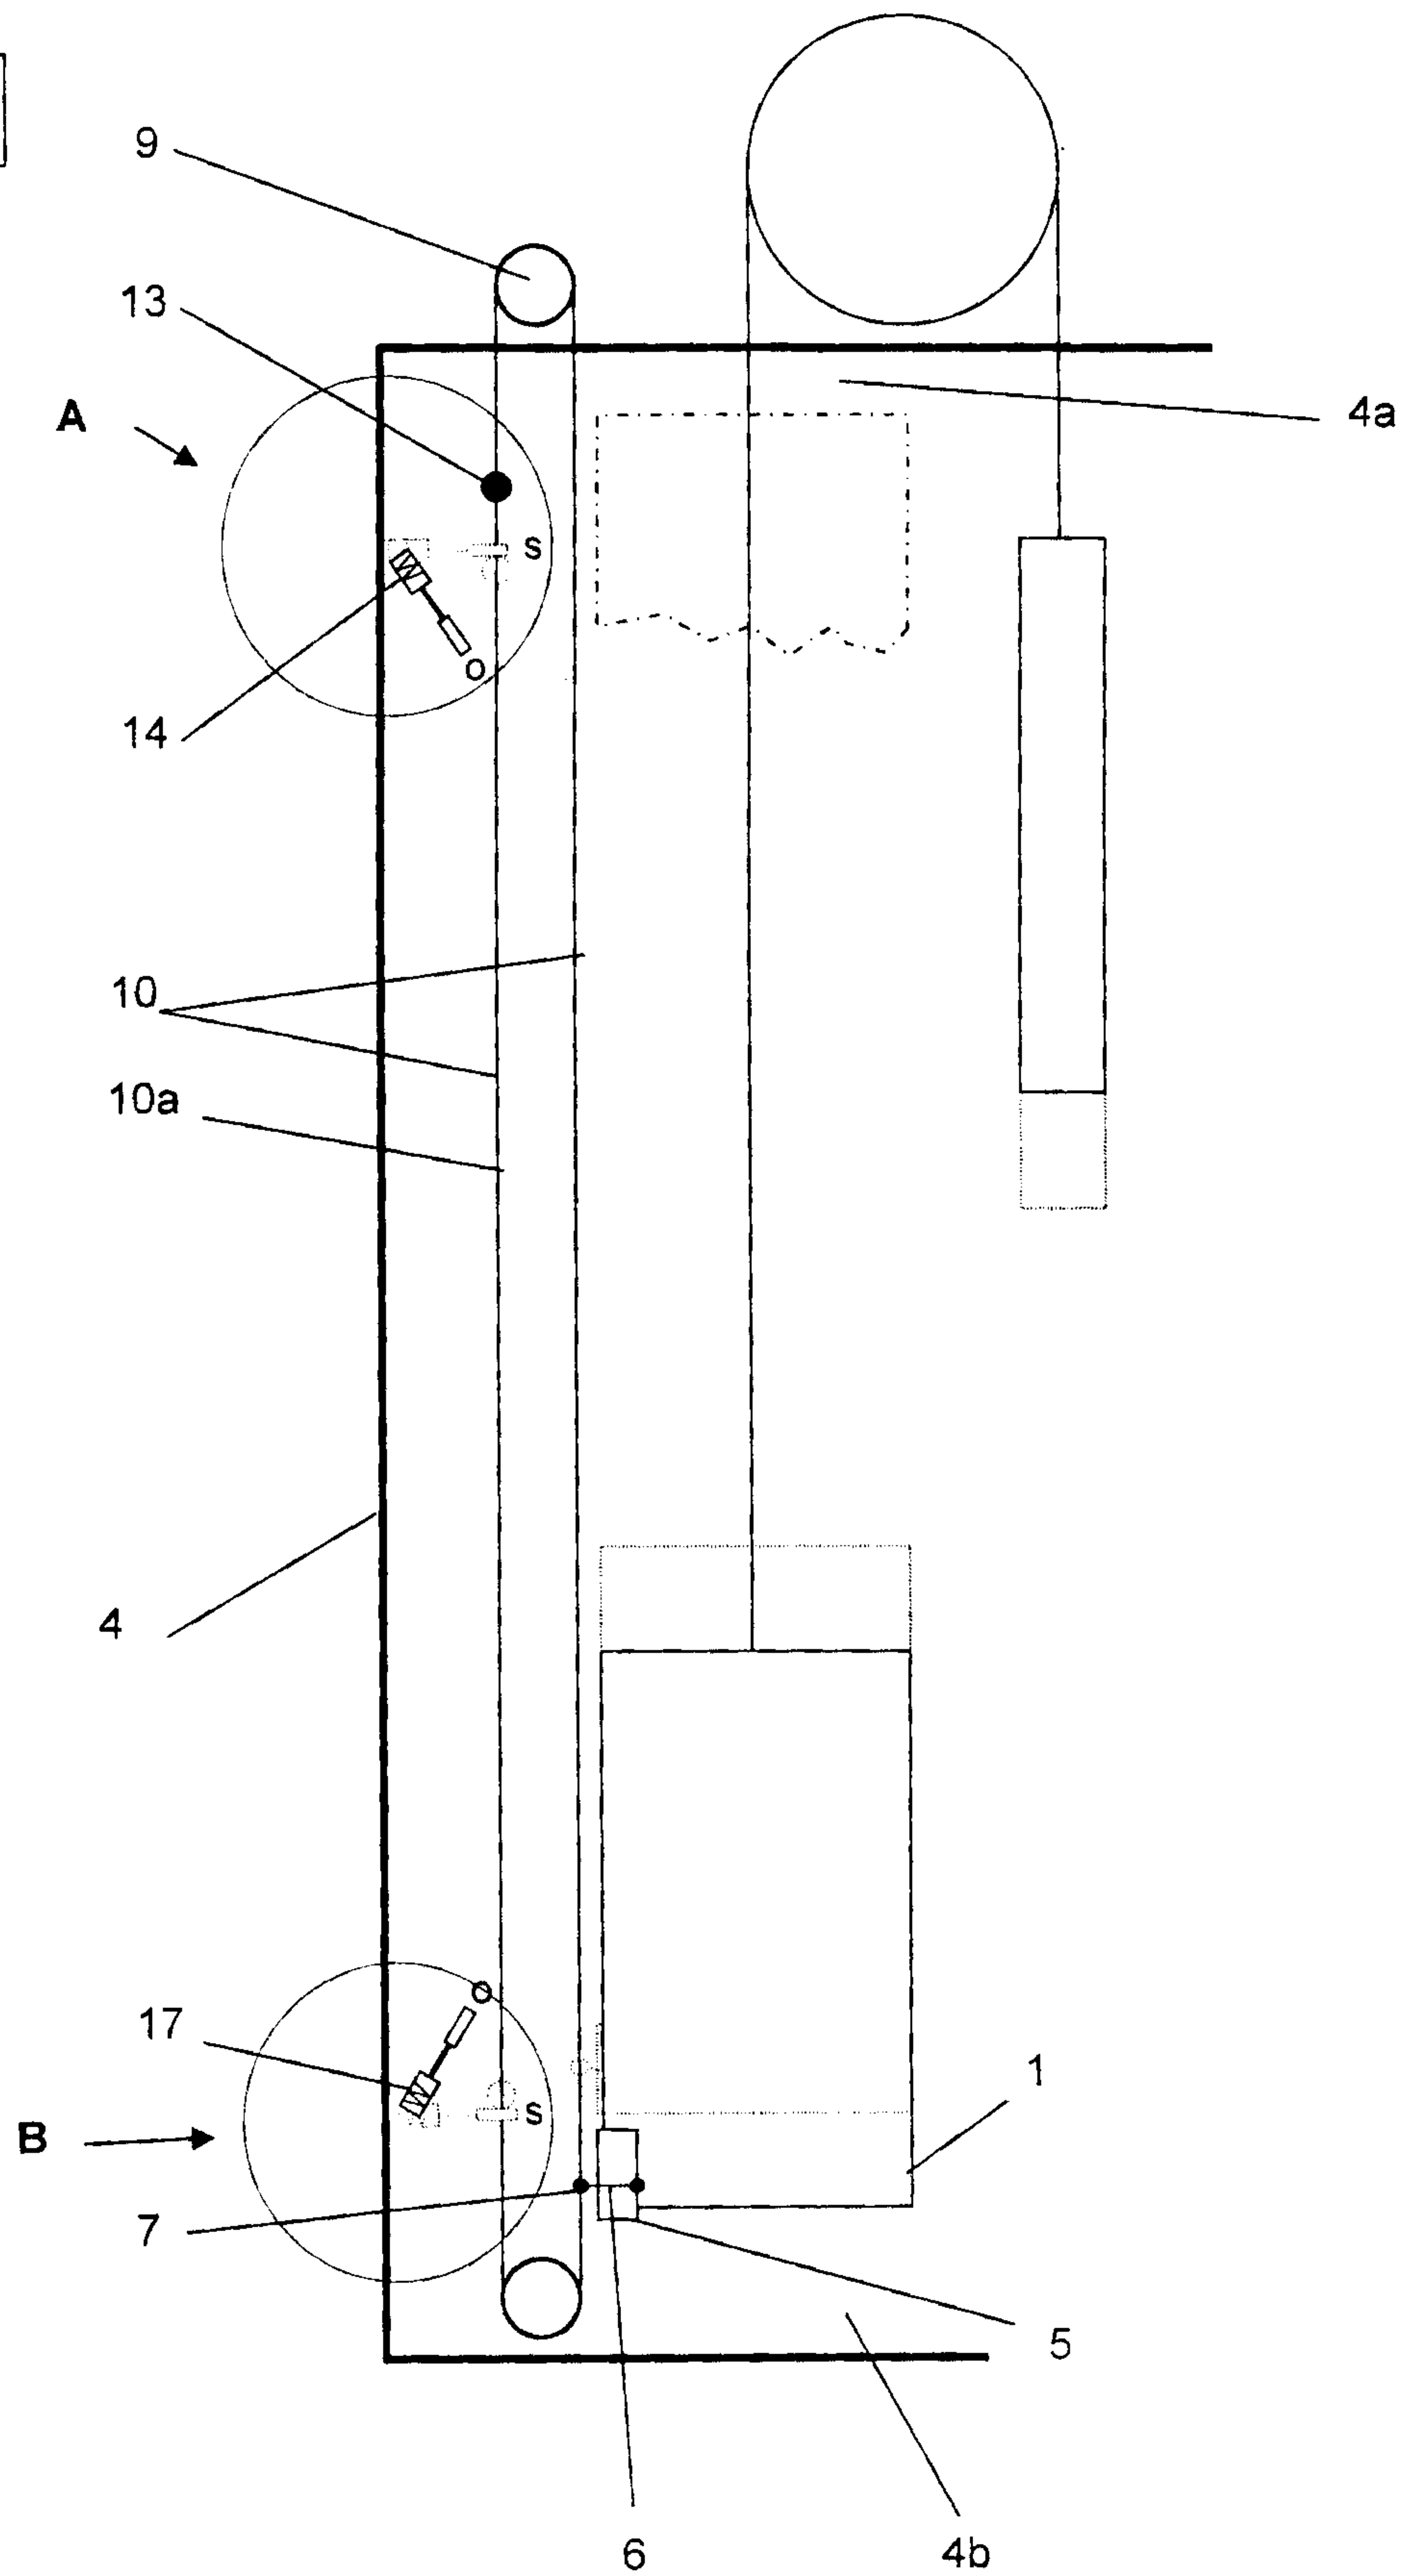


Fig II Detail A

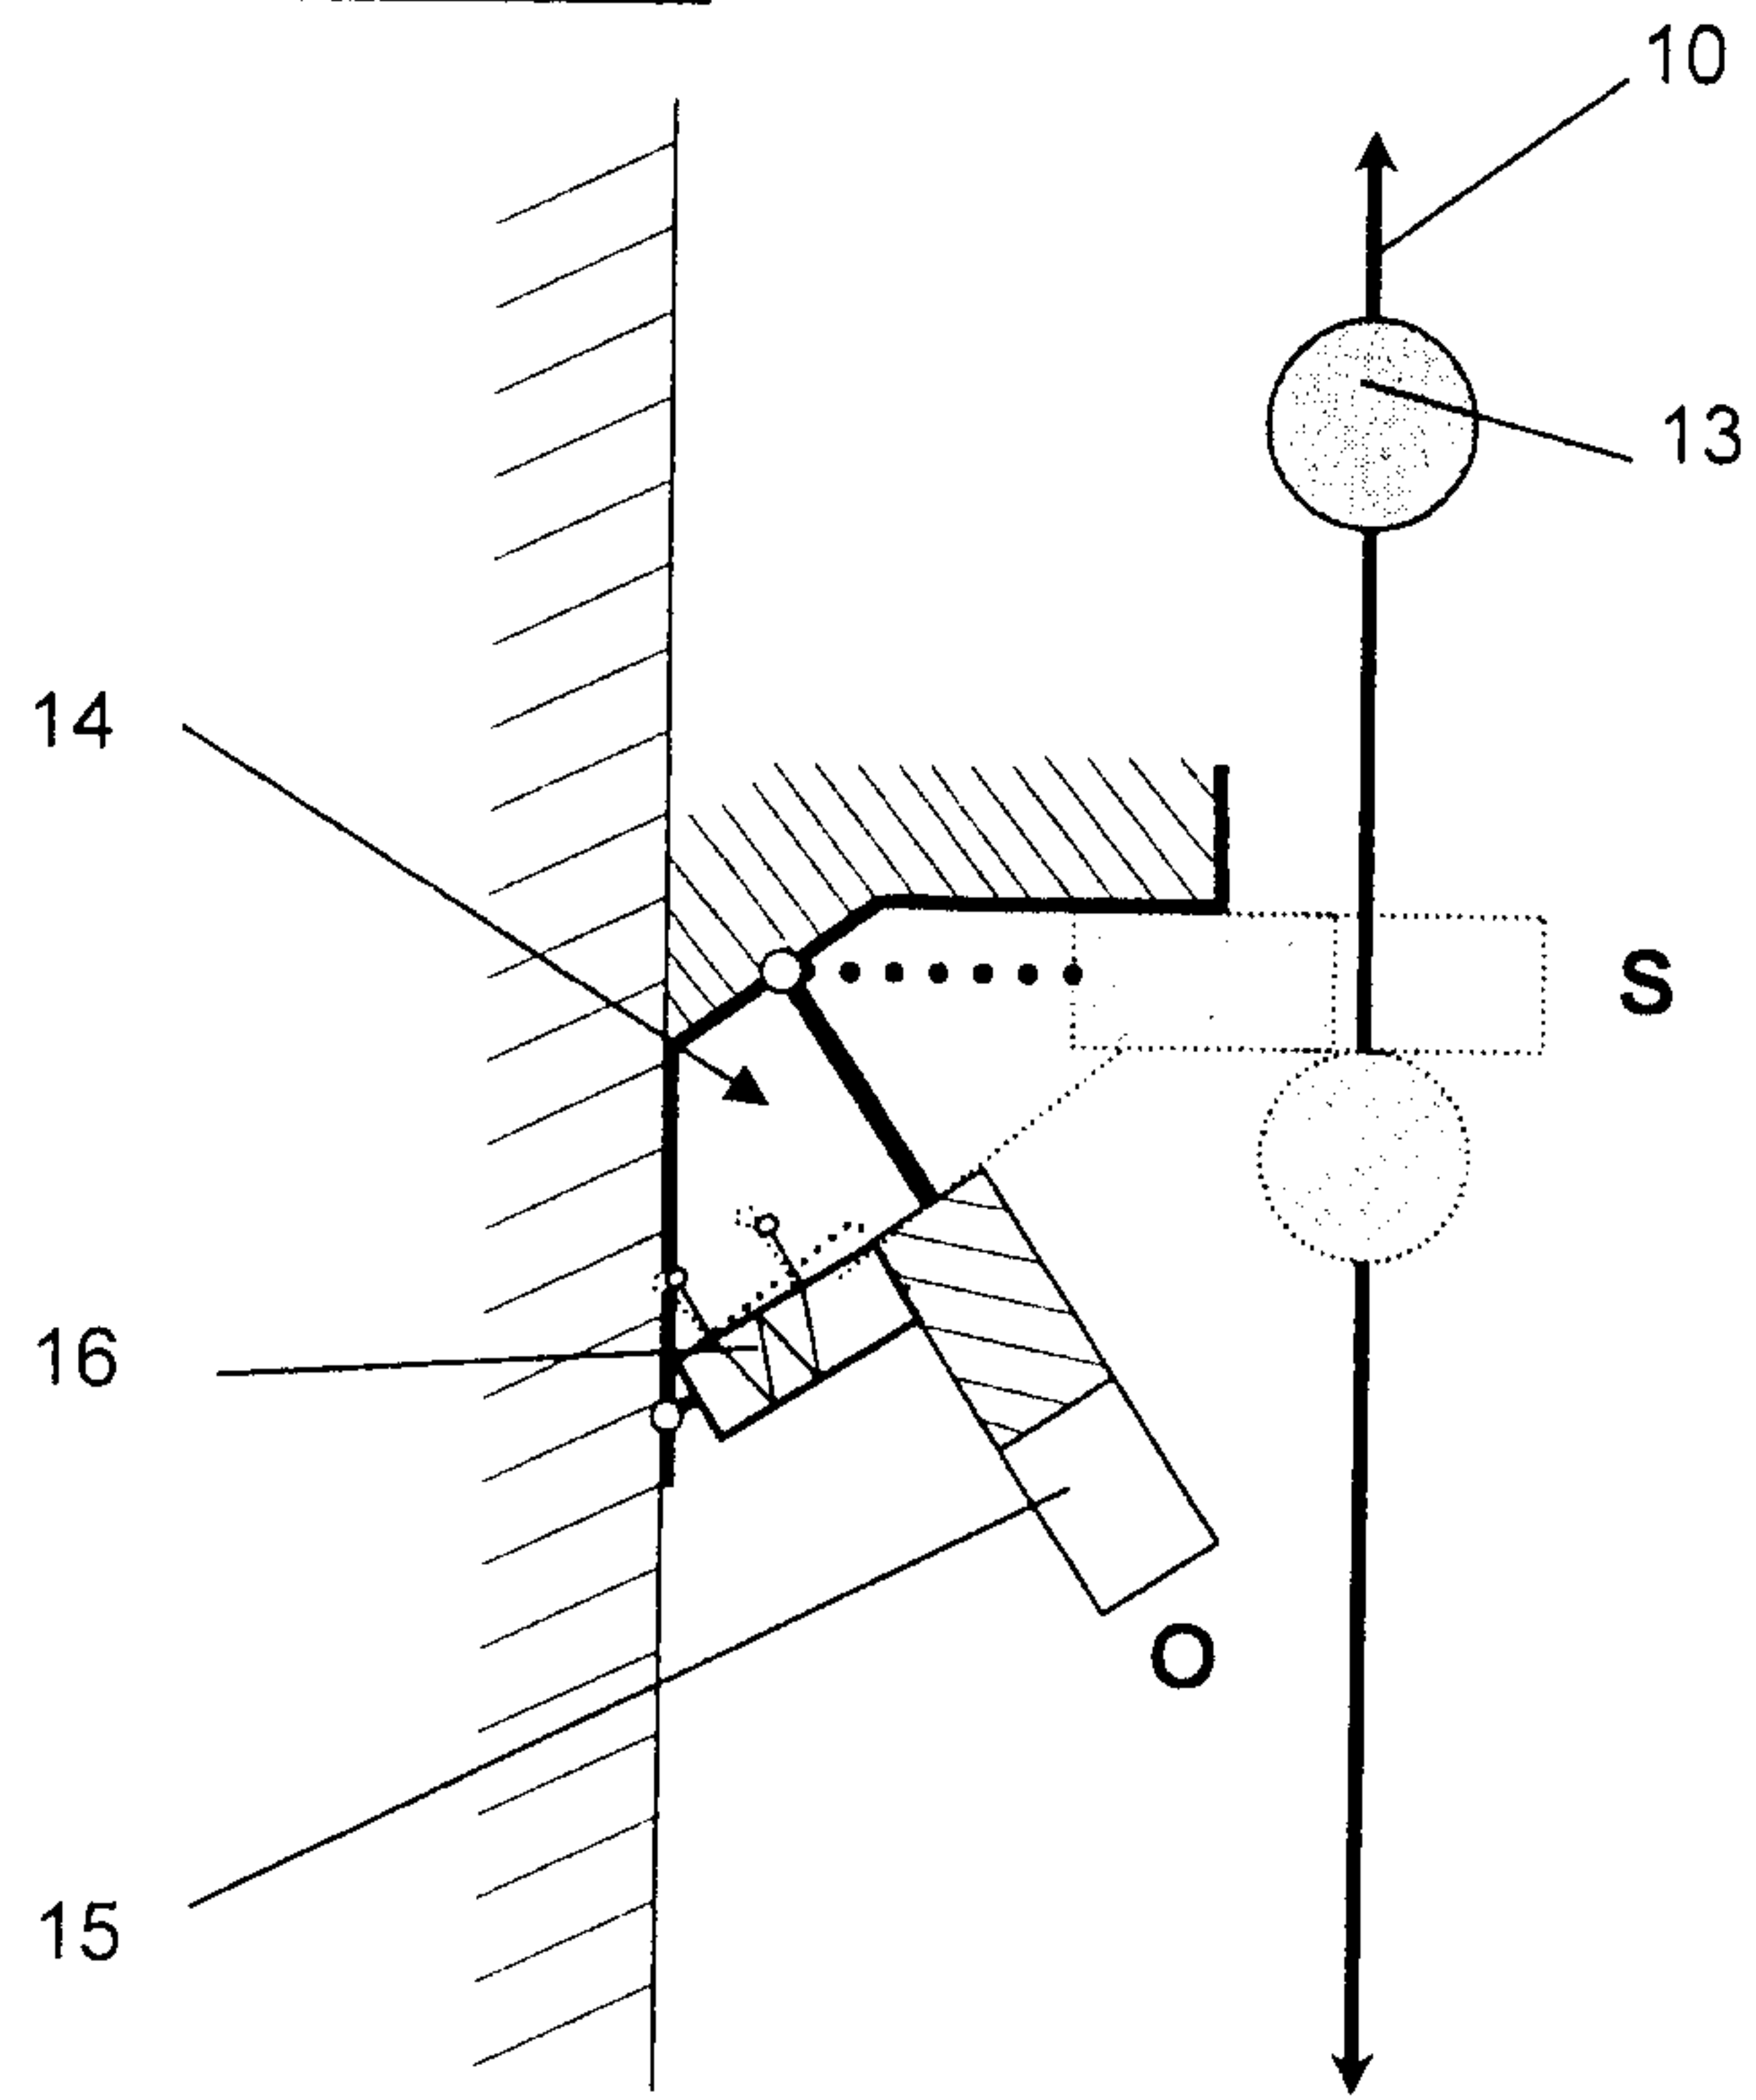


Fig IV

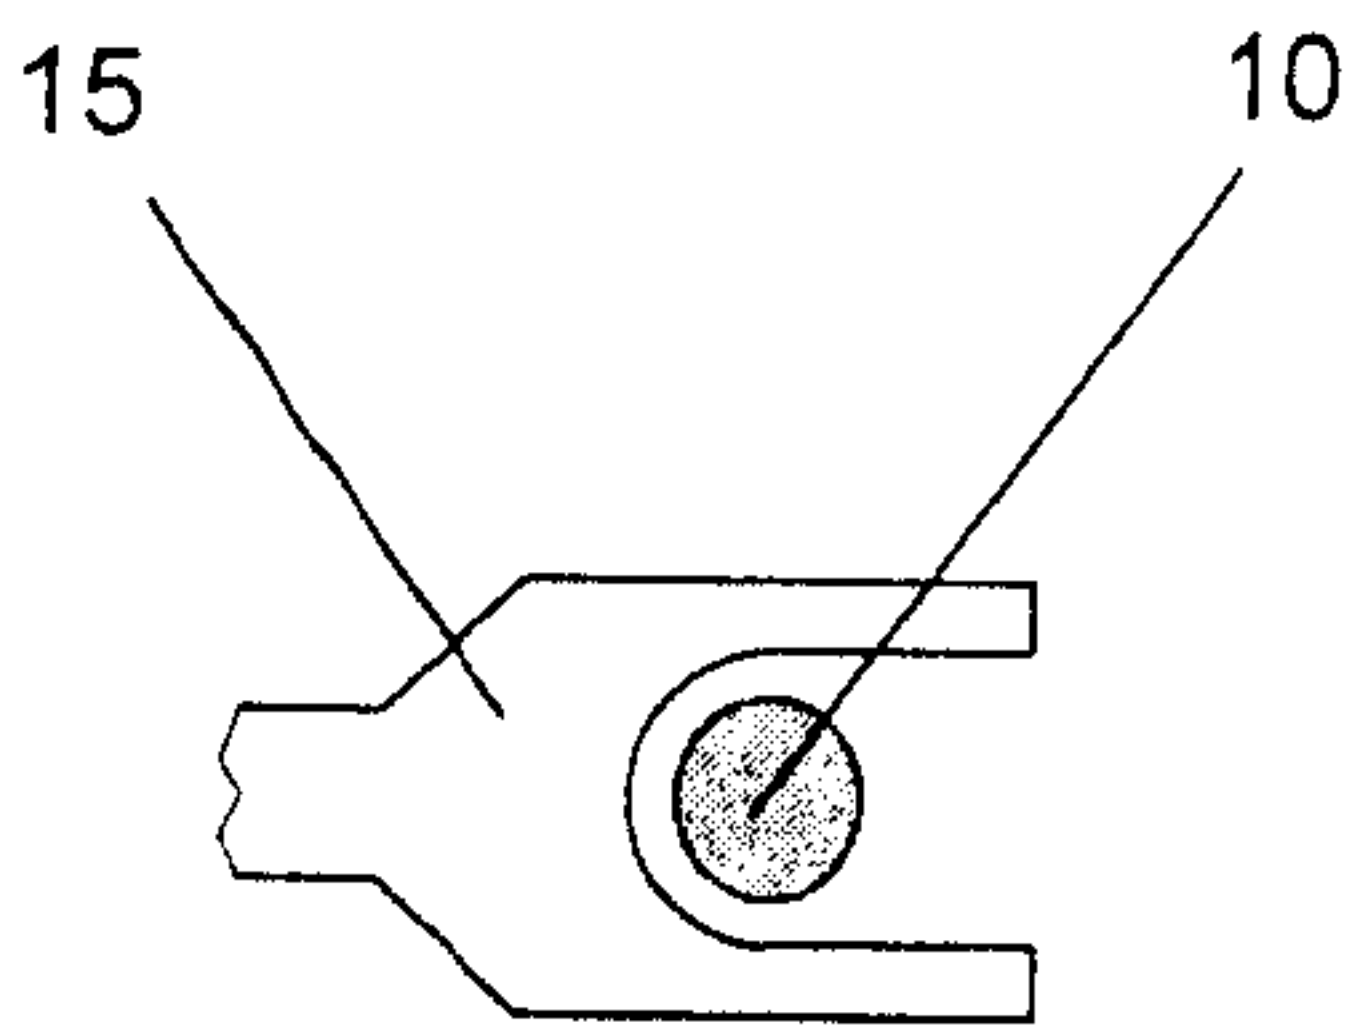


Fig III Detail B

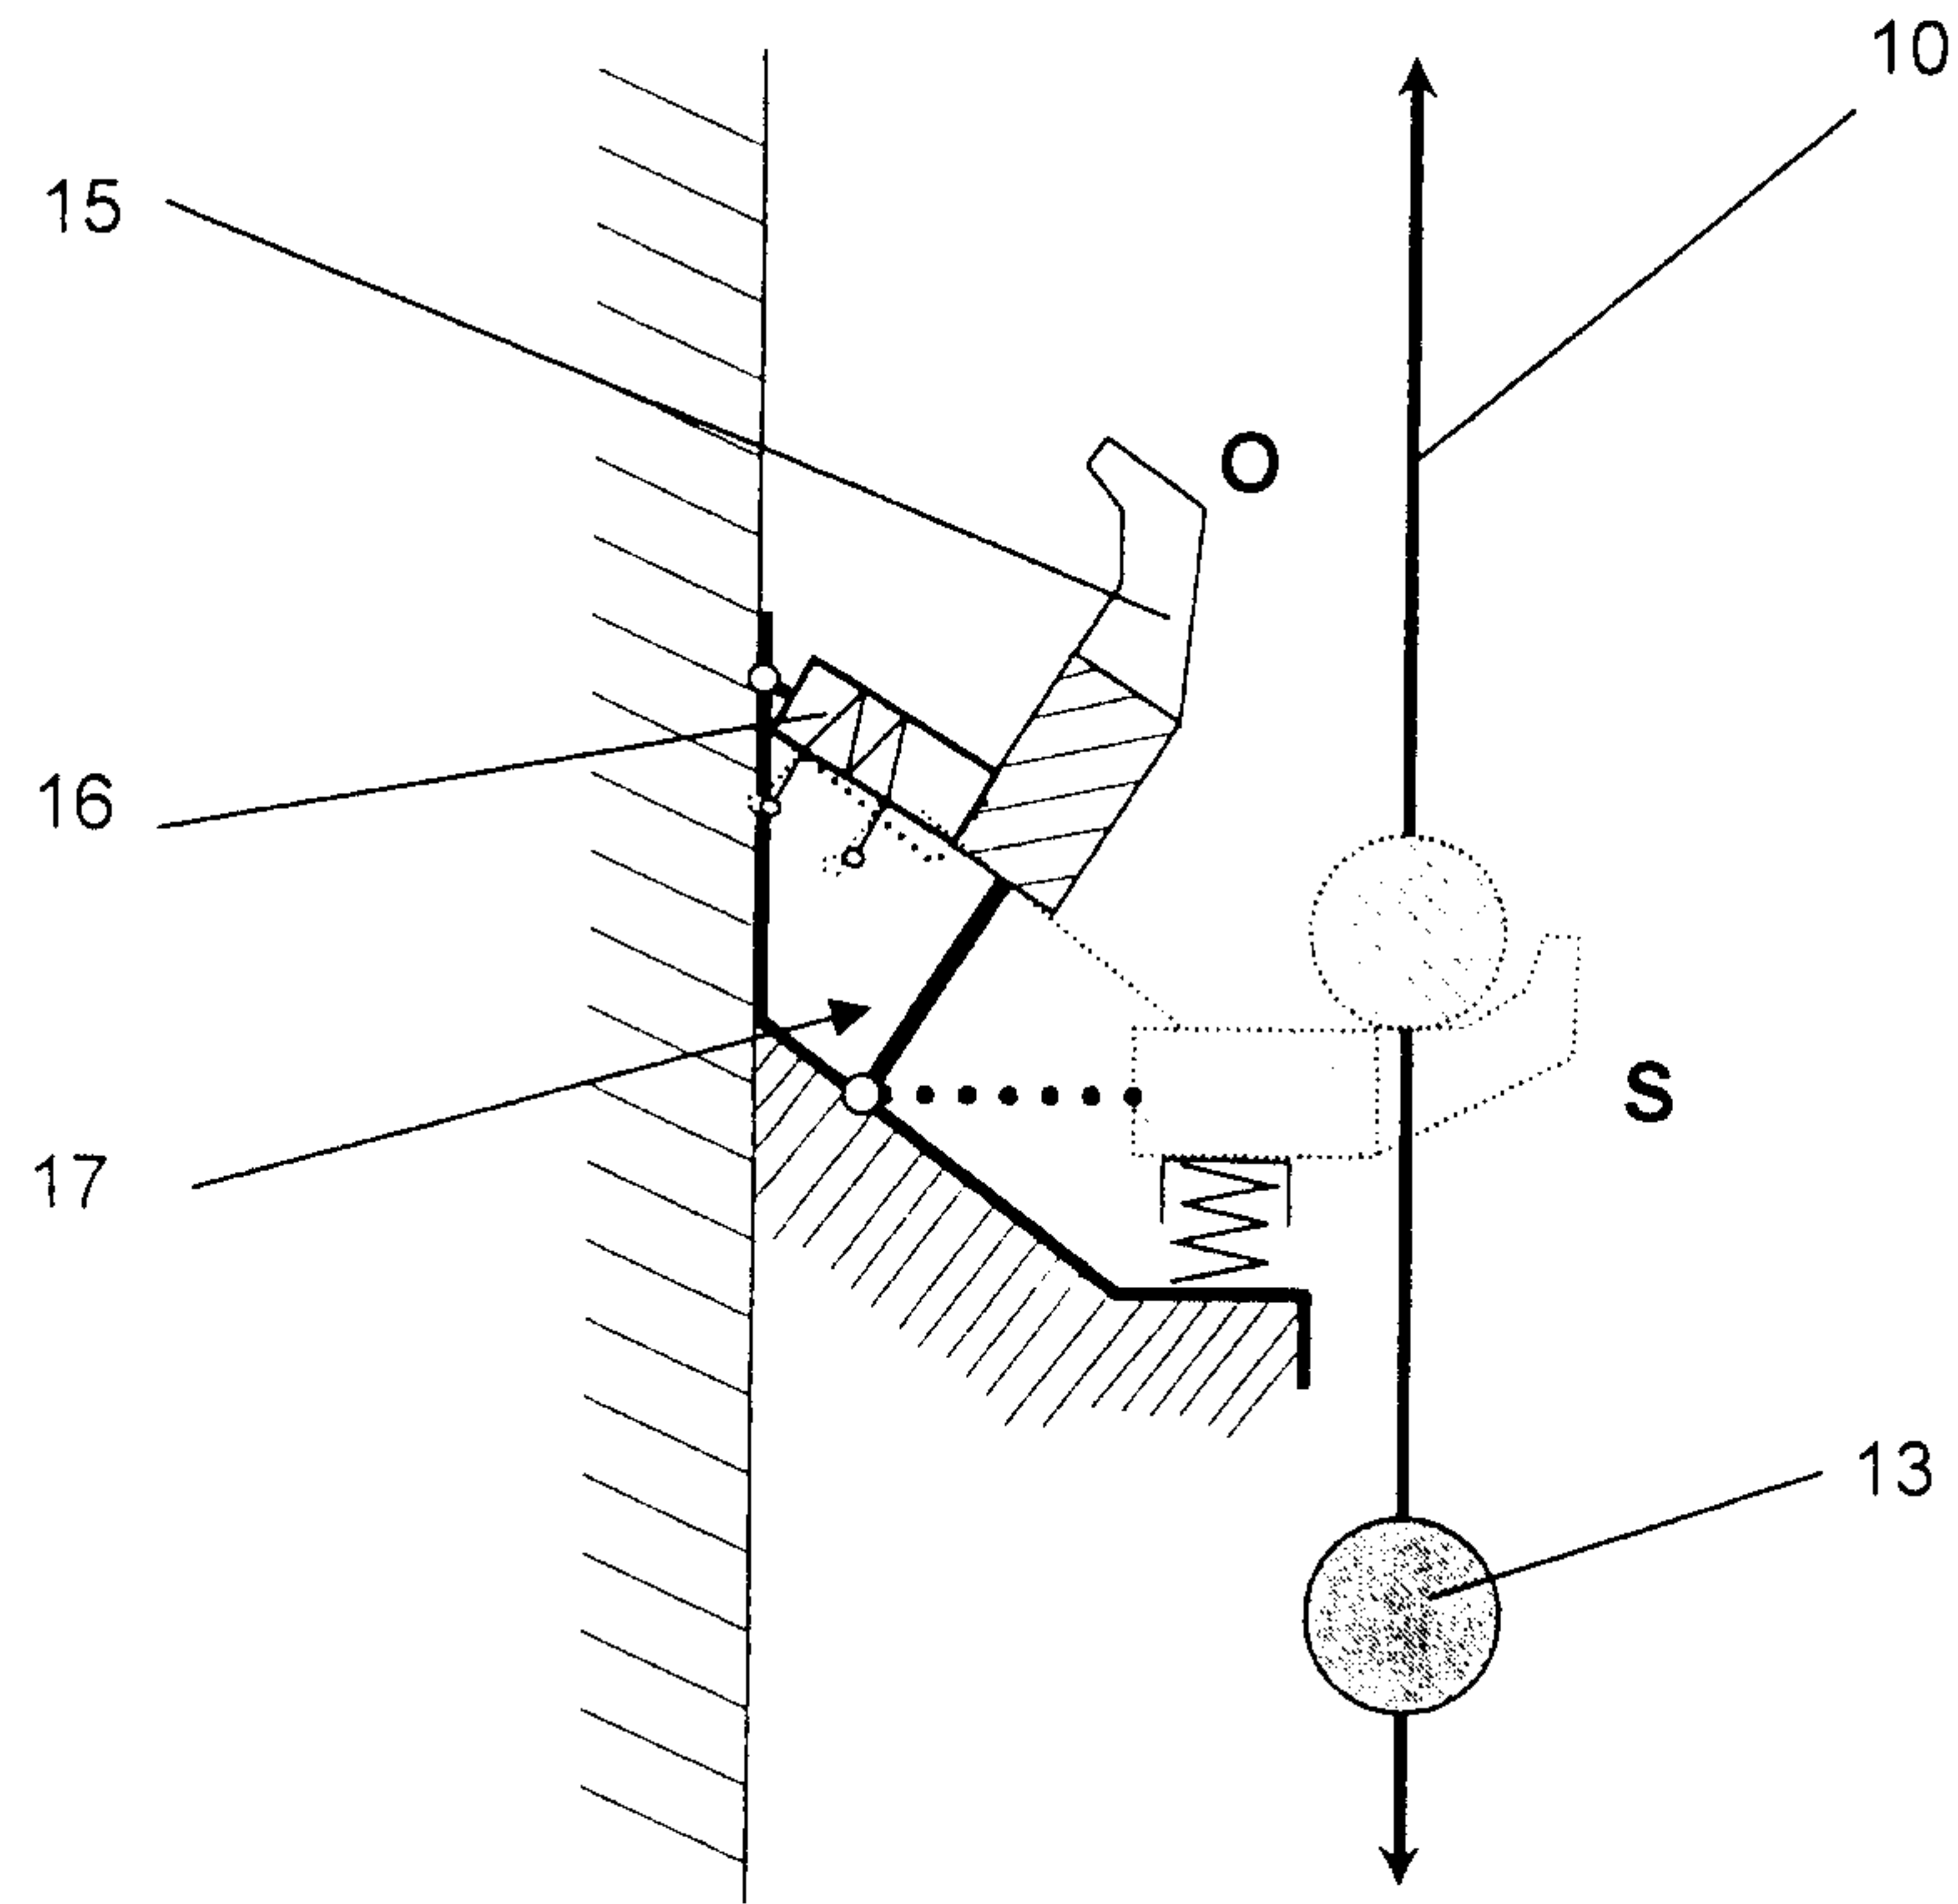


Fig V

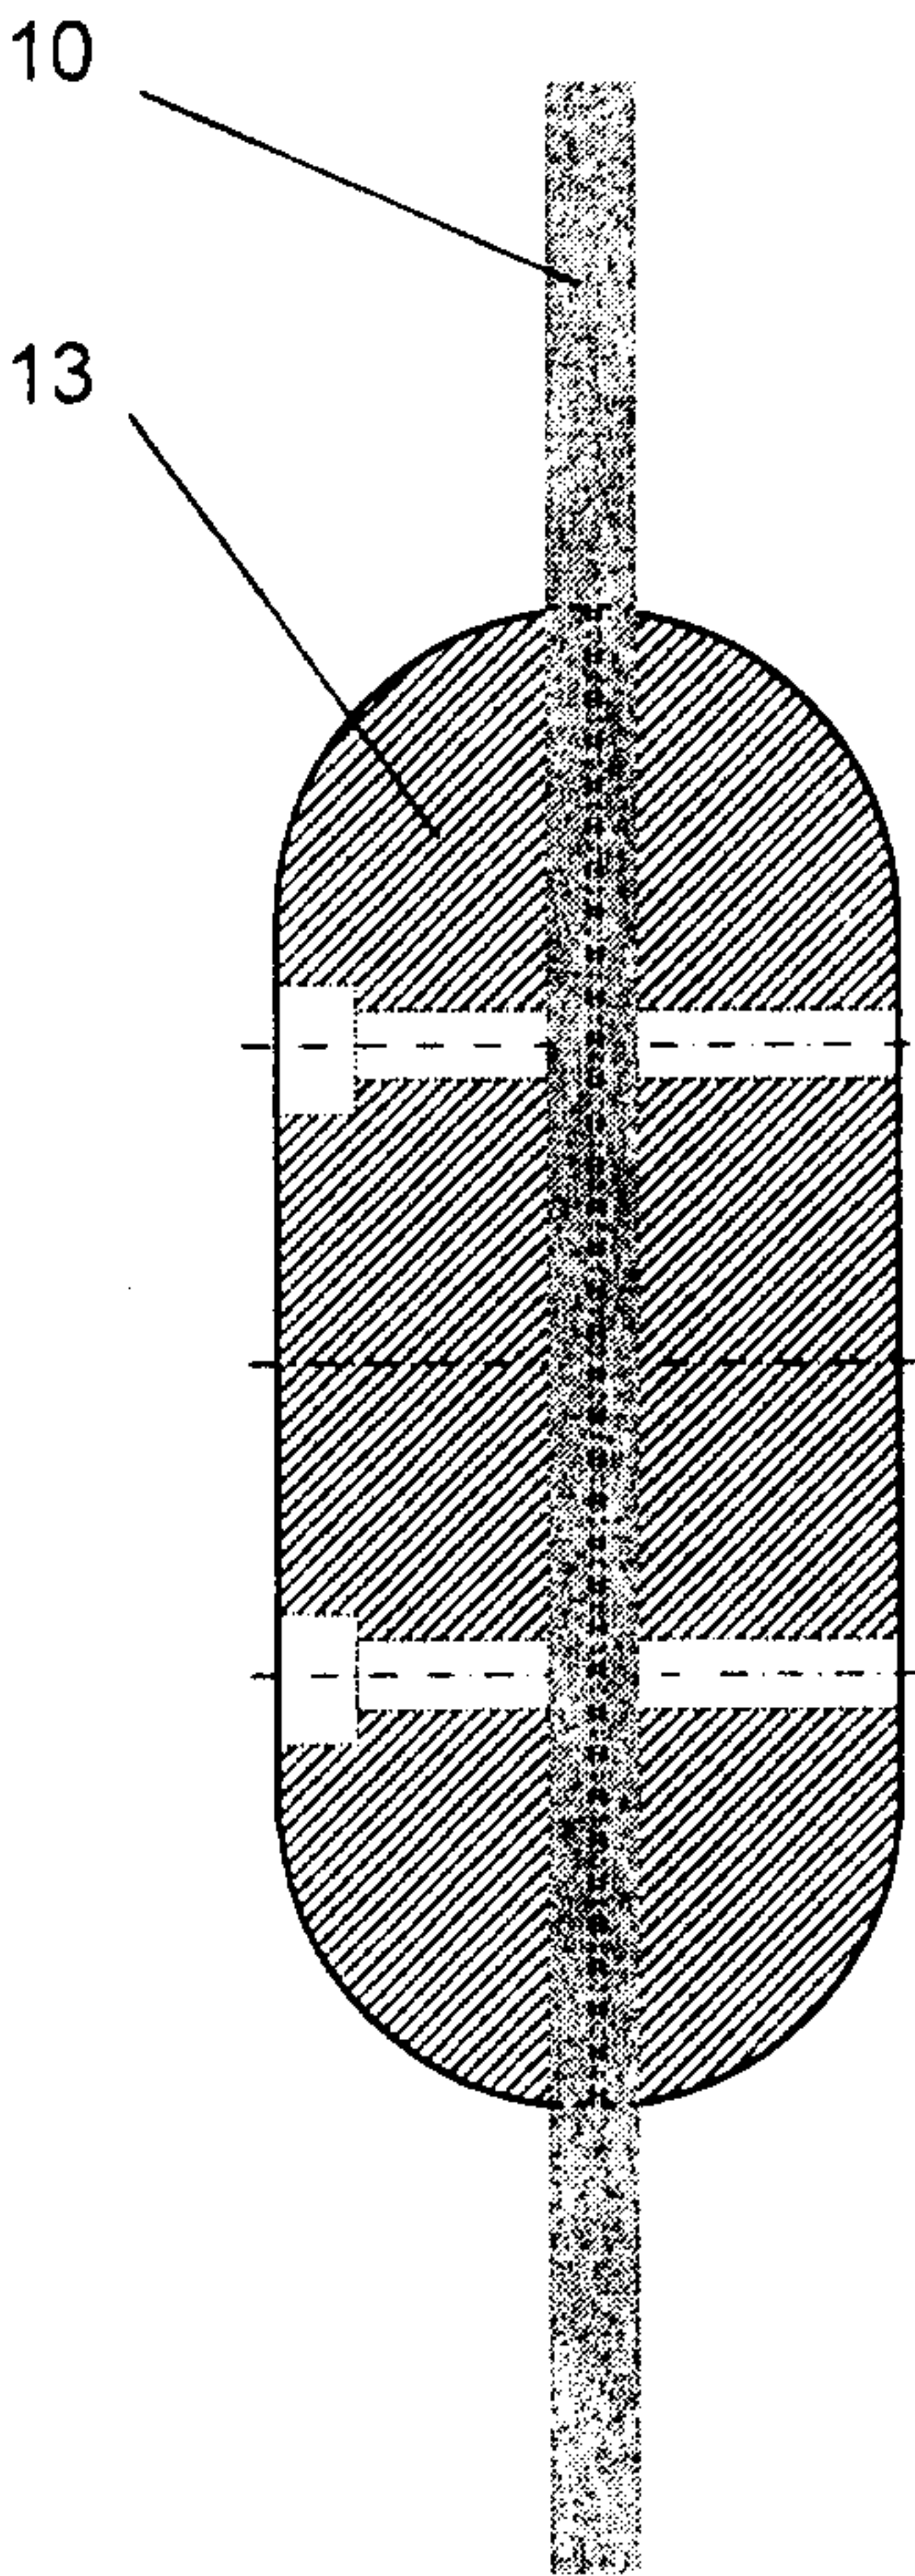


Fig VI

