



(51) International Patent Classification:
G06F 3/041 (2006.01)

(21) International Application Number:
PCT/KR2011/005254

(22) International Filing Date:
16 July 2011 (16.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2010-0093398
27 September 2010 (27.09.2010) KR

(71) Applicant (for all designated States except US): **LG INNOTEK CO., LTD.** [KR/KR]; 20th Fl. Seoul Square 541 Namdaemunno 5-ga Jung-gu, Seoul 100-714 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PARK, Hongchun** [KR/KR]; 20th Fl. Seoul Square 541 Namdaemunno 5-ga Jung-gu, Seoul 100-714 (KR). **KIM, Hansoo** [KR/KR]; 20th Fl. Seoul Square 541 Namdaemunno 5-ga Jung-gu, Seoul 100-714 (KR).

(74) Agents: **JIN, Cheon Woong** et al.; 4th Fl., Deuk-Young Bldg., 423-5 Dogok-dong, Gangnam-gu, Seoul 135-855 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: TOUCH SCREEN PANEL AND TOUCH SCREEN ASSEMBLY INCLUDING THE SAME

[Fig. 1]

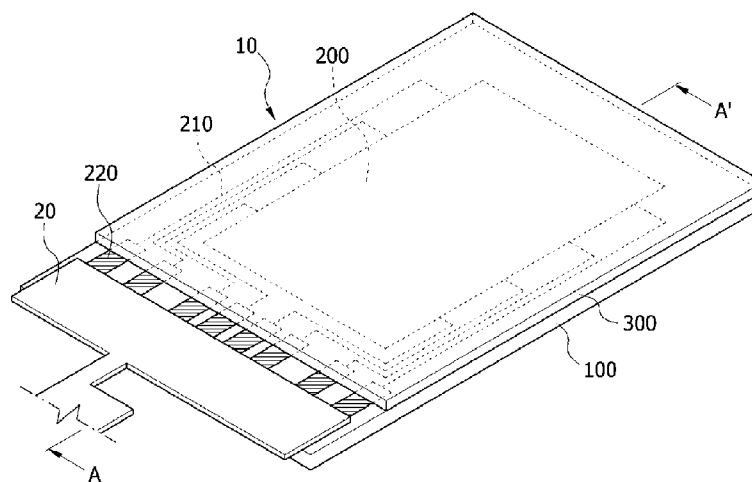

(57) Abstract: The present invention relates to a touch screen panel and a touch screen assembly including the touch screen panel, the touch screen panel including a substrate; a transparent electrode layer formed on the substrate and defined by a touch area; a plurality of conductive wires electrically connected to the transparent electrode layer; and an insulation film stacked on an upper surface of the transparent electrode layer, wherein each of the plurality of conductive wires is electrically connected to a conductive line inside the insulation film, and the conductive line is extended to an outside of the insulation film and exposed therefrom, whereby a PCB and conductive wires can be improved in electrical reliability.



Description

Title of Invention: TOUCH SCREEN PANEL AND TOUCH SCREEN ASSEMBLY INCLUDING THE SAME

Technical Field

- [1] The teachings in accordance with the exemplary embodiments of this invention relate generally to a touch screen panel, and more particularly to a touch screen panel capable of preventing cracks of electric conductive wires during electrical connection with a PCB (printed circuit board), and a touch screen assembly including the touch screen panel.

Background Art

- [2] A touch screen or touch panel is a display which can detect the location of touches within the display area, usually performed either with the human hand or a stylus. This allows the display to be used as an input device capable of performing an overall control of electronic devices including a display screen control.
- [3]
- [4] Technically speaking, the commonly used touch screens employ resistive, capacitive, surface acoustic wave (SAW), electromagnetic, vector force and optical touch modes. Among these types of touch screens, the capacitance type touch screen is increased in its application scope due to the fact that it adopts capacity changes generated from the combination of static electricity between arranged transparent electrodes and a human body, so as to detect coordinates of the contact position through a generated induced current.
- [5]
- [6] That is, the capacitance type touch screen includes one substrate having an electrode formed thereon. In the capacitance type touch panel, when, for example, a finger contacts and approaches the touch panel, a variation in capacitance between the electrode and the finger is detected, thereby detecting input coordinates.
- [7]
- [8] Since the capacitance type touch panel is a non-contact type, it has high durability, excellent environmental and mechanical reliability due to changeable upper barrier layer unlike the resistive film type touch panel.
- [9]
- [10] Generally, a touch screen is manufactured using a touch screen panel which in turn comprised of a substrate formed with a touch area, and an electric wire connected to the touch area. At this time, the electric wire is electrically connected by a PCB and an ACF (anisotropic conductive film), where U-type cracks are disadvantageously

generated due to excessive pressure to the electric wire during mounting to disable an electrical signal to be conductive to the touch area.

Disclosure of Invention

Technical Problem

[11] The present invention is directed to solve the aforementioned disadvantages or shortcomings, and is to provide a touch screen panel capable of preventing cracks of electric conductive wires when connected to a PCB, and a touch screen assembly including the same.

[12]

[13] Technical problems to be solved by the present invention are not restricted to the above-mentioned, and any other technical problems not mentioned so far will be clearly appreciated from the following description by skilled in the art.

Solution to Problem

[14] An object of the invention is to solve at least one or more of the above problems and/or disadvantages in a whole or in part and to provide at least the advantages described hereinafter. In order to achieve at least the above objects, in whole or in part, and in accordance with the purposes of the invention, as embodied and broadly described, and in one general aspect of the present invention, there is provided a touch screen panel, the panel comprising: a substrate; a transparent electrode layer formed on the substrate and defined by a touch area; a plurality of conductive wires electrically connected to the transparent electrode layer; and an insulation film stacked on an upper surface of the transparent electrode layer, wherein each of the plurality of conductive wires is electrically connected to a conductive line inside the insulation film, and the conductive line is extended to an outside of the insulation film and exposed therefrom.

[15]

[16] Preferably, one end of the conductive line is electrically and connectively overlapped with an end of the conductive line at an inside of the insulation film.

[17]

[18] Preferably, the conductive line is a cured metal paste.

[19]

[20] Preferably, width of the conductive line is wider than that of the conductive wire.

[21]

[22] Preferably, the insulation film covers the transparent electrode layer and the conductive wire.

[23]

[24] Preferably, the conductive line is a metal paste in which polymeric resin and metal particles are mixed.

[25]

[26] Preferably, the metal particles are any one or more metals of gold, silver, copper, platinum, palladium, rhodium, ruthenium, nickel and aluminum, or an alloy of more than two or metals thereof.

[27]

[28] Preferably, the substrate is one of a PI (Polyimide) film substrate, a PET (Polyethylene terephthalate) film substrate, a PC (Polycarbonate) film substrate and a glass substrate.

[29]

[30] In another general aspect of the present invention, there is provided a touch screen assembly, the assembly comprising: a touch screen panel including a transparent electrode layer formed on a substrate, a plurality of conductive wires extended by being electrically connected to the transparent electrode layer, and a touch screen panel including an insulation film covering the transparent electrode layer and the conductive wires; and a PCB formed with a pad corresponding to the conductive wire of the touch screen panel.

[31]

[32] Preferably, each of the plurality of conductive wires is electrically connected to the conductive line, and the conductive line is electrically connected to the pad of the PCB.

[33]

[34] Preferably, the conductive line is extended to an inner side of the insulation film to be electrically and connectively overlapped with an end of the conductive line, and extended to an outside of the insulation film to be electrically connected to the pad of the PCB.

[35]

[36] Preferably, the conductive wire is extended to the outside of the insulation film, and the conductive wire extended to the outside of the insulation film is stacked by the conductive line.

[37]

[38] Preferably, the conductive line is a cured metal paste.

[39]

[40] Preferably, the length of the pad at the PCB is shorter than that of the conductive line.

[41]

[42] Preferably, the touch screen panel is formed with an upper plate and a bottom plate, each of the upper plate and the bottom plate is formed with a touch area.

[43]

[44] Preferably, the PCB and the conductive line are electrically connected by an

anisotropic conductive adhesive.

[45]

[46] Preferably, the conductive line is a metal paste in which polymeric resin and metal particles are mixed.

[47]

[48] Preferably, the metal particles are any one or more metals of gold, silver, copper, platinum, palladium, rhodium, ruthenium, nickel and aluminum, or an alloy of more than two or metals thereof.

[49]

[50] Preferably, the transparent electrode layer is defined by a touch area.

[51]

[52] Preferably, the substrate is one of a PI film substrate, a PET film substrate, a PC film substrate and a glass substrate.

Advantageous Effects of Invention

[53] The touch screen panel and a touch screen assembly according to the present invention have advantageous effects in that degree of integration in pattern can be enhanced, and an electrical reliability between a PCB and a conductive wire can be improved.

Brief Description of Drawings

[54] The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

[55]

[56] FIG. 1 is a perspective view illustrating a touch screen assembly in which a touch screen panel is electrically connected to a PCB according to an exemplary embodiment of the present invention;

[57] FIG. 2 is a plan view illustrating a connective status in which a conductive wire of the touch screen panel and a conductive line are connected according to an exemplary embodiment of the present invention;

[58] FIG. 3 is a photograph illustrating a status in which a conductive line is electrically connected to a conductive wire according to an exemplary embodiment of the present invention;

[59] FIG. 4 is a perspective view illustrating structure of a touch screen panel formed with an upper and bottom substrates according to an exemplary embodiment of the present invention;

[60] FIG. 5 is a cross-sectional view taken along A-A' of FIG. 1;

[61] FIG. 6 is a cross-sectional view taken along B-B' of FIG. 5; and

[62] FIG. 7 is a modified example of a touch screen panel according to an exemplary embodiment of the present invention.

Best Mode for Carrying out the Invention

[63] The following description is not intended to limit the invention to the form disclosed herein. Consequently, variations and modifications commensurate with the following teachings, and skill and knowledge of the relevant art are within the scope of the present invention. The embodiments described herein are further intended to explain modes known of practicing the invention and to enable others skilled in the art to utilize the invention in such, or other embodiments and with various modifications required by the particular application(s) or use(s) of the present invention.

[64]

[65] The disclosed embodiments and advantages thereof are best understood by referring to FIGS. 1-7 of the drawings, like numerals being used for like and corresponding parts of the various drawings. Other features and advantages of the disclosed embodiments will be or will become apparent to one of ordinary skill in the art upon examination of the following figures and detailed description. It is intended that all such additional features and advantages be included within the scope of the disclosed embodiments, and protected by the accompanying drawings. Further, the illustrated figures are only exemplary and not intended to assert or imply any limitation with regard to the environment, architecture, or process in which different embodiments may be implemented. Accordingly, the described aspect is intended to embrace all such alterations, modifications, and variations that fall within the scope and novel idea of the present invention.

[66]

[67] It will be understood that the terms "comprises" and/or "comprising," or "includes" and/or "including" when used in this specification, specify the presence of stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, regions, integers, steps, operations, elements, components, and/or groups thereof. That is, the terms "including", "includes", "having", "has", "with", or variants thereof are used in the detailed description and/or the claims to denote non-exhaustive inclusion in a manner similar to the term "comprising".

[68]

[69] Furthermore, "exemplary" is merely meant to mean an example, rather than the best. It is also to be appreciated that features, layers and/or elements depicted herein are illustrated with particular dimensions and/or orientations relative to one another for purposes of simplicity and ease of understanding, and that the actual dimensions and/or

orientations may differ substantially from that illustrated. That is, in the drawings, the size and relative sizes of layers, regions and/or other elements may be exaggerated or reduced for clarity. Like numbers refer to like elements throughout and explanations that duplicate one another will be omitted.

[70]

[71] It is to be understood that the singular forms "a," "an," and "the" include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to "a component surface" includes reference to one or more of such surfaces.

[72]

[73] It will be understood that when an element or layer is referred to as being "on", "connected to" or "coupled to" another element or layer, the element or layer can be directly on, connected or coupled to another element or layer or intervening elements or layers. In contrast, when an element is referred to as being "directly on," "directly connected to" or "directly coupled to" another element or layer, there are no intervening elements or layers present. Like numbers refer to like elements throughout. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[74]

[75] Now, the present invention will be described in detail with reference to the accompanying drawings.

[76]

[77] FIG. 1 is a perspective view illustrating a touch screen assembly in which a touch screen panel is electrically connected to a PCB according to an exemplary embodiment of the present invention, FIG. 2 is a plan view illustrating a connective status in which a conductive wire of the touch screen panel and a conductive line are connected according to an exemplary embodiment of the present invention, and FIG. 3 is a photograph illustrating a status in which a conductive line is electrically connected to a conductive wire according to an exemplary embodiment of the present invention.

[78]

[79] A touch screen panel (10) according to an exemplary embodiment of the present invention includes a substrate (100), a transparent electrode layer (200) formed on the substrate (100) and defined as a touch area, a plurality of conductive lines (210) electrically connected to an external side of the transparent electrode layer (200) and an insulation film (300) stacked on the transparent electrode layer (200).

[80]

[81] The substrate (100) may be used with any transparent material, and to be more specific, the substrate (100) may use any one of a PI (Polyimide) film substrate, a PET (Polyethylene terephthalate) film substrate, a PC (Polycarbonate) film substrate and a

glass substrate.

[82]

[83] The transparent electrode layer (200) is formed on the substrate (100) to define a touch area. Although not illustrated in the drawings, the transparent electrode layer may be plurally formed on the center of the substrate (100), each discrete and extended to a predetermined direction.

[84]

[85] The transparent electrode layer (200) may be applied with any transparent electrode such as an ITO (Indium Tin Oxide) film, an IZO (Indium Zinc Oxide) film or an IZIO film. Furthermore, a position sensing method using a transparent electrode and arrangement of the transparent electrode layer (200) is the same as that of a general touch screen panel, such that there will be no more detailed explanation thereto.

[86]

[87] The external side of the transparent electrode layer (200) is connected by a plurality of conductive wires (210). The plurality of conductive wires (210) is electrically connected to the transparent electrode layer (200) and arranged to a periphery of the substrate (100) to be electrically connected to a PCB (Printed Circuit Board).

[88]

[89] The conductive wires (210) may be advantageous in that a metal is used to form thin conductive wires using methods such as deposition, sputtering or screen printing process, and even if the plurality of conductive wires is formed, there is relatively less restriction by space.

[90]

[91] The insulation film (300) may be formed in a size large enough to cover the transparent electrode layer (200) and the conductive wires (210). Thus, the conductive wires are prevented from being oxidized or corroded, because of being covered by the insulation film (300).

[92]

[93] The insulation film (300) may be advantageous in terms of transparency and adhesion if an OCA (Optical Clear Adhesive) film is selected for the insulation film (300). However, material for insulation film is not limited thereto, and any insulation films may be used as long as insulation, transparency and adhesiveness are excellent.

[94]

[95] Referring to FIG. 2, the conductive wires (210) are electrically connected to conductive lines (220) inside the insulation film (300), and the conductive lines (220) are extended to outside of the insulation film (300) and exposed therefrom, a detailed explanation of which will be provided with reference to FIG. 3.

[96]

- [97] The conductive wire (210) is covered by the insulation film (300) and a distal end of the conductive line (220) is inserted into the insulation film (300) to be electrically and overlappingly connected to a distal end of the conductive wire (210). At this time, width of the conductive line (220) may be formed in 20~40 μ m, wider than that of the conductive wire, (210) to be stably and electrically connected to the conductive wire (210) or a PCB (20).
- [98]
- [99] The conductive line (220) may be formed by a cured metal paste in which polymeric resin and metal particles are mixed. The polymeric resin mixed by metal particles may be selected of thermosetting resin cured by heat or ultraviolet, and the metal particles may be any one or more metals of gold, silver, copper, platinum, palladium, rhodium, ruthenium, nickel and aluminum, or an alloy of more than two or metals thereof.
- [100]
- [101] Although not illustrated in the drawing, the conductive wire (210) may be extended to outside of the insulation film (300) and exposed therefrom, and the conductive line (220) may be stacked along an extended direction of the conductive wire (210).
- [102]
- [103] FIG. 4 is a perspective view illustrating a modified structure of a touch screen panel formed with an upper and bottom substrates according to an exemplary embodiment of the present invention.
- [104]
- [105] The structure of a touch screen panel according to an exemplary embodiment of the present invention may be applied to any mode regardless of resistive or capacitance type touch screen panel. For example, in case of a capacitance type touch screen panel formed with a plurality of substrates (100), an electrode layer is respectively formed on an upper substrate (110) and a bottom substrate (120) as illustrated in FIG. 4, a distal end of the conductive wire (210) is formed with conductive lines (220, 230) to be positioned at a distal end of the substrate (100). At this time, upper surfaces of the upper substrate (110) and the bottom substrate (120) are respectively formed with insulation film (300).
- [106]
- [107] At this time, in consideration of electrical connection with the PCB (20), both corners of a distal end at the substrate (100) may be formed with cut-out units (111), and the upper conductive line (220) may be arranged on a center lug (112) and the bottom substrate (120) may be formed at a periphery thereof with the bottom conductive line (230). Alternatively, the upper conductive line (220) may be arranged on both sides of the distal end of the upper substrate (11), and the bottom conductive line (230) may be arranged on a center of the distal end. It should be apparent that the transparent

electrode layer is modified in arrangement thereof to cope with the configuration.

[108]

[109] Hereinafter, a touch screen assembly structure in which the touch screen panel and the PCB are electrically connected by an anisotropic conductive adhesive will be described in detail.

Mode for the Invention

[110] FIG. 5 is a cross-sectional view taken along A-A' of FIG. 1, and FIG. 6 is a cross-sectional view taken along B-B' of FIG. 5.

[111]

[112] A touch screen assembly according to an exemplary embodiment of the present invention includes a transparent electrode layer (200) formed on a substrate (100), a plurality of conductive wires (210) extended by being electrically connected to the transparent electrode layer (200), a touch screen panel including an insulation film (300) covering the transparent electrode layer (200) and the conductive wires (210); and a PCB (20) formed with a pad (21) corresponding to the conductive wire of the touch screen panel.

[113]

[114] The touch screen panel is the same as what is explained before, the conductive wire (210) is electrically connected to the conductive line (220) and the PCB pad (21) is electrically connected to the conductive line (220). At this time, the PCB pad (21) and the conductive line (220) are electrically connected by an anisotropic conductive adhesive (30).

[115]

[116] Predetermined heat and pressure are applied to fuse the polymeric resin of the anisotropic conductive adhesive (30) to cause conductive balls (not shown) included in the anisotropic conductive adhesive (30) to be mechanically and physically coupled to the PCB pad (21) and the conductive line (220).

[117]

[118] However, the conductive line (220) does not develop cracks because of being configured with cured metal paste. Therefore, the conductive wire (210) electrically connected to a distal end of the conductive line (220) can be stably and electrically connected to the PCB pad (21).

[119]

[120] The exemplary embodiment of the present invention is advantageous in that an electrical disconnection caused by cracks on the conductive wire by pressure for electrical connection with the PCB can be eliminated.

[121]

[122] FIG. 7 is a modified example of a touch screen panel according to an exemplary embodiment of the present invention.

[123]

[124] A touch screen assembly according to another exemplary embodiment of the present invention may be configured in such a manner that a conductive wire (210) of the touch screen panel is exposed outside of an insulation film (300) on which a conductive line (220) is formed. At this time, a horizontal width of the conductive line (220) is longer than a horizontal width of the PCB (20) by a predetermined length (d1). Therefore, even if the conductive wire (210) corresponding to the PCB pad (21) develops cracks to disable an electrical conduction, a portion (d1) of conductive wire not corresponding to the PCB pad (21) develops no cracks to allow the conductive line (220) and the PCB pad (21) to be stably and electrically connected.

[125]

[126] Now, a manufacturing method of the touch screen assembly will be described in detail.

[127]

[128] The manufacturing method of a touch screen assembly according to an exemplary embodiment of the present invention may be largely divided into a touch screen panel manufacturing step and a PCB mounting step.

[129]

[130] The touch screen panel is such that the transparent electrode layer (200) is formed on the substrate (100), which is patterned to form a touch area. Thereafter, the conductive wire (210) electrically connected to the transparent electrode layer (200) is formed by deposition or sputtering method.

[131]

[132] The distal end of the conductive wire (210) is evenly laminated with silver paste of conductive line (220) at a thickness wider than the width of the conductive wire (210) and then cured. At this time, resin for the silver paste may be applied with the cured resin, and replace the function of the conductive wire (210) because of no re-fusion with the PCB in the connection process.

[133]

[134] Then, the insulation film (300) with a size large enough to cover the transparent electrode layer (200) and the conductive line (210) is manufactured and laminated whereby the process of manufacturing the touch screen panel. At this time, if the touch screen panel is comprised of a plurality of substrates (100), the aforementioned process of manufacturing the touch screen panel may be performed in plural times.

[135]

[136] In the mounting step of the PCB, the plurality of conductive lines (220) and a

plurality of pads (410) of the PCB (20) are oppositely arranged and the anisotropic conductive adhesive (30) is arranged therebetween.

[137]

[138] Successively, a predetermined heat/pressure is applied to narrow a gap between the PCB (20) and the touch screen panel. The anisotropic conductive adhesive (30) is fused through the heating/pressing processes, and conductive particles dispersed therein are restricted between the conductive line (220) and the PCB pad (21) by mechanical and physical coupling and is electrically conducted. At this time, the anisotropic conductive adhesive (30) may further include heat radiating particles for easily radiating the heat that is generated by electrical flow.

[139]

[140] The previous description of the present invention is provided to enable any person skilled in the art to make or use the invention. Various modifications to the invention will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other variations without departing from the spirit or scope of the invention. Thus, the invention is not intended to limit the examples described herein, but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

Industrial Applicability


[141] The present invention has an industrial applicability in that degree of integration in pattern can be enhanced, and an electrical reliability between a PCB and a conductive wire can be improved.

Claims


- [Claim 1] A touch screen panel, the panel comprising: a substrate; a transparent electrode layer formed on the substrate and defined by a touch area; a plurality of conductive wires electrically connected to the transparent electrode layer; and an insulation film stacked on an upper surface of the transparent electrode layer, wherein each of the plurality of conductive wires is electrically connected to a conductive line inside the insulation film, and the conductive line is extended to an outside of the insulation film and exposed therefrom.
- [Claim 2] The touch screen panel of claim 1, wherein one end of the conductive line is electrically and connectively overlapped with an end of the conductive line at an inside of the insulation film.
- [Claim 3] The touch screen panel of claim 1, wherein the conductive line is a cured metal paste.
- [Claim 4] The touch screen panel of claim 1, wherein width of the conductive line is wider than that of the conductive wire.
- [Claim 5] The touch screen panel of claim 1, wherein the insulation film covers the transparent electrode layer and the conductive wire.
- [Claim 6] The touch screen panel of claim 1, wherein the conductive line is a metal paste in which polymeric resin and metal particles are mixed.
- [Claim 7] The touch screen panel of claim 6, wherein the metal particles are any one or more metals of gold, silver, copper, platinum, palladium, rhodium, ruthenium, nickel and aluminum, or an alloy of more than two or metals thereof.
- [Claim 8] The touch screen panel of claim 1, wherein the substrate is one of a PI (Polyimide) film substrate, a PET (Polyethylene terephthalate) film substrate, a PC (Polycarbonate) film substrate and a glass substrate.
- [Claim 9] A touch screen assembly, the assembly comprising: a touch screen panel including a transparent electrode layer formed on a substrate, a plurality of conductive wires extended by being electrically connected to the transparent electrode layer, and a touch screen panel including an insulation film covering the transparent electrode layer and the conductive wires; and a PCB formed with a pad corresponding to the conductive wire of the touch screen panel.
- [Claim 10] The touch screen panel of claim 9, wherein each of the plurality of conductive wires is electrically connected to the conductive line, and the conductive line is electrically connected to the pad of the PCB.

- [Claim 11] The touch screen panel of claim 10, wherein the conductive line is extended to an inner side of the insulation film to be electrically and connectively overlapped with an end of the conductive line, and extended to an outside of the insulation film to be electrically connected to the pad of the PCB.
- [Claim 12] The touch screen panel of claim 10, wherein the conductive wire is extended to the outside of the insulation film, and the conductive wire extended to the outside of the insulation film is stacked by the conductive line.
- [Claim 13] The touch screen panel of claim 10, wherein the conductive line is a cured metal paste.
- [Claim 14] The touch screen panel of claim 12, wherein the length of the pad at the PCB is shorter than that of the conductive line.
- [Claim 15] The touch screen panel of claim 10, wherein the touch screen panel is formed with an upper plate and a bottom plate, each of the upper plate and the bottom plate is formed with a touch area.
- [Claim 16] The touch screen panel of claim 10, wherein the PCB and the conductive line are electrically connected by an anisotropic conductive adhesive.
- [Claim 17] The touch screen panel of claim 10, wherein the conductive line is a metal paste in which polymeric resin and metal particles are mixed.
- [Claim 18] The touch screen panel of claim 17, wherein the metal particles are any one or more metals of gold, silver, copper, platinum, palladium, rhodium, ruthenium, nickel and aluminum, or an alloy of more than two or metals thereof.
- [Claim 19] The touch screen panel of claim 10, wherein the transparent electrode layer is defined by a touch area.
- [Claim 20] The touch screen panel of claim 5, wherein the substrate is one of a PI film substrate, a PET film substrate, a PC film substrate and a glass substrate.


[Fig. 1]

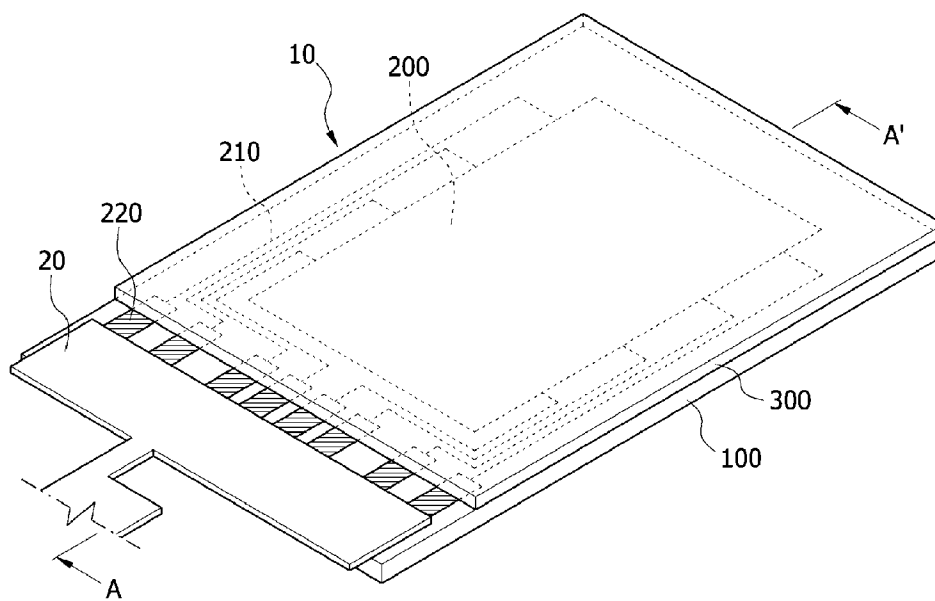


[Fig. 2]

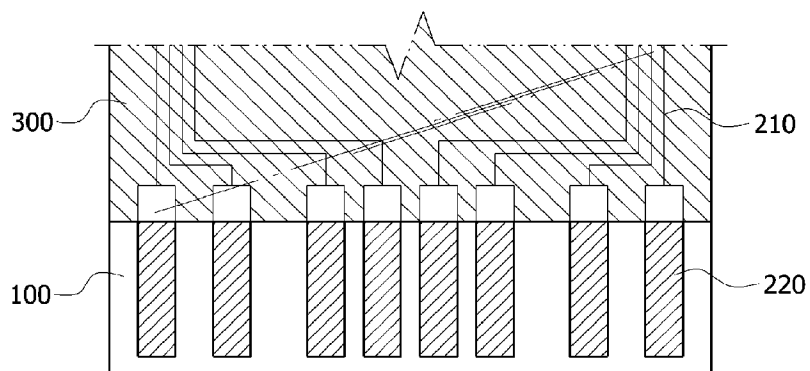


[Fig. 3]

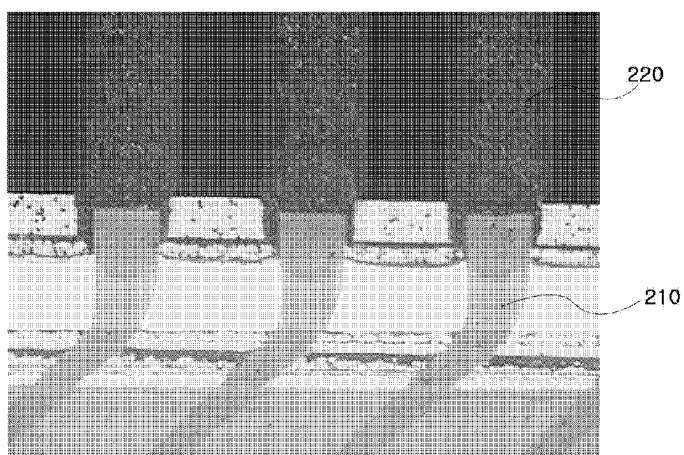


[Fig. 4]

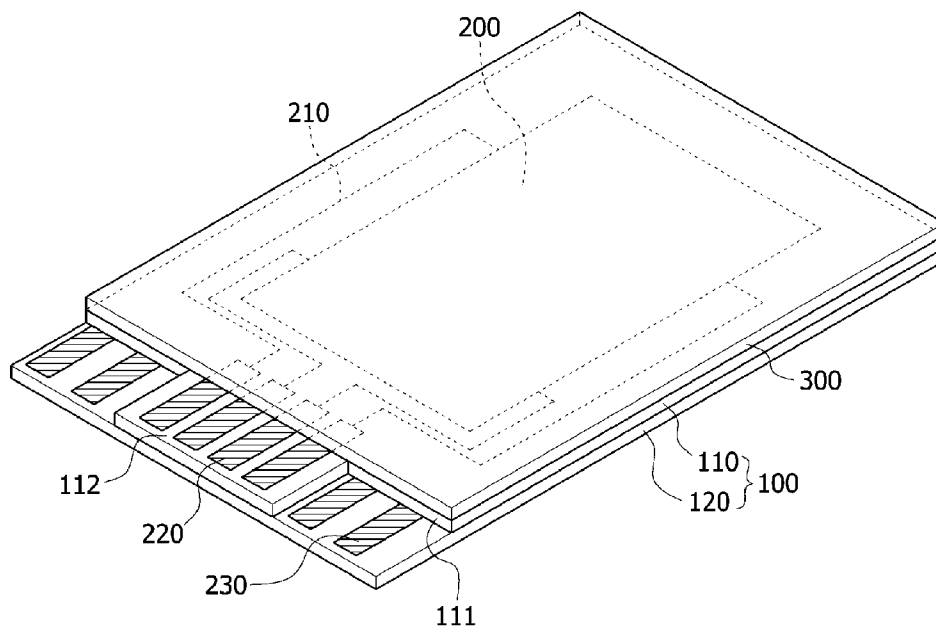


[Fig. 5]

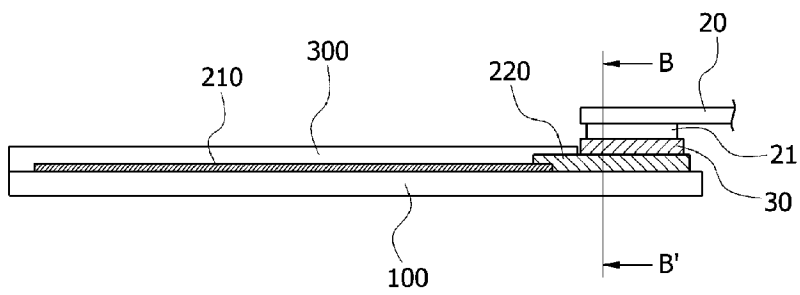

[Fig. 6]

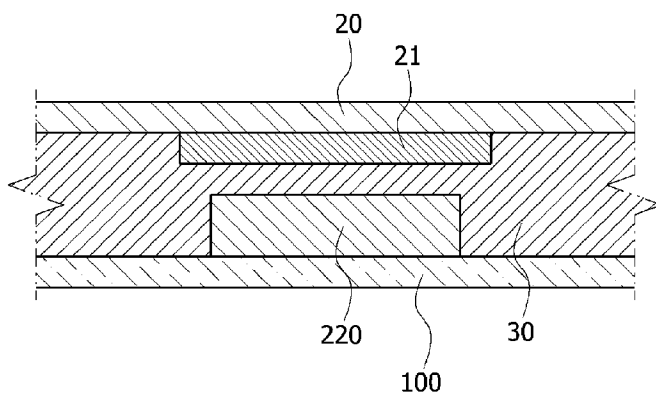

[Fig. 7]

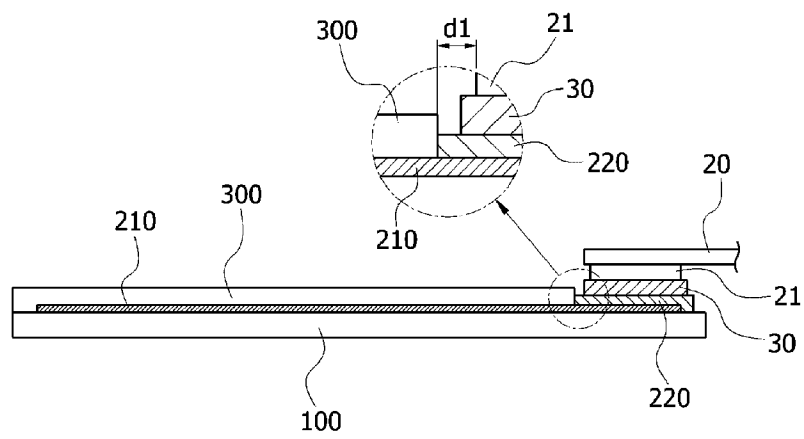

A. CLASSIFICATION OF SUBJECT MATTER**G06F 3/041(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F 3/041; G06F 3/048; G06F 3/03; G06F 3/033; B32B 15/08; G02F 1/1333

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords:touch screen,conductive wire,conductive line,PCB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	KR 10-2009-0107337 A (HANTOUCH.COM) 13 October 2009 See paragraphs[0020]-[0022] and figures 2-3.	1-20
Y	JP 09-258882 A (ALPS ELECTRIC CO LTD) 03 October 1997 See paragraphs[0017]-[0024] and figures 1-3.	1-20
A	JP 2004-151956 A (KAWAGUCHIKO SEIMITSU CO LTD) 27 May 2004 See paragraphs[0003]-[0009] and figures 7-8.	1-20
A	JP 2004-213610 A (LG PHILLIPS LCD CO LTD) 29 July 2004 See paragraphs[0012]-[0017] and figures 3a-b.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 FEBRUARY 2012 (27.02.2012)

Date of mailing of the international search report

27 FEBRUARY 2012 (27.02.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 189 Cheongsa-ro,
Seo-gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Hee Bong

Telephone No. 82-42-481-8120



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2011/005254

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 10-2009-0107337 A	13. 10. 2009	None	
JP 09-258882 A	03. 10. 1997	JP 3336186 B2	21. 10. 2002
JP 2004-151956 A	27. 05. 2004	None	
JP 2004-213610 A	29. 07. 2004	CN 1514400 A	21. 07. 2004
		CN 1514400 C0	06. 02. 2008
		DE 10359890 A1	15. 07. 2004
		JP 4516295 B2	04. 08. 2010
		KR 10-0451775 B1	08. 10. 2004
		KR20040061502A	07. 07. 2004
		US 2004-0222974 A1	11. 11. 2004
		US 7633564 B2	15. 12. 2009