

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 May 2006 (26.05.2006)

PCT

(10) International Publication Number
WO 2006/055080 A1

(51) International Patent Classification:
B24B 19/22 (2006.01)

(21) International Application Number:
PCT/US2005/033041

(22) International Filing Date:
16 September 2005 (16.09.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/988,816 15 November 2004 (15.11.2004) US

(71) Applicant (for all designated States except US): **3M INNOVATIVE PROPERTIES COMPANY** [US/US];
3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors: **LURIE, Edward B.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).
COX, Larry R.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: **ROSENBLATT, Gregg H.** et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FIBER POLISHING APPARATUS AND METHOD FOR FIELD TERMINABLE OPTICAL CONNECTORS

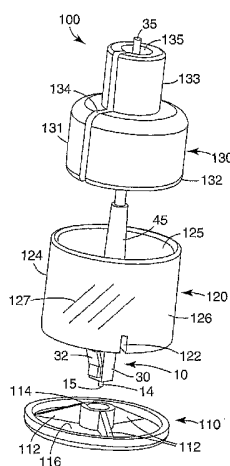

(57) Abstract: A polishing apparatus for an optical fiber connector (10) that includes an optical fiber ferrule (14) and a connector housing (30), comprises a polishing puck (110) having an aperture (113) to permit passage of the ferrule therethrough and a mount (114) to hold the connector housing at a predetermined angle. The polishing apparatus further includes a stabilizer (120) having a first portion mountable on the polishing puck to provide a grip separate from the connector housing. The polishing apparatus further includes a weighting device (130), at least a portion of which is disposed in the stabilizer, to provide a direct force on the connector housing, substantially independent from the stabilizer. The polishing apparatus provides a hand-polishing tool that controls the force and tilt placed on a terminated optical fiber connector during the polishing process, thereby providing more repeatable polished ferrules with respect to ferrule geometry such as ferrule radius of curvature (ROC), apex offset, and fiber height.

WO 2006/055080 A1

**FIBER POLISHING APPARATUS AND METHOD FOR FIELD
TERMINABLE OPTICAL CONNECTORS**

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention is directed to an apparatus and method for polishing terminated optical fiber connectors, in particular, field terminable ferrule-based optical connectors having a thermoplastic adhesive.

Related Art

10 Mechanical optical fiber connectors for the telecommunications industry are known. In recent years, an emphasis has been placed on the use of small form factor (SFF) optical fiber connectors. For example, LC ("Lucent Connectors") optical-type connectors have been described in U.S. Patent Nos. 5,481,634; 5,719,977; and 6,318,903. Other SFF connectors include MU-type and LX5-type optical connectors. These connectors are used for joining optical fiber segments at their ends and for
15 connecting optical fiber cables to active and passive devices. The LC form factor is about 50% smaller (e.g., with a ferrule polishing area of about 0.5 mm²) than the form factors for other conventional optical connectors, such as ST, FC, and SC (e.g., with a ferrule polishing area of about 3.2 mm²), which can be referred to as large form factor (LFF) connectors.

20 Commercially available SFF connectors are not well suited for field installations. Conventional adhesive materials include thermosets, anaerobic and UV curing adhesives, as well as two-part epoxies and acrylates. For example, LC connectors typically use epoxy-based resins (e.g., two part epoxies) for fiber retention within the ferrule portion of the connector. These epoxies require about 10 to 15
25 minutes to heat cure after application. Once set, the fiber cannot be removed from the ferrule without breaking the fiber, thus making resetting of the optical fiber in the ferrule impractical.

 In addition, because of their small size, most SFF connectors utilize 50% reduced diameter ceramic ferrules for fiber alignment, resulting in about six times
30 reduction in available polishing area. Due to this reduced polishing area, it is more difficult to control the important parameters of SFF connector ferrule geometry,

namely the radius of curvature (or "ROC"), the fiber height, and the (radius) apex offset.

SUMMARY OF THE INVENTION

According to a first aspect of the present invention, a polishing apparatus for
5 an optical fiber connector that includes an optical fiber ferrule and a connector
housing, comprises a polishing puck having an aperture to permit passage of the
ferrule therethrough and a mount to hold the connector housing at a predetermined
angle. The polishing apparatus further includes a stabilizer having a first portion
mountable on the polishing puck to provide a grip separate from the connector
10 housing. The polishing apparatus further includes a weighting device, at least a
portion of which is disposed in the stabilizer, to provide a direct force on the
connector housing.

According to another embodiment, a method of polishing an optical fiber
connector that includes an optical fiber ferrule and a connector housing, comprises
15 providing the polishing apparatus described above. The stabilizer is mounted on the
polishing puck. The method further includes disposing the optical fiber connector in
the mount, wherein at least a portion of the ferrule extends through an aperture in the
polishing puck. The weighting device is then placed in the stabilizer, where a portion
of the weighting device directly contacts at least a portion of the connector housing.
20 The polishing apparatus is then translated across at least one polishing surface for a
predetermined amount of polishing strokes.

The above summary of the present invention is not intended to describe each
illustrated embodiment or every implementation of the present invention. The figures
and the detailed description that follows more particularly exemplify these
25 embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be further described with reference to the
accompanying drawings, wherein:

Fig. 1 shows an exploded schematic view of a polishing apparatus according
30 to an exemplary embodiment of the present invention.

Fig. 2 shows another schematic view of a polishing apparatus according to the
embodiment of Fig. 1.

Fig. 3 shows another schematic view of a polishing apparatus according to the embodiment of Fig. 1.

Fig. 4 shows another schematic view of a polishing apparatus according to the embodiment of Fig. 1.

5 Fig. 5 shows another schematic view of a polishing apparatus according to the embodiment of Fig. 1.

Fig. 6 shows a schematic view of a stabilizer according to an exemplary embodiment of the present invention.

10 Fig. 7 shows a cross section view of a weighting device according to the embodiment of Fig. 1.

Fig. 8 shows a schematic view of a polishing apparatus according to an alternative embodiment of the present invention.

15 While the invention is amenable to various modifications and alternative forms, specifics thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit the invention to the particular embodiments described. On the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF THE EMBODIMENTS

20 The present invention is directed to an apparatus and method for polishing terminated optical fiber connectors, in particular, field terminable ferrule-based optical connectors having a thermoplastic adhesive.

According to an exemplary embodiment of the present invention, a polishing device or apparatus, such as shown in Figs. 1-5 can be utilized to provide consistent, 25 repeatable polishing for SFF (and LFF) optical connectors that are field terminable (i.e., able to be terminated in the field). In particular, polishing apparatus 100 provides a hand-polishing tool that controls the force and tilt placed on a terminated optical fiber connector during the polishing process, thereby providing more repeatable polished ferrules that comply with ferrule geometric parameters such as 30 ferrule radius of curvature (ROC), apex offset and fiber height.

Figs. 1-5 illustrate different schematic views of an exemplary embodiment of the present invention, a polishing apparatus 100. Polishing apparatus 100 includes the following main parts: a polishing puck 110, a stabilizer or grip 120, and a weighting

device 130. Polishing puck 110 is constructed from a rigid material, such as a metal or a molded polymer (e.g., glass or mineral filled plastic). The shape of polishing puck 110 can be any convenient shape, for example, a structure having a circular base, which can remain substantially flat on a polishing media or surface during the polishing process.

Polishing puck 110 further includes a connector mount 114 that is configured to receive a SFF connector, such as an LC-type connector 10, having a fiber connector housing 30 and having an optical fiber terminated in the connector ferrule 14.

Typically, ferrule 14 is formed from a ceramic, glass, plastic, or metal material to support an optical fiber inserted therein. In an exemplary embodiment, the SFF connector 10 is preloaded with a thermoplastic adhesive that can rapidly soften at a sufficient elevated temperature and that can rapidly harden when exposed to ambient (e.g., room) temperature. For example, the thermoplastic adhesive utilized can be a thermoplastic resin, such as described in U.S. Patent No. 4,984,865, incorporated by reference herein in its entirety. In addition, the thermoplastic adhesive can be an ultra high temperature (UHT) thermoplastic adhesive material which provides a high softening point and that is capable of satisfying environmentally stringent Telcordia GR-326 specifications. The construction of an exemplary LC-type optical connector, other suitable adhesives and the pre-loading of an exemplary LC-type optical connector are further described in commonly-owned and co-pending U.S. Patent Application No. 10/811,437, incorporated by reference herein in its entirety. An exemplary method of terminating a fiber in a SFF connector is described in a commonly-owned and co-pending U.S. Patent Application No. 10/988,965, incorporated by reference herein in its entirety.

Alternatively, in other embodiments, the connector may be any SFF or LFF connector. In additional alternative embodiments, the fiber terminating process may be accomplished utilizing a thermoplastic adhesive or a thermoset, e.g., a cyanoacrylate, an anaerobic and/or UV curing adhesive, or a two-part epoxy or acrylate.

Mount 114 provides a snug, slidable fit to hold connector 10 at a predetermined angle, e.g., 90° with respect to the polishing surface or at a small angle from perpendicular (about 5° to about 12°) for angle polished connectors. When in use, a terminated optical fiber connector 10 is placed in mount 114, so that a portion

of ferrule 14 of the optical fiber connector 10 extends through aperture 113 of puck 110. The bottom surface 115 of puck 110 can then be moved or slid across an appropriate polishing media (not shown) so that the fiber and ferrule end face 15 is suitably polished (e.g., flat or angled), within permissible/compliant ROC and apex offset tolerances. Conventional LC polishing pucks suitable for the apparatus of the present invention are commercially available from optical connector vendors such as OFS (Georgia, USA).

Polishing apparatus 100 further includes a stabilizer or grip 120. Stabilizer 120 includes a body 124 that is constructed of a rigid material, such as a metal or molded polymer, which is mountable on polishing puck 110. As shown in the exemplary embodiment of Figs. 1-5, stabilizer 120 can be snugly disposed, mounted on or affixed to polishing puck 110, where slots 122 are formed to slidably mount on puck rib structures or ridges 112. Slots 122 can provide clearance of ridges 112. In addition the fitting together of the slots and ridges can prevent substantial rotation of the stabilizer 120 on the puck 110. Precise alignment of the stabilizer and the puck and the retention of the stabilizer in the puck can be created by a friction/interference fit between the outside wall of stabilizer 120 and the inside wall of the lip on the puck (see Fig. 1). Other mechanisms for mounting stabilizer 120 to polishing puck 110 can be utilized, as would be apparent to one of ordinary skill in the art. In addition, in this exemplary embodiment, stabilizer 120 can have an opening 125 to permit passage of the optical connector housing 30 and to receive weighting device 130.

As shown in Fig. 6, stabilizer 120 can optionally include a lower portion, wherein slots 122 are formed in a bottom surface 128. In addition, the bottom surface 128 of the stabilizer lower portion can be disposed on surface 116 of puck 110, which reduces the likelihood of the polishing puck 110 flexing significantly during a field polishing process. Stabilizer 120 can also include a lower opening 129 to allow straightforward passage of connector housing 30 and connector latch mechanism 32 to the puck mount 114. At least a portion of puck mount 114 may extend into lower opening 129.

Stabilizer 120 is configured to provide a field technician (who performs polishing in the field) with a stable gripping surface during the polishing procedure, so that force is transferred substantially uniformly to the polishing puck 110, to help maintain ferrule/end face surface 15 in a substantially flat orientation on the polishing

surface or media. In addition, outer surface 126 of stabilizer 120 can include a textured surface 127 to provide for easier gripping by a field technician. Stabilizer 120 can have any convenient shape for gripping. For example, as shown in Figs. 1-5, stabilizer 120 can have a cylindrical shape. Using this design, the connector housing and connector ferrule are also shielded or protected from extraneous swiveling movements and tilting during hand polishing caused by touching a portion or portions of the connector housing, thereby imparting an extraneous force or forces on the ferrule or connector.

Conventional field mountable SFF connectors can be supplied with a flat ferrule end face or a ferrule having a pre-radius. During polishing of a SFF connector ferrule with a flat end face, a ferrule radius can begin to form. However, as the investigators have determined, utilizing conventional polishing pucks and polishing procedures (such as those utilized with LFF connectors, which have much larger polishing areas, and can undergo many more polishing strokes without significantly changing ROC and apex offset) can lead to the creation of a very small radius, of less than 7 mm, that is offset from the fiber core by more than 50 μm . For example, SFF connectors, which have a ferrule polish area about six times less than the polish area of LFF connectors, can be readily polished in 50 strokes or less, in which ROC may reduce to 4–6.5 mm, and apex offset can drift to 75–100 μm .

These example dimensions can fall outside of industry acceptable standards, such as Telcordia GR 326 (Issue 3, core) specifications, which require a ROC of 7-25 mm, an apex offset of 0–50 μm , and a fiber height (i.e., distance of fiber tip to ferrule end face) of +50 nm to –125 nm (depending on the radius). Thus, for consistent field polishes that yield standards-compliant connectors, the polishing apparatus 100 of exemplary embodiments of the present invention is configured to allow the field technician to impart a more uniform (and/or less random) force on the polishing puck 110 during field polishing. The polishing apparatus 100 of exemplary embodiments can also reduce technician bias and reduce connector to connector polishing variations and/or technician to technician polishing variations.

As shown in Figs. 1-5, polishing apparatus 100 further includes a weighting device 130 that is designed to apply a substantially uniform, static force to a connector mounted in the polishing apparatus 100 that is substantially independent of the force applied by the field technician holding down the stabilizer. In an exemplary

embodiment, weighting device 130 is formed from a dense material, such as brass or another suitable metal, which has a shaft portion or hollowed interior region 135 throughout. The hollowed region 135 allows the weighting device to substantially surround the optical fiber cable 35 and boot 45 when the connector is mounted in the polishing puck 110. Weighting device 130 is also shaped to directly contact at least a portion of a mounted optical connector 10, such as a portion of connector housing 30.

As shown in Fig. 7, a cross section view, for example, weighting device 130 has a counter-bored interior region 137. A shoulder surface 138 of the interior device region contacts portion 30A of the connector housing to apply a substantially uniform downward force on the mounted connector 10 during polishing. In an exemplary embodiment, when in use, the weighting device 130 directly contacts portion 30A of the connector housing, yet does not contact surface 121 of the lower portion of stabilizer 120.

In addition, in this exemplary embodiment, the weighting device 130 can be formed to have a center of gravity near, at or below the contact portion 30A of the connector housing to provide even more stability. For example, as shown in Fig. 1, weighting device 130 can include a lower section 131 and an upper section 133, where lower section 131 has a greater mass than upper section 133. Thus, with polishing apparatus 100, the likelihood of an application of a direct force to the connector or connector body by a field technician is reduced, thereby reducing unwanted tilting or swiveling forces being applied to the connector housing and thus being transferred to the ferrule and fiber end. The application of the weighting device allows a more uniform downward force on the connector, substantially independent of operator influence.

When in use, the weighting device 130 can be substantially disposed within the stabilizer 120, such as illustrated in Fig. 3. For example, the weighting device can be adapted to be slidably received by opening 125 of stabilizer 120, such as shown in Fig. 4. In addition, weighting device 130 can include a slot 134 formed in the side surface of the device 130 so that the weighting device can be applied to the connector and removed easily past the fiber cable 35.

As the investigators have determined through machine polishing, a force of about 0.25 lb_f per connector with a polishing pad having 70-72 durometer (Shore A) can be applied to an LC-type connector. Preferably, from about 0.1 lb_f (0.44 N) to

about 0.5 lb_f (2.22 N) depending on the durometer of the polishing pad can be applied to an LC-type connector having a pre-radiused ferrule. A flat ferrule may require additional polishing strokes. to yield a ferrule ROC of about 8 mm–14 mm. The application of more weight can yield a smaller ROC and the application of less weight can yield a larger ROC. Thus, according to the present invention, weighting device 130 can be designed to provide the appropriate amount of force to the connector during polishing, depending on the desired application and polishing pad used beneath polishing media.

In addition, according to an alternative embodiment, the weighting device can be designed as a spring loaded mechanism, either separate from or integral with the stabilizer, to provide a pre-set force to the connector housing during polishing.

Thus, as would be apparent to one of ordinary skill in the art, the components of polishing apparatus 100 can vary in shape and size. For example, Fig. 8 shows an alternative embodiment of a polishing apparatus 200, which includes a polishing puck 210 (having a similar construction to puck 110 described above), a stabilizer 220, and a weighting device 230. In this alternative embodiment, stabilizer 220 is configured to have a bell-shape, with a wide lower portion mountable on puck 210. An opening 225 permits passage of the terminated connector housing 30. A slot 223 can be provided to permit the protrusion of latch mechanism 32. In a manner similar to that described above, a gripping region 226 permits a field technician to handle the polishing apparatus 200 and provide a substantially uniform polishing force to puck 210, without the field technician having to directly contact connector housing 30. A weighting device 230 is partially received by stabilizer 220 through opening 225. The weighting device has a lower portion 231 and an upper portion 233, where the lower portion 231 is configured to directly contact at least a portion of the connector housing 30 in order to provide a substantially uniform downward force on the mounted connector during polishing. Weighting device 230 can also include a slot 234 formed in the side surface of the device 230 so that the weighting device can be applied to the connector and removed easily past the fiber cable 35.

Examples

A polishing-yield comparison test was performed on two groups of LC connectors having terminated fibers (single mode and multi-mode fibers were utilized in each test group) with a thermoplastic (or Hot Melt) adhesive, available from 3M

Company, St. Paul MN. The hand-polishing method included one or more of the following steps:

1. The fiber stub and 1/2 of the Hot Melt bead is removed with a 9 μm silicon carbide lapping film (dry). The ferrule is air polished (i.e., with no backing pad) before placing the connector in the puck. (Alternatively, 3–15 μm silicon carbide, aluminum oxide, or other lapping films could be used.)
2. Optionally, the ferrule can then be polished on 2 μm aluminum oxide lapping film (dry), for 10-12 “figure-8” (or circular) strokes with very light hand pressure before adding the weighting device. The weighting device is added and the ferrule is polished for approximately 10 strokes or about 4-6 strokes after the remaining Hot Melt is fully removed. Multi-mode fiber connectors could be considered finished at this step, or, alternatively, step 3 could be applied for a cleaner cosmetic finish. (Alternatively, 1–3 μm aluminum oxide, diamond, silicon carbide, or other lapping films could be used.)
3. For single mode fiber connectors (or multi-mode fiber connector cosmetics), a polish (wet) is performed on a 0.5 μm diamond lapping film for about 6 strokes, and the puck is rotated about 180° after about 3 strokes. (Alternatively, 0.1–1.5 μm diamond, aluminum oxide, or other fine lapping films could be used.) The puck rotation can be used to average the way a field technician holds the polishing puck and/or stabilizer, since some technicians may heavily favor their thumb with extra pressure.
4. For single mode fiber connectors, a polish (wet) is performed on 20 nm silicon dioxide lapping film for about 10 strokes, and the puck is rotated about 180° after about 5 strokes. (Alternatively, other sub-micron aluminum oxide, cerium oxide, or silicon dioxide lapping films could be used.)

As shown in Table 1, a first group of LC-Connectors having pre-radiused ferrules ranging from 9-16 mm were polished. The LC connectors of this group were terminated using a thermoplastic adhesive, such as described in commonly-owned and co-pending U.S. Patent Application No. 10/811,437, incorporated by reference above. The LC connector fiber terminated ferrules were polished (as per the above method) using only a polishing puck, similar to polishing puck 110 shown in Fig. 1. The net yield shown in Table 1, using only the puck, was about 48%. The sample size included 27 LC connectors. After polishing, ten (10) connectors had ROC < 7 mm

and five connectors had apex offsets $>50\text{ }\mu\text{m}$, with one connector failing for both criteria.

Table 1

LC Hot Melt Connectors Polished with Standard LC Puck only	Radius of Curvature (mm)	Apex Offset (μm)
Number of Samples:	27	27
Minimum:	2.71	10.74
Maximum:	18.67	86.52
Mean:	8.17	36.94
Standard Deviation:	3.75	18.18
Percent Passed:	63.0%	81.5%

- 5 Table 2 below displays the average results a second group of LC connectors having pre-radiused ferrules ranging from 9-16 mm. The second group of LC connectors, also terminated using a thermoplastic adhesive, were polished (as per the above method) using a polishing apparatus similar to polishing apparatus 100 shown in Figs. 1-5, which included a polishing puck, a stabilizer, and a weighting device.
- 10 The sample size of this test group was 40 LC connectors. All polished connectors met the ROC and apex offset requirements of Telcordia GR-326 Issue 3.

Table 2

LC Hot Melt Connectors Polished with Stabilizer & Weight	Radius of Curvature (mm)	Apex Offset (μm)
Number of Samples:	40	40
Minimum:	7.36	5.25
Maximum:	13.99	46.77
Mean:	9.54	24.45
Standard Deviation:	1.65	11.69
Percent Passed:	100.0%	100.0%

- 15 Thus, the above polishing method and polishing apparatus of the present invention can be used to enable manual, field polishing technicians to achieve predictable high quality and yield performance. This method and apparatus can aid installers of fiber optic networks, such as Local Area Networks (LANs) or Premise buildings, for the field termination of small form factor connectors, such as the

exemplary LC connectors described above. In addition, the above method and apparatus can be utilized for the field polishing of flat or pre-radiused ferrule-base large form factor connectors, such as ST connectors, FC connectors, and SC connectors. The reliability of the above method and apparatus can reduce the need to
5 use costly interferometers to measure the ferrule geometry, as installers are usually blind to the geometry results of a field polish.

The present invention should not be considered limited to the particular examples described above, but rather should be understood to cover all aspects of the invention as fairly set out in the attached claims. Various modifications, equivalent
10 processes, as well as numerous structures to which the present invention may be applicable will be readily apparent to those of skill in the art to which the present invention is directed upon review of the present specification. The claims are intended to cover such modifications and devices.

What is Claimed is:

1. A polishing apparatus for an optical fiber connector that includes an optical fiber ferrule and a connector housing, comprising:
 - a polishing puck having an aperture to permit passage of the ferrule
 - 5 therethrough and a mount to hold the connector housing at a predetermined angle;
 - a stabilizer having a first portion mountable on the polishing puck to provide a grip separate from the connector housing; and
 - a weighting device, at least a portion of which is disposed in the stabilizer, to provide a direct force on the connector housing.
- 10 2. The polishing apparatus of claim 1, wherein the weighting device comprises a weight having a shaft portion, the weight receivable through an opening of the stabilizer.
3. The polishing apparatus of claim 2, wherein the shaft portion of the weight receives a cabled portion of the optical fiber connector.
- 15 4. The polishing apparatus of claim 2, wherein the weight includes an interior cavity, and wherein a surface defining a portion of the interior cavity is disposed on a portion of the optical fiber connector housing.
5. The polishing apparatus of claim 1, wherein the stabilizer includes a shaft to receive the ferrule and connector housing, and wherein an outer surface of the
- 20 stabilizer is textured.
6. The polishing apparatus of claim 1, wherein the first portion of the stabilizer comprises one or more slots slidably mountable on one or more ridges formed on the polishing puck.
7. The polishing apparatus of claim 1, wherein the mount is adapted to receive a
- 25 small form factor optical fiber connector.

8. The polishing apparatus of claim 1, wherein the small form factor optical fiber connector is a LC-type connector having an optical fiber terminated by a thermoplastic adhesive material.
9. The polishing apparatus of claim 1, wherein the mount is adapted to receive a large form factor fiber optic connector.
10. The polishing apparatus of claim 1, wherein the weighting device comprises a spring loaded mechanism, a portion of which adapted to directly contact at least a portion of the connector housing.
11. The polishing apparatus of claim 1, wherein the weighting device provides a force of about 0.1 lb_f to about 0.5 lb_f on the connector housing.
12. A method of polishing an optical fiber connector that includes an optical fiber ferrule and a connector housing, comprising:
- providing a polishing apparatus that includes
 - a polishing puck having an aperture to permit passage of the optical fiber ferrule therethrough and a mount to hold the connector housing at a predetermined angle;
 - a stabilizer having a first portion mountable on the polishing puck to provide a grip separate from the connector housing; and
 - a weighting device, at least a portion of which is disposed in the stabilizer, to provide a direct force on the connector housing;
 - mounting the stabilizer on the polishing puck;
 - disposing the optical fiber connector in the mount, wherein at least a portion of the ferrule extends through an aperture in the polishing puck;
 - disposing the weighting device in the stabilizer, wherein a portion of the weighting device directly contacts at least a portion of the connector housing; and
 - translating the polishing apparatus across at least one polishing surface for a predetermined amount of polishing strokes.
13. The method according to claim 12, wherein the optical fiber connector comprises a small form factor optical fiber connector having an optical fiber terminated by a thermoplastic adhesive material, and wherein prior to the disposing

the optical fiber connector in the mount step, the method comprises removing a portion of the thermoplastic material with at least one of a lapping film polish in air and a lapping film attached to a compliant polishing pad.

14. The method according to claim 12, wherein the optical fiber connector
5 comprises a small form factor optical fiber connector having an optical fiber terminated by a thermoplastic adhesive material, and wherein prior to the disposing the weighting device in the stabilizer step, the method comprises polishing the ferrule on a lapping film using a predetermined amount of at least one of figure-8 and circular strokes.
- 10 15. A method of installing an optical fiber network, comprising a method of polishing an optical fiber connector that includes an optical fiber ferrule and a connector housing according to claim 12.

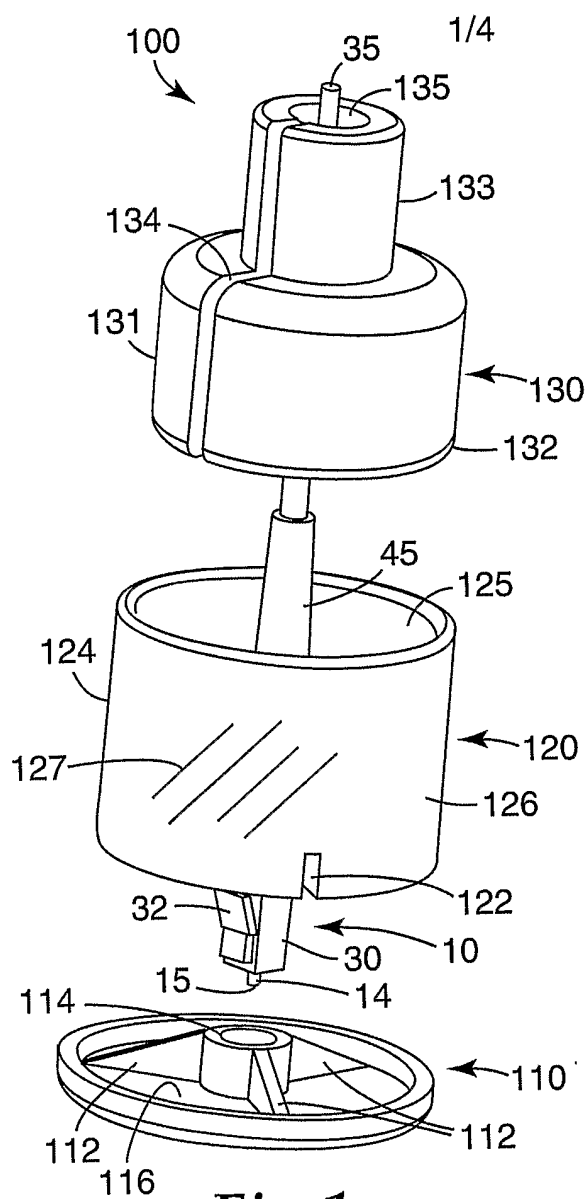


Fig. 1

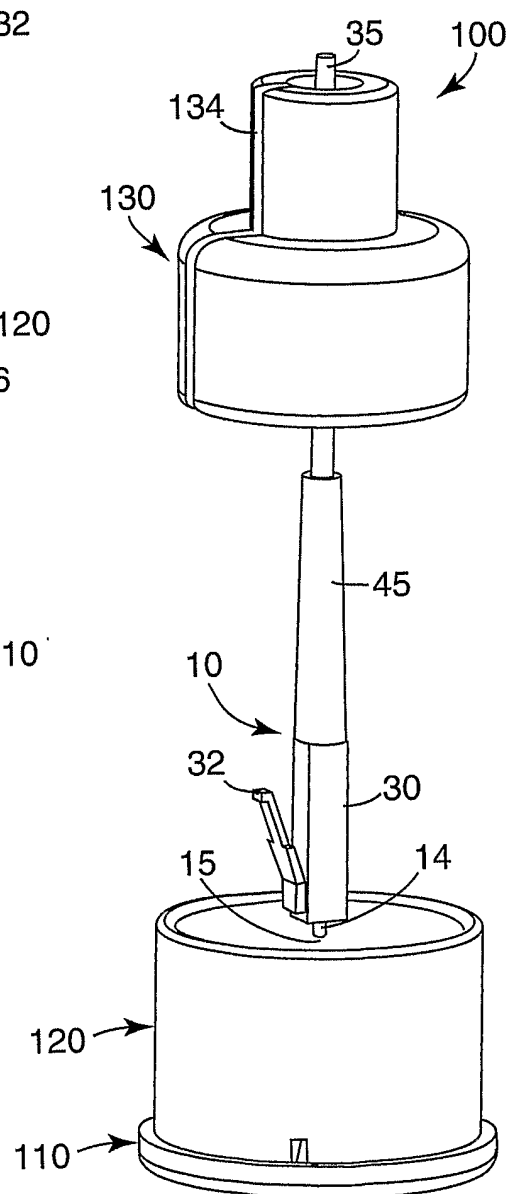


Fig. 2

2/4

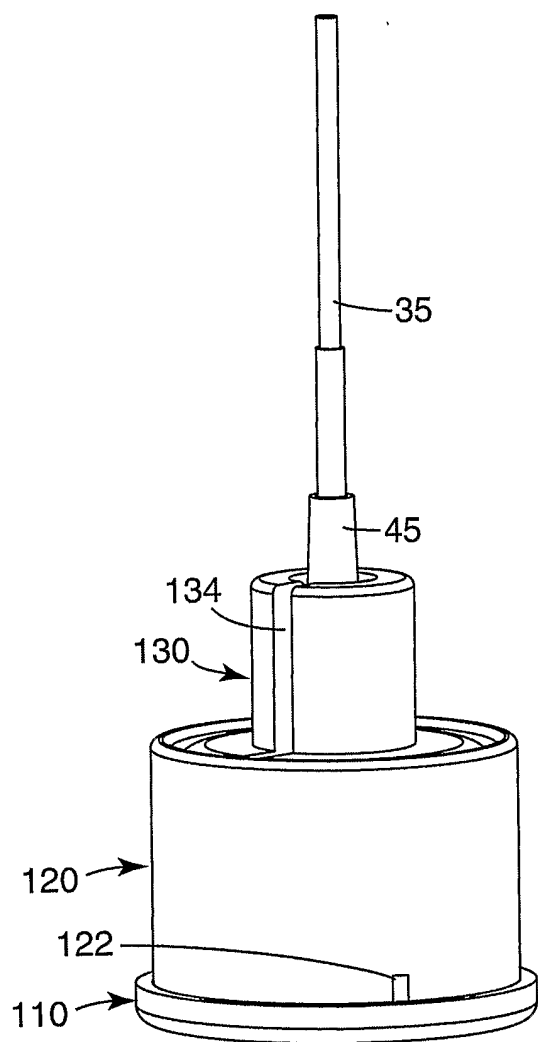


Fig. 3

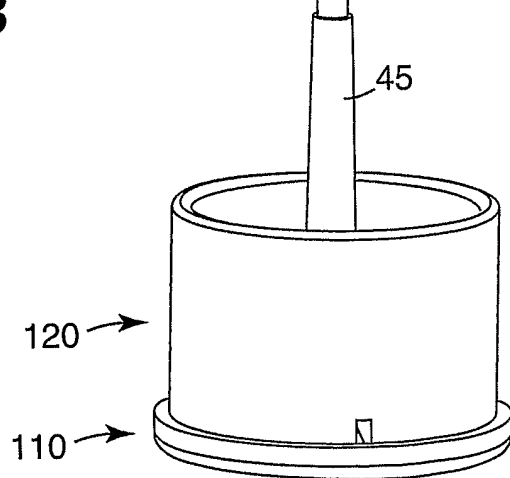
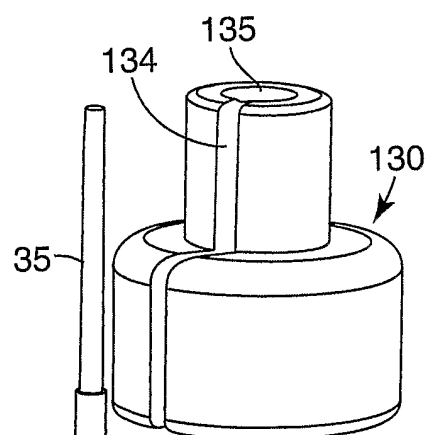


Fig. 4

3/4

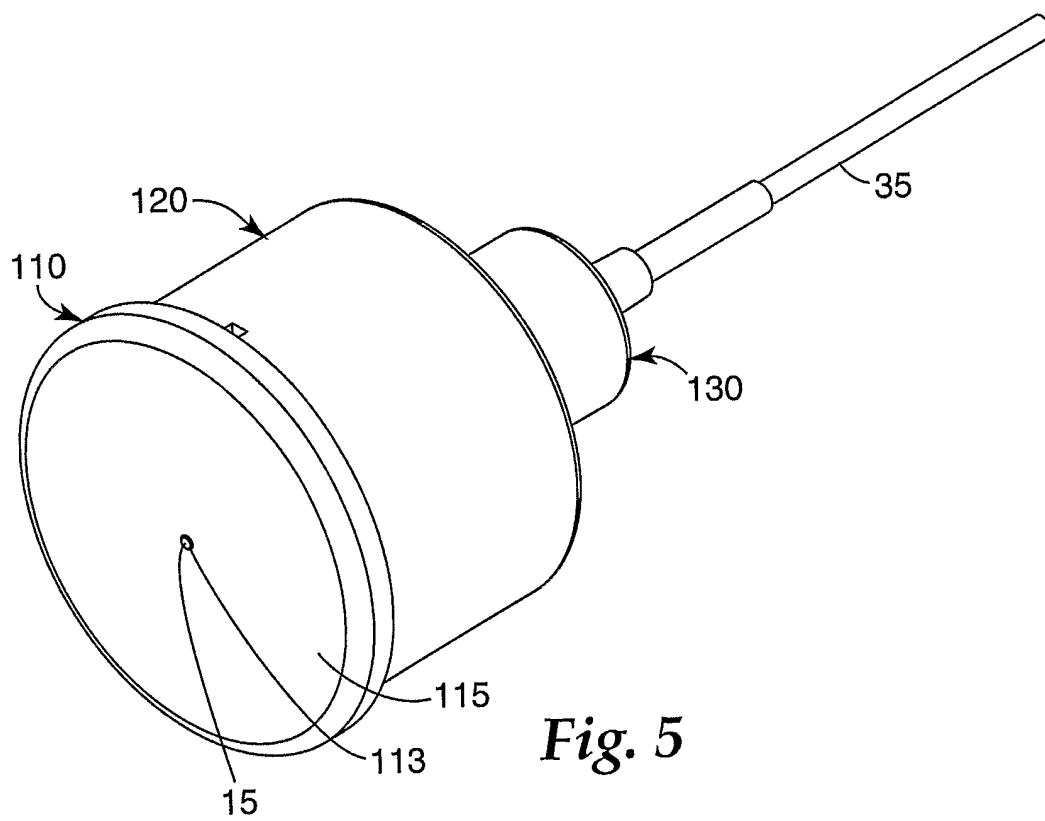


Fig. 5

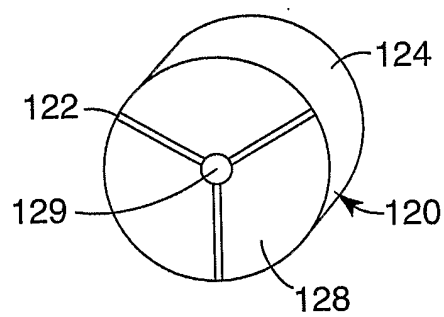


Fig. 6

4/4

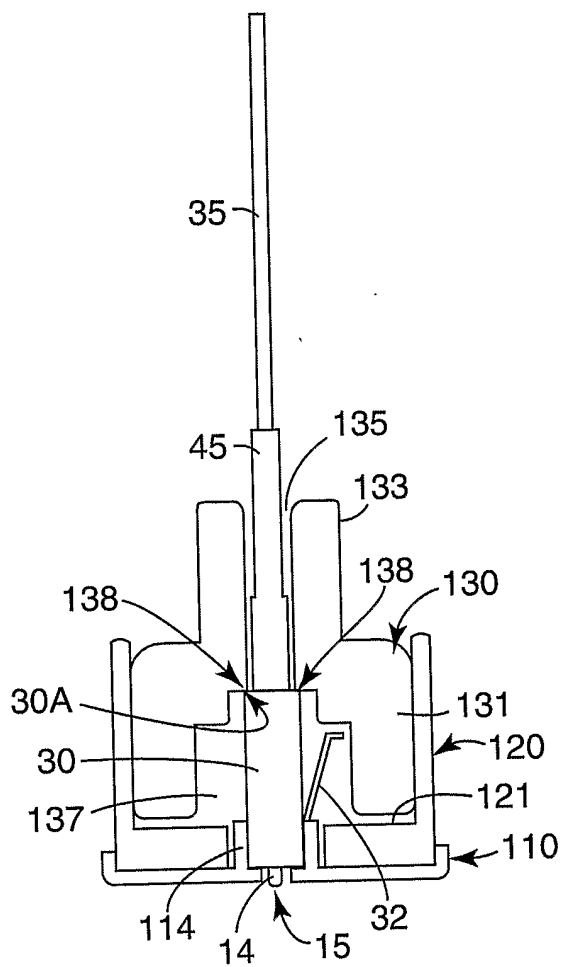


Fig. 7

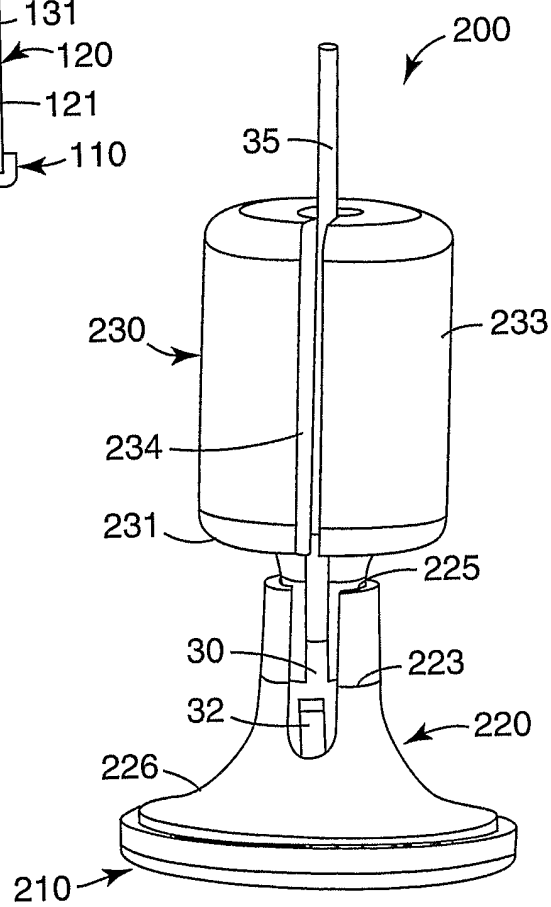


Fig. 8

INTERNATIONAL SEARCH REPORT

Int nal Application No
PCT/US2005/033041

A. CLASSIFICATION OF SUBJECT MATTER

B24B19/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B24B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/139118 A1 (WETENKAMP DANIEL B ET AL) 24 July 2003 (2003-07-24)	1-3, 9,
Y	paragraphs '0036!, '0042!, '0055! - '0057!; figures 24,25	11, 12, 15
X	EP 0 262 770 A (AMPHENOL CORPORATION) 6 April 1988 (1988-04-06)	5
Y	the whole document	1, 6, 10,
Y	GB 2 158 750 A (THE * PLESSEY COMPANY PLC) 20 November 1985 (1985-11-20)	12, 15
A	figures 2,3	5, 7-9,
Y	US 4 984 865 A (LEE ET AL) 15 January 1991 (1991-01-15)	13, 14
	cited in the application	
	the whole document	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

12 December 2005

Date of mailing of the international search report

22/12/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Zeckau, A

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/033041

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/106362 A1 (KUME AKIRA ET AL) 3 June 2004 (2004-06-03) the whole document -----	1-15
A	EP 1 415 762 A (NIPPON TELEGRAPH AND TELEPHONE CORPORATION) 6 May 2004 (2004-05-06) the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/033041

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003139118	A1	24-07-2003	NONE
EP 0262770	A	06-04-1988	AU 7639387 A 18-02-1988 JP 63100409 A 02-05-1988
GB 2158750	A	20-11-1985	SE 8502404 A 18-11-1985
US 4984865	A	15-01-1991	AU 621249 B2 05-03-1992 AU 6668290 A 23-05-1991 BR 9005824 A 24-09-1991 CA 2030020 A1 18-05-1991 DE 69032368 D1 09-07-1998 DE 69032368 T2 28-01-1999 DE 434212 T1 22-09-1994 EP 0434212 A2 26-06-1991 JP 3082938 B2 04-09-2000 JP 3210512 A 13-09-1991 KR 181501 B1 15-05-1999 SG 45371 A1 16-01-1998 ZA 9009235 A 25-09-1991
US 2004106362	A1	03-06-2004	JP 2004188580 A 08-07-2004
EP 1415762	A	06-05-2004	CN 1499231 A 26-05-2004 US 2004086251 A1 06-05-2004