

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/104672 A1

(51) International Patent Classification⁷: **F16D 41/08**

(21) International Application Number: PCT/IB03/02169

(22) International Filing Date: 9 June 2003 (09.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
UD2002A000130 10 June 2002 (10.06.2002) IT

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: **FACCHINI, Edoardo** [IT/IT]; Via Damiano Chiesa, 28, I-33170 Pordenone (IT).

Published:


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(74) Agent: **PETRAZ, Gilberto**; GLP Srl, Piazzale Cavedalis, 6/2, I-33100 Udine (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TRANSMISSION DEVICE

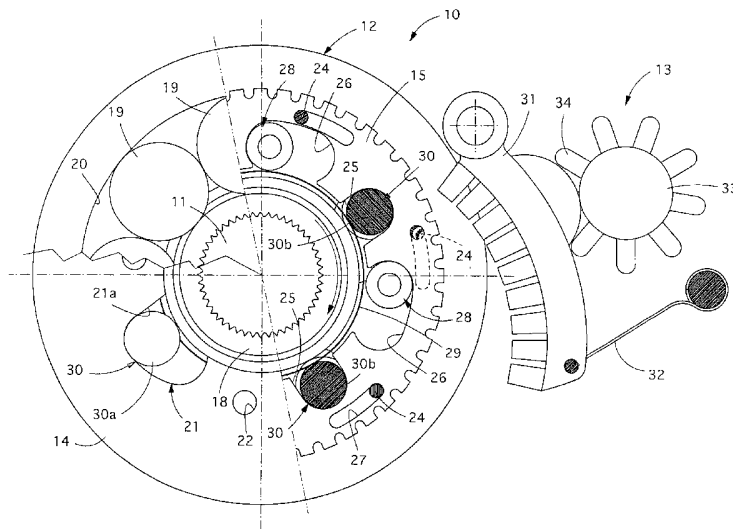

(57) Abstract: Transmission device (10) comprising a first rotary member (12) mounted coaxially on a second rotary member (11, 18). The first rotary member (12) can rotate in one direction independently from the second rotary member (11, 18), and in the opposite direction is constrained to the second rotary member (11, 18) in order to rotate solidly therewith. The device (10) can assume a first and a second condition of use, wherein the first rotary member (12) rotates in the two directions independently from the second rotary member (11, 18), and a third condition of use wherein clamping means (30, 130), integrally associated with the first rotary member (12), move from a position of non-interference to a constraint position wherein they constrain the second rotary member (11, 18) in order to make the first rotary member (12) and the second rotary member (11, 18) rotationally solid.

- 1 -

"TRANSMISSION DEVICE"

* * * * *

FIELD OF THE INVENTION

The present invention concerns a transmission device
5 which allows the free rotation, in both directions, of a
driven wheel with respect to a shaft on which it is mounted
and the selective clamping of the wheel on said shaft in
order to determine the solid rotation of the two.

BACKGROUND OF THE INVENTION

10 Free wheels are known, which can rotate in a single
direction independently with respect to a rotary member,
for example a shaft, on which they are mounted coaxially,
while, when the direction of rotation is inverted, they are
clamped on said member, so as to rotate solidly therewith.
15 The limitation of free wheels is that their rotation,
independent with respect to the member on which they are
mounted, can occur, as we said, only in one of the two
directions, since the rotation in the opposite direction
automatically implies that the wheel is clamped on said
20 member.

In some applications it becomes necessary to use
transmission devices with wheels able to rotate
independently from the relative rotating mounting member in
both directions, and be clamped, selectively and on
25 command, on said member in order to make the rotation
thereof uniform.

In order to achieve this condition, complex
transmission devices have been proposed which provide to
use external clamping elements such as joints, jaws or
30 suchlike, and do not in any case allow, during the clamping
step, sufficiently rapid response times.

Applicant has devised and embodied the present
invention to overcome these shortcomings of the state of

- 2 -

the art and to obtain other advantages.

SUMMARY OF THE INVENTION

The present invention is set forth and characterized essentially in the main claim, while the dependent claims
5 describe other innovative characteristics of the invention.

The purpose of the invention is to achieve a simple and compact transmission device in which a driven wheel can rotate freely in both directions with respect to a rotary member on which it is mounted and wherein, for at least one
10 direction of rotation of said wheel, advantageously for both, it is possible to achieve a selective and reciprocal clamping of the wheel and the relative rotating mounting member in order to render the rotation of the two solid.

In accordance with this purpose, the transmission
15 device according to the present invention comprises at least a first rotary member, or driven wheel, integrally including clamping means, and a second rotary member, or shaft, mounted coaxially with each other; the device also comprises a braking member able to selectively cooperate
20 with the first rotary member.

It comes within the field of the invention that the first rotary member is the shaft and the second rotary member is the driven wheel.

In a first and in a second condition of use of the
25 device according to the invention, the first rotary member is able to rotate in both directions independently from the second rotary member.

In a third condition of use, the braking member acts on the first rotary member to take the relative clamping
30 means from a position of non-interference to a constraint position wherein it constrains the second rotary member, rendering the two rotary members rotationally solid with each other, due to interference or reciprocal attachment.

- 3 -

According to one embodiment of the invention, the first rotary member comprises at least two components associated axially with each other and between which anti-friction means are present; a first component includes
5 guide means along which the clamping means, constrained to the second component, are able to slide, or to oscillate, when said second component is braked by the braking member, in order to move from the position of non-interference to the constraint position. In a preferential embodiment, the
10 first rotary member comprises two first components between which a second component is present on which the braking member is able to act.

In one form of embodiment of the invention, the first rotary member comprises a wheel and each component thereof
15 consists of a disk, while the second rotary member comprises a shaft coaxially associated with a relative bushing on which the clamping means act.

According to a preferential embodiment, the clamping means comprise a plurality of sliding clamping blocks,
20 housed around the periphery of the rotary member and kept in a position of non-interference by relative elastic means; the clamping means are able to close, or attach, simultaneously on the second rotary member when induced to move to the constraint position. Moreover, the guide means
25 of the first component/components comprise a plurality of hollows, with whose inner surfaces the clamping means cooperate; in one embodiment, the inner surfaces include at least a deviation segment converging towards the second rotary member, which deviation segment is traveled by the
30 clamping means in order to move from the position of non-interference to the constraint position.

In a first embodiment, the deviation segment is asymmetric with respect to the position of non-interference

- 4 -

of the clamping means and allows the latter to move to the constraint position only in one direction of rotation of the first rotary member. According to a variant, the deviation segment is symmetrical with respect to the position of non-interference of the clamping means and therefore allows the latter to move to the constraint position irrespective of the direction of rotation of the first rotary member.

According to a variant, the clamping means are of the type that oscillate from the position of non-interference to the constraint position.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other characteristics of the present invention will become apparent from the following description of a preferential form of embodiment, given as a non-restrictive example, with reference to the attached drawings wherein:

- fig. 1 shows, in a partly sectioned front view, a transmission device according to the present invention in a first condition of use;
- fig. 2 shows the device in fig. 1 in another condition of use;
- fig. 3 shows a transverse section of the device in fig. 1;
- figs. 4 and 5 show two details of the device according to the invention;
- fig. 6 shows a component of the device in fig. 1 with a view from the inner side;
- fig. 7 shows the section from A to A of fig. 6;
- fig. 8 shows the view from the outer side of the component in fig. 6;
- fig. 9 shows another component of the device in fig. 1;
- fig. 10 shows the section from B to B of fig. 9;

- 5 -

- figs. 11a-11c show a part view of a transmission device according to a variant of the invention in three different conditions of use;
- fig. 12 shows a variant of the device in fig. 1.

5 DETAILED DESCRIPTION OF A PREFERENTIAL FORM OF EMBODIMENT
OF THE INVENTION

With reference to the attached figures, the number 10 denotes in its entirety the transmission device according to the present invention.

10 The device 10 comprises a wheel 12, mounted idle coaxially on a rotary shaft 11, in this case of the thin-ribbed type, and a braking device 13, shown schematically in figs. 1 and 2, able to act on the wheel 12. The wheel 12 is able to be made to rotate in both directions by means
15 that are not shown here and comprises three disks associated with each other, two outer disks 14, specular with respect to each other, and an intermediate disk 15, all including respective central apertures 16 and 17 for coupling with the shaft 11.

20 This coupling is achieved, in this case, by means of a thin-ribbed bushing 18 on whose peripheral surface a plurality of rollers 19 slide, functioning as bearings, housed in seatings 20 made on the outer face of each of the two outer disks 14 (figs. 3 and 8).

25 In the case shown here, each outer disk 14 comprises, on its inner face, four guide hollows 21 made in bas-relief, arranged circularly, angled by 90° from each other and communicating with the central aperture 16. It is obvious, however, that there can be a different number of
30 guide hollows 21 present, and they may be arranged according to a different angulation.

The guide hollows 21 have curved inner surfaces which, with reference to fig. 6, each comprise: a first loop-

- 6 -

shaped segment 21a, a second deviation segment 21b, converging towards the central aperture 16, if traveled in an anti-clockwise direction, and a third loop-shaped segment 21c. In alternation with the guide hollows 21, each
5 outer disk 14 has four through holes 22, also arranged circularly and arranged at 90° from each other.

On the inner face, each outer disk 14 also has three arched grooves 23, arranged at 120° from each other, inside which a small ball 24 is half inserted; the arched grooves
10 23 of one outer disk 14 are arranged offset by 60° with respect to the arched grooves 23 of the other outer disk 14.

The intermediate disk 15 (fig. 9) has four through cavities 25, substantially semi-circular in shape and
15 communicating with the central aperture 17, arranged in correspondence with the guide hollows 21 of the outer disks 14.

In alternation with the through cavities 25, the intermediate disk 15 has four eyelets 26 made in
20 correspondence with the through holes 22 of the outer disks 14.

More peripherally, the intermediate disk 15 is provided with six arched grooves 27, three on one side, arranged at 120° from each other and facing three mating
25 arched grooves 23 of a first outer disk 14, and three on the other side, also arranged at 120° from each other and facing three mating arched grooves 23 of a second outer disk 14.

Into each arched groove 27 the part of the ball 24
30 emerging from the corresponding arched groove 23 of the outer disk 14 is inserted.

The association of the two outer disks 14 and the intermediate disk 15 is achieved by means of four pin

- 7 -

elements 28, functioning as spacers, having centrally a collar 28b with a bigger diameter than the two ends 28a.

To be more exact, each pin element 28 is inserted and clamped with one end 28a in a first through hole 22 of an
5 outer disk 14 and with the other end 28a in a second through hole 22, aligned with the first, of the other outer disk 14; the collar 28b is housed inside the eyelet 26 of the intermediate disk 15, which eyelet 26 is present
10 between the through holes 22 and inside which eyelet 26 the collar 28b can slide. Inside the guide hollows 21 and the mating cavities 25 respective sliding clamping blocks 30 are housed, having the ends 30a thicker and a narrower part 30b between them.

To be more exact, each sliding clamping block 30 has
15 an end 30a inserted in a first guide hollow 21 of an outer disk 14 and the other end 30a inserted in a second guide hollow 21, aligned with the first, of the other outer disk 14, while the narrower part 30b is inserted and constrained in the mating through cavity 25. A spring 29, including at
20 least a respective segment able to overlap another and cooperating with the narrower parts 30b of the sliding clamping blocks 30, keeps the latter thrust inside the respective through cavities 25. In this condition the sliding clamping blocks 30 can slide along the inner
25 surfaces of the relative guide hollows 21, whereas with respect to the through cavities 25 they can only, by compressing the spring 29, move radially towards the central aperture 17.

In the embodiment shown here, the braking member 13
30 comprises an interference element 31, associated with respective elastic contrasting means 32, on which a thruster element 33 acts, of a rotary type and including protruding profiles 34. The rotation of the thruster

- 8 -

element 33 takes the relative protruding profiles 34 in abutment on the interference element 31 which is thrust into contact with the intermediate disk 15, braking it.

The device 10 has three functioning conditions: a first condition wherein the wheel 12 and the shaft 11 rotate in a concordant direction and independently from each other; a second condition wherein the wheel 12 and the shaft 11 rotate in a reciprocally inverse direction and independently from each other; and a third condition wherein the wheel 12 and the shaft 11 rotate solidly with each other. In fig. 1 the first two functioning conditions are schematized, wherein, supposing that the shaft 11 rotates in a clockwise direction, the wheel 12 can rotate independently from the shaft 11, both in a clockwise direction and in an anti-clockwise direction; in these functioning conditions the braking member 13 is kept deactivated.

In the first condition, the clockwise torque applied to the wheel 12 is transmitted from the outer disks 14 to the intermediate disk 15 by means of the sliding clamping blocks 30, which are kept by the spring 29 with the ends 30a thrusting against the first loop-shaped segment 21a of the guide hollows 21, in a position of non-interference with the thin-ribbed bushing 18; the narrower parts 30b of the sliding clamping blocks 30 are in contact with the walls of the relative through cavities 25, to which they transmit the thrust, so as to draw the intermediate disk 15. In the second condition, the anti-clockwise torque applied to the wheel 12 is transmitted from the outer disks 14 to the intermediate disk 15 by means of the pin elements 28 which, clamped at the ends 28a inside the through holes 22 of the outer disks 14, are arranged with the collar 28b thrusting against one end of the eyelets 26 of the

- 9 -

intermediate disk 15.

In the first and second condition, the free movement of the wheel 12 around the shaft 11 is guaranteed by the presence of the rollers 19.

5 The third condition is obtained, starting from the first functioning condition, wherein the wheel 12 and the shaft 11 rotate in the same direction, in this case clockwise, by activating the braking member 13.

10 Driving the braking member 13, in fact, determines the slowdown of the intermediate disk 15 with respect to the outer disks 14, which continue to rotate with respect to the intermediate disk 15, sliding thereon due to the presence of the balls 24.

15 The reciprocal rotation of the outer disks 14 and the intermediate disk 15 takes the ends 30a of the sliding clamping blocks 30 to slide along the inner surfaces of the respective guide hollows 21, moving from the first loop-shaped segment 21a along the second deviation segment 21b, approaching the central aperture 16, until the third loop-shaped segment 21c is reached.

20 The sliding of the sliding clamping blocks 30 causes the spring 29 to compress, which reduces its diameter due to the overlapping of its two segments, and takes the sliding clamping blocks 30 themselves to clamp on the thin-
25 ribbed bushing 18 once the third loop-shaped segment 21c has been reached, while the pin elements 28 move from one end of the eyelets 26 to the other (fig. 2).

30 In this way we constrain the wheel 12 on the thin-ribbed bushing 18 and this determines the solid rotation of the shaft 11 and the wheel 12.

 The wheel 12 is dis-engaged from the thin-ribbed bushing 18, and hence from the shaft 11, when the outer disks 14 are stopped, or considerably slowed down, with the

- 10 -

shaft 11 that continues to rotate, due to inertia or because it is driven by its own drive means, and draws the sliding clamping blocks 30 from their constraint position in the third loop-shaped segment 21c towards a position of
5 release, that is, of non-interference with the thin-ribbed bushing 18, towards the second deviation segment 21b. In this condition, the spring 29 is free to expand and thrusts the sliding clamping blocks 30 into the first loop-shaped segment 21a of the respective guide hollows 21, returning
10 the device 10 to the first or second functioning condition.

In this way it is possible to continuously create alternate conditions of constraint/release between the wheel 12 and the shaft 11 (or vice versa in the case where the main drive is imparted by the shaft 11), simply by
15 modifying the relative drive conditions of the two rotary systems, normally independent of each other, which become a single system when the sliding clamping blocks 30 are engaged on the thin-ribbed bushing 18 of the shaft 11.

In the variant shown in figs. 11a-11c, the device 10
20 according to the invention allows the solid rotation of the wheel 12 and the shaft 11 irrespective of whether they rotate in clockwise or anti-clockwise direction.

In this embodiment, the outer disks 14 include guide hollows 21 with a first segment 21a and a third segment
25 21c, both loop-shaped, having the same conformation, connected by a second deviation segment 21b converging in both directions towards the central aperture 16.

The first and second condition of use are shown schematically in fig. 11a; in these conditions, the sliding
30 clamping blocks 30 are in a central position inside the relative guide hollows 21 and transmit motion to the intermediate disk through a tangential thrust on the second deviation segment 21b; the pin elements 28, not shown, are

- 11 -

in an intermediate position inside the eyelets 26.

Fig. 11b shows the third condition of use of the device 10 when the wheel 12 and the shaft 11 rotate in a clockwise direction; in this case, driving the braking member 13 determines the sliding of the ends 30a of the sliding clamping blocks 30 until the third loop-shaped segment 21c of the guide hollows 21 is reached, with the consequent constraint of the thin-ribbed bushing 18. Fig. 11c shows a further condition of use of the device 10 which allows the solid rotation in an anti-clockwise direction of the wheel 12 and the shaft 11; in this case, driving the braking member 13 causes the ends 30a of the sliding clamping blocks 30 to slide towards the first loop-shaped segment 21a of the guide hollows 21, until the thin-ribbed bushing 18 is constrained.

According to the variant shown in fig. 12, wherein to the same numbers correspond the same parts in the previous figures, the device 10 provides two outer disks 114 including four housing cavities 121, inside which mating oscillating clamping blocks 130 are arranged.

Moreover, the outer disks 114 comprise four semi-circular seatings 125, inside each of which a pin 128 is arranged on which a washer 128a is keyed which rotates on the inner diameter of the intermediate disk 115. The function of the washers 128a is to improve the reciprocal rotation of the disks 115 and 114.

To be more exact, every oscillating clamping block 130 is substantially drop-shaped and comprises a housing seating 35 inside which at least an axial spring 129 is arranged, able to normally keep the respective oscillating clamping block 130 in a raised position.

In fact, every oscillating clamping block 130 can oscillate between said raised position and a coupling

- 12 -

position, wherein at least its pointed part 130a cooperates with a relative tooth of a mating toothing 36 provided on the outer circular surface of the thin-ribbed bushing 18. The coupling position of the oscillating clamping block 130
5 defines the third condition of use of the device 10, wherein the two rotary members 11 and 12 are reciprocally solid.

The intermediate disk 115 comprises four positioning cavities 126 arranged in correspondence with the housing
10 cavities 121 of the outer disks 114, inside which mating thrust cylinders 37 are able to be arranged, each one arranged constantly in contact with the back of a respective oscillating clamping block 130. Each thrust cylinder 37 rests axially on the inner surfaces of the
15 outer disks 114.

In this way, by slowing down or stopping the rotation of the intermediate disk 115, the thrust cylinders 35 slide relatively inside the positioning cavities 126 and thrust on the backs of the oscillating clamping blocks 130. This
20 thrust exerted by the thrust cylinders 37 overcomes the force of the axial springs 129, thus taking the oscillating clamping blocks 130 into their coupling position.

The intermediate disk 115 also comprises four through eyelets 38 able to allow the housing of relative spacer
25 protuberances 39 of the outer disks 114. The protuberances 39 define the points of reciprocal contact of the two outer disks 114, and in correspondence with them cylindrical holding pins 40 are inserted.

According to a variant of this last embodiment, not
30 shown in the drawings, each oscillating clamping block 130 comprises two opposite pointed parts 130a, two thrust cylinders 37 arranged on opposite sides with respect thereto, while the thin-ribbed bushing 18 comprises two

- 13 -

toothings 36, for example coaxial and adjacent, having the teeth directed in opposite directions.

In this way, the oscillating clamping block 130 is normally arranged in its raised position and, in the event of a slowdown or stoppage of the intermediate disk 115, is thrust by one or another of the thrust cylinders 37, according to the direction of rotation of the wheel 12, towards its coupling position, wherein one of its two pointed parts 130a cooperates with the relative toothing 36.

Modifications and/or additions of parts may be made to the transmission device 10 as described heretofore, without departing from the field and scope of the present invention. For example, instead of the braking member 13 shown, any braking member may be used, which is functionally analogous, of a mechanical, hydraulic, pneumatic, magnetic, electromagnetic or any other type.

Moreover, the number of the pin elements 28, or the pins 128, and of the sliding clamping blocks 30 may be different and the pin elements 28 themselves, or the pins 128, can be made in two parts, able to be coupled together, each one made integrally on a relative outer disk 14; or they can be made in two parts, but as components independent from the outer disks 14.

Furthermore, the use of a shaft 11 and of a bushing 18 of the thin-ribbed type is not limitative, since they may include other means of reciprocal coupling such as grooved profiles or suchlike.

With reference to the variant shown in figs. 11a-11c, it is also possible to provide that the second deviation segment 21b has at its medium point a housing loop for the ends 30a of the sliding clamping blocks 30, in order to increase the supporting surface for the latter in the first

- 14 -

and second condition of use and to facilitate the transmission of the rotation motion from the outer disks 14 to the intermediate disk 15.

- 15 -

CLAIMS

1. Transmission device comprising at least a first rotary member (12) mounted coaxially on a second rotary member (11, 18), said first rotary member (12) being able to rotate at least in one direction independently from said second rotary member (11, 18), and in the opposite direction, able to be constrained to said second rotary member (11, 18) in order to rotate solidly therewith, characterized in that it is able to assume a first and a second condition of use, wherein said first rotary member (12) is able to rotate in the two directions independently from said second rotary member (11, 18), and a third condition of use wherein clamping means (30, 130), integrally associated with said first rotary member (12), move from a position of non-interference to a constraint position wherein they constrain said second rotary member (11, 18) in order to make said first rotary member (12) and said second rotary member (11, 18) rotationally solid.
2. Device as in claim 1, characterized in that it comprises a braking member (13) able to cooperate selectively with said first rotary member (12) in order to take said clamping means (30, 130) from said position of non-interference to said constraint position.
3. Device as in claim 1 or 2, characterized in that said first rotary member (12) comprises at least two components (14, 15; 114, 115) axially associated with each other, a first (14, 114) of said components including guide means (21, 121) with respect to which said clamping means (30, 130) are able to slide or oscillate in order to move from said position of non-interference to said constraint position.
4. Device as in claim 3, characterized in that said clamping means (30) are constrained to said second

- 16 -

component (15).

5. Device as in claims 2 and 3, characterized in that said braking member (13) is able to act on said second component (15).

5 6. Device as in claim 3, characterized in that said first rotary member (12) comprises two first components (14) between which said second component (15) is present.

7. Device as in any claim from 3 to 6 inclusive, characterized in that said clamping means (30) are able to
10 move from said constraint position to said position of non-interference because they are drawn by said second rotary member (11, 18) when the first component/components (14) of said first rotary member (12) is/are stopped or considerably slowed down.

15 8. Device as in claim 3, characterized in that said guide means comprise at least a hollow (21) with whose inner surfaces said clamping means (30) are able to cooperate.

9. Device as in claim 8, characterized in that the inner surfaces of said hollow (21) include at least a segment
20 (21b) converging towards said second rotary member (11, 18).

10. Device as in claim 8 or 9, characterized in that the inner surfaces of said hollow (21) include a first loop-shaped segment (21a), a second sliding segment (21b),
25 converging towards said second rotary member (11, 18) and a third loop-shaped segment (21c).

11. Device as in claim 10, characterized in that said clamping means (30) are arranged in said first segment (21a) in their position of non-interference, follow said
30 second segment (21b) in their passage from said position of non-interference to the constraint position and vice versa, and are in said third segment (21c) when said constraint position is reached.

- 17 -

12. Device as in claim 10, characterized in that said first segment (21a) and said third segment (21c) are specular with respect to said second segment (21b), said clamping means (30) being arranged at the medium point of said
5 second segment (21b) in their position of non-interference and moving towards said first segment (21a) in order to reach the constraint position, when said first rotary member (12) rotates in one direction, and towards said third segment (21c), in order to reach said constraint
10 position, when said first rotary member (12) rotates in the opposite direction.

13. Device as in any claim hereinbefore, characterized in that said clamping means comprise a plurality of sliding clamping blocks (30) arranged around the periphery of said
15 second rotary member (11, 18) and kept in position of non-interference by relative elastic means (29), said sliding clamping means (30) being able to close simultaneously on said second rotary member (11, 18) in said constraint position.

20 14. Device as in claims 8 and 13, characterized in that each of said sliding clamping blocks (30) has at least a wider part (30a) inserted inside said hollow (21) and a narrower part (30b) constrained inside a cavity (25) of said second component (15).

25 15. Device as in claims 13 and 14, characterized in that said sliding clamping blocks (30) are able to move into abutment with the relative wider part (30a) on said second rotary member (11, 18) and cooperate, by means of the relative narrower parts (30b), with said elastic means
30 (29).

16. Device as in any claim from 3 to 15 inclusive, characterized in that said components (14, 15) are associated with each other by means of pin means (28)

- 18 -

including at least an end (28a) inserted and clamped in at least a first component (14) and a thicker part, or collar, (28b) inserted in an aperture (26) of said second component (15).

5 17. Device as in claim 16, characterized in that said thicker part, or collar, (28b) is inserted in an eyelet (26) of said second component (15) inside which it is able to slide when said clamping means (30) move from said position of non-interference to said constraint position.

10 18. Device as in any claim from 3 to 17 inclusive, characterized in that between said first components (14) and said second component (15) there are anti-friction means (24).

15 19. Device as in claim 18, characterized in that said anti-friction means comprise a plurality of balls (24) sliding inside relative seatings (23, 27) made between said first (14) and said second component (15).

20 20. Device as in claim 3, characterized in that said clamping means (130) are of the oscillating type, are substantially drop-shaped and comprise at least a pointed part (130a) able to selectively cooperate with a mating toothing (36) made on said second rotary member (11, 18) in order to define said third condition of use, when said braking member (13) acts on said first rotary member (12)
25 and determines the oscillation thereof with respect to the position of non-interference of said clamping means (130).

21. Device as in claim 20, characterized in that said second component (115) comprises one or more positioning cavities (126) arranged in correspondence with said guide
30 means (121), inside which mating thrust elements (37) are able to be arranged, each of said thrust elements (37) being able to be arranged constantly in contact with the back of a respective clamping means (130) and to be thrust

- 19 -

in order to determine the oscillation thereof when said braking member (13) acts on said first rotary member (12).

22. Device as in any claim from 3 to 21 inclusive, characterized in that said first components (14, 114)
5 include a seating (20) for bearing means (19) able to cooperate with said second rotary member (11, 18).


23. Device as in any claim hereinbefore, characterized in that said first rotary member comprises a wheel (12) consisting of disks (14, 15; 114, 115) and said second
10 rotary member comprises a shaft (11) associated coaxially with a relative bushing (18) with which said clamping means (30) are able to cooperate.


24. Device as in any claim from 2 to 23 inclusive, characterized in that said braking member (13) is of the
15 mechanical type.

25. Device as in claim 24, characterized in that it comprises interference means (31) associated with relative elastic contrasting means (32) and able to move into contact with said first rotary member (12) when a thruster
20 element (33) is driven.

26. Device as in any claim from 2 to 23 inclusive, characterized in that said braking member (13) is of the fluid-dynamic type.

27. Device as in any claim from 2 to 23 inclusive,
25 characterized in that said braking member (13) is of the magnetic or electromagnetic type.

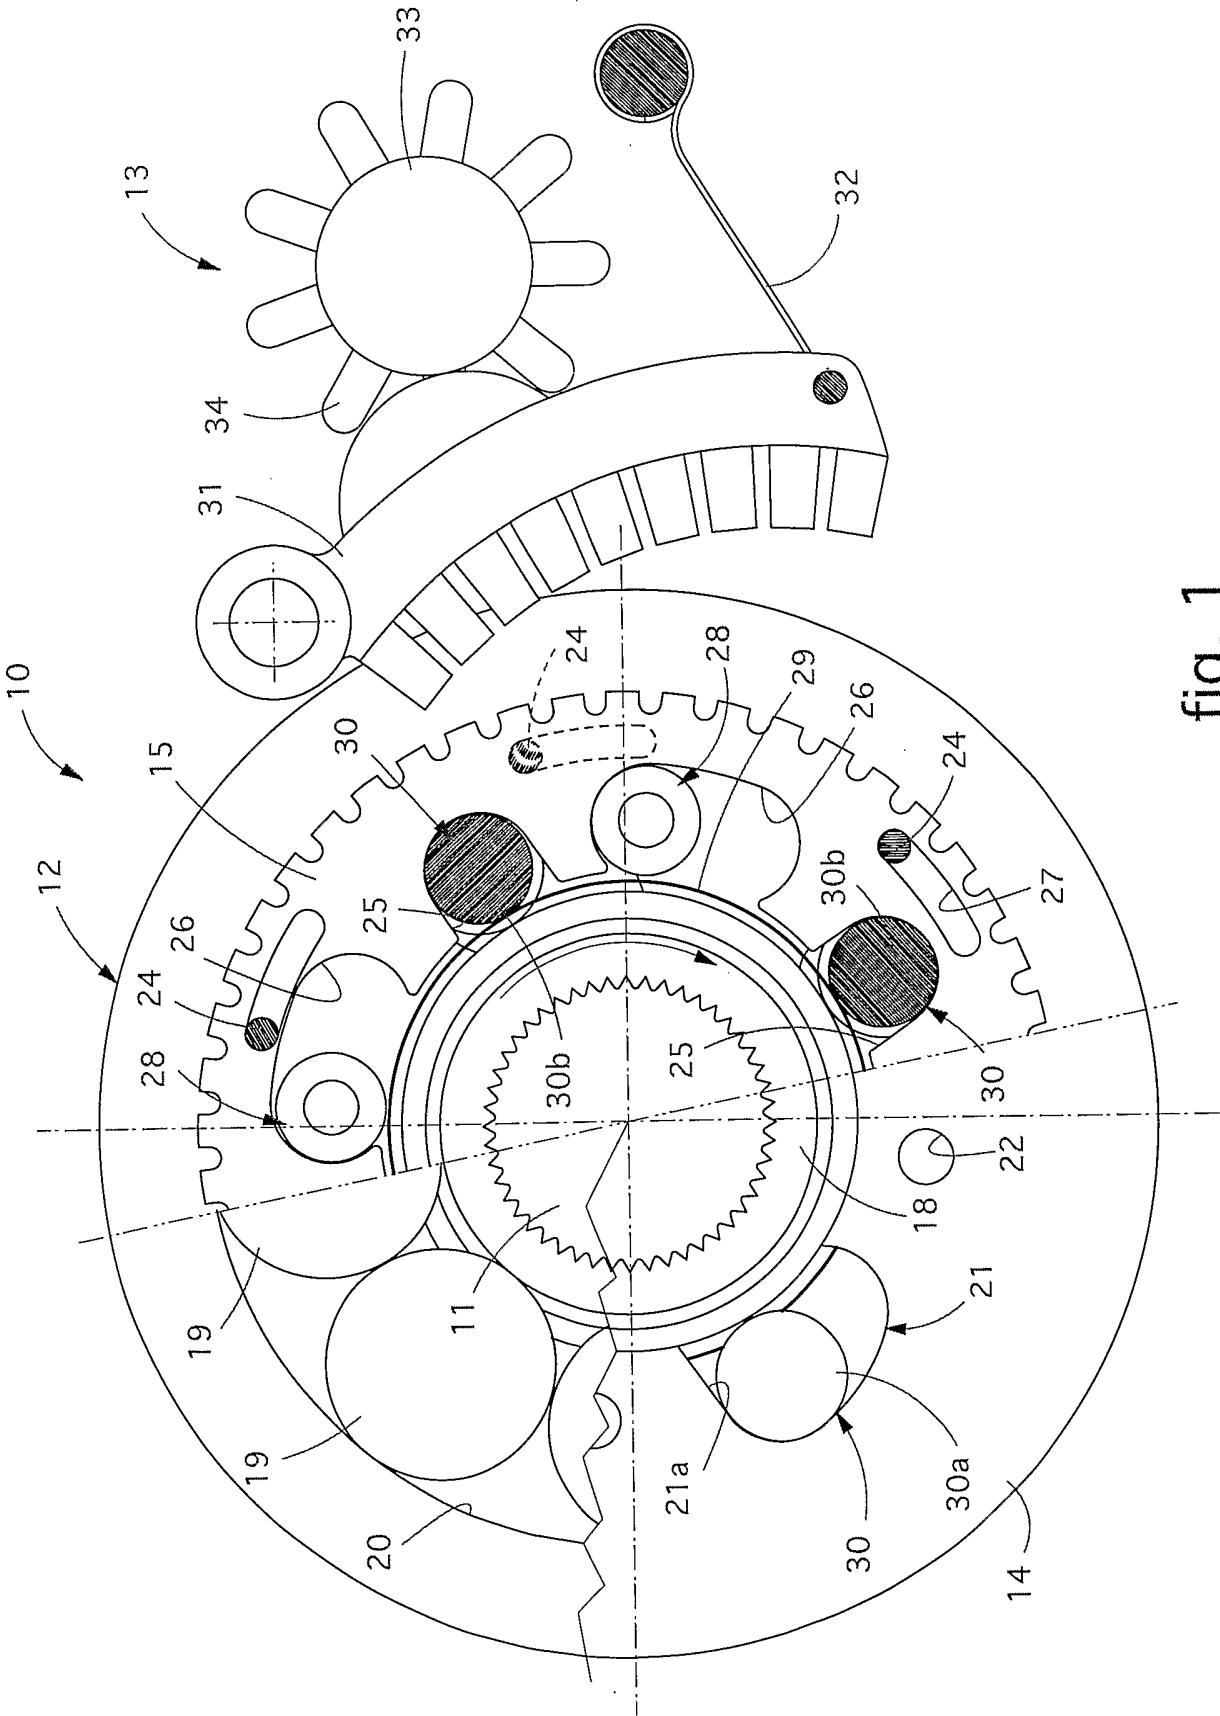

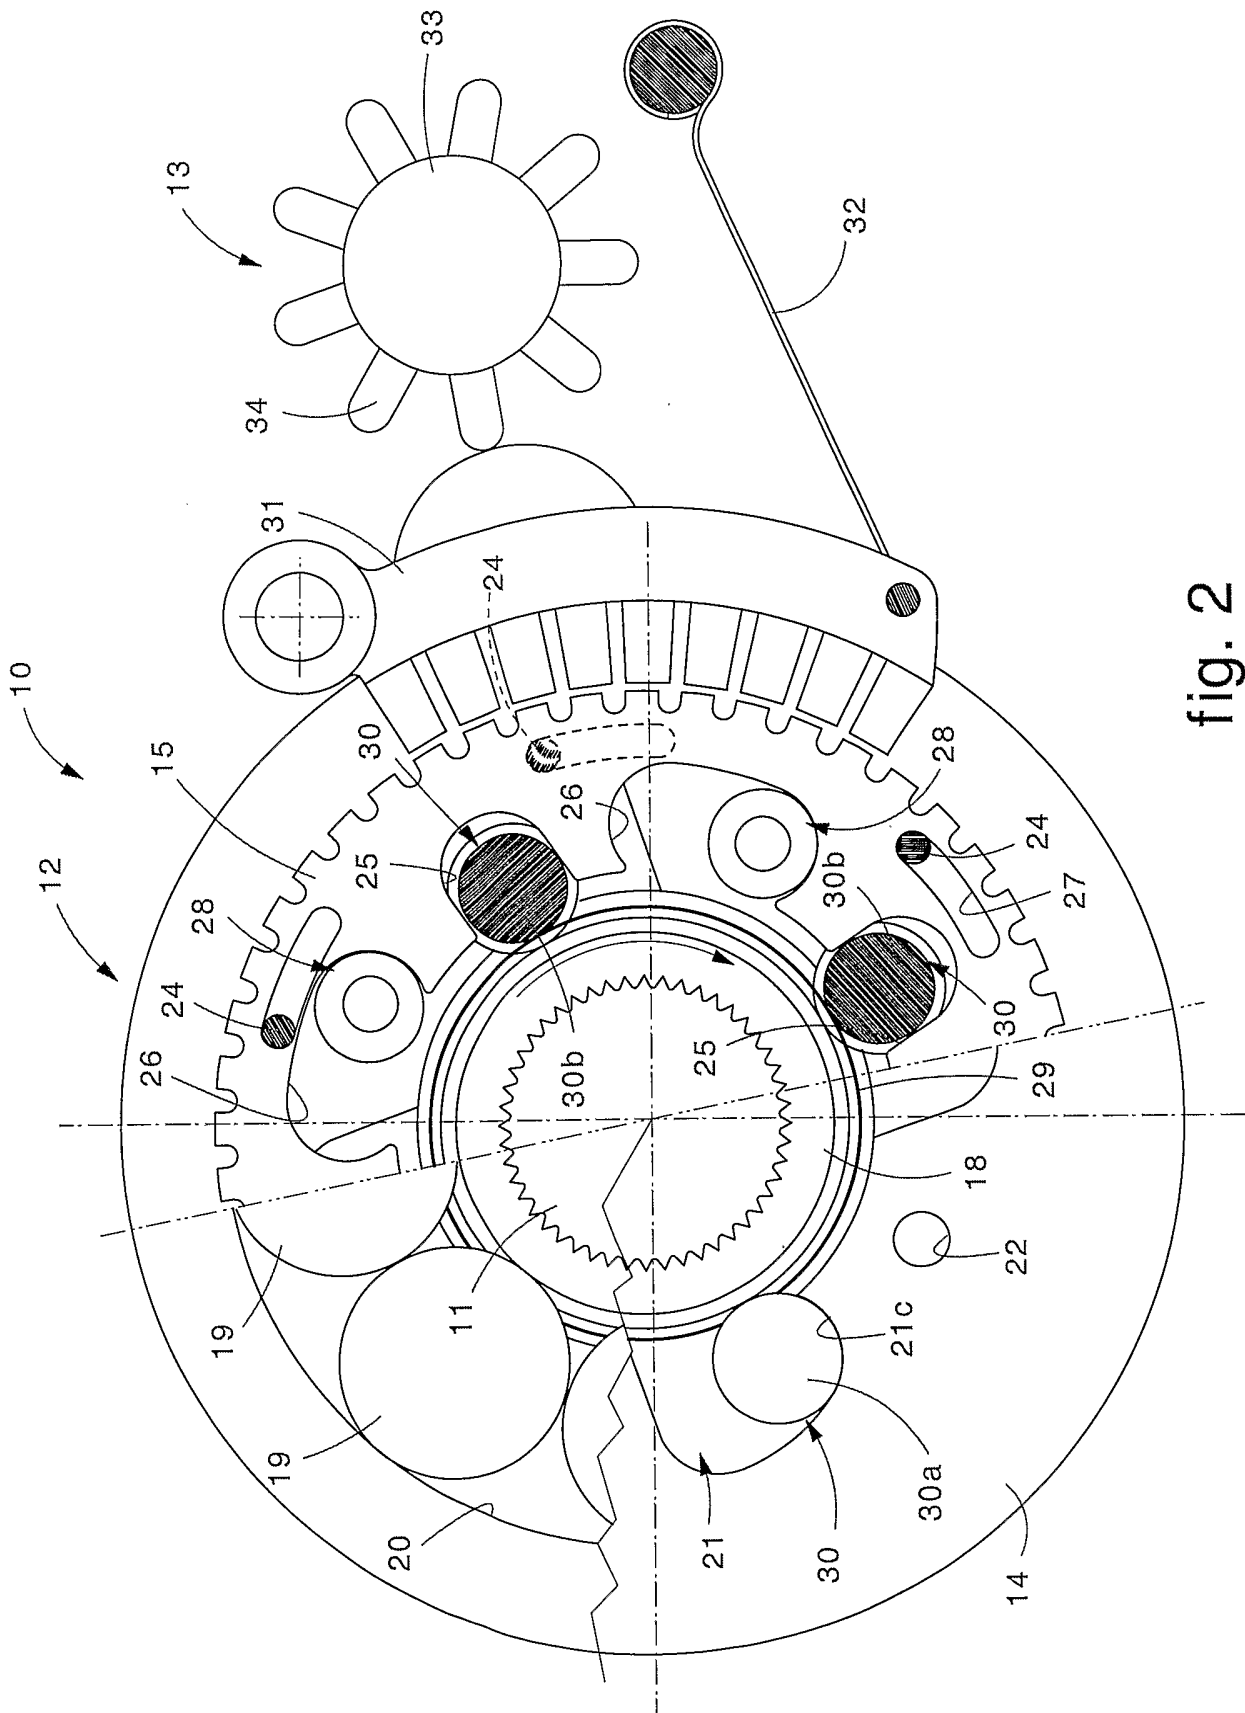

3/ 8

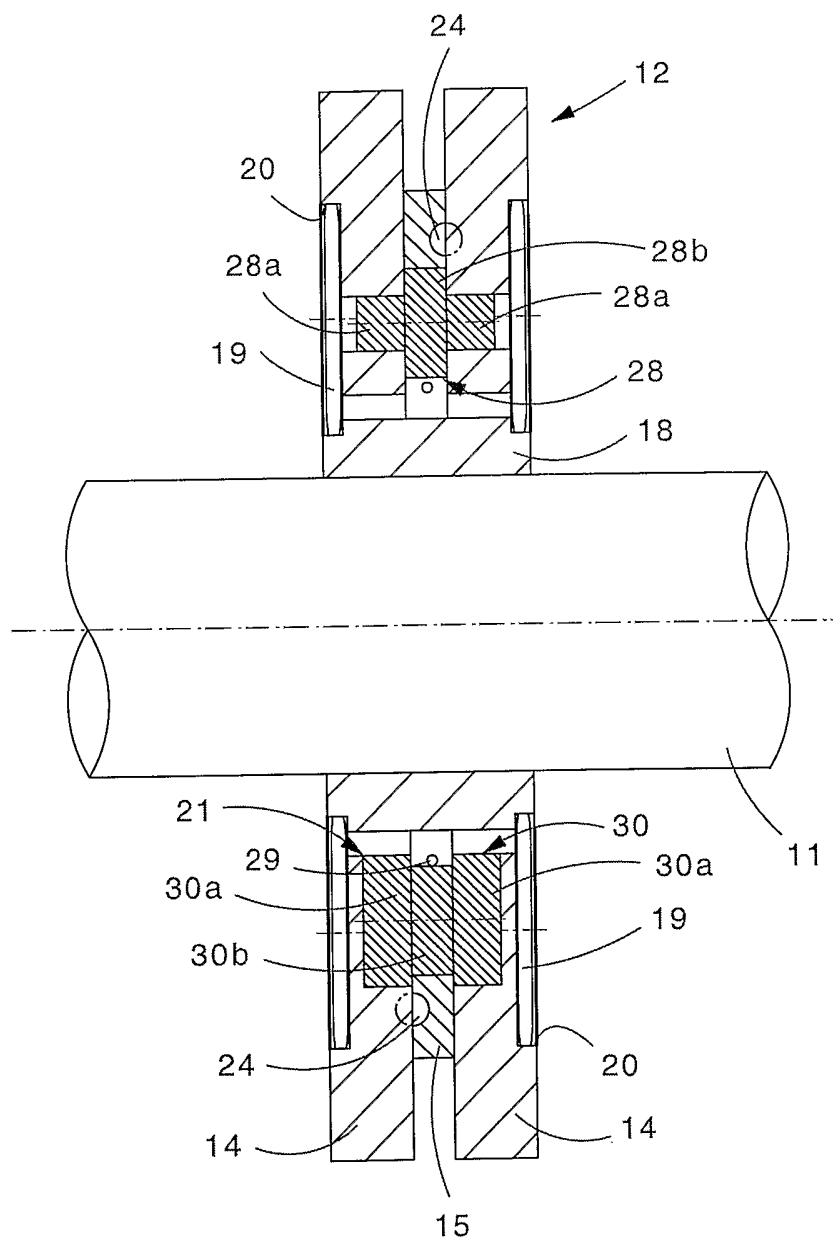


fig. 3

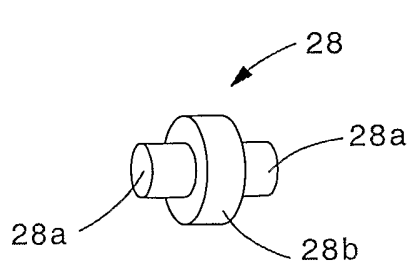


fig. 4

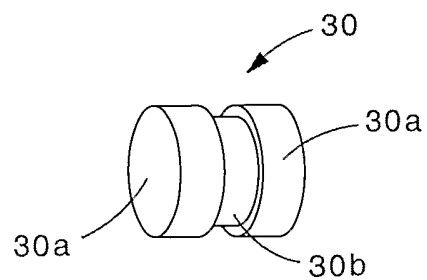


fig. 5

4/8

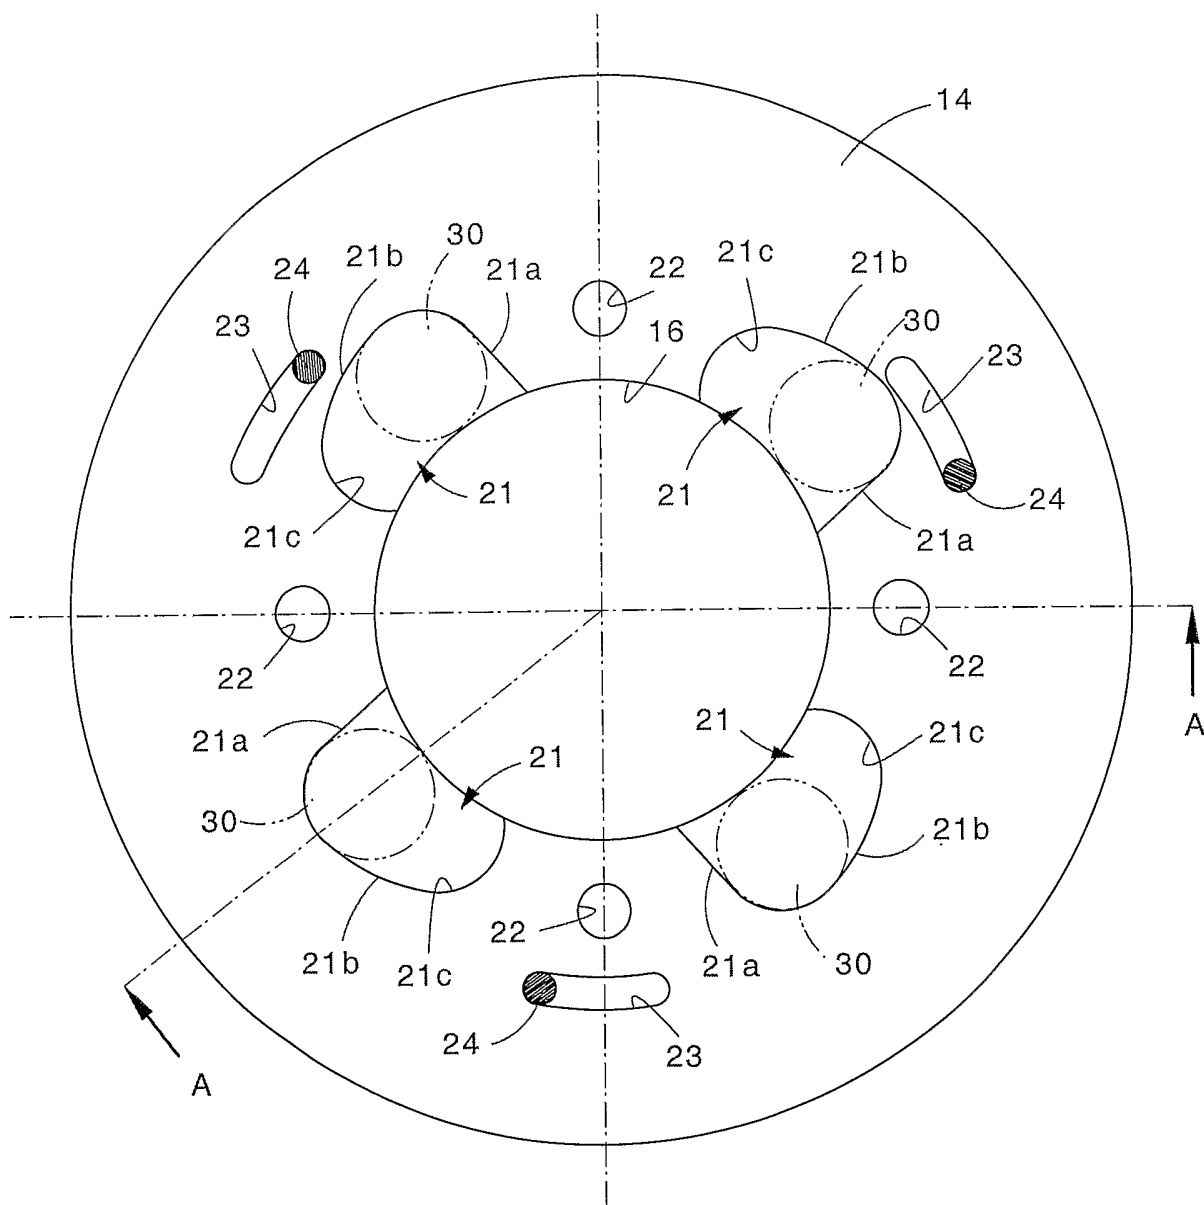


fig. 6

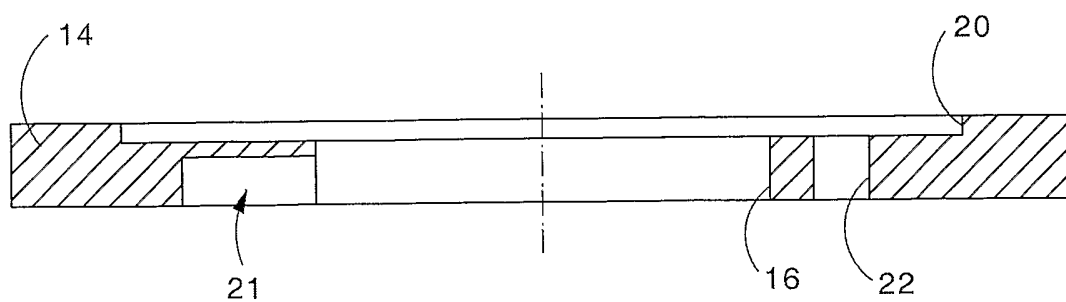


fig. 7

5/8

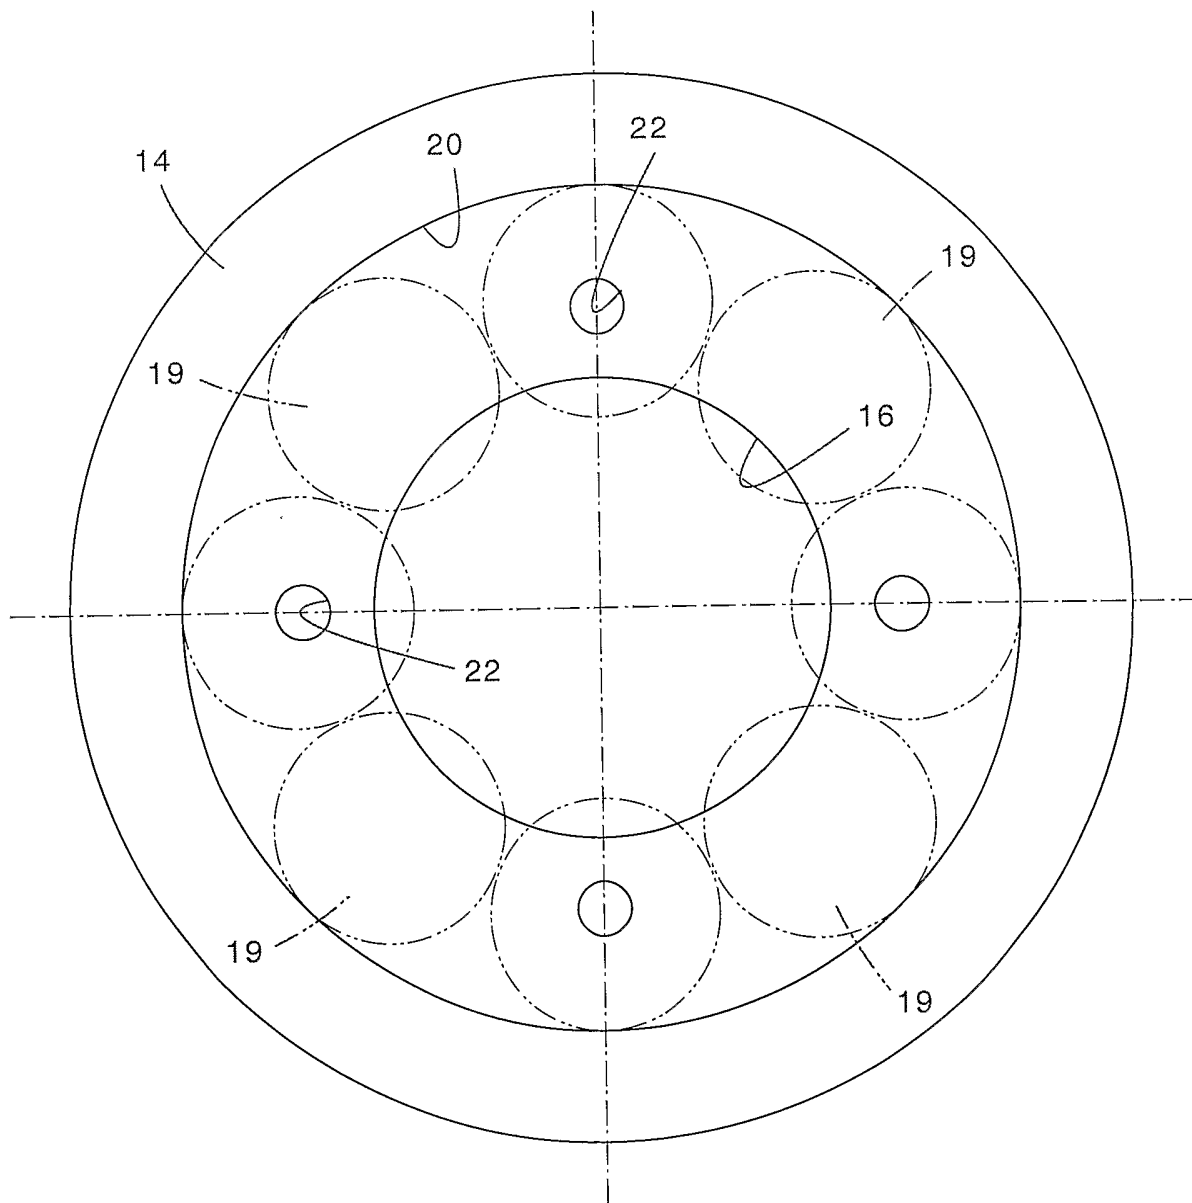


fig. 8

6/8

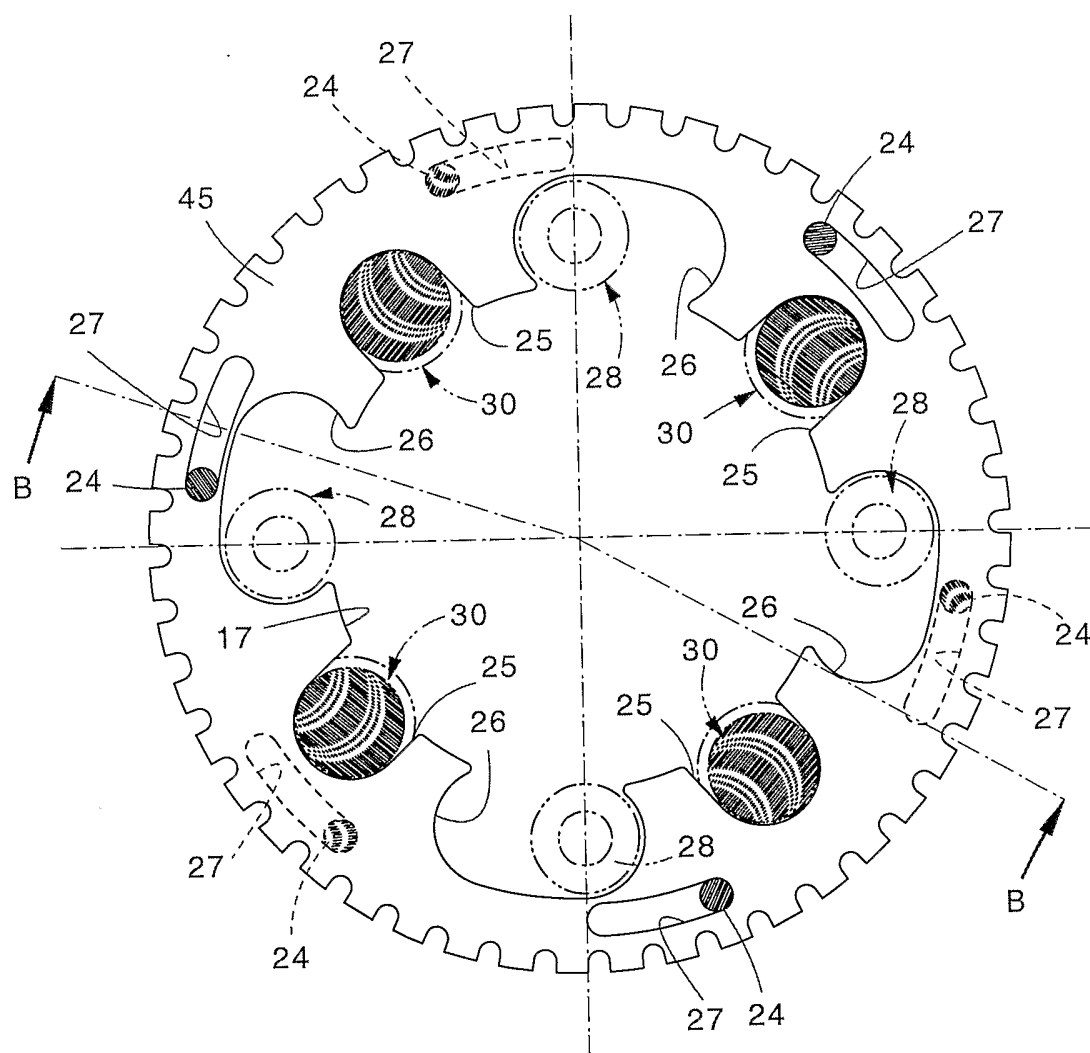


fig. 9

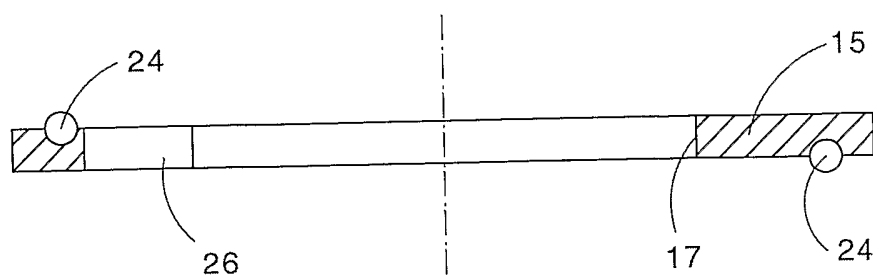


fig. 10

7/8

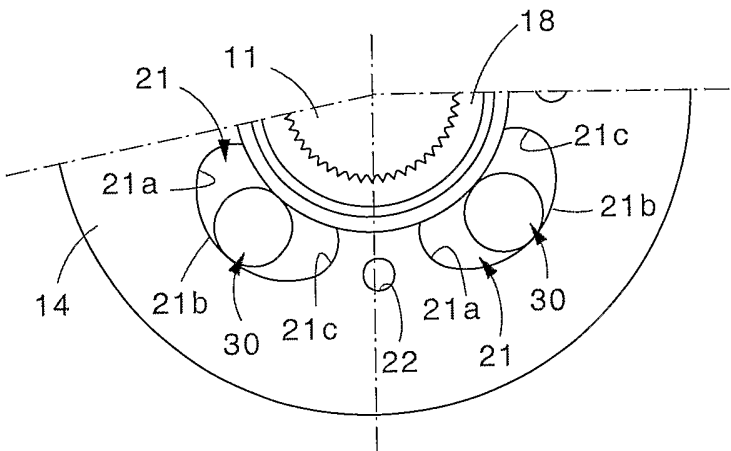


fig. 11a

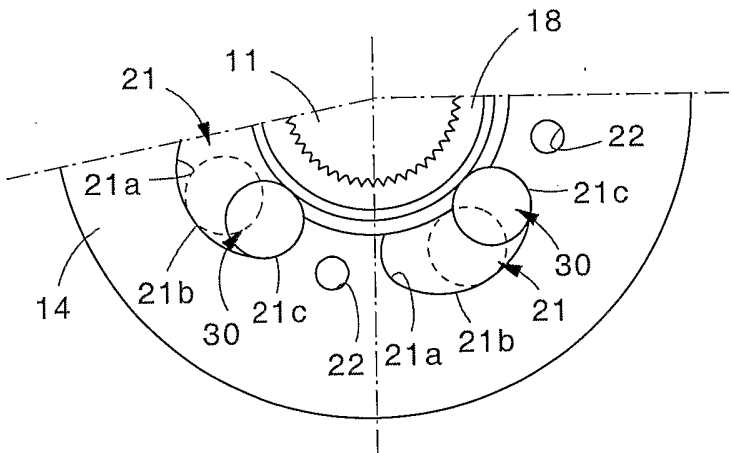


fig. 11b

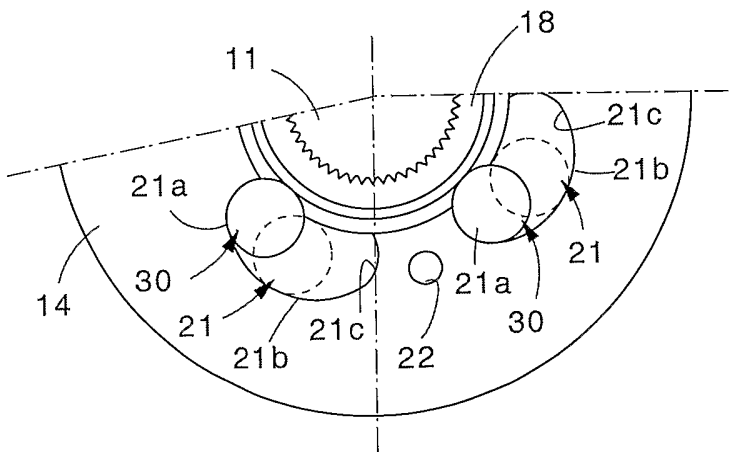


fig. 11c

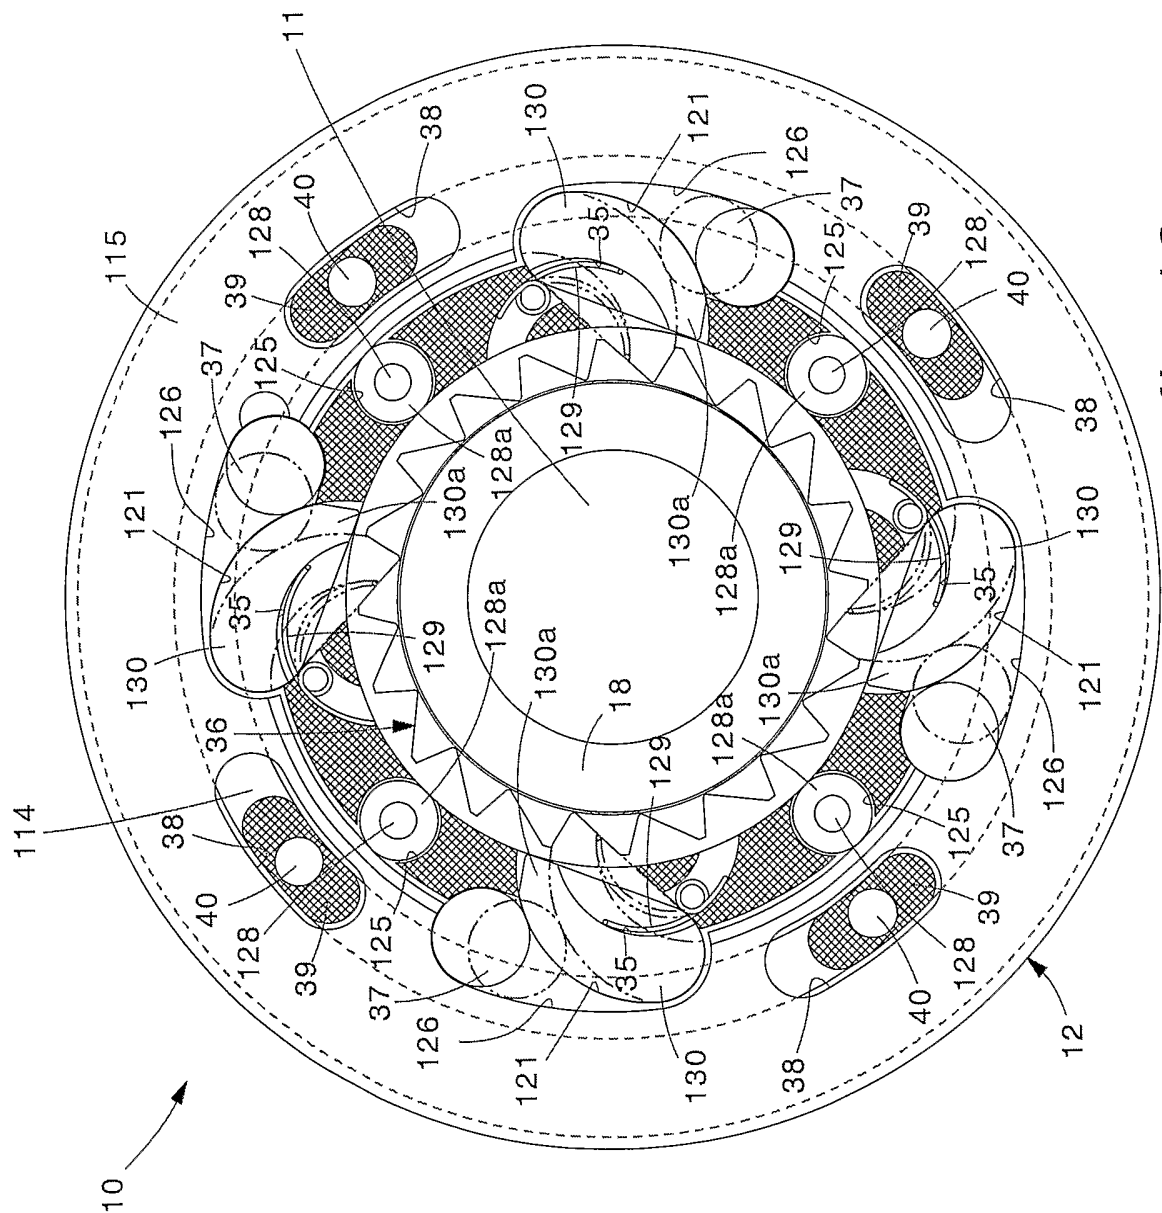


fig. 12

INTERNATIONAL SEARCH REPORT

Inventor's Application No
PCT/IB 03/02169

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F16D41/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F16D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 82 02869 A (SIREFELT LARS ;WASSBERG KURT (SE)) 2 September 1982 (1982-09-02) page 4, line 26 -page 6, line 17 figures 1-3	1-6, 20, 22-24
X	GB 2 241 755 A (KUBOTA KK) 11 September 1991 (1991-09-11) abstract page 6, line 5 - line 26 figure 1	1, 23, 26
X A	US 6 257 386 B1 (KAWASE TATSUO ET AL) 10 July 2001 (2001-07-10) column 7, line 15 - line 48 column 8, line 41 -column 10, line 26 figures 7, 8, 13, 14	1, 13 2, 27
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

1 October 2003

Date of mailing of the international search report

09/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

J. Giráldez Sánchez

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/IB 03/02169

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	AT 142 282 B (FREYLER ADALBERT) 25 June 1935 (1935-06-25)	1
A	page 1, line 24 -page 2, line 16 figures 1-3 ---	2,8-12, 24
A	US 5 170 870 A (KAEMPF KLAUS) 15 December 1992 (1992-12-15) abstract column 1, line 6 - line 23 column 3, line 53 - line 60 column 4, line 5 - line 59 figures 1,2 ---	1-5,8,9, 20,21, 23,24
A	US 2 583 544 A (BURDICK CLIFFORD I) 29 January 1952 (1952-01-29) column 4, line 62 -column 5, line 13 figures 1-6 ---	1-6,8,9, 14,24
A	EP 0 791 748 A (DENSO CORP) 27 August 1997 (1997-08-27) abstract figure 2 -----	1,8,9,13

INTERNATIONAL SEARCH REPORT

 II International Application No
 PCT/IB 03/02169

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 8202869	A	02-09-1982	SE 427020 B CA 1181022 A1 DE 3271975 D1 DK 473582 A ,B, EP 0082152 A1 NO 823539 A ,B, SE 8101243 A WO 8202869 A1	28-02-1983 15-01-1985 21-08-1986 26-10-1982 29-06-1983 25-10-1982 27-08-1982 02-09-1982
GB 2241755	A	11-09-1991	JP 3260422 A JP 2559896 B2 JP 4131528 A DE 4106912 A1 FR 2659405 A1 US 5109964 A	20-11-1991 04-12-1996 06-05-1992 12-09-1991 13-09-1991 05-05-1992
US 6257386	B1	10-07-2001	JP 2000240690 A JP 2000240691 A DE 10008278 A1	05-09-2000 05-09-2000 14-09-2000
AT 142282	B	25-06-1935	NONE	
US 5170870	A	15-12-1992	DE 4026211 C1 GB 2247057 A IT 1251805 B JP 6026534 A RU 2011907 C1	23-01-1992 19-02-1992 26-05-1995 01-02-1994 30-04-1994
US 2583544	A	29-01-1952	NONE	
EP 0791748	A	27-08-1997	JP 9229096 A JP 9256935 A DE 69700552 D1 DE 69700552 T2 EP 0791748 A1 US 5819583 A	02-09-1997 30-09-1997 04-11-1999 18-05-2000 27-08-1997 13-10-1998