




(86) **Date de dépôt PCT/PCT Filing Date:** 2014/05/13
(87) **Date publication PCT/PCT Publication Date:** 2014/11/20
(45) **Date de délivrance/Issue Date:** 2020/03/24
(85) **Entrée phase nationale/National Entry:** 2015/11/06
(86) **N° demande PCT/PCT Application No.:** US 2014/037823
(87) **N° publication PCT/PCT Publication No.:** 2014/186352
(30) **Priorités/Priorities:** 2013/05/13 (US61/822,679);
2014/01/27 (US14/118,984)

(51) **Cl.Int./Int.Cl.** **B01D 37/02** (2006.01),
B01D 43/00 (2006.01)
(72) **Inventeurs/Inventors:**
ROTHMAN, PAUL J., US;
FERNALD, MARK R., US;
DIDDEN, FRANCIS K., US;
ADAMSON, DOUGLAS H., US
(73) **Propriétaire/Owner:**
CIDRA CORPORATE SERVICES INC., US
(74) **Agent:** GOWLING WLG (CANADA) LLP

(54) **Titre : SURFACES POLYMERES AYANT UN GROUPE FONCTIONNEL SILOXANE**
(54) **Title: POLYMER SURFACES HAVING A SILOXANE FUNCTIONAL GROUP**

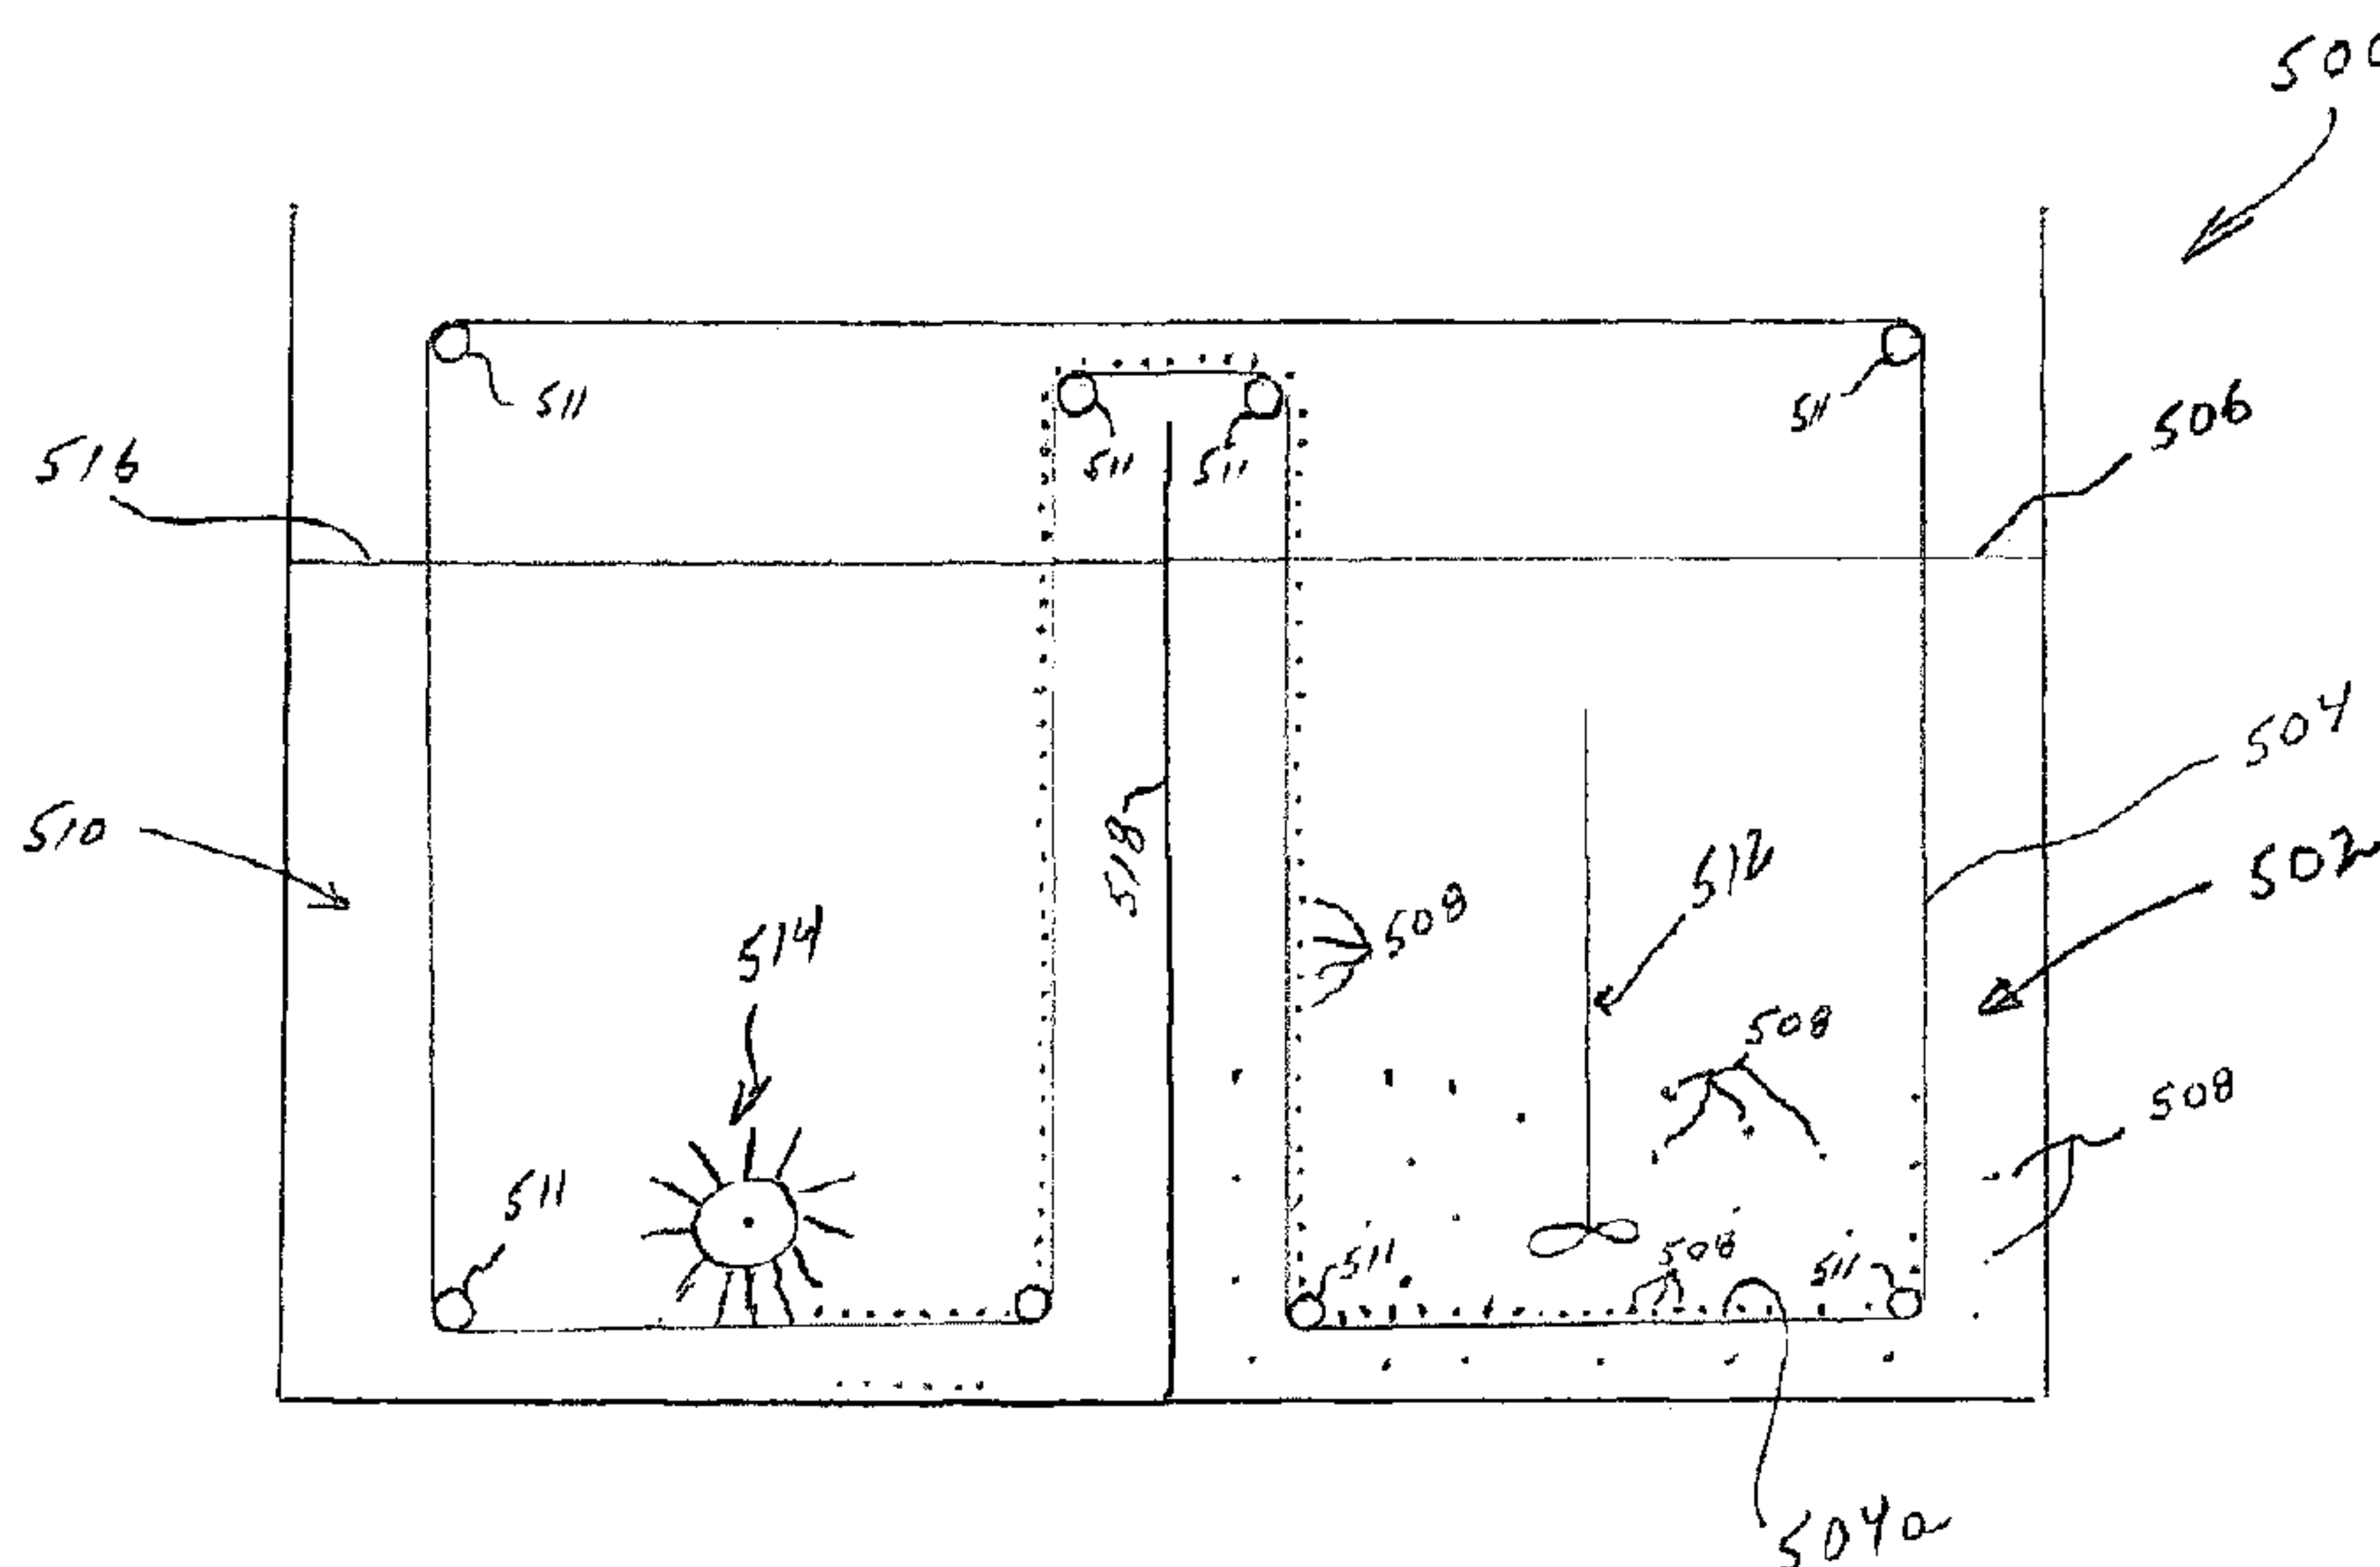

(57) **Abrégé/Abstract:**

An apparatus for collecting mineral particles in a slurry or the tailings is disclosed, including a collection area or tank having one or more collection surfaces configured to contact with a mixture having water and valuable material, the valuable material having a plurality of mineral particles of interest; and a synthetic material provided at least on the one or more collection surfaces, the synthetic material having plurality of molecules with a siloxane functional group configured to attract the mineral particles of interest to the collection surfaces. The one or more collection surfaces includes a conveyor belt that is driven through the collection area or tank, through a release area or tank, back through the collection area or tank. The mixture includes a pulp slurry having ground ore with mineral particles of interest forming part thereof, including mineral particles of interest of about 500 microns or larger.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 November 2014 (20.11.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/186352 A1

(51) International Patent Classification:

B01D 37/02 (2006.01) **B01D 43/00** (2006.01)

(21) International Application Number:

PCT/US2014/037823

(22) International Filing Date:

13 May 2014 (13.05.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/822,679 13 May 2013 (13.05.2013) US
14/118,984 27 January 2014 (27.01.2014) US

(71) Applicant: **CIDRA CORPORATE SERVICES INC.**
[US/US]; 50 Barnes Park North, Wallingford, Connecticut
06492 (US).

(72) Inventors: **ROTHMAN, Paul J.**; 162 Carriage Way,
Windsor, Connecticut 06095 (US). **FERNALD, Mark R.**;
35 Tyler Road, Enfield, Connecticut 06082 (US). **DID-
DEN, Francis K.**; 32 Mapleview Road, Wallingford, Con-
necticut 06492 (US). **ADAMSON, Douglas H.**; 7 Jackson
Lane, Mansfield Center, Connecticut 06250 (US).

(74) Agent: **BARBER, William, J.**; Ware, Fressola, Maguire &
Barber LLP, 755 Main Street, P.O. Box 224, Monroe,
Connecticut 06468 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: POLYMER SURFACES HAVING A SILOXANE FUNCTIONAL GROUP

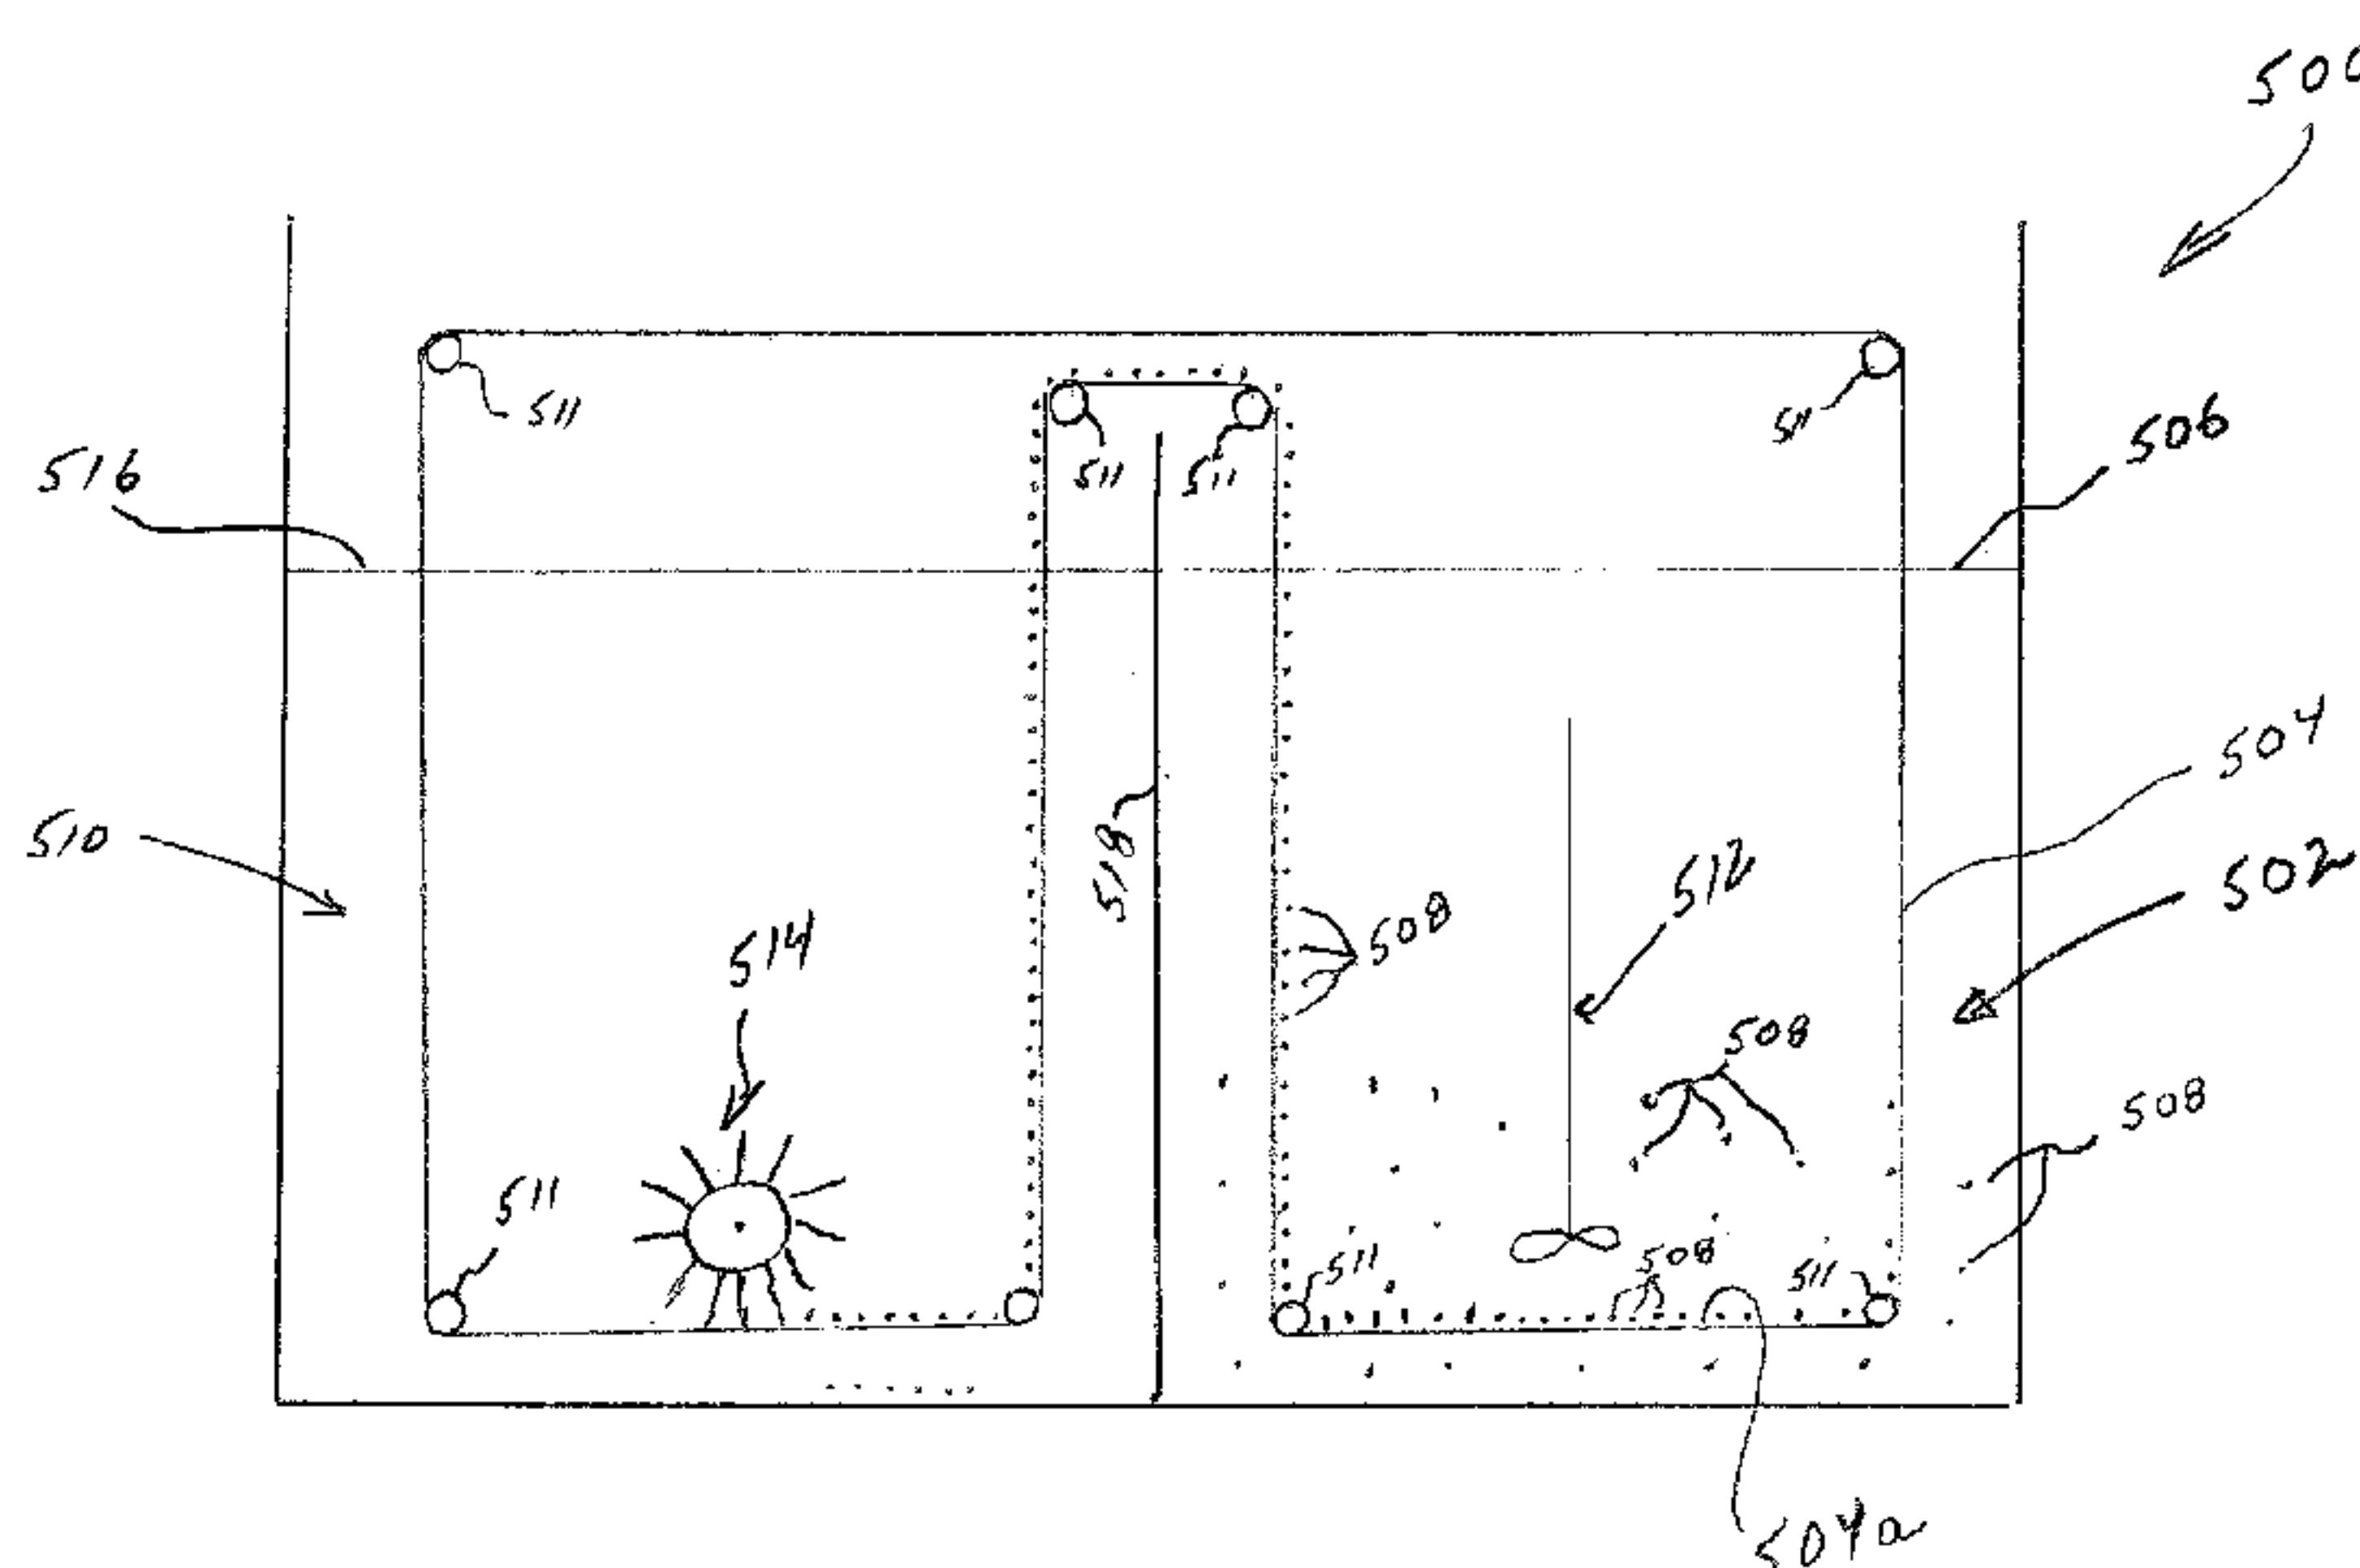


Figure 16a

(57) Abstract: An apparatus for collecting mineral particles in a slurry or the tailings is disclosed, including a collection area or tank having one or more collection surfaces configured to contact with a mixture having water and valuable material, the valuable material having a plurality of mineral particles of interest; and a synthetic material provided at least on the one or more collection surfaces, the synthetic material having plurality of molecules with a siloxane functional group configured to attract the mineral particles of interest to the collection surfaces. The one or more collection surfaces includes a conveyor belt that is driven through the collection area or tank, through a release area or tank, back through the collection area or tank. The mixture includes a pulp slurry having ground ore with mineral particles of interest forming part thereof, including mineral particles of interest of about 500 microns or larger.

POLYMER SURFACES HAVING A SILOXANE FUNCTIONAL GROUP

Background of the Invention

5 1. Technical Field

This invention relates generally to a method and apparatus for separating valuable material from unwanted material in a mixture, such as a pulp slurry.

2. Background of the Invention

10 In many industrial processes, flotation is used to separate valuable or desired material from unwanted material. By way of example, in this process the pulp slurry is a mixture of water, valuable material, unwanted material, and chemicals to render the value material to be hydrophobic. The valuable material and unwanted material from an ore are usually ground to a particle size between 45 to 250 microns or
15 roughly 45 to 100 mesh. When the separation takes place in a flotation cell where air bubbles are used to carry the material to the surface of the flotation cell, particles smaller than 400 mesh are usually required. Fine grinding consumes a great amount of electrical energy. In view of this, there is a need in the industry to provide a better way to separate valuable material from unwanted material, e.g., including in
20 such a flotation cell, so as to eliminate problems associated with using air bubbles in such a separation process.

Moreover, By way of example, known techniques for mineral separation include the following:

Other known mineral separation techniques were apparently developed, e.g.,
25 to solve the disadvantages associated with the aforementioned flotation separation

process, which are based on using magnetic particles, such as magnetite, which is one of the most magnetic of all the naturally occurring minerals on Earth.

As one example, U.S. Patent No. 4,657,666 discloses a magnetic separation technique for mineral upgrading or concentration that includes steps of:

- 5 providing a gangue associated mineral having a hydrophobic surface and in particulate form;
- providing a magnetic material in particulate form, silanizing the magnetic material in order to provide a hydrophobic surface;
- contacting the gangue associated mineral with the magnetic material in
- 10 an aqueous liquid, whereby the mineral particles become attached to the surface of the magnetic particles by virtue of interaction between the hydrophobic surfaces of the particles; and
- separating the magnetic particles with attached mineral particles from gangue by magnetic means, detaching the mineral particles from the
- 15 magnetic particles.

The magnetic material may include magnetite, haematite, ilmenite, a ferrite or magnetic metal or alloy.

- As a further example, U.S. Patent No. 4,906,382 discloses a magnetic separation technique for separating particles of a nonmagnetic material from an
- 20 aqueous mixture that includes steps of:

- rendering surfaces of the particles magnetic by contacting with a magnetizing reagent having water containing particles of a magnetic material, each of the magnetic particles having a two layer surfactant coating including an inner layer and an outer layer, the inner layer covering the magnetic
- 25 particle and being a monomolecular layer of a first water soluble, organic,

heteropolar surfactant containing at least 3 carbon atoms and having a functional group on one end which forms a bond with the magnetic particle and a hydrophobic end, and the outer layer coating the inner layer and being monomolecular layer of a second water soluble, organic, heteropolar
5 surfactant containing at least 3 carbon atoms and having a hydrophobic end which is bonded to the hydrophobic end of the first surfactant and a functional group on the other end capable of bonding with the nonmagnetic particles;
and

subjecting the aqueous mixture to a magnetic separation to cause the
10 magnetized particles to be separated therefrom.

However, there are known disadvantages of the aforementioned magnetic separation techniques, e.g., that may include the need for high magnetic fields that are required in order to separate the magnetic particles from the original mixture; the need for complicated, costly equipment required for this purpose; and the need to
15 ensure that the magnetic particle coupled to the ore remains stably attached during the flotation process and can be separated off again after the separation.

U.S. Patent No. 8,408,395 discloses another known technique for mineral separation that apparently tried to solve the aforementioned disadvantages associated with the aforementioned magnetic separation techniques disclosed in the
20 '666 patent and the '382 patent. For example, the '395 patent discloses a magnetic separation technique for separating a hydrophobic material from a mixture having a hydrophobic material and a hydrophilic material, that includes the steps of:

(A) preparing a slurry or dispersion of the mixture to be treated in a suitable dispersion medium;

(B) contacting the slurry or dispersion from step (A) with a solid,
hydrophobic surface to bind the hydrophobic material to be separated from
the slurry or the dispersion, the solid hydrophobic surface being an interior
wall of a tube, a surface of a plate, a surface of a conveyor belt or an interior
5 wall of a reactor;

(C) removing the solid, hydrophobic surface to which the one
hydrophobic material is bound in step (B) from the slurry or dispersion having
a hydrophilic material; and

(D) separating the hydrophobic material from the solid, hydrophobic
10 surface,

where the hydrophobic material present in the mixture is
hydrophobicized by a substance before carrying out step (B), and also

where the substance is made up of a radical and an anchor group
having 1 to 3 reactive groups which interact(s) with the hydrophobic material
15 to be separated off.

According to the '395 patentee, the use of a hydrophobicizing substance increases
efficiency of separation, citing an example provided in which a glass beaker is
coated with hydrophobized magnetite so that a hydrophobic surface is present. In
particular, in the example provided, the solid, hydrophobic surface is formed, e.g., as
20 a coating or layer with hydrophobized magnetite (surface-coated with 1-
dodecyltrichlorosilane, with 1 nm² of magnetite surface being laden with about 10-50
molecules of trichlorosilane; diameter of the magnetite particles=10 nm) so that an
area of the walls of about 40 cm² is hydrophobicized. Moreover, the '395 patent
discloses that hydrophobic coating or layer has no polar groups, and therefore has a
25 water repellant character. In effect, the '395 patent appears to try to solve problems

associated with the aforementioned high magnetic fields, e.g., by removing magnetite from the mixture and incorporating the magnetite into the coating or layer that forms the solid, hydrophobic surface. According to the '395 patent, its mineral separation technique avoids coupling of magnetizable particles to the hydrophobic constituents in the mixture to be separated off, as well as the use of a stream of air. In addition, it is noted the mineral separation technique of the '395 patent is based on the use of magnetite and its associate magnetic forces in order to bind the hydrophobic material to be separated from the slurry or the dispersion to the coating or layer that forms the solid, hydrophobic surface.

10

Summary of the Invention

According to some embodiments of the present invention, the present invention may provide mineral separation or filtration techniques based at least partly on using apparatus featuring a collection area comprising collection surfaces configured to contact with a mixture having water and valuable material, the valuable material having a plurality of mineral particles; and a synthetic material provided at least on the collection surfaces, the synthetic material having plurality of molecules comprising a siloxane functional group configured to attract the mineral particles to the collection surfaces.

20 According to some embodiments of the present invention, the collection surface may take the form of an impeller, a conveyor belt, a filter assembly, a flat plate, a membrane or membrane structure and a plurality of synthetic beads.

It has been observed that a conveyor belt made of polyurethane and coated with a silicone gel able to collect value material of a wide range of sizes, including

the particles far larger than about 500 microns. A surface used to collect the value material from a pulp slurry is herein referred to as a collection surface.

According to some embodiments of the present invention, the collection surface is functionalized to be hydrophobic so as to provide a bonding between the collection surface and a mineral particle that is hydrophobic. In some embodiments, the collection surface comprises a surface made of a polymer and coated with a silicone gel to provide the siloxane functional group. The term "bonding" when used in relation to two hydrophobic articles, such as the surface of the polymer bubbles or beads and the mineral particle, is intended to refer to the situation of when two hydrophobic articles come together in an aqueous solution to reduce the exposed hydrophobic surface area. This new state is at a lower energy state than when the two articles are separated within the aqueous solution. The action of the hydrophobic effect originates from the disruption of highly dynamic hydrogen bonds between molecules of liquid water for example by the non-polar solute. A hydrocarbon chain or a similar non-polar region or a big molecule is incapable of forming hydrogen bonds with water, and introduction of such a non-hydrogen bonding surface into water causes disruption of the hydrogen bonding network between water molecules. The hydrogen bonds are reoriented tangential to such a surface to minimize disruption of the hydrogen bonded 3D network of water molecules, thus leading to a structured water "cage" around the non-polar surface. Additionally, as used herein, the hydrophobic effect can be said to cause two hydrophobic articles to "attract" and / or "attach" to one another. The term "polymer" in this specification means a large molecule made of many units of the same or similar structure linked together. Therefore, the terms "polymer bubbles or beads" and "synthetic bubbles or beads" are used interchangeably. The polymer can be

naturally hydrophobic or functionalized to be hydrophobic. Some polymers having a long hydrocarbon chain or silicon-oxygen backbone, for example, tend to be hydrophobic. Hydrophobic polymers include, but are not limited to, poly(dimethylsiloxane). The collection surfaces can be rendered hydrophobic by having a coating of a product that contains chemicals with a siloxane functional group. For example, the collection surface is coated with hydrophobic silicone polymer including polysiloxane so that the collection surface becomes hydrophobic. In one embodiment of the present invention, the collection surface is made of polyurethane rubber coated with a silicone gel, such as Dow-Corning® 3-4222 Dielectric Firm Gel. The gel comes with two parts: Part A includes dimethyl siloxane, dimethylvinyl-terminated – 68083-19-2; polydimethylsiloxane (PDMS) – 63148-62-9; reaction of ethylene glycol and silica – 170424-65-4; hydrotreated light naphthenic petroleum distillate – 64742-53-6. Part B includes dimethyl siloxane, dimethylvinyl-terminated – 68083-19-2; polydimethylsiloxane – 63148-62-9; dimethyl siloxane, hydrogen-terminated – none; trimethylated silica – 68909-20-6; dimethyl, methylhydrogen siloxane – 68037-59-2. The mineral particle or the valuable material associated with one or more amphiphilic collector molecules is referred to as a wetted mineral particle. When the pulp slurry contains a plurality of collectors or collector molecules, some of the mineral particles will become wetted mineral particles if the collectors are attached to mineral particles, thus making the surface of the mineral particles hydrophobic. Xanthates can be used in the pulp slurry as the collectors.

In effect, the key mechanism for the materials is the combination of hydrophobicity, tackiness and compliance. By way of example, according to some embodiments of the present invention, the mechanism works as follows:

1. The hydrophobicity of the surface provides the selectivity. When in the water based solution, the hydrophobic surface attracts the hydrophobic minerals of interest, and rejects the non-hydrophobic gangue materials.

2. As the hydrophobic material is removed from the solution, the tackiness of the material maintains the contact and “grip” on the collected hydrophobic minerals (which would otherwise fall off because there is no hydrophobic action to hold them in place after withdrawal from the solution).

3. Compliance is also a key component. Material compliance is essential to allow surface area contact in hydrophobic conditions, and further to allows surface area contact under tacky conditions after withdrawal from the solution. This may also be due at least in part to Van der Waals forces.

4. Another important feature is durability, with the understanding that there may be a tradeoff between durability and compliance and/or tackiness. One typically may want durability if one intends to reuse the materials (to make the process cost effective), but if one make the material too durable, one may lose either the compliance and/or tackiness feature of the material, thus the trade-off.

The Apparatus

According to some embodiments, the present invention may take the form of apparatus such as a collection surface configured to contact with solid hydrophobic particles having mineral particles with hydrophobic elements attached thereon contained in an aqueous mixture. The collection surface comprises a plurality of molecules configured to render the surface hydrophobic, and the molecules comprising a siloxane functional group to attract the solid hydrophobic particles.

According to some embodiments of the present invention, the molecules may include a siloxane derivative, or polysiloxanes, or hydroxyl-terminated polydimethylsiloxanes (PDMS).

According to some embodiments of the present invention, the collection
5 surface may include an impeller, a flat plate, a filter assembly, a conveyor belt, a membrane and/or a synthetic bead having a polymer surface coated with a siloxane derivative. The polymer surface may comprise urethane, polyurethane molecules, such as urethane rubber or polyurethane rubber.

According to some embodiments of the present invention, the polymer is
10 selected from a group consisting of polystyrene, poly(d,l-lactide), poly(dimethylsiloxane), polypropylene, polyacrylic, polyethylene, hydrophobically-modified ethyl hydroxyethyl cellulose polysiloxanes, alkylsilane and fluoroalkylsilane. The list, however, is not necessarily exhaustive.

According to some embodiments of the present invention, the synthetic bead
15 may be configured to be magnetic, or para-, ferri- or ferro-magnetic.

According to some embodiments of the present invention, the synthetic bead may be configured to have a different density than the aqueous mixture so as to float or sink therein.

According to some embodiments of the present invention, the synthetic bead
20 may be configured to have substantially the same density as the aqueous mixture so as to neither float nor sink therein.

According to some embodiments of the present invention, the surface may include physical structures configured to trap the mineral particles, e.g., like grooves or dents, or configured as hair-like structures.

According to some embodiments of the present invention, an impeller is configured to rotate inside two chambers, tanks, cells or columns, one chamber, tank, cell or column having an environment conducive to attachment of a valuable material or mineral or particle of interest and the other chamber, tank, cell or column has an environment conducive for release of the valuable material or mineral or particle of interest. The impeller may comprise a collection surface having a siloxane functional group, configured to rotate inside the two chambers, tanks, cells or columns for attachment of and for releasing of the valuable material.

According to some embodiments of the present invention, a functionalized polymer conveyor belt may be configured to run between the two chambers, tanks, cells or columns, whereby it collects and releases the valuable material or mineral or particle of interest.

According to some embodiments of the present invention, a functionalized polymer collection filter may be placed into each chamber, tank, cell or column to collect and release the valuable material or mineral or particle of interest. This is a batch type process.

The Method

According to some embodiments, the present invention, the method may feature steps for receiving an aqueous mixture in a processor, the mixture comprising solid hydrophobic particles having mineral particles with hydrophobic elements attached thereon; causing a plurality of collection surfaces to contact with the aqueous mixture in the processor, where said collection surface comprises:

a solid-phase body comprising a surface; and

a coating of hydrophobic material, provided on the surface, the hydrophobic coating comprising a plurality of molecules configured to render the surface hydrophobic, the molecules comprising a siloxane functional group configured to attract to the surface the solid hydrophobic particles in the aqueous mixture.

According to some embodiments of the present invention, the solid-phase body may take the form of an impeller, a conveyor belt, a filter assembly with a plurality of collection surfaces, a synthetic bead, wherein the collection surface may comprise a polymer layer coated with a silicone gel to provide the siloxane functional group.

According to some embodiment of the present invention, the collection surface comprise polymer surface and the synthetic material comprise a siloxane derivative.

The synthetic material may comprise polysiloxanes.

The synthetic material may comprise one or more of dimethyl siloxane, dimethylvinyl-terminated; polydimethylsiloxane (PDMS); and dimethyl, methylhydrogen siloxane.

The synthetic material may comprise hydroxyl-terminated polydimethylsiloxanes.

According to one embodiment of the present invention, the polymer surface comprises polyurethane.

According to some embodiments of the present invention, the collection surface may comprise a polymer selected from a group consisting of polyamides, polyesters, polyurethanes, phenol-formaldehyde, urea-formaldehyde, melamine-formaldehyde, polyacetal, polyethylene, polyisobutylene, polyacrylonitrile, poly(vinyl

chloride), polystyrene, poly(methyl methacrylates), poly(vinyl acetate), poly(vinylidene chloride), polyisoprene, polybutadiene, polyacrylates, poly(carbonate), phenolic resin, and polydimethylsiloxane.

According to some embodiments of the present invention, the collection
5 surface may comprise a polymer from a group consisting of polystyrene, poly(D,L-lactide), poly(dimethylsiloxane), polypropylene, polyacrylic, polyethylene, hydrophobically-modified ethyl hydroxyethyl cellulose polysiloxanes, alkylsilane and fluoroalkylsilane.

According to some embodiments of the present invention, the collection area
10 comprises one or more of an impeller, a filter assembly, a conveyor belt and a flat plate.

According to some embodiments of the present invention, the collection area comprises a plurality of synthetic beads.

According to some embodiments of the present invention, the method may
15 include one or more of the features set forth herein.

According to some embodiments of the present invention, the method may feature steps for arranging a plurality of collection surfaces to contact with an aqueous mixture comprising solid hydrophobic particles having mineral particles with hydrophobic elements attached thereon, said collection surface comprising: a solid-
20 phase body comprising a synthetic surface, and a coating of a silicone gel comprising a plurality of molecules configured to render the surface hydrophobic, the molecules also being configured to attract the solid hydrophobic particles to the collection surface; allowing the solid hydrophobic particles to attach to the collection surfaces for providing a plurality of enriched collection surfaces, the enriched
25 collection surfaces comprising at least some of the solid hydrophobic particles

attached thereto; and releasing said some of the solid hydrophobic particles from the surface of the enriched collection surfaces .

According to some embodiments of the present invention, the method may include a step of releasing that includes washing the enriched collection surfaces
5 with water so as to remove at least some of the solid hydrophobic particles from the surface. As the enriched collection surfaces are in the water, ultrasonic waves can also be applied to the enriched collection surfaces for removing the solid hydrophobic particles from surface.

According to some embodiments of the present invention, the method may
10 include removing the enriched collection surfaces from the aqueous mixture by one or more of the following mechanisms: mechanical brushing, magnetic agitation, change of pH, increased temperature, and chemical solvent.

According to some embodiments of the present invention, the method may include one or more of the features set forth herein.

15

A Hydrophobic Synthetic Structure

According to some embodiments of the present invention, the apparatus may take the form of a hydrophobic synthetic structure having a solid-phase body comprising a surface; and a synthetic material provided on the surface, the synthetic
20 material comprises a plurality of molecules configured to render the surface hydrophobic, and the combination of the molecules and the surface being configured to attract and retain solid hydrophobic particles having mineral particles with hydrophobic elements attached thereon contained in an aqueous mixture, the molecules comprising a siloxane functional group.

According to some embodiments of the present invention, the synthetic material may be selected from the following group: a siloxane derivative, polysiloxanes or hydroxyl-terminated polydimethylsiloxanes.

According to some embodiments of the present invention, the hydrophobic
5 synthetic structure may take the form of some combination of a mesh-like structure, a membrane-like structure, a grooved structure, a grate-like structure, a tubular structure, a hairy structure, a coarse structure, a smooth structure, a rectangular structure, a honeycomb-like structure, a solid bead, or a two-part bead structure with an inner core and an outer covering, and the surface having a corresponding
10 structural characteristic based at least partly on the configuration of the corresponding structure.

The Separation Process

The present invention may also take the form of apparatus for use in, or
15 forming part of, a separation process to be implemented in separation processor technology, the apparatus featuring collection surfaces configured with a polymer or polymer-based material functionalized with a siloxane functional group so as to attach to a wetted valuable material in a mixture to form an enriched collection surfaces having the valuable material attached thereto, and also configured to be
20 separated from the mixture based at least partly on a difference in a physical property between the enriched collection surfaces having the valuable material attached thereto and the mixture.

The separation process may be implemented in separation processor technology which combines the collection surfaces and the mixture, and which
25 provides the enriched collection surfaces having the valuable material attached

thereto that are separated from the mixture based at least partly on the difference in the physical property between the enriched collection surfaces having the valuable material attached thereto and the mixture.

According to some embodiments of the present invention, the collection
5 surface carrying the mineral particles may be caused to contact with a liquid, and the step of interrupting may include applying a sonic agitation to the liquid for causing the mineral particles to separate from the collection surface, or the step of interrupting may include applying microwaves to the liquid for causing the mineral particles to separate from the collection surface. The step for interrupting may
10 include providing an ultrasonic source to apply the sonic agitation to the liquid, and/or arranging the ultrasonic source to produce ultrasound signals for sonic agitation, for example ultrasound signals in the range of 20KHz to 300KHz for the sonic agitation. The step of interrupting may include providing an ultrasonic signal selected at the resonant frequency of the beads for causing the mineral particles to
15 separate from the collection surface. The step of interrupting may include mechanically rubbing against the collection surface using one or more brushes to separate mineral particles from the collection surface. The brushing can be carried out in a solution containing a chemical solvent, such as alcohol, for example.

According to some embodiments of the present invention, the collection
20 surface carrying the mineral particles may be received along with a mixture having a first pH value, and the step for interrupting may include causing the collection surface carrying the mineral particles to contact with a medium having a second pH value lower than the first pH value, including where the second pH value ranges from 0 to 7.

According to some embodiments of the present invention, the step of interrupting may include mechanically causing the collection surfaces, such as synthetic beads, to move against each other, including arranging a rotational means or device to stir the synthetic beads.

5 According to some embodiments of the present invention, the collection surface may be made of a polymer having a glass transition temperature, and the second temperature may be substantially equal to or higher than the glass transition temperature.

 According to some embodiments of the present invention, part of the
10 collection surfaces, such as synthetic beads, carrying the mineral particles may be made of a magnetic material, and the step of interrupting may include arranging a magnetic stirrer to stir the synthetic beads.

 According to some embodiments of the present invention, the collection surface carrying the mineral particles may be received along with a mixture, wherein
15 said interrupting comprises selecting two or more of the following interrupting techniques: 1) lowering pH value of the mixture, 2) applying an ultrasound to the mixture; 3) increasing temperature of the mixture, 4) mechanically brushing and 5) introduction of a chemical solvent. The selected interrupting techniques may be used on the mixture concurrently or sequentially.

20

Brief Description of the Drawing

Referring now to the drawing, which are not necessarily drawn to scale, the foregoing and other features and advantages of the present invention will be more fully understood from the following detailed description of illustrative embodiments,

taken in conjunction with the accompanying drawing in which like elements are numbered alike:

Figure 1 includes Figure 1a is a side partial cutaway view in diagram form of a separation processor configured with two chambers, tanks or columns having a functionalized polymer coated impeller arranged therein according to some
5 embodiments of the present invention, and includes Figure 1b is a top partial cross-sectional view in diagram form of a functionalized polymer coated impeller moving in an attachment rich environment contained in an attachment chamber, tank or column and also moving in a release rich environment contained in a release chamber, tank
10 or column according to some embodiments of the present invention.

Figure 2 is diagram of a separation processor configured with two chambers, tanks or columns having a functionalized polymer coated conveyor belt arranged therein according to some embodiments of the present invention.

Figure 3 is diagram of a separation processor configured with a functionalized
15 polymer coated filter assembly for moving between two chambers, tanks or columns in a semi-continuous batch process according to some embodiments of the present invention.

Figure 4 is an illustration of an impeller according to some embodiments of the present invention.

20 Figure 5 is an illustration of a section of a conveyor belt according to some embodiments of the present invention.

Figure 6 is an illustration of a filter according to some embodiments of the present invention.

Figures 7a-7f illustrates various surface features of the impeller, conveyor belt
25 and filter according to some embodiments of the present invention.

Figures 8a illustrates a plurality of functional groups attached to a fiber for attracting mineral particles according to some embodiments of the present invention, according to some embodiments of the present invention.

Figures 8b illustrates a plurality of hydrophobic molecules attached to a fiber
5 for attracting mineral particles, according to some embodiments of the present invention.

Figures 8c illustrates a plurality of hydrophobic molecules attached to a fiber for attracting non-mineral particles according to some embodiments of the present invention.

10 Figure 9a illustrates a plurality of functional groups attached to surfaces for attracting mineral particles, according to some embodiments of the present invention.

Figure 9b illustrates a plurality of hydrophobic molecules attached to surfaces for attracting mineral particles, according to some embodiments of the present
15 invention.

Figure 9c illustrates a plurality of hydrophobic molecules attached to surfaces for attracting non-mineral particles, according to some embodiments of the present invention.

Figure 10a illustrates a plurality of filters placed in a horizontal pipeline to
20 collect mineral particles, according to some embodiments of the present invention.

Figure 10b illustrates a release apparatus configured to release mineral particles from a filter, according to some embodiments of the present invention.

Figure 11 is a diagram showing a filter placed in a tailings pond to collect valuable material according to some embodiments of the present invention.

Figure 12a illustrates an impeller using a plurality of synthetic beads or bubbles for collecting valuable material, according to some embodiments of the present invention.

Figure 12b illustrates a filter using a plurality of synthetic beads or bubbles for
5 collecting valuable material, according to some embodiments of the present invention.

Figure 12c illustrates a sack of synthetic beads which can be used as a filter to collect valuable material in a tailings pond, for example, according to some embodiments of the present invention.

10 Figure 13a illustrates a synthetic bead functionalized to attract hydrophobic particles, according to some embodiments of the present invention.

Figure 13b is an enlarged surface portion of the synthetic bead functionalized to attract wetted mineral particles, according to some embodiments of the present invention.

15 Figure 13c is an enlarged surface portion of the synthetic bead functionalized to attract non-mineral hydrophobic particles, according to some embodiments of the present invention.

Figure 14a illustrates a synthetic bead having a functional group to attract mineral particles according to some embodiments of the present invention.

20 Figure 14b is an enlarged surface portion of the synthetic bead functionalized to attract mineral particles, according to some embodiments of the present invention.

Figures 15a and 15b illustrate some embodiments of the present invention wherein the synthetic bead or bubble have one portion functionalized to have collector molecules and another portion functionalized to be hydrophobic, according
25 to some embodiments of the present invention.

Figure 16a shows a diagram of apparatus having a conveyor belt made of polyurethane and coated with a silicone gel for collecting value material of a wide range of sizes, including the particles far larger than about 500 microns, according to some embodiments of the present invention.

5 Figure 16b shows an exploded or enlarged diagram of a part of the conveyor belt shown in Figure 16a, according to some embodiments of the present invention.

Detailed Description of the Invention

Figures 16a and 16b shows a new embodiment of the present invention, while
10 the remaining Figures 1 to 15b show the subject matter of the aforementioned PCT application no. PCT/US12/39631.

Figures 16a, 16b

Figure 16a shows the present invention in the form of an apparatus generally
15 indicated as 500 including a collection area or tank 502 having one or more collection surfaces 504 configured to contact with a mixture 506 having water and valuable material, the valuable material having a plurality of mineral particles 508 of interest; and a synthetic material 504a provided at least on the collection surfaces as shown in Figure 16b, the synthetic material 504a having plurality of molecules with a
20 siloxane functional group configured to attract the mineral particles 508 of interest to the collection surfaces 504.

In Figure 16, the one or more collection surfaces 504 may form part of a conveyor belt also indicated as 504, as shown, that is driven through the collection area or tank 502, through a release area or tank 510, back through the collection
25 area or tank 502, etc. As shown, the conveyor belt 504 is arranged on various

pulleys 511 that may be driven by one or more motors (not shown) and configured with corresponding linkage (also not shown). Conveyor belts and conveyor belt systems are known in the art, and the scope of the invention is not intended to be limited to any particular type or kind thereof.

5 According to some embodiments of the present invention, the mixture 506 may include, or take the form of, a pulp slurry having ground ore with mineral particles of interest forming part thereof, including mineral particles of interest of about 500 microns or larger. According to some embodiments of the present invention, the mixture 506 may include chemistry configured to enhance the
10 attraction and/or attachment between the synthetic material having the siloxane functional group and the mineral particles 508 of interest in the mixture 506. By way of example, the mixture 506 may include a hydrophobizing agent and/or polymeric collector, e.g., including polyethylenimine (PEI), although the scope of the invention is intended to include other types or kinds of hydrophobizing agents and/or polymeric
15 collectors within the spirit of the present invention. By way of further example, embodiments are envisioned in which the mixture 506 may include Xanthate or Xanthate salt, which is otherwise known in the art to be used as a flotation and/or hydrophobic agent in mineral processing. The chemistry set forth herein is intended to include chemistry or chemistries that are known.

20 According to some embodiments of the present invention, the collection area or tank 502 may be configured with one or more stirrers, mixers or agitators 512 for stirring, mixing or agitating the mixture 506. The release area or tank 510 may be configured with one or more broom-like devices 514 for sweeping and/or releasing in whole or in part attached mineral particles 508 of interest from the synthetic material
25 504a of the collection surfaces 504. Embodiments are envisioned in which the


broom-like device 514 is configured on either or both sides of the conveyor belt 504. According to some embodiments of the present invention, the release area or tank 510 may have a corresponding mixture 516 configured to enhance the releasing in whole or in part of the attached mineral particles 508 of interest from the synthetic material 504a of the collection surfaces 504. As shown, the collection area or tank 502 and the release area or tank 510 are separated by a wall 518.

By way of example, the conveyor belt 504 may be made of polyurethane rubber indicated as 504b in Figure 16b and coated with a silicone gel indicated as 504a for collecting the valuable material of interest of a wide range of sizes, including particles far larger than about 500 microns. After being coated on the polyurethane rubber 504b, the silicone gel 504a will cure and harden to as to form part of, and stick to, the polyurethane rubber 504b. Embodiments are envisioned in which the polyurethane rubber 504b may be coated on either or both sides with the silicone gel 504a. The scope of the invention is intended to include, and embodiments are envisioned in which, the conveyor belt 504 may be made of some other elastic material. The silicone gel 504a may include, or take the form of, molecules having the siloxane functional group, e.g., including a siloxane that is, or may take the form of, a functional group in organosilicon chemistry with the Si–O–Si linkage. By way of example, parent siloxanes may include, or take the form of, oligomeric and polymeric hydrides with the formulae $\text{H}(\text{OSiH}_2)_n\text{OH}$ and $(\text{OSiH}_2)_n$. The scope of the invention is also intended to include other types or kinds of siloxanes, e.g., including branched compounds, where the defining feature includes each pair of silicon centers being separated by one oxygen atom. In one embodiment of the present invention, and set forth by way of example, the silicone gel 504a took the form of a product from Dow-Corning® Corporation, Midland, MI 48686-0994, USA, e.g., labeled as product

no. 2986922-1104 (Lot: 0007137499), that is sold in a combination that includes 3-4222 Dielectric Firm Gel Part A and 3-4222 Dielectric Firm Gel Part B. The gel comes with two parts: Part A includes dimethyl siloxane, dimethylvinyl-terminated – 68083-19-2; polydimethylsiloxane – 63148-62-9; reaction of ethylene glycol and
5 silica – 170424-65-4; hydrotreated light naphthenic petroleum distillate – 64742-53-6. Part B includes dimethyl siloxane, dimethylvinyl-terminated – 68083-19-2; polydimethylsiloxane – 63148-62-9; dimethyl siloxane, hydrogen-terminated – none; trimethylated silica – 68909-20-6; dimethyl, methylhydrogen siloxane – 68037-59-2. The scope of the invention is intended to include, and embodiments are envisioned
10 in which, the one or more collection surfaces 504 may be configured or made substantially of a material that consists of a siloxane-based material in a non-gel form.

PDMS

15 By way of example, PDMS is understood to be characterized by a chemical formula:

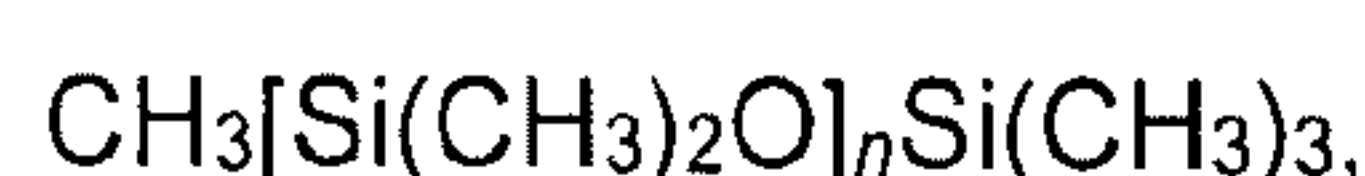

20 where n is the number of repeating monomer $[\text{SiO}(\text{CH}_3)_2]$ units.

PDMS includes oxygen, hydrogen, silicon and carbon. Because of the presence of oxygen, PDMS is normally considered or classified as being part of a polar group. In chemistry, polarity is generally understood to refer to a separation of electric charge leading to a molecule or its chemical groups having an electric dipole

or multipole moment, and a polar molecule is generally understood to have a polarity that is characterized as being asymmetric.

Alternatives to Conveyor Belt Embodiments

5 The scope of the invention is not intended to be limited to the collection surface 504 including, or taking the form of, a conveyor belt. For example, embodiments are envisioned in which the collection surface 504 includes, or takes the form of, one or more of an impeller, a filter assembly and/or a flat plate, as well as other types or kinds of collection surfaces, consistent with that set forth herein.

10

Figures 1 to 15b

The remaining part of the application describes the subject matter of Figures 1 to 15b of the aforementioned PCT application no. PCT/US12/39631, as follows:

15

Figures 1, 1a, 1b

By way of example, Figure 1 shows the present invention is the form of a machine, device, system or apparatus 10, e.g., for separating valuable material from unwanted material in a mixture 11, such as a pulp slurry, using a first processor 12 and a second processor 14. The first processor 12 and the second processor 14 are
20 configured with a functionalized polymer coated member that is shown, e.g., as a functionalized polymer coated impeller 20 (Fig. 1a), 20' (Fig. 1b), according to some embodiments of the present invention. In operation, the impeller 20, 20' slowly rotates in relation to the first processor 12 and the second processor 14, the impeller blades slowly pass through the attachment rich environment 16 in the first processor
25 12 where the valuable material is attached to the blades and through the release rich

environment 18 in the second processor 14.is released from the blades. By way of example, the impeller 20 is shown rotating in a counterclockwise direction as indicated by arrow a, although the scope of the invention is not intended to be limited to the direction of the impeller rotation, or the manner in which the functionalized polymer coated impeller 20 (Fig. 1a), 20' (Fig. 1b) is arranged, mounted, or
5 configured in relation to the first processor 12 and the second processor 14.

The first processor 12 may take the form of a first chamber, tank, cell or column that contains an attachment rich environment generally indicated as 16. The first chamber, tank or column 12 may be configured to receive via piping 13 the
10 mixture or pulp slurry 11 in the form of fluid (e.g., water), the valuable material and the unwanted material in the attachment rich environment 16, e.g., which has a high pH, conducive to attachment of the valuable material. The second processor 14 may take the form of a second chamber, tank, cell or column that contains a release rich environment generally indicated as 18. The second chamber, tank, cell or column
15 14 may be configured to receive via piping 15, e.g., water 22 in the release rich environment 18, e.g., which may have a low pH or receive ultrasonic waves conducive to release of the valuable material. Attachment rich environments like that forming part of element environment 16 conducive to the attachment of a valuable material of interest and release rich environments like that forming part of
20 environment 18 conducive to the release of the valuable material of interest are known in the art, and the scope of the invention is not intended to be limited to any particular type or kind thereof. Moreover, a person skilled in the art would be able to formulate an attachment rich environment like environment 16 and a corresponding release rich environment like environment 18 based on the separation technology

disclosed herein for any particular valuable mineral of interest, e.g., copper, forming part of any particular mixture or slurry pulp.

In operation, the first processor 12 may be configured to receive the mixture or pulp slurry 11 of water, valuable material and unwanted material and the
5 functionalized polymer coated member that is configured to attach to the valuable material in the attachment rich environment 16. In Figure 1, the functionalized polymer coated member is shown as the functionalized polymer coated impeller 20 (Fig. 1a), 20' (Fig. 1b). In Figure 1a, the functionalized polymer coated impeller 20 has a shaft 21 and at least one impeller blade 20a, 20b, 20c, 20d, 2e, 20f, 20g and is
10 configured to rotate slowly inside the first processor 12 and the second processor 14. In Figure 1b, the functionalized polymer coated impeller 20' has a shaft 21' and impeller blades 20a', 20b', 20c', 20d', 2e', 20f', 20g' and 20h'. Each impeller blade in Figures 1 is understood to be configured and functionalized with a polymer coating to attach to the valuable material in the attachment rich environment 16. (The scope of
15 the invention is not intended to be limited to the number of blades on the impeller 20, 20' and the embodiment in Figures 1a and 1b is shown with impellers 21, 21' having a different number of blades.)

In Figure 1, the first processor 12 is configured to receive at least one impeller blade of the functionalized polymer coated impeller 20 (Fig. 1a), 20' (Fig. 1b). In
20 Figure 1b, the at least one impeller blade is shown as impeller blade 20g' being received in an attachment zone 30 that forms part of the attachment rich environment 16 defined by walls 30a, 30b. The first processor 12 may also be configured with a first transition zone generally indicated as 40 to provide drainage from piping 41 of, e.g., tailings 42 as shown in Figure 1a.

The first processor 12 may also be configured to provide at least one enriched impeller blade having the valuable material attached thereto, after passing through the attachment rich environment 16. In Figure 1b, the at least one enriched impeller blade is shown as the at least one enriched impeller blade 20c' being provisioned
5 from the attachment rich environment 16 in the first processor 12 to the release rich environment 18 in the second processor 14.

The second processor 14 may be configured to receive via the piping 15 the fluid 22 (e.g. water) and the enriched functionalized polymer coated member to release the valuable material in the release rich environment 18. In Figure 1b, the
10 second processor 14 is shown receiving the enriched impeller blade 20c' in a release zone 50, e.g., that forms part of the release rich environment 18 and is defined, e.g., by walls 30c and 30d.

The second processor 14 may also be configured to provide the valuable material that is released from the enriched functionalized polymer coated member
15 into the release rich environment 18. For example, in Figure 1b the second processor 14 is shown configured with a second transition zone 60 defined by walls 30a and 30d to provide via piping 61 drainage of the valuable material in the form of a concentrate 62 (Fig. 1a).

Figure 2: The Functionalized Polymer Coated Conveyor Belt

By way of example, Figure 2 shows the present invention is the form of a machine, device, system or apparatus 100, e.g., for separating valuable material from unwanted material in a mixture 101, such as a pulp slurry, using a first
5 processor 102 and a second processor 104. The first processor 102 and the second processor 104 are configured with a functionalized polymer coated member that is shown, e.g., as a functionalized polymer coated conveyor belt 120 that runs between the first processor 102 and the second processor 104, according to some
embodiments of the present invention. The arrows A1, A2, A3 indicate the
10 movement of the functionalized polymer coated conveyor belt 120. Techniques, including motors, gearing, etc., for running a conveyor belt like element 120 between two processors like elements 102 and 104 are known in the art, and the scope of the invention is not intended to be limited to any particular type or kind thereof.
According to some embodiments of the present invention, the functionalized polymer
15 coated conveyor belt 120 may be made of a mesh material.

The first processor 102 may take the form of a first chamber, tank, cell or column that contains an attachment rich environment generally indicated as 106. The first chamber, tank or column 102 may be configured to receive the mixture or pulp slurry 101 in the form of fluid (e.g., water), the valuable material and the
20 unwanted material in the attachment rich environment 106, e.g., which has a high pH, conducive to attachment of the valuable material. The second processor 104 may take the form of a second chamber, tank, cell or column that contains a release rich environment generally indicated as 108. The second chamber, tank, cell or column 104 may be configured to receive, e.g., water 122 in the release rich
25 environment 108, e.g., which may have a low pH or receive ultrasonic waves

conducive to release of the valuable material. Consistent with that stated above, attachment rich environments like that forming part of element environment 106 conducive to the attachment of a valuable material of interest and release rich environments like that forming part of environment 108 conducive to the release of the valuable material of interest are known in the art, and the scope of the invention is not intended to be limited to any particular type or kind thereof. Moreover, a person skilled in the art would be able to formulate an attachment rich environment like environment 106 and a corresponding release rich environment like environment 108 based on the separation technology disclosed herein for any particular valuable mineral of interest, e.g., copper, forming part of any particular mixture or slurry pulp.

In operation, the first processor 102 may be configured to receive the mixture or pulp slurry 101 of water, valuable material and unwanted material and the functionalized polymer coated conveyor belt 120 that is configured to attach to the valuable material in the attachment rich environment 106. In Figure 2, the belt 120 is understood to be configured and functionalized with a polymer coating to attach to the valuable material in the attachment rich environment 106.

The first processor 102 may also be configured to provide drainage from piping 141 of, e.g., tailings 142 as shown in Figure 2.

The first processor 102 may also be configured to provide an enriched functionalized polymer coated conveyor belt having the valuable material attached thereto, after passing through the attachment rich environment 106. In Figure 2, the enriched functionalized polymer coated conveyor belt is shown, e.g., as that portion or part 120a of the belt 120 being provisioned from the attachment rich environment 106 in the first processor 102 to the release rich environment 108 in the second processor 104. It is understood that some other portions or parts of the belt 120 may

be enriched, including the portion or part immediately leaving the attachment rich environment 106, as well as the portion or part immediately entering the release rich environment 108.

The second processor 14 may be configured to receive the fluid 122 (e.g. water) and the portion 120a of the enriched functionalized polymer coated conveyor belt 120 to release the valuable material in the release rich environment 108.

The second processor 104 may also be configured to provide the valuable material that is released from the enriched functionalized polymer coated member into the release rich environment 108. For example, in Figure 2 the second processor 104 is shown configured to provide via piping 161 drainage of the valuable material in the form of a concentrate 162.

In Figure 2, the first processor 102 is configured with the functionalized polymer coated conveyor belt 120 passing through with only two turns inside the attachment rich environment 106. However, embodiments are envisioned in which the first processor 102 may be configured to process the functionalized polymer coated conveyor belt 120 using a serpentine technique for winding or turning the belt 120 one way and another way, back and forth, inside the first processor to maximize surface area of the belt inside the processor 102 and exposure of the belt 120 to the attachment rich environment 106.

Figure 3: The Functionalized Polymer Coated Filter

By way of example, Figure 3 shows the present invention is the form of a machine, device, system or apparatus 200, e.g., for separating valuable material from unwanted material in a mixture 201, such as a pulp slurry, using a first processor 202, 202' and a second processor 204, 204'. The first processor 202 and

the second processor 204 are configured to process a functionalized polymer coated member that is shown, e.g., as a functionalized polymer coated collection filter 220 configured to be moved between the first processor 202 and the second processor 204' as shown in Figure 3 as part of a batch type process, according to some
5 embodiments of the present invention. In Figure 3, by way of example the batch type process is shown as having two first processor 202, 202' and second processor 204, 204', although the scope of the invention is not intended to be limited to the number of first or second processors. Moreover, embodiments are envisioned using a different number of first and second processor, different types or kinds of
10 processors, as well as different types or kinds of processors. According to some embodiments of the present invention, the functionalized polymer coated collection filter 220 may take the form of a membrane or a thin soft pliable sheet or layer. The arrow B1 indicates the movement of the functionalized polymer coated filter 220 from the first processor 202, and the arrow B2 indicates the movement of the
15 functionalized polymer coated collection filter 220 into the second processor 202. Techniques, including motors, gearing, etc., for moving a filter like element 220 from one processor to another processor like elements 202 and 204 are known in the art, and the scope of the invention is not intended to be limited to any particular type or kind thereof.

20 The first processor 202 may take the form of a first chamber, tank, cell or column that contains an attachment rich environment generally indicated as 206. The first chamber, tank or column 102 may be configured to receive the mixture or pulp slurry 201 in the form of fluid (e.g., water), the valuable material and the unwanted material in the attachment rich environment 206, e.g., which has a high
25 pH, conducive to attachment of the valuable material. The second processor 204

may take the form of a second chamber, tank, cell or column that contains a release rich environment generally indicated as 208. The second chamber, tank, cell or column 204 may be configured to receive, e.g., water 222 in the release rich environment 208, e.g., which may have a low pH or receive ultrasonic waves conducive to release of the valuable material. Consistent with that stated above, attachment rich environments like that forming part of element environment 206 conducive to the attachment of a valuable material of interest and release rich environments like that forming part of environment 208 conducive to the release of the valuable material of interest are known in the art, and the scope of the invention is not intended to be limited to any particular type or kind thereof. Moreover, a person skilled in the art would be able to formulate an attachment rich environment like environment 206 and a corresponding release rich environment like environment 208 based on the separation technology disclosed herein for any particular valuable mineral of interest, e.g., copper, forming part of any particular mixture or slurry pulp.

In operation, the first processor 202 may be configured to receive the mixture or pulp slurry 101 of water, valuable material and unwanted material and the functionalized polymer coated collection filter 220 that is configured to attach to the valuable material in the attachment rich environment 206. In Figure 3, the functionalized polymer coated collection filter 220 is understood to be configured and functionalized with a polymer coating to attach to the valuable material in the attachment rich environment 106.

The first processor 202 may also be configured to provide drainage from piping 241 of, e.g., tailings 242 as shown in Figure 3.

The first processor 202 may also be configured to provide an enriched functionalized polymer coated collection filter having the valuable material attached thereto, after soaking in the attachment rich environment 106. In Figure 3, the enriched functionalized polymer coated collection filter 220 is shown, e.g., being
5 provisioned from the attachment rich environment 206 in the first processor 202 to the release rich environment 208 in the second processor 204.

The second processor 204 may be configured to receive the fluid 222 (e.g. water) and the enriched functionalized polymer coated collection filter 220 to release the valuable material in the release rich environment 208.

10 The second processor 204 may also be configured to provide the valuable material that is released from the enriched functionalized polymer coated collection filter 220 into the release rich environment 208. For example, in Figure 3 the second processor 204 is shown configured to provide via piping 261 drainage of the valuable material in the form of a concentrate 262.

15 The first processor 202' may also be configured with piping 280 and pumping 280 to recirculate the tailings 242 back into the first processor 202'. The scope of the invention is also intended to include the second processor 204' being configured with corresponding piping and pumping to recirculate the concentrate 262 back into the second processor 204'. Similar recirculation techniques may be implemented for the
20 embodiments disclosed in relation to Figures 1-2 above.

The scope of the invention is not intended to be limited to the type or kind of batch process being implemented. For example, embodiments are envisioned in which the batch process may include the first and second processors 202, 204 being configured to process the enriched functionalized polymer coated collection filter 220
25 in relation to one type or kind of valuable material, and the first and second

processors 202', 204' being configured to process the enriched functionalized polymer coated collection filter 220 in relation to either the same type or kind of valuable material, or a different type or kind of valuable material. Moreover, the scope of the invention is intended to include batch processes.

5 In order to further clarify the term "functionalized polymer" as applied to the coated impeller 20 (Figure 1a), the coated conveyor belt 120 (Figure 2) and the collection filter 220 (Figure 3), various surfaces to be coated are illustrated in Figures 4-6. The various physical structures of the surfaces to be coated are illustrated in Figures 7a-7f, and some embodiments of the functionalized polymer are depicted in
10 Figures 8a, 8b, 8c, 9a, 9b and 9c.

By way of example, the polymer, according to some embodiments of the present invention, at least can be functionalized to attract particles in two different ways.

1. The polymer surface has a plurality of molecules 73 (Figures 8a, 9a)
15 having a functional group 78 (Figures 8a, 8b) to attract mineral particles 72 (Figures 8a, 9a).

2. The polymer surface has a plurality of molecules 79 (Figures 8b, 9b, 9c, 9d) rendering the surface hydrophobic in order to attract mineral particles 71, 71' (Figures 8b, 9b, 9c, 9d). Molecules 79 represent siloxane functional groups. The
20 siloxane functional groups may be provided by one or more of dimethyl siloxane, dimethylvinyl-terminated; polydimethylsiloxane; and dimethyl, methylhydrogen

siloxane. The siloxane functional groups may be provided by dimethyl siloxane, hydrogen-terminated.

Polymer Surface Having Functional Groups

5 The term “polymer” in this disclosure means a large molecule made of many units of the same or similar structure linked together. In some embodiments of the present invention, the polymer surface on a filter has a plurality of molecules 73 (Figures 8a, 9a) having a functional group 78 (Figures 8a, 8b) to attract mineral particles 72 (Figures 8a, 9a). In these embodiments, the unit can be a monomer or
10 an oligomer which forms the basis of, for example, polyamides (nylon), polyesters, polyurethanes, phenol-formaldehyde, urea-formaldehyde, melamine-formaldehyde, polyacetal, polyethylene, polyisobutylene, polyacrylonitrile, poly(vinyl chloride), polystyrene, poly(methyl methacrylates), poly(vinyl acetate), poly(vinylidene chloride), polyisoprene, polybutadiene, polyacrylates, poly(carbonate), phenolic
15 resin, polydimethylsiloxane and other organic or inorganic polymers. Thus, the synthetic material can be hard or rigid like plastic or soft and flexible like an elastomer. While the physical properties of the filter can vary, the surface of the filter is chemically functionalized to provide a plurality of functional groups to attract mineral particles. The terms “valuable material” and “mineral particle” are used
20 herein interchangeably. It is possible to use a molecule or molecular segment 76 (Figure 8a, 9a) to attach a functional group 78 to the polymer surface. In general, the molecule 76 can be a hydrocarbon chain, for example, and the functional group 78 can be ionic for attracting a mineral, such as copper to the surface 74. A xanthate, for example, has both the functional group 78 and the molecular segment
25 76 to be incorporated into the polymer that is used to make or coat the surface. A

functional group 78 is also known as a collector that is either ionic or non-ionic. The ion can be anionic or cationic. An anion includes, but not limited to, oxyhydriyl, such as carboxylic, sulfates and sulfonates, and sulfhydryl, such as xanthates and dithiophosphates. Other molecules or compounds that can be used to provide the function group 78 include thionocarboamates, thioureas, xanthogens, monothiophosphates, hydroquinones and polyamines. Similarly, a chelating agent can be incorporated into the polymer as a collector site for attaching to a mineral, such as copper. A surface having a functionalized polymer is also referred herein as synthetic surface.

10

Polymer Having Molecules to Render a Surface Hydrophobic

In some embodiments of the present invention, at least the surface of a filter surface is functionalized so that the surface is hydrophobic. It is possible to functionalize a polymer surface to have a plurality of molecules 79 (Figures 8b, 8c, 9b, 9c) to render the surface hydrophobic. The molecules 79 may comprise a siloxane functional group.

In chemistry, hydrophobicity is the physical property of a molecule (known as a hydrophobe) that is repelled from a mass of water. Hydrophobic molecules tend to be non-polar and, thus, prefer other neutral molecules and non-polar solvents. Hydrophobic molecules in water often cluster together. According to thermodynamics, matter seeks to be in a low-energy state, and bonding reduces chemical energy. Water is electrically polarized, and is able to form hydrogen bonds internally, which gives it many of its unique physical properties. But, since hydrophobes are not electrically polarized, and because they are unable to form

hydrogen bonds, water repels hydrophobes, in favor of bonding with itself. It is this effect that causes the hydrophobic interaction.

The hydrophobic effect is the observed tendency of nonpolar substances to aggregate in aqueous solution and exclude water molecules. It can be observed as
5 the segregation and apparent repulsion between water and non-polar substances. The hydrophobic interaction is mostly an entropic effect originating from the disruption of hydrogen bonds between molecules of liquid water by the non-polar solute. A hydrocarbon chain or a similar non-polar region or a big molecule is incapable of forming hydrogen bonds with water. The introduction of such a non-
10 hydrogen bonding surface into water causes disruption of the hydrogen bonding network between water molecules. By aggregating together, nonpolar molecules reduce the surface area exposed to water and minimize their disruptive effect.

Froth flotation is a process for selectively separating hydrophobic materials from hydrophilic. The process has been adapted and applied to a wide variety of
15 materials to be separated, and additional collector agents, including surfactants and synthetic compounds have been adopted for various applications.

In mining operations, froth flotation is a process for separating minerals from gangue by taking advantage of differences in their hydrophobicity. Hydrophobicity differences between valuable minerals and waste gangue are increased through the
20 use of surfactants and wetting agents. The selective separation of the minerals makes processing complex (that is, mixed) ores economically feasible. The flotation process is used for the separation of a large range of sulfides, carbonates and oxides prior to further refinement. Phosphates and coal are also upgraded (purified) by flotation technology. Froth flotation commences by comminution (that is, crushing
25 and grinding), which is used to increase the surface area of the ore for subsequent

processing. The ore include the desired minerals and other unwanted materials, know a gangue. The process of grinding the ore into a fine power is known as liberation. The fine powder ore is then mixed with water to form a slurry. The desired mineral is rendered hydrophobic by the addition of a surfactant or collector chemical.

5 The particular chemical depends on which mineral is being refined. This slurry (more properly called the pulp) of hydrophobic mineral particles and hydrophilic gangue particles is then placed in a flotation column or horizontal pipeline wherein the concentrated mineral is separated from the tailings containing the gangue. To be effective on a given ore slurry, the collectors are chosen based upon their selective

10 wetting of the types of particles to be separated. A good collector will adsorb, physically or chemically, with one of the types of particles. In a flotation circuit for mineral concentration, various flotation reagents are added to a mixture of ore and water (called pulp) in a conditioning tank. The flow rate and tank size are designed to give the minerals enough time to be activated. The conditioner pulp is fed to a bank

15 of rougher cells which remove most of the desired minerals as a concentrate. The rougher pulp passes to a bank of scavenger cells where additional reagents may be added. The scavenger cell froth is usually returned to the rougher cells for additional treatment, but in some cases may be sent to special cleaner cells. The scavenger pulp is usually barren enough to be discarded as tails. More complex flotation circuits

20 have several sets of cleaner and re-cleaner cells, and intermediate re-grinding of pulp or concentrate. Because of a number of other factors, as much as 15% of the liberated minerals are not recovered and are discarded as gangue.

Collectors

Collectors either chemically bond (chemisorption) on a hydrophobic mineral surface, or adsorb onto the surface in the case of, for example, coal flotation through physisorption. Collectors increase the natural hydrophobicity of the surface, increasing the separability of the hydrophobic and hydrophilic particles. The hydrophobic particles of interest, according to the present invention, are depicted as particles 71', 72' in Figures 8b, 8c, 9b and 9c.

Figures 4, 5 and 6: Impellers, Conveyor Belts and Filters

By way of example, the impeller 20 (Figure 1) has a collection area 23 to support the functionalized polymer (Figure 4). The conveyor belt 120 (Figure 2) has a collection area 123 to support the functionalized polymer (Figure 5). The filter 220 (Figure 3) has a collection area 223 to support the functional polymer (Figure 6). The collection area 23, 123 and 223 can take many forms and have various surface features (Figures 7a-7f) to attract the mineral particles of interest, when the impeller 20, conveyor belt 120 and the filter 220 are made contact with a mixture or pulp slurry 11 (Figure 1), 101 (Figure 2), 201 (Figure 3) that includes water and valuable material.

Figures 7a-7f: Surface Features

By way of example, each of the collection areas 23, 123 and 223 (Figures 4-6) may have a plurality of openings to allow the pulp slurry 11 (Figure 1), 101 (Figure 2), 201 (Figure 3) to pass through while collecting at least part of the valuable material in the pulp slurry. The surface inside an opening and the surfaces or edges around the opening will be provided with the functional groups to attract the mineral

particles. Those surfaces are referred to as collection surfaces. For example, the openings on the collection areas 23, 123 and 223 can take the form of holes or cylindrical passage ways 701 as shown in Figure 7a. The openings on the collection areas 23, 123 and 223 can take the form of hexagonal passage ways 702 arranged like honeycomb, as shown in Figure 7b. The collection areas 23, 123 and 223 can have a rectangular grid 703, as shown in Figure 7c. The collection areas 23, 123 and 223 may comprise a stack of wavy sheets 704 as shown in Figure 7d. The collection areas 23, 123 and 223 may comprise an irregular arrangement of fiber-like structures 705 as shown in Figure 7e. The collection areas 23, 123 and 223 may comprise a plain surface 706 as shown in Figure 7f. The plain surface 06 may be a smooth surface, a paper-like surface or matted surface, without larger structures. The collection area 23, 123 and 223 can be made of a synthetic material, such as a polymer functionalized for attracting the mineral particles. Alternatively, only the collection surfaces are coated with such a polymer. In a different embodiment of the present invention, the collection area 223 comprises a panel, such as a glass panel, a ceramic panel and a metal sheet, wherein one or both sides of the panel has a plain surface 706. In yet another embodiment of the present invention, the impeller 20 and the filter 220 comprise a collection of synthetic bubbles or beads as shown in Figures 12a-12b.

20

Figures 8a-9c: Surface Molecules

By way of example, the fiber-like structures 705 (Figure 7e) can be functionalized so that they become attached to molecules 73 (Figures 8a, 8b). The fiber-like structures 705 as shown in Figure 7e can be made of individual fibers 401, 401' as shown in Figure 8a-8c. In one embodiment of the present invention, the fiber

25

401 (Figure 8a) can be made of a polymer that has a plurality of molecules 73 to provide the functional group 78 and the attaching molecular segment 76. A xanthate, for example, has both the functional group 78 and the molecular segment 76 to be incorporated into the polymer that is used to make the fiber 401. A functional group 78 is also known as a collector that is ionic or non-ionic to attract mineral particles 72. The ion can be anionic or cationic. An anion includes, but not limited to, oxyhydriyl, such as carboxylic, sulfates and sulfonates, and sulfhydryl, such as xanthates and dithiophosphates. Other molecules or compounds that can be used to provide the function group 78 include thionocarboamates, thioureas, xanthogens, monothiophosphates, hydroquinones and polyamines. In another embodiment of the present invention, the fiber 401 is coated with polymer that has the molecules 73 to provide the functional group 78 and the attaching molecular segment 76. With such a coating, the fiber 401 can be made of glass, ceramic, metal, nylon, cotton or a different polymer. A diagram of the fiber 401 and the attached molecules 73 is shown in Figure 8a.

In a different embodiment of the present invention, the fiber 401' (Figure 8b) can be made of a polymer that has a plurality of molecules 79 to render the fiber 401' (and thus the collection areas 23, 123 and 223 of Figures 4, 5, 6) hydrophobic. The polymer can be a hydrophobic material such as polystyrene, poly(d,l-lactide), poly(dimethylsiloxane), polypropylene, polyacrylic, polyethylene, etc. The polymer can also be a hydrophobically-modified polymer, such as hydrophobically-modified ethyl hydroxyethyl cellulose. Alternatively, the fiber 401' can be made of glass, ceramic, metal, nylon, cotton or other fabric materials and coated with hydrophobic molecules, such as a siloxane functional group in a silicone gel. The molecules 79 cause the fiber 401' to become hydrophobic. As such, a hydrophobically-modified

mineral particle 72' can be attracted to the hydrophobic fiber 401'. The hydrophobically-modified, or wetted, mineral particle 72' comprises a mineral particle 71 and one or more molecules 73 attached thereon. The molecule 73, or collector, has a functional group 78 attached to the mineral particle 71 and a hydrophobic chain or molecular segment 76. A diagram showing the attraction between the hydrophobic chain or molecular segments 76 and the hydrophobic fiber 401' is shown in Figure 8b. It should be understood that the particles 72' may be non-mineral and can be some harmful particles in a body of water. Furthermore, the hydrophobic fiber 401' can also be used to attract non-mineral particles. For example, if a non-mineral particle 71' has one or more hydrophobic chains or molecular segments 76, the non-mineral particle 71' is also attracted to the hydrophobic fiber 401'. A diagram showing the attraction between non-mineral particles 71' and the hydrophobic fiber 401' is shown in Figure 8c. Thus, the hydrophobic fiber 401' can be used in a filter, impeller or conveyor belt (similar to those shown in Figures 4-6) for water-pollution control, water purification, etc.

The surfaces and edges around the openings or surface structures 701, 702, 703, 704 (Figures 7a-7d) can be functionalized to provide the molecules 73 (Figures 9a, 9b). The exposed surfaces and edges around the openings or surface structures 701, 702, 703, 704 are represented by surface portions 403, 403' as shown in Figures 9a-9c. The length L of the surface portions 403, 403' can be equal to the thickness of the impeller 20, conveyor belt 120 and filter 220 (Figures 4-6). As with the fiber 401 as shown in Figure 8a, the surface portion 403 can be made of a polymer that has a plurality of molecules 73 to provide the functional group 78 and the attaching molecular segment 76. In a different embodiment, the surface portion 403 is coated with polymer that has the molecules 73 to provide the functional group

78 and the attaching molecular segment 76. The surface portion 403 can be made of glass, ceramic, metal, nylon, cotton or a different polymer. The functional group 78 is used to attract mineral particles 72. A diagram of the surface portion 403 and the attached molecules 73 is shown in Figure 9a.

5 In a different embodiment of the present invention, the surface portion 403' can be made of a polymer having a plurality of molecules 79 that render the surface portion 403' (and thus the collection areas 23, 123 and 223 of Figures 4, 5, 6) hydrophobic. The molecules 79 may comprise siloxane functional groups. As with the hydrophobic fiber 401' as shown in Figures 8b and 8c, the polymer can be a
10 hydrophobic material such as polystyrene, poly(d,l-lactide), poly(dimethylsiloxane), polypropylene, polyacrylic, polyethylene, etc. The polymer can also be a hydrophobically-modified polymer, such as hydrophobically-modified ethyl hydroxyethyl cellulose. Alternatively, the surface portion 403' can be made of glass, ceramic, metal, nylon, cotton or other fabric materials and coated with hydrophobic
15 molecules, such as polysiloxanes, alkylsilane and fluoroalkylsilane. The molecules 79 cause the surface portion 403' to become hydrophobic. As such, a hydrophobically-modified mineral particle 72' is attracted to the hydrophobic surface portion 403'. A diagram showing the attraction between the molecular segments 76 and the hydrophobic surface portion 403' is shown in Figure 9b. It should be
20 understood that the particles 72' may be non-mineral and can be some harmful particles in a body of water. Furthermore, the hydrophobic surface portion 403' can also be used to attract non-mineral particles. For example, if a non-mineral particle 71' has one or more hydrophobic chains or molecular segments 76, the non-mineral particle 71' is also attracted to the hydrophobic surface portion 403'. A diagram
25 showing the attraction between the non-mineral particles 71' and the hydrophobic

surface portion 403' is shown in Figure 9c. Thus, a filter, impeller or conveyor belt (similar to those shown in Figures 4-6) that has hydrophobic surface portions 403' can also be used for water-pollution control, water purification, etc. to rid of hydrophobically-modified particles 72' which may not be a mineral of interest, but
5 some metal harmful to the environment.

The treatment of plain surface 706 (Figure 7f) can be made similar to the surface portions 403, 403' as shown in Figures 9a-9c. That is, the plain surface 706 can be functionalized to provide a functional group 78 as shown in Figure 9a. The plain surface 706 can also be functionalized to be hydrophobic, as shown in Figures
10 9b and 9c.

It should be understood that, when the collection area 23 of the impeller 20 (Figure 4), the collection area 123 of the conveyor belt 120 (Figure 5) and the collection area 223 of the filter 220 (Figure 6) are functionalized to be hydrophobic, the pulp slurry 11 (Figure 1a), the pulp slurry 101 (Figure 2) and the pulp slurry 201 (Figure 3) must be mixed with collector molecules such as xanthates so that the
15 mineral particles 71 (Figures 8b and 9b) in the slurry may be hydrophobically modified with the collector molecules 73 to become wetted mineral particles 72'.

In a different embodiment of the present invention, the impeller 20 (Figure 1a), the conveyor belt 120 (Figure 2) and the filter 220 (Figure 3) are used in a horizontal
20 pipeline for mineral separation. Furthermore, a group of filters 220 can be used in a first processor 202 as shown in Figure 3. By way of example, a plurality of filters 220 are placed into a horizontal pipeline 300 to collect the valuable material in the slurry 322, as shown in Figure 10a. As the slurry passes through the filters 220, some of the mineral particles in the slurry will become attached to collection area 223 and the
25 openings (see Figures 7a-7e). With such an arrangement, one or more of the filters

220 can be taken out of the horizontal pipeline 300 for mineral releasing (see Figure 10b) while other filters 220 continue to collect the mineral particles. The tailings 342 can be discharged or transported to a tailings pond or the like (see Figure 11). The attached mineral particles on the filter 220 can be released in a release rich
5 environment with a low pH solution and/or ultrasonic agitation. The pH value of the low pH solution can be 0 to 7, for example. As shown in Figure 10b, the filter 220 with collected mineral particles can be placed in a releasing apparatus 410 to be washed with a mixture of acid and water provided by water container 424 and acid container 422. One or more ultrasonic sources 432 may be used to shake loose the
10 attached mineral particles from the filter 220. In one embodiment of the present invention, the filter 200 comprises a panel, such as a glass panel, a ceramic panel, a metal sheet, a plastic sheet, wherein the panel is coated with a synthetic material comprising a plurality of molecules configured to attract the mineral particles. The surface of the panel can be a plain surface as shown in Figure 7f. The reclaimed
15 water 427 can be channeled back for reuse. The concentrated mineral 440 can be taken out of the releasing apparatus 410.

In many releasing environments, the pH value is lower than the pH value for mineral attachment. It should be noted that, however, when the valuable material is copper, for example, it is possible to provide a lower pH environment for the
20 attachment of mineral particles and to provide a higher pH environment for the releasing of the mineral particles from the synthetic beads or bubbles. In general, the pH value is chosen to facilitate the strongest attachment, and a different pH value is chosen to facilitate release. Thus, according to some embodiments of the present invention, one pH value is chosen for mineral attachment, and a different pH

value is chosen for mineral releasing. The different pH could be higher or lower, depending on the specific mineral and collector.

Applications

5 The scope of the invention is described in relation to mineral separation, including the separation of copper from ore.

By way of example, applications are envisioned to include

Rougher/scavenger separation cells in the production stream, replacing the traditional flotation machines.

10 Tailings scavenger cells are used to scavenge the unrecovered minerals from a tailings stream.

Tailings cleaning cell is used to clean unwanted material from the tailings stream before it is sent to the disposal pond.

15 Tailings reclamation machine that is placed in the tailings pond to recover valuable mineral that has been sent to the tailings pond.

It should be understood that, the filter 220 (Figures 3, 6) can also be used for mineral recovery in a tailings point. By way of example, one or more filters 220 may be placed in a tailings pond 350 to collect the mineral particles in the tailings 342. In order to increase the contact between the collection area 223 and the tailings 342 in
20 the pond 350, it is possible to move the filters 220 back and forth as indicated by arrows A and B. It is understood that when the collection area 223 of the filter 220 is functionalized to be hydrophobic, collector molecules such as xanthates should be added into the tailings 342 so that the mineral particles in the tailings can be wetted.

It should be understood that the synthetic beads and filters according to the
25 present invention, whether functionalized to have a collector or functionalized to be

hydrophobic, are also configured for use in oilsands separation – to separate bitumen from sand and water in the recovery of bitumen in an oilsands mining operation.

Other types or kinds of valuable material or minerals of interest, include gold,
5 molybdenum, etc.

However, the scope of the invention is intended to include other types or kinds of applications.

Figures 12a – 14b: Different Embodiments

10 On the collection areas 23, 123, 223 of the impeller 20, conveyor belt 120 and filter 220 as shown in Figures 4-7f, the collection surfaces on the surface structures are coated with a synthetic material having particular molecules to attract mineral particles. In different embodiments of the present invention, the synthetic material can be used to provide those particular molecules on beads or bubbles, or to make
15 the beads or bubbles (see Figures 13a-14b). The bubbles or beads that have the particular molecules to attract mineral particles are herein referred to as synthetic bubbles or beads. By way of example, the synthetic beads or bubbles 170 are used in an impeller or a filter to collect mineral particles 72, 72' (see Figures 8a-9b, 13a-14b). As shown in Figure 12a, the impeller uses a cage or the like to contain a
20 plurality of synthetic beads to provide the collection surfaces in the collection area 23. As shown in Figure 12b, the filter uses a cage or the like to contain a plurality of synthetic beads 170 to provide the collection surfaces in the collection area 223. When the synthetic beads or bubbles 170 are used to collect valuable material in a tailings pond 350 (Figure 11), they can be put in a sack 320 as shown in Figure 12c.
25 As with the synthetic material that is used on the collection surfaces 403, 403'

(Figures 9a-9c), the synthetic material to be used on the synthetic beads or bubbles 170 may have the functional groups 78 to attract the mineral particles 72, or may have the hydrophobic molecules 79 comprising a siloxane functional group.

Figure 13a illustrates a synthetic bead functionalized to attract hydrophobic particles. As shown in Figure 13a, the synthetic bubble or bead 170 has a solid-phase bead body to provide a bead surface 174. At least the outside part of the bead body is made of a synthetic material, such as a hydrophobic polymer, or a coating of a hydrophobic chemical. As shown in Figures 13a and 13b, the surface 174 of the synthetic bubble or bead comprises a plurality of molecules 79 which renders the surface 174 hydrophobic. Molecules 79 may comprise a siloxane functional group. For example, the surface 174 may be a glass surface coated with polysiloxanes which can bind to the hydroxyl group of the glass surface. Polysiloxanes, such as hydroxyl-terminated polydimethylsiloxanes, have a silicon-oxygen chain to provide the hydrophobic molecules 79. The hydrophobic particle 72', as shown in Figure 13b, can be a mineral particle 71 having one or more collectors 73 attached thereto. One end (78) of the collector 73 has an ionizing bond attached to the mineral particle 71. The other end of the collector 73 has a hydrophobic chain 76 which tends to move into the hydrophobic molecules 79. Thus, the hydrophobic particle 72' can be a wetted mineral particle. A collector, such as xanthate, has both the functional group 78 and the molecule 76. The hydrophobic particle 72, as shown in Figure 13c, can be a particle 71' that has a hydrophobic chain 76. Such particle can be non-mineral related, but it can be arranged to contact with the hydrophobic synthetic bubbles or beads 170 of the present inventions. Likewise, the particle 71 may be non-mineral and can be harmful to the environment. Thus the hydrophobic bubbles or beads 170, according to the present invention, can

be used in non-mining applications, such as water-pollution control and water purification. The size of the synthetic bead can be smaller than the minimum size of the mineral particles which is about 150 μ m, and can be larger than the maximum size of the mineral particles. In certain applications, the size of the synthetic bead
5 can be 1cm or larger.

Figure 14a illustrates a synthetic bead having a functional group to attract mineral particles. The synthetic bead 170 has a bead body to provide a bead surface 174 to attract mineral particles 72. Figure 14b is an enlarged surface of the synthetic bead functionalized to attract mineral particles. At least the outside part of
10 the bead body is made of a synthetic material, such as polymer, so as to provide a plurality of molecules or molecular segments 76 on the surface 174. The molecule 76 is used to attach a chemical functional group 78 to the surface 174. In general, the molecule 76 can be a hydrocarbon chain, for example, and the functional group 78 can have an anionic bond for attracting a mineral, such as copper to the surface
15 174. A xanthate, for example, has both the functional group 78 and the molecular segment 76 to be incorporated into the polymer that is used to make the synthetic bead 70. The functional group 78 is also known as a collector that can have a non-ionizing or ionizing bond to attract the mineral particles 72. Similarly, a chelating agent can be incorporated into the polymer as a collector site for attracting a mineral,
20 such as copper.

The releasing of the mineral particles from the synthetic beads can be similar to the releasing of the mineral particles from the impeller, conveyor belt or the filter. For example, after the synthetic beads 170 in the collection area 23 or 223 or in the sack 320 (Figures 12a-12c) have collected a certain amount of mineral particles, the
25 synthetic beads 170 can be made contact with a low pH solution and/or subjected to

ultrasonic agitation (e.g., Figure 10b) in order to release the mineral particles.

However, a high pH solution can also be used for releasing certain mineral particles while a low pH environment is used for mineral attachment.

According to some embodiments of the present invention, only a portion of the surface of the synthetic bead is functionalized to be hydrophobic. This has the benefits as follows:

1. Keeps too many beads from clumping together – or limits the clumping of beads,
2. Once a mineral is attached, the weight of the mineral is likely to force the bead to rotate, allowing the bead to be located under the bead as it rises through the flotation cell;
 - a. Better cleaning as it may let the gangue to pass through
 - b. Protects the attached mineral particle or particles from being knocked off, and
 - c. Provides clearer rise to the top collection zone in the flotation cell.

According to some embodiments of the present invention, only a portion of the surface of the synthetic bead is functionalized with collectors. This also has the benefits of

1. Once a mineral is attached, the weight of the mineral is likely to force the bead to rotate, allowing the bead to be located under the bead as it rises through the flotation cell;
 - a. Better cleaning as it may let the gangue to pass through
 - b. Protects the attached mineral particle or particles from being knocked off, and
 - c. Provides clearer rise to the top collection zone in the flotation cell.

According to some embodiments of the present invention, one part of the synthetic bead is functionalized with collectors while another part of same synthetic bead is functionalized to be hydrophobic as shown in Figures 15a and 15b. As shown in Figure 15a, a synthetic bead 74 has a surface portion where polymer is functionalized to have collector molecules 73 with functional group 78 and molecular segment 76 attached to the surface of the bead 74. The synthetic bead 74 also has a different surface portion where polymer is functionalized to have hydrophobic molecules 79. In the embodiment as shown in Figure 15b, the entire surface of the synthetic bead 74 can be functionalized to have collector molecules 73, but a portion of the surface is functionalized to have hydrophobic molecules 79 render it hydrophobic. Molecules 79 may comprise a siloxane functional group.

This "hybrid" synthetic bead can collect mineral particles that are wetted and not wetted.

According to some embodiments of the present invention, the surface of a synthetic bead can be functionalized to have a collector molecule. The collector has a functional group with an ion capable of forming a chemical bond with a mineral particle. A mineral particle associated with one or more collector molecules is referred to as a wetted mineral particle. According to some embodiments of the present invention, the synthetic bead can be functionalized to be hydrophobic in order to collect one or more wetted mineral particles.

The Scope of the Invention

It should be further appreciated that any of the features, characteristics, alternatives or modifications described regarding a particular embodiment herein may also be applied, used, or incorporated with any other embodiment described

herein. In addition, it is contemplated that, while the embodiments described herein are useful for homogeneous flows, the embodiments described herein can also be used for dispersive flows having dispersive properties (e.g., stratified flow).

Although the invention has been described and illustrated with respect to
5 exemplary embodiments thereof, the foregoing and various other additions and omissions may be made therein and thereto without departing from the spirit and scope of the present invention.

Claims

1. An apparatus comprising:

5 a collection area or tank having one or more collection surfaces configured to contact with a mixture having water and valuable material, the valuable material having a plurality of mineral particles of interest; and

a synthetic material provided at least on the one or more collection surfaces, the synthetic material having plurality of molecules with a siloxane functional group configured to attract the mineral particles of interest to the collection surfaces,
10 wherein the one or more collection surfaces includes, or forms part of, a conveyor belt also that is driven through the collection area or tank, through a release area or tank, back through the collection area or tank, and the conveyor belt is made of polyurethane rubber and coated with a silicone gel for collecting the mineral particles of interest, including particles having a size of 500 microns.

15

2. The apparatus according to claim 1, wherein the mixture includes, or takes the form of, a pulp slurry having ground ore with mineral particles of interest forming part thereof, including mineral particles of interest of 500 microns.

20 3. The apparatus according to claim 1, wherein the mixture includes chemistry configured to enhance the attraction and/or attachment between the synthetic material having the siloxane functional group and the mineral particles of interest in the mixture.

4. The apparatus according to claim 1, wherein the collection area or tank is configured with one or more stirrers, mixers or agitators for stirring, mixing or agitating the mixture.

5

5. The apparatus according to claim 1, wherein the release area or tank is configured with one or more broom-like devices for sweeping and/or releasing in whole or in part attached mineral particles of interest from the synthetic material of the collection surfaces.

10

6. The apparatus according to claim 5, wherein the broom-like device is configured on either or both sides of the conveyor belt.

7. The apparatus according to claim 1, wherein the release area or tank has a
15 corresponding mixture configured to enhance the releasing in whole or in part of the attached mineral particles of interest from the synthetic material of the collection surfaces.

8. The apparatus according to claim 1, wherein the collection area or tank and
20 the release area or tank are separated by a wall.

9. The apparatus according to claim 1, wherein the polyurethane rubber is coated on either or both sides with the silicone gel.

10. The apparatus according to claim 1, wherein the silicone gel includes, or takes the form of, molecules having the siloxane functional group, including a siloxane that is, or takes the form of, a functional group in organosilicon chemistry
5 with the Si–O–Si linkage.

11. The apparatus according to claim 1, wherein the one or more collection surfaces is functionalized to be hydrophobic so as to provide a bonding between the collection surface and the mineral particles that are hydrophobic.

10

12. The apparatus according to claim 1, wherein the one or more collection surfaces comprises a surface made of a polymer and coated with a silicone gel to provide the siloxane functional group.

15 13. The apparatus according to claim 12, wherein the polymer is naturally hydrophobic or functionalized to be hydrophobic.

14. The apparatus according to claim 12, wherein the polymer is a hydrophobic polymer, including a polydimethylsiloxane.

20

15. The apparatus according to claim 1, wherein the one or more collection surface comprises polymer surfaces and the synthetic material comprise a siloxane derivative.

16. The apparatus according to claim 15, wherein the polymer surfaces comprises polyurethane.

5 17. The apparatus according to claim 1, wherein the synthetic material comprises polysiloxanes.

18. The apparatus according to claim 1, wherein the synthetic material comprises one or more of dimethyl siloxane, dimethylvinyl-terminated;
10 polydimethylsiloxane; and dimethyl, methylhydrogen siloxane.

19. The apparatus according to claim 1, wherein the synthetic material comprise hydroxyl-terminated polydimethylsiloxanes.

15 20. The apparatus according to claim 1, wherein the one or more collection surfaces comprise a polymer selected from a group consisting of polyamides, polyesters, polyurethanes, phenol-formaldehyde, urea-formaldehyde, melamine-formaldehyde, polyacetal, polyethylene, polyisobutylene, polyacrylonitrile, poly(vinyl chloride), polystyrene, poly(methyl methacrylates), poly(vinyl acetate), poly(vinylidene
20 chloride), polyisoprene, polybutadiene, polyacrylates, poly(carbonate), phenolic resin, and polydimethylsiloxane.

21. The apparatus according to claim 1, wherein the one or more collection surfaces comprises a polymer from a group consisting of polystyrene, poly(d,l-lactide), poly(dimethylsiloxane), polypropylene, polyacrylic, polyethylene, hydrophobically-modified ethyl hydroxyethyl cellulose polysiloxanes, alkylsilane and
5 fluoroalkylsilane.

22. The apparatus according to claim 1, wherein the silicone gel includes, or takes the form of, molecules having the siloxane functional group, including a siloxane that is, or takes the form of, a functional group in organosilicon chemistry
10 with the Si—O—Si linkage, and wherein parent siloxanes include, or take the form of, oligomeric and polymeric hydrides with the formulae $\text{H}(\text{OSiH}_2)_n\text{OH}$ and $(\text{OSiH}_2)_n$.

23. The apparatus according to claim 1, wherein the silicone gel includes, or takes the form of, molecules having the siloxane functional group, including a
15 siloxane that is, or takes the form of, a functional group in organosilicon chemistry with the Si—O—Si linkage, and wherein the siloxane includes branched compounds, where a defining feature includes each pair of silicon centers being separated by one oxygen atom.

20 24. The apparatus according to claim 23, wherein, after being coated on the polyurethane rubber, the silicone gel cures and hardens to as to form part of, and stick to, the polyurethane rubber.

25. The apparatus according to claim 23, wherein the one or more collection surfaces is configured or made substantially of a material that consists of a siloxane-based material in a non-gel form.

Figure 1

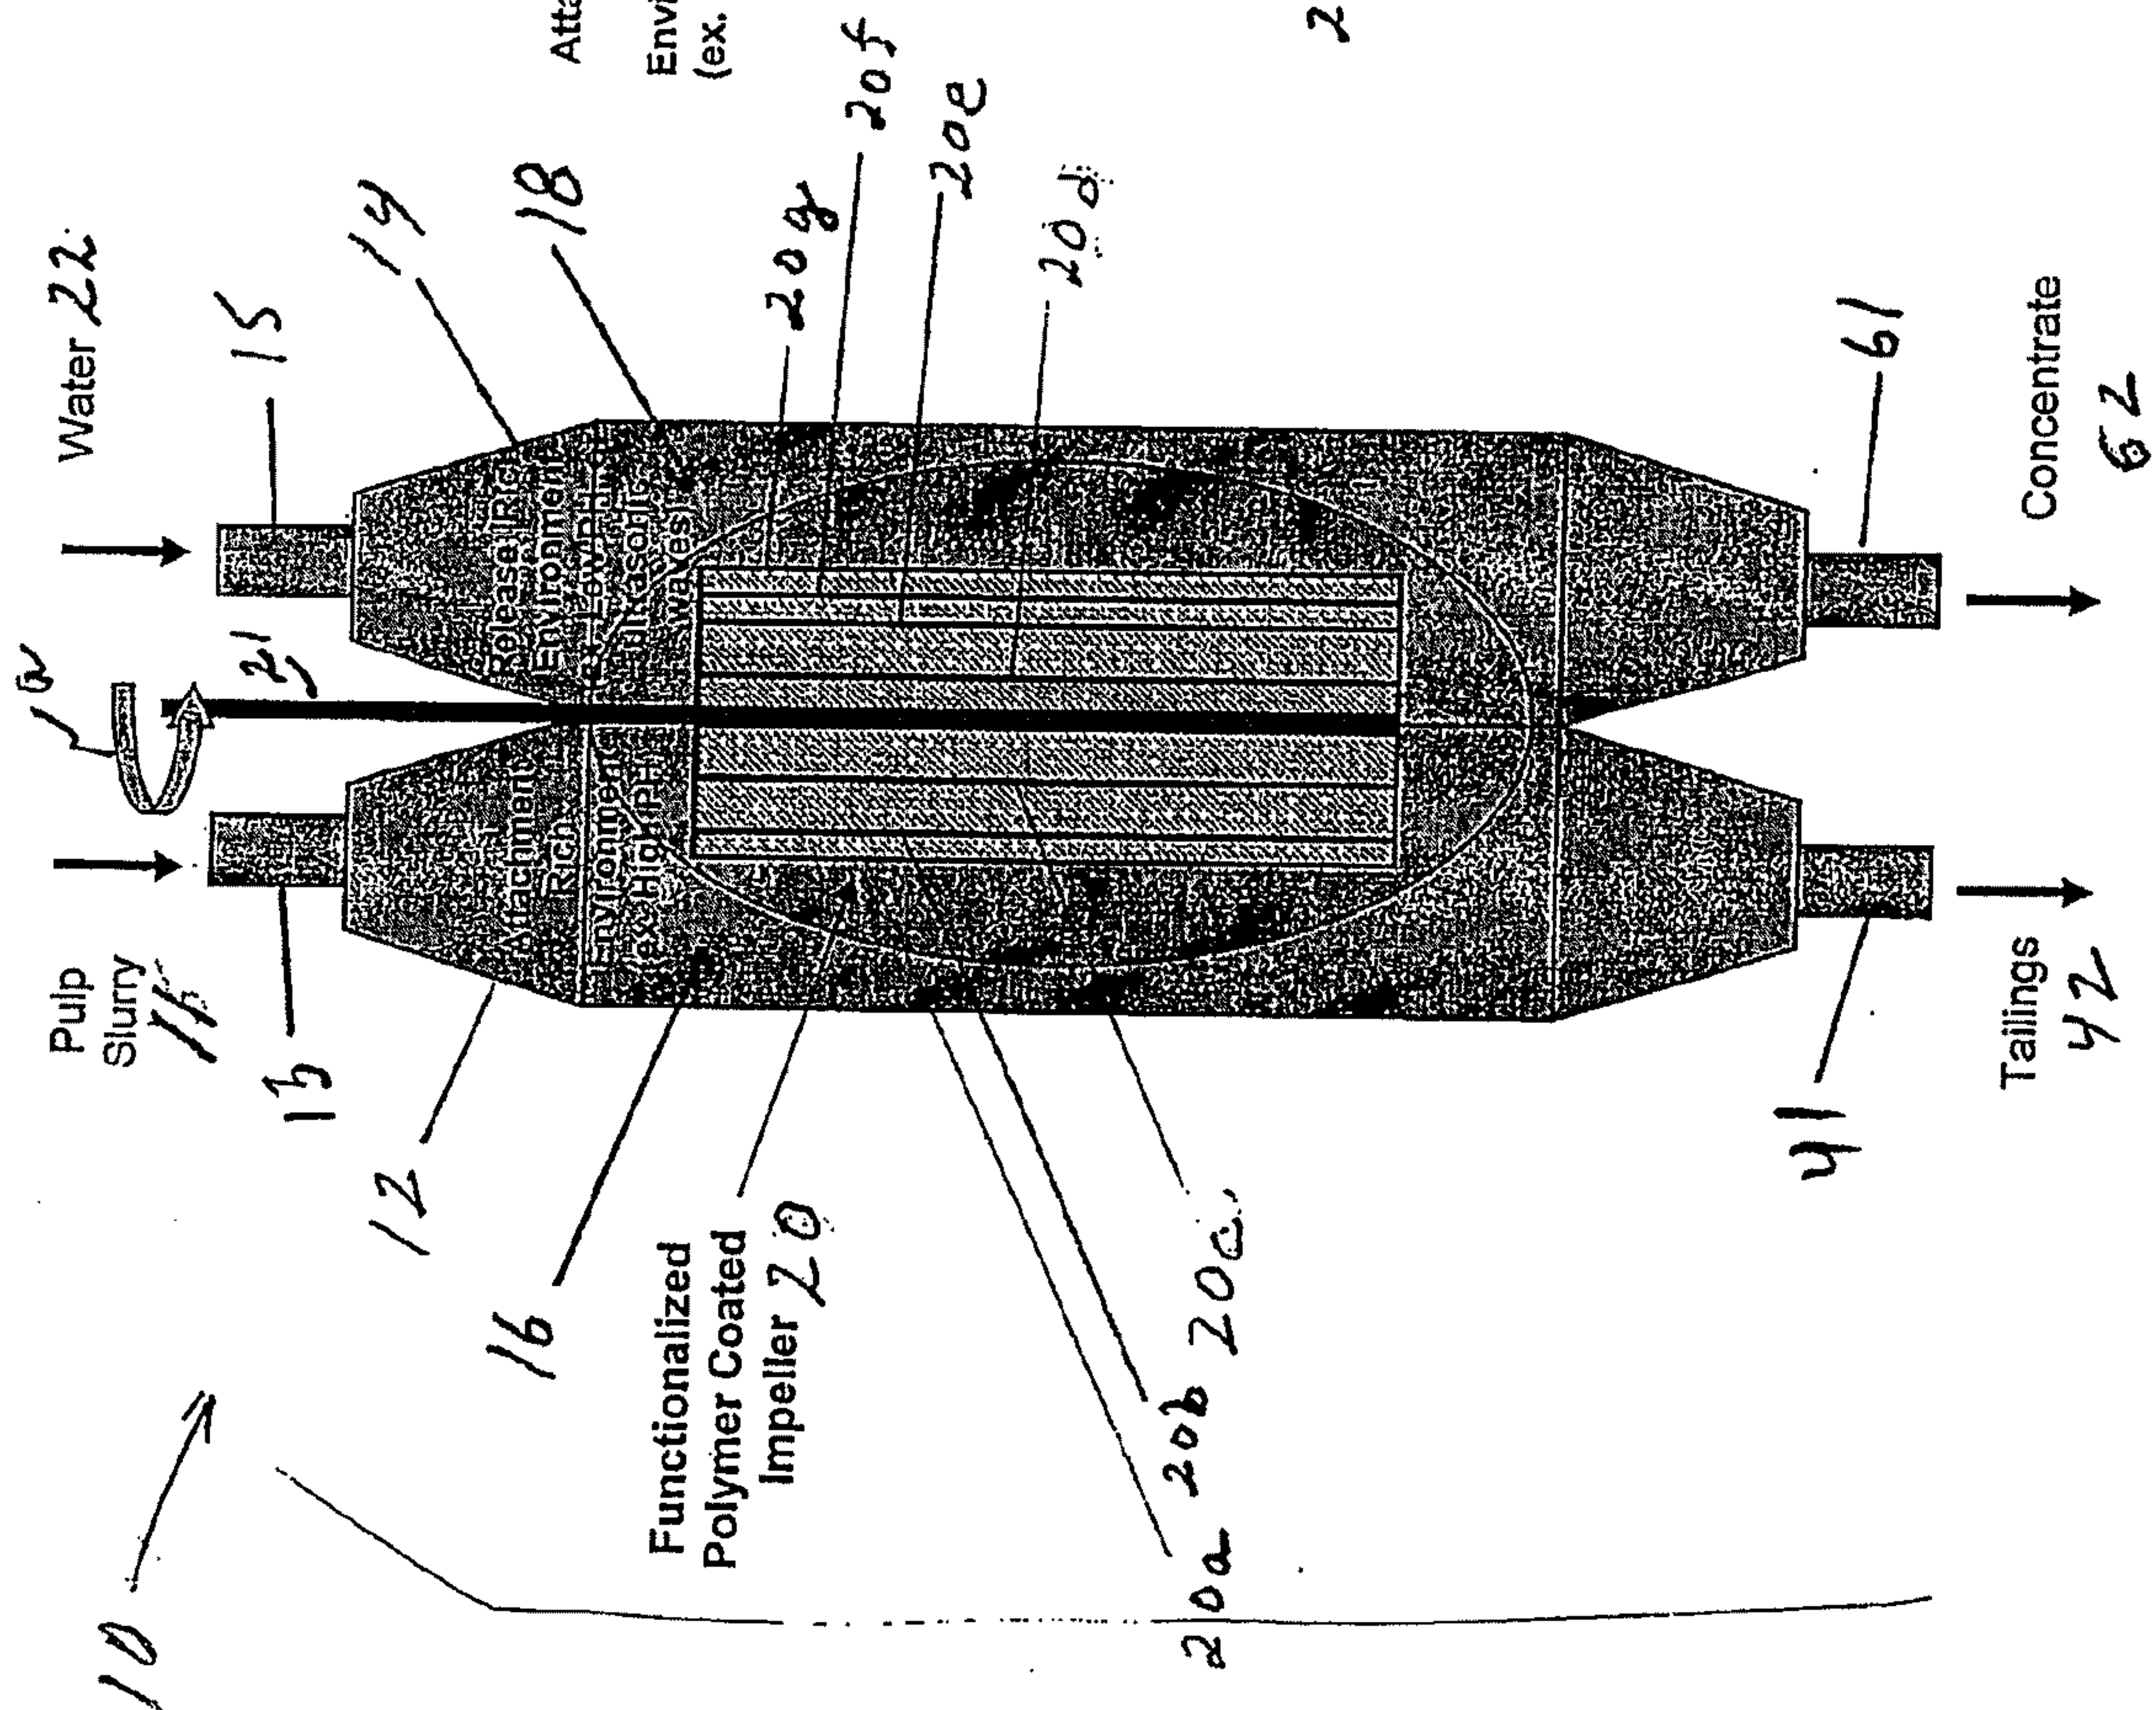


Figure 1a (PRIOR ART)

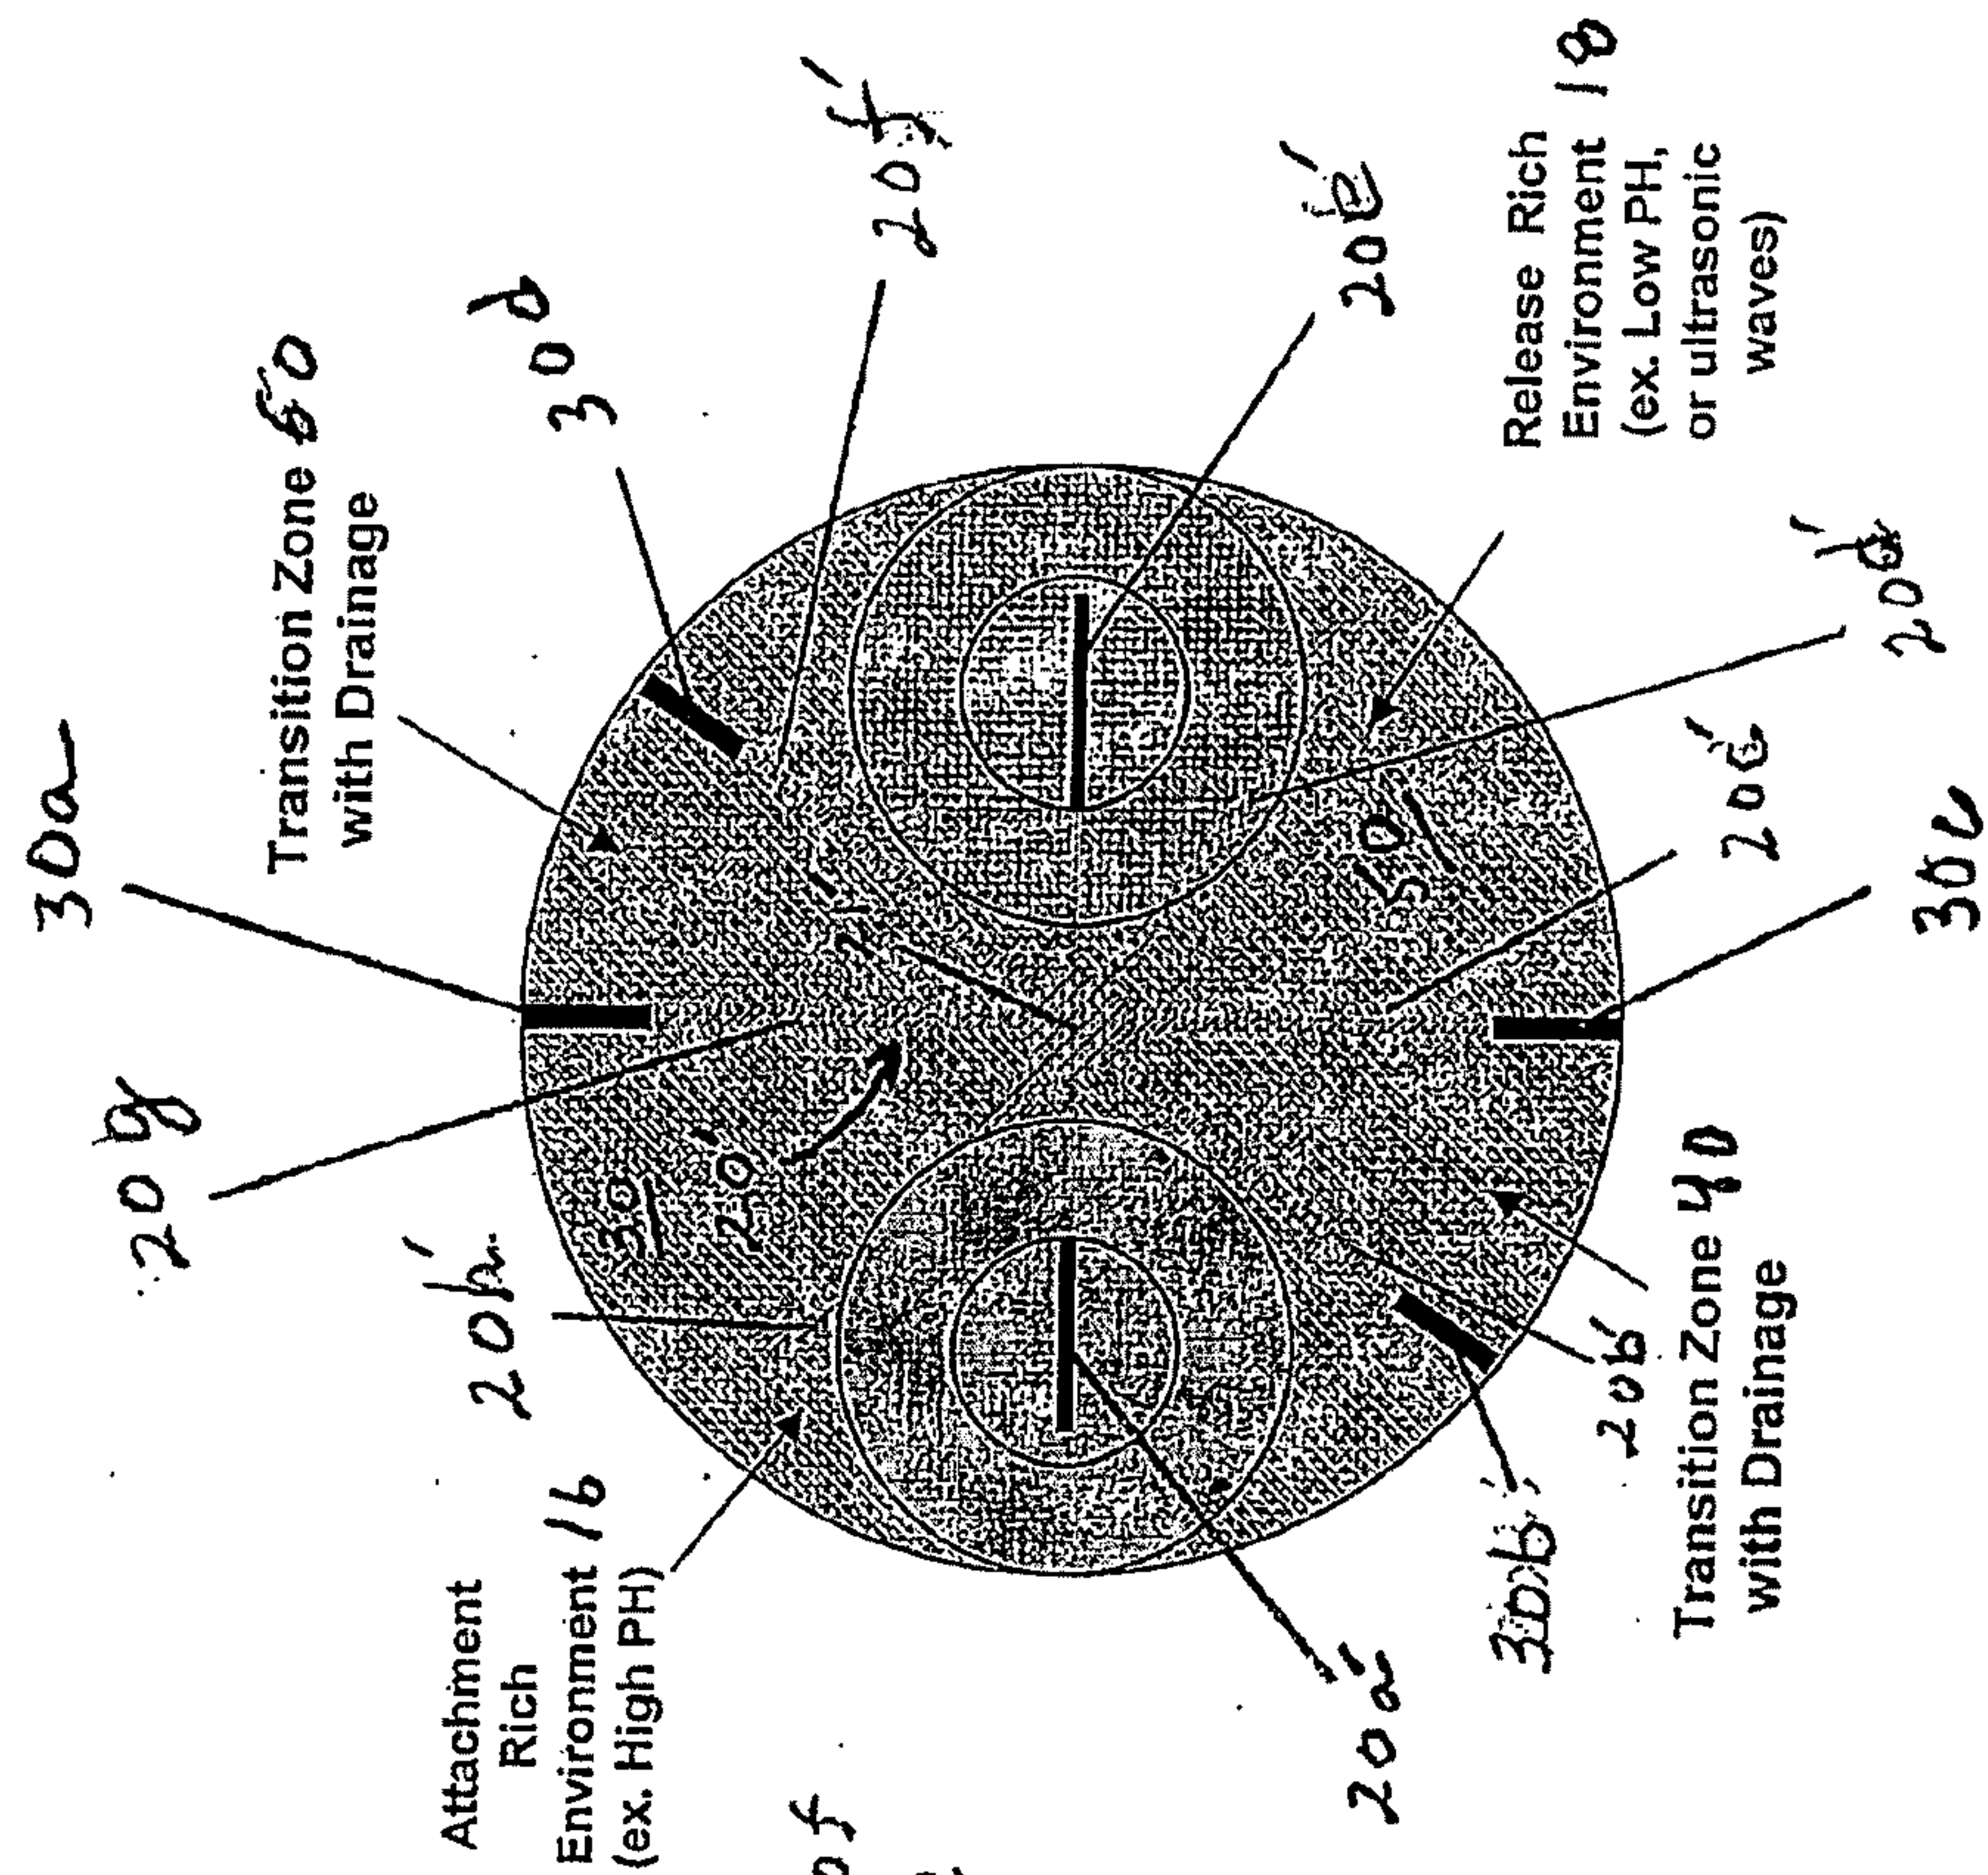


Figure 1b (PRIOR ART)

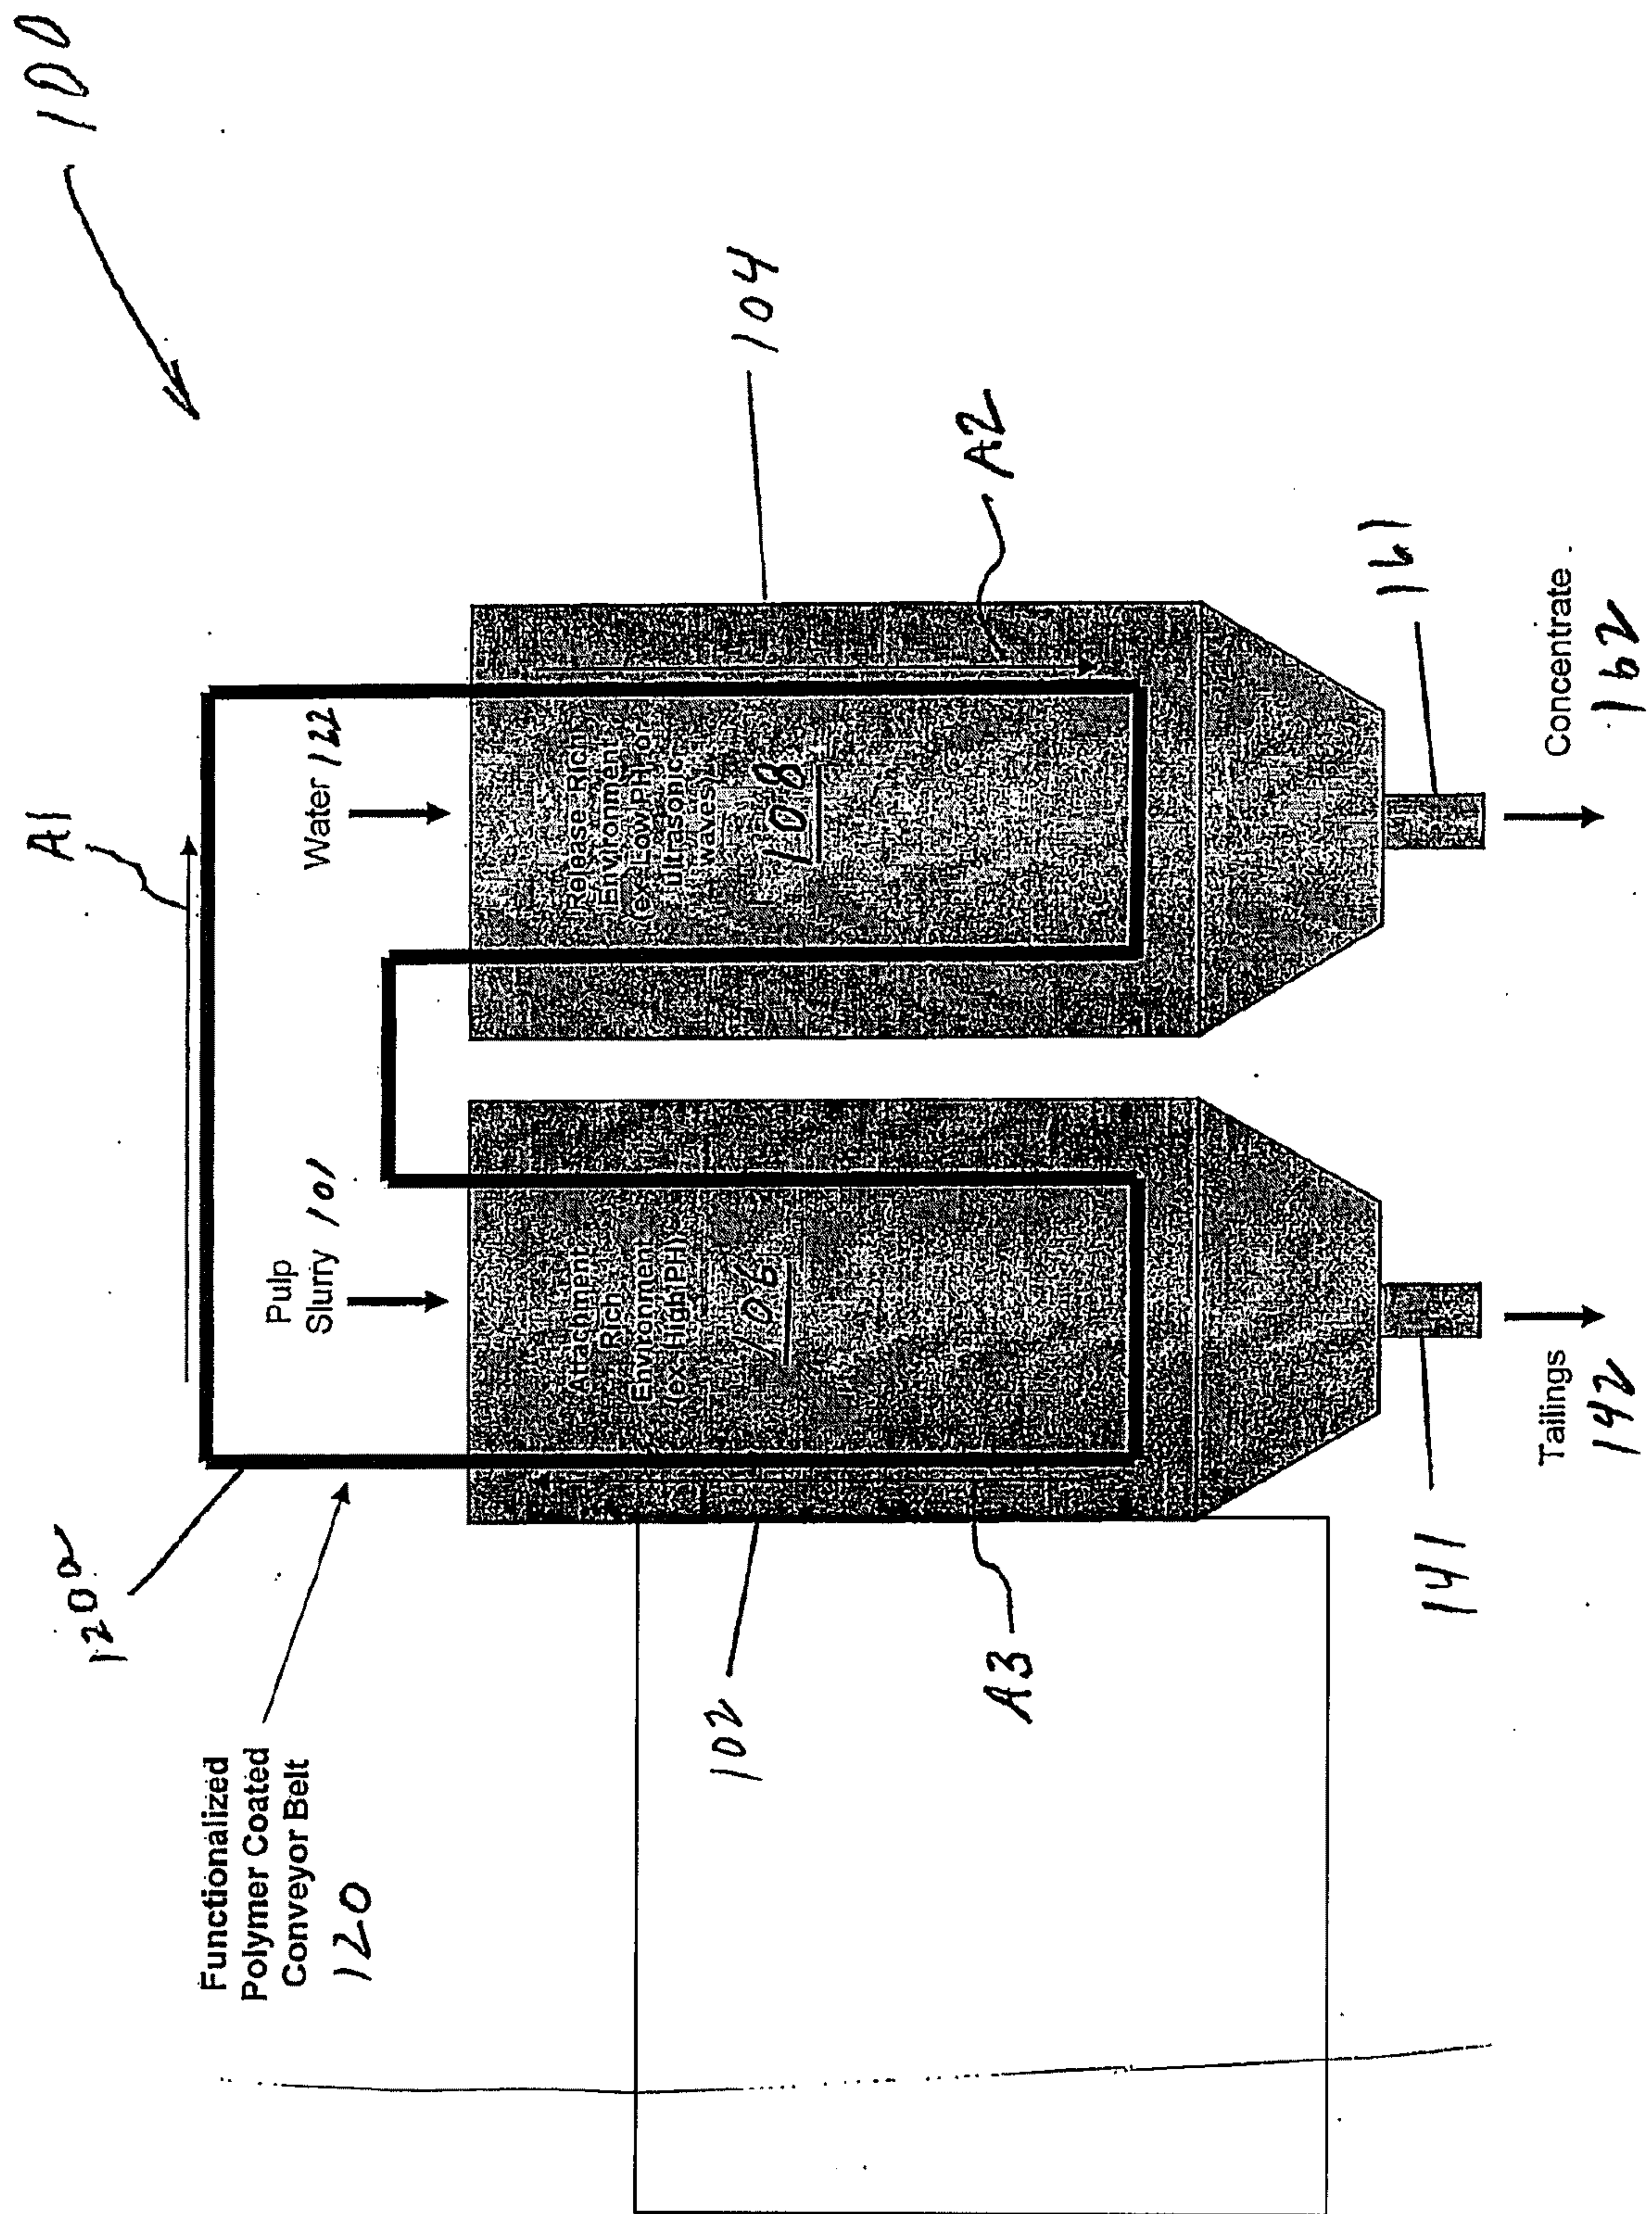


Figure 2 (PRIOR ART)

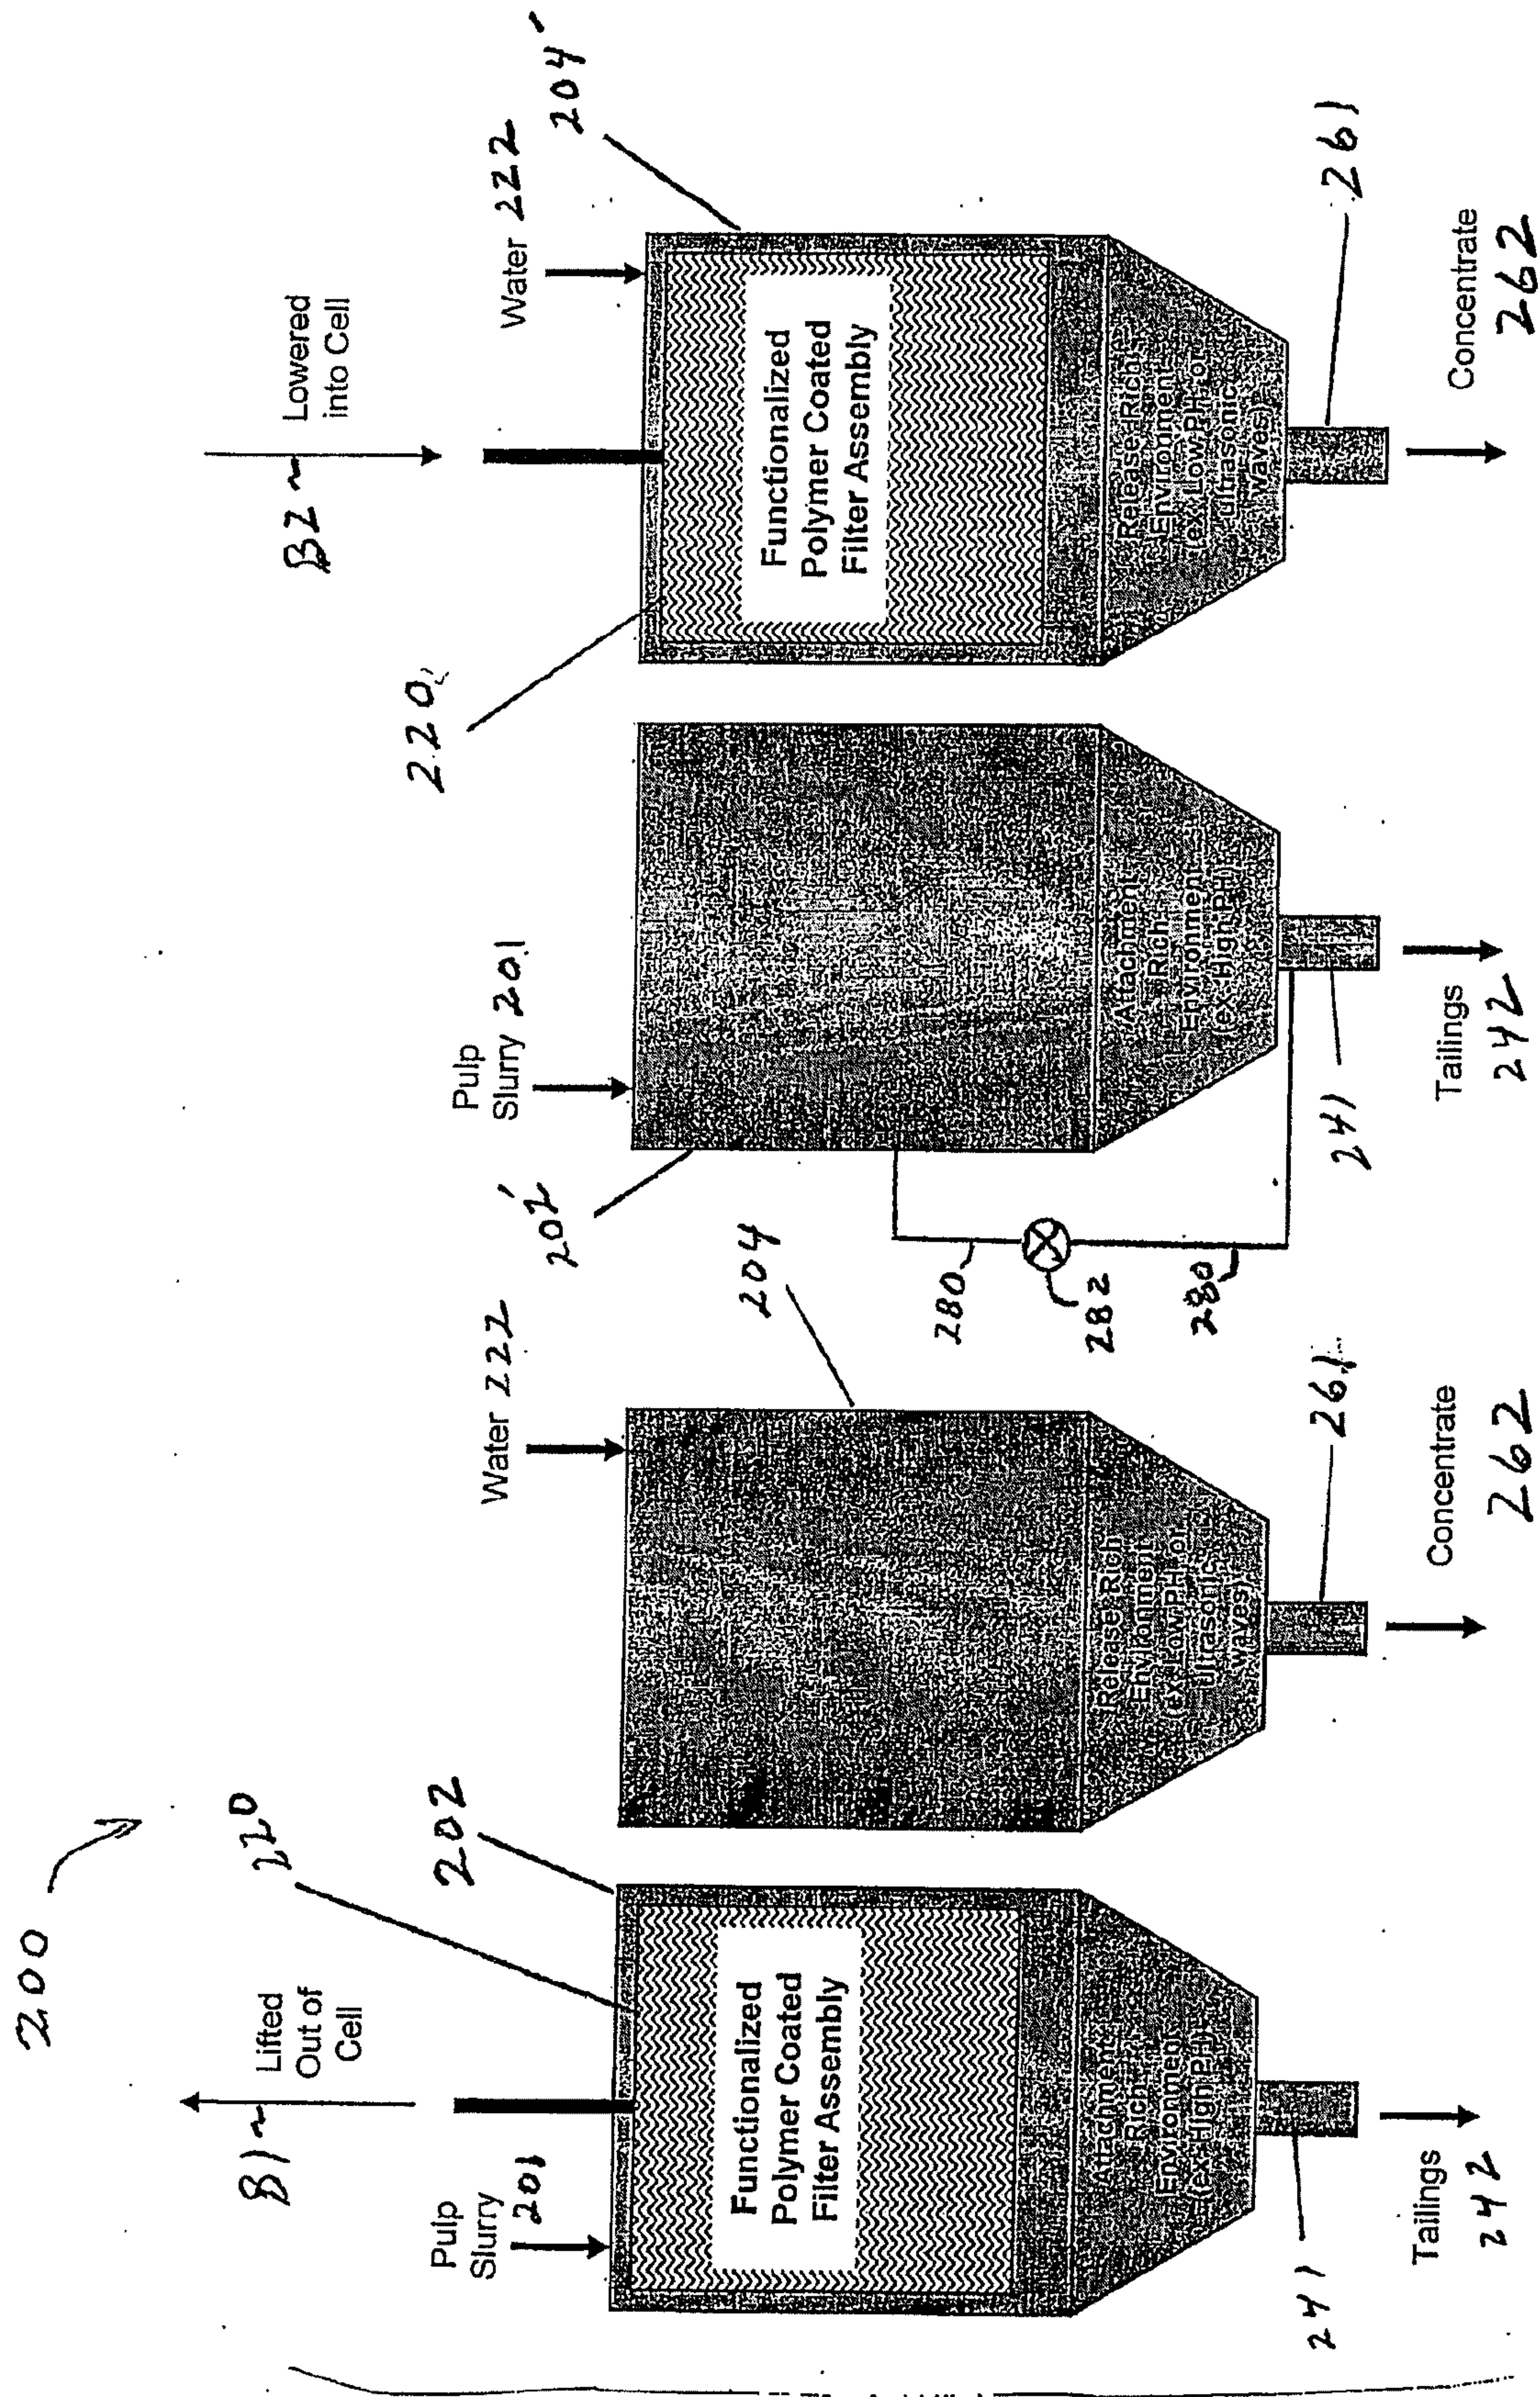


Figure 3 (PRIOR ART)

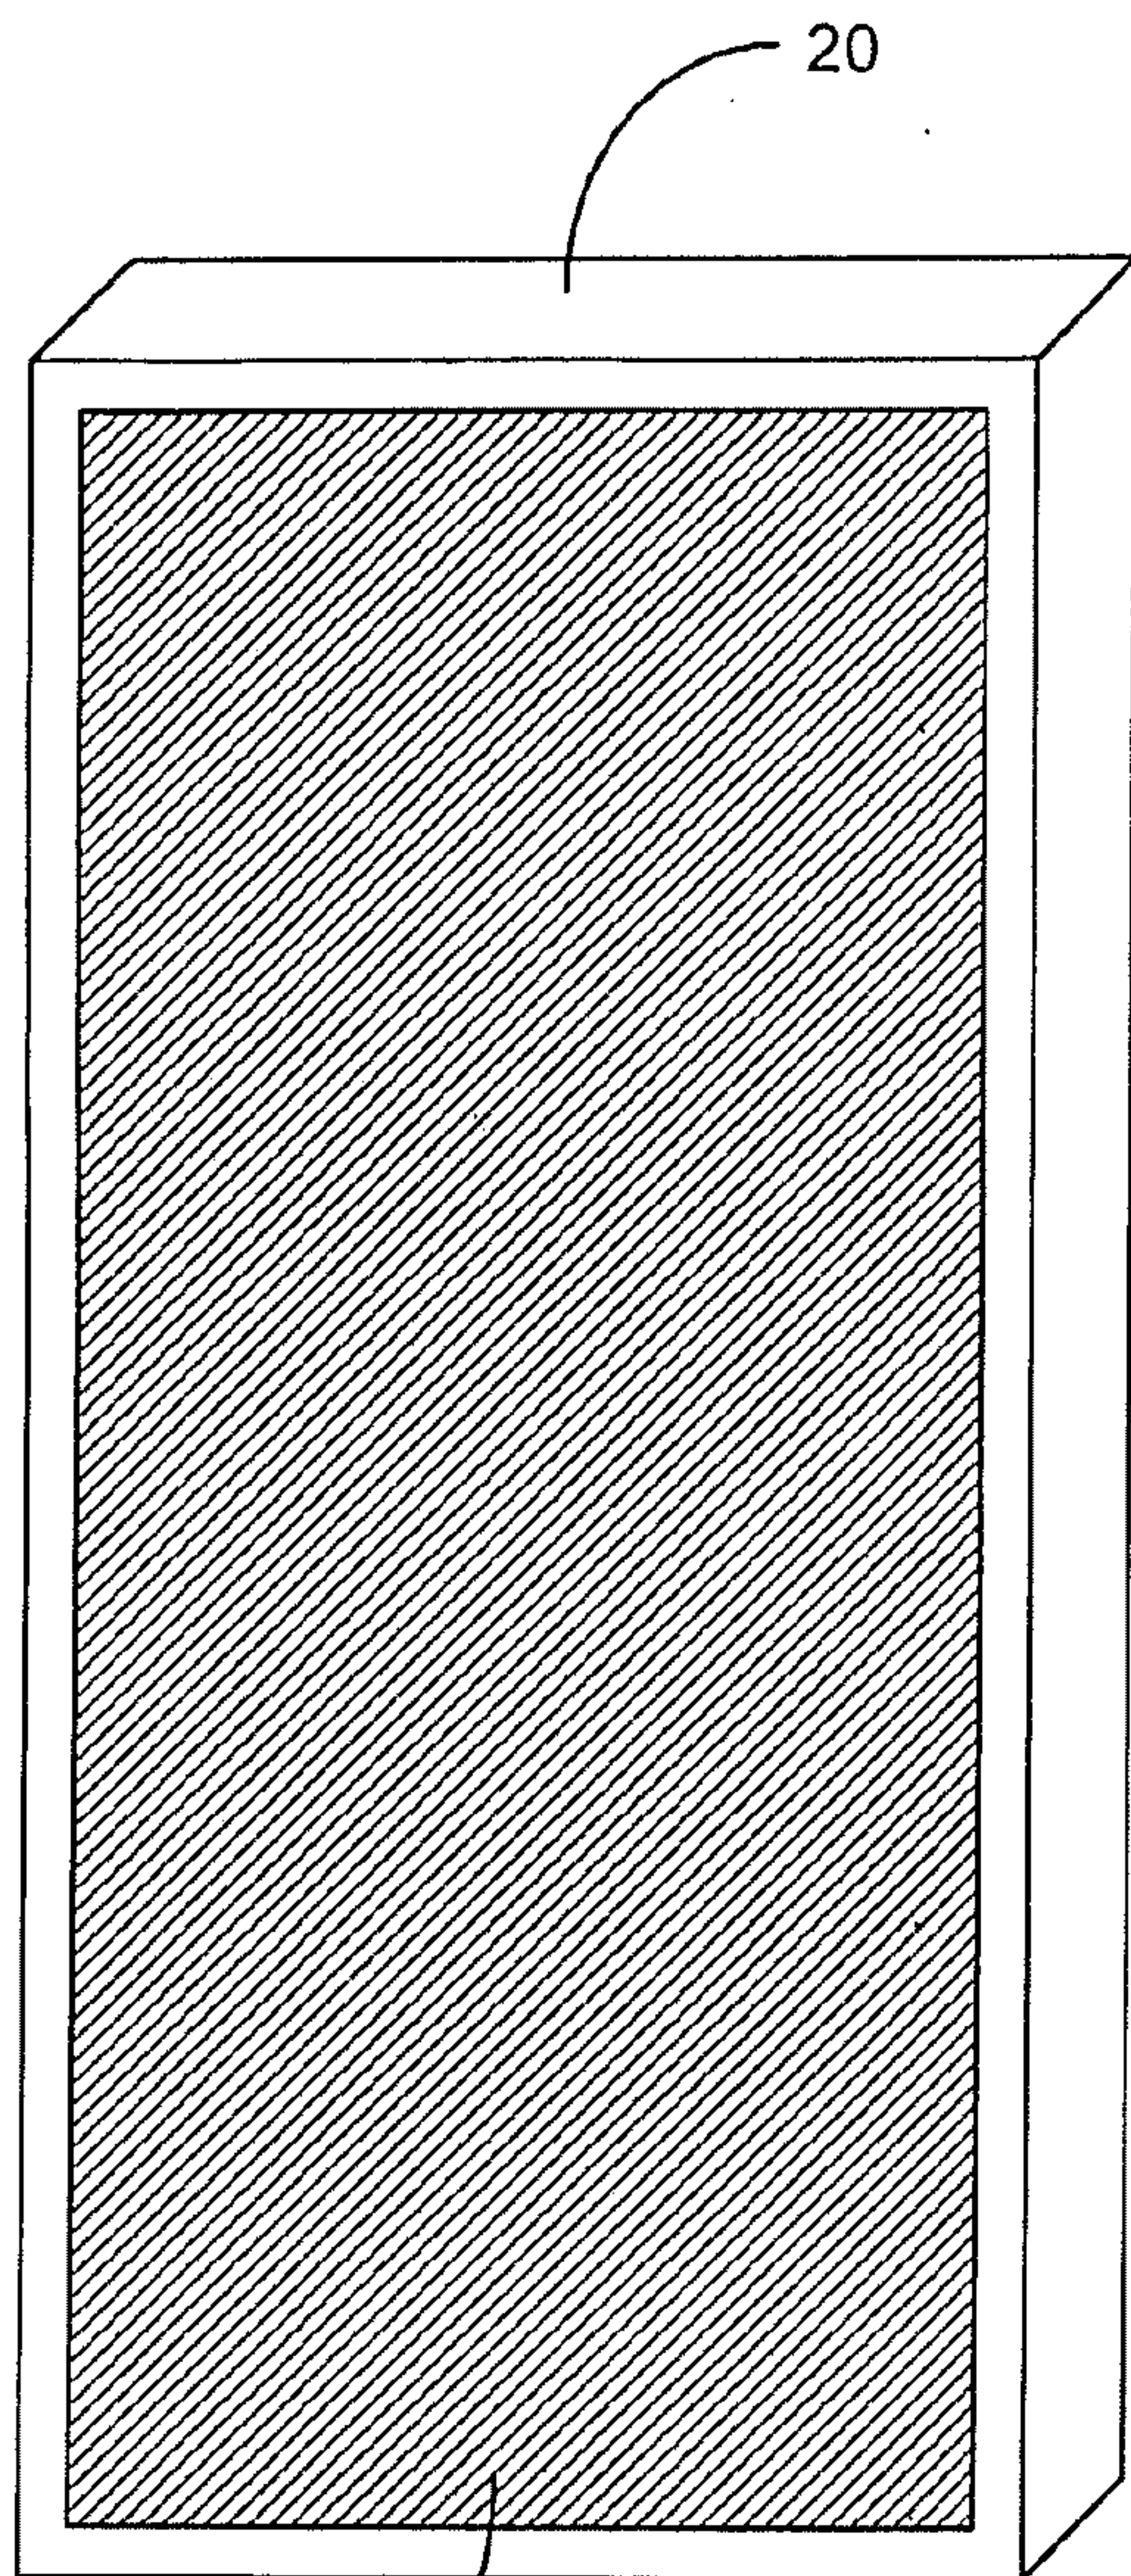


FIG. 4
(PRIOR ART)

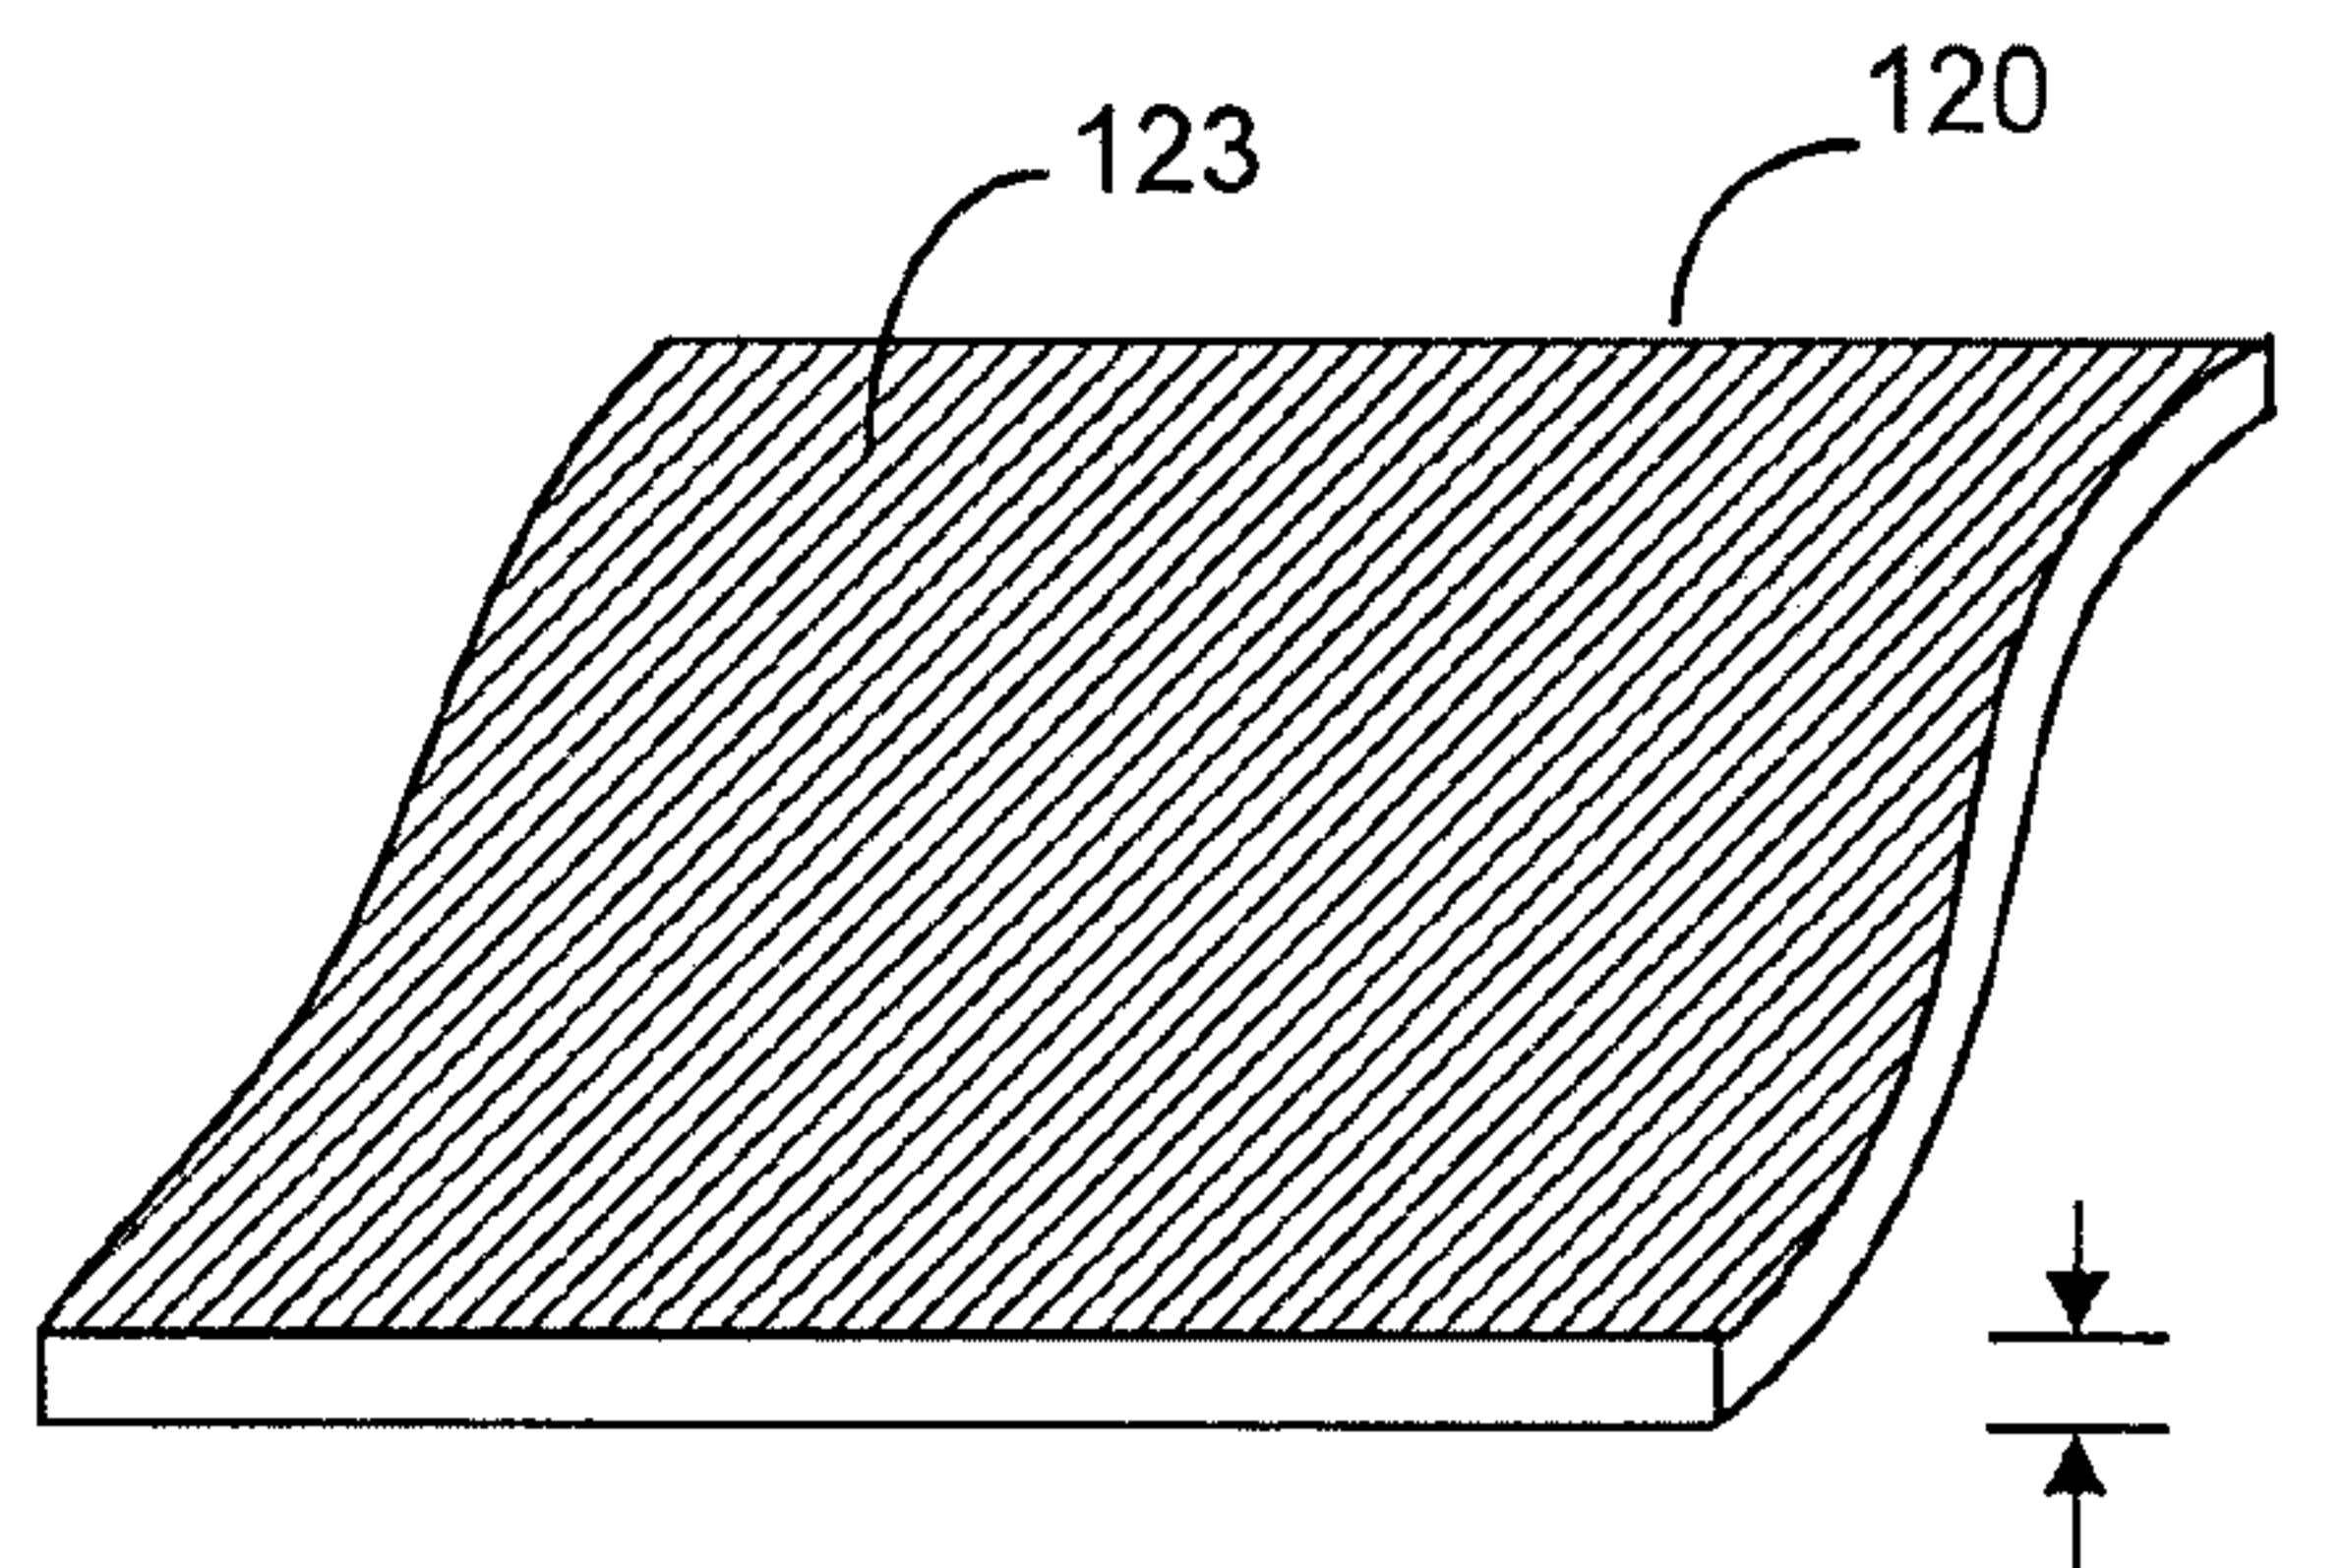


FIG. 5
(PRIOR ART)

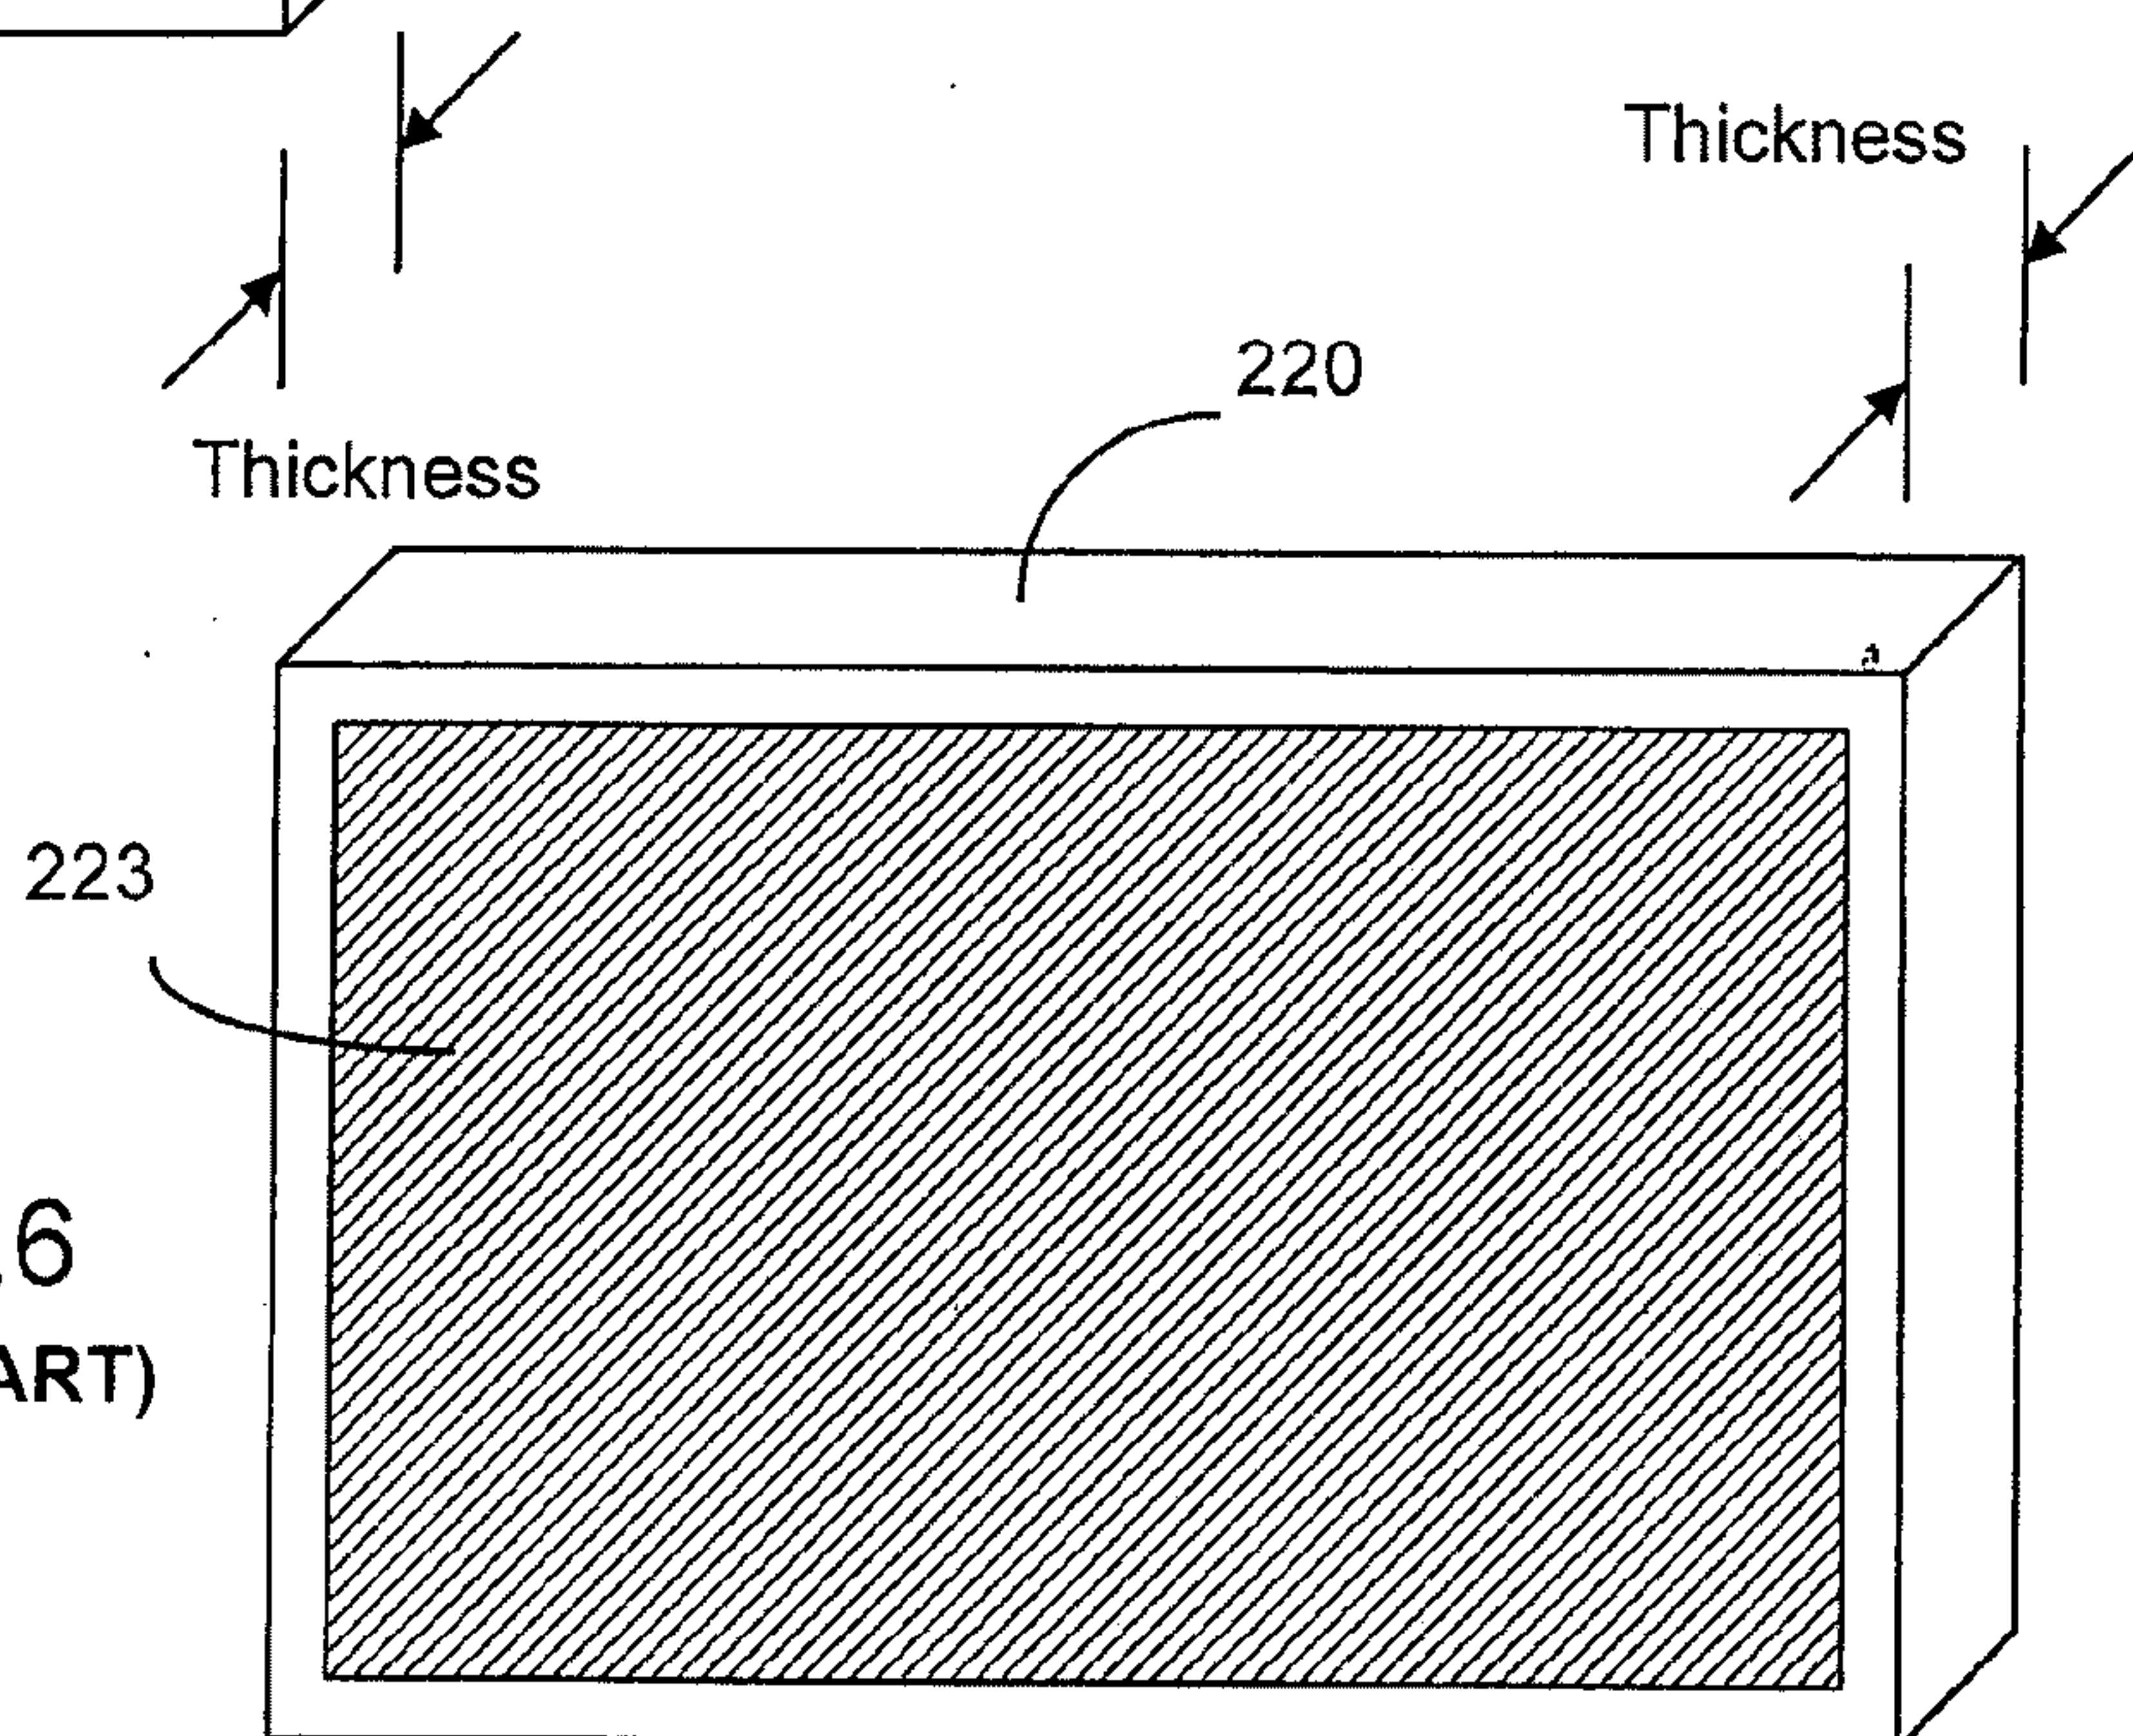


FIG. 6
(PRIOR ART)

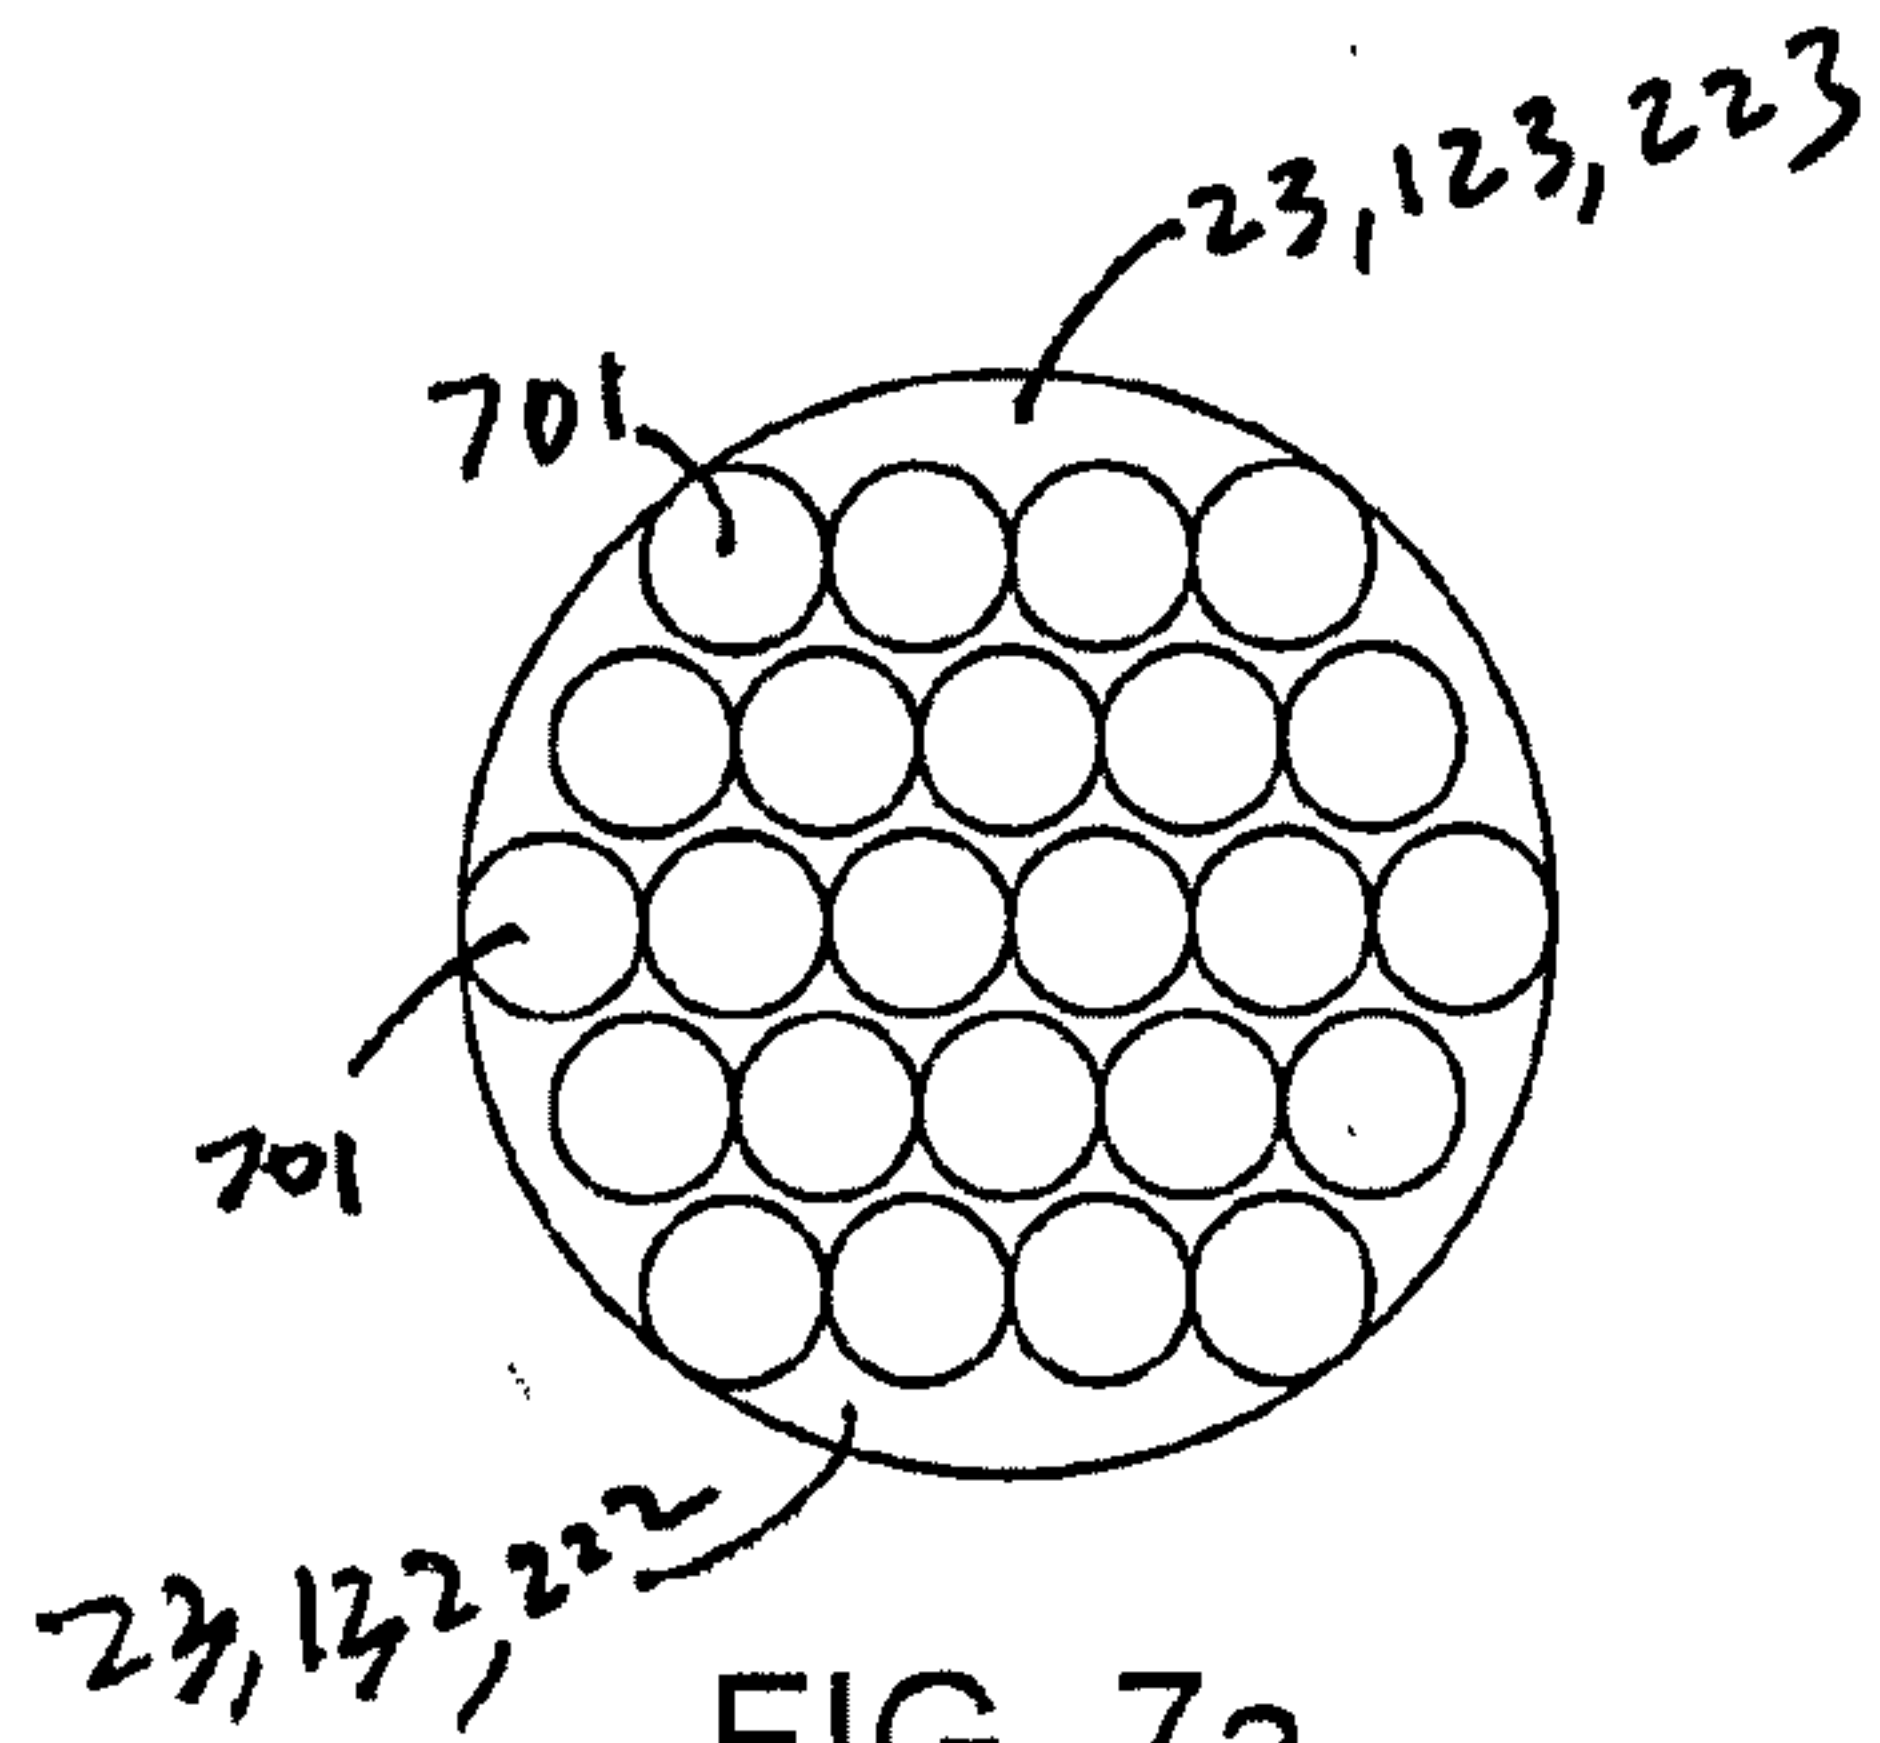


FIG. 7a
(PRIOR ART)

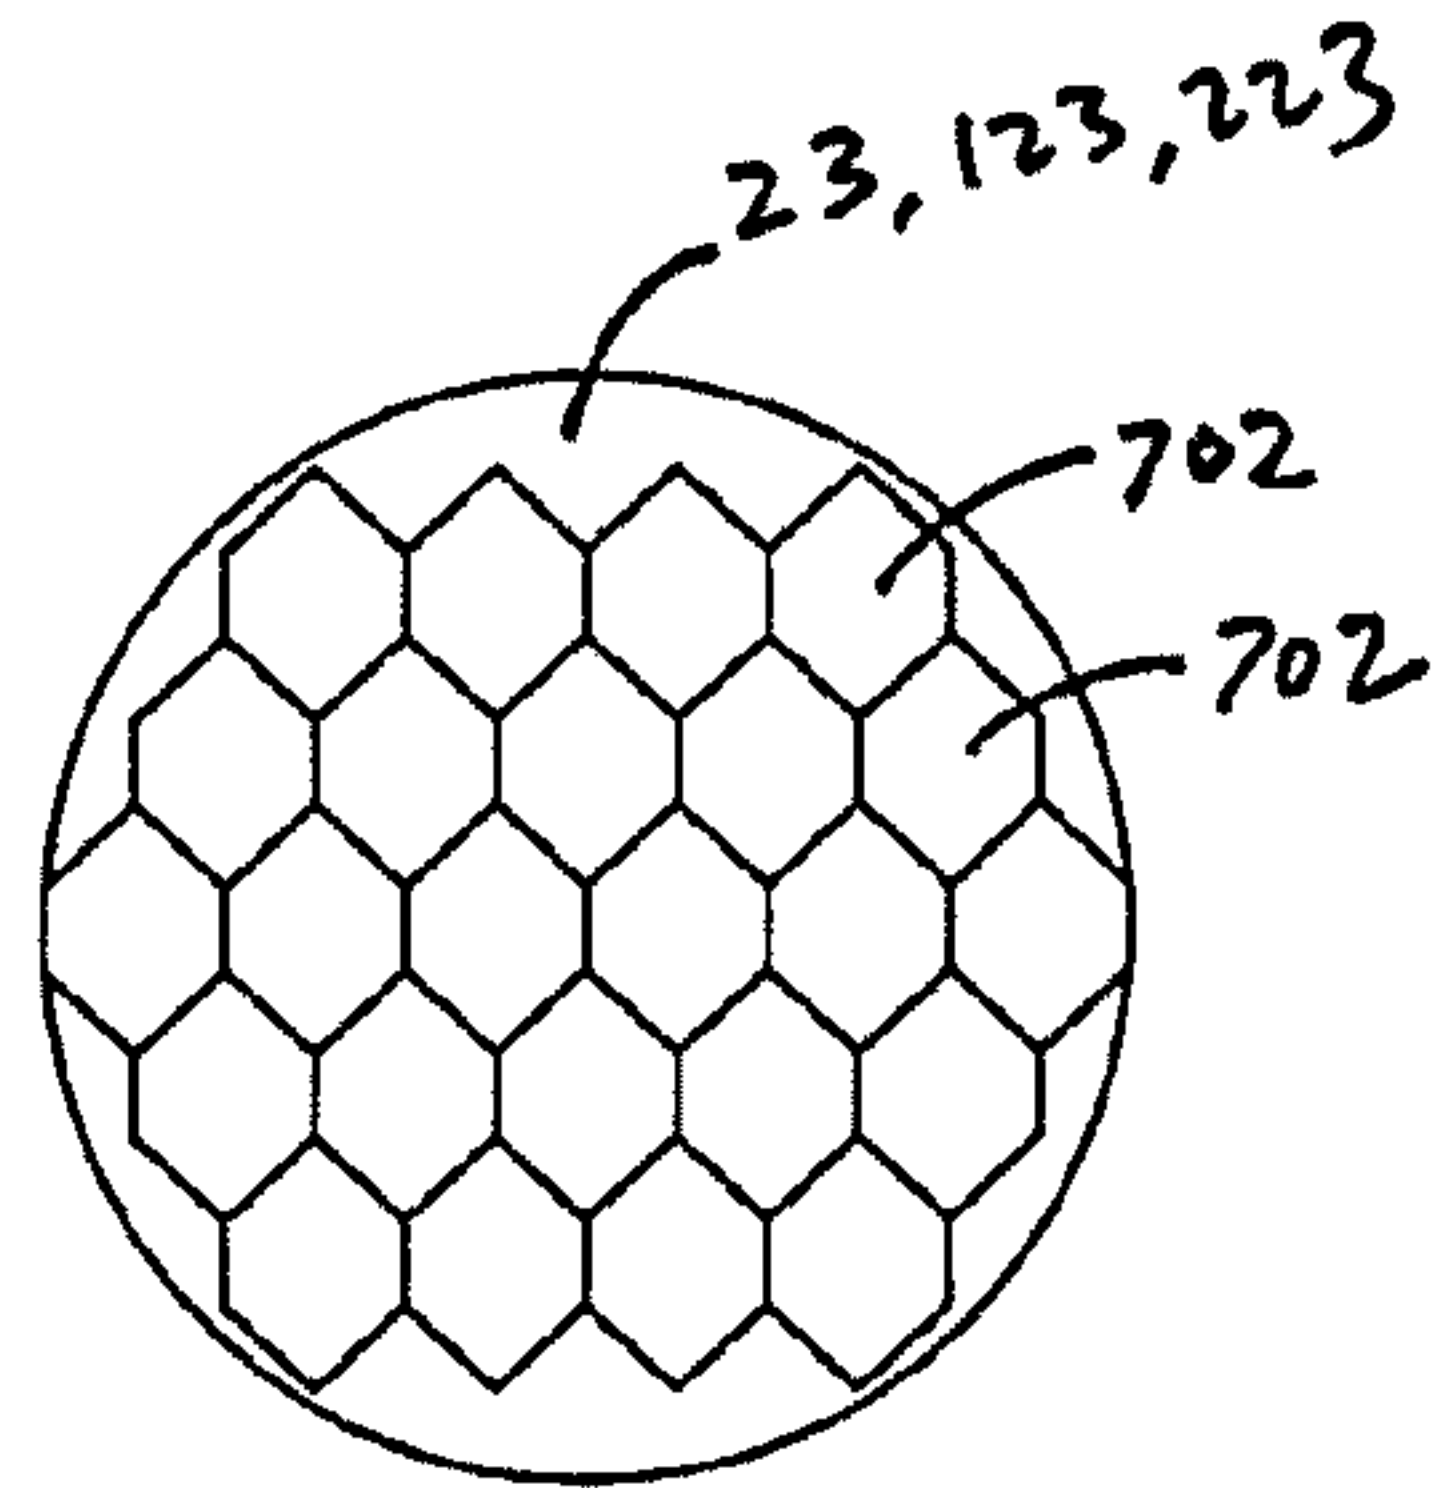


FIG. 7b
(PRIOR ART)

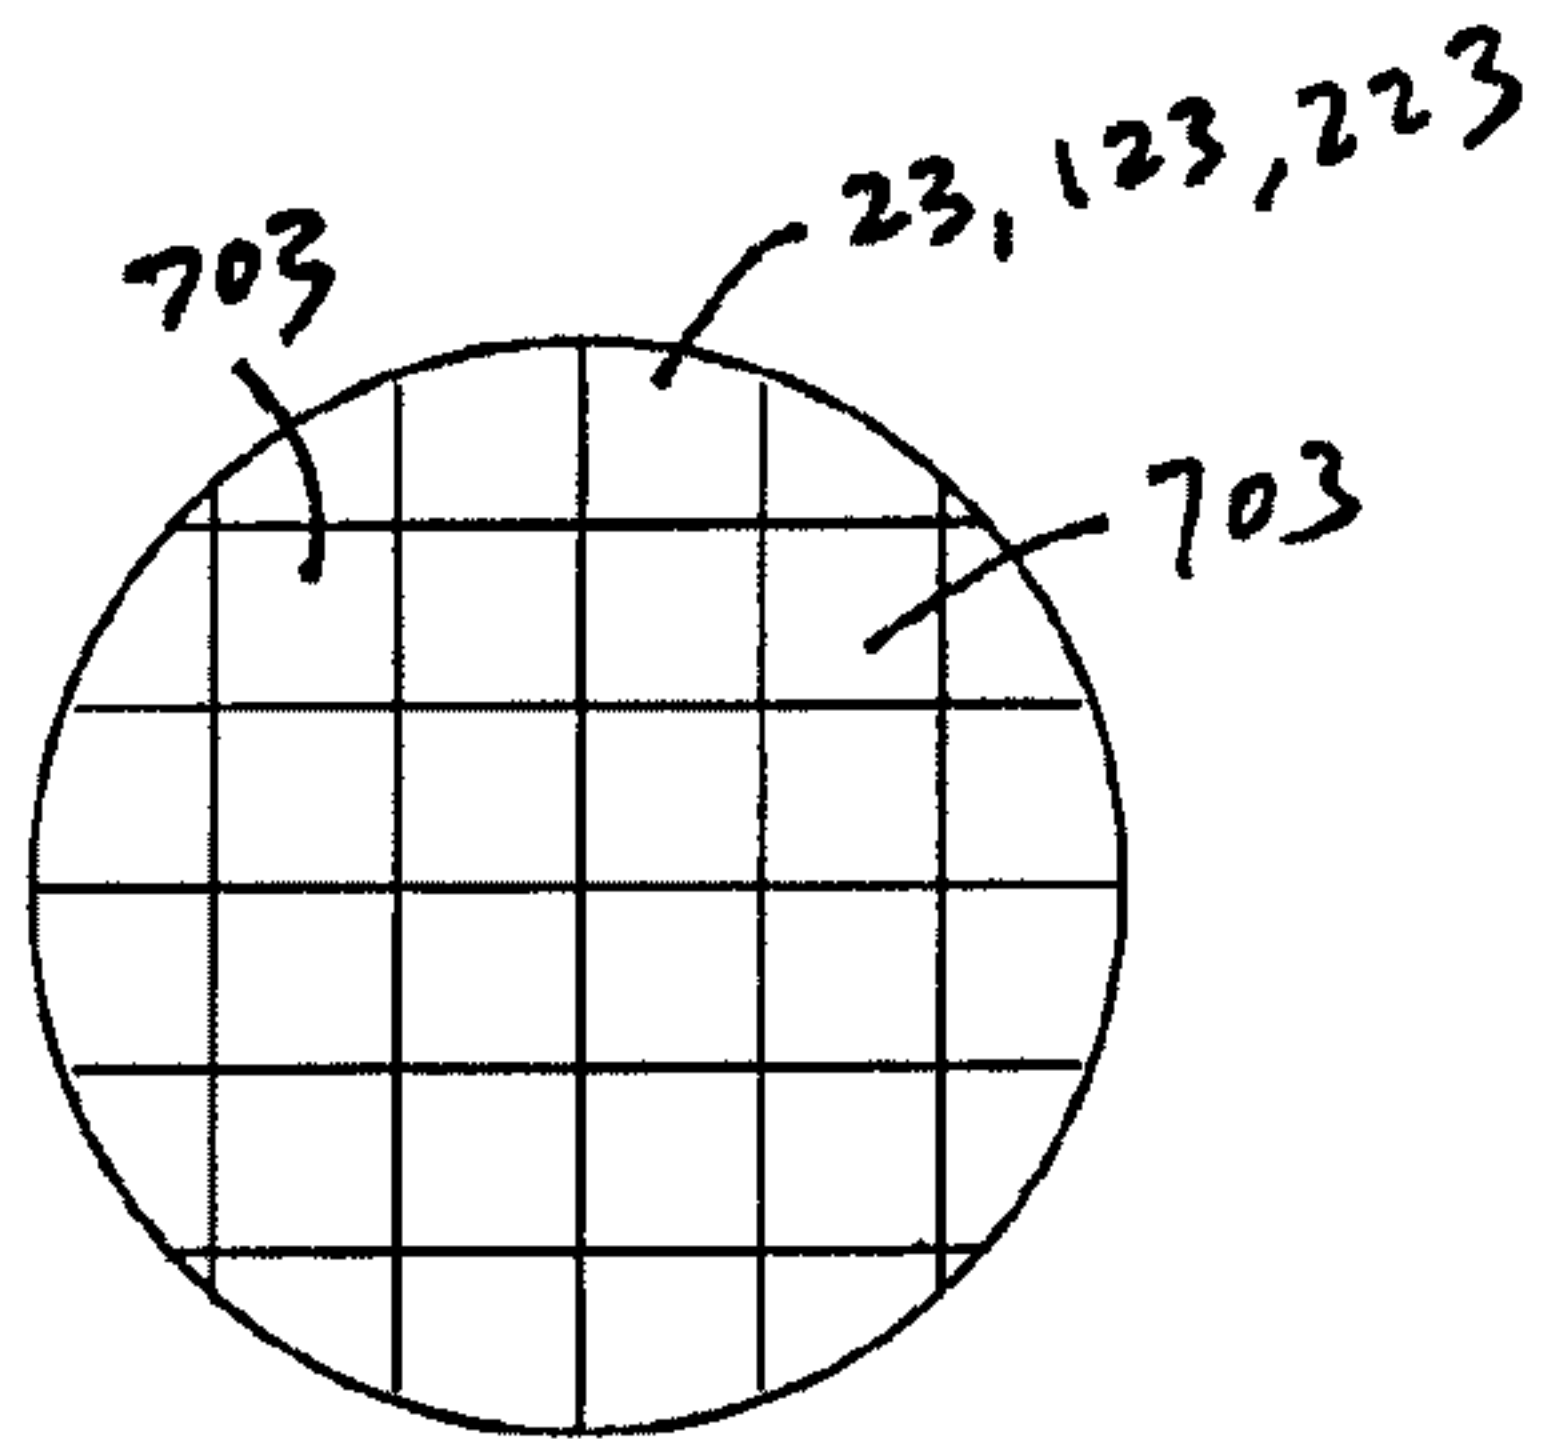


FIG. 7c
(PRIOR ART)

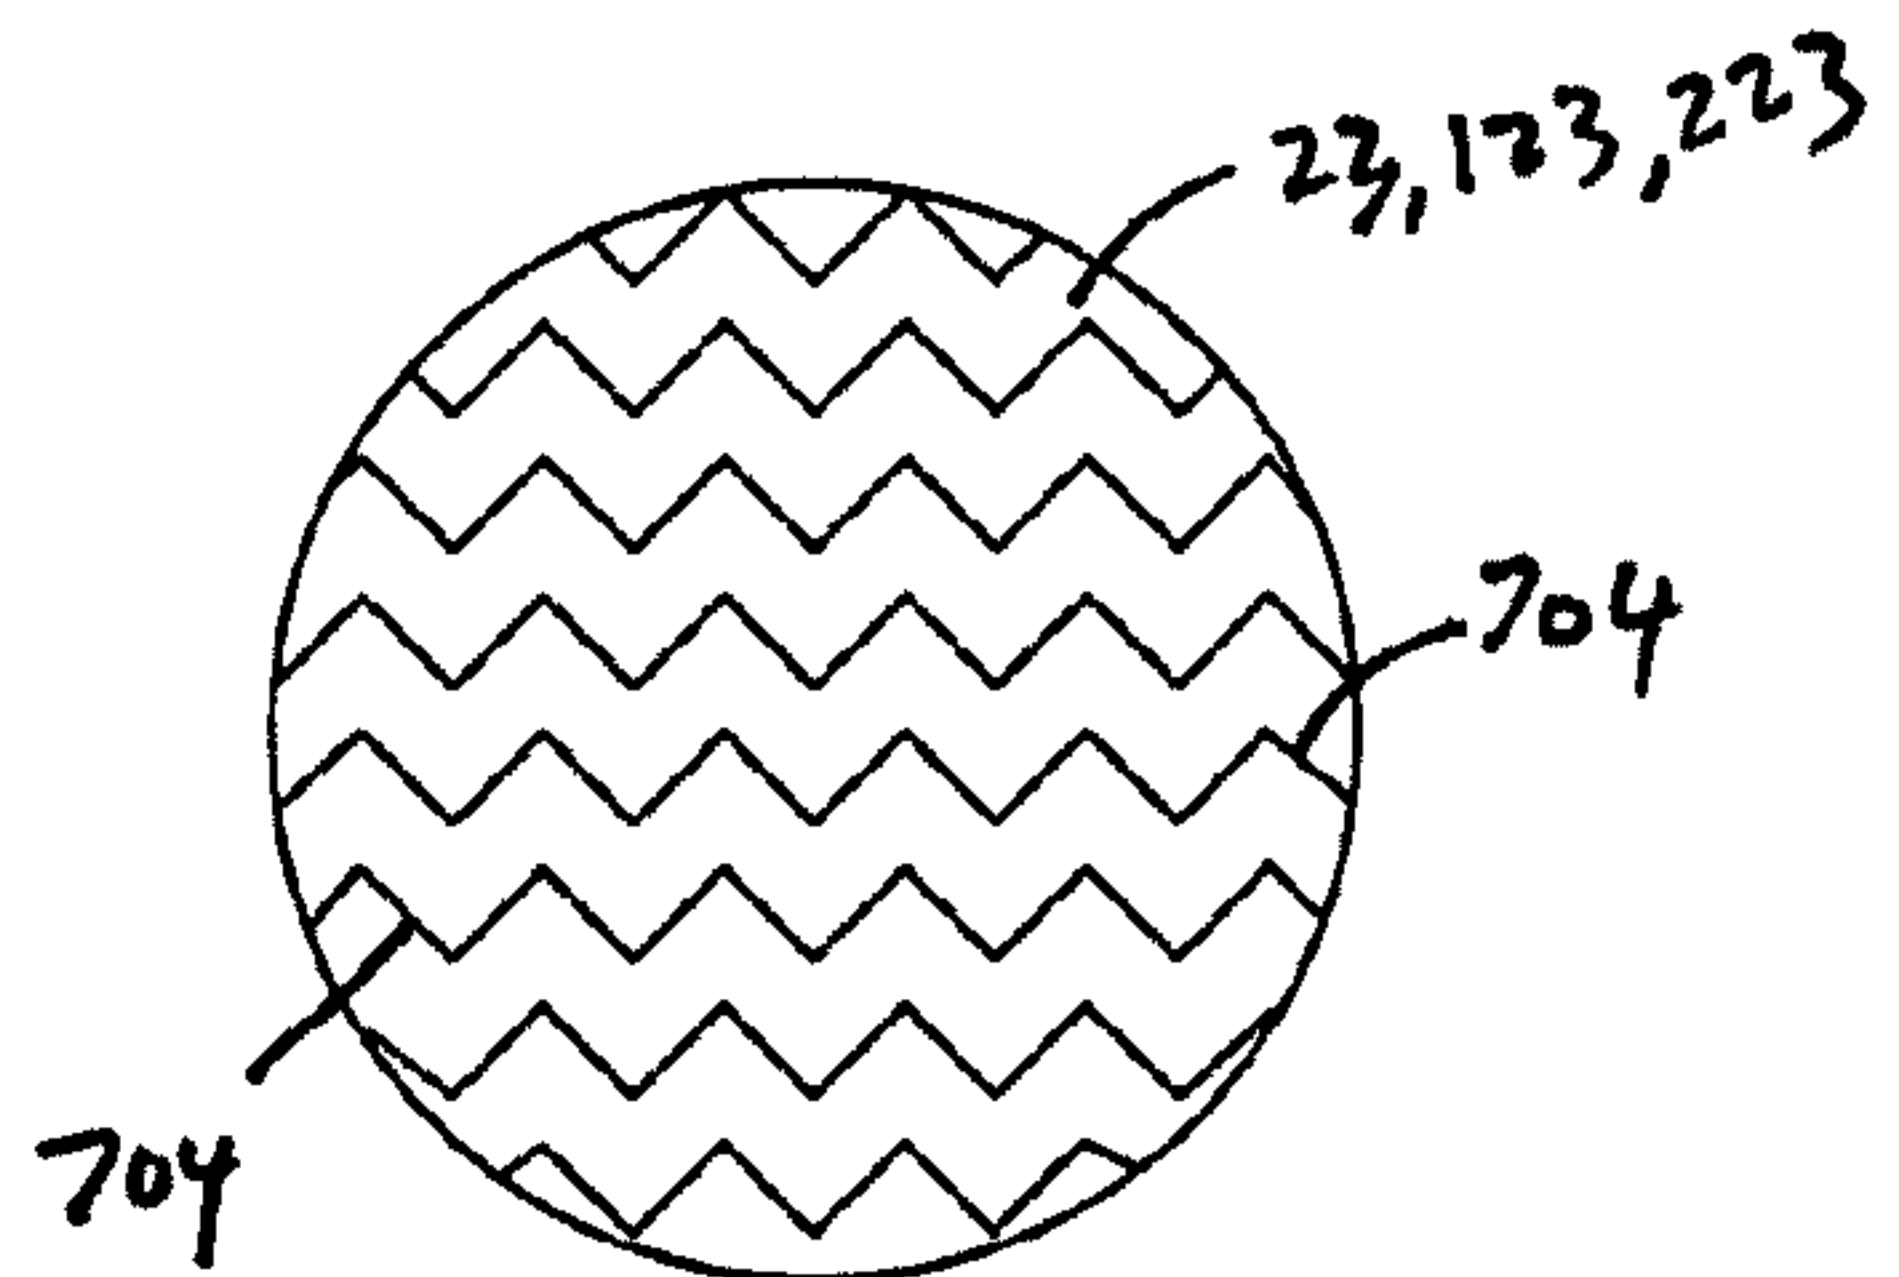


FIG. 7d
(PRIOR ART)

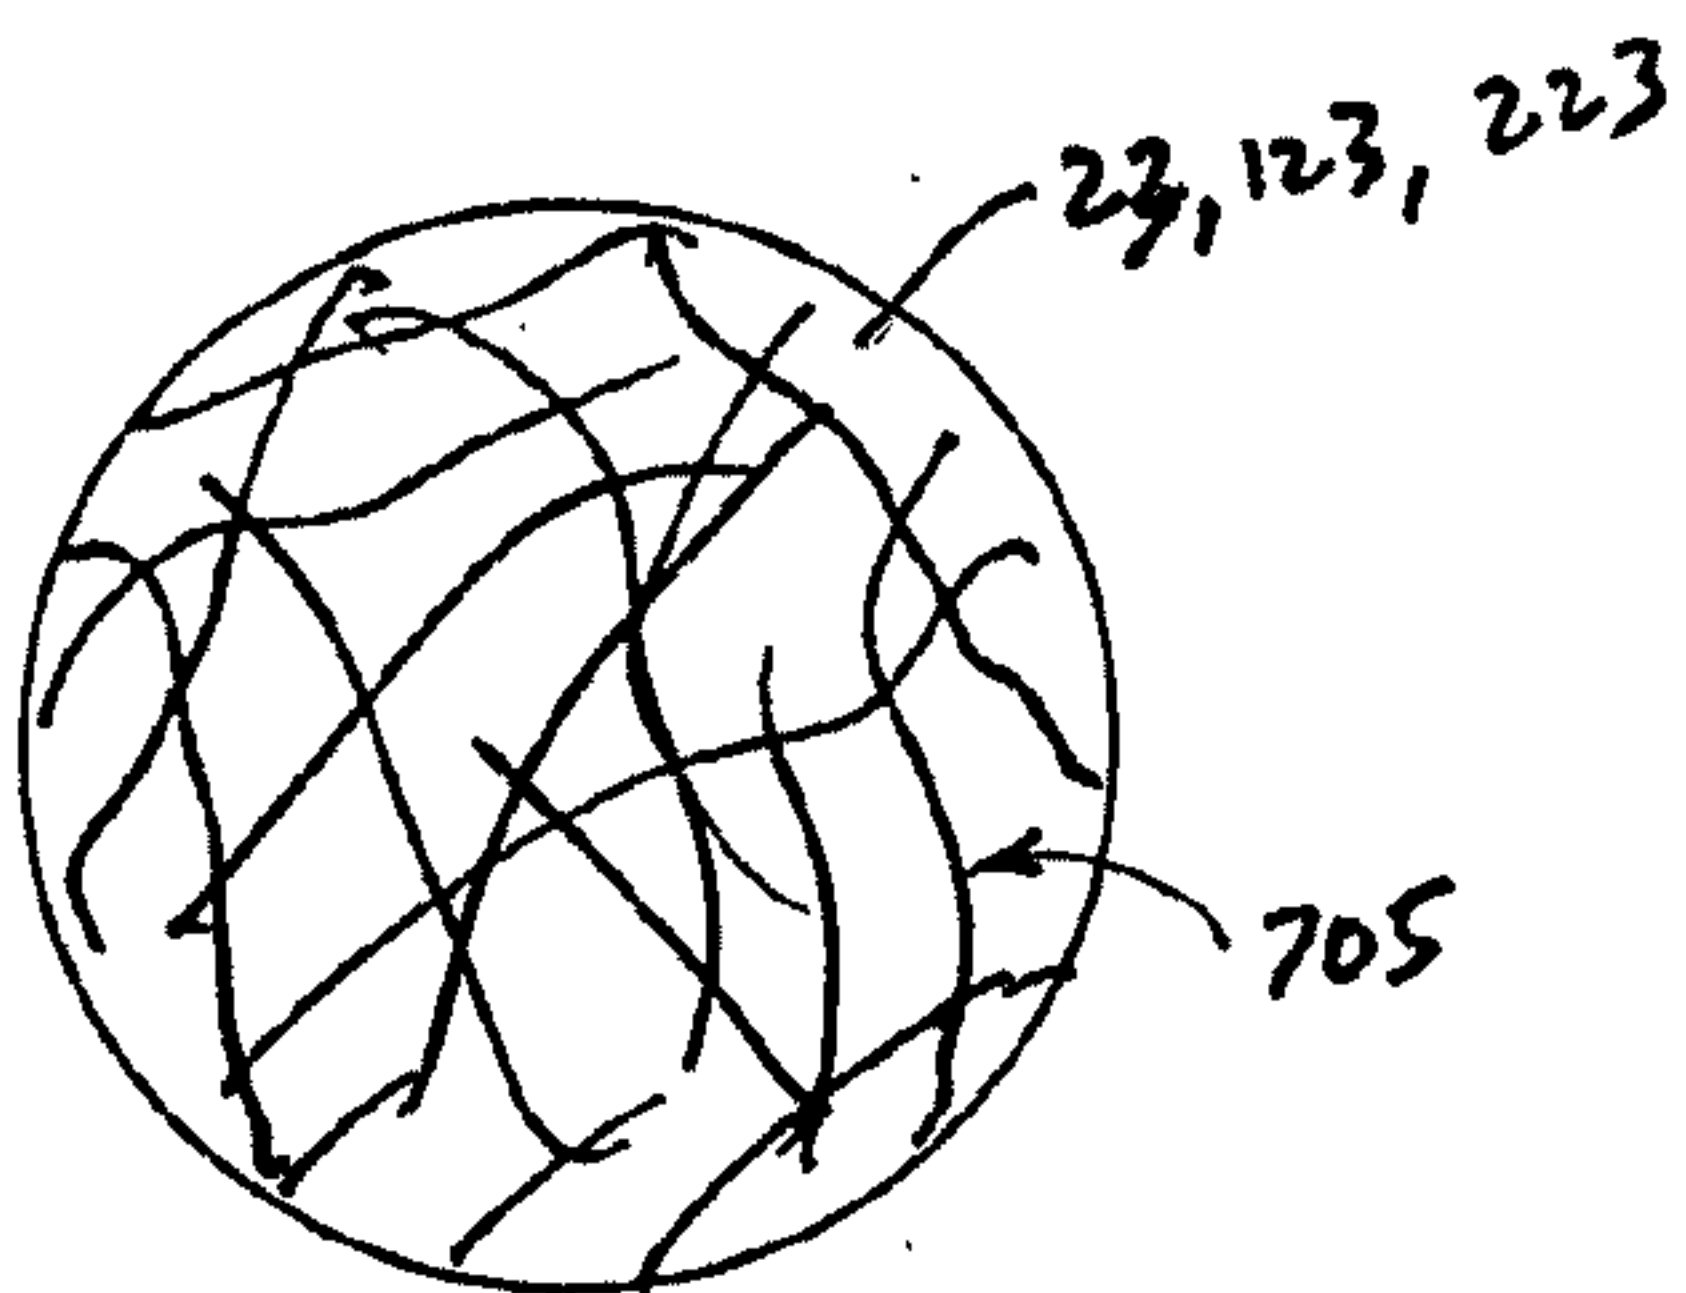


FIG. 7e
(PRIOR ART)

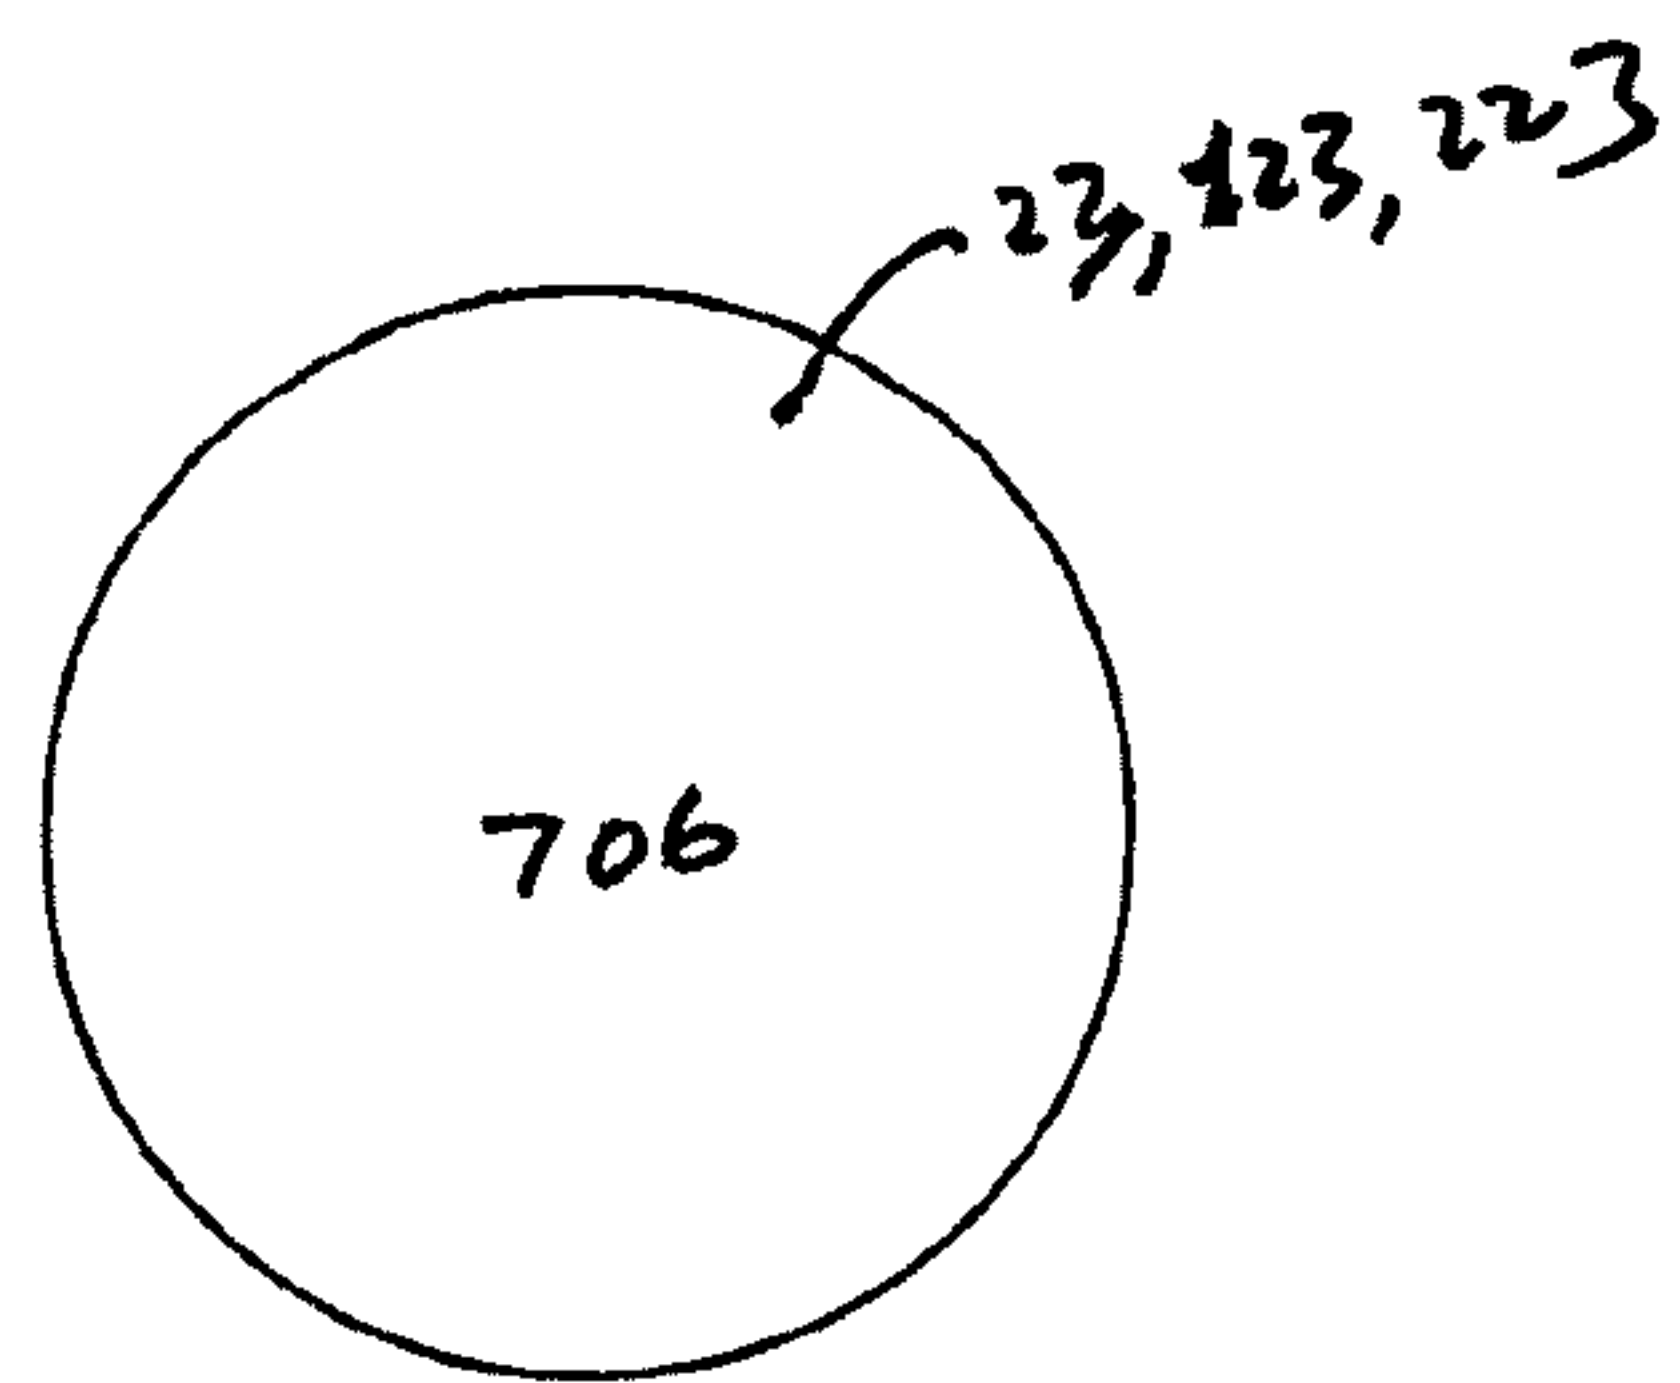


FIG. 7f
(PRIOR ART)

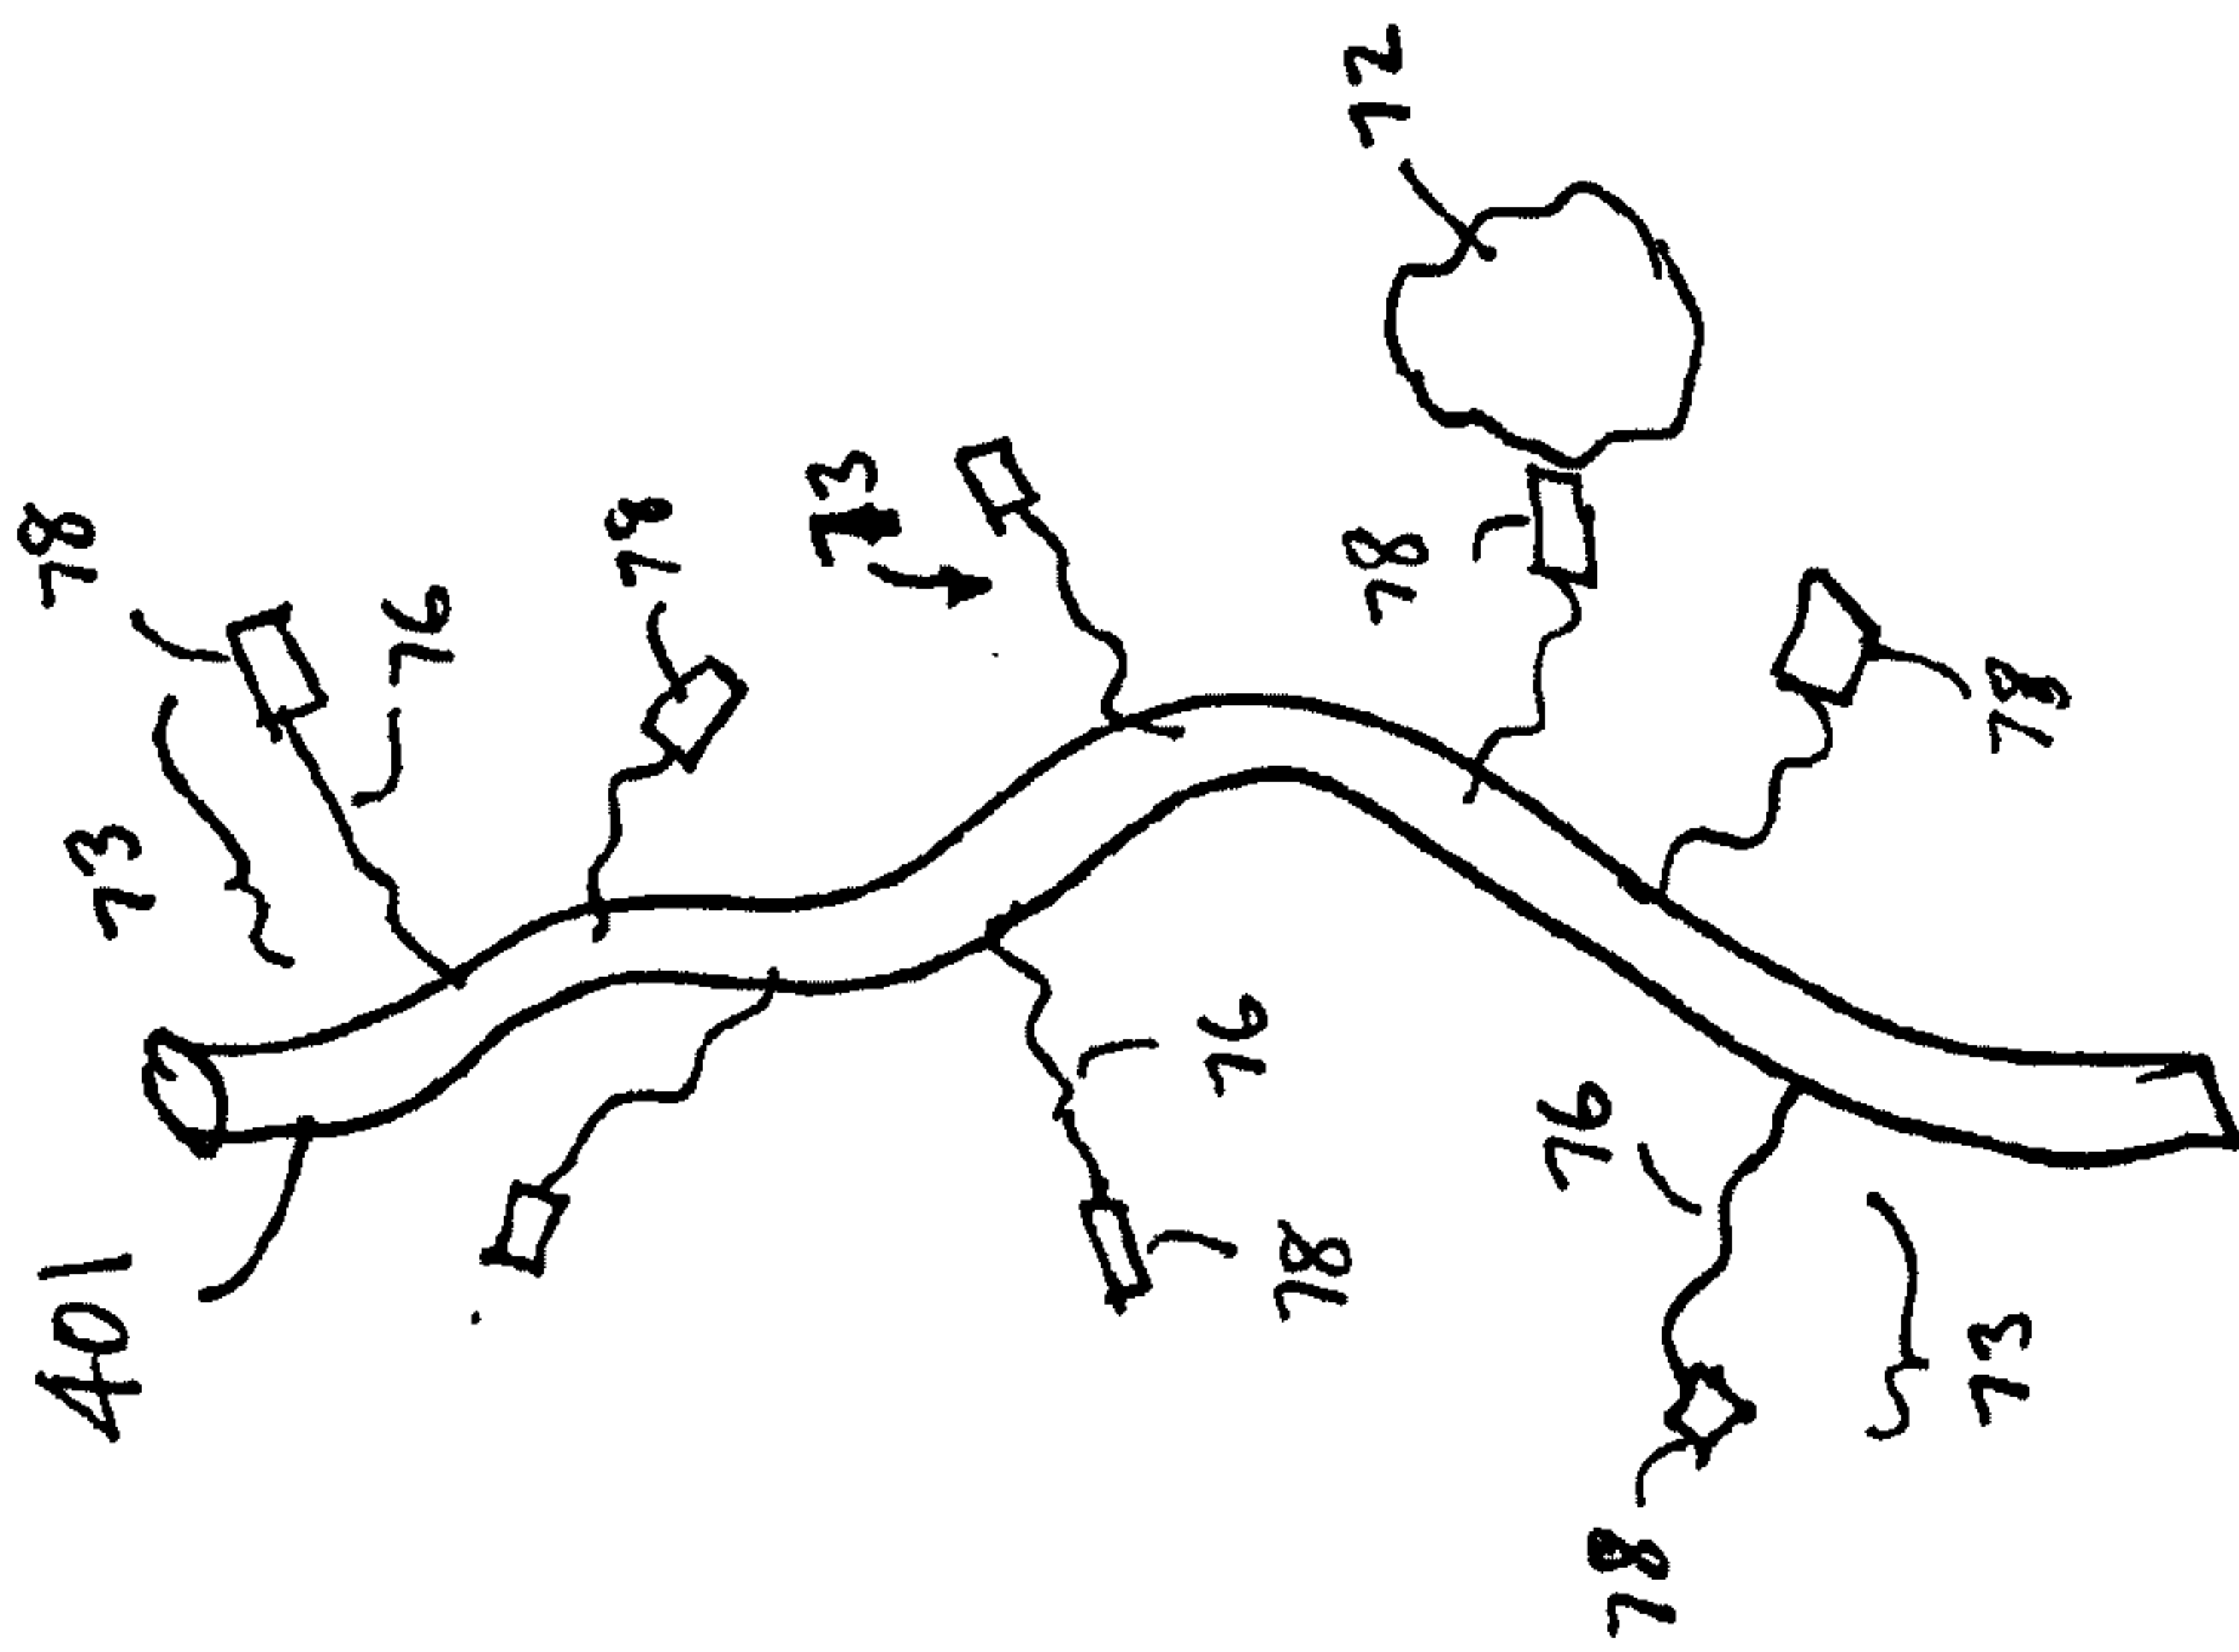


Fig. 8a
(PRIOR ART)

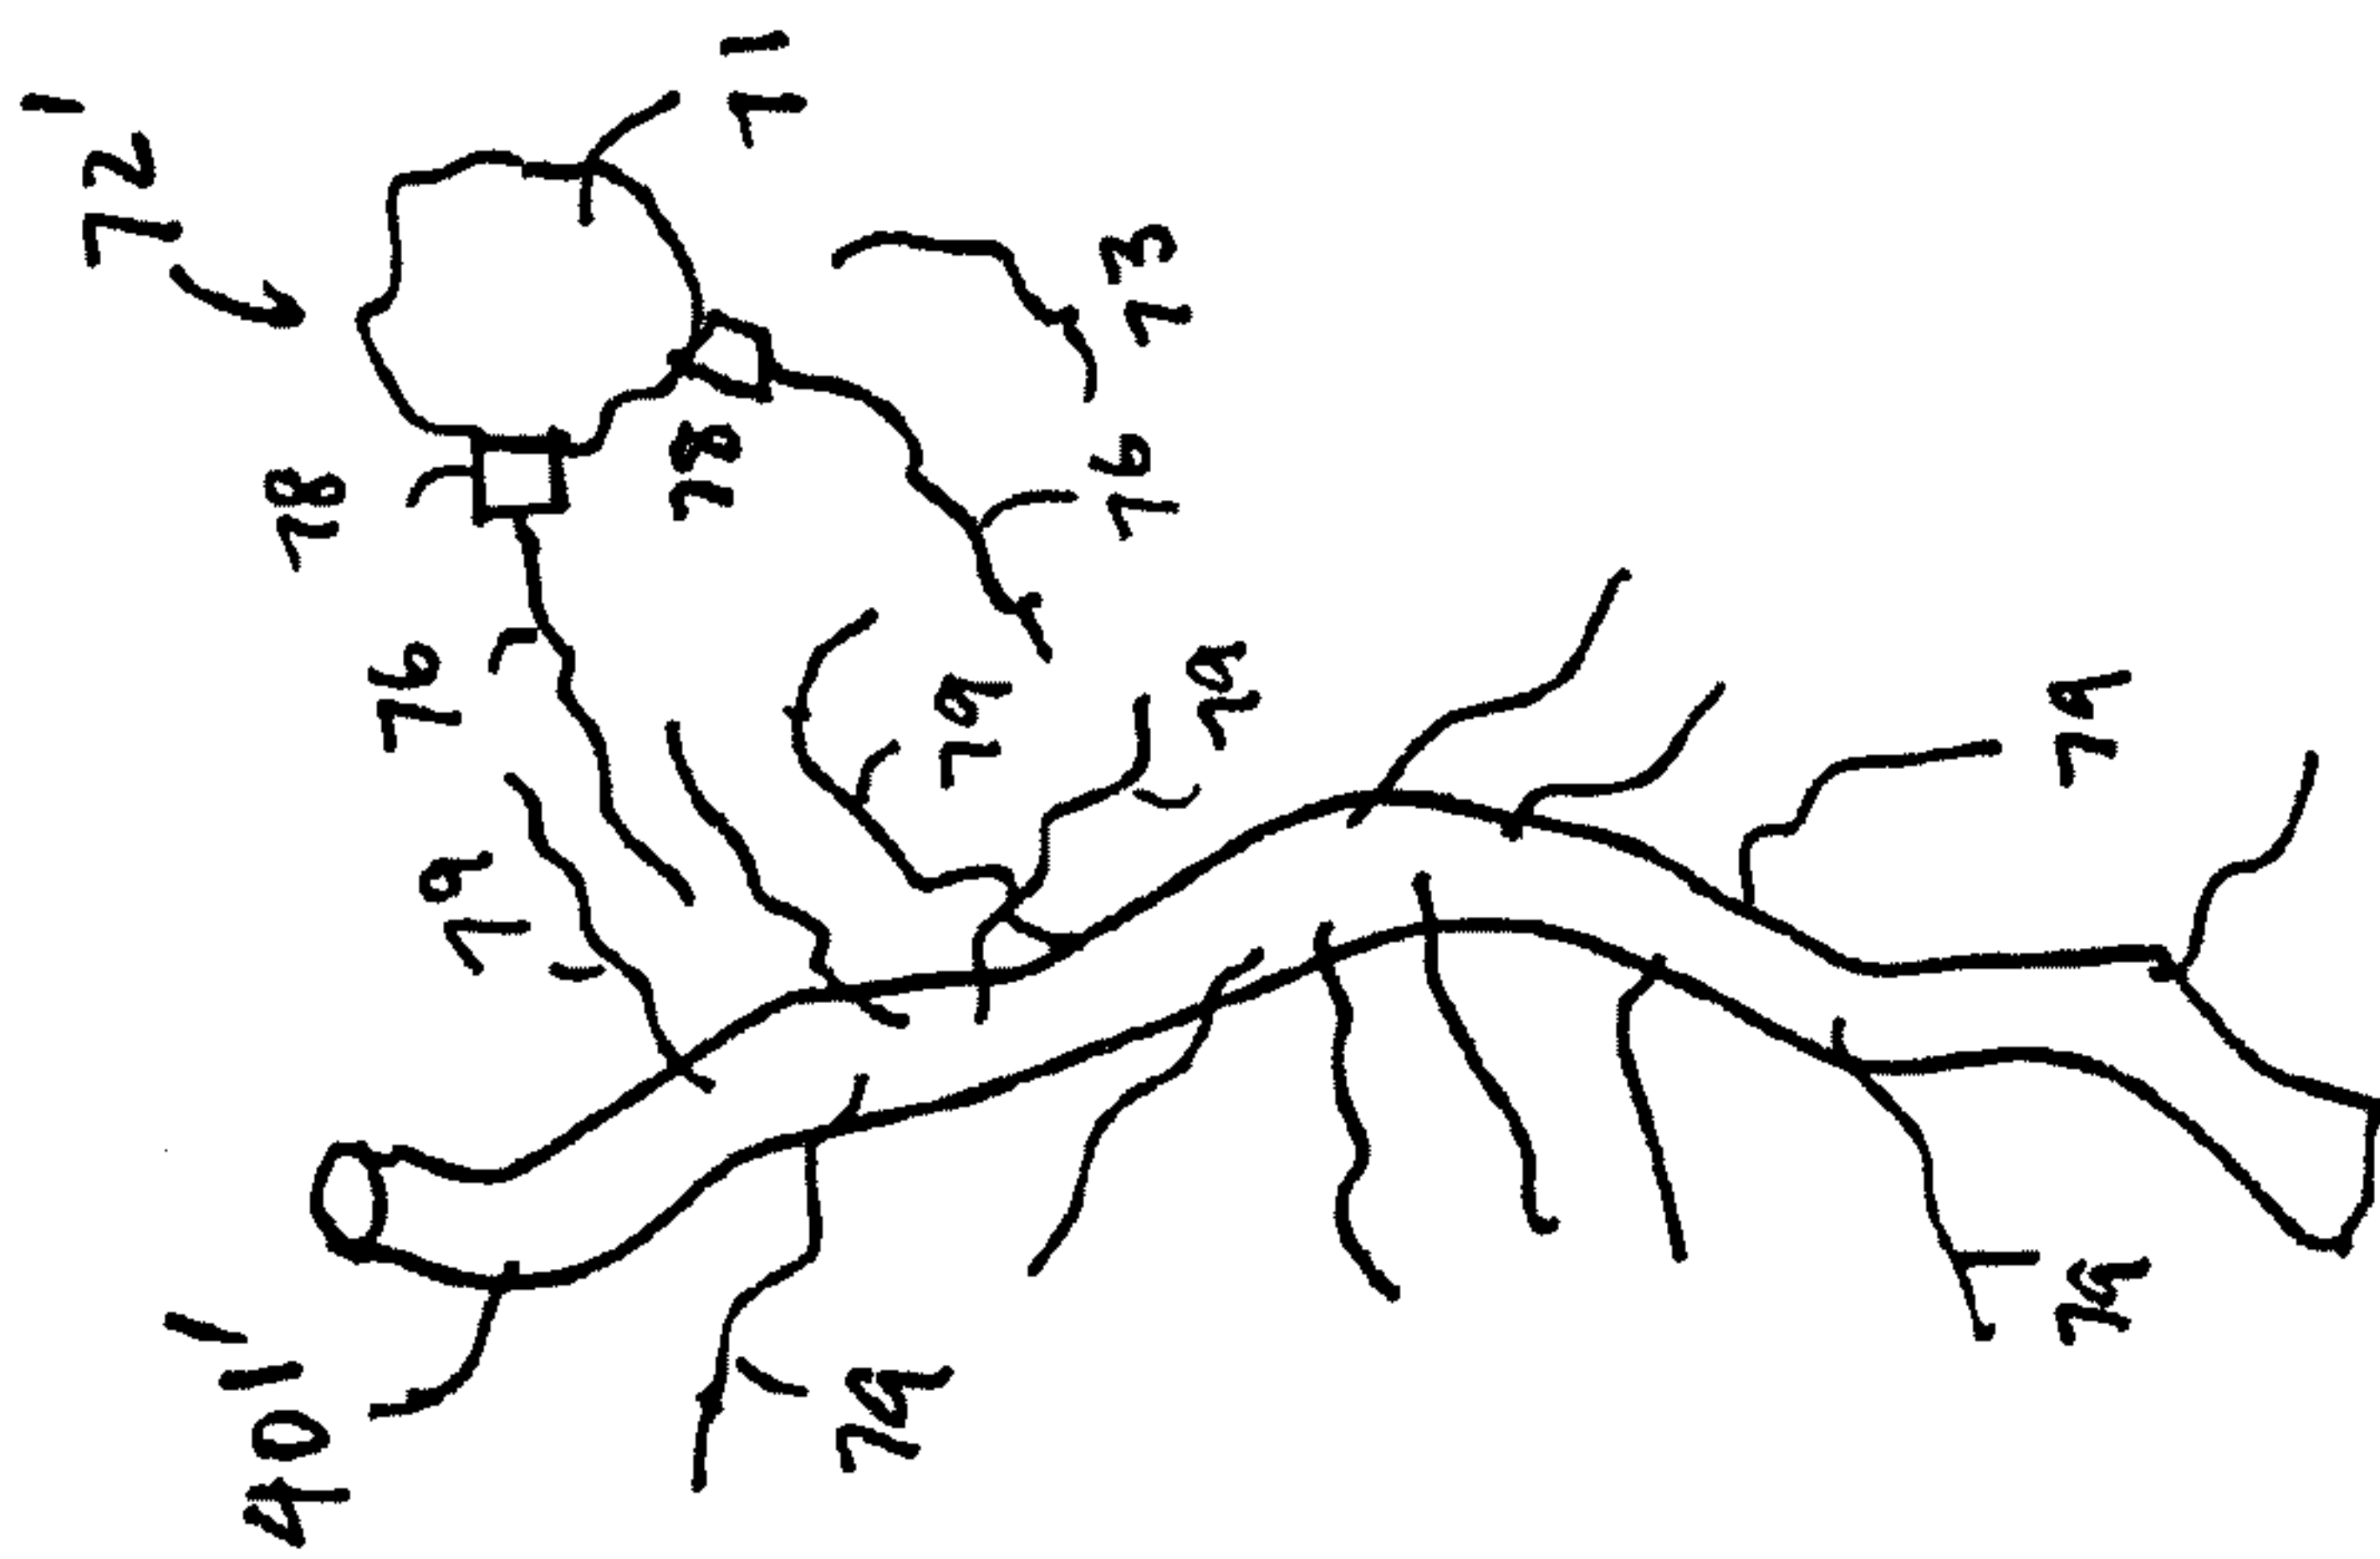


Fig. 8b
(PRIOR ART)

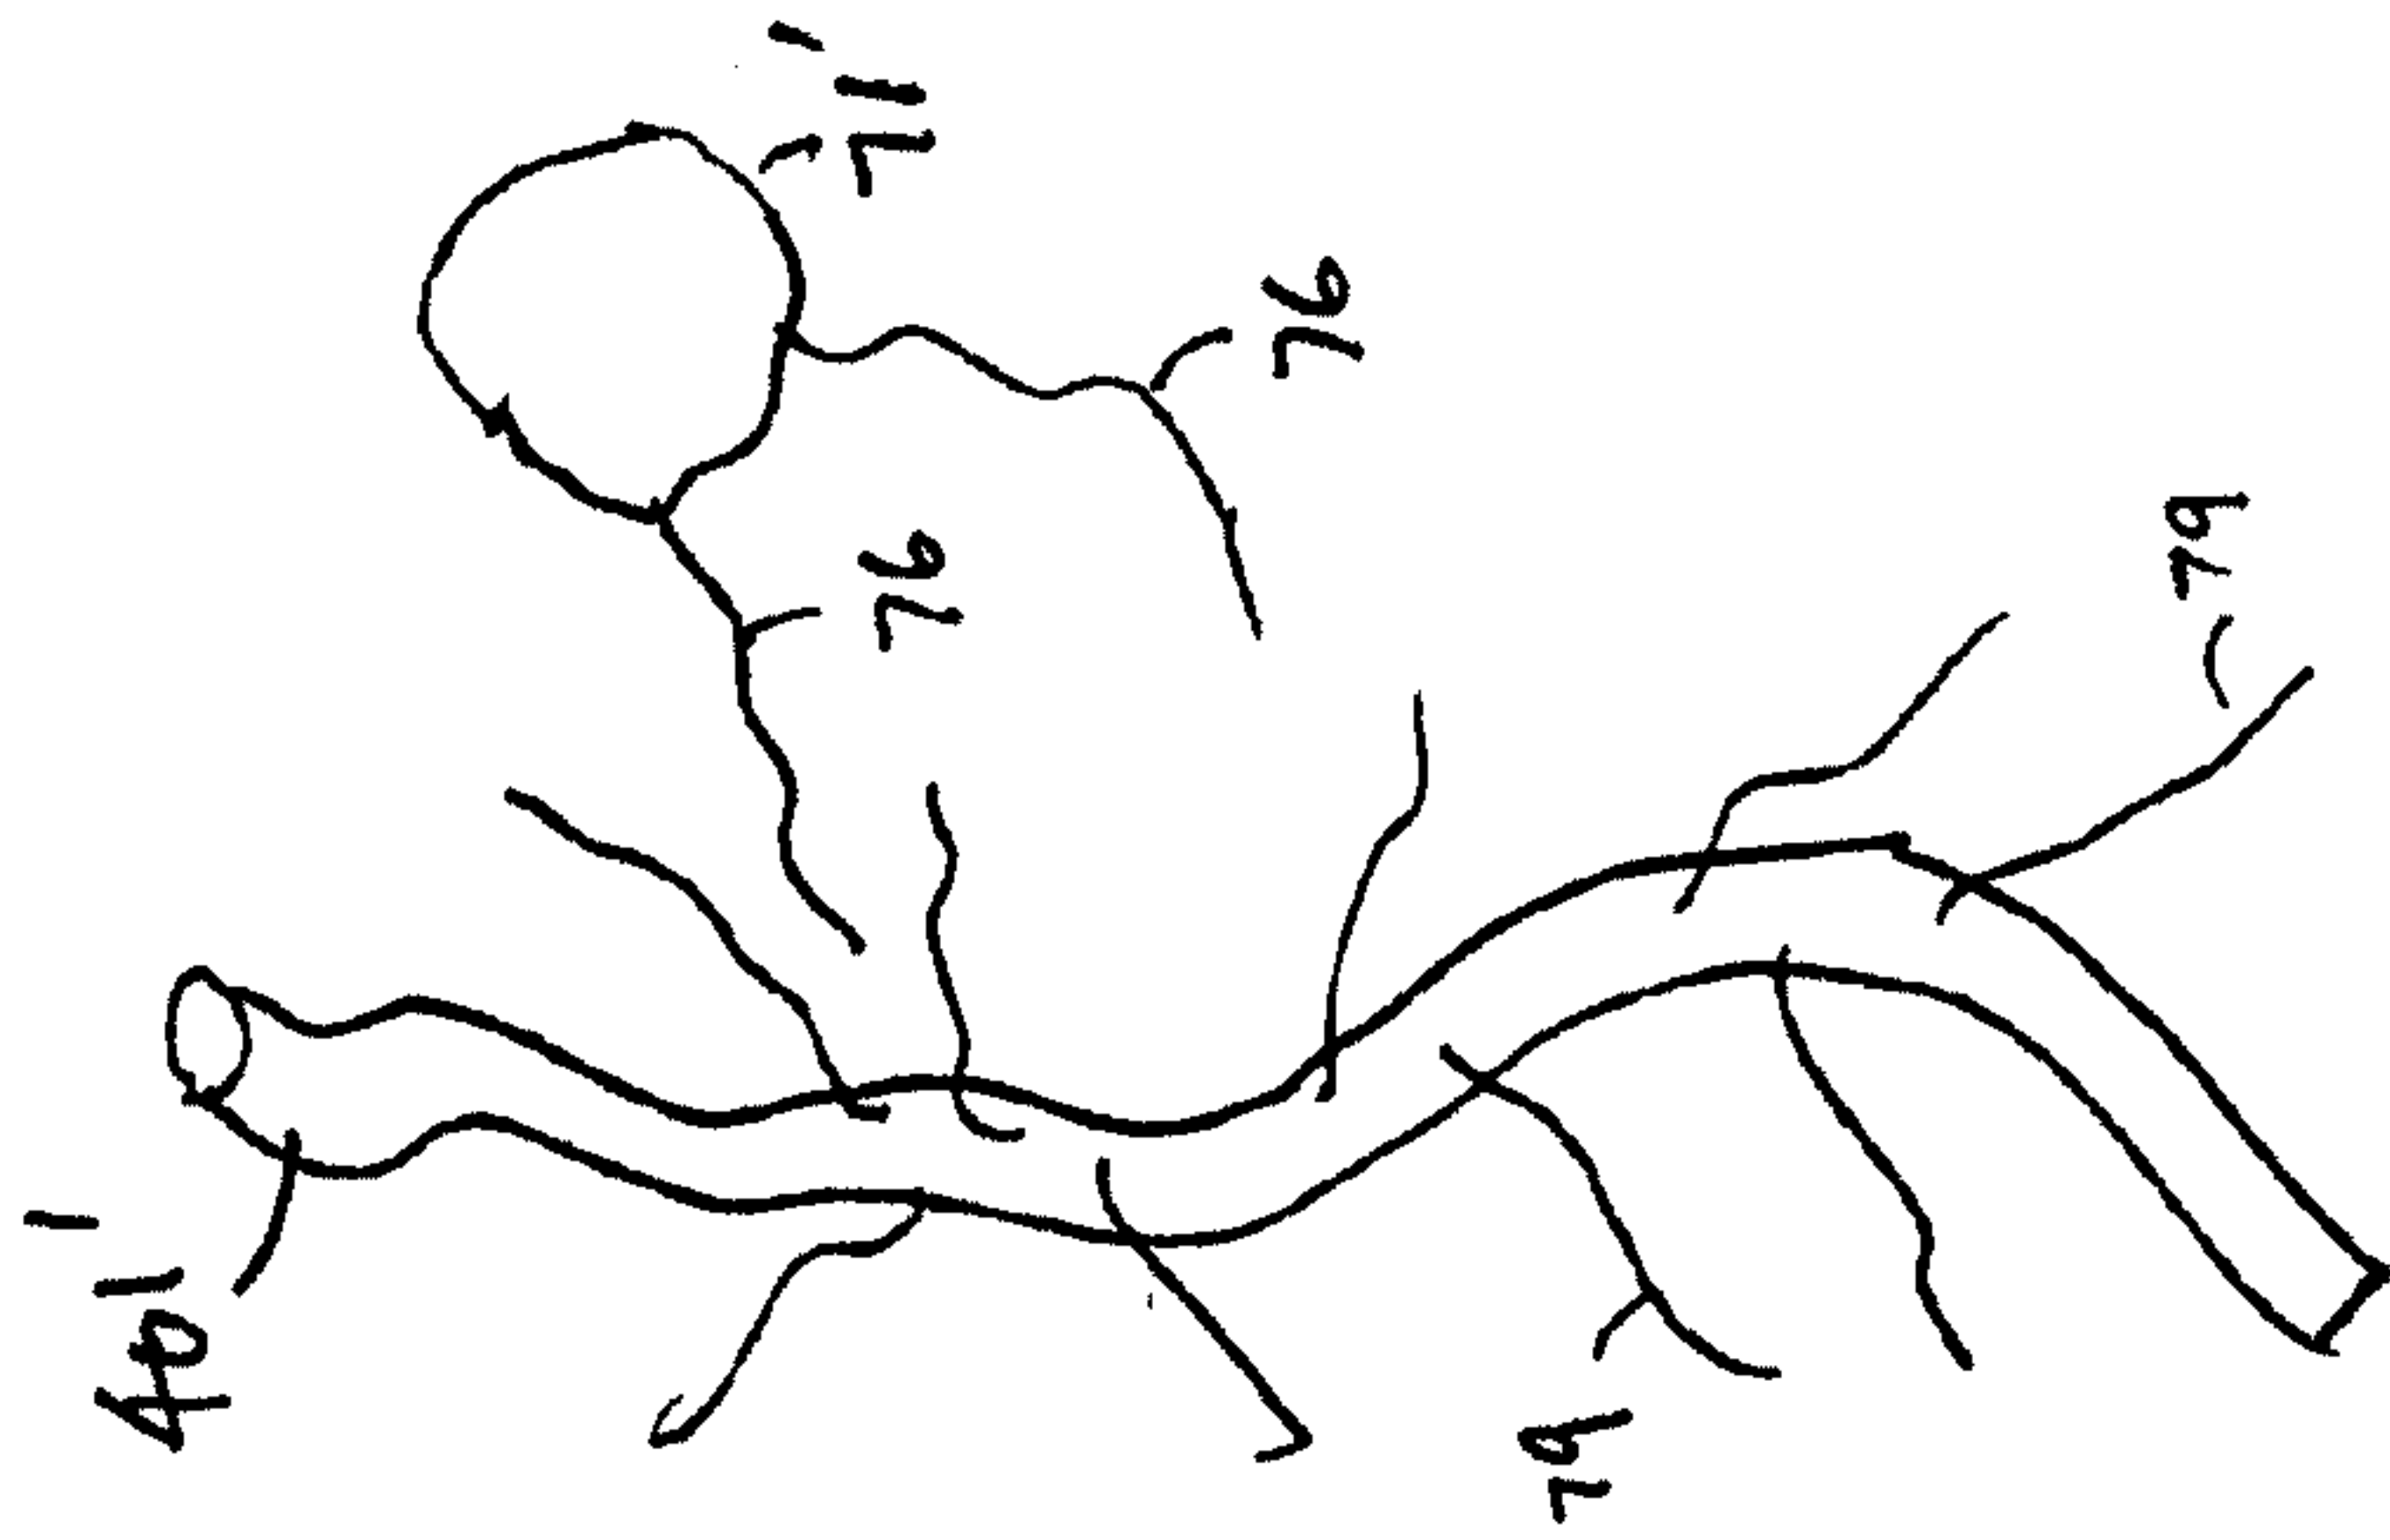
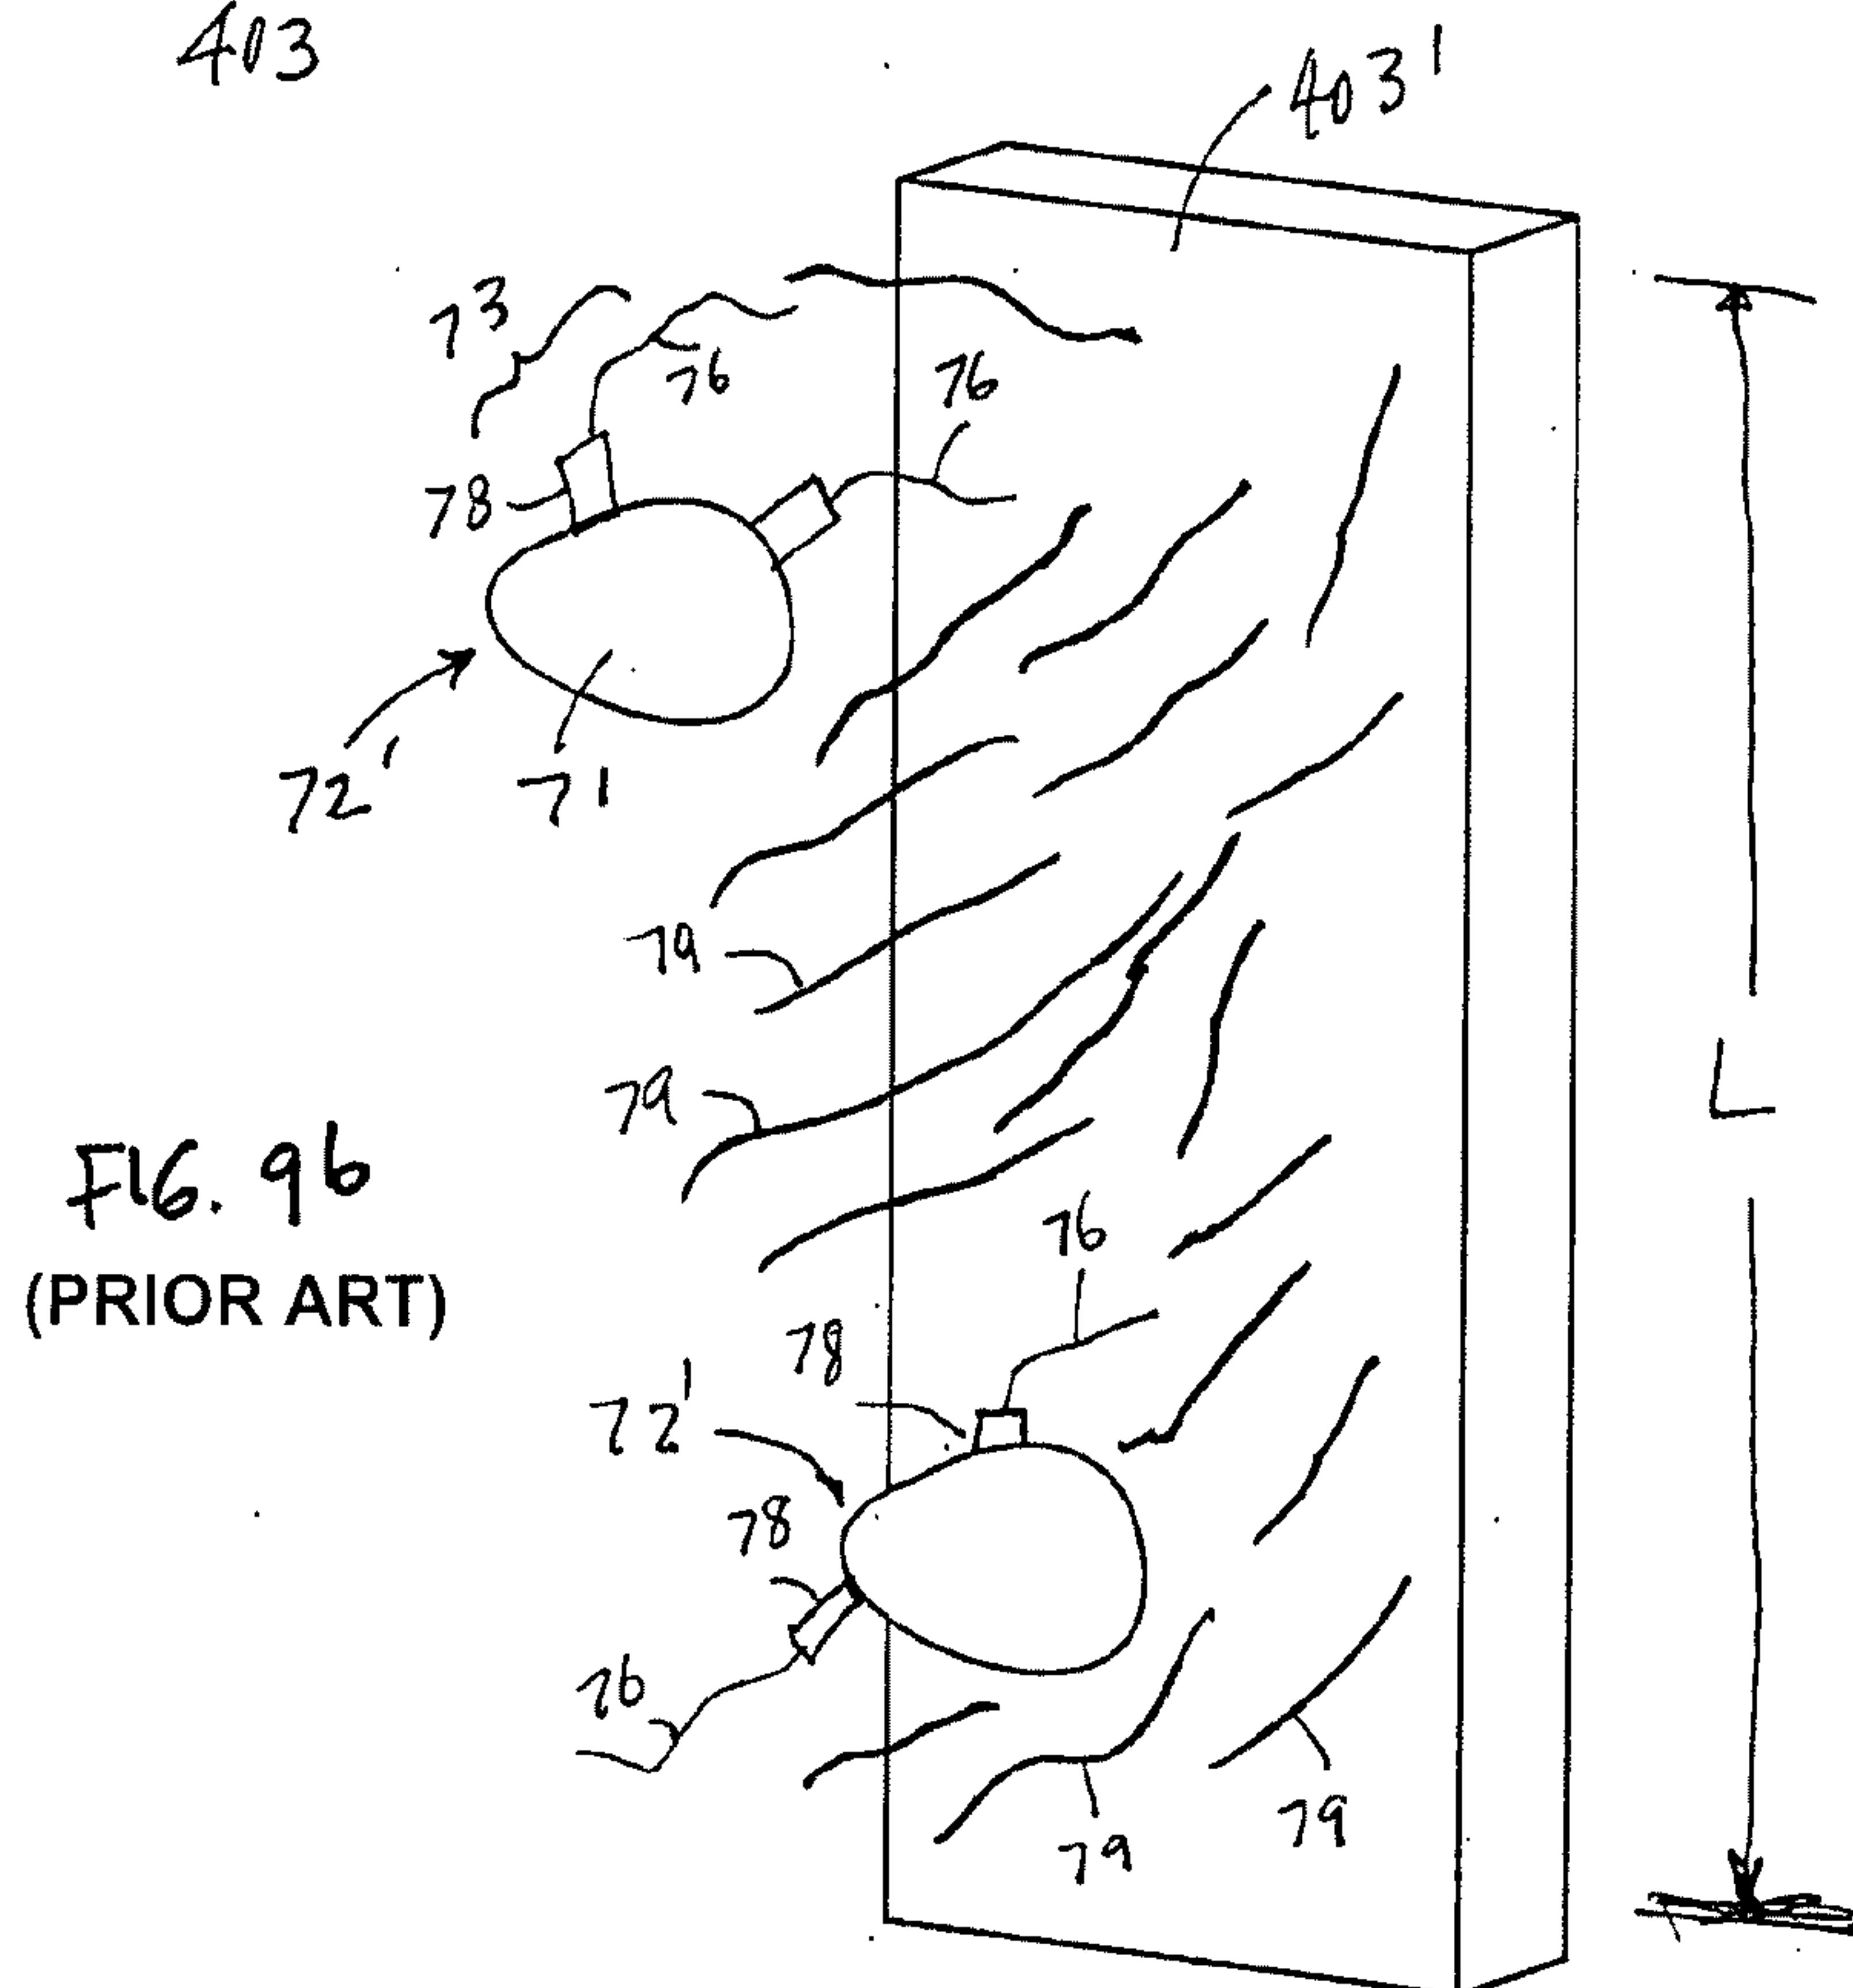
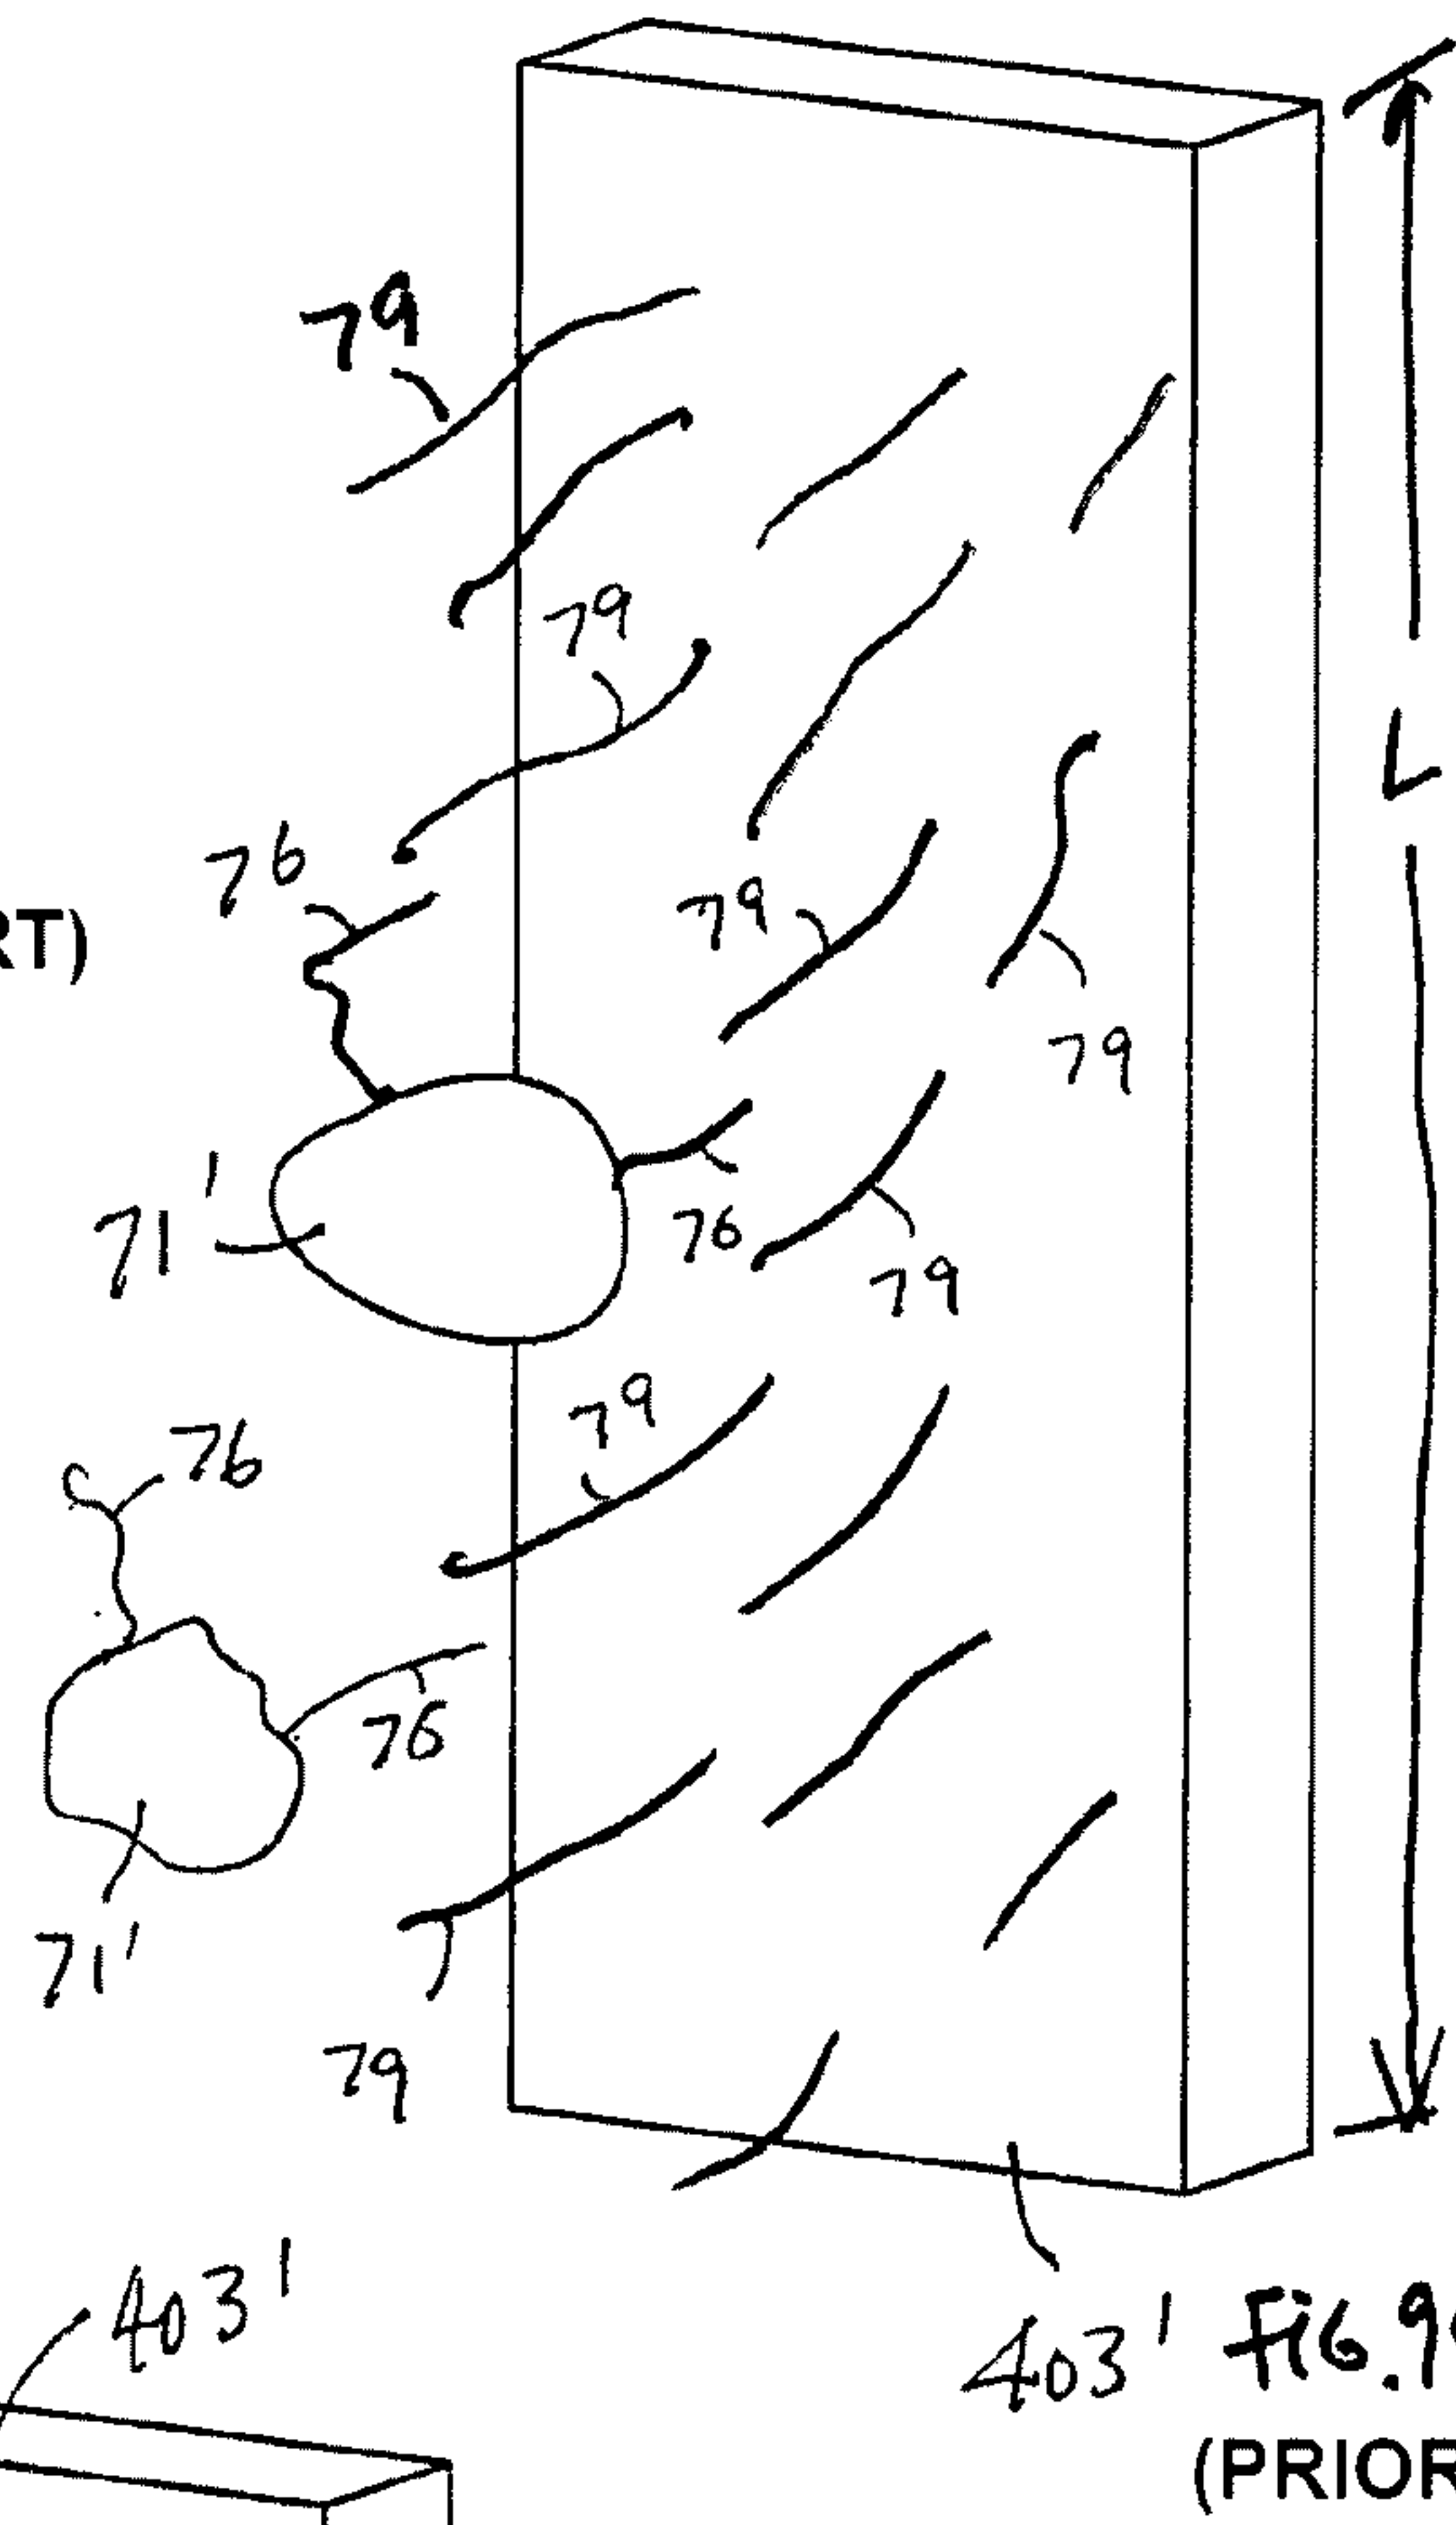
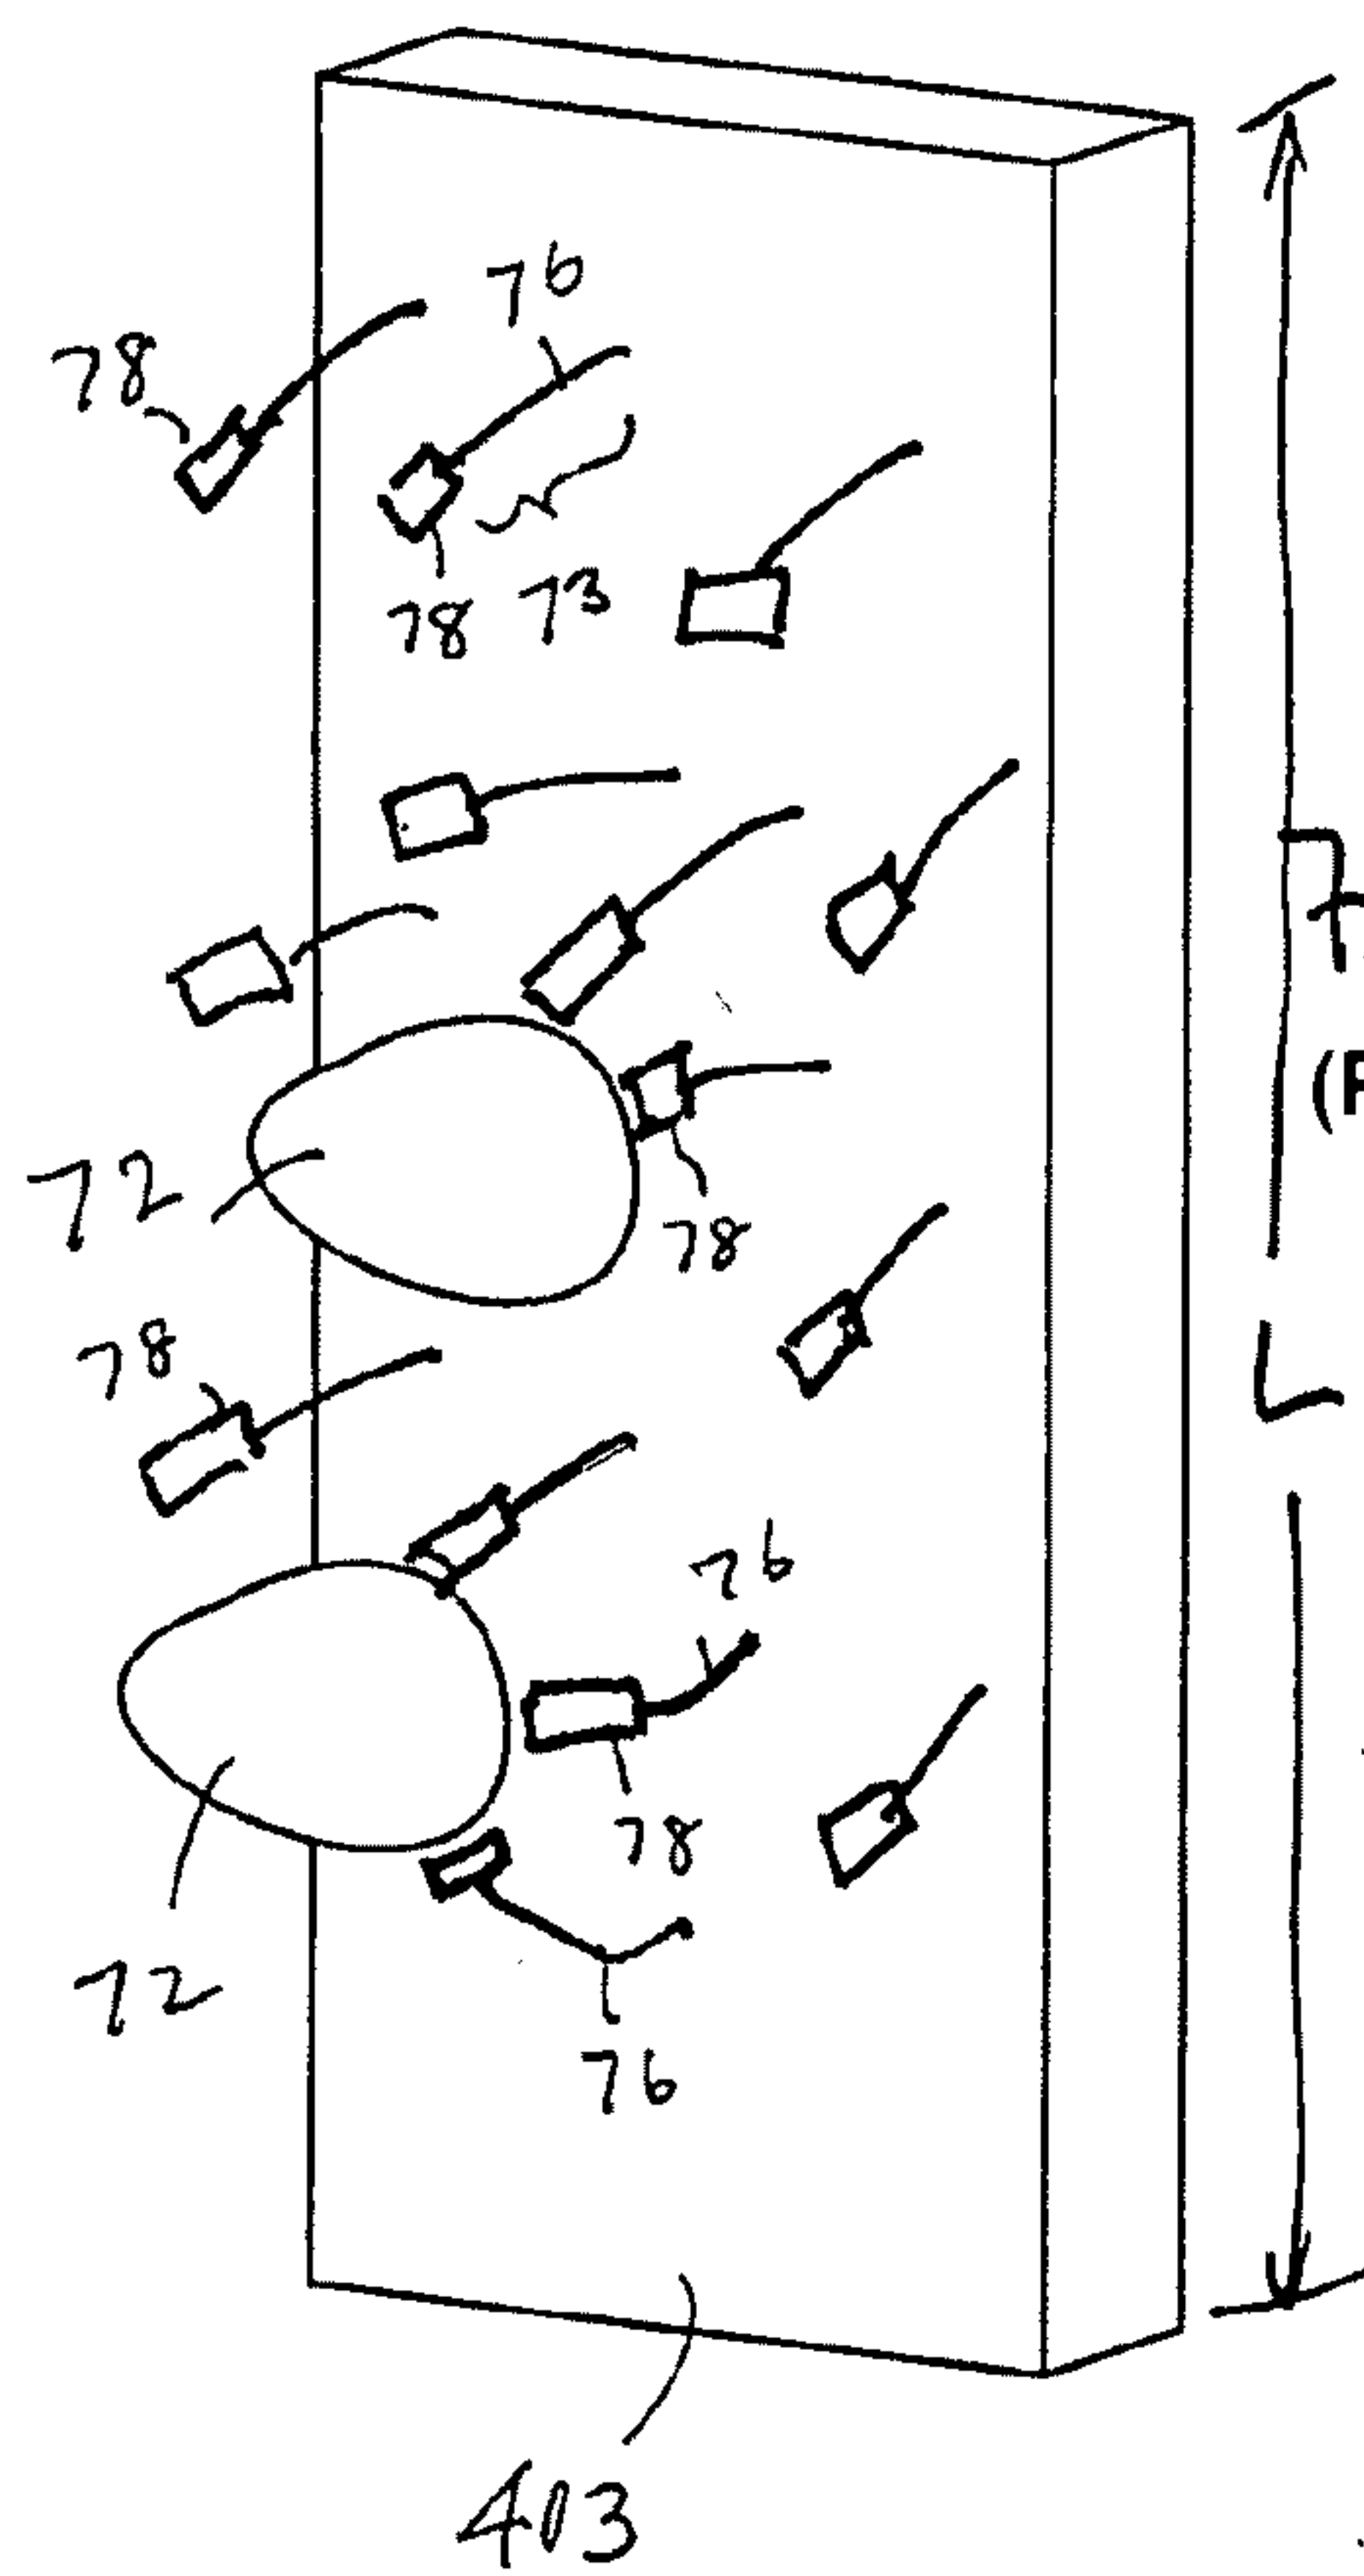


Fig. 8c
(PRIOR ART)




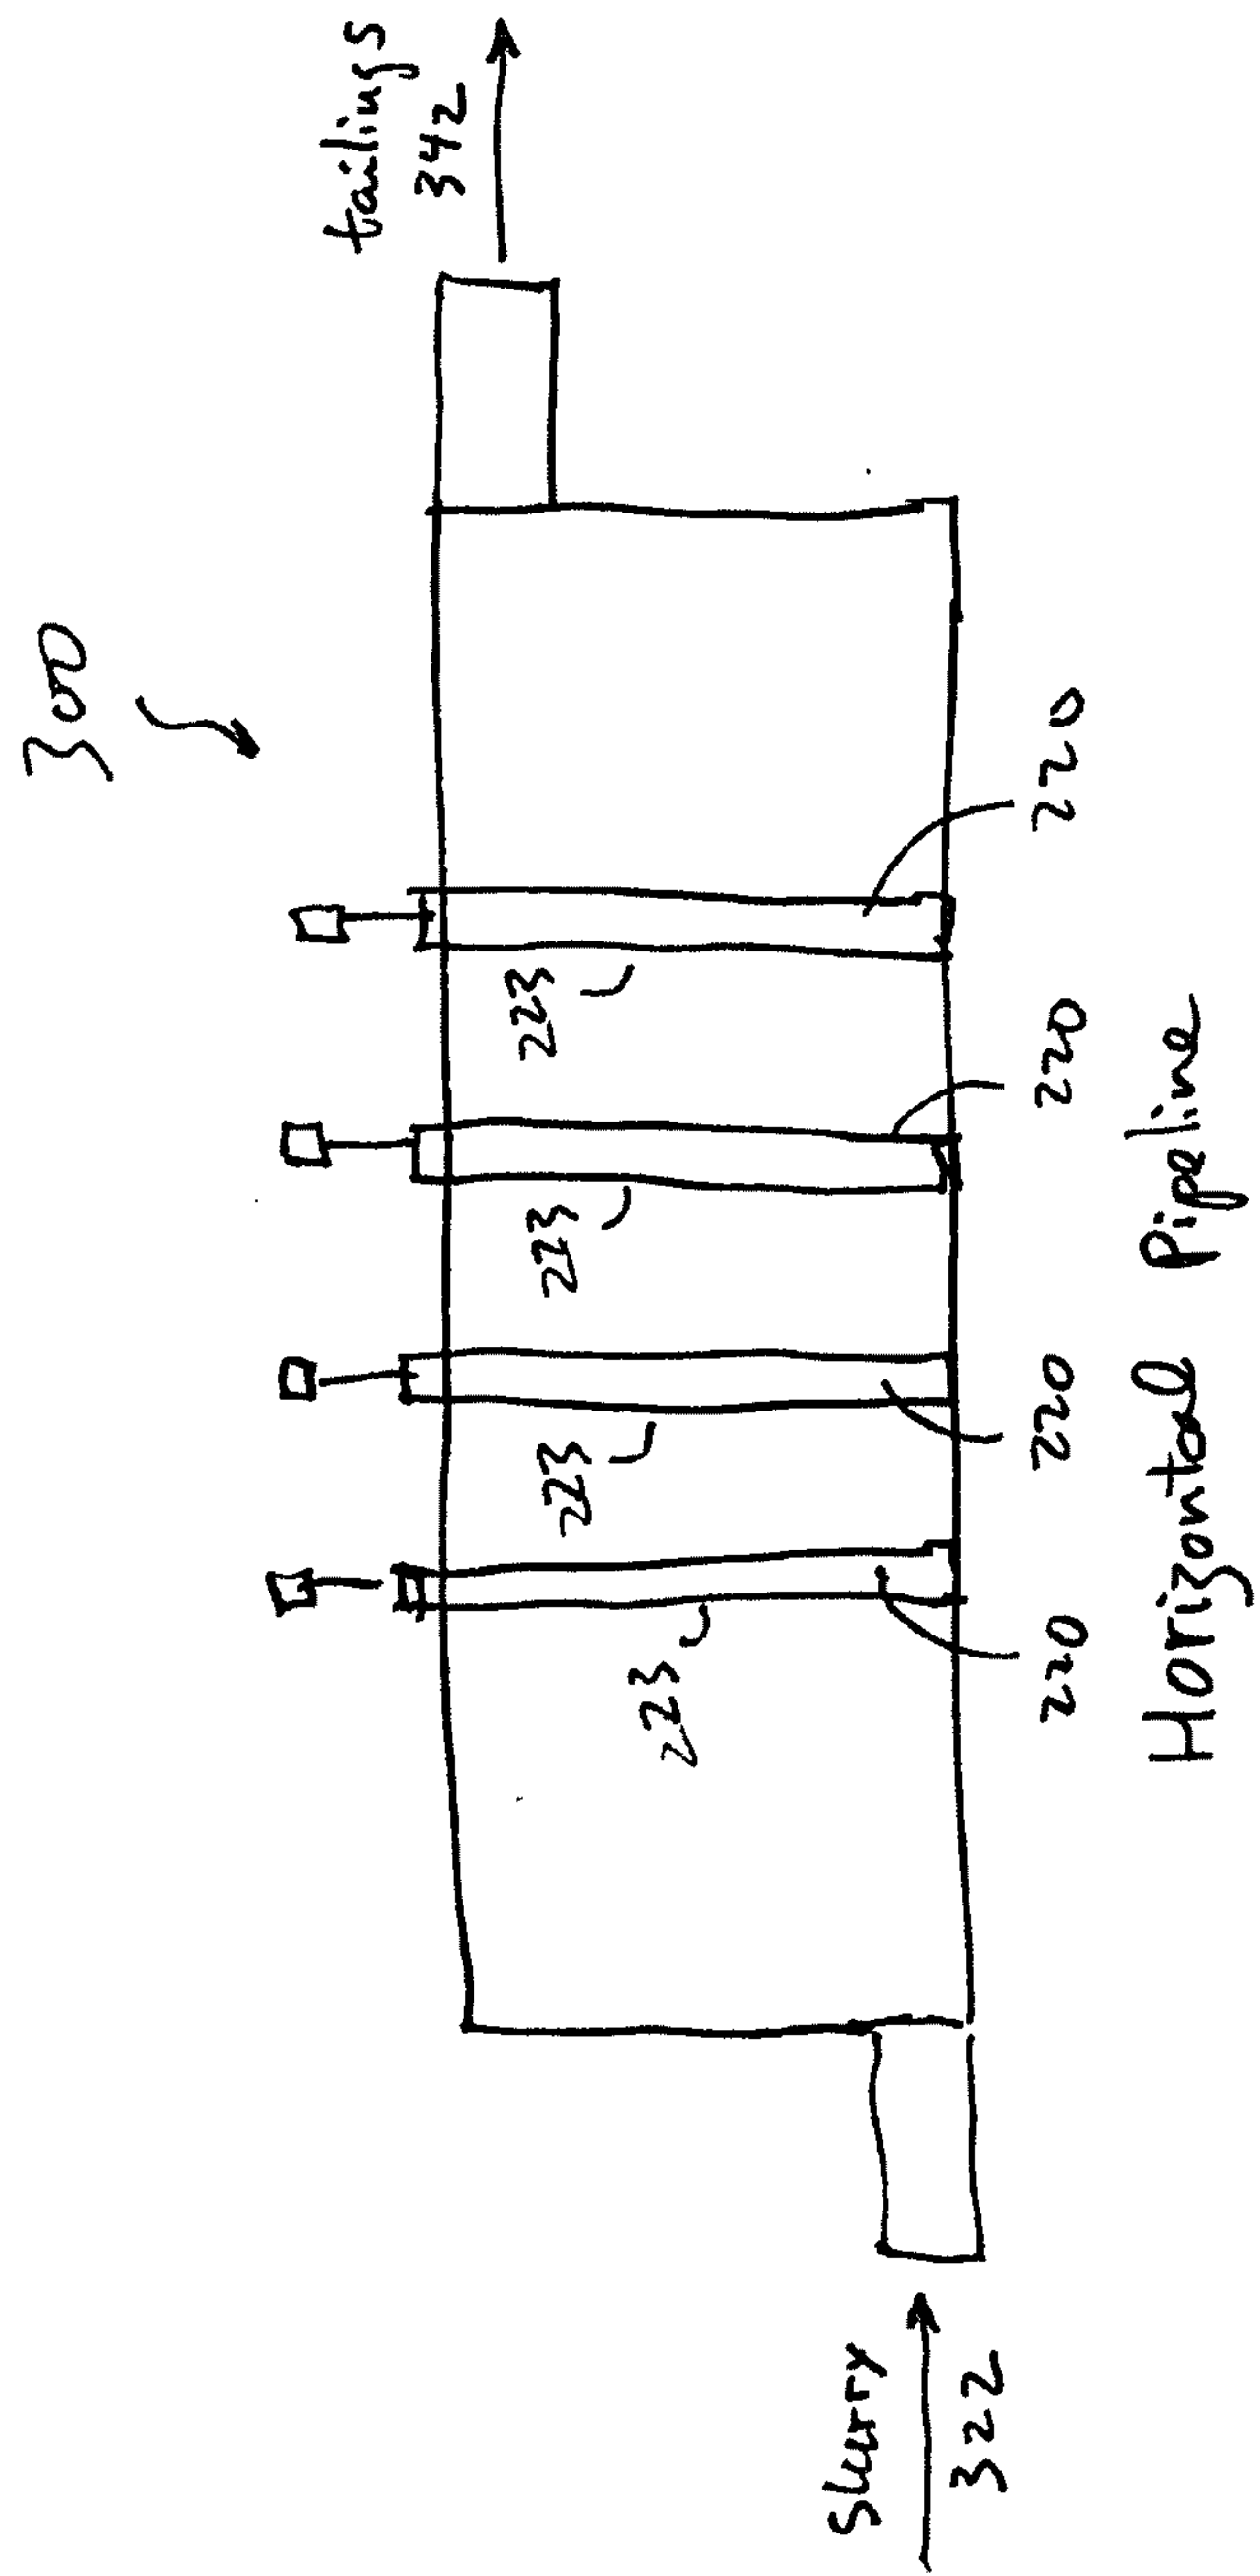


FIG. 10 a
(PRIOR ART)

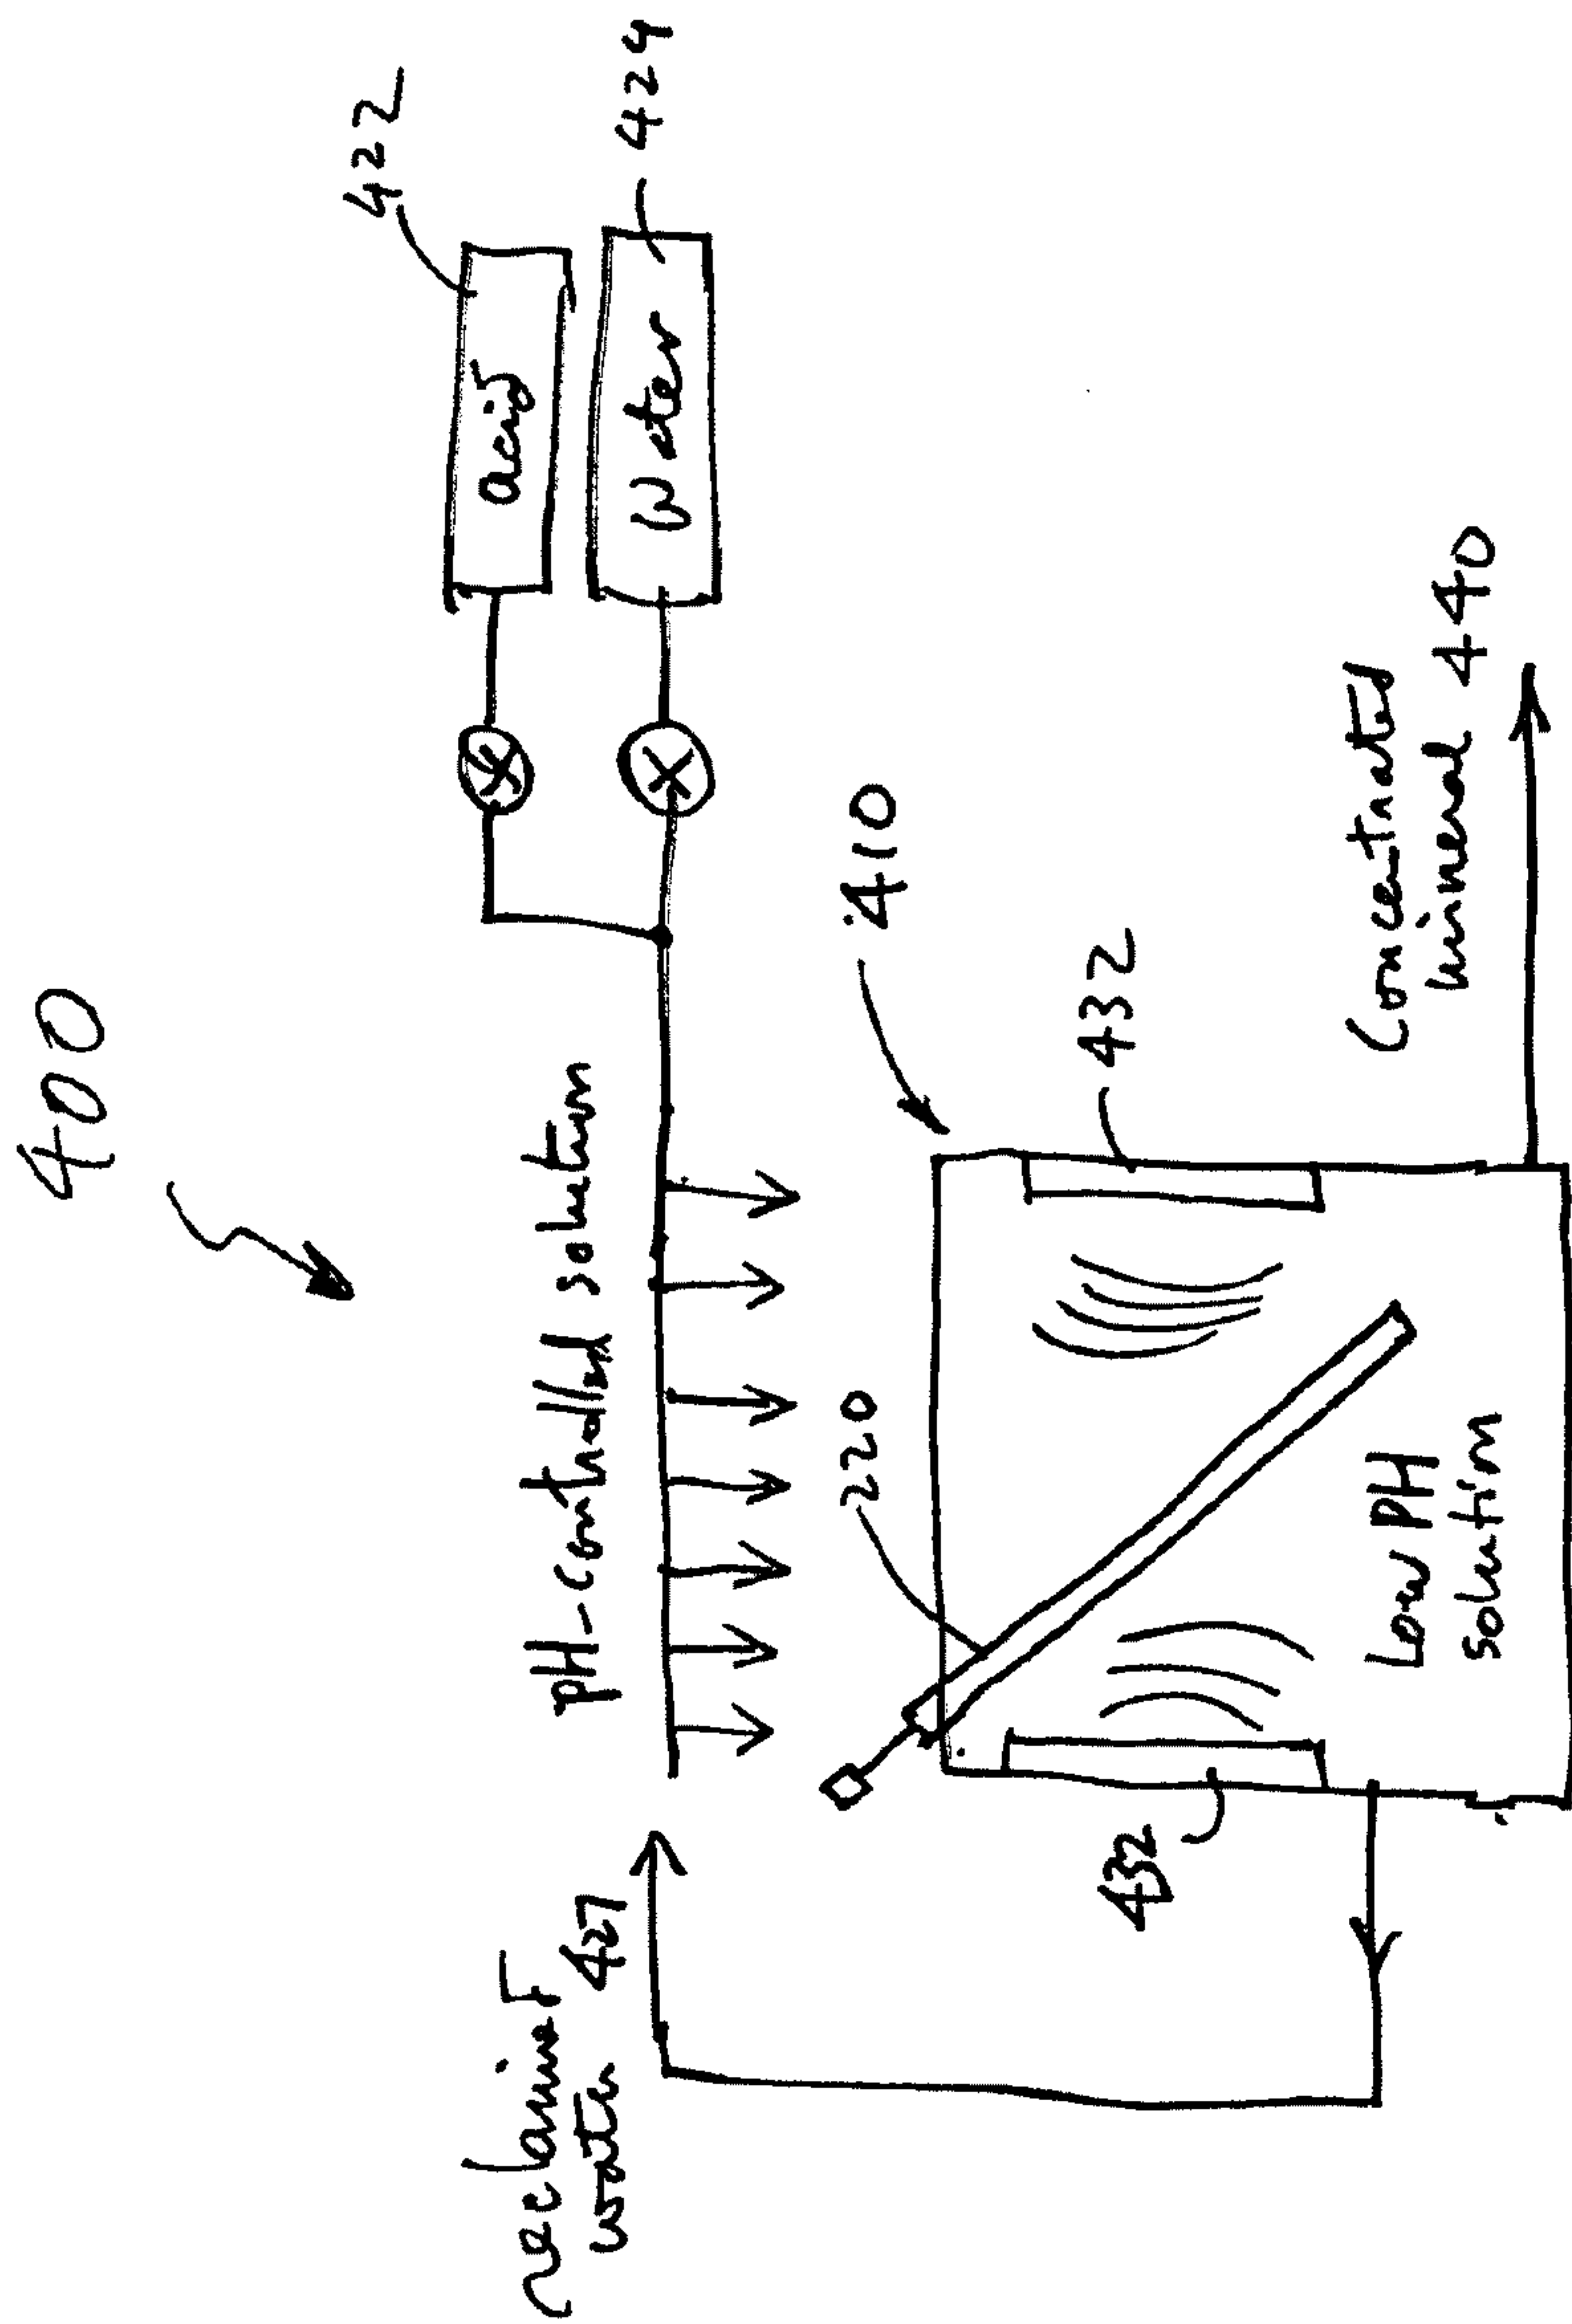

Release Apparatus

FIG. 10b

(PRIOR ART)

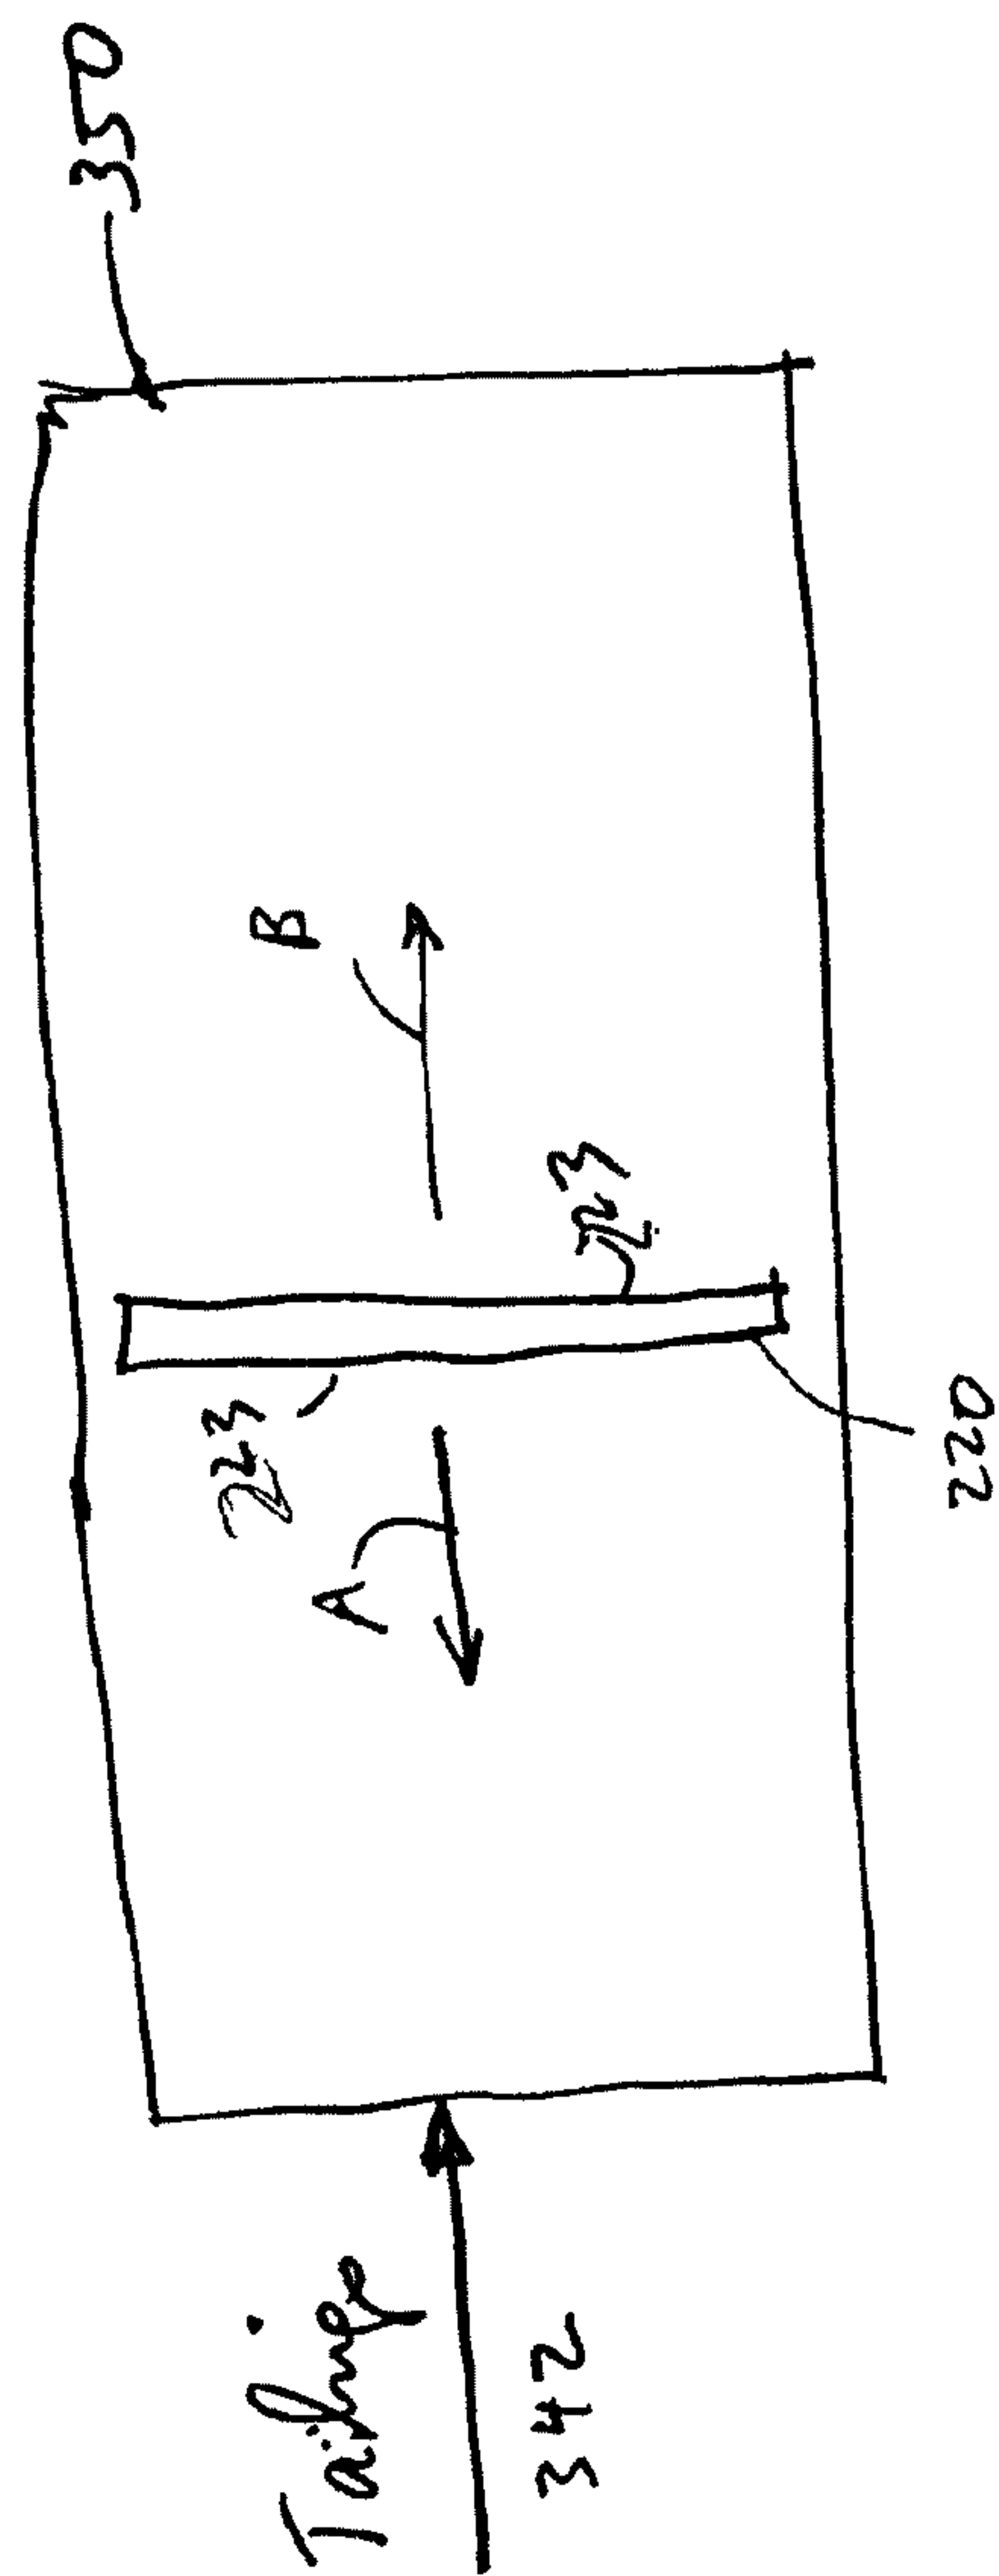


Fig 11
(PRIOR ART)

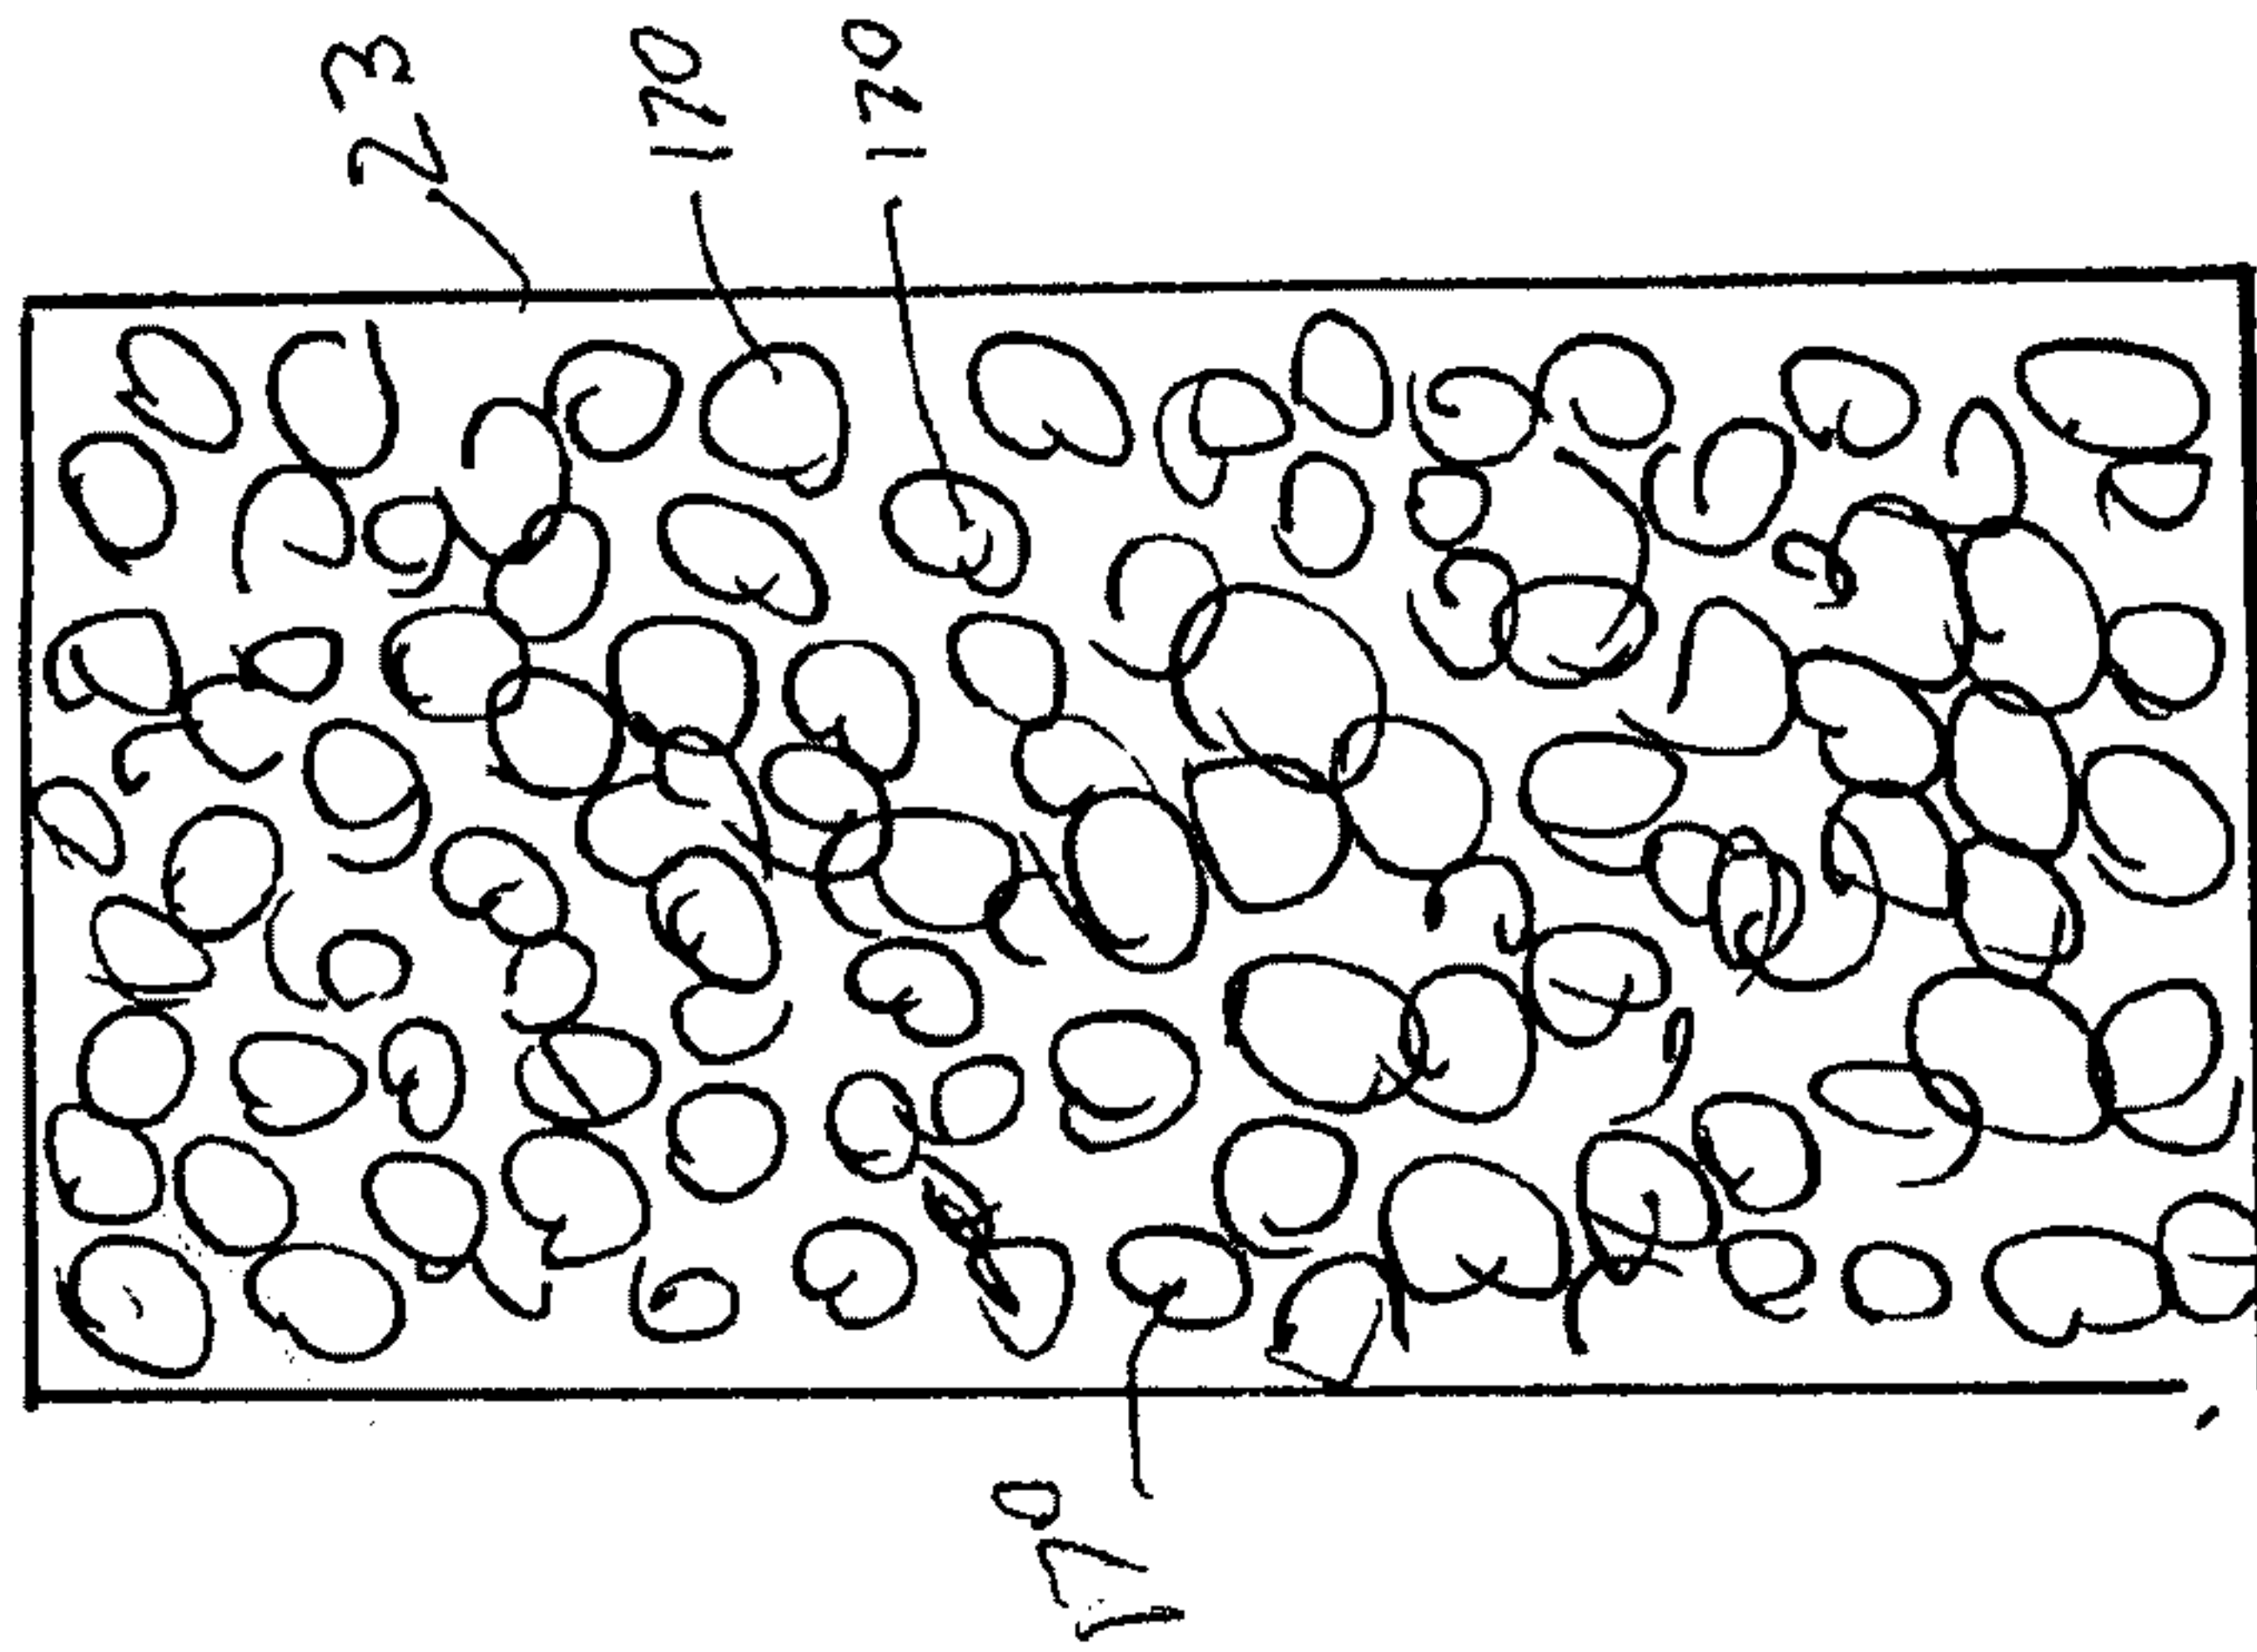


Fig. 12a
(PRIOR ART)

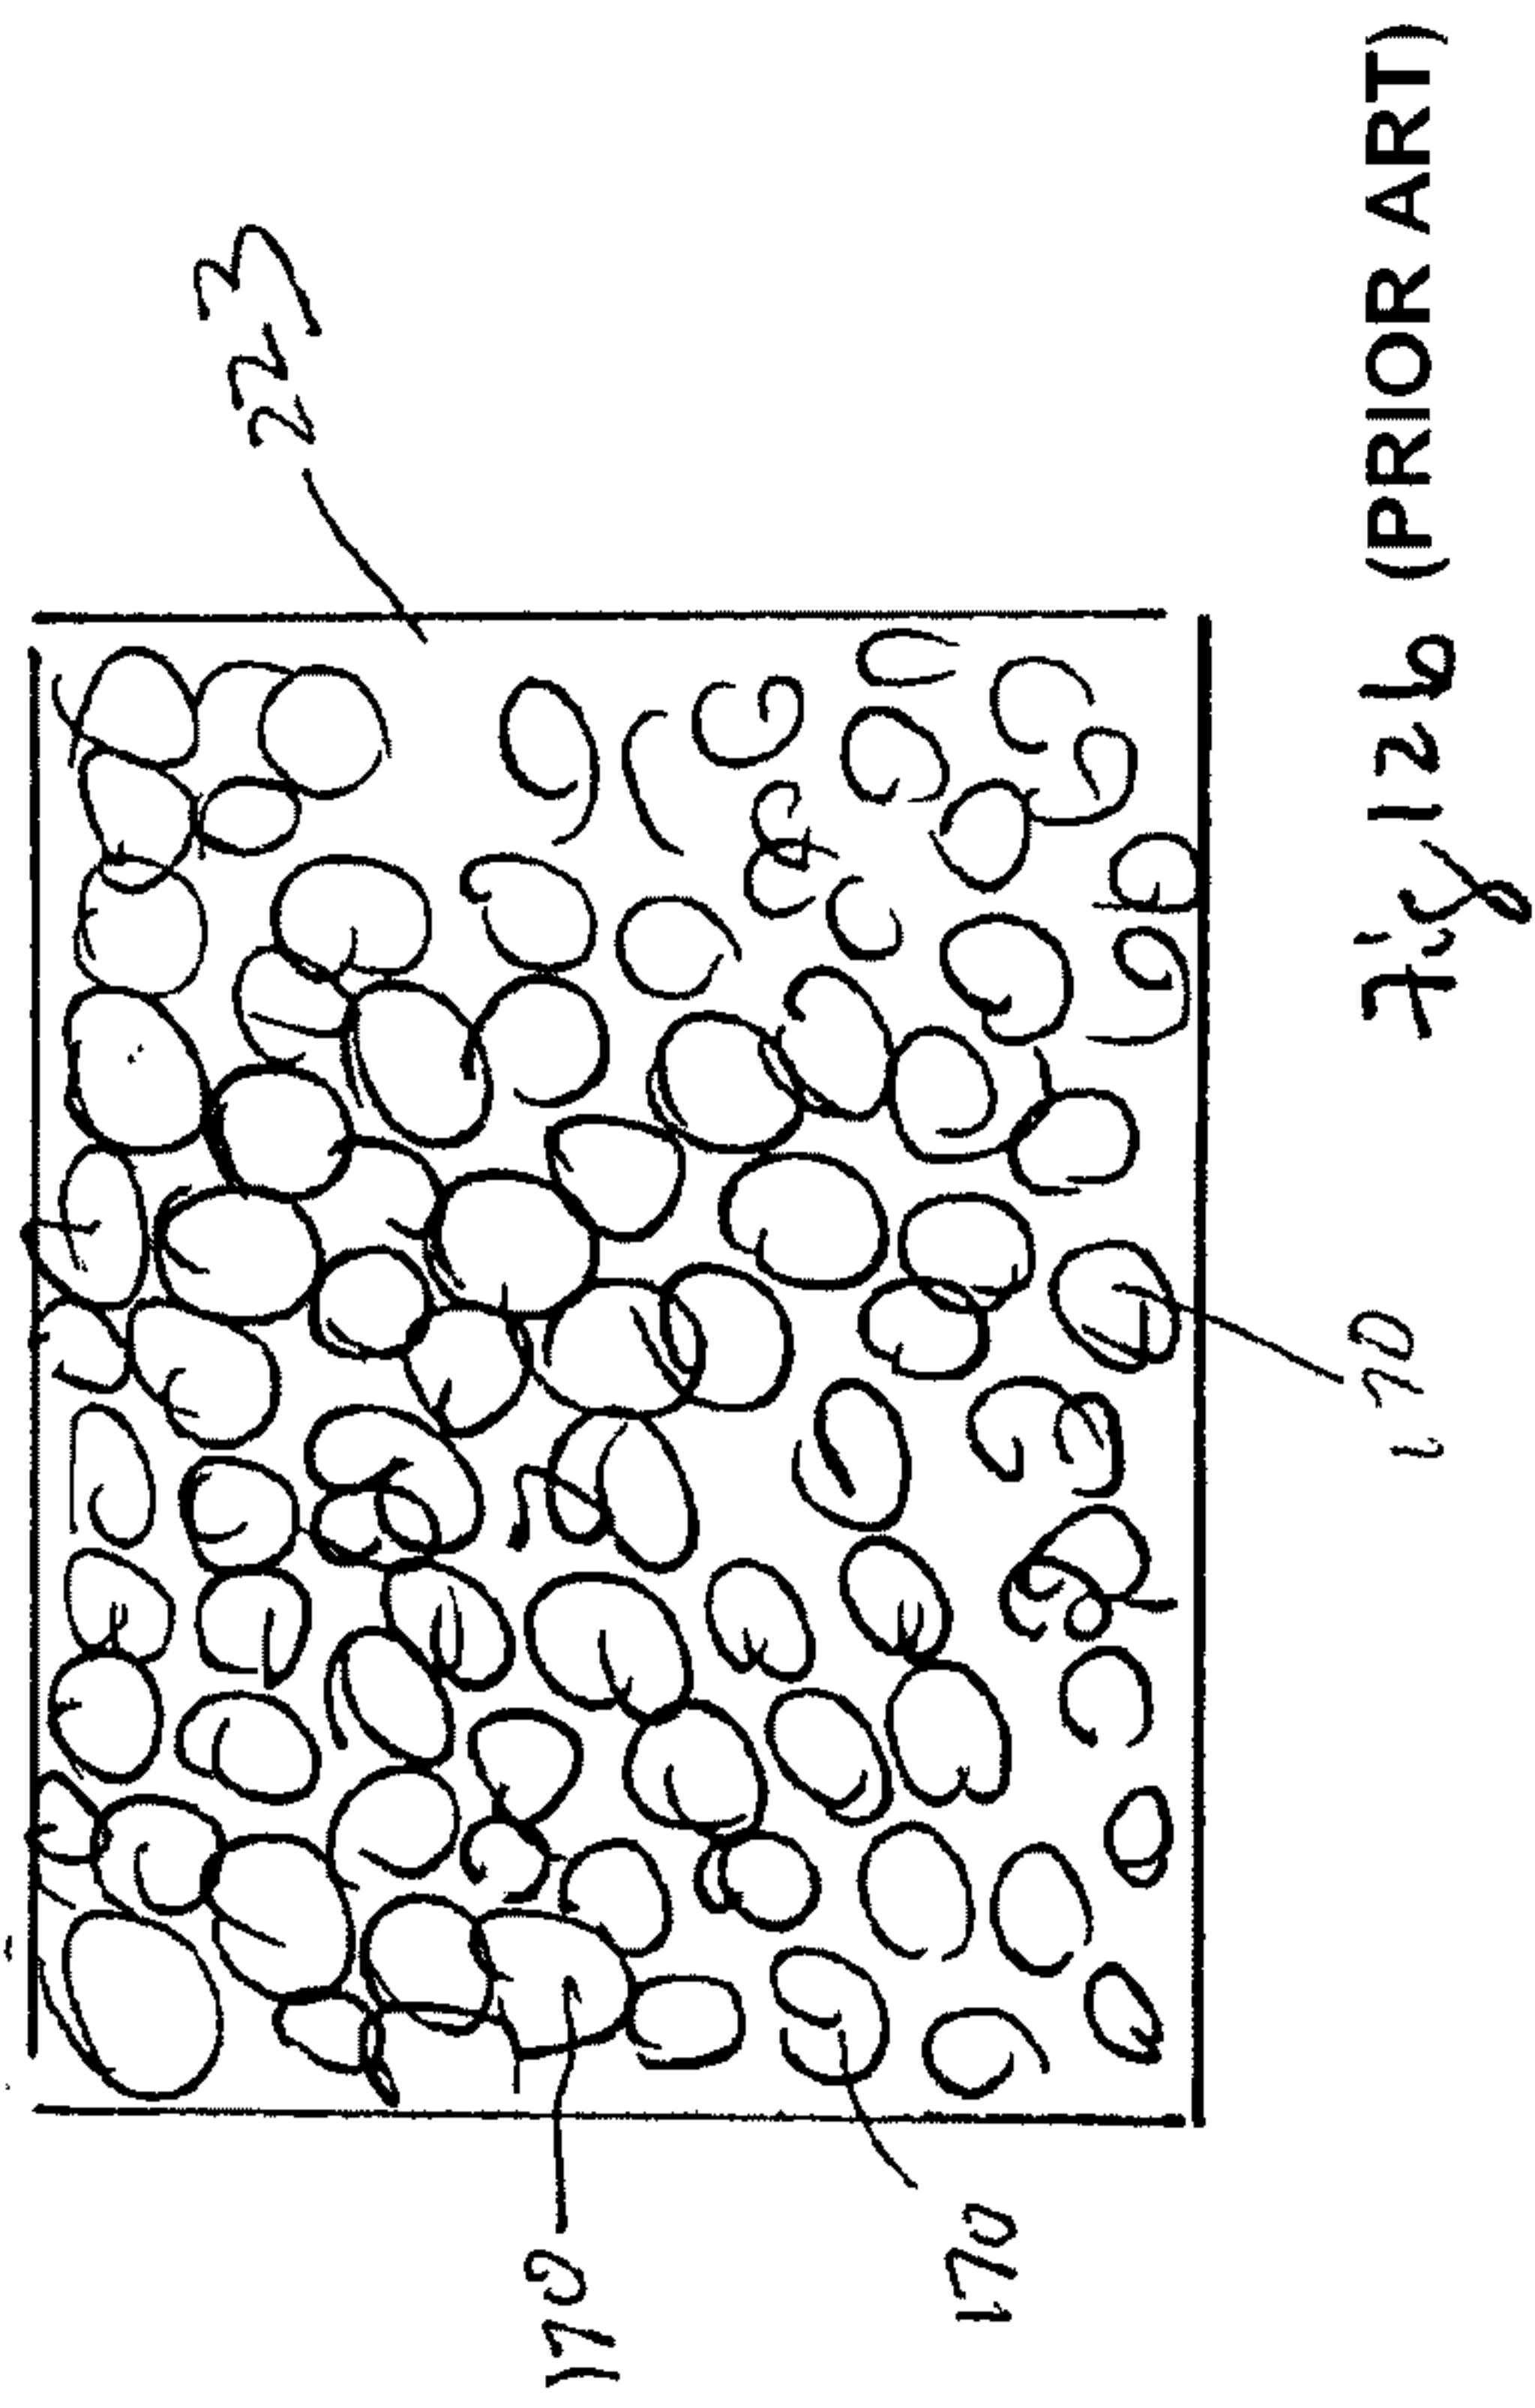


Fig. 12b (PRIOR ART)

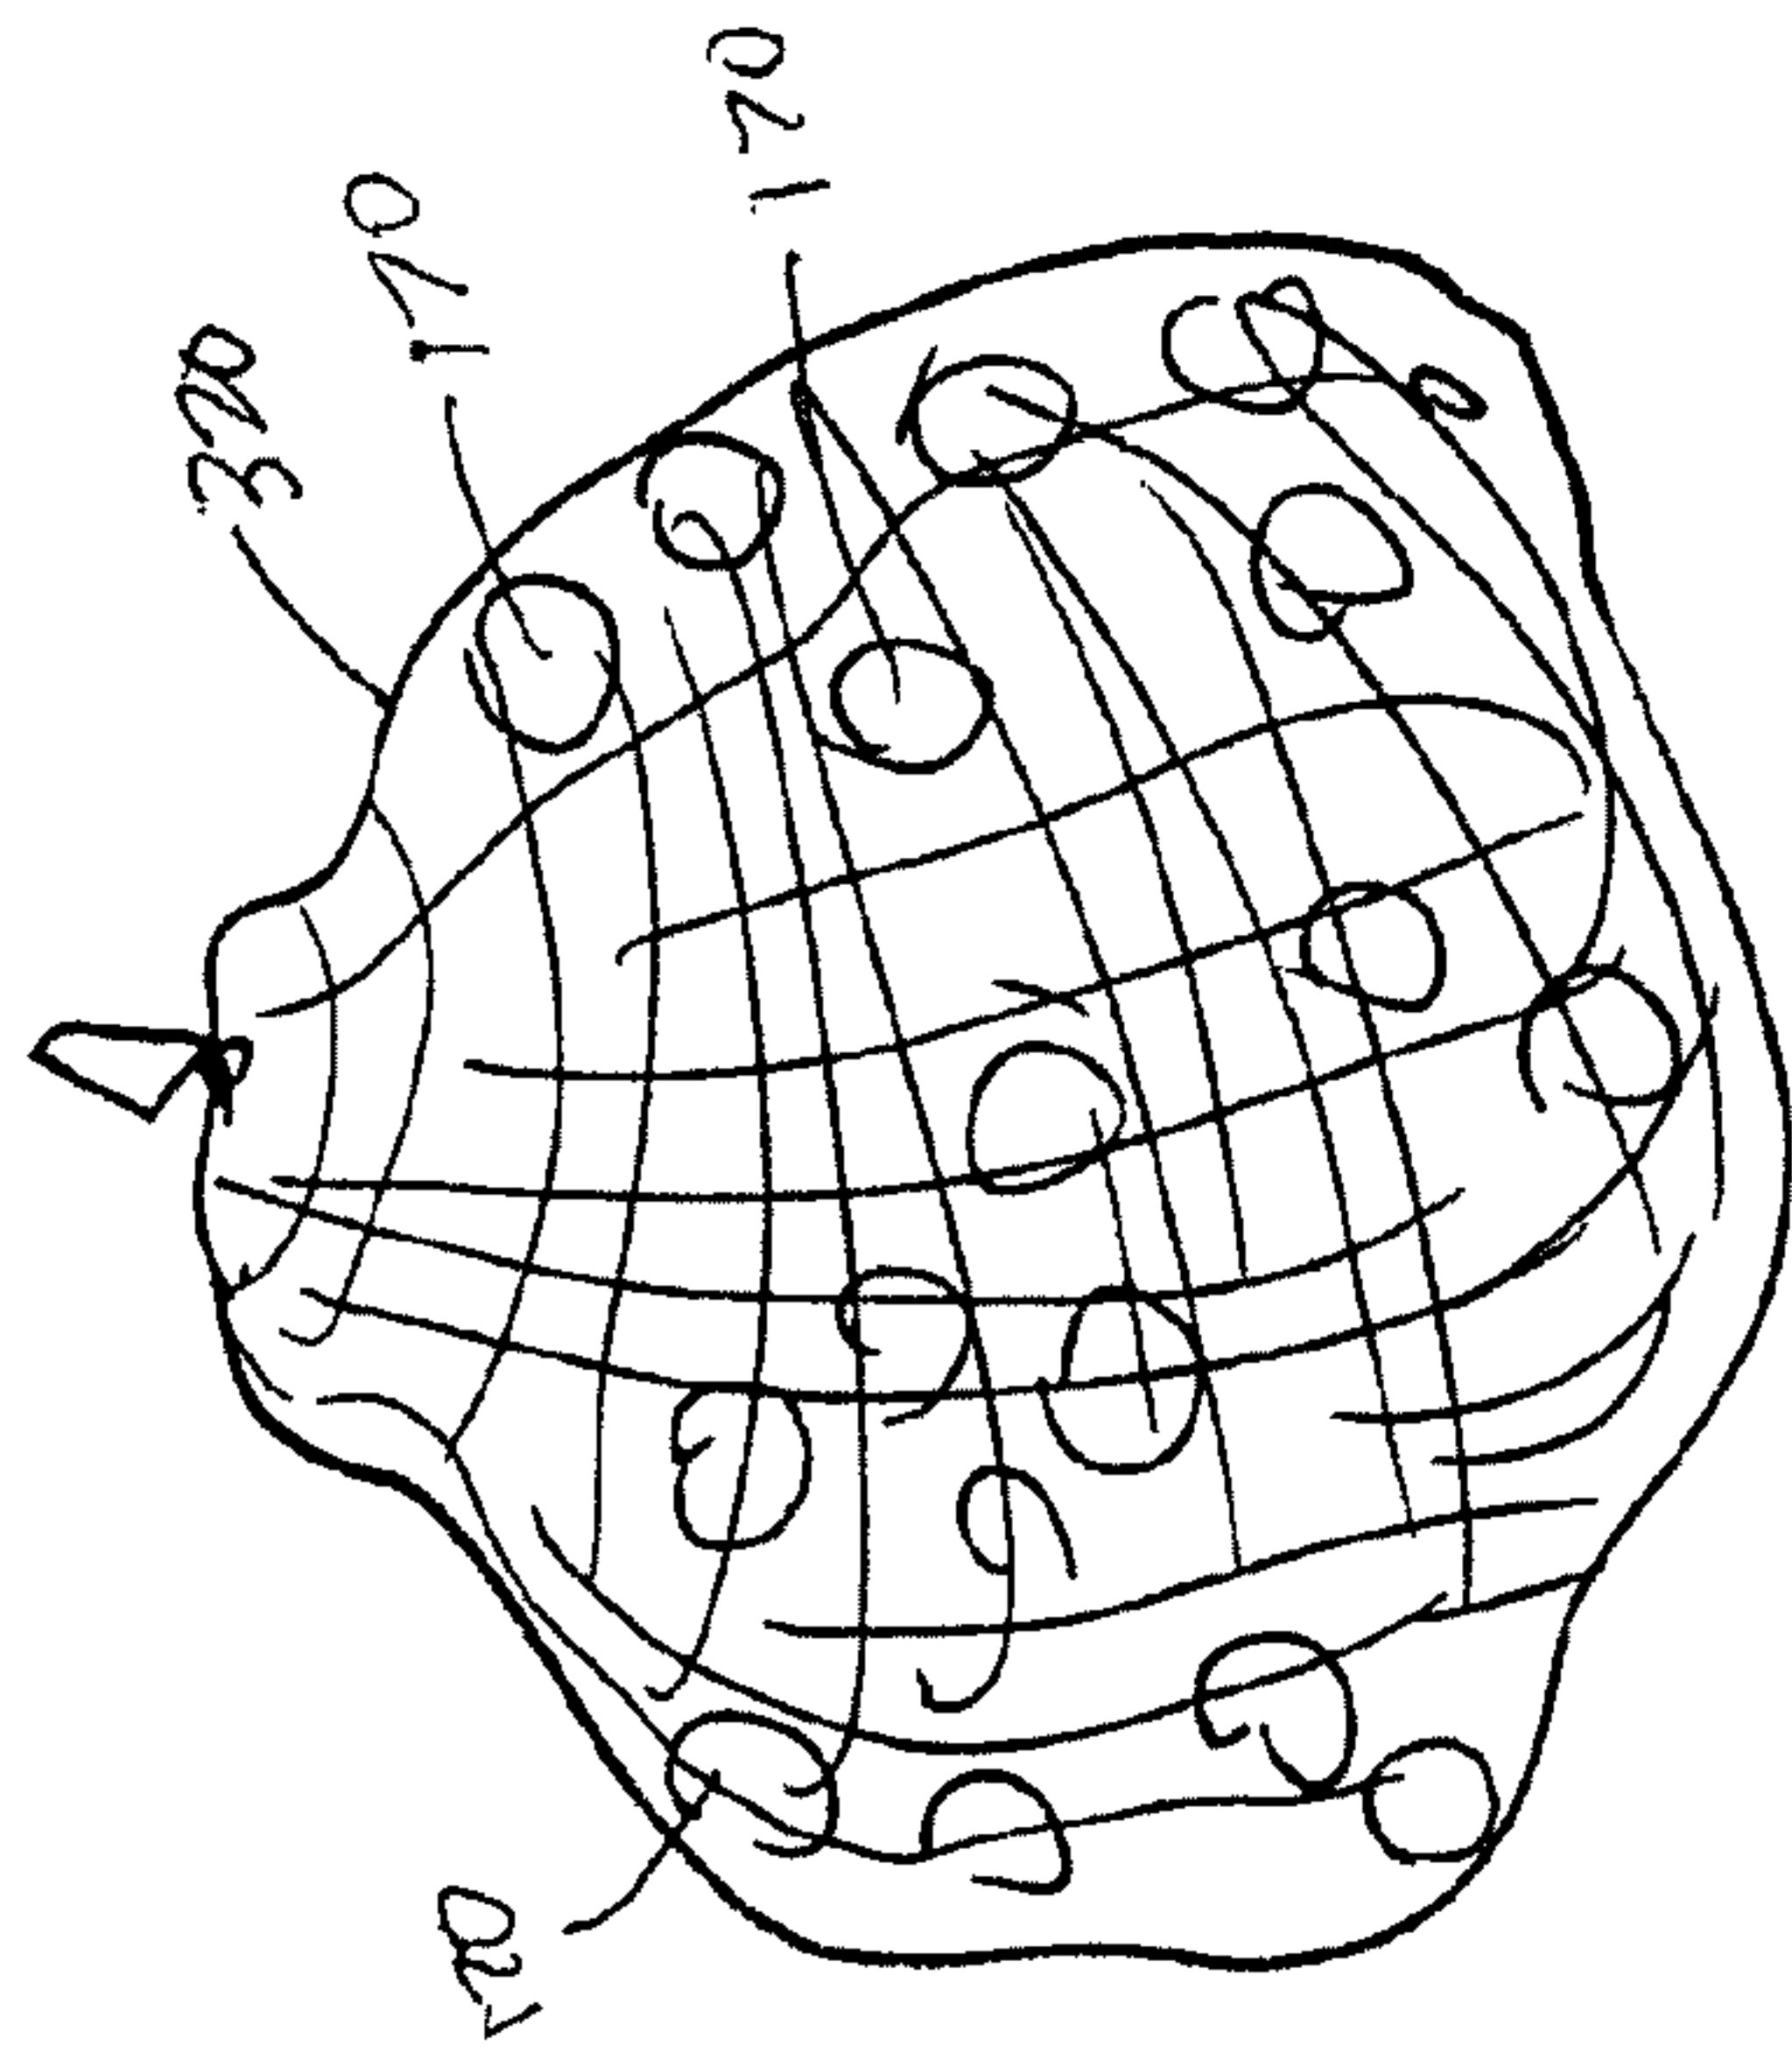


Fig. 12c (PRIOR ART)

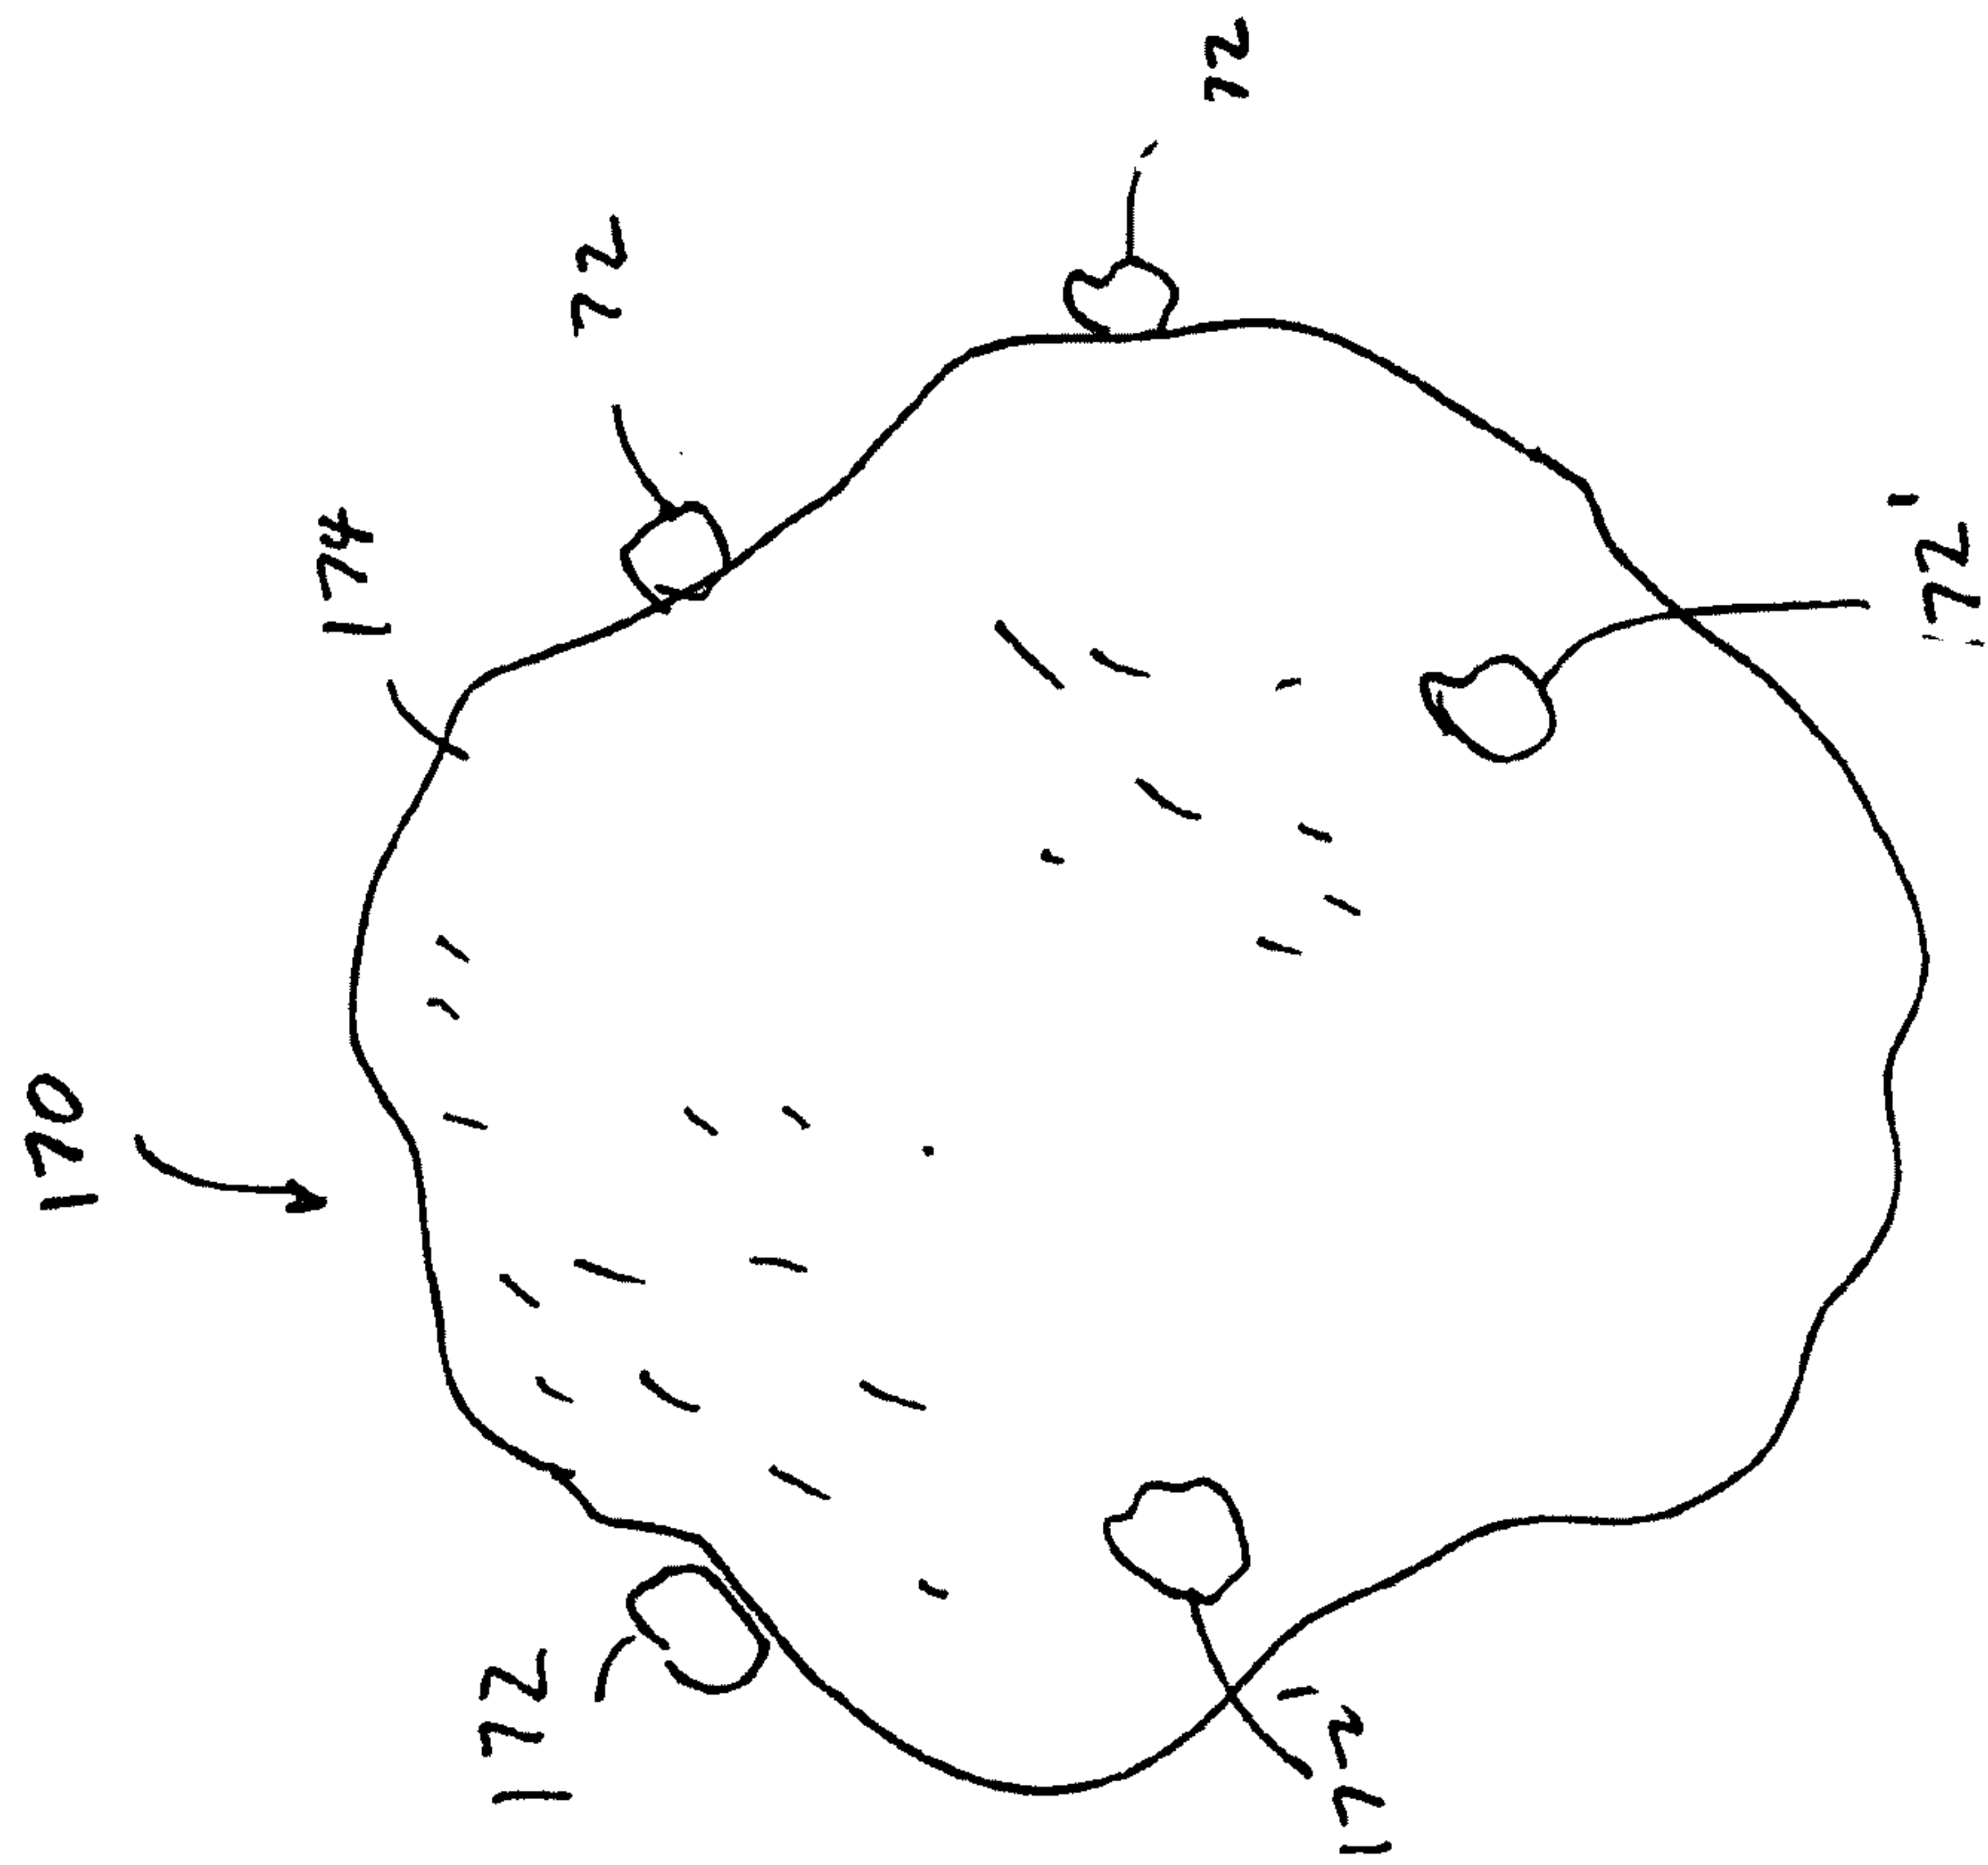


Fig 13 a (PRIOR ART)

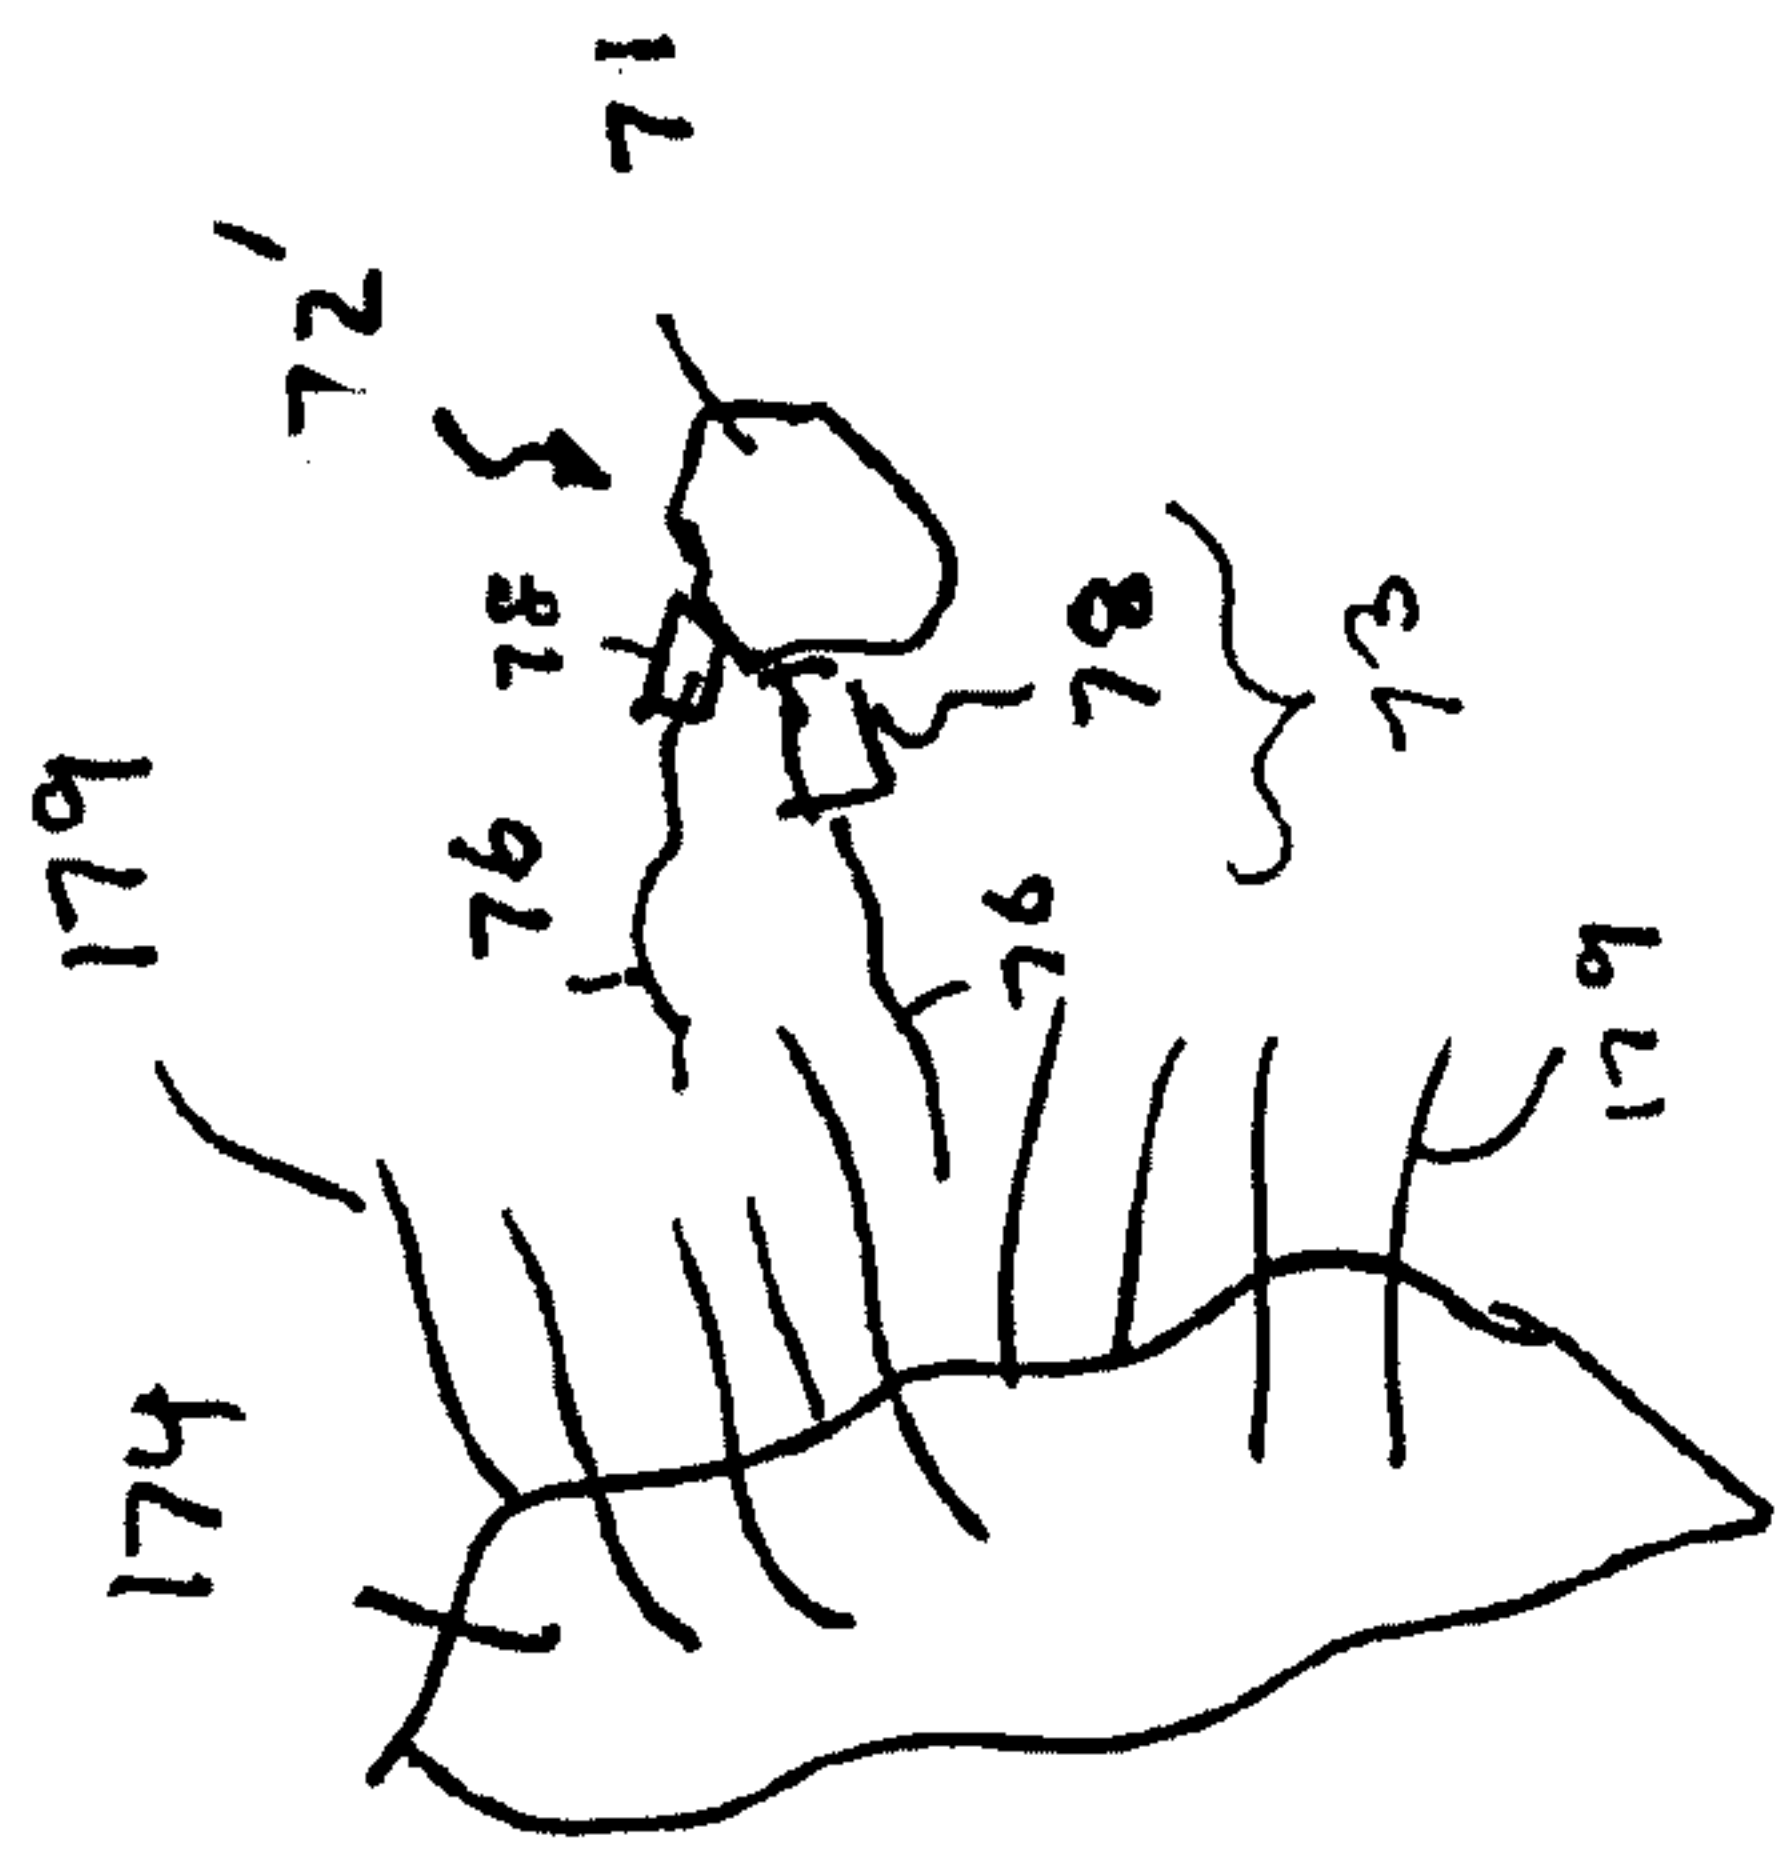


Fig 13 b (PRIOR ART)

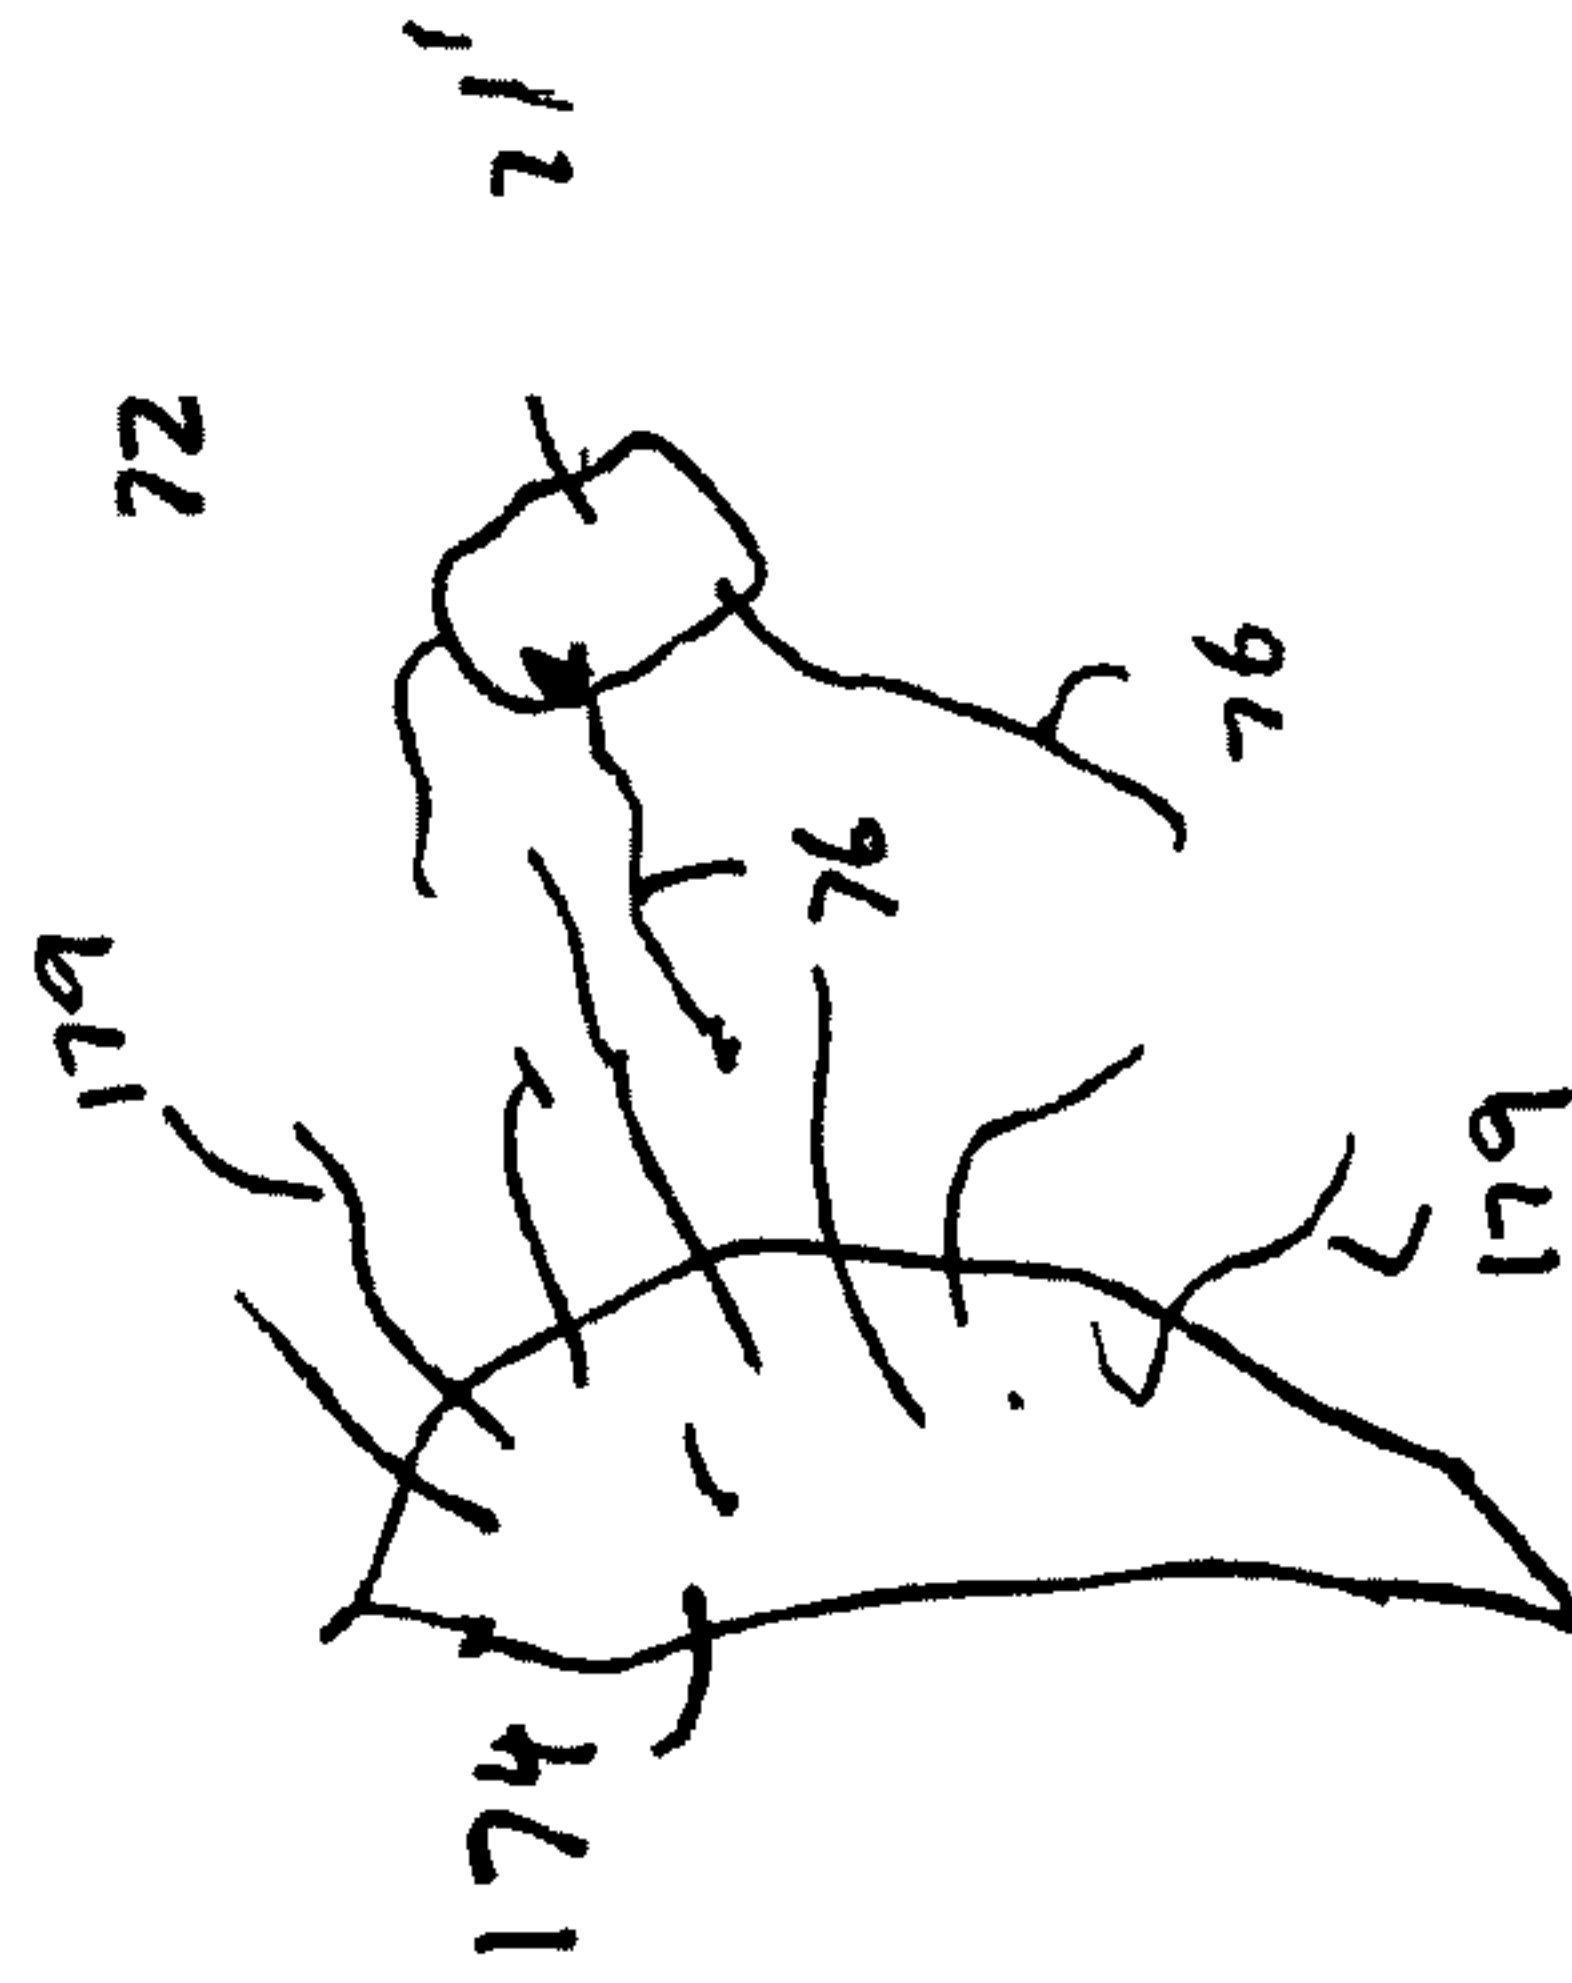


Fig 13 c (PRIOR ART)

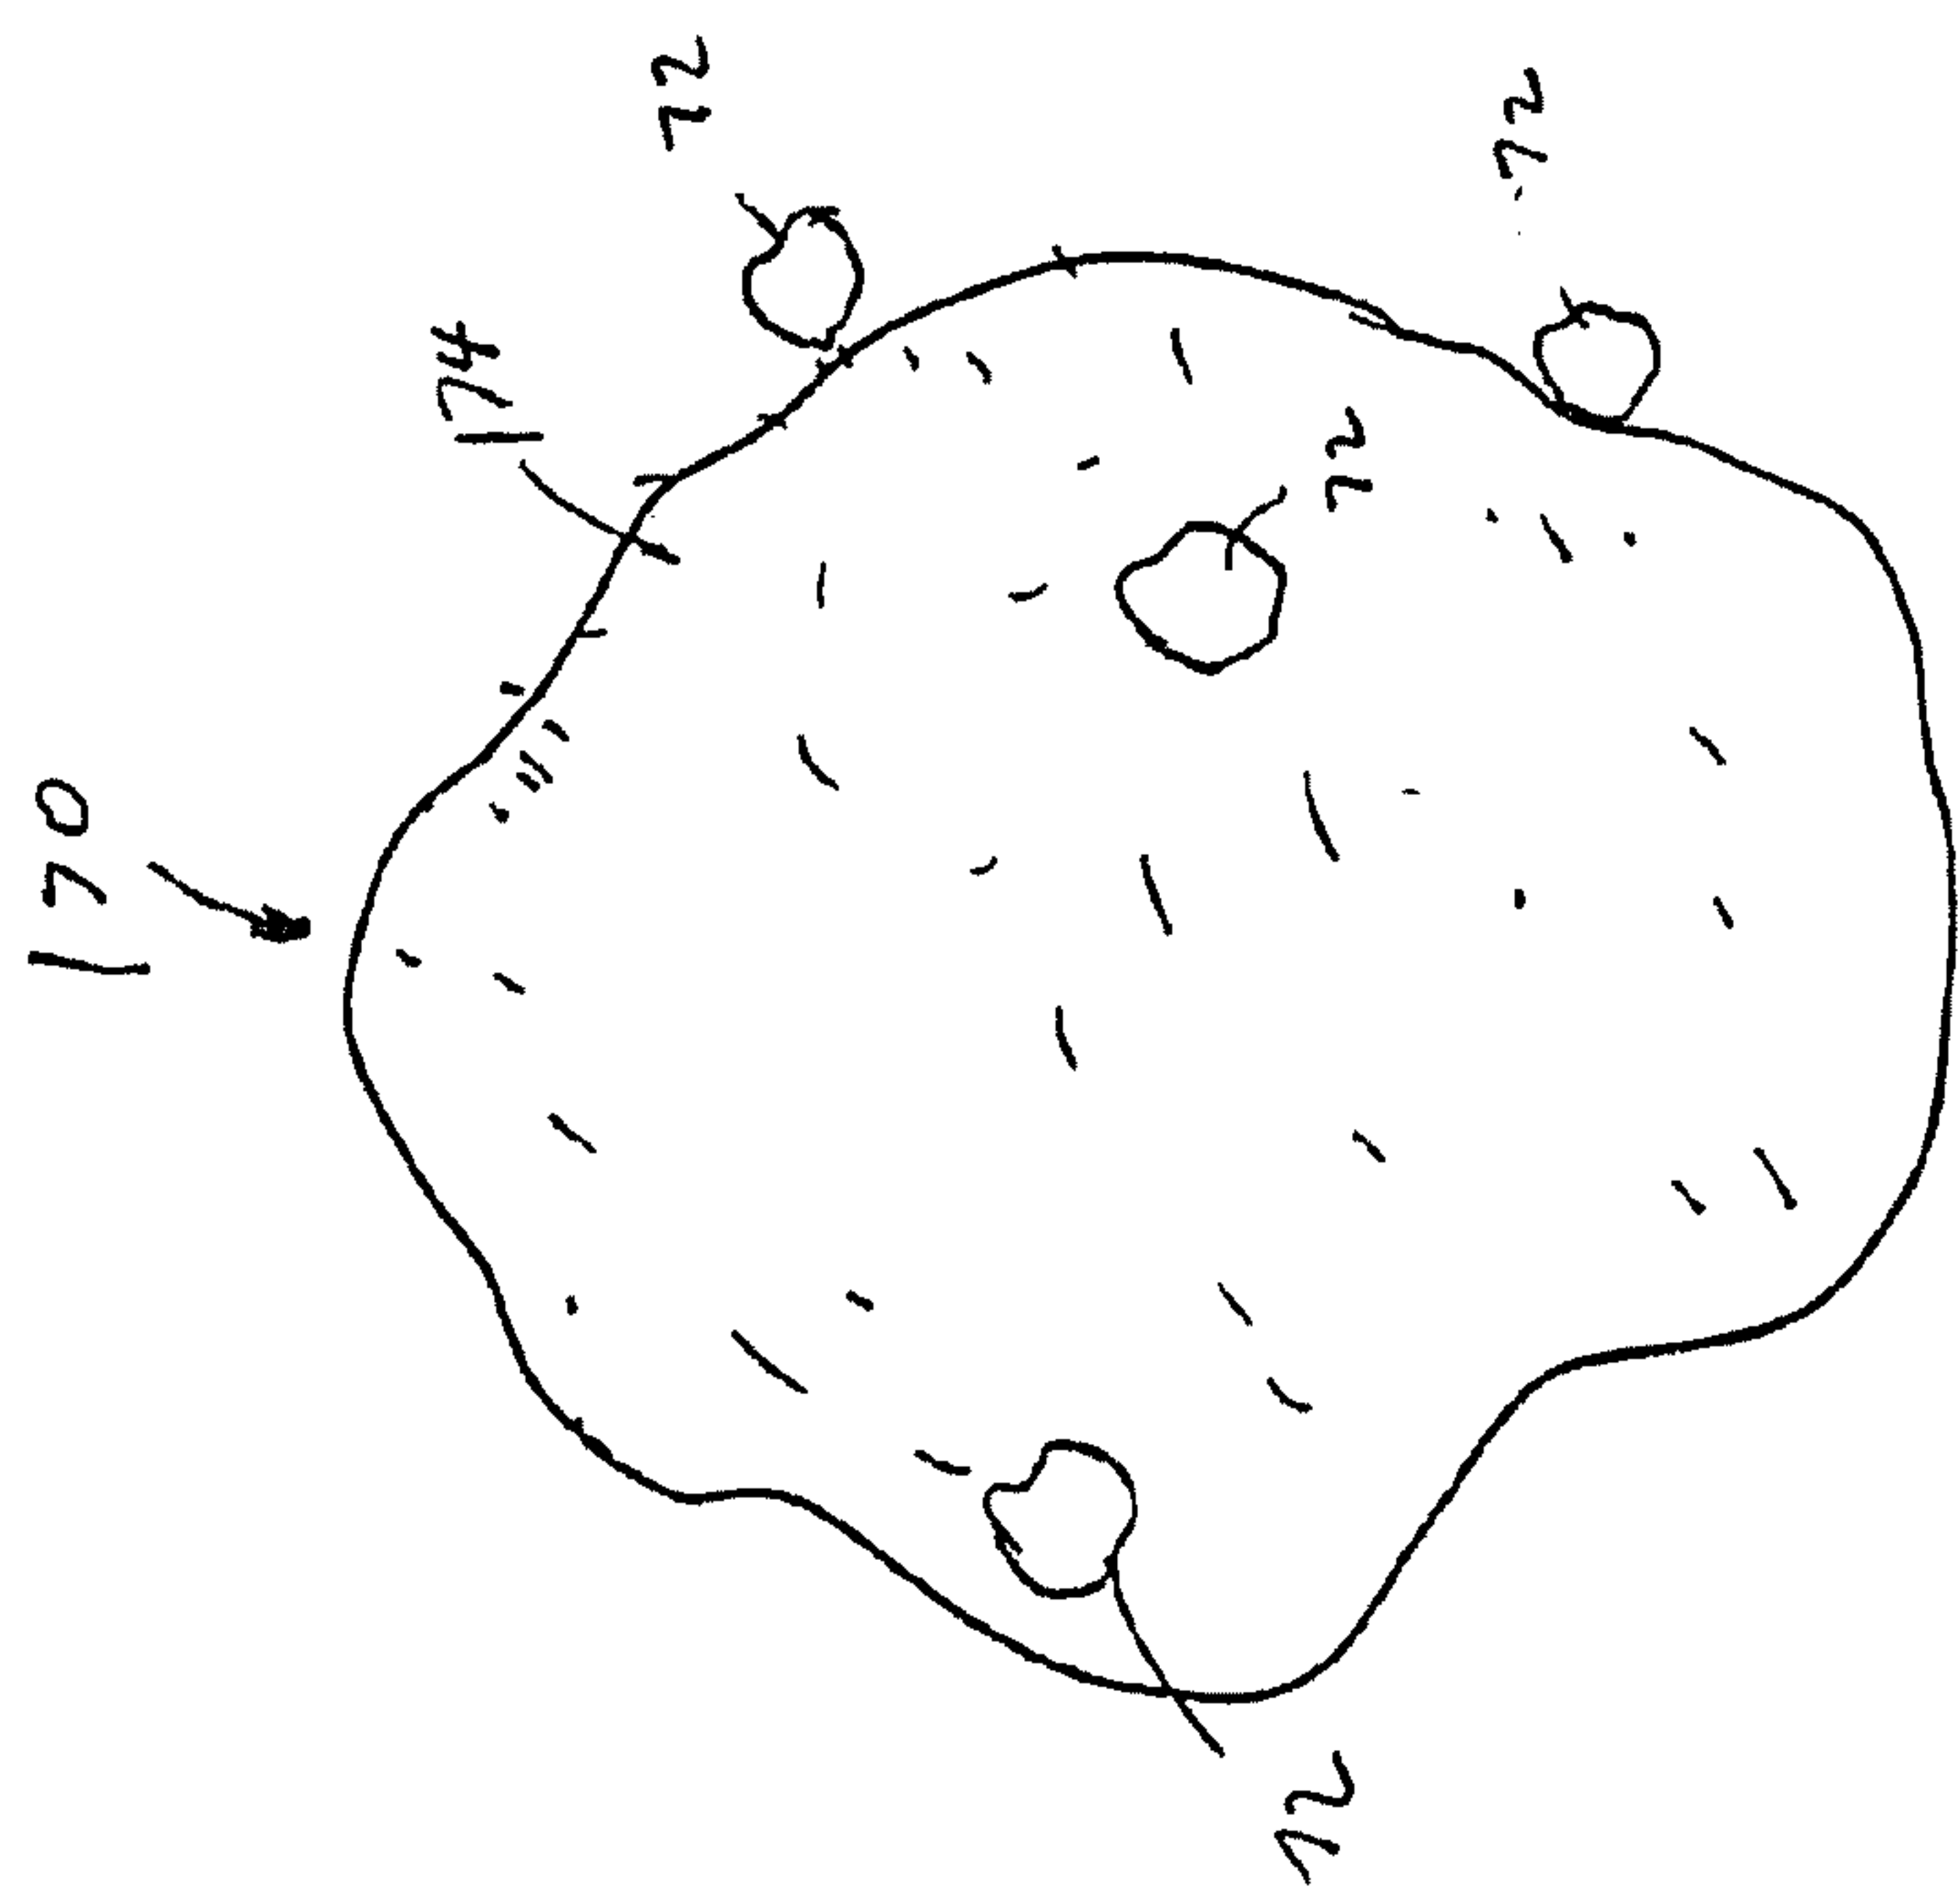


Fig. 14a
(PRIOR ART)

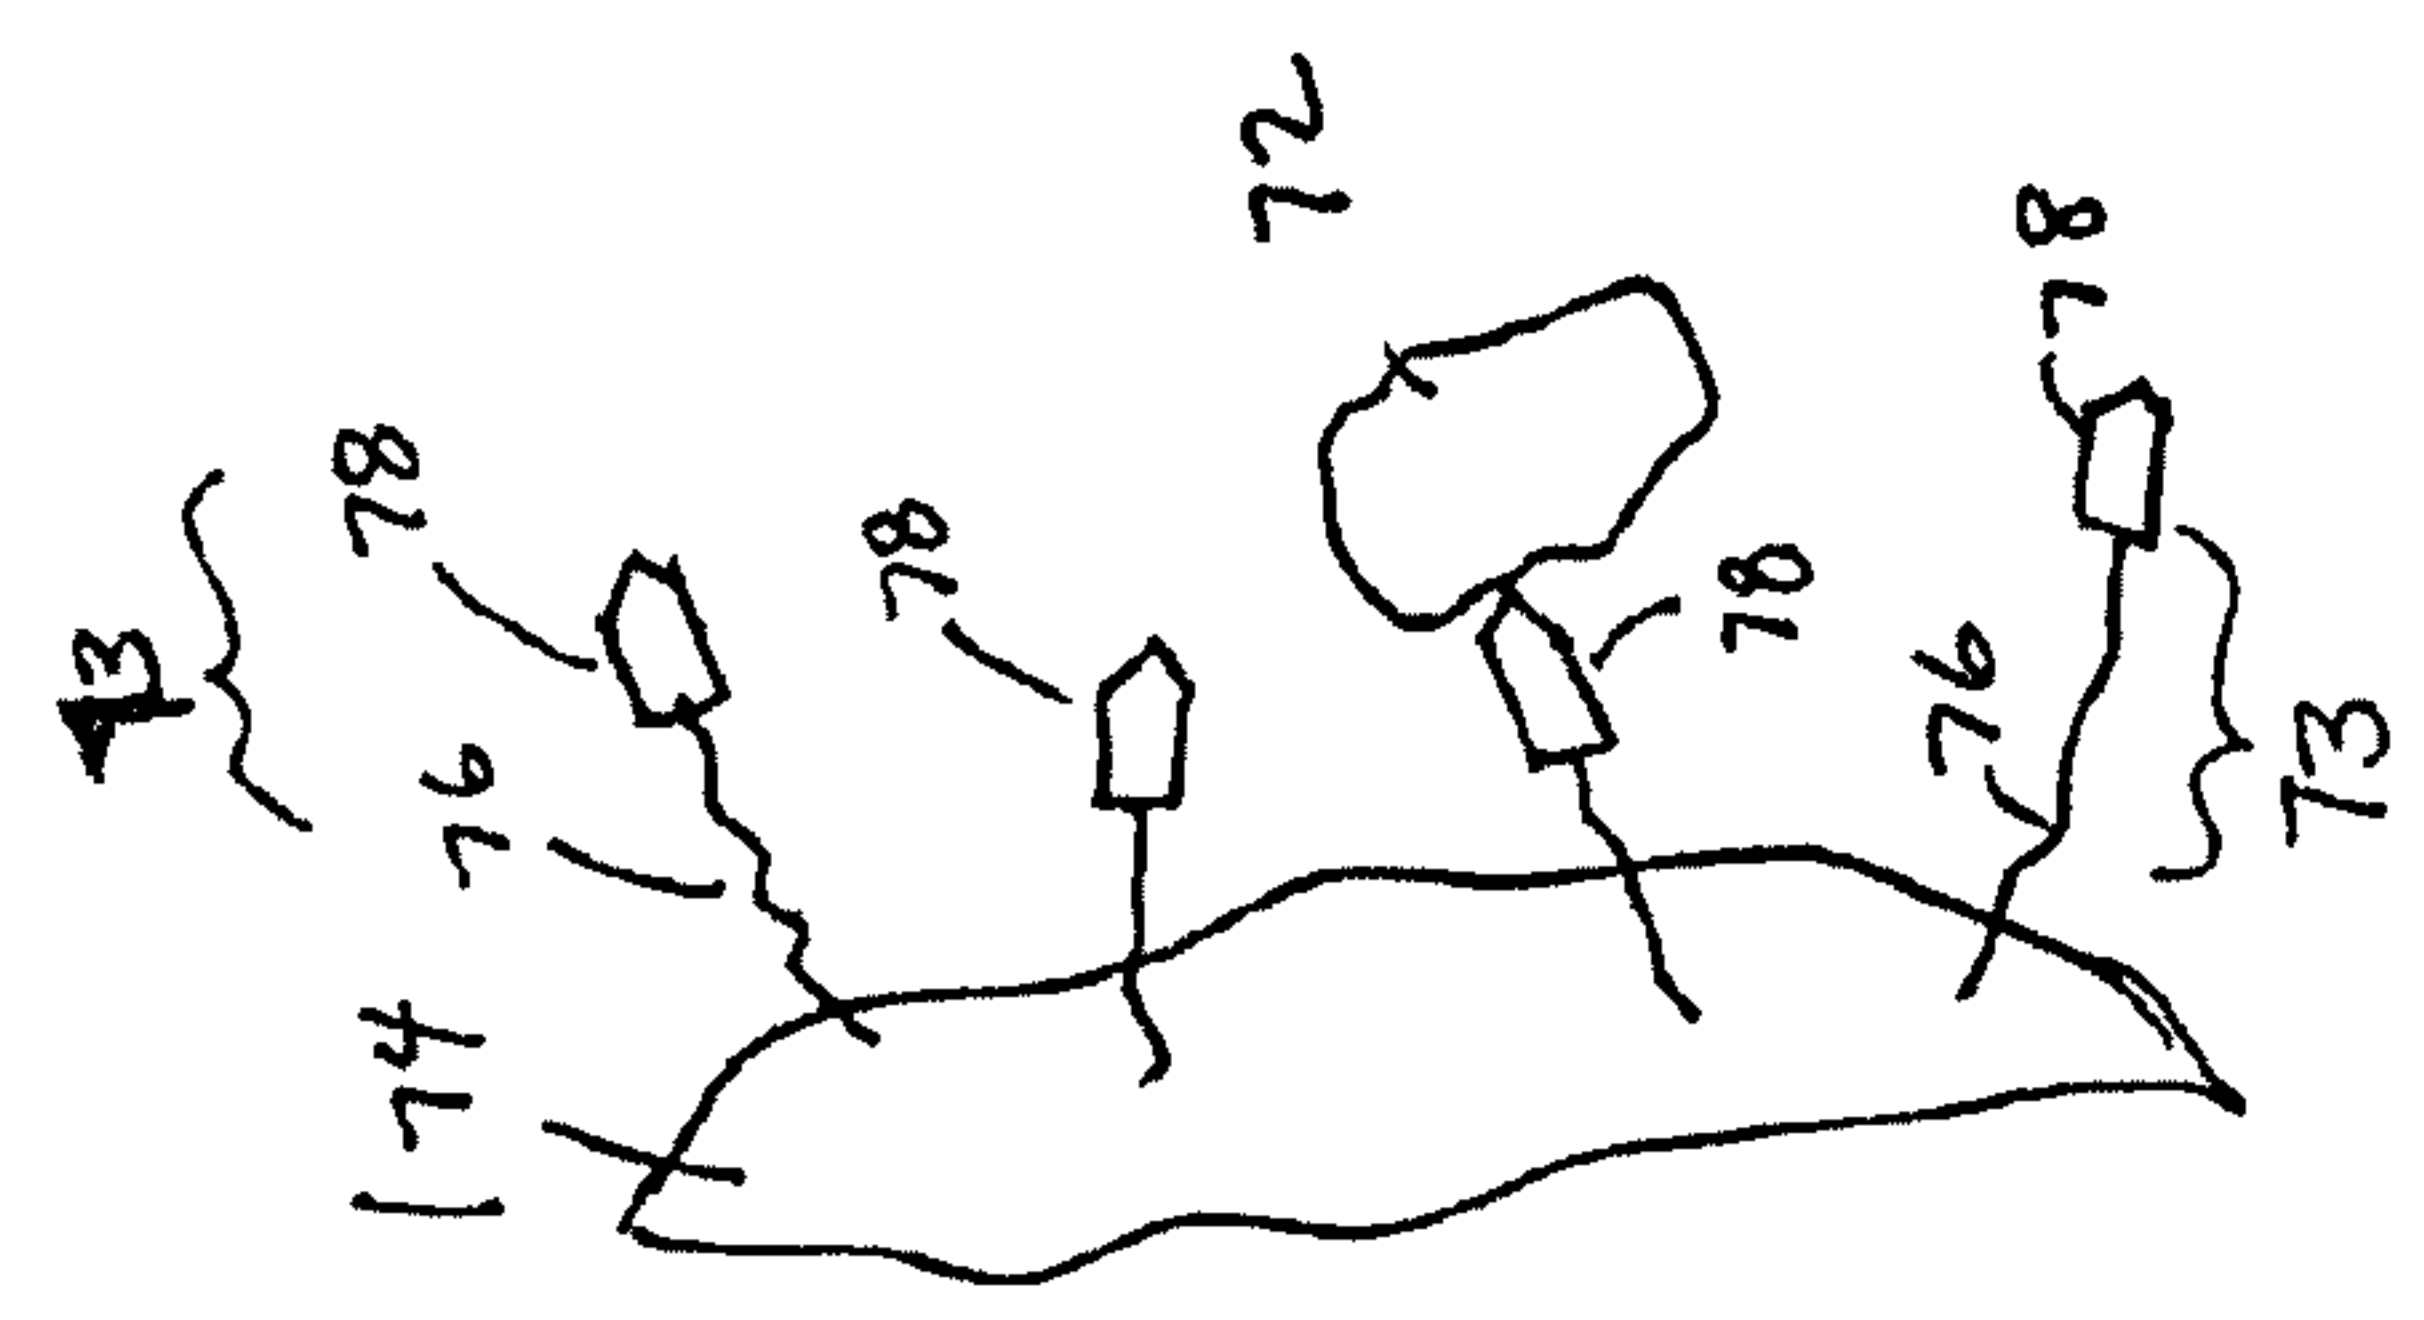
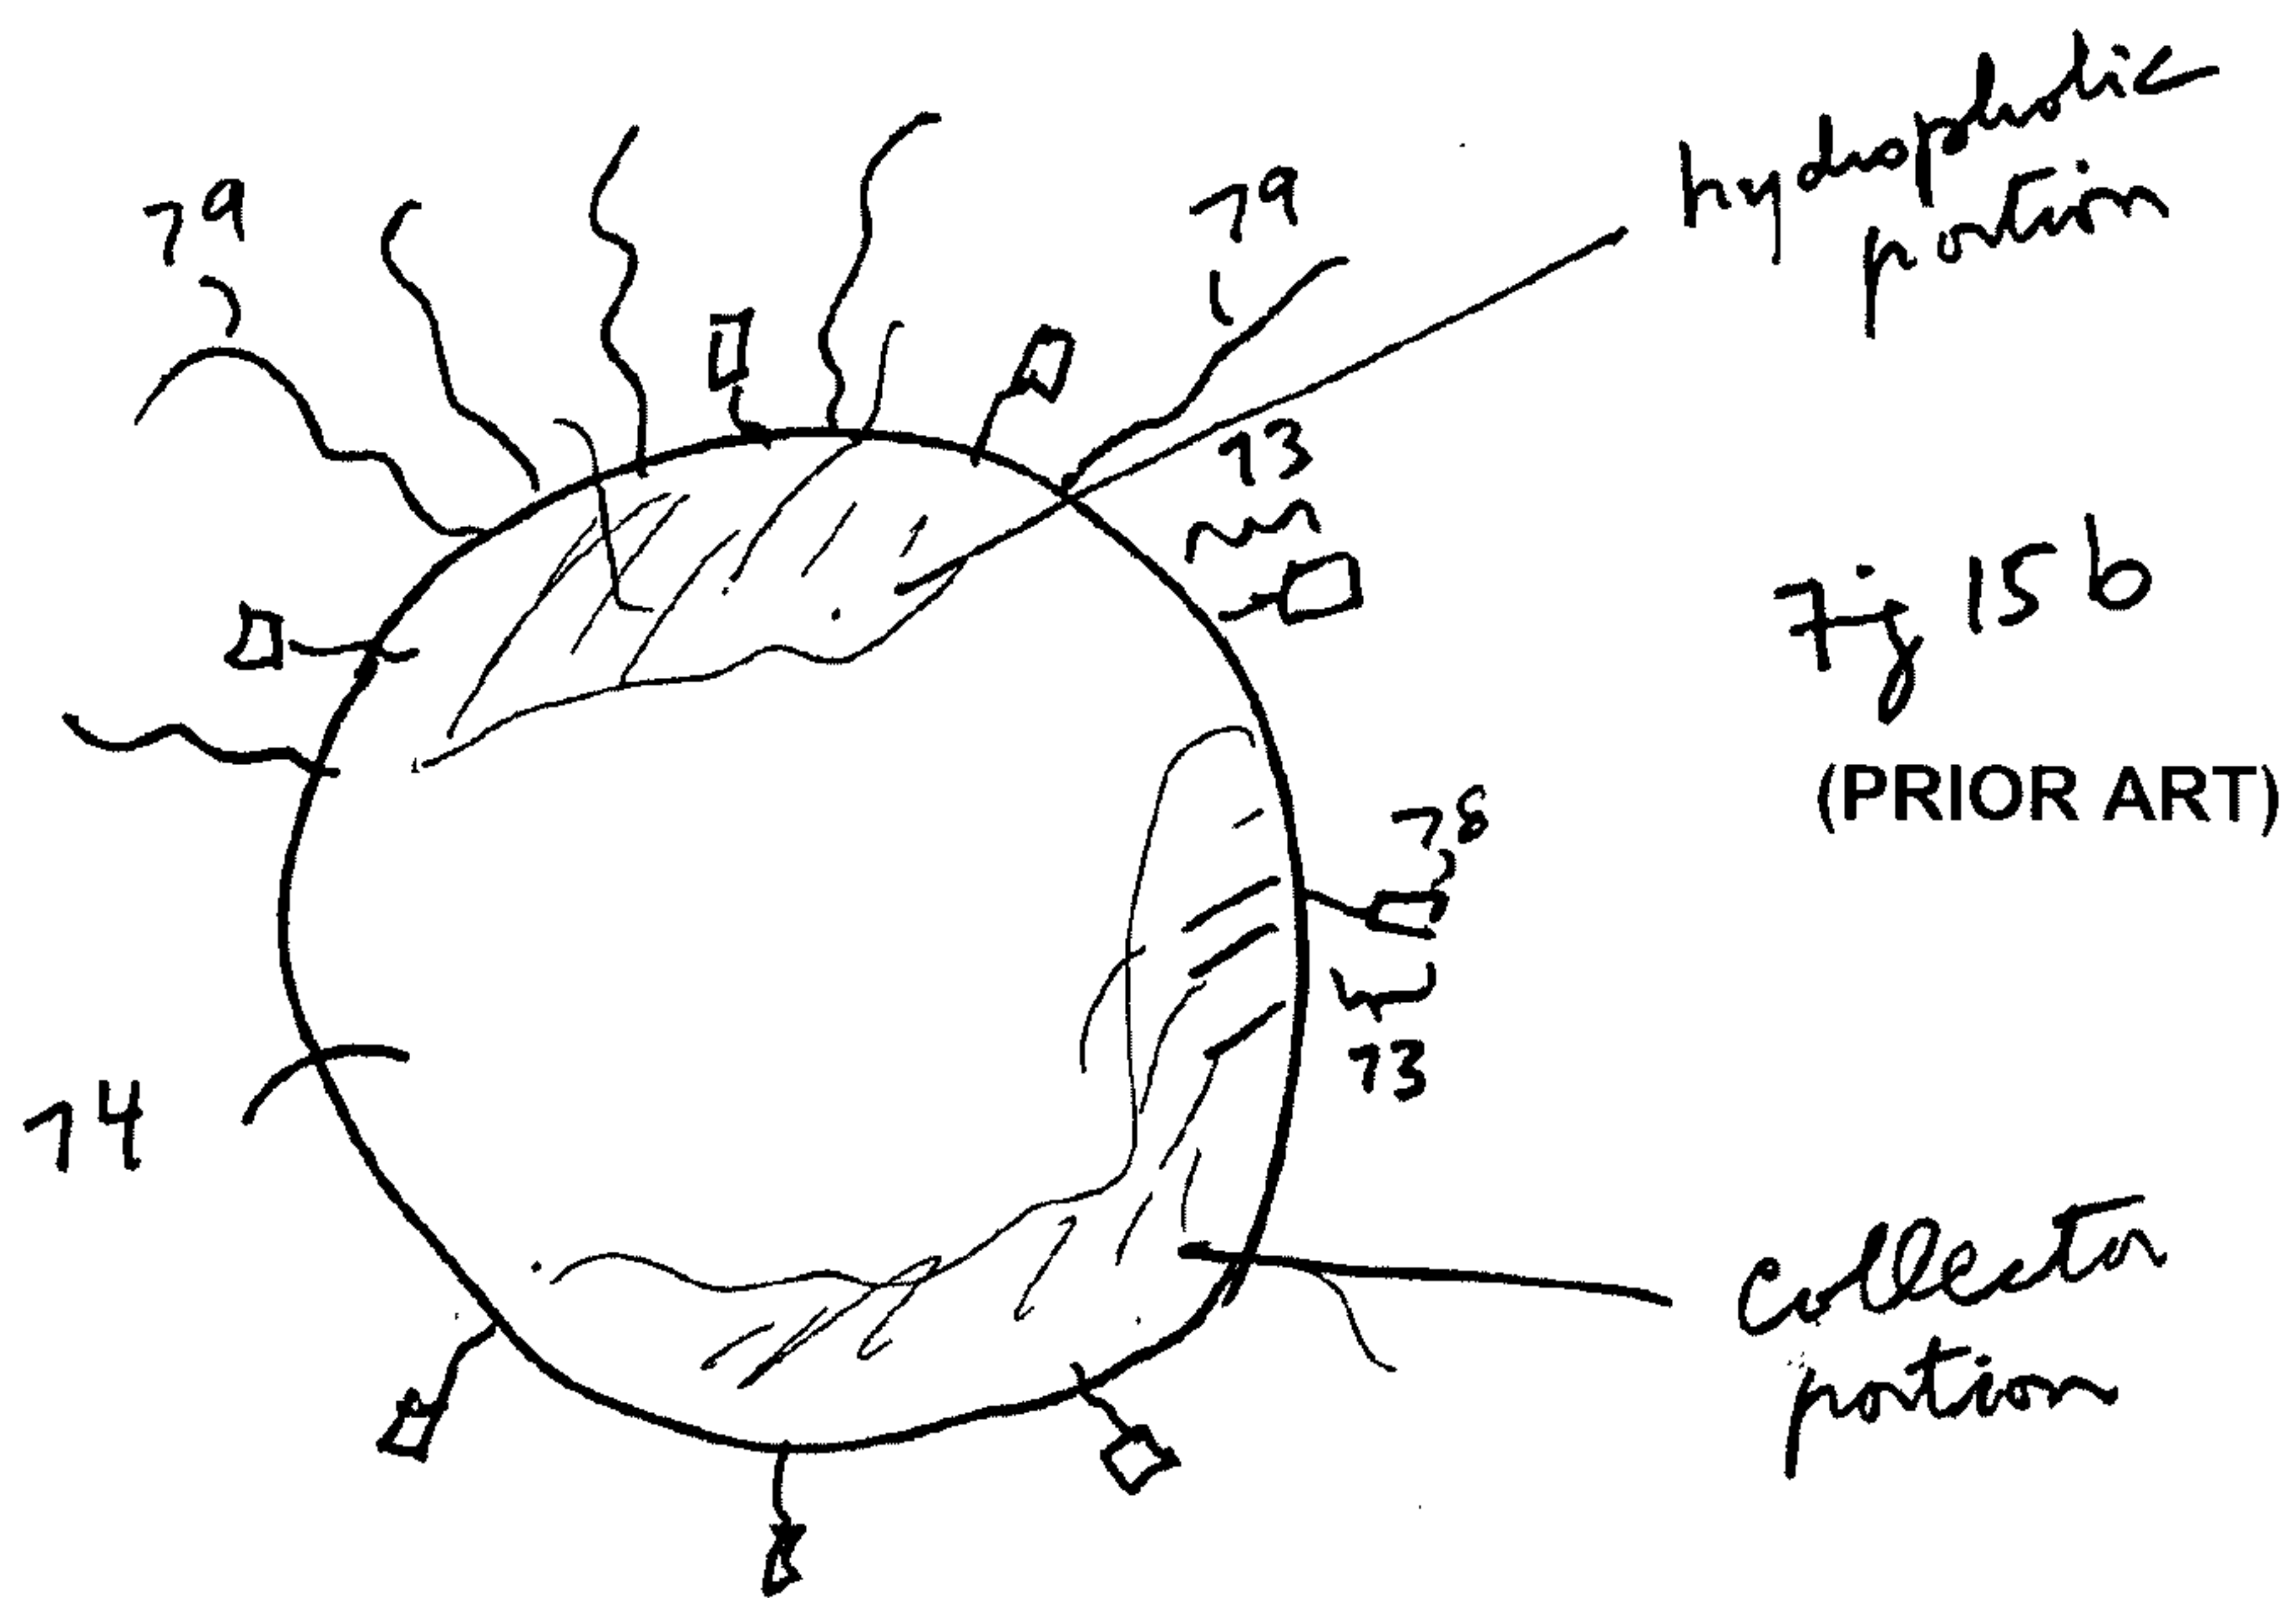
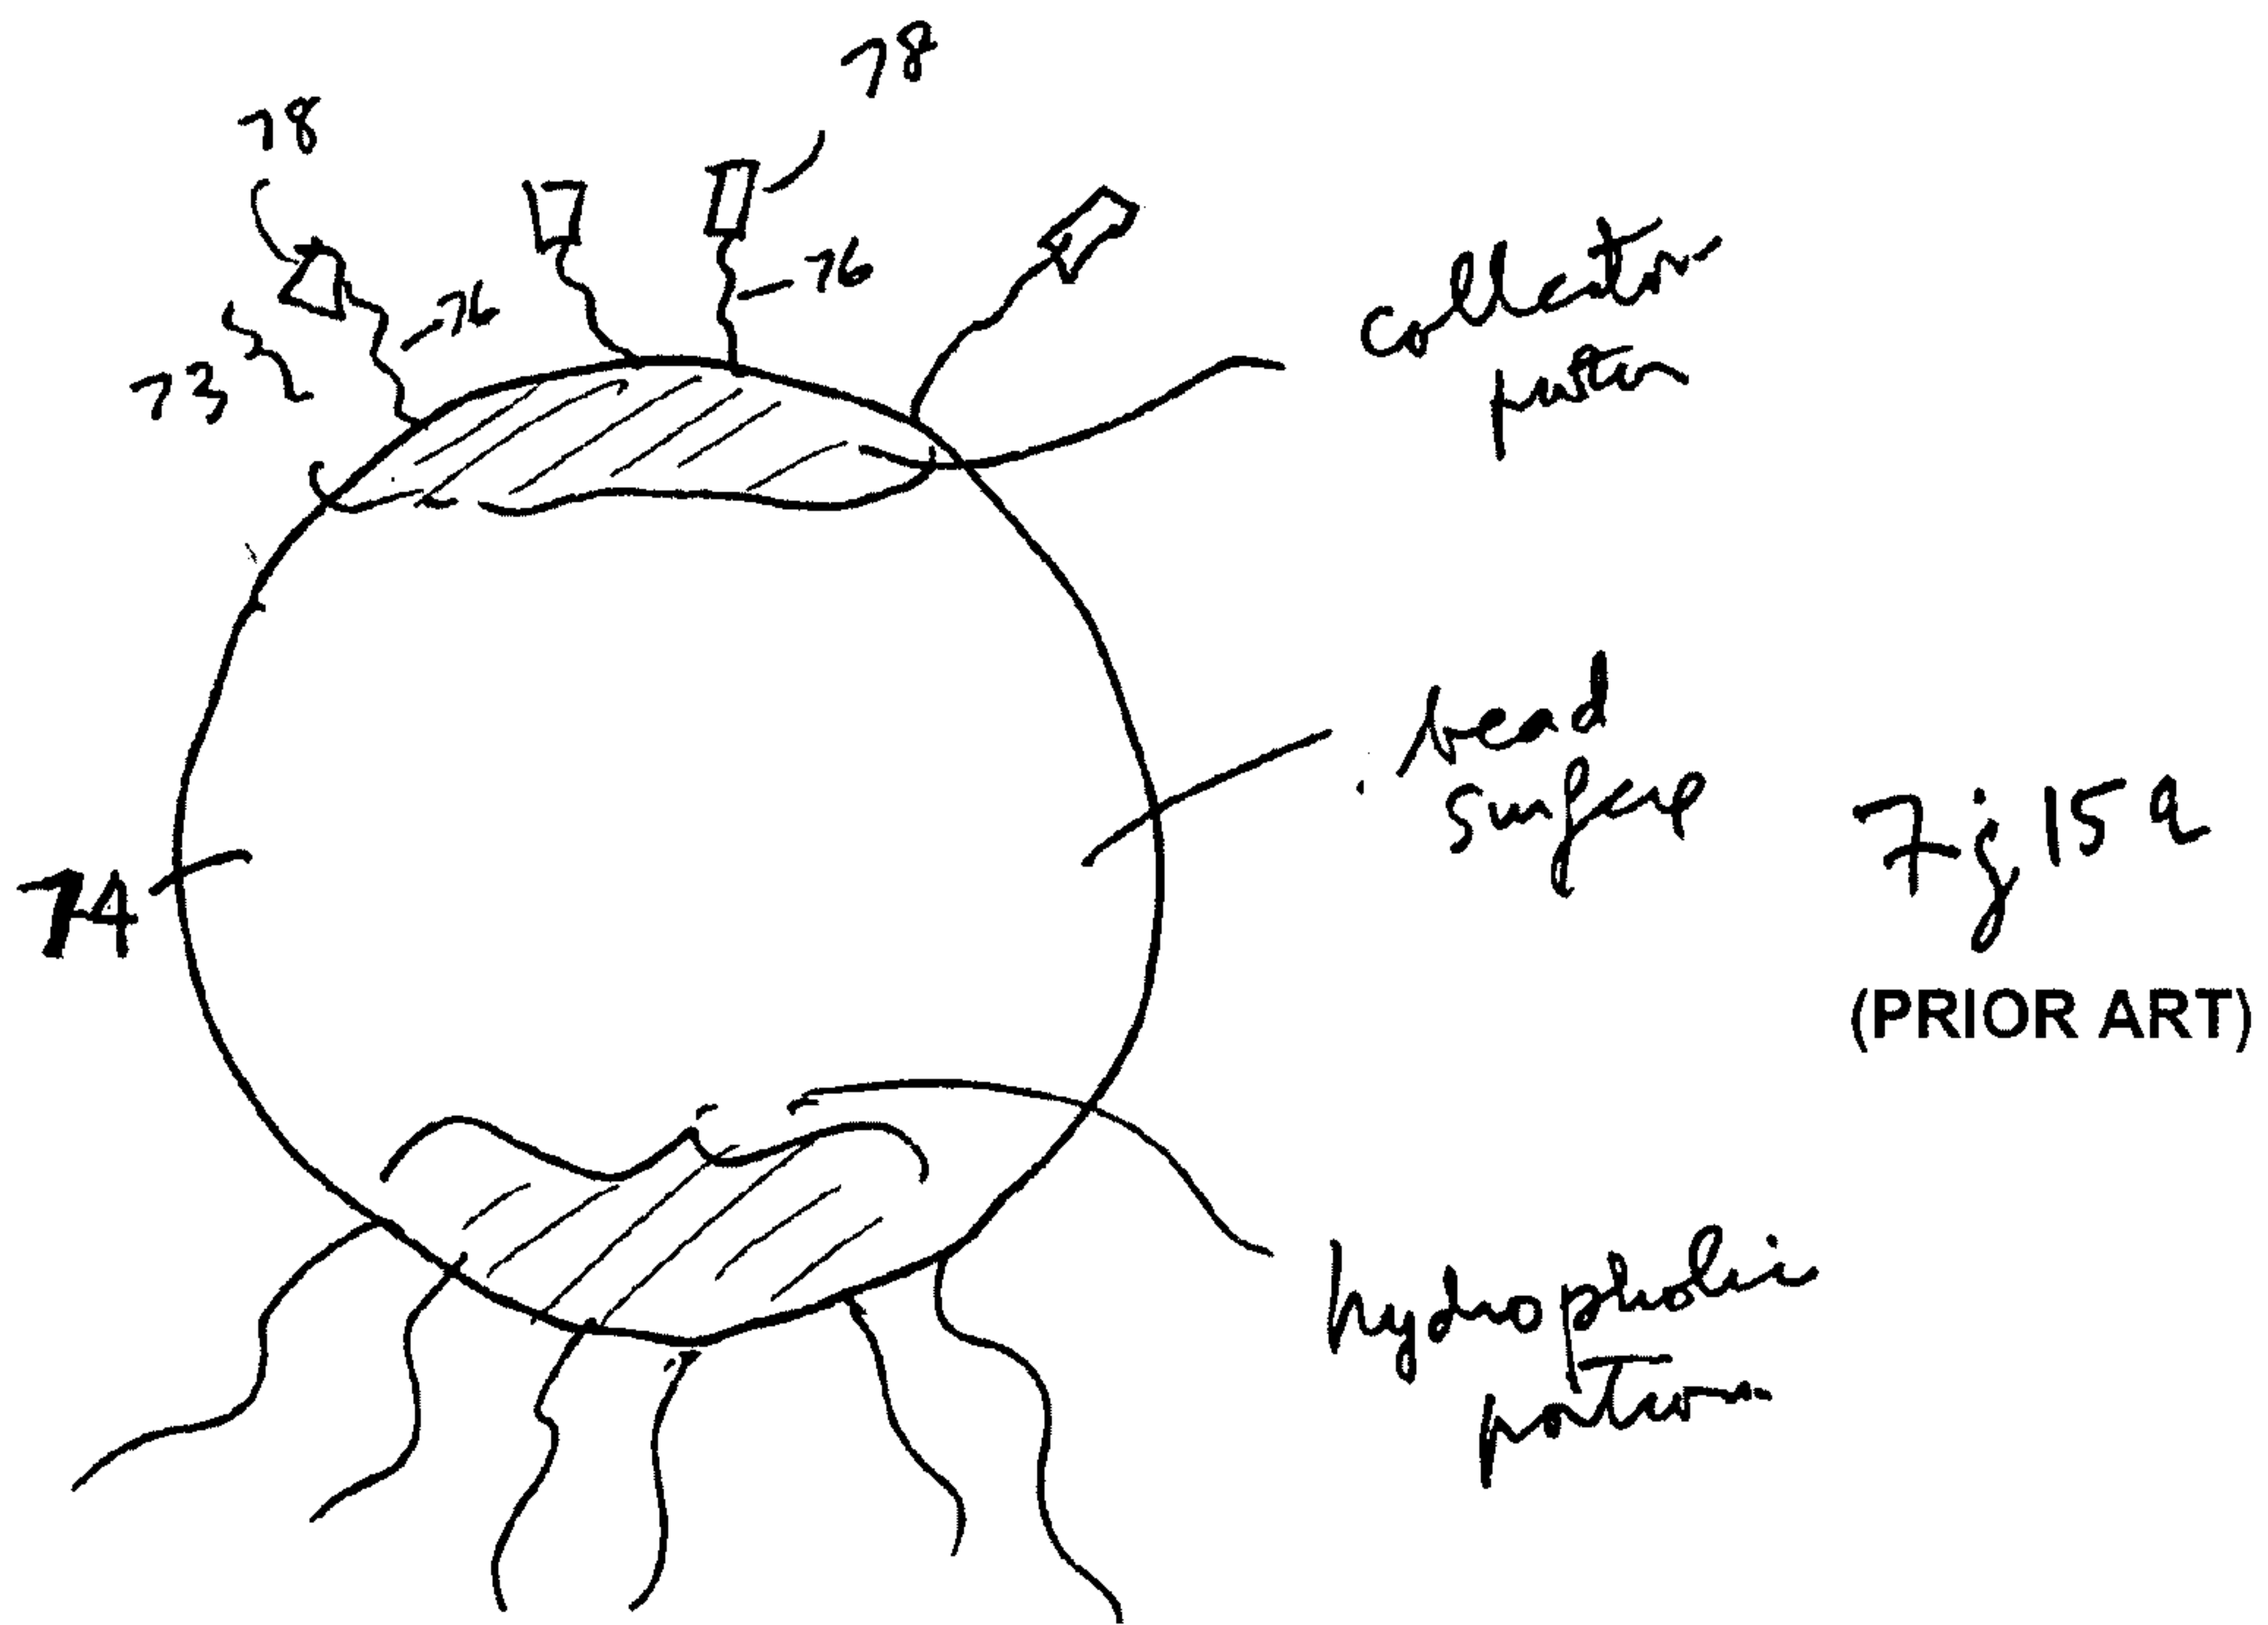
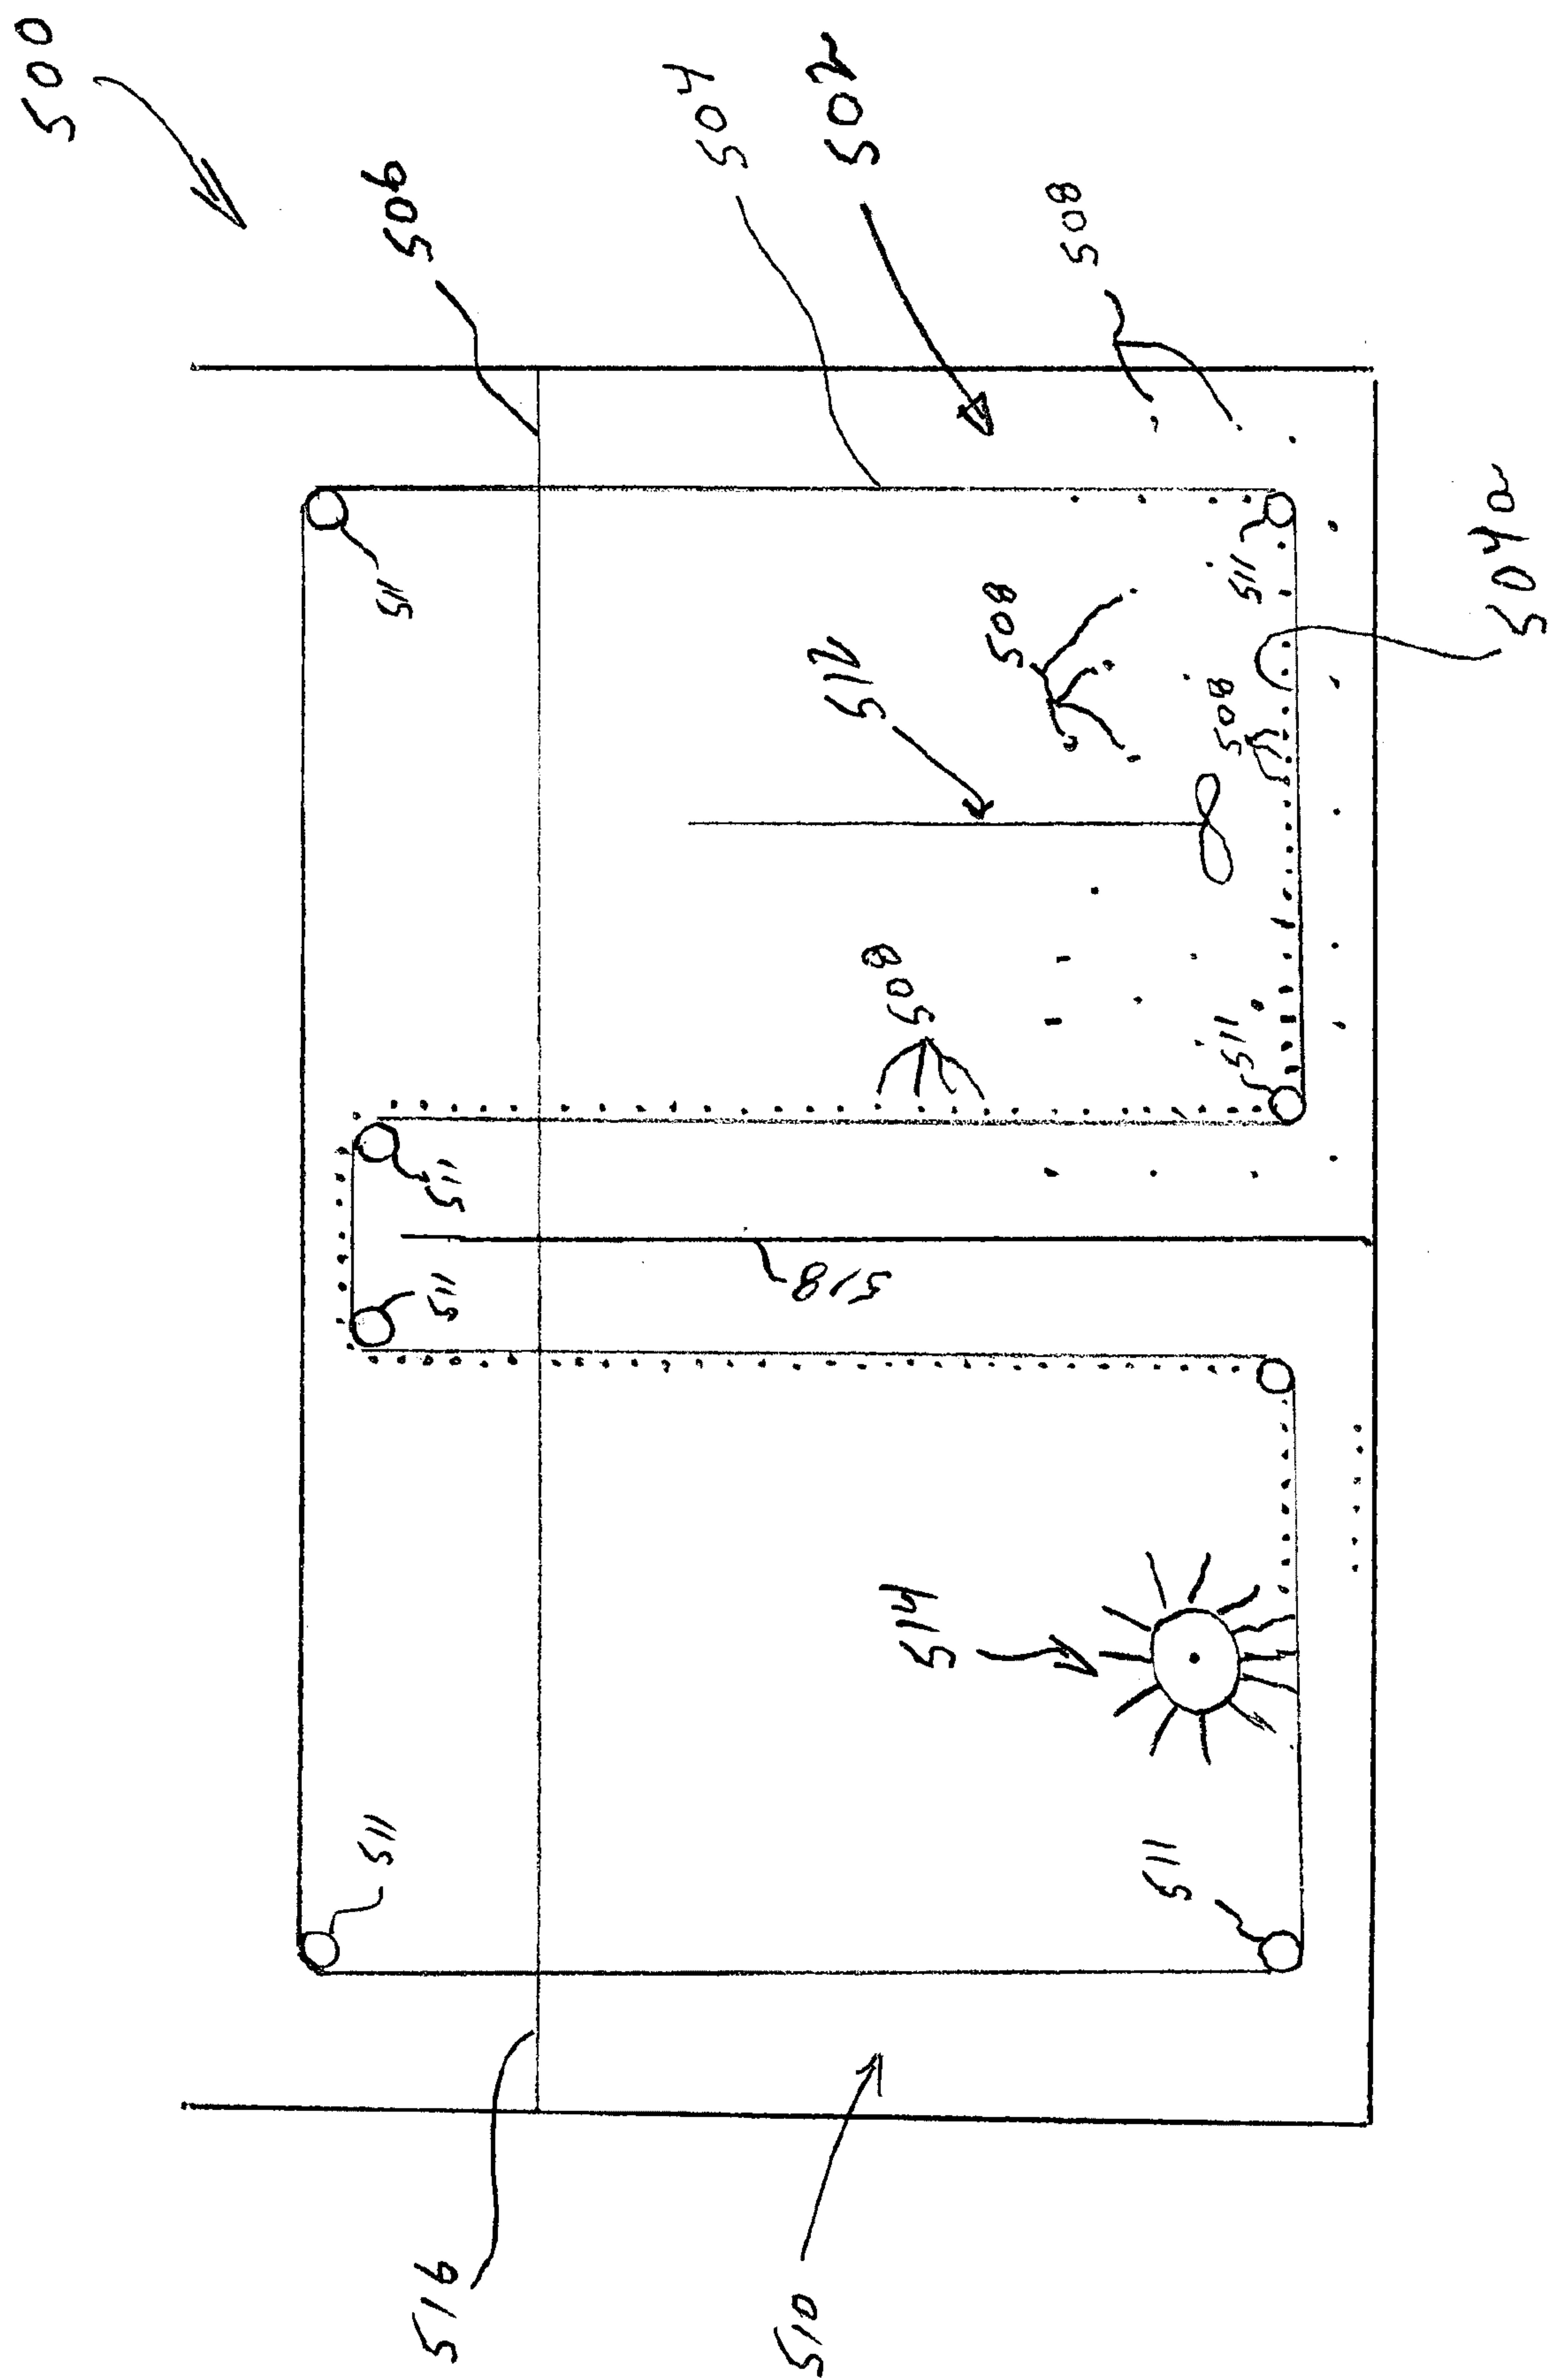


Fig. 14b
(PRIOR ART)





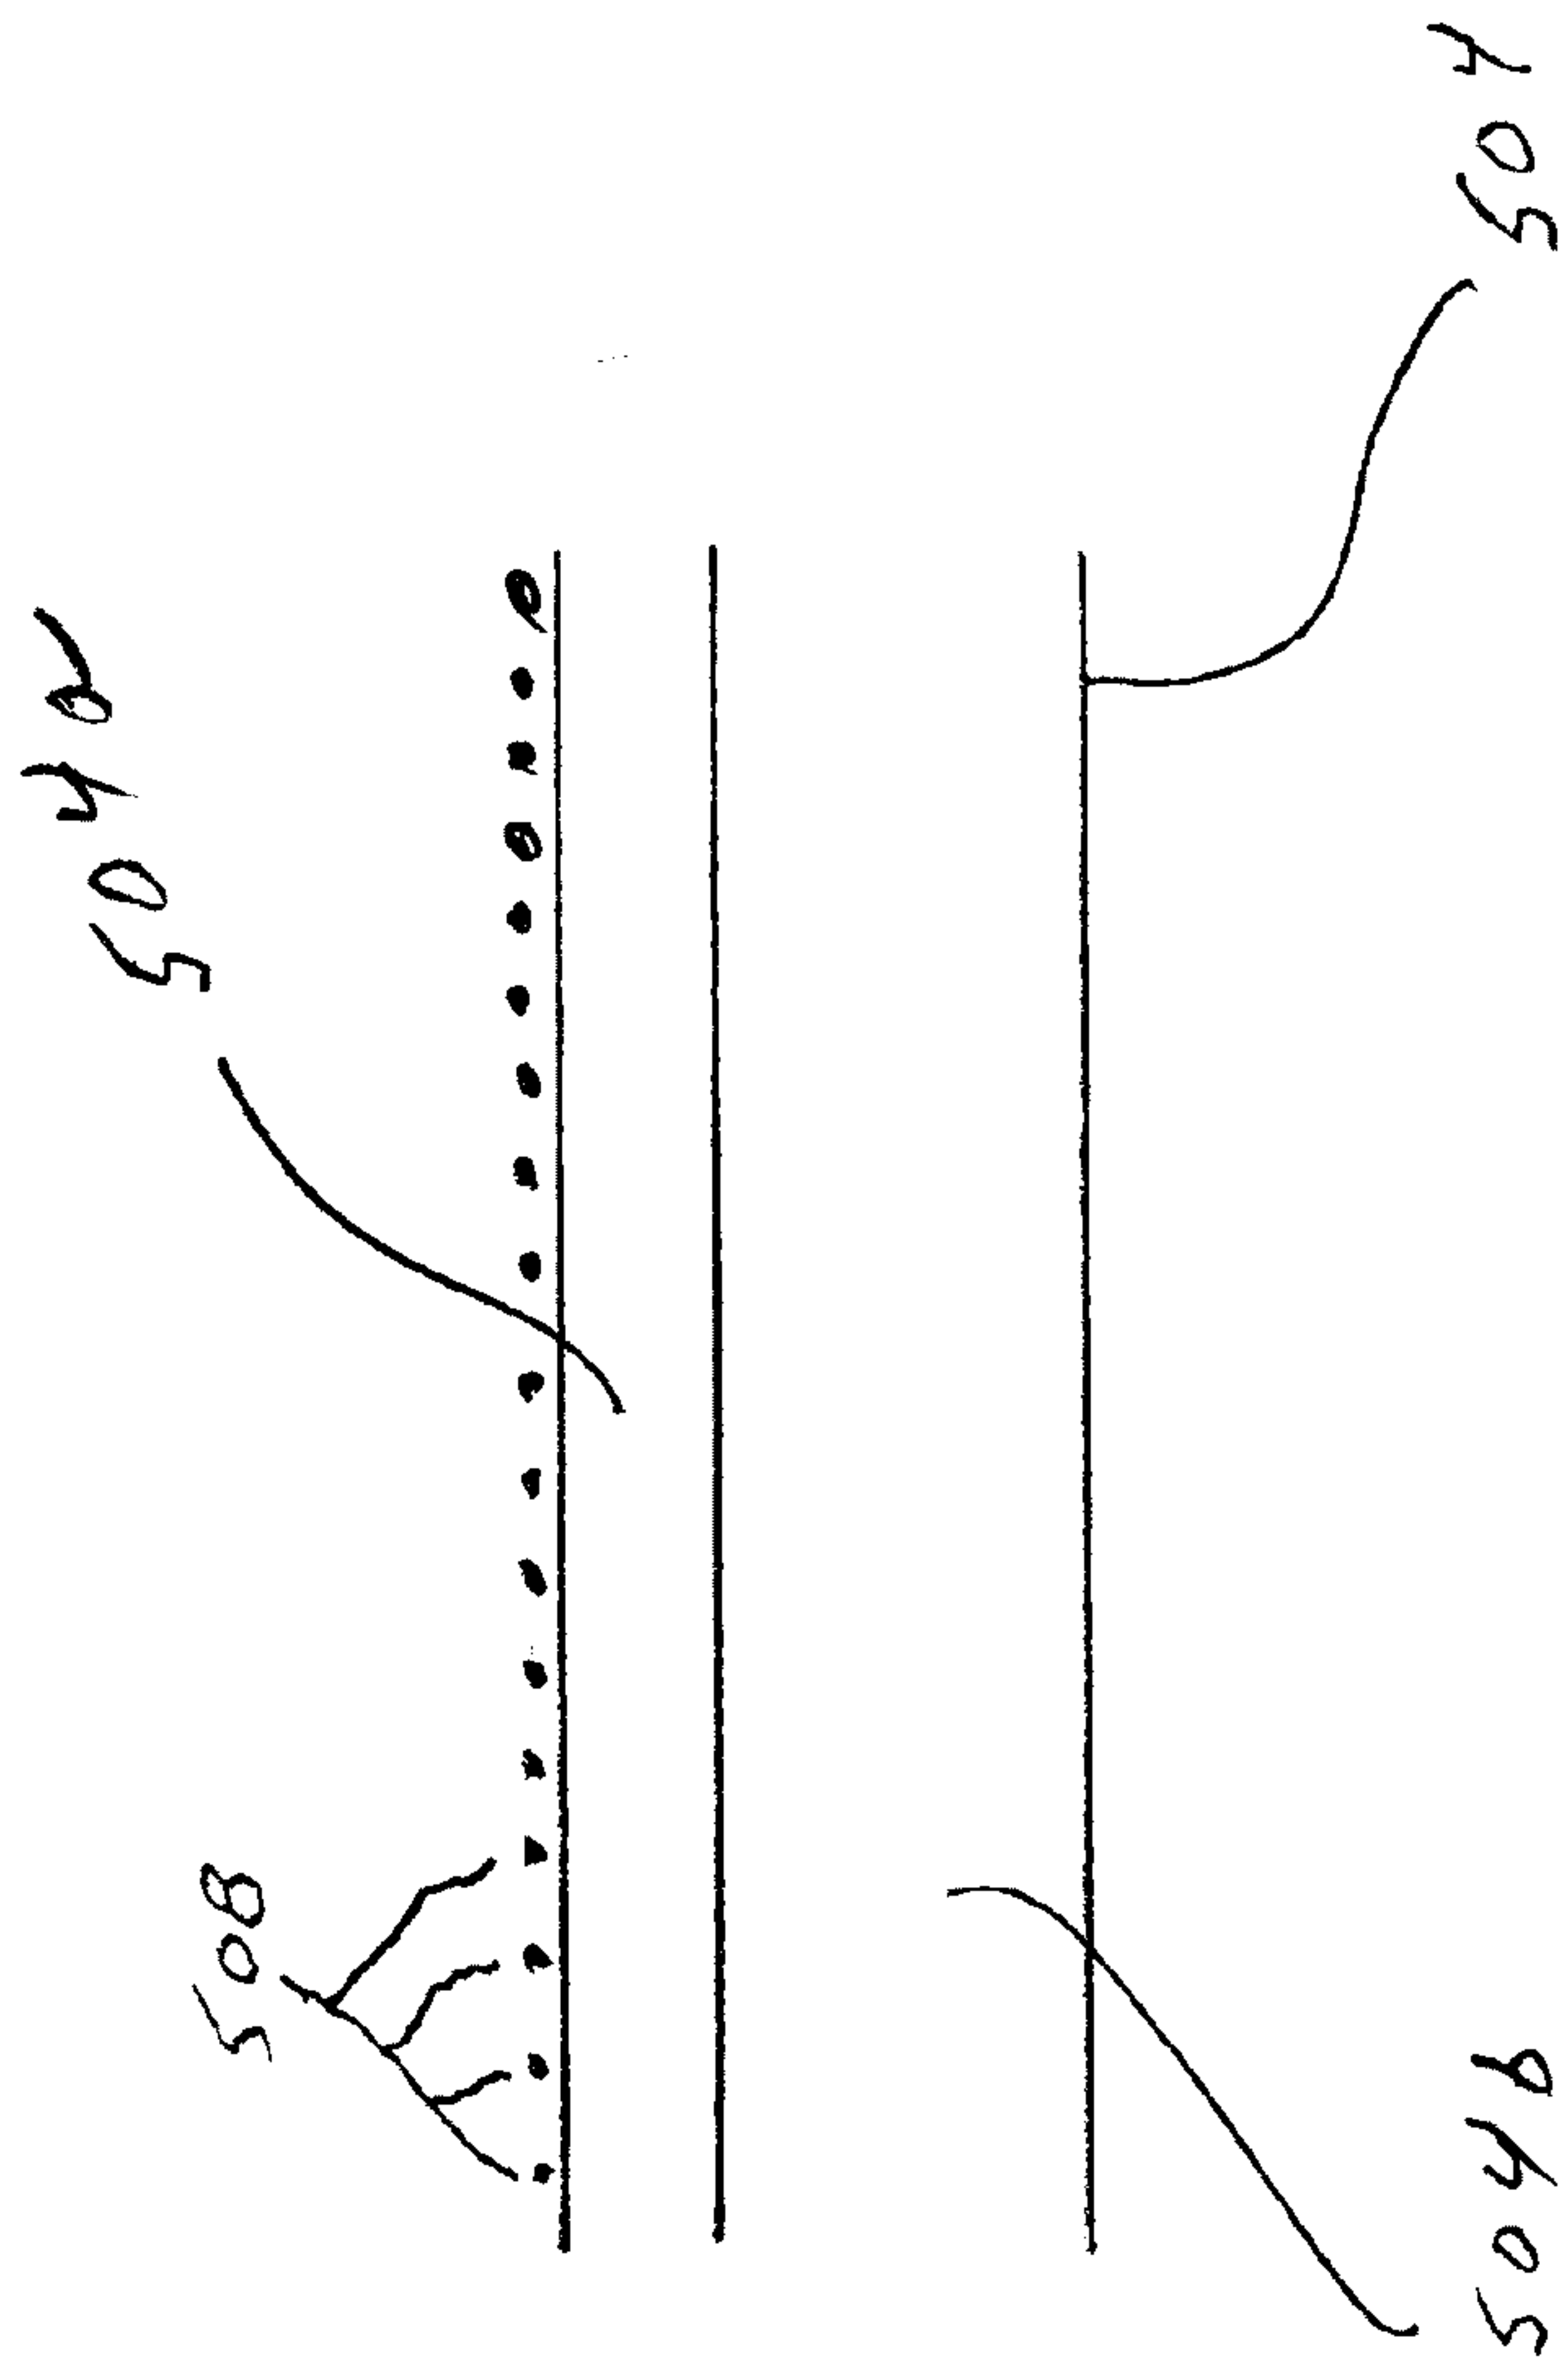


Figure 16b

