




(86) Date de dépôt PCT/PCT Filing Date: 2014/01/29
(87) Date publication PCT/PCT Publication Date: 2014/08/07
(45) Date de délivrance/Issue Date: 2021/01/05
(85) Entrée phase nationale/National Entry: 2015/07/28
(86) N° demande PCT/PCT Application No.: US 2014/013498
(87) N° publication PCT/PCT Publication No.: 2014/120712
(30) Priorité/Priority: 2013/01/29 (US61/758,186)

(51) Cl.Int./Int.Cl. *B07B 1/46* (2006.01)
(72) Inventeurs/Inventors:
FLANSBURG, CHARLES H., US;
EKHOLM, MICHAEL RICHARD, US;
DEHN, STEVEN DOUGLAS, US;
BRABEC, DEAN, US;
PIEROTTI, MICHAEL HANS, US
(73) Propriétaire/Owner:
AQSEPTENCE GROUP, INC., US
(74) Agent: BRION RAFFOUL

(54) Titre : BOITE A TAMIS ET ENSEMBLE BUSE AJUSTABLE
(54) Title: SIEVE BOX AND ADJUSTABLE NOZZLE ASSEMBLY

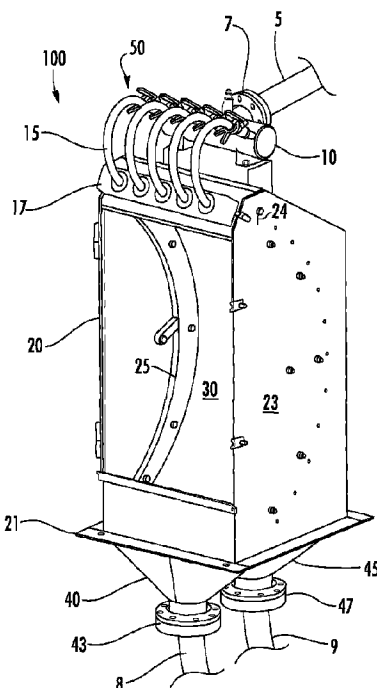

(57) **Abrége/Abstract:**

An adjustable nozzle assembly for a sieve box and a sieve box including same, including a support assembly and nozzles. A pair of elongated support members may be received through openings in support collars. Nozzles may be operatively connected to the collars. The support assembly, which may include collars and rods, are configured to provide at least one of lateral movement and rotational movement of the nozzles. At least one of the first elongated support member and the second elongated support member may be configured to move when coupled to the sieve box to adjust a spray angle of the nozzles. Pivoting of the one rod about the other rod adjusts the angle at which the nozzles are disposed. The rods may be externally threaded, and the collars may be internally threaded, such that when the rods are rotated, the collars translate laterally along the rods to move the nozzles.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
7 August 2014 (07.08.2014)(10) International Publication Number
WO 2014/120712 A1(51) International Patent Classification:
B01D 29/90 (2006.01)

(21) International Application Number:

PCT/US2014/013498

(22) International Filing Date:

29 January 2014 (29.01.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/758,186 29 January 2013 (29.01.2013) US

(71) Applicant: **BILFINGER WATER TECHNOLOGIES, INC.** [US/US]; 1950 Old Highway 8, New Brighton, Minnesota 55112 (US).(72) Inventors: **FLANSBURG, Charles H.**; 1409 138th Lane NW, Andover, Minnesota 55304 (US). **EKHOLM, Michael Richard**; 1623 West 32nd Street, Minneapolis, Minnesota 55408 (US). **DEHN, Steven Douglas**; 3630 Thomas Avenue N, Minneapolis, Minnesota 55412 (US).**BRABEC, Dean**; 9775 285th Avenue N.E., North Branch, Minnesota 55056 (US). **PIEROTTI, Michael Hans**; 9614 N.W. Beaver Drive, Johnston, Iowa 50131 (US).(74) Agent: **WITSIL, Matthew W.**; Moore & Van Allen, PLLC, P.O. Box 13706, Research Triangle Park, North Carolina 27709 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: SIEVE BOX AND ADJUSTABLE NOZZLE ASSEMBLY

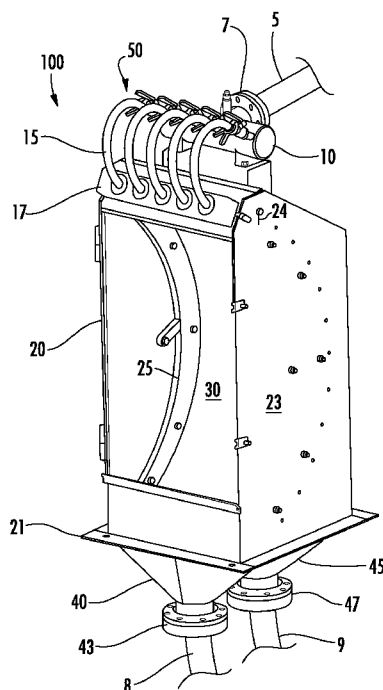


FIG. 1

(57) Abstract: An adjustable nozzle assembly for a sieve box and a sieve box including same, including a support assembly and nozzles. A pair of elongated support members may be received through openings in support collars. Nozzles may be operatively connected to the collars. The support assembly, which may include collars and rods, are configured to provide at least one of lateral movement and rotational movement of the nozzles. At least one of the first elongated support member and the second elongated support member may be configured to move when coupled to the sieve box to adjust a spray angle of the nozzles. Pivoting of the one rod about the other rod adjusts the angle at which the nozzles are disposed. The rods may be externally threaded, and the collars may be internally threaded, such that when the rods are rotated, the collars translate laterally along the rods to move the nozzles.

WO 2014/120712 A1

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

SIEVE BOX AND ADJUSTABLE NOZZLE ASSEMBLY

[0001] Intentionally Left Blank

FIELD

[0002] Embodiments disclosed herein generally relate to sieve boxes, and more particularly relate to sieve boxes including adjustable nozzle assemblies.

BACKGROUND

[0003] Sieve boxes contain stationary nozzles that spray a slurry onto the surface of a sieve screen. Over time, the slurry wears down the sieve screen at the initial contact point, often near the top of the screen, thereby rendering the sieve screen so ineffective that it must be replaced. It is common practice to flip the sieve screen upside down so that the worn area is put on the bottom and an unworn area of the sieve screen is brought to the top where the slurry spraying occurs. Although this practice may double the life of the sieve screen, it does not change the wear of the sieve screen at these specific locations proximate to the top and the bottom of the screen. Also, it can be a very time consuming process to remove, re-orient, and re-attach the sieve screen to the sieve box.

[0004] Therefore, there is a need for an improved approach to extending the operating life of sieve screens.

SUMMARY

[0005] In accordance with one embodiment disclosed herein, a nozzle assembly for a sieve box is provided. The nozzle assembly includes a support assembly configured to be mounted in a sieve box, and a nozzle operatively connected to the support assembly. The support assembly is configured to allow at least one of lateral movement and rotational movement of the nozzle relative to the sieve box. Some embodiments include a first elongated support member, a second elongated support member that is substantially parallel to and in fixed spatial relation with the first elongated support member, a first support collar defining an opening through which the first elongated support member is received, and a second support collar defining an opening through which the second elongated support member is received, and

a nozzle is operatively connected to the first support collar and the second support collar. The support collars and elongated support members are configured to provide at least one of lateral movement and rotational movement of the nozzle relative to the support collars and elongated support members.

- 5 **[0006]** In another embodiment and in combination with the above embodiment, the first elongated support member and the second elongated support member each comprise a rod. In another embodiment and in combination with the above embodiment, the first elongated support member and the second elongated support member comprise one or more plates, one or more rectangular bars, or a combination thereof.
- 10 **[0007]** In another embodiment and in combination with any of the above embodiments, at least one of the first elongated support member and the second elongated support member is configured to move when coupled to the sieve box to adjust a spray angle of the nozzle. In another embodiment and in combination with any of the above embodiments, pivoting of the second elongated support member about the first elongated support member adjusts the angle at
15 which the nozzle is disposed. In another embodiment and in combination with any of the above embodiments, the first elongated support member and the second elongated support member are externally threaded, and the first support collar and the second support collar are internally threaded, such that when the elongated support members are rotated, the support collars translate laterally along the respective elongated support member.
- 20 **[0008]** In another embodiment and in combination with any of the above embodiments, the nozzle assembly may also include a plate member to which the first support collar, the second support collar, and the nozzle are mounted. In some such embodiments pivoting of the second elongated support member about the first elongated support member adjusts the angles at which the plate member and the nozzle are disposed. In another embodiment and in
25 combination with any of the above embodiments, the first elongated support member is configured to be mounted at each end to a housing of the sieve box and free to rotate about a longitudinal axis of the first elongated support member, and the second elongated support member is configured to be mounted at each end within an opening in the housing configured to allow movement perpendicular to a longitudinal axis of the second elongated support member.
- 30 In some such embodiments, the nozzle assembly also includes at least one rotatable engagement member configured to engage the housing and selectively secure the second elongated support member in a fixed position relative to the housing.
- [0009]** In another embodiment and in combination with any of the above embodiments, a third support collar defines an opening through which the first elongated support member is

received and is spaced from the first support collar, and a fourth support collar defines an opening through which the second elongated support member is received and is spaced from the second support collar. A plurality of nozzles is mounted to a support structure to which the support collars are also mounted. The support collars and elongated support members are
5 configured to provide at least one of lateral movement and rotational movement of the plurality of nozzles relative to the support collars and elongated support members. In some such embodiments, the support structure comprises a plate member. In other such embodiments, the support structure comprises a frame and cross-members. In some embodiments, the support assembly comprises one or more plates, one or more rectangular bars, or a combination thereof.
10 Other support structures known in the art that facilitate similar adjustments to the nozzle orientation and position can also be applied.

[0010] In accordance with another embodiment disclosed herein, a sieve box is provided that includes a housing and one or more nozzle assemblies. A nozzle assembly includes a support assembly configured to be mounted in the sieve box and a plurality of nozzles
15 operatively connected to the support assembly. One or more screens are disposed within the housing, and the plurality of nozzles is operable to inject a slurry onto the respective screen for separating the slurry into one or more components. The support assembly allows at least one of lateral movement and rotational movement of the plurality of nozzles relative to the sieve box.

[0011] In another embodiment and in combination with the above embodiment, the
20 support assembly includes a first elongated support member that is coupled to the housing, a second elongated support member that is substantially parallel to and in fixed spatial relation with the first elongated support member and that is coupled to the housing, a first support collar and a second support collar that each define an opening through which the first elongated support member is received, and a third support collar and a fourth support collar that each
25 define an opening through which the second elongated support member is received. A plurality of nozzles is operatively connected to the support collars. The support collars and elongated support members are configured to provide at least one of lateral movement and nozzle pitch, yaw, and axial (roll) rotational movement of the plurality of nozzles relative to the support collars and elongated support members. In other embodiments, nozzle adjustment can be
30 achieved for individual and group or banked nozzles by other mounting methods known in the art.

[0012] In another embodiment and in combination with any of the above embodiments, the support assembly includes a support structure to which the support collars and the plurality of nozzles are mounted. In some such embodiments, the support structure comprises a plate

member. In other such embodiments, the support structure comprises a frame and cross-members. In another embodiment and in combination with any of the above embodiments, the first elongated support member and the second elongated support member each comprise a rod. In another embodiment and in combination with any of the above embodiments, at least one of the first elongated support member and the second elongated support member are moveable within an opening in the housing to adjust a spray angle of the nozzle. In another embodiment and in combination with any of the above embodiments, pivoting of the second elongated support member about the first elongated support member adjusts the angle at which the plurality of nozzles is disposed.

10 [0013] In another embodiment and in combination with any of the above embodiments, the first elongated support member and the second elongated support member are externally threaded, and the first support collar and the second support collar are internally threaded, such that when the elongated support members are rotated, the support collars translate laterally along the respective elongated support member. In another embodiment and in combination with any of the above embodiments, the first elongated support member is mounted at each end to the housing and free to rotate about a longitudinal axis of the first elongated support member, and the second elongated support member is mounted at each end within an opening in the housing configured to allow movement perpendicular to a longitudinal axis of the second elongated support member. In some such embodiments, rotatable engagement members are provided that are configured to engage the housing and selectively secure the second elongated support member in a fixed position relative to the housing. Other embodiments of engagement of the adjustable nozzle system to the sieve box known in the art are applicable.

15 [0014] In accordance with another embodiment disclosed herein, a method of adjusting a nozzle assembly in a sieve box is provided. The sieve box includes a housing and one or more nozzle assemblies. A nozzle assembly includes a first elongated support member coupled to the housing, a second elongated support member that is substantially parallel to and in fixed spatial relation with the first elongated support member and that is coupled to the housing. A first support collar and a second support collar each define an opening through which the first elongated support member is received, and a third support collar and a fourth support collar define an opening through which the second elongated support member is received. A plurality of nozzles is operatively connected to the support collars. One or more screens are disposed within the housing, and the plurality of nozzles is operable to inject a slurry onto the respective screen for separating the slurry into one or more components. The support collars and elongated support members are configured to provide at least one of lateral movement and rotational

movement of the plurality of nozzles relative to the support collars and elongated support members. The method includes, for one or more muzzle assemblies, disengaging the first elongated support member from a first, fixed position relative to the housing and the second elongated support member to make the first elongated support member slideable within openings formed in the housing at each end of the first elongated support member. The first elongated support member is moved within the openings to adjust the spray angle of the plurality of nozzles. The housing is engaged by the second elongated support member at each end of the first elongated support member to secure the second elongated support member in a second, fixed position relative to the housing and the first elongated support member. Other embodiments include alternate support mechanisms known in the art.

[0015] In some embodiments and in combination with the above embodiment of a method, in one or more nozzle assemblies the first elongated support member and the second elongated support member are externally threaded, and the first support collar and the second support collar are internally threaded. The first elongated support member is rotated about its longitudinal axis, causing the first and second support collars to translate along the first elongated member, and the second elongated support member is rotated about its longitudinal axis, causing the third and fourth support collars to translate along the second elongated support member. In some embodiments and in combination with the above embodiment of a method, the first elongated support member and the second elongated support member are slid along respective longitudinal axes to move the plurality of nozzles laterally.

[0015a] In a first aspect, this document discloses a nozzle assembly for a sieve box, comprising: a support assembly configured to be mounted in a sieve box, the support assembly comprising: a support structure having a first side and an opposed second side; a first elongated support member rotatably coupled to the first side of the support structure and defining a first longitudinal axis; and a second elongated support member rotatably coupled to the first side of the support structure and defining a second longitudinal axis, the second elongated support member being configured to rotate about at least the first longitudinal axis; and a nozzle fixedly coupled to the second side of the support structure, wherein the support assembly is configured to enable the support structure to pivot relative to the sieve box, thereby enabling at least one of lateral movement and rotational movement of the nozzle relative to the sieve box.

[0015b] In a second aspect, this document discloses a sieve box comprising: a housing; one or more nozzle assemblies each comprising: a support assembly configured to be mounted in the sieve box, the support assembly comprising: a plate member having a first side and an opposed second side; a first elongated support member mounted to the first side and rotatably coupled to the housing and defining a first longitudinal axis; and a second elongated support member mounted to the first side and rotatably and slidably coupled to the housing defining a second longitudinal axis, such that sliding the second elongated member relative to the housing causes the second elongated support member to rotate about at least the first longitudinal axis; and a plurality of nozzles operatively connected to the opposed second side, one or more screens disposed within the housing, wherein the plurality of nozzles is operable to inject a slurry onto the respective screen for separating the slurry into one or more components, wherein the support assembly allows at least one of lateral movement and rotational movement of the plurality of nozzles relative to the sieve box.

[0015c] In a third aspect, this document discloses a method of adjusting a nozzle assembly in a sieve box, the sieve box comprising: a housing; one or more nozzle assemblies each comprising: a plate member having a first side and an opposed second side; a first elongated support member mounted to the first side and rotatably coupled to the housing and defining a first longitudinal axis; a second elongated support member mounted to the first side and that is substantially parallel to and in fixed spatial relation with the first elongated support member, the second elongated support member rotatably and slidably coupled to the housing and defining a second longitudinal axis, such that sliding the second elongated member relative to the housing causes the second elongated support member to rotate about at least the first longitudinal axis; a first support collar and a second support collar each defining an opening through which the first elongated support member is received; a third support collar and a fourth support collar defining an opening through which the second elongated support member is received; and a plurality of nozzles mounted to the opposed second side and operatively connected to the support collars; one or more screens disposed within the housing, wherein the plurality of nozzles is operable to inject a slurry onto the one or more screens for separating the slurry into one or more components, the method comprising, for one or more nozzle assemblies: disengaging the second elongated support member from a first, fixed position relative to the housing and the first elongated support member to make the second elongated support member

slidably movable within openings formed in the housing at each end of the second elongated support member; sliding the second elongated support member within the openings to adjust the spray angle of the plurality of nozzles, wherein sliding the second elongated support member comprises rotating the second elongated support member about the first longitudinal axis of the first elongated support member to adjust the angle at which the plurality of nozzles are disposed; and engaging the housing with the second elongated support member at each end of the second elongated support member to secure the second elongated support member in a second, fixed position relative to the housing and the first elongated support member.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] For a more complete understanding, reference should now be had to the embodiments shown in the accompanying drawings and described below. In the drawings:

[0017] FIG. 1 is a perspective view of a sieve box assembly according to one embodiment.

[0018] FIG. 2 is a perspective view of a nozzle assembly according to one embodiment.

[0019] FIG. 3 is a perspective view of a portion of the nozzle assembly of FIG. 2.

[0020] FIG. 4 is another perspective view of the sieve box assembly of FIG. 1.

[0021] FIG. 5 is a perspective view of the sieve box assembly of FIG. 1 with a sidewall removed for clarity.

[0022] FIG. 6 is a section view of the sieve box assembly of FIG. 1, taken along line B---B of FIG. 5.

DETAILED DESCRIPTION

[0023] The following detailed description refers to the accompanying drawings, which illustrate specific embodiments. Other embodiments having different structures and operation do not depart from the scope of the present disclosure.

5 [0024] Certain terminology is used herein for convenience only and is not to be taken as a limitation on the embodiments described. For example, words such as “top”, “bottom”, “upper,” “lower,” “left,” “right,” “horizontal,” “vertical,” “upward,” and “downward” merely describe the configuration shown in the figures. Indeed, the referenced components may be oriented in any direction and the terminology, therefore, should be understood as encompassing
10 such variations unless specified otherwise. Throughout this disclosure, where a process or method is shown or described, the method may be performed in any order or simultaneously, unless it is clear from the context that the method depends on certain actions being performed first.

[0025] Referring to the drawings, where like reference numerals refer to the same or
15 similar parts, FIG. 1 shows a sieve box assembly **100** with a front door panel removed for clarity. The sieve box assembly **100** is configured to separate a mixture of solids and/or liquids, *e.g.* a slurry, into one or more components. For example, as the slurry flows through the sieve box assembly **100**, the solid components of the slurry may be separated out from the liquid component of the slurry for further processing. In another example, solid components of a
20 larger size may be separated out from solid components of a smaller size and/or from the liquid component of the slurry.

[0026] More particularly, the sieve box assembly **100** includes an inlet manifold **10**, a housing **20**, a screen **30**, a first outlet **40**, a second outlet **45**, and a nozzle assembly **50**. An inlet flow line **5** may be connected to the inlet manifold **10** by a sealed, flanged connection **7** for
25 directing a slurry flow into the sieve box assembly **100**. A first end of the nozzle assembly **50** is in fluid communication with the inlet manifold, and a second end of the nozzle assembly **50** is in fluid communication with the housing **20**. The nozzle assembly **50** is configured to inject the slurry flow from the inlet manifold **10** into the housing **20**. A support block **17** may be used to support one or more flexible flow lines **15** of the nozzle assembly **50** that may pass through the
30 support block **17**, and to secure the nozzle assembly **50** to the housing **20**. The support block **17** may include a hollow interior (as illustrated in FIG. 6) such that the portion of the flexible flow lines **15** extending into the support block **17** can be horizontally and/or vertically movable for adjustment of the nozzle assembly **50** as further described herein.

[0027] The housing **20** may include any support type structure for supporting the nozzle assembly **50**, the screen **30**, and the first and second outlets **40**, **45**. A base **21** of the housing **20** may be used to secure and position the sieve box assembly **100** at floor level for ease of access. The housing **20** may also include one or more sidewalls **23** to form the support structure. As
5 stated above, the front door panel is removed for clarity in FIGS. 1-5 to expose the internal components of the sieve box assembly **100**.

[0028] The screen **30** is supported within the housing **20**. A sealed, flanged connection **25** may be used to secure the screen **30** to the inner sidewall surfaces, such as the sidewall **23**, of the housing **20**. One or more support bars or plates **27** (illustrated in FIG. 6) may be used to
10 further support the backside of the screen **30**. Before inserting the screen **30** into the housing **20** or when positioning the screen **30** into the housing **20**, the screen **30** may have a curved shape or may be curved to a shape that generally corresponds to the angle of injection of the slurry to maximize the surface area contact of the slurry with the screen **30**.

[0029] The screen **30** is configured to separate the slurry into one or more components.
15 The screen **30** may include a plurality of spaced apart, screen elements arranged to permit liquids and/or solids of a smaller size to pass through the screen **30**, while preventing solids of a larger size from passing through the screen **30**, thereby separating the slurry into one or more components. In one embodiment, such screens may include wire with a substantially triangular cross-section, and may include Vee-Wire® type screens (VEE-WIRE is a registered trademark
20 of Bilfinger Water Technologies, Inc.) or wedge wire type screens. In one embodiment, such screens may include plates having perforations, slots, and/or other filter-type openings. In one embodiment, the wires and plate openings may be oriented symmetrically, asymmetrically, horizontally, vertically, tangentially, and combinations thereof. In one embodiment, the spacing and sizes of wires and plate openings vary along the lengths of such screens. In one
25 embodiment, such screens may include one or any combination of filter wires, plates, features with perforations, features that otherwise provide a plurality of filter-type openings, and flow control vanes. Such screens may include embodiments like those disclosed in U.S. Patent No. 6,663,774, filed on October 16, 2001, specifically with respect to the filter wires **28** and the support rods **20** described therein, and embodiments like those disclosed in U.S. Patent No.
30 7,425,264, filed on July 18, 2005, specifically with respect to the wires **16** and the support rods **17** described therein, the contents of both of which patents are herein incorporated by reference in their entirety.

[0030] When the slurry is injected onto the screen **30**, the components of the slurry that cannot flow through the screen **30** may be directed to the first outlet **40**, and the components of

the slurry that flow through the screen **30** may be directed to the second outlet **45**. The first and second outlets **40, 45** are configured to collect and direct the separate slurry components to the two outlet flow lines **8, 9**, respectively. The outlet flow lines **8, 9** may be coupled to the first and second outlets **40, 45** by sealed, flanged connections **43, 47**, respectively, to direct the separate slurry components for further processing. The first and second outlets **40, 45** may be coupled to and extend below the base **21** of the housing **20**.

[0031] FIG. 2 illustrates the nozzle assembly **50**. One or more clamps **16** may be used to connect a first end of each of the flow lines **15** to the inlet manifold **10**, and may be used to connect a second end of each of the flow lines **15** to one or more nozzles **53**. Although five flow lines **15** and nozzles **53** are illustrated, the nozzle assembly **50** may include any number flow lines **15** and nozzles **53**, including one through four, or any plurality, of flow lines **15** and nozzles **53**. The clamps **16**, flow lines **15**, and nozzles **53** may include any conventional type of connection, flow, or injection component as known in the art. In addition, the orientation and/or arrangement of the clamps **16**, flow lines **15**, and nozzles **53** may include any conventional orientation and/or arrangement of a nozzle assembly for use with sieve boxes as known in the art.

[0032] FIG. 3 illustrates a support assembly that provides an adjustment mechanism of the nozzle assembly **50** according to one embodiment. A plate member or plate **55** (or other similar support structure) may be coupled to the nozzles **53**. One example of an alternative to the plate **55** is a frame with cross-members. A first rod **52** or first elongated support member (or another similar elongated member, such as a rectangular bar or rail structure) and a second rod **59** or second elongated support member (or another similar elongated member, such as a rectangular bar or rail structure) may be coupled to the plate member **52** by one or more support collars **51, 57** (or other similar support rings) respectively. The first rod **52** and the second rod **59** each have a respective longitudinal axis, and may be parallel or substantially parallel. In some embodiments a plate or elongated members may be provide while omitting collars.

[0033] The collars **51, 57** each define an opening and may have a substantially round circumference as shown or other shape at their periphery, for example, square. The collars **51, 57** may be fixed to the plate member **52**, by means such as a welded connection or other mounting methods, but the collars **51, 57** may be laterally and/or rotatably movable relative to the first and second rods **52, 59**. Adjustable, rotatable engagement members or knobs **58** may be threadedly coupled to opposite sides of the second rod **59** for adjusting the nozzle assembly **50** as further described below. The result in some embodiments is that the second rod **59** may pivot **61** about the first rod **52**, the collars **51, 57** (with the plate **55** and nozzle **53**) translate **62**

along the rods **52**, **59**, or both, to adjust the nozzle **53** discharge or spray angle and/or lateral position. In some embodiments, one or more of nozzle pitch, yaw, and axial (roll) rotational movement of a plurality of nozzles relative to the support collars and elongated support members may be made.

5 **[0034]** FIGS. 4 and 5 illustrate the sieve box assembly **100** with the support block **17** and the sidewall **23** removed for clarity of the nozzle assembly **50**. As illustrated, the first rod **52** may be secured within the housing **20**, and in particular may be coupled at opposite ends to the sidewalls of the housing **20**, such as the sidewall **23**. The second rod **59** may be similarly secured within the housing **20**. One method to couple the first rod **52** to the sidewall **23** is to
 10 provide a flanged socket at each end of the first rod **52** that is attached to the sidewall **23** with a first rod end received in the socket. However, the ends of the second rod **59** and/or the adjustable knobs **58** may extend through slots **24** (or other similar openings) formed in the sidewalls **23** of the housing **20** such that the adjustable knobs **58** are accessible from the exterior of the housing **20**.

15 **[0035]** Referring to FIGS. 4 and 5, one of the adjustable knobs **58** is disposed external to the sidewall **23** such that the adjustable knobs **58** and the second rod **59** can be moved within a slot **24** (or other similar opening) formed in the sidewall **23**. A corresponding slot and adjustable knob may be provided on the sidewall opposite to sidewall **23**. Although the slot **24** is represented in FIGS. 1 and 4 as straight and vertical, depending on the design desired, the slot
 20 **24** may be other than straight, such as curved, and other than vertical. To adjust the angle that the nozzle assembly **50** sprays the slurry onto the screen **30**, the second rod **59** may be moved within the slot **24**, which will move the plate member **55** and thus the nozzles **53** connected thereto. The collars **51**, **57** that are secured to the plate member **55** may rotate about the first and second rods **52**, **59** to permit the adjustment of the nozzle assembly **50** relative to the rods and/or
 25 the housing **20**.

[0036] Since the adjustable knobs **58** are threaded into the second rod **59**, the adjustable knobs **58** may be tightened to secure the second rod **59** in a desired position within the slot **24** and relative to the housing **20** by rotating the knobs **58** to advance the knobs **58** toward and into engagement with the sidewalls of the housing **20**. The knobs **58** may be rotated in an opposite
 30 direction to loosen the engagement with the sidewalls of the housing **20**, and may be used to re-position and re-secure the second rod **59** in another position within the slot **24**. Other manual and/or automated drive type mechanisms may be used to adjust the angular position of the nozzle assembly **50**. In this manner, the nozzle assembly **50** may be adjusted to position the slurry spray angle at an angle relative to the screen **30** to maximize operating efficiency, e.g. the

efficiency of the screen **30** filtering and/or separating the components of the slurry. In one embodiment, the nozzle assembly **50** may be operable to adjust the slurry spray at an angle substantially tangent to the surface of the screen **30**. In one embodiment, the nozzle assembly **50** may be adjusted to spray the slurry onto the screen **30** to maximize fluid shear of the slurry as it flows over the screen **30**.

[0037] Alternatively or in addition to the angular adjustment, the nozzle assembly **50** may be adjusted and moved laterally, which often means horizontally, relative to the screen **30**. The nozzle assembly **50** may be repositioned along the width of the screen **30** so that the slurry spray does not wear the screen **30** in any specific horizontal location. In particular, the nozzles **53** may be moved collectively along the length of the first and second rods **52**, **59** via the collars **51**, **57** and the plate member **55**. In one embodiment, the nozzle assembly **50** may be manually repositioned by an operator. In one embodiment, a screw-drive type mechanism (such as with an acme-type thread) may be used to adjust the lateral position of the nozzle assembly **50**. Other manual and/or automated drive type mechanisms may be used to adjust the position of the nozzle assembly **50**. In one example, the first rod **52** may include external threads that engage internal threads of the collars **51**, such that rotation of the first rod **52** may drive the collars **51** and thus the plate member **55** and the nozzles **53** laterally relative to the screen **30**. The ends of the first rod **52** may extend outside of the housing **20** so that the nozzle assembly **50** can be adjusted laterally from the exterior of the housing **20**. In this manner, the nozzle assembly **50** may be operable to adjust the location that the slurry is sprayed onto the screen **30** to prevent wear of the screen **30** in one specific location and to increase the screen **30** operating life, without having to remove and reorient the screen **30**.

[0038] In one embodiment, angular adjustment and/or lateral position of the nozzle assembly **50** may be actuated using an actuator disposed external to the housing **20**. In one embodiment, angular adjustment and/or lateral position of the nozzle assembly **50** may be operable using an automated process.

[0039] FIG. 6 illustrates a section view along line B—B as shown in FIG. 5. As illustrated, a slurry **60** flows into the inlet manifold **10** and then through at least one of the flow lines **15** of the nozzle assembly **50**. The slurry **60** is injected onto the screen **30** to separate a first component **65** and a second component **67** of the slurry **60**. The first component **65** may include one or more solid materials having a particle size incapable of passing through the screen **30**. The first component **65** is directed over or flows along the surface of the screen **30** such that the injection velocity and/or gravity forces the first component **65** to the first outlet **40**. The second component **67** may include one or more fluids or solid materials having a particle

size capable of passing through the screen **30**. The second component **65** is directed over or flows through the screen **30** such that the injection velocity and/or gravity forces the second component **67** to the second outlet **45**. The sieve box assembly **100** can be used with any type or composition of slurry for separating the slurry into one or more components. In one
5 embodiment, the housing **20** may be partially or fully sealed, and may be partially or fully pressurized with a gas, such as carbon dioxide, to assist with the flow of the slurry through the housing **20** to the first and second outlets **40, 45**.

[0040] In some embodiments, one or more sieve box assemblies **100** may be coupled to or positioned adjacent to one or more other sieve box assemblies **100** to form a bank or group of
10 sieve box assemblies. In some embodiments, the sieve box assembly **100** may include one or more screens **30** positioned within a single, unitary housing **20** or within a plurality of housings **20** coupled together and/or separated by one or more sidewalls **23**. In some embodiments, the sieve box assembly **100** may include one or more nozzle assemblies **50** and/or one or more inlet manifolds **10** for distributing slurry flow to the one or more nozzle assemblies **50**. For example,
15 a sieve box **100** may have more than one screen **30** in it, and each screen **30** could have one or more nozzle assemblies **50** associated with it. In some embodiments, the sieve box assembly **100** may include one or more first and/or second outlets **40, 45**. Embodiments of the sieve box assembly **100** and nozzle assembly **50** include one or more combinations, in whole or part, of the embodiments described herein.

20 [0041] Although specific embodiments have been illustrated and described herein, those of ordinary skill in the art appreciate that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiments shown and that the embodiments herein have other applications in other environments. This application is intended to cover any adaptations or variations of the present disclosure. The following claims are in no way intended
25 to limit the scope of the disclosure to the specific embodiments described herein. While the foregoing is directed to embodiments of a sieve box, an adjustable nozzle assembly, and components thereof, other and further embodiments may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow

What is claimed is:

1. A nozzle assembly for a sieve box, comprising:

a support assembly configured to be mounted in a sieve box, the support assembly comprising:

a support structure having a first side and an opposed second side;

a first elongated support member rotatably coupled to the first side of the support structure and defining a first longitudinal axis; and

a second elongated support member rotatably coupled to the first side of the support structure and defining a second longitudinal axis, the second elongated support member being configured to rotate about at least the first longitudinal axis; and

a nozzle fixedly coupled to the second side of the support structure,

wherein the support assembly is configured to enable the support structure to pivot relative to the sieve box, thereby enabling at least one of lateral movement and rotational movement of the nozzle relative to the sieve box.

2. The nozzle assembly of claim 1, wherein the support assembly further comprises:

a first support collar mounted to the first side defining an opening through which the first elongated support member is received; and

a second support collar mounted to the first side defining an opening through which the second elongated support member is received,

wherein the second elongated support member is substantially parallel to and in fixed spatial relation with the first elongated support member, and

wherein the support collars and elongated support members are configured to provide at least one of lateral movement and rotational movement of the nozzle relative to the support collars and elongated support members.

3. The nozzle assembly of claim 2, wherein the first elongated support member and the second elongated support member each comprise a rod.
4. The nozzle assembly of claim 2, wherein at least one of the first elongated support member and the second elongated support member is configured to move when coupled to the sieve box to adjust a spray angle of the nozzle.
5. The nozzle assembly of claim 2, wherein rotating the second elongated support member about the first longitudinal axis of the first elongated support member adjusts the angle at which the nozzle is disposed.
6. The nozzle assembly of claim 2, wherein the first elongated support member and the second elongated support member are externally threaded, and the first support collar and the second support collar are internally threaded, such that when the first elongated support member is rotated about the first longitudinal axis and/or the second elongate member is rotated about the second longitudinal axis, the support collars translate laterally along the respective elongated support member.
7. The nozzle assembly of claim 2, wherein the support structure comprises a plate member.
8. The nozzle assembly of claim 7, wherein:

rotating the second elongated support member about the first longitudinal axis of the first elongated support member adjusts the angles at which the plate member and the nozzle are disposed.
9. The nozzle assembly of claim 2, wherein the first elongated support member is configured to be mounted at each end to a housing of the sieve box and free to rotate about the first longitudinal axis of the first elongated support member, and the second elongated support member is configured to be mounted at each end within an opening in the housing configured to allow movement perpendicular to the second longitudinal axis of the second elongated support member.

10. The nozzle assembly of claim 9, further comprising at least one rotatable engagement member configured to engage the housing and selectively secure the second elongated support member in a fixed position relative to the housing.

11. The nozzle assembly of claim 2, further comprising:

a third support collar defining an opening through which the first elongated support member is received, the third support collar spaced from the first support collar on the first side;

a fourth support collar defining an opening through which the second elongated support member is received, the fourth support collar spaced from the second support collar on the first side; and

a plurality of nozzles mounted on the second side,

wherein the support collars and elongated support members are configured to provide at least one of lateral movement and rotational movement of the plurality of nozzles relative to the support collars and elongated support members.

12. The nozzle assembly of claim 11, wherein the support structure comprises a plate member.

13. The nozzle assembly of claim 11, wherein the first elongated support member is rotatably coupled to the sieve box, and the second elongated support member is rotatably and slidably coupled to the sieve box, such that sliding the second elongated member relative to the sieve box causes the second elongated support member to rotate about at least the first longitudinal axis of the first elongated support member.

14. The nozzle assembly of claim 1, wherein the support structure comprises one or more plates, one or more rectangular bars, or a combination thereof.

15. A sieve box comprising:

a housing;

one or more nozzle assemblies each comprising:

a support assembly configured to be mounted in the sieve box, the support assembly comprising:

a plate member having a first side and an opposed second side;

a first elongated support member mounted to the first side and rotatably coupled to the housing and defining a first longitudinal axis; and

a second elongated support member mounted to the first side and rotatably and slidably coupled to the housing defining a second longitudinal axis, such that sliding the second elongated member relative to the housing causes the second elongated support member to rotate about at least the first longitudinal axis; and

a plurality of nozzles operatively connected to the opposed second side,

one or more screens disposed within the housing, wherein the plurality of nozzles is operable to inject a slurry onto the respective screen for separating the slurry into one or more components,

wherein the support assembly allows at least one of lateral movement and rotational movement of the plurality of nozzles relative to the sieve box.

16. The sieve box of claim 15, wherein the support assembly further comprises:

a first support collar and a second support collar each defining an opening through which the first elongated support member is received, the first and second support collar mounted to the first side; and

a third support collar and a fourth support collar defining an opening through which the second elongated support member is received, the third and fourth support collar mounted to the first side,

wherein the second elongated support member is substantially parallel to and in fixed spatial relation with the first elongated support member,

and

wherein the support collars and elongated support members allow at least one of lateral movement and rotational movement of the plurality of nozzles relative to the support collars and elongated support members.

17. The sieve box of claim 16, wherein the first elongated support member and the second elongated support member each comprise a rod.

18. The sieve box of claim 16, wherein at least one of the first elongated support member and the second elongated support member are moveable within an opening in the housing to adjust a spray angle of the plurality of nozzles.

19. The sieve box of claim 16, wherein rotating the second elongated support member about the first longitudinal axis of the first elongated support member adjusts the angle at which the plurality of nozzles are disposed.

20. The sieve box of claim 16, wherein the first elongated support member and the second elongated support member are externally threaded, and the first support collar and the third support collar are internally threaded, such that when the first elongated support member is rotated about the first longitudinal axis and/or the second elongate member is rotated about the second longitudinal axis, the support collars translate laterally along the respective elongated support member.

21. The sieve box of claim 16, wherein the first elongated support member is mounted at each end to the housing and free to rotate about the first longitudinal axis of the first elongated support member, and the second elongated support member is mounted at each end within an opening in the housing configured to allow movement perpendicular to the second longitudinal axis of the second elongated support member.

22. The sieve box of claim 21, further comprising rotatable engagement members configured to engage the housing and selectively secure the second elongated support member in a fixed position relative to the housing.

23. A method of adjusting a nozzle assembly in a sieve box, the sieve box comprising:

a housing;

one or more nozzle assemblies each comprising:

a plate member having a first side and an opposed second side;

a first elongated support member mounted to the first side and rotatably coupled to the housing and defining a first longitudinal axis;

a second elongated support member mounted to the first side and that is substantially parallel to and in fixed spatial relation with the first elongated support member, the second elongated support member rotatably and slidably coupled to the housing and defining a second longitudinal axis, such that sliding the second elongated member relative to the housing causes the second elongated support member to rotate about at least the first longitudinal axis;

a first support collar and a second support collar each defining an opening through which the first elongated support member is received;

a third support collar and a fourth support collar defining an opening through which the second elongated support member is received; and

a plurality of nozzles mounted to the opposed second side and operatively connected to the support collars;

one or more screens disposed within the housing, wherein the plurality of nozzles is operable to inject a slurry onto the one or more screens for separating the slurry into one or more components,

the method comprising, for one or more nozzle assemblies:

disengaging the second elongated support member from a first, fixed position relative to the housing and the first elongated support member to make the second elongated support member slidably movable within openings formed in the housing at each end of the second elongated support member;

sliding the second elongated support member within the openings to adjust the spray angle of the plurality of nozzles, wherein sliding the second elongated support member comprises rotating the second elongated support member about the first longitudinal axis of the first elongated support member to adjust the angle at which the plurality of nozzles are disposed; and

engaging the housing with the second elongated support member at each end of the second elongated support member to secure the second elongated support member in a second, fixed position relative to the housing and the first elongated support member.

24. The method of claim 23, wherein the first elongated support member and the second elongated support member are externally threaded, and the first support collar and the third support collar are internally threaded, and further comprising, for one or more nozzle assemblies:

rotating the first elongated support member about the first longitudinal axis, causing the first and second support collars to translate along the first elongated member; and

rotating the second elongated support member about the second longitudinal axis, causing the third and fourth support collars to translate along the second elongated support member.

25. The method of claim 23, further comprising:

sliding the first elongated support member and the second elongated support member along respective longitudinal axes to move the plurality of nozzles laterally.

1/4





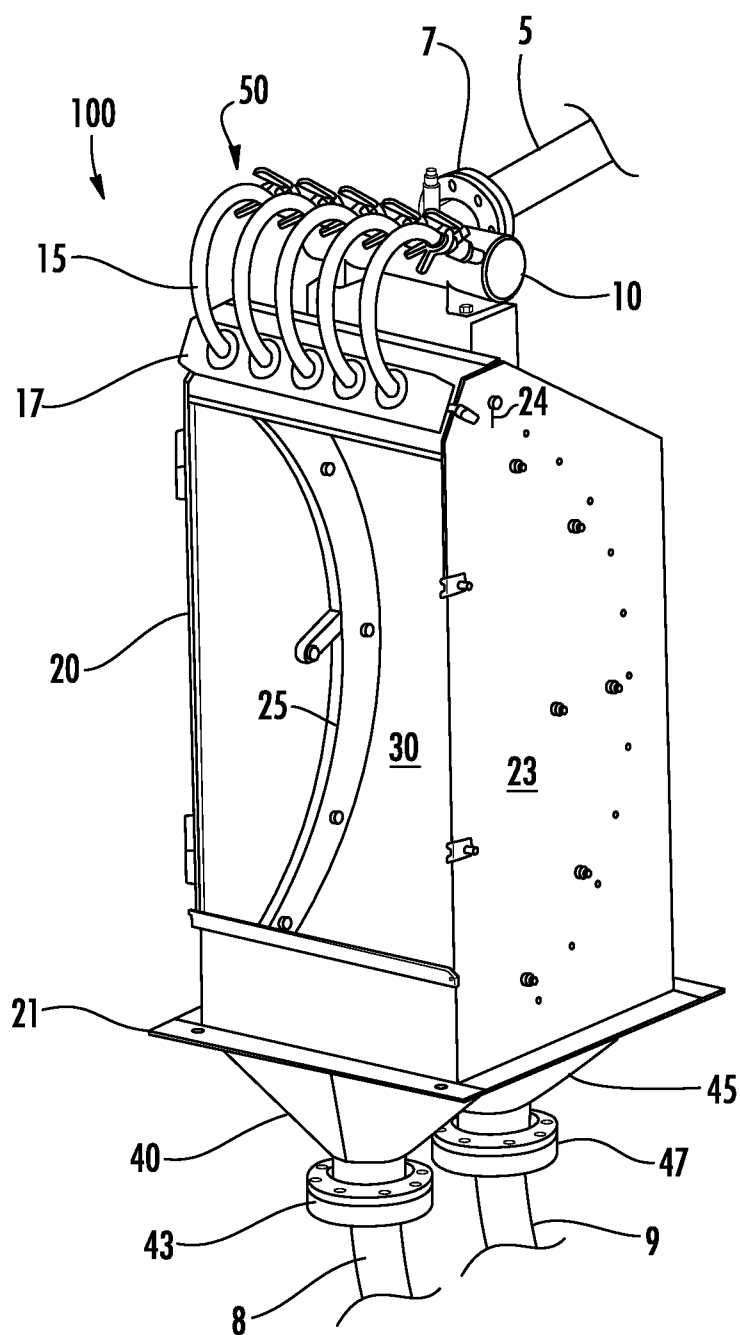


FIG. 1


2/4

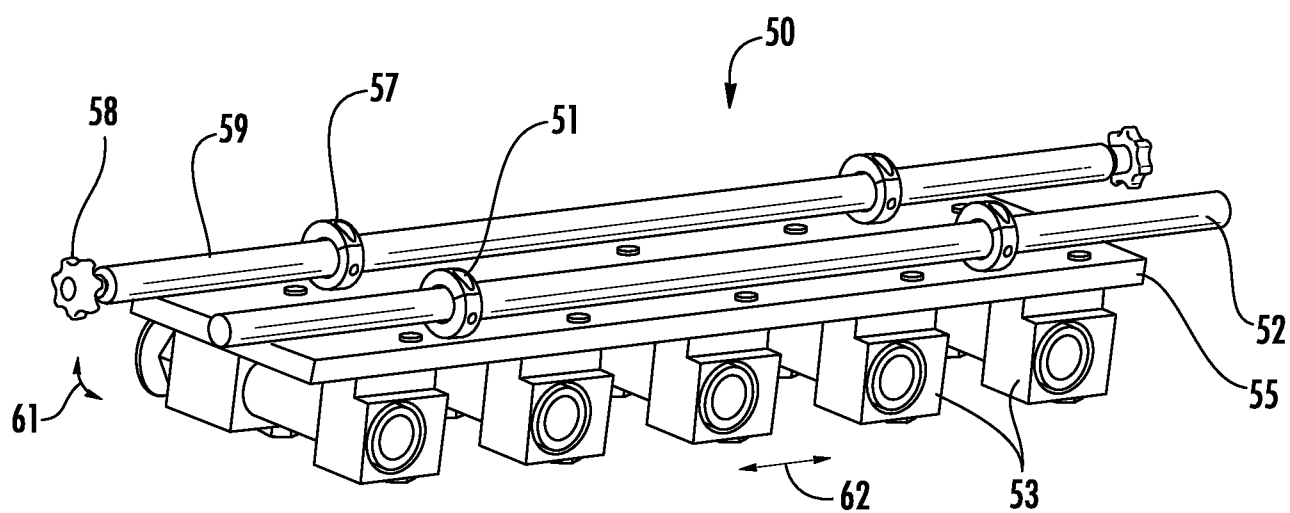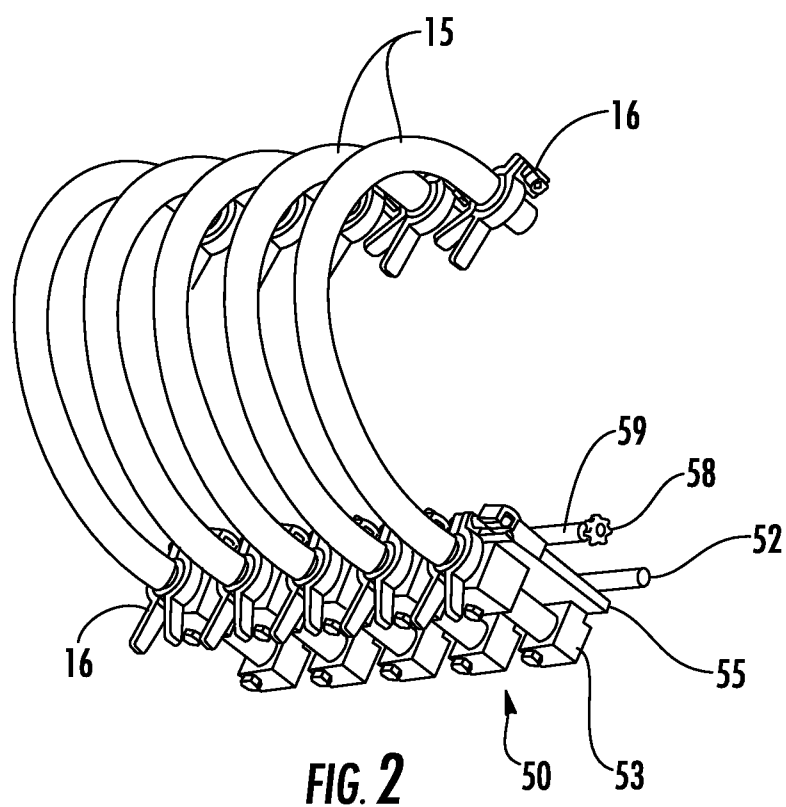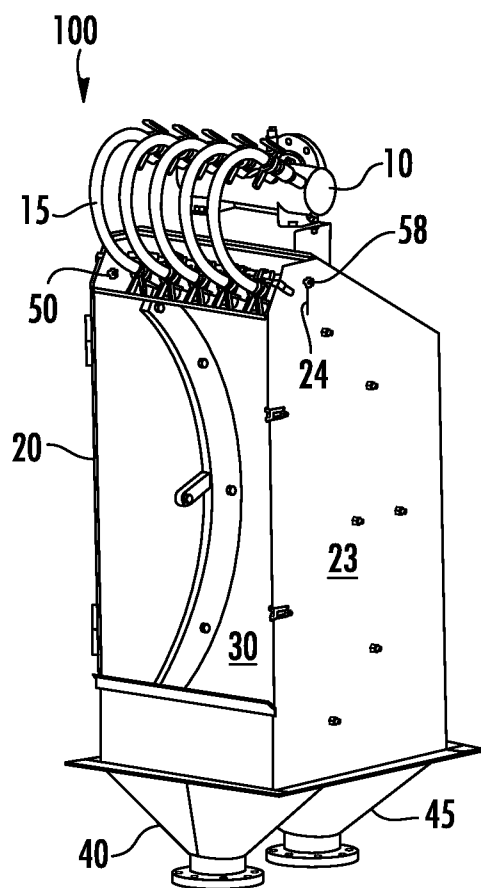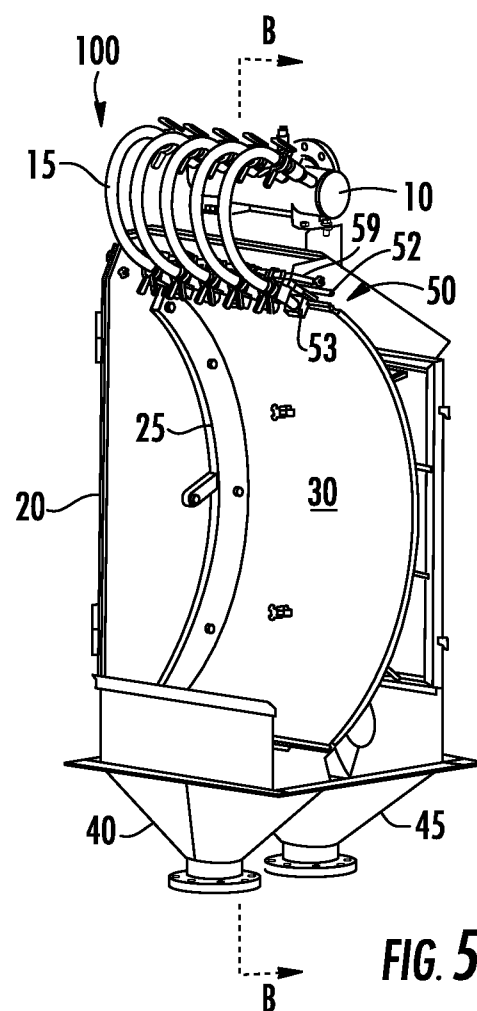

3/4

**FIG. 4****FIG. 5**

4/4

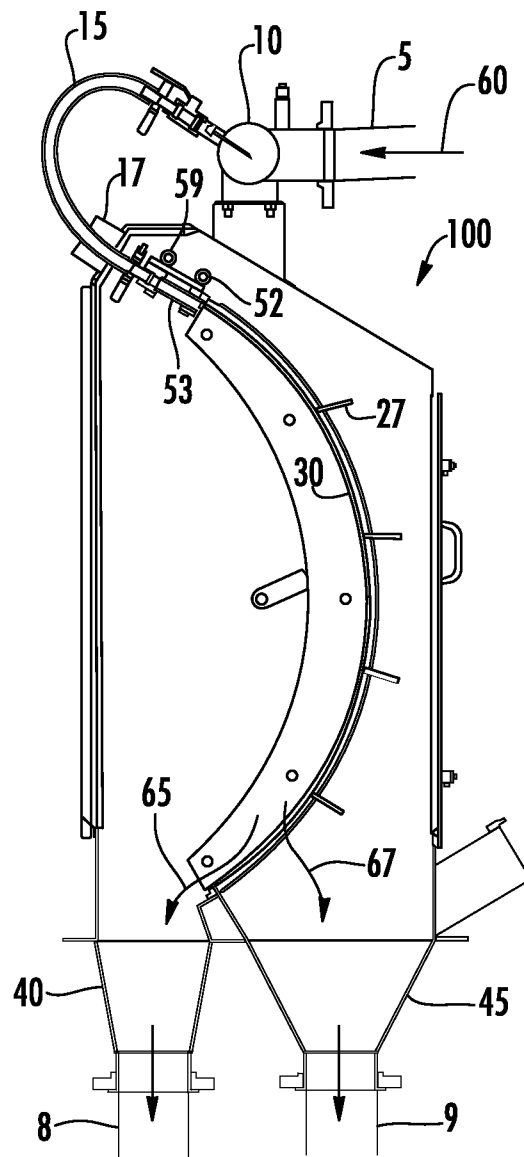**FIG. 6**

