

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number  
**WO 01/69839 A2**

(51) International Patent Classification<sup>7</sup>: **H04L 9/00**

(21) International Application Number: PCT/IB01/00358

(22) International Filing Date: 13 March 2001 (13.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/190,262 17 March 2000 (17.03.2000) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:  
US 60/190,262 (CON)  
Filed on 17 March 2000 (17.03.2000)

(71) Applicant (for all designated States except US): **DECODE GENETICS EHF** [IS/IS]; Lynghals 1, IS-110 Reykjavik (IS).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GUDBJARTSSON,**

**Hakon** [—/IS]; Styrimannastigur 2, IS-101 Reykjavik (IS). **KARLSSON, Sverrir** [—/IS]; Hlioahjalli 64, IS-200 Kopavogur (IS). **THORMAR, Skeggi** [—/IS]; Heioarseli\_4, IS-109 Reykjavik (IS).

(74) Agent: **RAGNARSSON, Olafur**; Patice - IP Law Firm, Skeifan 7, P.O. Box 8630, IS-128 Reykjavik (IS).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

**Published:**

— without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: AUTOMATIC IDENTITY PROTECTION SYSTEM WITH REMOTE THIRD PARTY MONITORING

(57) Abstract: This invention provides an automated system for the processing of data packets, composed of personal identifiers and personal data, such that the personally identifiable data sent by one party may be considered anonymous once received by a second party. The invention uses secret sharing techniques to facilitate distributed key management of the mapping functions and strong authentication to allow the system to be operated remotely.



**WO 01/69839 A2**

-1-

## AUTOMATIC IDENTITY PROTECTION SYSTEM WITH REMOTE THIRD PARTY MONITORING

### BACKGROUND OF THE INVENTION

#### Field of the Invention

5           This invention relates to the processing of data packets, composed of personal identifiers and personal data, such that the data may be considered anonymous. A system is described, that without user intervention, automatically maps the personal identifiers of data packets. Hence, the system allows two or more parties to exchange sensitive personal data seamlessly without having to expose the  
10   personal identity of the individuals which the data belongs to. The invention uses secret sharing to facilitate distributed key management of the mapping functions.

#### Description of Related Art

          With modern days computers, analysis of large quantities of sensitive personal data is a common practice, for instance in epidemiological research and  
15   datamining of sales data. It is quite common that such research is carried out in a manner such that the data analyzers themselves are able to identify the individuals to which the personal data belongs. Either this is because the data packets identifiers are left as the personal identifiers themselves or because when the personal identifiers are mapped, the mapping is accessible to the data analyzer.

20           A typical example is where the mapping is done with a symmetric encryption (as in U.S. Patent No. 3,962,539 to Ehram et al.) and the encryption key is known by the data analyzer. The reason often being the inconvenience imposed by the encryption process, if a special third party keyholder has to attend every data encryption session. Requiring encryption supervision from multiple parties becomes  
25   even more involved and the opposite is more common in practice, i.e. that

CONFIRMATION COPY

knowledge of a single key is shared among several supervisors in order to ensure the availability of some supervisor in attending the encryption process.

## SUMMARY OF THE INVENTION

The present invention is a software system for automatically mapping  
5 personal identifiers in data packets that contain personal data. The system is based on three main modules that operate in a secure environment. They are a secret sharing module, a mapping modules, and a communication module. The system is also connected to a persistent data storage.

The users roles are divided into four main categories; regular users, auditors,  
10 administrators and keyholders. Regular users are either senders or receivers or both, and are associated with different security zones or domains. Typically, there are only two security domains, i.e. data collectors and data analyzers, however, the system may be extended to have more than two security domains. Two-way authentication, using electronic certificates (such as U.S. Patent No. 4,405,829 by  
15 Rivest et al.) is used whenever users log onto the system, hence, the system verifies each user and his role, and similarly the user confirms he is connected to the right system.

Once the system is up and running it may be thought of as a "black-box", with secure input-output channels for senders, receivers, supervisors, and its own  
20 persistent datastorage. Under the assumption that the system is running within a secure environment, e.g. secure operating system discussed by S.Castano et.al. in *Database Security*, Addison-Wesley Publishing Co., (1994) at pg. 218, or a tamper proof hardware, it is impossible to read or write any information stored in the system except through these secure channels. Hence, the system ensures that there is no  
25 illegal access by users without the required privileges. Similarly, all data transfers to the persistent data storage are either encrypted, digitally signed (such as by the method of Bruce Schneier in *Applied Cryptography*, John Wiley & Sons, Inc. (1996), page 483) or both, and therefore only modifiable and readable by the system itself. Therefore, the persistent data storage can be thought of as a part of a secure  
30 memory assigned to the system.

-3-

When the system is started for the first time, all the keyholders have to be present, the number of them being subject to specification during the startup. In this initial startup process, the system generates a secret encryption-key which will only be known to the system itself. This key, known as the data encryption key, is kept in the secure memory and is never revealed to anybody. However, it is stored persistently in an encrypted form using a secret sharing technique (such as that discussed by Schneier at page 528 in *Applied Cryptography*, cited above). Whenever the system needs to be restarted, a sufficient number of keyholders need to attend in order to decrypt the data encryption key. During the initial startup, a public-private key pair (as in U.S. Patent No. 4,405,829 to Rivest et al.) is also generated for the system. The private-key is stored encrypted as the data encryption key and is used by the system to authenticate itself to its clients.

During the initial startup phase, supervisor roles have to be assigned to some users in addition to the keyholder roles. After that, all user operations may be carried out remotely. For instance, other users may be created remotely by the supervisors and their roles and electronic certificates registered with the system.

All data packets sent to the system are processed such that personal identifiers are mapped, e.g. encrypted. The system may either work in a push-push mode or push-pull mode. In the former case, the system automatically forwards the encrypted data to the receivers whereas in the latter case, the receiver has to request the data packets. Obviously, the system may also be used to decrypt data packets, therefore, the same user may act both as a receiver and as a sender.

The system may be configured to log user activity with different levels of details. For instance, the system may simply log the name of all the users involved in each transaction, but also, it may log all the content of the data transferred in the transaction. All such logs are saved in the persistent data storage, either encrypted or with digital signatures, such that tampering with logs is impossible without being detected by the system. In such instance, an auditor that monitors the logs is able to disable the system remotely, in order to stop its operation temporarily or to disable a specific user.

-4-

## BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

Fig. 1 is a block diagram illustrating an exemplary setup required to implement the preferred embodiment of the present invention.

10 Fig. 2 depicts a secure setup of the present invention.

Fig. 3 is an exemplary illustration of a file containing data packets with header, identifiers, and personal data.

Fig. 4 demonstrates exemplary setup of the information stored for the secret sharing module, i.e. the data structure of a secret-sharing envelope.

15 Fig. 5 illustrates mapping relations between the different security domains when the system is configured to work with more than two domains.

Fig. 6 shows a data structure for storing a mapping between two domains implemented using a secure lookup-table with secret-sharing access

20 Fig. 7 is an illustration of a data tamper-proofing feature in one embodiment of the present invention.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The following description of the preferred embodiment is to be understood as only one of many possible embodiments allowed by the scope of the present invention. Reference is made to the accompanying figures which form a part hereof.

### 25 Overview

Personal data frequently needs to be analyzed in large quantities, e.g. in epidemiological research, however, in most cases the true personal identity of the data records is not required. Nevertheless, it is a common practice to work with

-5-

such data with personal identifiers since today there are no systems available that simplify the administrative task of making such data anonymous.

The current invention reveals a system for simplifying the process of making data anonymous. The system requires minimal user intervention and allows  
5 personal identifiers of data packets to be automatically mapped, such that two remote users, a data collector and data analyzer, may exchange data in an appropriate manner.

#### Setup

Fig. 1 is a block diagram illustrating an example of a setup required to  
10 implement the preferred embodiment of the present invention with two security domains, e.g. one data collector 109 and one data analyzer 110. The figure shows the necessary components to setup the overall system 150, i.e. a computer 101, with a central processing unit 102 and a randomly accessible memory 103 for application programs and data, persistent data storage 104 and a wide area computer network  
15 105 for connecting the system computer 101 together with its clients.

The heart of the invention system may be implemented as a computer program 175 running in a secure environment. This program 175 is made from four main components: a mapping module 106, a secure communication module 107, and a secret sharing module 108. Secure communication channels are established with a  
20 sender 109, a receiver 110, and a supervisor 111. Similarly, the system 150 may access a permanent storage 104 for storing system information outside the secure environment. The types of information stored by the system 150 may be divided into four categories: user information, data logs, mapping states, and secret sharing data.

In the preferred embodiment, the system is implemented as a software  
25 application 175 executing in a secure operating system with memory protection. Hence, the secure environment is the address space 112 reserved for the process that executes the system program. Within this address space 112 a symmetric data encryption key and an asymmetric private key are stored at 113 along with all other system data such as for the mapping module 106. These two keys never leave the

-6-

secure address space 112 in an unencrypted format, hence they are only known to the invention software system 175 itself.

The permanent storage 104 is any device capable of storing digital information such as a hard disk or a magnetic tape. The invention software 175 uses encryption and digital signatures to ensure that data saved in the permanent storage area 104 cannot be read or tampered with unnoticed. No attempt is made however to prevent a "failure of service attacks" since the system 150 as a whole can always be destroyed.

The system 150 may also be implemented with a tamper-proof hardware or any other setup where physical security is employed in order to protect the memory 103 used by the identity protection system 175. Fig. 2 depicts an example of such a setup built from generally available components, such as a regular computer 201 and a firewall 202 (such as described by S. Garfinkel et al. in *Practical Unix and Internet Security, 2nd ed.*, O'Reilly & Associates, Inc. (1996)) stored in a safe 203. The computer display monitor 204 is stored outside the safe 203 so that the systems 175 operation may be monitored, however, its keyboard is stored inside the safe 203. Through the firewall 202, the computer 201 in the safe is connected to a second computer 205 which controls a permanent storage 206, either a file server or a relational database server (e.g., as configured in R. Ramakrishnan and J. Gehrke in *Database Management Systems, 2nd ed.*, McGraw Hill (2000)). The storage computer 205 along with the safe 203 may be kept in a secure room 207 to which only the necessary individuals would be granted access, such as a system administrator for making backups of the permanent storage 206. Access to the safe 203 would however not be needed for such an operation and therefore the system 150 could be maintained without compromising the security of the invention identity protection system 175. Clients 210 such as data collectors and data analyzers would be connected to the encryption system 150 through a wide area network 220. Hence, in addition to a two-way communication between security computer 201 and storage computer 205, the firewall 202 would have to be configured to allow for a two-way communication on the wide area network 220.

-7-

### General system function

Referring to Fig. 3, the purpose of the invention system 175 is to automatically receive files 301 with a header 302, and multiple data packets 303, each consisting of personal identifiers 304 and personal data 305. The system 175  
5 applies some specific mapping to the personal identifiers and then either stores the data in a log, until the appropriate receiver requests it, or forwards it directly to the appropriate receiver. Typically, the mapping function is a symmetric encryption, however, it may also be any other relation implemented as a table lookup or any combination of both. In both instances, all the information about the mapping, e.g.  
10 the encryption key or the lookup table, is stored in an encrypted format in the permanent data storage 104.

With the appropriate client application, a user 109 connects to the system 175 and establishes a secure connection with the system's communication module 107. Furthermore, the system server 101 authenticates the user and the user authenticates  
15 the system 175. A typical implementation of such two-way authentication and secure connection is the secure socket layer (SSL) described in U.S. Patent 5,825,890 by Elgamal et al. for "Secure Socket Layer Application Program Apparatus and Method"; however, other choices are also suitable. With the SSL approach, the system 175 stores the electronic certificates of all the registered users,  
20 i.e. the equivalent of their public keys (see U.S. Patent No. 4,405,829 to Rivest et al.) The system 175 also keeps a private key (U.S. Patent No. 4,405,829 to Rivest et al.), which it uses to prove itself to the users and the users have a local copy of the system's certificate. By using the SSL approach, one may ensure that all the communication of the system across the network, is only with known registered  
25 users.

Thus, it is possible to ensure that a sender may only send data to a registered and accepted receiver. Similarly, only users with appropriate roles may log onto the system as supervisors. This design allows all control of the system 175 to be carried out remotely, not only transmission and reception of data, but also all administrative  
30 tasks such as the creation of new users and inspection of logs. Hence, as long as the computer system 101 doesn't go down, the invention identity protection system 175



-8-

may be operated fully remotely. The mapping information and the data encryption key reside in the secure memory 112, never revealed to anybody but used by the system 175 to ensure a secret mapping of the personal identifiers.

When the invention system 175 works in a push-pull mode the following steps take place when a data collector 109 sends data to a data analyzer 110:

1. The data collector 109 user connects to the computer network system 150.
2. The invention software system 175 prompts the client for a username and loads the corresponding user information from the persistent data storage 104.
3. Using the user's digital certificate (public-key), the system 175 encrypts some data that the client 109 needs to decrypt with his private-key to proof himself to the system 175.
4. Similarly, the client 109 uses the published certificate of the system 175 to authenticate it, e.g. the system 175 uses its private key to decrypt data sent to it by the client 109 to authenticate itself to the client 109.
5. The user 109 selects a registered receiver 110 from a list of registered users which he is allowed to transfer data to.
6. The user 109 initiates the data transfer and the system 175 receives the data file 301.
7. The file 301 is saved encrypted with the data encryption key in the persistent storage 104 and necessary information about the transfer are written to the log.
8. The system 175 sends the receiver 110 an email to notify him about the data.
9. The user 109 logs off.

When the data analyzer (receiver) 110 retrieves the data, steps 1-4 above are repeated with client 110 in place of client 109. Then the following steps take place:

1. The user 110 selects the data file 301 to retrieve.

-9-

2. The mapping function is applied to all the identifiers of each data packet 303 in the data file
  3. The user client 110 receives the file 301 and stores it locally.
  4. The receiver 110 logs off.
- 5 All other user cases have the same authentication pattern. Once the system 175 has accepted the user, he is only allowed to perform operations according to his role as specified in his user profile information.

#### Secret sharing and key management

Turning now to Fig. 4, an important feature of the invention system 175 is to  
10 allow distributed responsibility of the mapping, by supporting multiple keyholders. Hence, the system 175 realizes a third-party encryption, where no single individual can compromise the secret mapping. Indeed, it may be specified how many keyholders are needed to compromise the key.

In the initial startup of the identity protection system 175, all of the  
15 participating keyholders have to attend, their number being subject to specification. For instance if N keyholders are required, the system 175 prompts for N passwords, one for each keyholder, and also their certificates. Each user is expected not to disclose his password outside of system 175. In the preferred embodiment, the system 175 concatenates all of these N passwords into a single combined password.  
20 Then, by applying a predefined message-digest function (as disclosed by Bruce Schneier in *Applied Cryptography*, (1996) page 435), MD(), on the combined passwords an encryption key, K, is generated. That is,  $K = MD(pw_1 + pw_2 + \dots + pw_N)$ . Here,  $pw_1 + pw_2$  denotes the concatenation of the two passwords,  $pw_1$  and  $pw_2$ . The key K, referred to as the data encryption key, is unknown to any group of keyholders  
25 smaller than N, however, K is known to the system 175 during its operation.

The requirement for multiple keyholders introduces a certain type of management issue, i.e. all the keyholders may not be available for the lifetime of a particular project which relies on the system's 175 functionality. Hence, if the system 175 would have to be restarted for any reason, the sufficient number of

keyholders might not be able to attend. Therefore, if an individual has to retire as a keyholder, it is useful enable that operation remotely without the involvement of all the keyholders. This is realized if the system 175 stores the passwords 401 of all the keyholders encrypted with K. System 175 replaces the password of the retiring  
5 keyholder with the new keyholder's password and likewise interchanges their certificates. Similarly, the same procedure may be used if a keyholder thinks his password has been compromised and wants to renew his password.

It is possible to configure the system 175 such that the total number of keyholders is larger than the number of keyholders needed to restart the system 175.  
10 As an example, assume that there are N keyholders, however, only M keyholders are required to restart the system 175, and therefore only M keyholders are required to disclose the mapping function. In the preferred embodiment, the system 175 stores the encrypted version of K for all combinations 402 of M passwords that exist. Standard combinatorial calculation shows that one needs  $N!/(M!(N-M)!)$  versions of  
15 encryption keys for encrypting K. If M keyholders are available at restart, the system 175 may always form one of the encryption keys for decrypting K, by combining their M passwords. Similarly, since the system 175 knows all the passwords as well, it may always regenerate all these combinations if one keyholder changes his password, as in the scenario described above. Several other secret  
20 sharing techniques may also be applied to allow this functionality.

Unless otherwise stated, a common general pattern is used by the system 175 to encrypt plain-text data, i.e.  $CR(D,K)$ , where  $CR()$  denotes the encryption algorithm, D the plain-text input data, and K the encryption key. (See above cited B. Schneier, *Applied Cryptography*, page 1.) The approach is to prefix the plain-text  
25 with a fixed length string that is a combination of a predefined verification pattern and a pseudo-random number. Furthermore, cipher-block chaining (Schneier, page 193) is used to propagate the randomness into all of the cipher-text. This makes it harder to observe patterns in the cipher-text and also makes it possible for the system to recognize if a cipher-text is decrypted into the correct plain-text, i.e.  
30 observe if either the encryption key is wrong or if the data has been tampered with.

When the system 175 is restarted, in case it went down due to some unspecified reason, the keyholders have to enter their passwords. The system 175 regenerates K, in the same manner as in the initial startup. If the verification pattern is incorrect, the system 175 knows that either some of the passwords are incorrect or  
5 that someone has tampered with the data. In order to allow the system 175 to draw a distinction between the two exceptions, the system 175 stores a message-digest 403 of each keyholder's password, a method used for standard password tables. This allows the system 175 to draw a distinction between the two exceptions and also to indicate which passwords are incorrect.

10 The data structures in 401-403 may be thought of as an envelope with a secret key, K, that may be opened only with the appropriate number of keyholders. As used herein, reference will be made to it as a secret-sharing envelope (SSE) 400.  
Identifier mapping

The main purpose of the invention system 175 is to convert personal  
15 identifiers in data packets 303 received from senders 109/110, using some kind of secret mapping, such that the original identifiers are not known to the receiver 110/109. As a result, the data in the data packets 303 when received are considered to be anonymous. Similarly, this scenario may be reversed, a sender sends anonymous data packets which are reverse mapped in order to provide a the receiver  
20 with identifiable data.

All mapping of the personal identifiers (PIDs) is handled by the mapping module 106 (Fig. 1). In a preferred embodiment, the mapping is either implemented using a symmetric encryption, a lookup table with a random generator, or a combination of both, i.e. some one-to-one mapping. Regardless of the mapping  
25 function, the mapping module 106 needs to save a persistent state, e.g. a PID-encryption key or a lookup table. Whatever the format of the information used by the mapping module 106, it may use the data encryption key, K, to encrypt the information.

When encryption is used for the mapping, it is optional whether the  
30 PID-encryption key is entered by key holders or if the system 175 generates it in the

same manner as  $K$ . Most importantly, in its persistent state outside the mapping module 106, the PID-encryption key always needs to be stored encrypted.

Further, the system 175 may also be configured to provide secret mapping between multiple domains. For instance, two domains might be the set of identifiers  
5 in two different laboratories working with anonymous data and the third domain the social-security identifiers. Figure 5 illustrates three domains,  $D_i$  501,  $D_j$  502 and  $D_k$  503 that are related through two one-to-one mapping relations,  $DM_{ij}$  504 and  $DM_{jk}$  505. With these two mapping relations 504, 505, the system 175 is also able to provide a mapping between  $D_i$  and  $D_k$ , e.g.  $D_{ik}(x) = D_{jk}(D_{ij}(x))$ , given the system is  
10 configurable to allow for such a mapping.

Similarly, the system 175 may allow for fully disparate sets with identifiers of different natures, e.g.  $D_i$  501 and  $D_l$  506. As an example, it would be possible to have personal identifiers and identifiers of medical doctors in the same data record. These identifiers, belonging to two separate domains, are mapped simultaneously to  
15 two new domains with two independent mapping relations.

In the case where the system 175 uses more than one mapping relation, it may be desirable to allow for separate secret-sharing access to each mapping relation, instead of using the data encryption key,  $K$ , as the mechanism to protect the mapping relation as mentioned above. Hence, each mapping relation would have its  
20 own secret-sharing envelope 400 (Fig. 4). Fig. 6 shows an example of the mapping information needed to store a lookup-table mapping relation. A secret-sharing envelope 601, SSE, is used to store a specific encryption key for the mapping, DM-key, and the lookup-table 602 is stored with one part of the relation encrypted. Here the encryption is denoted with  $CR'()$  to differentiate it from  $CR()$ , described  
25 previously, since it is an encryption with no randomization. The format of look-up table 602 allows the system 175 to store a large lookup-table in a secure manner in a permanent storage 104. Furthermore, this allows for a fast lookup using database index (see Ramakrishnan et al., *Database Management Systems, 2nd Ed.*, (2000)) alleviating the need for storing the lookup-table in the secure address space 112 as  
30 would be needed if both parts of the relation in the lookup-table 602 were encrypted. In the example shown in 602, when an identifier is mapped from  $D_i$  to  $D_j$ , the lookup

is based upon the identifier encrypted with  $DM_{ij}$ -key. For the reverse mapping, however, the lookup is based on the identifier belonging to domain  $D_j$  and the output then decrypted with  $DM_{ij}$ -key.

#### User profiles and data logs

- 5           The system 175 stores all information about users in the permanent storage 104. In a preferred embodiment of the permanent storage, a relational database is used with a structured query language (SQL) interface (as described in previously cited Ramakrishnan *et.al.*, page 119). In order to be able to use the database query language, it is not practical to encrypt all information in the database. Also,
- 10   information such as user profiles are rarely considered sensitive. However, the security of the system 175 may be compromised if it is possible to tamper with the user profile. To prevent this, some kind of digital signatures is employed. In particular, an extra column, containing an encrypted message digest of all the other columns is added to each data tuple in selected tables, e.g.  $CR(MD(\text{tuple-data}), K)$  or
- 15   simply  $MD(\text{tuple-data}+K)$  where  $CR()$  and  $MD()$  are defined as in the above discussion. An example of this tamper proofing of stored data is shown in Fig. 7 and discussed below. The second possibility is to encrypt all the user data, however, this requires the system to load all the data into the secure memory in order to use it. The third option is to use combination of these two techniques.
- 20           In Fig. 7, table A 701 has three rows of data and table B has four rows of data depicted. To prevent illegal and unauthorized deletion of rows from tables A701 and B702, it is not sufficient to sign each independent row. For logs where rows are never supposed to be deleted or updated it is possible to use chaining, i.e. to let each row contain a message-digest of the previous row, however, this scheme is
- 25   infeasible where rows need to be updated. A better scheme is to let the system 175 issue a row ID 703 to each record (row of data) in the tables 701, 702, and include it in the digital signature 704. A separate summary table 705 is then used, which stores the number of rows in each table 701, 702 utilized by the system 175. After inserting rows into a table 701, 702, the system 175 has to update the corresponding
- 30   row in the summary table 705. Therefore, the system 175 is always able to verify

the integrity of each table 701, 702 by checking if the counted number of rows in each table 701, 702 agrees with the corresponding number (count 706) stored in the summary table 705. Also, all records that are used from a table 701, 702 in a given SQL statement may be verified, using the digital signature of the corresponding

5 rows. The summary table 705 is always relatively very small and therefore is easily stored in main memory, its backup is preferably stored in a secure datastore, such as inside a safe 203, or published regularly, such as when backups of datastore 206 are made.

If the system 175 is operated in a push-push mode, there is hardly any need

10 to store the content of the file 301 with the data packets 303, since each transaction may be set up in such a way that the receiver 110 must have received all the data packets 303 before the sender 109 transaction completes. However, if the system 175 is operated in a push-pull mode, the receiver 110 and the sender 109 are no longer synchronized. The sender 109 may have completed the transaction to send all

15 the data packets 303 before the receiver 110 requests this data. Therefore, the system 175 must store a temporary copy of the data packets 303. Since the content of the data packets 303 may contain sensitive data, the system 175 encrypts them before saving them to the persistent storage 104.

While this invention has been particularly shown and described with

20 references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.

## CLAIMS

What is claimed is:

1. In a computer network, apparatus for mapping data between different domains comprising:  
5 a communication module for establishing a communication connection between a sender of one domain and a receiver in a different domain;  
a mapping module coupled to the communication module for mapping working data of the one domain to working data of the different domain, the working data having an identifier portion and a research data portion, the mapping module mapping between the identifier portion of the working data in the one domain to the identifier portion of the working data in the different domain.  
10
2. Apparatus as claimed in Claim 1 wherein the research data portion of the working data includes personal data of individuals.  
15
3. Apparatus as claimed in Claim 1 wherein the communication connection is a secure communication channel formed by the communication module (i) authenticating the sender and receiver, resulting in an authorized sender and authorized receiver, and (ii) encrypting working data transmitted over the channel.  
20
4. Apparatus as claimed in Claim 3 wherein the mapping module employs encryption in the mapping of working data in the domain to working data in the different domain such that the working data transmitted to the authorized receiver is anonymous data.



5. Apparatus as claimed in Claim 1 further comprising a secret sharing module for controlling access to the apparatus.
6. Apparatus as claimed in Claim 5 wherein the secret sharing module controls access to the mapping module.
- 5 7. Apparatus as claimed in Claim 5 further comprising permanent storage means for storing data in a tamper-proof manner.
8. Apparatus as claimed in Claim 7 wherein the permanent storage means encrypts non-queried parts of the data, said encryption using an encryption key, and  
10 the secret sharing module storing the encryption key.
9. Apparatus as claimed in Claim 8 wherein the permanent storage means employs digital signatures on queried parts of the data to detect changes in data and thereby prevent tampering.
10. Apparatus as claimed in Claim 9 wherein each digital signature is formed  
15 from a message digest of a concatenation of the encryption key and data.
11. Apparatus as claimed in Claim 9 wherein the permanent storage means maintains a summary measure of stored data.
12. Apparatus as claimed in Claim 11 wherein said summary measure has a respective digital signature.
- 20 13. Apparatus as claimed in Claim 1 wherein the mapping module defines a mapping between any two domains by storing a mapping table having cross references between identifier portions of working data of the two domains.

14. Apparatus as claimed in Claim 13 wherein the mapping module stores a mapping table for plural domains, the mapping table being formed of (i) an index section and (ii) a working reference section, the index section indicating identifier portion of working data in a first subject domain and the working reference section indicating corresponding identifier portion in a second domain, the working reference being encrypted, such that the mapping module performs decryption on a part of the mapping table to determine usable cross reference of the working data.
15. Apparatus as claimed in Claim 1 wherein the mapping module maps working data among plural domains.
16. Apparatus as claimed in Claim 1 wherein the sender and receiver are respectively one of a software implementation and a human being.
17. Apparatus as claimed in Claim 1 wherein connection of the sender and receiver is in respective different sessions.
18. Apparatus as claimed in Claim 1 wherein the communication module further enables communication connection by a supervisor in addition to the sender and receiver.
19. Apparatus as claimed in Claim 18 wherein the communication connection by the supervisor enables remote operation of the apparatus by the supervisor.
20. A method for transferring and mapping data between different domains in a computer network, comprising the steps of:
  - transmitting working data from a sender in one domain to a receiver in a different domain, the working data having an identifier portion and a research data portion; and

mapping the working data of the one domain to working data of the different domain by mapping between the identifier portion of the working data in the one domain to the identifier portion of the working data in the different domain.

- 5    21.    A method as claimed in Claim 20 wherein the step of transmitting includes including personal data of individuals in the research data portion.
22.    A method as claimed in Claim 20 further comprising the step of establishing a secure communication connection between the sender and receiver, wherein said secure communication connection includes (i) authentication of  
10    the sender and receiver, resulting in an authorized sender and authorized receiver, and (ii) encryption of the transmitted working data.
23.    A method as claimed in Claim 22 wherein the step of mapping includes encrypting such that the working data received by the authorized receiver is anonymous data.
- 15    24.    A method as claimed in Claim 20 further comprising the step of controlling access within the computer network.
25.    A method as claimed in Claim 20 further comprising the step of storing data in a tamper-proof manner in a permanent storage.
26.    A method as claimed in Claim 25 wherein the step of storing includes  
20    *encrypting non-queried parts of the data.*
27.    A method as claimed in Claim 26 wherein the step of storing further includes assigning a respective digital signature to each queried part of the data to enable detection of changes in the data and thereby prevent tampering.

-19-

28. A method as claimed in Claim 27 wherein the step of encrypting employs an encryption key, and  
the step of assigning includes forming a digital signature from a message digest of a concatenation of data and the encryption key.
- 5 29. A method as claimed in Claim 27 wherein the step of storing working data includes maintaining a summary measure of stored data.
30. A method as claimed in Claim 29 wherein the step of maintaining a summary measure includes assigning a digital signature to the summary measure.
- 10 31. A method as claimed in Claim 20 wherein the step of mapping includes storing a mapping table having cross references between the identifier portions of the working data of the two domains.
- 15 32. A method as claimed in Claim 31 wherein the step of storing a mapping table includes storing a respective mapping table for each domain, each mapping table being formed of (i) an index section and (ii) a working reference section, the index section indicating identifier portion of working data in a first subject domain and the working reference section indicating corresponding identifier portion in a second subject domain, the working reference being encrypted; and  
20 decrypting a part of the mapping table to determine usable cross reference of the working data.
33. A method as claimed in Claim 20 wherein the step of mapping includes mapping working data among plural domains.
34. A method as claimed in Claim 20 wherein the sender and receiver are respectively one of a software implementation and a human being.

-20-

35. A method as claimed in Claim 20 further comprising the step of establishing a communication connection between the sender and receiver where the sender is connected in one session and the receiver is connected in a different session.
- 5 36. A method as claimed in Claim 20 further comprising the step of connecting a supervisor to the computer network.
37. A method as claimed in Claim 36 further comprising the step of enabling remote control by the supervisor.
- 10 38. Apparatus as claimed in Claim 1 wherein the identifier portion of the working data includes identifiers from plural domains, the mapping module mapping multiple identifiers between multiple domains for each reasearch portion of the working data.
39. Apparatus as claimed in Claim 1 further comprising:
- 15 a secured container;
- a computer system executing the communication module and the mapping module; and
- a firewall coupled to the computer system, the computer system and firewall being housed by the secured container so as to provide tamper-proof hardware.

20

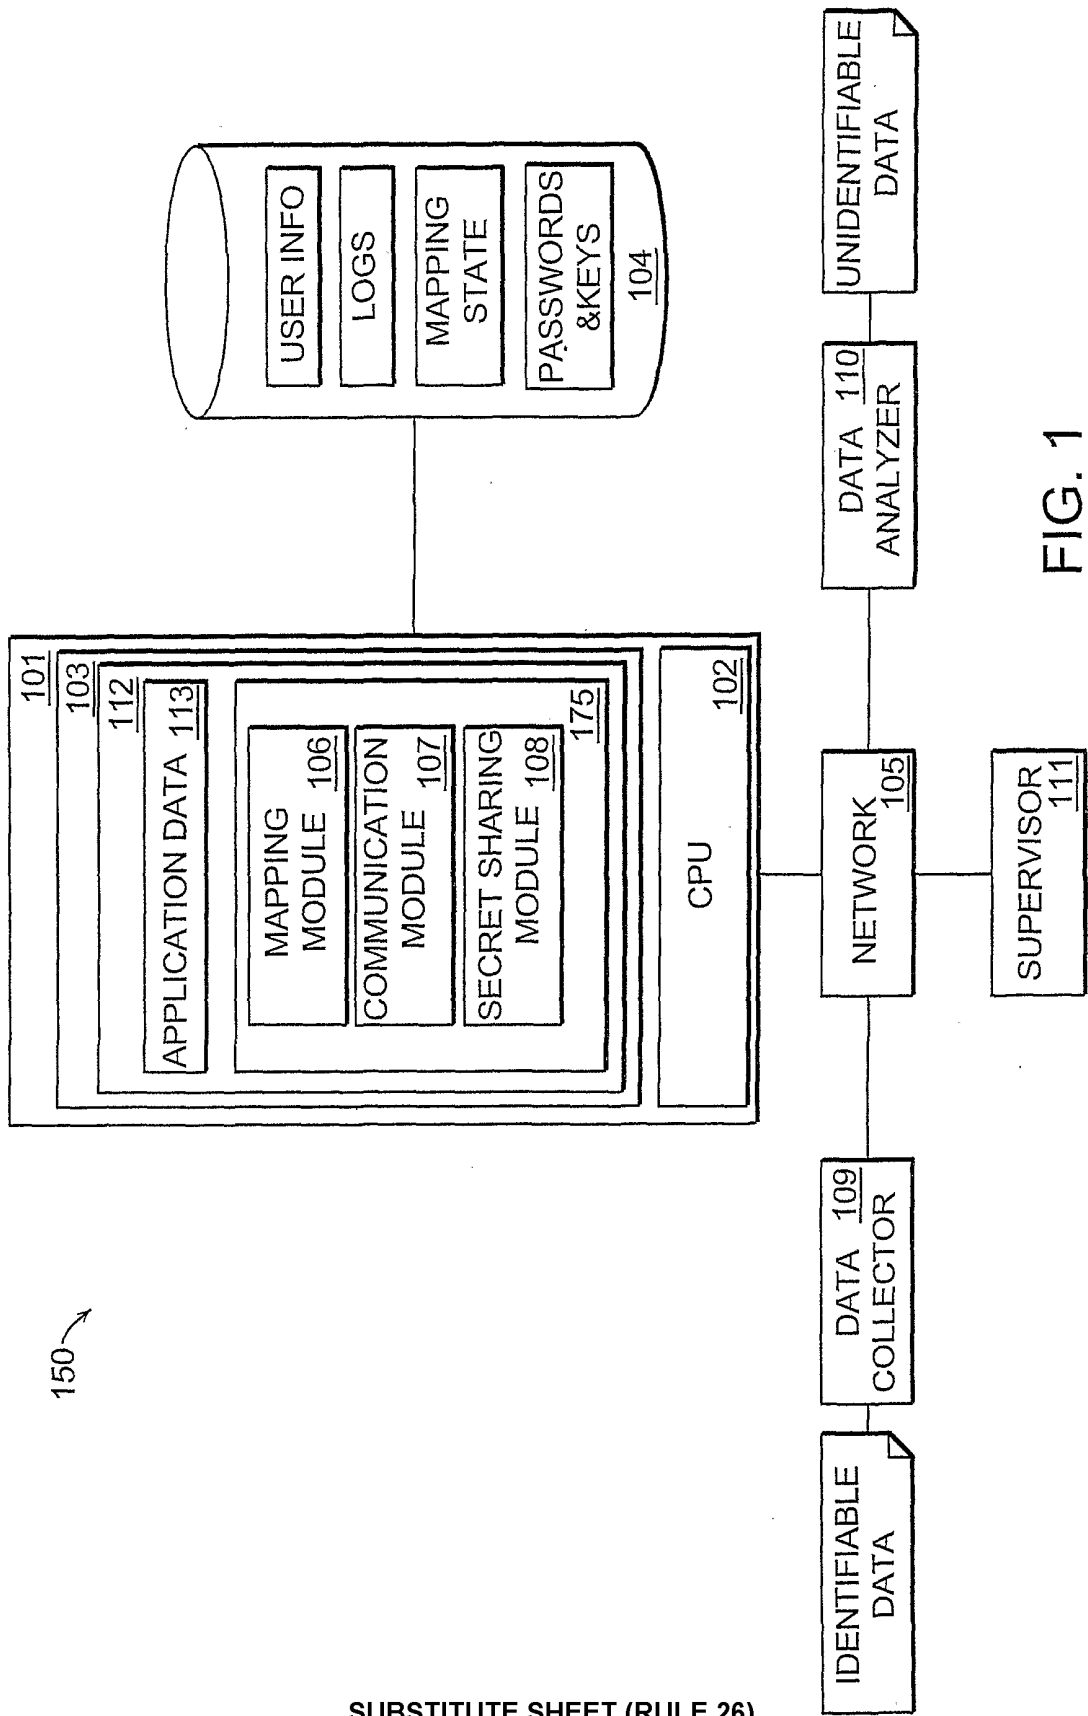


FIG. 1

150

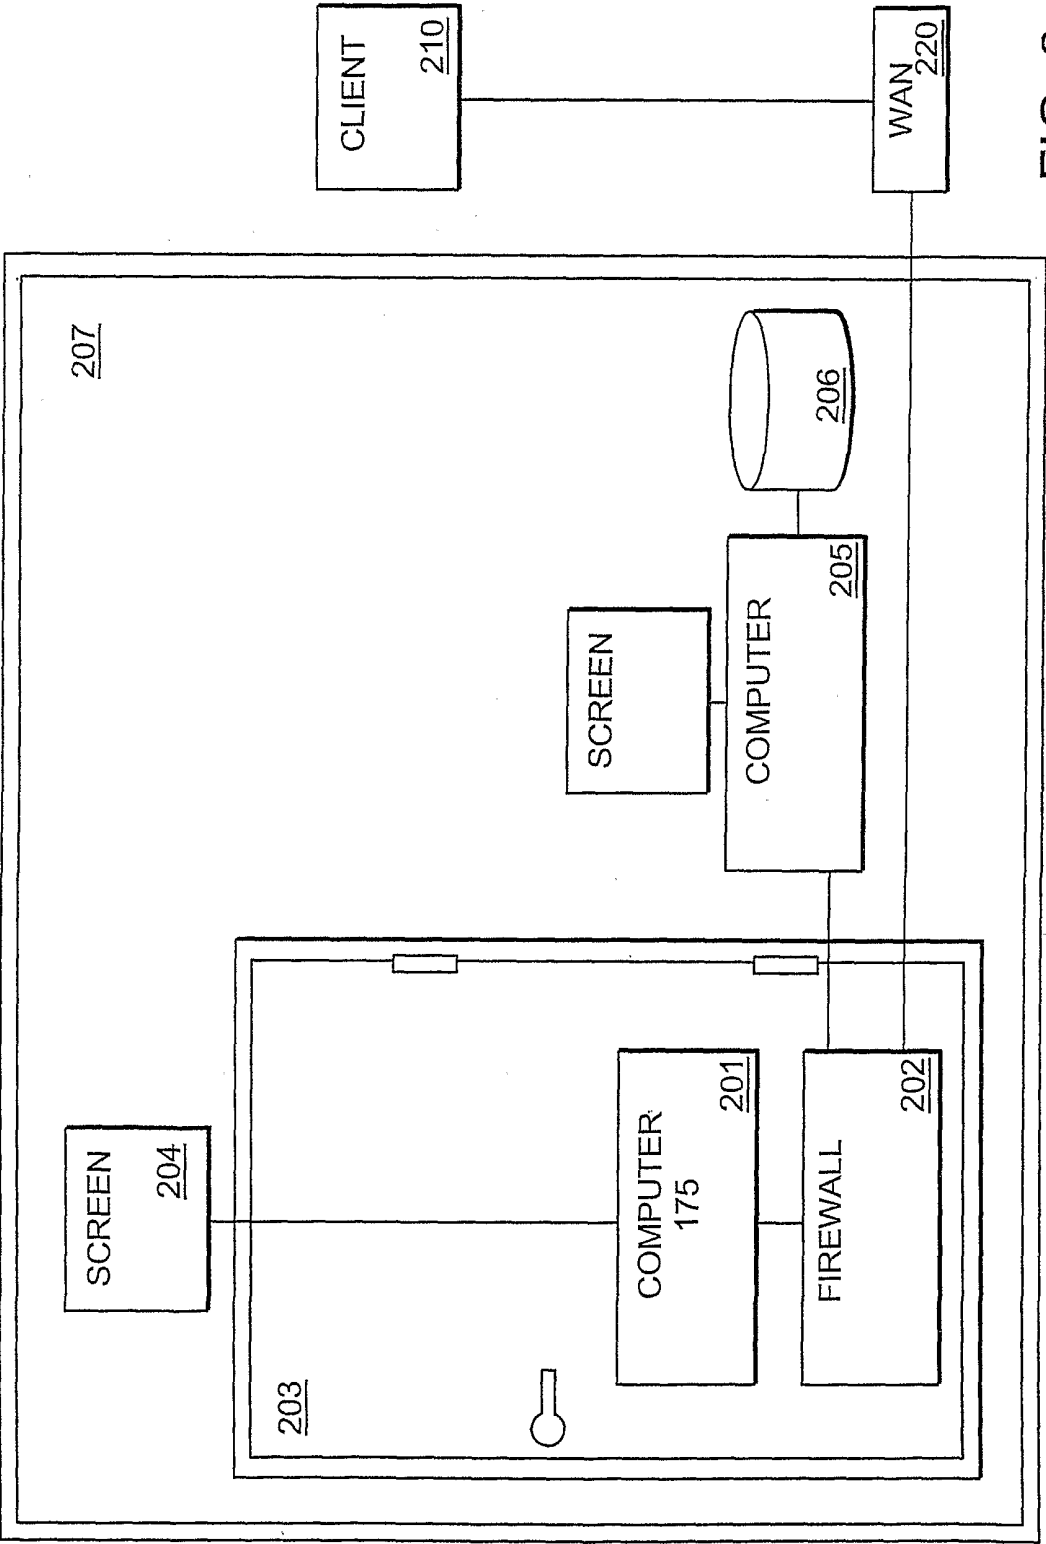


FIG. 2

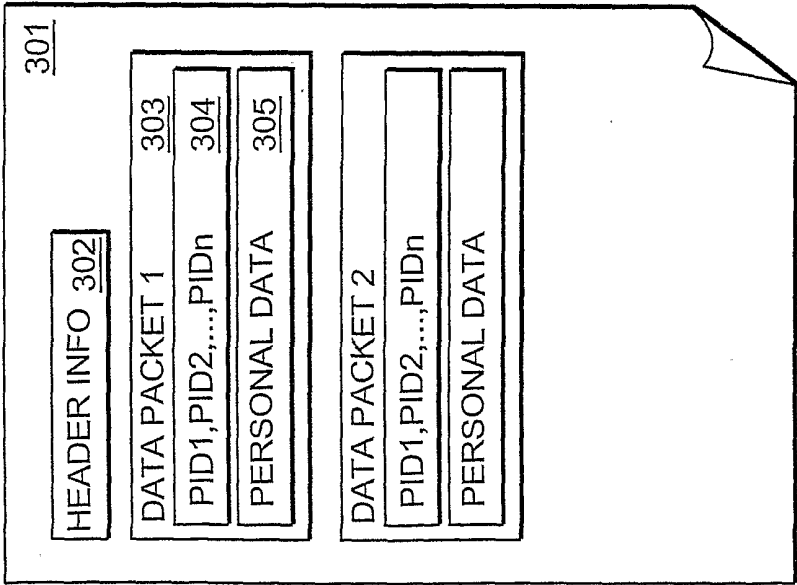


FIG. 3

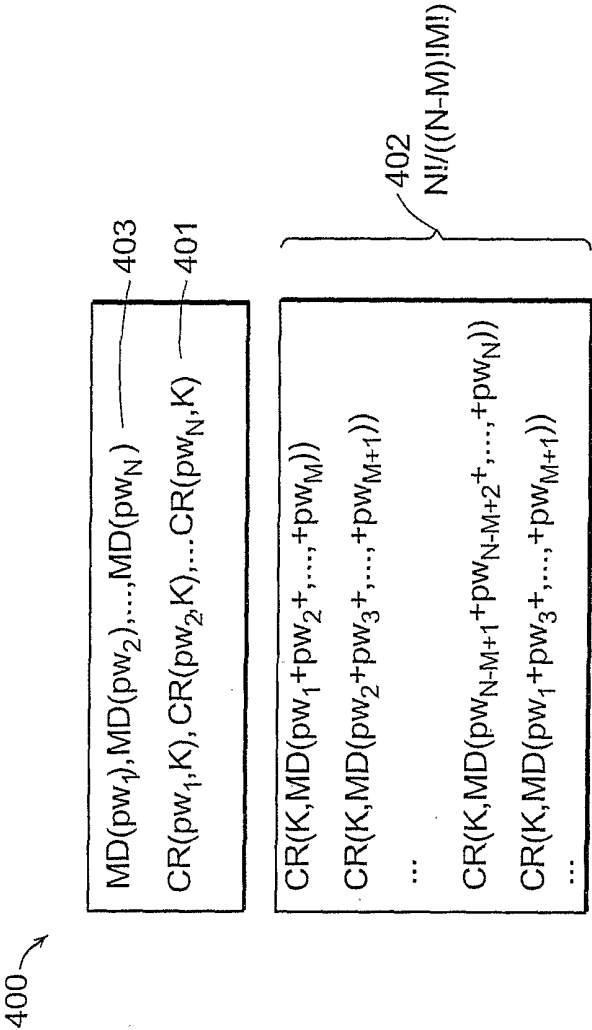


FIG. 4



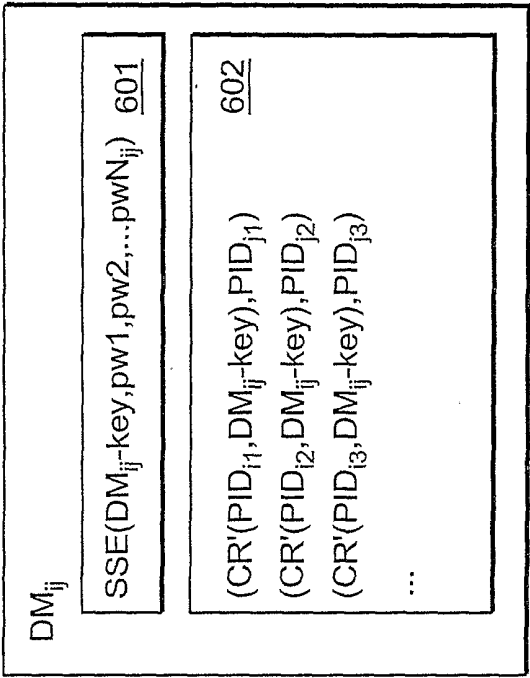


FIG. 6

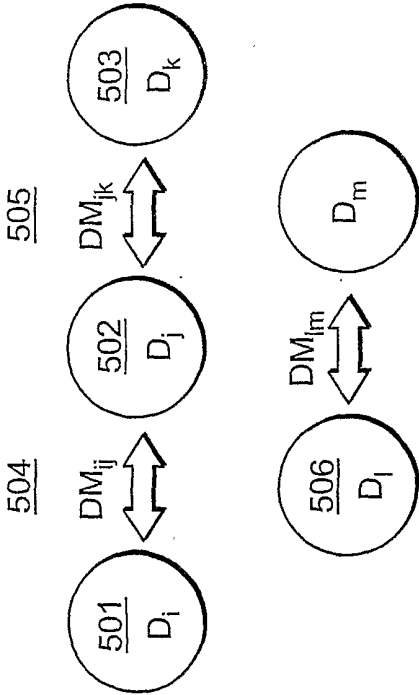


FIG. 5

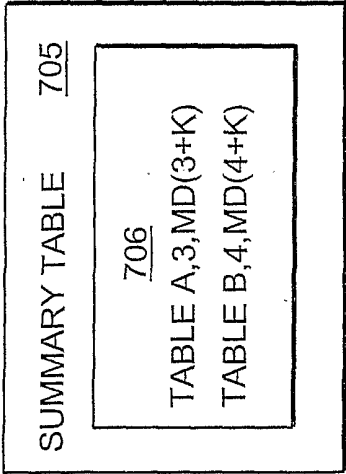
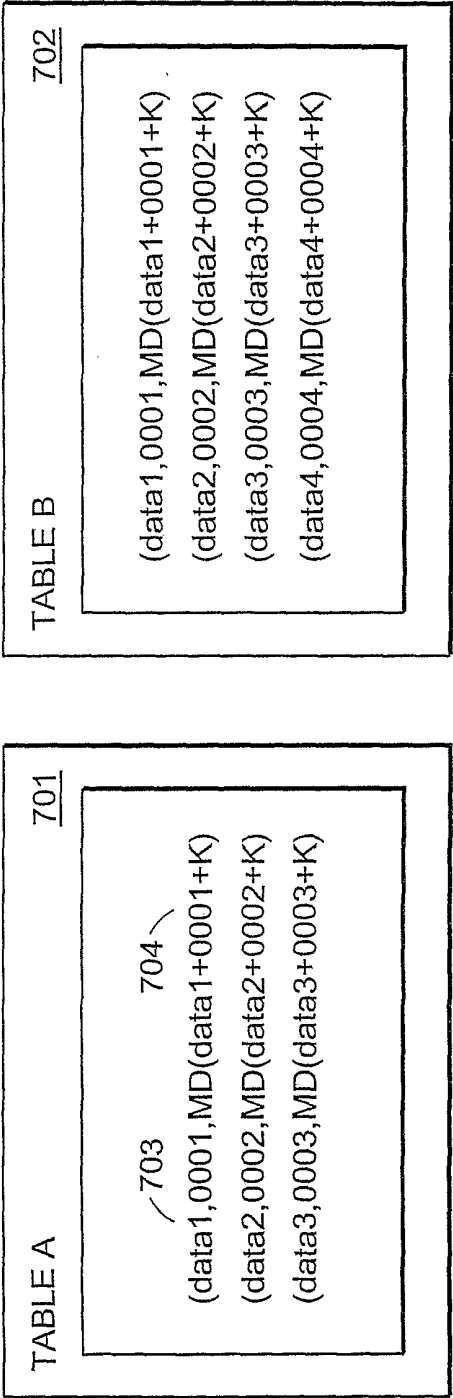


FIG. 7