

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 April 2012 (19.04.2012)

PCT

(10) International Publication Number
WO 2012/049462 A1

(51) International Patent Classification:

C09K 11/06 (2006.01) *H01L 51/50* (2006.01)
H05B 33/14 (2006.01) *H01L 51/00* (2006.01)
H05B 33/20 (2006.01)

(21) International Application Number:

PCT/GB2011/001480

(22) International Filing Date:

13 October 2011 (13.10.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1017467.0 15 October 2010 (15.10.2010) GB

(71) Applicants (for all designated States except US): **CAMBRIDGE DISPLAY TECHNOLOGY LIMITED** [GB/GB]; Building 2020, Cambourne Business Park, Cambridgeshire CB23 6DW (GB). **SUMITOMO CHEMICAL COMPANY LIMITED** [JP/JP]; Floor 18, Sumitomo Twin Buildings, 27-1 Shinkawa 2-chome, Chuo-ku, Tokyo 104-8260 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CONWAY, Natasha, M., J.** [GB/GB]; Cambridge Display Technology Ltd, Building 2020, Cambourne Business Park, Cambridgeshire CB23 6DW (GB). **PILLOW, Jonathan** [GB/GB]; Cambridge Display Technology Ltd, Building 2020, Cambourne Business Park, Cambridgeshire CB23 6DW (GB). **POUNDS, Thomas** [GB/GB]; Cambridge Display Technology Ltd, Building 2020, Cambourne Business Park, Cambridgeshire CB23 6DW (GB). **JAKOBSSON,**

Fredrik [SE/GB]; Cambridge Display Technology Ltd, Building 2020, Cambourne Business Park, Cambridgeshire CB23 6DW (GB). **NIELSEN, Christian B.** [DK/GB]; 6 Heber Mansions, Queens Club Gardens, London W14 9RL (GB).


(74) Agent: **KAY, Christopher**; IP Department, Cambridge Display Technology Ltd, Building 2020, Cambourne Business Park, Cambridgeshire CB23 6DW (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POLYMER AND ORGANIC LIGHT-EMITTING DEVICE

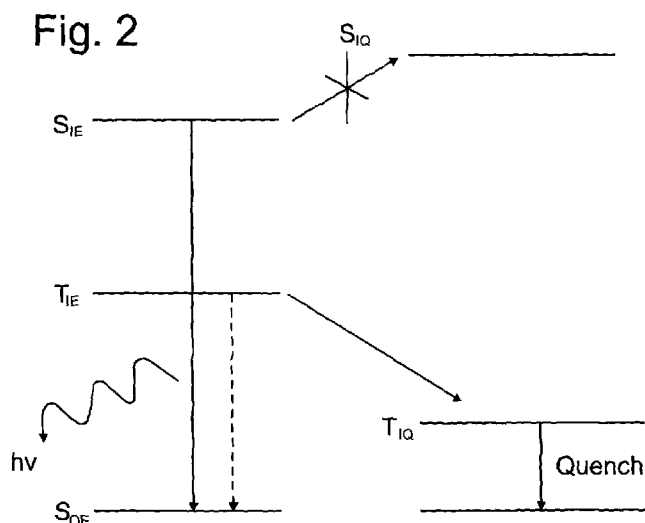

(57) Abstract: Light-emitting composition and devices including the same, the composition including a fluorescent light-emitting material and a polymer having a conjugating repeat unit and a non-conjugating repeat unit in a backbone of the polymer, and in which the conjugating repeat unit provides at least one conjugation path between repeat units linked to it; the non-conjugating repeat unit reduces conjugation of the polymer as compared to a polymer in which the non-conjugating repeat unit is absent; and a triplet excited state energy level of the light-emitting material is higher than a triplet excited state energy level of the non-conjugating repeat unit.

WO 2012/049462 A1

Published:

— with international search report (Art. 21(3))

POLYMER AND ORGANIC LIGHT-EMITTING DEVICE

Summary of the Invention

This invention relates to charge transporting and light-emitting polymers, in particular for use in organic light-emitting devices.

Background of the Invention

Electronic devices comprising active organic materials are attracting increasing attention for use in devices such as organic light emitting diodes, organic photoresponsive devices (in particular organic photovoltaic devices and organic photosensors), organic transistors and memory array devices. Devices comprising organic materials offer benefits such as low weight, low power consumption and flexibility. Moreover, use of soluble organic materials allows use of solution processing in device manufacture, for example inkjet printing or spin-coating.

With reference to Figure 1, an organic light-emitting device (OLED) may comprise a substrate 1 carrying an anode 2, a cathode 4 and an organic light-emitting layer 3 between the anode and cathode comprising a light-emitting material.

In operation, holes are injected into the device through the anode 2 and electrons are injected through the cathode 4 during operation of the device. Holes and electrons combine in the light-emitting layer to form an exciton that releases its energy as light. The colour of light emitted from the device depends, at least in part, on the HOMO-LUMO bandgap (that is, the highest occupied molecular orbital – lowest unoccupied molecular orbital bandgap) of the light emitting material.

Suitable light-emitting materials include small molecule, polymeric and dendrimeric materials. Suitable light-emitting polymers for use in layer 3 include conjugated polymers (that is, polymers in which adjacent repeat units in the polymer backbone are conjugated together) for example poly(arylene vinylenes) such as poly(p-phenylene vinylenes) and polyarylenes such as polyfluorenes.

Alternatively or additionally, the light emitting layer may comprise a semiconducting host material and a light-emitting dopant wherein energy is transferred from the host material to the light-emitting dopant. For example, J. Appl. Phys. 65, 3610, 1989 discloses a host material doped with a fluorescent light-emitting dopant (that is, a light-emitting material in which light is emitted via decay of a singlet exciton) and

Appl. Phys. Lett., 2000, 77, 904 discloses a host material doped with a phosphorescent light emitting dopant (that is, a light-emitting material in which light is emitted via decay of a triplet exciton). In order to function effectively as a host it is necessary for the relevant excited state energy level of the host material to be higher than that of the luminescent dopant that the host is to be used with (for example, the singlet excited state energy level S_1 for a fluorescent emitter and the triplet excited state energy level T_1 for a phosphorescent emitter).


Use of a conjugated polymer, either as a light-emitting material or as a host material, may offer numerous advantageous properties such as polymer solubility, enabling the material to be deposited by solution coating or printing techniques such as spin-coating or inkjet printing, and high conductivity.

However, conjugation between adjacent repeat units of a conjugated polymer has the effect of lowering the excited state energy levels of the polymer as compared to the excited state energy levels of the monomers from which those repeat units are derived; for example, conjugating a plurality of fluorene units together creates a conjugated chain with a lower excited state energy level than that of the isolated repeat units. Accordingly, the presence of extended conjugation along the backbone of a polymer may limit the colour of emission that is achievable with that polymer, in particular at the short wavelength (blue) end of the visible spectrum, and / or the range of light-emitting dopants that the polymer can function as a host for.

WO 2005/013386 discloses an organic light-emitting device comprising a host polymer material and a luminescent metal complex wherein the polymer material may comprise partially or fully non-conjugated repeat units.

WO 02/066537 discloses conjugated polymers comprising repeat units that are twisted out of the plane of the polymer backbone in order to reduce stacking between polymer chains and decrease conjugation of the polymer.

WO 02/26856 discloses polymers comprising repeat units of formula (I):

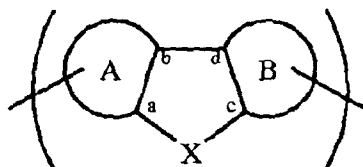

wherein X is such that there is a torsion angle of at least 5° between the bond a-b and the bond c-d about the bond b-d.

Separately, it has been postulated that the presence of triplet excitons, which may have relatively long-lived triplet excited states, can be detrimental to OLED lifetime as a result of triplet-triplet or triplet-singlet interactions (OLED lifetime as used herein means the length of time taken for the luminance of the OLED at constant current to fall by 50% from an initial luminance value).

US 2007/145886 discloses an OLED comprising a triplet-quenching material to prevent or reduce triplet-triplet or triplet-singlet interactions.

Summary of the Invention

In a first aspect the invention provides a light-emitting composition including a fluorescent light-emitting material and comprising a polymer comprising a conjugating repeat unit and a non-conjugating repeat unit in a backbone of the polymer, wherein:

the conjugating repeat unit provides at least one conjugation path between repeat units linked thereto;


the non-conjugating repeat unit reduces conjugation of the polymer as compared to a polymer in which the non-conjugating repeat unit is absent; and

a triplet excited state energy level of the light-emitting material is higher than a triplet excited state energy level of the non-conjugating repeat unit.

Optionally, the non-conjugating repeat unit does not provide any conjugation path between repeat units linked thereto.

Optionally, the fluorescent light-emitting material is a repeat unit of the polymer.

Optionally, the fluorescent light-emitting repeat unit of the polymer comprises a repeat unit of formula (V):



(V)

wherein Ar^1 and Ar^2 in each occurrence are independently selected from optionally substituted aryl or heteroaryl, n is greater than or equal to 1, preferably 1 or 2, R is H or a substituent, preferably a substituent, p and q are each independently 1, 2 or 3, and any aryl or heteroaryl groups of the repeat unit of formula (V) may be linked to one another by a direct bond or a divalent group.

Optionally, R is $-(Ar^3)_r$, wherein each Ar^3 independently represents an optionally substituted aryl or heteroaryl group and r is at least 1.


Optionally, the non-conjugating repeat unit is linked to adjacent repeat units such that there is no conjugating path of alternating saturated and unsaturated bonds between the adjacent repeat units.

Optionally, the non-conjugating repeat unit comprises at least one sp^3 hybridised carbon atom in at least one path between the repeat units that the non-conjugating repeat unit is linked to.

Optionally, the non-conjugating repeat unit is twisted out of the plane of at least one adjacent repeat unit.

Optionally, the conjugating repeat unit comprises an optionally substituted arylene repeat unit.

Optionally, the conjugating repeat unit comprises a repeat unit of formula (IV):



(IV)

wherein R^1 and R^2 are independently H or a substituent and wherein R^1 and R^2 may be linked to form a ring.

Optionally, the non-conjugating repeat unit does not comprise perylene.

Optionally, the non-conjugating repeat unit comprises the fluorescent light-emitting material.

Optionally, the fluorescent light-emitting material comprises a repeat unit of formula (V) and wherein R comprises a triplet-quenching group.

Optionally, the non-conjugating repeat units comprise at least 5 mol%, preferably at least 10 mol%, of the total number of repeat units in the polymer.

Optionally, the polymer comprises at least two different conjugating repeat units.

Optionally, the polymer comprises at least two different non-conjugating repeat units.

In a second aspect the invention provides an organic light-emitting device comprising an anode, a cathode and a light-emitting layer between the anode and the cathode wherein the light-emitting layer comprises a light-emitting composition according to the first aspect.

In a third aspect the invention provides a method of forming a light-emitting composition according to the first aspect comprising the steps of polymerising a polymerisation mixture comprising a monomer comprising a conjugating unit and a monomer comprising a non-conjugating unit.

Optionally, the polymerisation mixture comprises a monomer comprising a light-emitting unit.

Optionally, the polymerisation is a metal insertion polymerisation wherein each monomer comprises at least two leaving groups capable of participating in the metal insertion polymerisation.

Optionally, each leaving group is independently selected from halogen, preferably bromine or iodine; a boronic acid or an ester thereof; and a sulfonic acid or a derivative thereof.

In a fourth aspect the invention provides use of a non-conjugating, triplet quenching repeat unit in a polymer to quench triplet excitons in a light-emitting composition and to reduce conjugation of the polymer as compared to a polymer in which the non-conjugating repeat unit is absent, the light-emitting composition including a fluorescent light-emitting material and comprising a polymer comprising a conjugating repeat unit and the non-conjugating, triplet quenching repeat unit in a backbone of the polymer, wherein:

the conjugating repeat unit provides at least one conjugation path between repeat units linked thereto; and

a triplet excited state energy level of the light-emitting material is higher than a triplet excited state energy level of the non-conjugating, triplet quenching repeat unit.

Description of the Drawings

The invention will now be described in more detail with reference to the drawings in which:

Figure 1 schematically illustrates an organic light-emitting device;

Figure 2 is an energy transfer diagram illustrating emission of light from a fluorescent OLED and quenching of triplet excitons;

Figure 3 illustrates lifetime of comparative devices;

Figure 4 illustrates triplet density of comparative devices;

Figure 5 illustrates delayed fluorescence from comparative devices; and

Figure 6 illustrates delayed fluorescence with a de-trapping pulse from comparative devices.

Detailed Description of the Invention

Figure 2 illustrates an energy transfer mechanism for an OLED comprising an light emitting polymer (that is, a polymer comprising light-emitting repeat units) wherein the light-emitting polymer has a singlet excited state energy level S_{1E} and a singlet ground state energy level S_{0E} . For the avoidance of any doubt, energy levels are not drawn to any scale.

Singlet excitons having energy S_{1E} decay by emission of fluorescent light $h\nu$, illustrated by the solid arrow between S_{1E} and S_{0E} in Figure 1, however triplet excitons having energy T_{1E} may not radiatively decay to S_{0E} because this process is spin-forbidden. Consequently, triplet excitons may build up and triplet-triplet exciton interactions or triplet-singlet exciton interactions may create "super-excited" states on the light-emitting polymer. Without wishing to be bound by any theory, it is believed that formation of these highly energetic super-excited states on the light emitting polymer may be detrimental to OLED lifetime. By providing a triplet quenching unit having an excited triplet state energy level T_{1Q} that is lower than T_{1E} , it is possible for triplet excitons to be transferred for quenching to the triplet accepting unit.

However, the present inventors have found that the lifetime of a fluorescent OLED composition including a polymer containing conjugating units and non-conjugating units is significantly reduced as compared to a light-emitting polymer without non-

conjugating units even if the light-emitting polymer is blended with a triplet quenching material.

Moreover, the present inventors have found that OLEDs comprising polymers with non-conjugating units have a relatively high triplet exciton density as compared to OLEDs comprising light-emitting polymers without said non-conjugating units.

Without wishing to be bound by any theory, it is believed that triplet excitons are able to move relatively freely along a conjugated polymer chain (the triplet exciton diffusion being governed by Dexter transfer), but become trapped on the polymer chain when reaching a break in conjugation. Consequently, blending a triplet quenching material blended with a polymer comprising non-conjugating units is not as effective in increasing OLED lifetime as compared to an OLED comprising a polymer without the non-conjugating units because the triplet excitons on a polymer comprising non-conjugating units have a slower diffusion rate and so are less likely to encounter the triplet quenching material.

In order to increase the likelihood of triplet excitons encountering a triplet quenching material, the present invention provides a conjugated polymer comprising repeat units that both reduce or break conjugation along the polymer backbone and provide a triplet exciton quenching site. Without wishing to be bound by any theory, it is believed that the provision of triplet quenching units at non-conjugating sites of the polymer serve to quench triplet excitons that would otherwise build up at the non-conjugating sites due to the reduced mobility of the triplet excitons at those sites.

Light-emitting composition

The polymer comprises both conjugating repeat units and non-conjugating, triplet quenching repeat units. The polymer may provide one or more of light-emitting, electron transporting and / or hole transporting functionality, and may comprise further repeat units to provide one or more of those functions. Alternatively, one or more of those functions may be provided by materials blended with the polymer.


For example, the polymer may comprise two or more regions selected from hole transporting regions, electron transporting regions and emissive regions as disclosed in, for example, WO 00/55927 and U.S. Pat. No. 6,353,083, and more than one function may be performed by a single region. In particular, a single region may be capable of both charge transport and emission.

Each region may comprise a single repeat unit, e.g. a triarylamine repeat unit may be a hole transporting region. Alternatively, each region may be a chain of repeat units, such as a chain of polyfluorene units as an electron transporting region. Each region within such a polymer may independently be provided along the polymer backbone, as per U.S. Pat. No. 6,353,083, or as groups pendant from the polymer backbone as per WO 01/62869.

Light-emitting material

The light-emitting material may be a separate material that is blended with the polymer comprising conjugating and non-conjugating repeat units. Alternatively, the light-emitting material may be provided as a repeat unit of that polymer.

Exemplary light-emitting repeat units include repeat units of formula (V):



(V)

wherein Ar^1 and Ar^2 in each occurrence are independently selected from optionally substituted aryl or heteroaryl groups, n is greater than or equal to 1, preferably 1 or 2, R is H or a substituent, preferably a substituent, and p and q are each independently 1, 2 or 3.

R is preferably alkyl or $-(\text{Ar}^3)_r$, wherein Ar^3 and r are as described above.


Any of Ar^1 , Ar^2 and Ar^3 may independently be substituted with one or more substituents. Preferred substituents are selected from R^3 as described above.

Any of the aryl or heteroaryl groups in the repeat unit of Formula (V) may be linked by a direct bond or a divalent linking atom or group. Preferred divalent linking atoms and groups include O , S , substituted N and substituted C .

Where present, substituted N or substituted C of the divalent linking group may independently in each occurrence be $-\text{NR}^6$ or $-\text{CR}^6_2$.

In one preferred arrangement, R is Ar^3 and each of Ar^1 , Ar^2 and Ar^3 are independently and optionally substituted with one or more C_{1-20} alkyl groups.

Preferred units satisfying Formula 1 include units of Formulae 1-3:

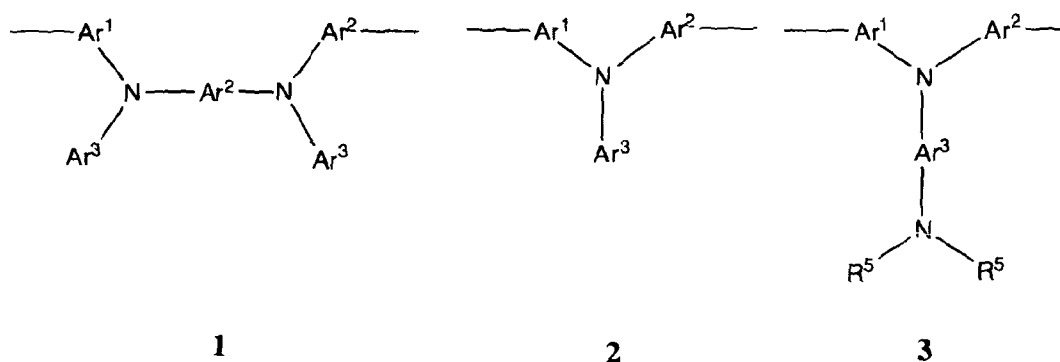

wherein Ar^1 and Ar^2 are as defined above; and Ar^3 is optionally substituted aryl or heteroaryl and wherein each R^5 is independently selected from the group consisting of alkyl and aryl or heteroaryl optionally substituted with one or more alkyl groups.

Where present, optional substituents for Ar^3 may be as described above with respect to formula (V).

In another preferred arrangement, aryl or heteroaryl groups of formula (V) are phenyl, each phenyl group being optionally substituted with one or more alkyl groups.

In another preferred arrangement, Ar^1 , Ar^2 and Ar^3 are phenyl, each of which may be substituted with one or more C_{1-20} alkyl groups, and $r = 1$.

In yet another preferred arrangement, Ar^1 , Ar^2 and Ar^3 are phenyl, each of which may be substituted with one or more C_{1-20} alkyl groups, $r = 1$ and Ar^1 and Ar^2 are linked by an O or S atom.

When used as a light-emitting material, the unit of formula (V) the proportion of arylamine repeat units may be up to about 30 mol %.

The polymer optionally is a blue light-emitting polymer, optionally a polymer that photoluminesces with a CIE(y) value of less than 0.2.

Non-conjugating, triplet quenching repeat units

The non-conjugating, triplet quenching repeat unit reduces conjugation of the polymer as compared to a polymer in which that unit is absent, and may be provided by one or more of:

i) linking a triplet quenching repeat unit through atoms of the repeat unit such that that there is no path of alternating saturated and unsaturated bonds, in particular

alternating single bonds and double bonds, between repeat units that are linked to the non-conjugating repeat unit, and


ii) forming a twist between a repeat unit and at least one adjacent repeat unit such that pi orbitals of the repeat unit and the at least one adjacent repeat unit are *not in the same plane*, thereby reducing or eliminating overlap of pi orbitals of adjacent repeat units.

With respect to (i), this may be achieved by:


(a) providing one or more non-conjugating atoms, such as one or more sp^3 hybridised carbon atoms, in the conjugation path and / or

(b) selecting the atoms through which the repeat unit is linked to adjacent repeat units such that there is no path of alternating saturated and unsaturated bonds between repeat units that are linked to the non-conjugating repeat unit.

With reference to (i)(b), the effect of selection of the linking position of a repeat unit on conjugation to adjacent repeat units is illustrated by the following:

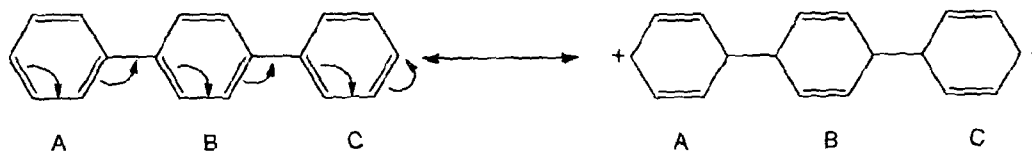

In this case, the 1,4 linkage of phenyl unit B provides for a conjugation path between units A and C, and a resonance structure of the 3 units can be drawn. If, however, linkage is through the 1,3-positions then there is no path of alternating double and single bonds between units A and C:



Therefore, it will be appreciated that while a repeat unit may itself be internally conjugated, the positions through which that repeat unit is linked may determine whether or not the repeat unit is a conjugating repeat unit providing a conjugation path between repeat units linked thereto.


With respect to (ii), this may be achieved by placing on or more substituents on a triplet quenching repeat unit so as to create steric hindrance between the triplet quenching unit and one or more adjacent repeat units so as to induce a twist. In particular, one or more substituent(s) located on an atom or atoms adjacent to a linking position of a triplet quenching unit may induce a twist between the triplet quenching unit and an adjacent unit. The substituent or substituents may be provided on the triplet quenching unit or on the adjacent unit. In one arrangement, one substituent may be on an atom of the triplet quenching unit adjacent to the linking atom of the triplet quenching unit, and one substituent may be on an atom of the adjacent unit adjacent to the linking atom of the adjacent unit so as to create steric hindrance between the two substituents.

A reduction in polymer conjugation upon introduction of a non-conjugating unit may be evidenced by any one of the following changes as compared to a polymer not comprising the non-conjugating unit: a shift in peak photoluminescent emission from the polymer towards a shorter wavelength, optionally a reduction of at least 0.01 in the polymer's photoluminescent CIE(y) value; or a reduction in electron current, which is measurable with an electron-only device.

Exemplary non-conjugating triplet quenching repeat units include aromatic or heteroaromatic compounds comprising one or more mono- or polycyclic rings non-conjugatively linked to adjacent repeat units, and optionally including one or more alkenyl or alkynyl groups, for example polyaromatic hydrocarbons such as anthracenes and anthanthrenes and derivatives thereof; distyryl aryls and derivatives thereof such as distyrylbenzenes, distyrylbiphenyls, stilbenes, fulvenes, dibenzofulvenes, linear polyenes (from 2 to 6 alkenes) including cyclic polyenes such as cyclooctatetraene and further materials described in Handbook of Photochemistry, 2nd Edition, Steven L Murov, Ian Carmichael and Gordon L Hug, the contents of which are incorporated herein by reference. Each said repeat unit may optionally be substituted, for example substituted with one or more groups R1 as described below with reference to repeat unit (IV). For example, each said non-conjugating triplet quenching repeat unit may be substituted with one or more alkyl groups, such as one or more C₁₋₂₀ alkyl groups.

It will be appreciated that the suitability of any given repeat unit for use as a triplet quenching repeat unit will depend on whether that unit has a triplet excited state energy level lower than that of the emitter.

A group that provides triplet-quenching functionality may itself be inserted into the polymer backbone in such a way that a break in conjugation is formed along the polymer backbone. Alternatively, the triplet-quenching group may be pendent from a unit in the polymer backbone that provides a break in conjugation, such as in a repeat unit of formula (II):




wherein CB is a conjugation breaking unit; Sp is a spacer group, such as an alkyl group, TQ is a triplet quenching group; and m is 0 or 1.

For example, the N atom(s) of the repeat unit of formula (V) form a break in conjugation along the polymer backbone and so this unit, may be substituted with any suitable triplet quenching unit to form the non-conjugating, triplet quenching unit.

The substituent $-(\text{Sp})_m\text{-TQ}$ may be provided as substituent R or as a substituent of Ar^3 of formula (V).

The triplet quenching, non-conjugating repeat units optionally comprise at least 5 mol %, optionally at least 10 mol % of the total number of moles of repeat units in the polymer. One optional range is 15-50 mol %.

The triplet quenching, non-conjugating repeat units may have formula (I), wherein TQNC is the triplet quenching, non-conjugating repeat unit, * indicates the connecting bonds of the repeat unit θ is in the range of 120° - 180° :



(I)

Conjugating repeat units

The conjugating repeat units provide at least one conjugation path between repeat units linked thereto such that the repeat units linked thereto are conjugatively linked. More specifically, each conjugating repeat unit provides a path of alternating double bonds and single bonds capable of conjugating the repeat unit to unsaturated bonds of adjacent repeat units.


The conjugating repeat units may provide one or more of hole transporting, electron transporting and light-emitting functionality.

Exemplary conjugating repeat units include optionally substituted polyarylenes or polyheteroarylenes such as: optionally substituted polyfluorenes, in particular polymers comprising 2,7-linked fluorene repeat units; polyindenofluorenes, particularly 2,7-linked polyindenofluorenes; and polyphenylenes, particularly poly-1,4-phenylenes. Another class of materials are arylene vinylenes, such as phenylene vinylenes. Such polymers are disclosed in, for example, Adv. Mater. 2000 12(23) 1737-1750 and references therein. Exemplary substituents for these repeat units include alkyl, alkoxy, alkylthio, dialkylamino, and optionally substituted aryl and heteroaryl groups. Conjugated chains of arylene repeat units, for example chains of fluorene repeat units, may provide electron transporting functionality. One or more different conjugating repeat units may be provided in the polymer, for example conjugating repeat units comprising the same arylene backbone unit but with different substituents and / or different conjugating arylene backbone units.

Conjugating repeat units may optionally be provided in an amount in the range of 50 – 95 mol % of the total number of repeat units in the polymer, and the percentage

incorporation of non-conjugating repeat units may be dependent on the percentage of conjugating repeat units present and the extent to which breaks in conjugation are required.

Particularly preferred conjugating arylene repeat units comprise optionally substituted fluorenes, such as repeat units of formula IV:



(IV)

wherein R^1 and R^2 are independently H or a substituent and wherein R^1 and R^2 may be linked to form a ring.

R^1 and R^2 are optionally selected from the group consisting of hydrogen; optionally substituted alkyl wherein one or more non-adjacent C atoms of the alkyl group may be replaced with O, S, substituted N, C=O and -COO-; and optionally substituted $(Ar^3)_r$, wherein Ar^3 in each occurrence is independently selected from aryl or heteroaryl and r in each occurrence is independently at least 1, optionally 1, 2 or 3.

In the case where R^1 or R^2 comprises alkyl, optional substituents of the alkyl group include F, CN, nitro, and aryl or heteroaryl optionally substituted with one or more groups R^4 wherein each R^4 is independently alkyl in which one or more non-adjacent C atoms may be replaced with O, S, substituted N, C=O and -COO- and one or more H atoms of the alkyl group may be replaced with F.

In the case where R^1 or R^2 comprises aryl or heteroaryl, each aryl or heteroaryl group may independently be substituted. Preferred optional substituents for the aryl or heteroaryl groups include one or more substituents R^3 consisting of:

alkyl wherein one or more non-adjacent C atoms may be replaced with O, S, substituted N, C=O and -COO- and one or more H atoms of the alkyl group may be replaced with F or aryl or heteroaryl optionally substituted with one or more groups R^4 ,

aryl or heteroaryl optionally substituted with one or more groups R^4 ,

NR^5_2 , OR^5 , SR^5 , and

fluorine, nitro and cyano;

wherein each R^5 is independently selected from the group consisting of alkyl and aryl or heteroaryl optionally substituted with one or more alkyl groups.

Where present, substituted N in repeat units of formula (IV) may independently in each occurrence be NR^5 or NR^6 wherein R^6 is alkyl or optionally substituted aryl or heteroaryl. Optional substituents for aryl or heteroaryl groups R^6 may be selected from R^4 or R^5 .

Optional substituents for the fluorene unit, other than substituents R^1 and R^2 , are preferably selected from the group consisting of alkyl wherein one or more non-adjacent C atoms may be replaced with O, S, substituted N, $C=O$ and $-COO-$, optionally substituted aryl, optionally substituted heteroaryl, fluorine, cyano and nitro.

In one preferred arrangement, at least one of R^1 and R^2 comprises an optionally substituted C_1 - C_{20} alkyl or an optionally substituted aryl group, in particular phenyl substituted with one or more C_{1-20} alkyl groups.

Further repeat units

Further repeat units may be provided in the polymer comprising conjugating and triplet quenching, non-conjugating repeat units in order to provide one or more of hole transporting, electron transporting and light-emitting functionality.

Further repeat units suitable for inclusion in the polymer to provide hole transport and / or light-emission include arylamine repeat units, for example repeat units of formula (V) described above that are not substituted with any triplet-quenching groups.

The non-conjugating repeat units, conjugating repeat units and further repeat units described above all have only two linking positions which when polymerised together form linear polymers. However, it will be appreciated that any of these repeat units may be provided with more than two linking positions, for example in order to form starburst polymers. The maximum possible number of linking positions of a monomer will correspond to the number of polymerisable leaving groups that it is substituted with.

Relative energy levels and measurement

With reference to Figure 2, it will be appreciated that the light-emitting material has a T_1 level that is higher than that of the triplet-quenching non-conjugating repeat unit

that it is to be used with in order that the triplet exciton may be transferred from the light-emitting material to the non-conjugating triplet quenching repeat unit.

Preferably, the T_1 level of the light-emitting material is at least kT higher than the T_1 level of the non-conjugating triplet quenching repeat unit in order to avoid back-transfer of excitons from the non-conjugating triplet quenching repeat unit to the light-emitting material.

Likewise, the S_1 level of the light-emitting material is preferably at least kT lower than that of the triplet quenching repeat unit.

The T_1 and S_1 levels of the triplet quenching unit can be measured from the fluorescence and phosphorescence spectra, respectively, of the monomer. The non-conjugating nature of the triplet quenching unit means that these values will not change significantly upon introduction of the unit into the polymer. Likewise, T_1 and S_1 levels of the polymer may be measured from their fluorescence and phosphorescence spectra. Measurement techniques are known to the skilled person as described in, for example, Y.V. Romaovskii *et al*, *Physical Review Letters*, 2000, 85 (5), p1027 and A. van Dijken *et al*, *Journal of the American Chemical Society*, 2004, 126, p7718. Additionally or alternatively, triplet energy levels of numerous materials suitable for use as the triplet quenching unit can be found in *Handbook of Photochemistry*, 2nd Edition, Steven L Murov, Ian Carmichael and Gordon L Hug.

Polymer synthesis

Preferred methods for preparation of the polymer include metal insertion polymerisations wherein the metal atom of a metal complex catalyst is inserted between an aryl or heteroaryl group and a leaving group of a monomer in order to form the desired repeat unit. Exemplary metal insertion methods are Suzuki polymerisation as described in, for example, WO 00/53656 and Yamamoto polymerisation as described in, for example, T. Yamamoto, "Electrically Conducting And Thermally Stable π - Conjugated Poly(arylene)s Prepared by Organometallic Processes", *Progress in Polymer Science* 1993, 17, 1153-1205. In the case of Yamamoto polymerisation, a nickel complex catalyst is used; in the case of Suzuki polymerisation, a palladium complex catalyst is used.

For example, in the synthesis of a linear polymer by Yamamoto polymerisation, a monomer having two reactive halogen groups is used. Similarly, according to the method of Suzuki polymerisation, at least one reactive group is a boron derivative group such as a boronic acid or boronic ester and the other reactive group is a halogen. Preferred halogens are chlorine, bromine and iodine, most preferably bromine.

It will therefore be appreciated that repeat units illustrated throughout this application may be derived from a monomer carrying suitable leaving groups. Likewise, an end group or side group may be bound to the polymer by reaction of a suitable leaving group.

Suzuki polymerisation may be used to prepare regioregular, block and random copolymers. In particular, homopolymers or random copolymers may be prepared when one reactive group is a halogen and the other reactive group is a boron derivative group. Alternatively, block or regioregular copolymers may be prepared when both reactive groups of a first monomer are boron and both reactive groups of a second monomer are halogen.

As alternatives to halides, other leaving groups capable of participating in metal insertion include groups include sulfonic acids and sulfonic acid esters such as tosylate, mesylate and triflate.

Polymer tuning

The proportion of non-conjugating repeat units, conjugating repeat units and further repeat units may be selected in order to tune one or more properties of the polymer including such as colour of emission or singlet or triplet excited state energy level. On the other hand, it is preferable to keep the conductivity of the polymer as high as possible. Preferably, photoluminescent efficiency of the polymer is at least 50%, preferably at least 70%, of a corresponding polymer in which the triplet quenching, non-conjugating repeat unit is absent.

Hole injection layers

A conductive hole injection layer, which may be formed from a conductive organic or inorganic material, may be provided between the anode 2 and the light-emitting layer

3 to assist hole injection from the anode into the layer or layers of semiconducting polymer. Examples of doped organic hole injection materials include optionally substituted, doped poly(ethylene dioxythiophene) (PEDT), in particular PEDT doped with a charge-balancing polyacid such as polystyrene sulfonate (PSS) as disclosed in EP 0901176 and EP 0947123, polyacrylic acid or a fluorinated sulfonic acid, for example Nafion®; polyaniline as disclosed in US 5723873 and US 5798170; and optionally substituted polythiophene or poly(thienothiophene). Examples of conductive inorganic materials include transition metal oxides such as VOx MoOx and RuOx as disclosed in Journal of Physics D: Applied Physics (1996), 29(11), 2750-2753.

Charge transporting layers

A hole transporting layer may be provided between the anode and the light-emitting layer. Likewise, an electron transporting layer may be provided between the cathode and the light-emitting layer.

Similarly, an electron blocking layer may be provided between the anode and the light-emitting layer and a hole blocking layer may be provided between the cathode and the light-emitting layer. Transporting and blocking layers may be used in combination. Depending on its HOMO and LUMO levels, a single layer may both transport one of holes and electrons and block the other of holes and electrons.

If present, a hole transporting layer located between anode 2 and light-emitting layer 3 preferably has a HOMO level of less than or equal to 5.5 eV, more preferably around 4.8-5.5 eV. HOMO levels may be measured by cyclic voltammetry, for example.

If present, an electron transporting layer located between light-emitting layer 3 and cathode 4 preferably has a LUMO level of around 3-3.5 eV. For example, a layer of a silicon monoxide or silicon dioxide or other thin dielectric layer having thickness in the range of 0.2-2nm is provided between light-emitting layer 3 and layer 4.

A hole transporting layer may contain a polymer comprising hole transporting repeat units of formula (V); likewise, an electron transporting layer may contain a polymer comprising electron transporting repeat units of formula (IV).

Cathode

Cathode 4 is selected from materials that have a *workfunction* allowing injection of *electrons into the light-emitting layer*. Other factors influence the selection of the cathode such as the possibility of adverse interactions between the cathode and the *light-emitting material*. The cathode may consist of a *single material such as a layer of aluminium*. Alternatively, it may comprise a plurality of metals, for example a bilayer of a low workfunction material and a high workfunction material such as calcium and aluminium as disclosed in WO 98/10621; elemental barium as disclosed in WO 98/57381, *Appl. Phys. Lett.* 2002, 81(4), 634 and WO 02/84759; or a thin layer of *metal compound*, in particular an oxide or fluoride of an alkali or alkali earth metal, to assist electron injection, for example lithium fluoride as disclosed in WO 00/48258; barium fluoride as disclosed in *Appl. Phys. Lett.* 2001, 79(5), 2001; and barium oxide. In order to provide efficient injection of electrons into the device, the cathode preferably has a workfunction of less than 3.5 eV, more preferably less than 3.2 eV, most preferably less than 3 eV. Work functions of metals can be found in, for example, Michaelson, *J. Appl. Phys.* 48(11), 4729, 1977.

The cathode may be opaque or transparent. Transparent cathodes are particularly advantageous for active matrix devices because *emission through a transparent anode* in such devices is at least partially blocked by drive circuitry located underneath the emissive pixels. A transparent cathode comprises a layer of an electron injecting material that is sufficiently thin to be transparent. Typically, the lateral conductivity of this layer will be low as a result of its thinness. In this case, the layer of electron injecting material is used in combination with a thicker layer of transparent conducting material such as indium tin oxide.

It will be appreciated that a transparent cathode device need not have a transparent anode (unless, of course, a fully transparent device is desired), and so the transparent anode used for bottom-emitting devices may be replaced or supplemented with a layer of reflective material such as a layer of aluminium. Examples of transparent cathode devices are disclosed in, for example, GB 2348316.

Encapsulation

Organic optoelectronic devices tend to be sensitive to moisture and oxygen. Accordingly, the substrate preferably has good barrier properties for prevention of ingress of moisture and oxygen into the device. The substrate is commonly glass,

however alternative substrates may be used, in particular where flexibility of the device is desirable. For example, the substrate may comprise a plastic as in US 6268695 which discloses a substrate of alternating plastic and barrier layers or a laminate of thin glass and plastic as disclosed in EP 0949850.

The device may be encapsulated with an encapsulant (not shown) to prevent ingress of moisture and oxygen. Suitable encapsulants include a sheet of glass, films having suitable barrier properties such as silicon dioxide, silicon monoxide, silicon nitride or alternating stacks of polymer and dielectric as disclosed in, for example, WO 01/81649 or an airtight container as disclosed in, for example, WO 01/19142. In the case of a transparent cathode device, a transparent encapsulating layer such as silicon monoxide or silicon dioxide may be deposited to micron levels of thickness, although in one preferred embodiment the thickness of such a layer is in the range of 20-300 nm. A getter material for absorption of any atmospheric moisture and / or oxygen that may permeate through the substrate or encapsulant may be disposed between the substrate and the encapsulant.

Solution processing

Suitable solvents for forming compositions of the polymer for solution processing include many common organic solvents, such as mono- or poly-alkylbenzenes such as toluene and xylene.

Particularly preferred solution deposition techniques including printing and coating techniques such spin-coating and inkjet printing.

Spin-coating is particularly suitable for devices wherein patterning of the electroluminescent material is unnecessary – for example for lighting applications or simple monochrome segmented displays.

Inkjet printing is particularly suitable for high information content displays, in particular full colour displays. A device may be inkjet printed by providing a patterned layer over the first electrode and defining wells for printing of one colour (in the case of a monochrome device) or multiple colours (in the case of a multicolour, in particular full colour device). The patterned layer is typically a layer of photoresist that is patterned to define wells as described in, for example, EP 0880303.

As an alternative to wells, the ink may be printed into channels defined within a patterned layer. In particular, the photoresist may be patterned to form channels which, unlike wells, extend over a plurality of pixels and which may be closed or open at the channel ends.

Other solution deposition techniques include dip-coating, roll printing and screen printing.

Comparative Example 1 – Effect of non-conjugating units on OLED lifetime

Figure 3 is a plot of luminance against time for an OLED having the following structure:

ITO / HIL / HTL / LEP / MF / Al

Wherein ITO is indium tin oxide; HIL is a layer of hole injection material available from Plextronics Inc; HTL is a hole transporting polymer comprising fluorene repeat units and amine repeat units as described above.

LEP is a light-emitting polymer (Polymer A) comprising fluorene repeat units and less than 5 mol % amine repeat units as described above.

and the cathode is a bilayer cathode formed from a layer of metal fluoride (MF) and a layer of aluminium.

Polymer A contains no non-conjugating repeat unit (other than the small percentage of the amine emissive unit). Corresponding polymers B and C were prepared comprising 5 and 15 mol % respectively of the following non-conjugating repeat unit:

The CIE (y) value for polymers A, B and C are 0.161, 0.161 and 0.148 respectively, illustrating the blue-shifting effect of reducing conjugation in the polymer by introduction of non-conjugating units. However, with reference to Figure 3, it can be seen that lifetime decreases with increasing concentration of the non-conjugating repeat unit.

Comparative Example 2 – Effect of non-conjugating units on triplet exciton density

Triplet densities were measured for polymers A and C, which have different quantities of non-conjugating repeat units as discussed above.

It can be seen from the Figure 4 that triplet density is much higher for the device of polymer C, which contains non-conjugating repeat units, indicating that the non-conjugating repeat units cause a build-up of triplet excitons.

Comparative Example 3 – Effect of blending a triplet-quenching material with a polymer comprising non-conjugating repeat units

Figure 5 illustrates delayed fluorescence from a device containing polymer A (which contains no non-conjugating repeat unit other than the small percentage of the amine emissive unit), polymer C (which contains 15 mol% of a non-conjugating repeat unit) and polymer C blended with a triplet quenching material.

The intensity of delayed fluorescence from an OLED may be correlated to the triplet density of that OLED because delayed fluorescence arises from triplet-triplet annihilation. It can be seen from Figure 5 that introduction of non-conjugating repeat units into polymer A in order to form polymer C results in a significant increase in delayed fluorescence. Moreover, blending a triplet quenching material with polymer C has little effect on intensity of delayed fluorescence, indicating that blending a triplet quenching material with a polymer comprising non-conjugating units has little effect on triplet density.

Figure 6 illustrates measurement of delayed fluorescence with a de-trapping pulse to release any trapped charge. Figure 6 is very similar to Figure 5, indicating that the delayed fluorescence illustrated in Figure 5 is not due to recombination of de-trapped charge but is in fact due to triplet-triplet annihilation.


Example 1

An OLED was prepared as described above in Comparative Example 1, except that 15 mol % of a non-conjugating, triplet quenching repeat unit was incorporated into the polymer.

Although the present invention has been described in terms of specific exemplary embodiments, it will be appreciated that various modifications, alterations and/or combinations of features disclosed herein will be apparent to those skilled in the art without departing from the scope of the invention as set forth in the following claims.

Claims


- 1) A light-emitting composition including a fluorescent light-emitting material and comprising a polymer comprising a conjugating repeat unit and a non-conjugating repeat unit in a backbone of the polymer, wherein:
- the conjugating repeat unit provides at least one conjugation path between repeat units linked thereto;
- the non-conjugating repeat unit reduces conjugation of the polymer as compared to a polymer in which the non-conjugating repeat unit is absent; and
- a triplet excited state energy level of the light-emitting material is higher than a triplet excited state energy level of the non-conjugating repeat unit.
- 2) A light-emitting composition according to claim 1 wherein the non-conjugating repeat unit does not provide any conjugation path between repeat units linked thereto.
- 3) A light-emitting composition according to claim 1 or 2 wherein the fluorescent light-emitting material is a repeat unit of the polymer.
- 4) A light-emitting composition according to claim 3 wherein the fluorescent light-emitting repeat unit of the polymer comprises a repeat unit of formula (V):

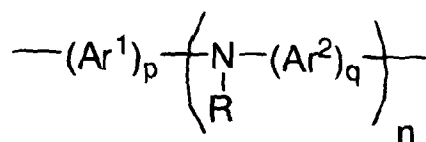

(V)

wherein Ar^1 and Ar^2 in each occurrence are independently selected from optionally substituted aryl or heteroaryl, n is greater than or equal to 1, preferably 1 or 2, R is H or a substituent, preferably a substituent, p and q are each independently 1, 2 or 3, and any aryl or heteroaryl groups of the repeat unit of formula (V) may be linked to one another by a direct bond or a divalent group.

- 5) A light-emitting composition according to claim 4 wherein R is $-(Ar^3)_r$ wherein each Ar^3 independently represents an optionally substituted aryl or heteroaryl group and r is at least 1.
- 6) A light-emitting composition according to any preceding claim wherein the non-conjugating repeat unit is linked to adjacent repeat units such that that there is no conjugating path of alternating saturated and unsaturated bonds between the adjacent repeat units.
- 7) A light-emitting composition according to claim 6 wherein the non-conjugating repeat unit comprises at least one sp^3 hybridised carbon atom in at least one path between the repeat units that the non-conjugating repeat unit is linked to.
- 8) A light-emitting composition according to any preceding claim wherein the non-conjugating repeat unit is twisted out of the plane of at least one adjacent repeat unit.
- 9) A light-emitting composition according to any preceding claim wherein the conjugating repeat unit comprises an optionally substituted arylene repeat unit.
- 10) A light-emitting composition according to claim 9 wherein the conjugating repeat unit comprises a repeat unit of formula (IV):



(IV)

wherein R^1 and R^2 are independently H or a substituent and wherein R^1 and R^2 may be linked to form a ring.

- 11) A light-emitting composition according to any preceding claim wherein the non-conjugating repeat unit does not comprise perylene.
- 12) A light-emitting composition according to any preceding claim wherein the non-conjugating repeat unit comprises the fluorescent light-emitting material.

- 13) A light-emitting composition according to claim 12 wherein the fluorescent light-emitting material comprises a repeat unit according to claim 3 and wherein R comprises a triplet-quenching group.
- 14) A light-emitting composition according to any preceding claim wherein the non-conjugating repeat units comprise at least 5 mol%, preferably at least 10 mol%, of the total number of repeat units in the polymer.
- 15) A light-emitting composition according to any preceding claim wherein the polymer comprises at least two different conjugating repeat units.
- 16) A light-emitting composition according to any preceding claim wherein the polymer comprises at least two different non-conjugating repeat units.
- 17) An organic light-emitting device comprising an anode, a cathode and a light-emitting layer between the anode and the cathode wherein the light-emitting layer comprises a light-emitting composition according to any preceding claim.
- 18) A method of forming a light-emitting composition according to any of claims 1-16 comprising the steps of polymerising a polymerisation mixture comprising a monomer comprising a conjugating unit and a monomer comprising a non-conjugating unit.
- 19) A method according to claim 18 wherein the polymerisation mixture comprises a monomer comprising a light-emitting unit.
- 20) A method according to claim 18 or 19 wherein the polymerisation is a metal insertion polymerisation wherein each monomer comprises at least two leaving groups capable of participating in the metal insertion polymerisation.
- 21) A method according to claim 20 wherein each leaving group is independently selected from halogen, preferably bromine or iodine; a boronic acid or an ester thereof; and a sulfonic acid or a derivative thereof.
- 22) Use of a non-conjugating, triplet quenching repeat unit in a polymer to quench triplet excitons in a light-emitting composition and to reduce conjugation of the polymer as compared to a polymer in which the non-conjugating repeat unit is absent, the light-emitting composition including a fluorescent light-emitting material and comprising a polymer comprising a conjugating repeat

unit and the non-conjugating, triplet quenching repeat unit in a backbone of the polymer, wherein:

the conjugating repeat unit provides at least one conjugation path between repeat units linked thereto; and

a triplet excited state energy level of the light-emitting material is higher than a triplet excited state energy level of the non-conjugating, triplet quenching repeat unit.

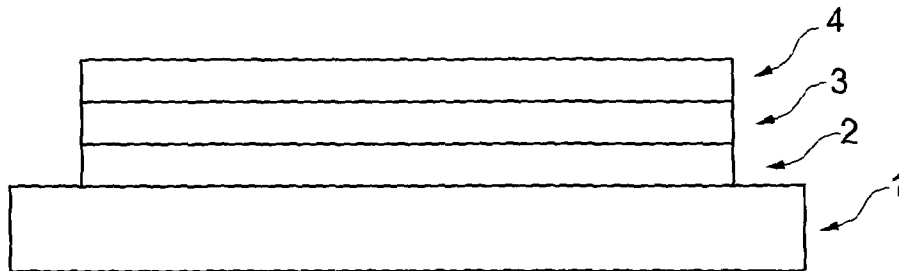


Fig. 1

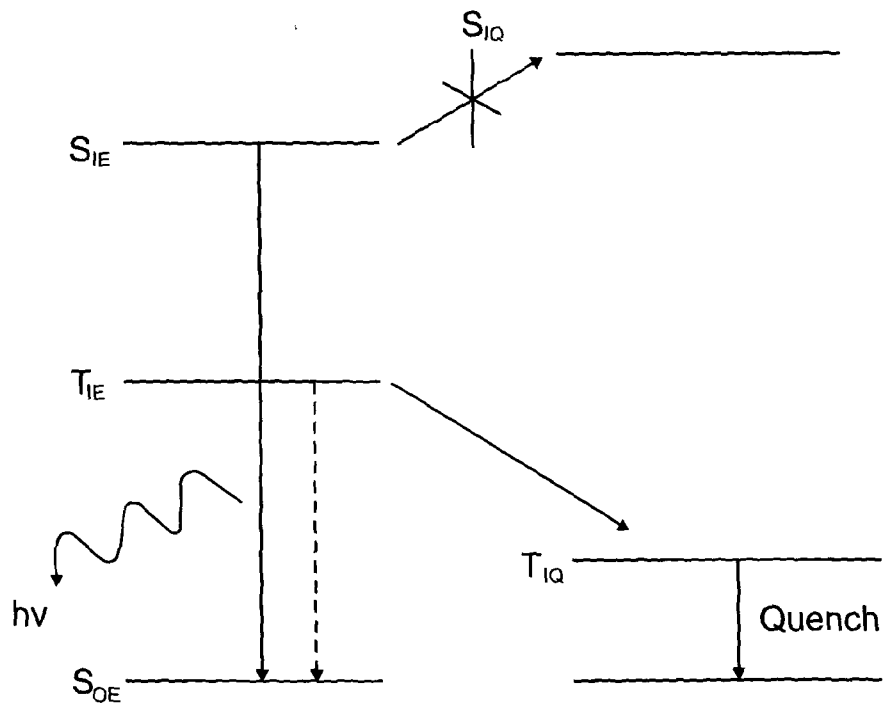


Fig. 2

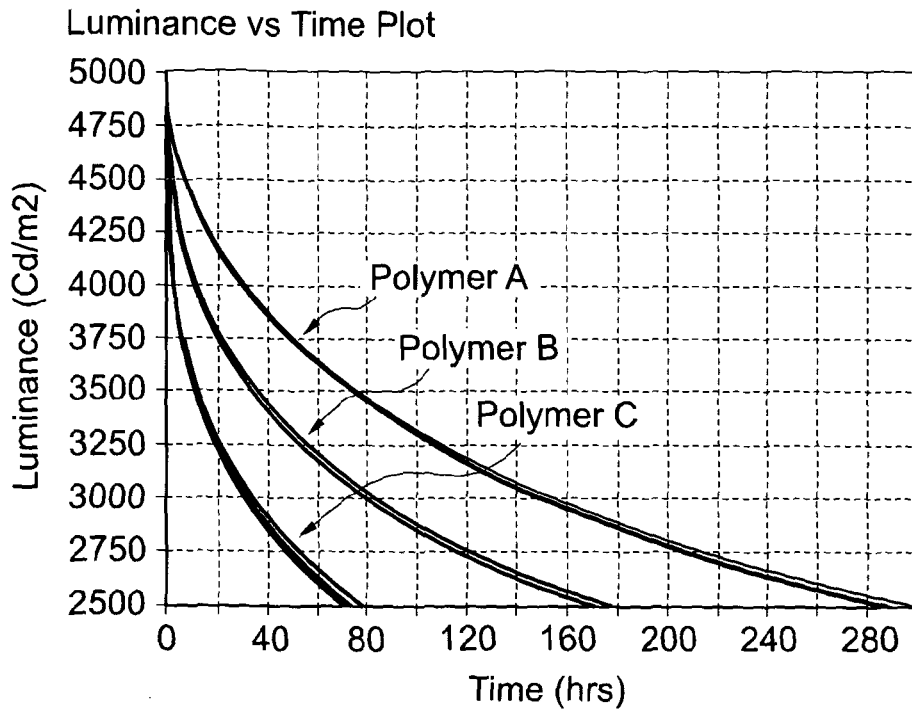


Fig. 3

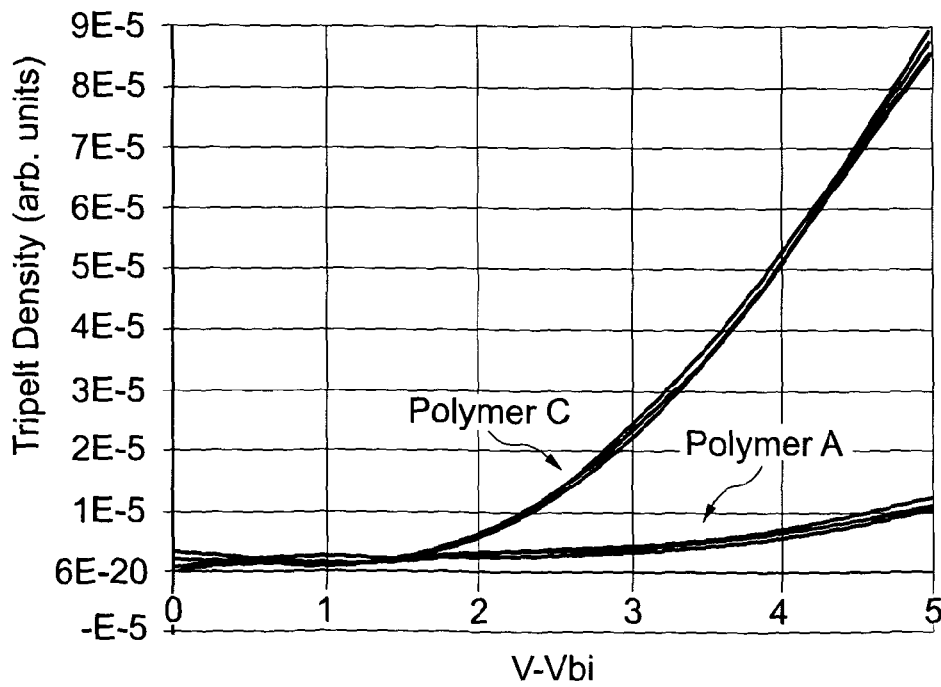


Fig. 4

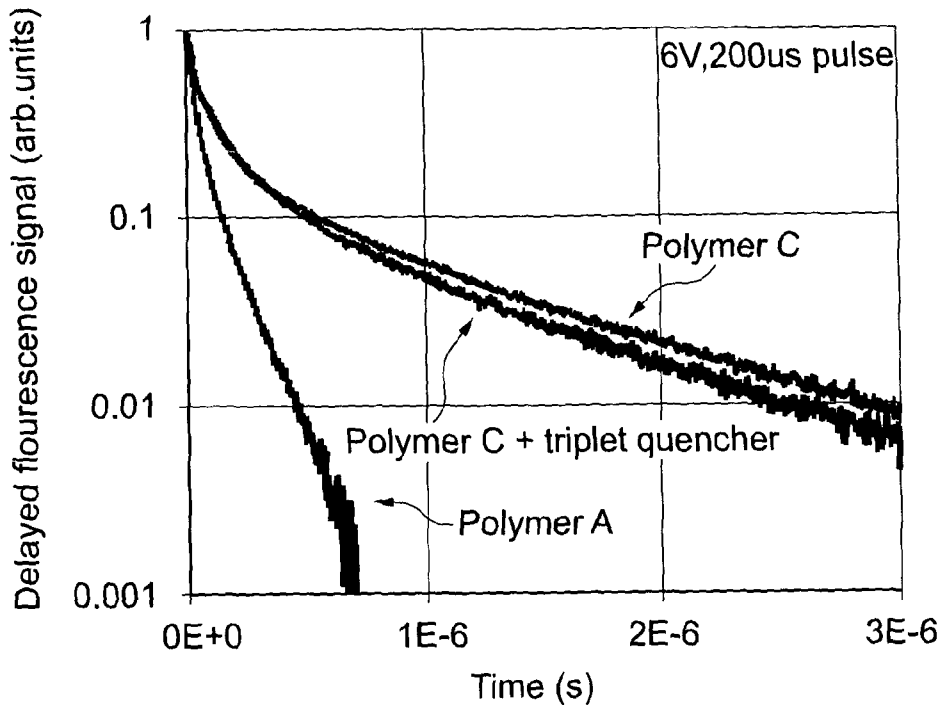


Fig. 5

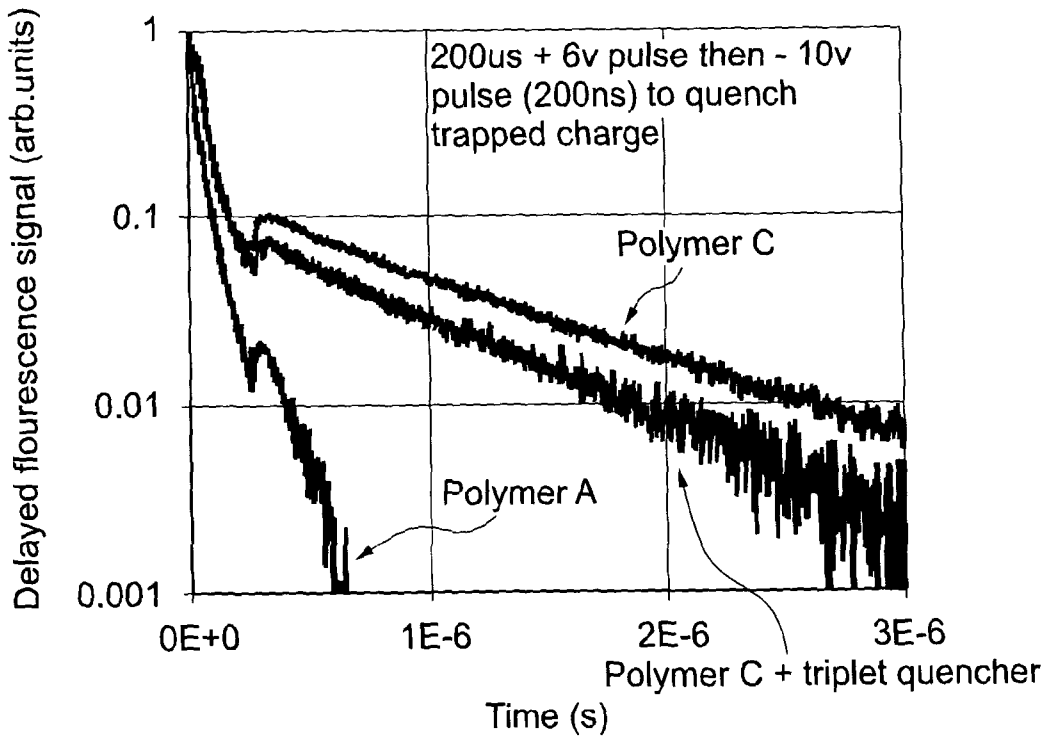


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2011/001480

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C09K11/06 H05B33/14 H05B33/20 H01L51/50 H01L51/00
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 C09K H05B H01L
 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007/244295 A1 (FUJITA TETSUJI [JP]) 18 October 2007 (2007-10-18) Formula 12; paragraph [0137]	1-22
X	----- BECKER S ET AL: "Optimisation of polyfluorenes for light emitting applications", SYNTHETIC METALS, ELSEVIER SEQUOIA, LAUSANNE, CH, vol. 125, 1 January 2002 (2002-01-01), pages 73-80, XP002589748, ISSN: 0379-6779	1-3,6,7
A	compound 23	4
X	----- EP 2 110 399 A1 (SUMITOMO CHEMICAL CO [JP]) 21 October 2009 (2009-10-21) polymer p1 to p4	1-22
	----- -/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 4 January 2012	Date of mailing of the international search report 11/01/2012
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Ziegler, Jan
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2011/001480

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 281 745 A1 (SUMITOMO CHEMICAL CO [JP]) 5 February 2003 (2003-02-05) paragraph [0171] -----	1-22
X,P	WO 2010/119276 A1 (CAMBRIDGE DISPLAY TECH [GB]; SUMITOMO CHEMICAL CO [JP]; PILLOW JONATHA) 21 October 2010 (2010-10-21) claims 1-31 -----	1-22
X	WO 2007/072741 A1 (CANON KK [JP]; OKINAKA KEIJI [JP]; YAMADA NAOKI [JP]; IGAWA SATOSHI [J]) 28 June 2007 (2007-06-28) claim 5 -----	1-22
A	EGO C ET AL: "Attaching perylene dyes to polyfluorene: three simple, efficient methods for facile color tuning of light-emitting polymers", JOURNAL OF THE AMERICAN CHEMICAL SOCIETY, AMERICAN CHEMICAL SOCIETY, WASHINGTON, DC; US, vol. 125, no. 2, 1 January 2003 (2003-01-01), pages 473-443, XP002589749, ISSN: 0002-7863 figure 2 schemes 3, 4 -----	1-22
X	KLÄRNER G ET AL: "Exciton migration and trapping in copolymers based on dialylfluorenes", ADVANCED MATERIALS, WILEY VCH VERLAG, DE, vol. 11, no. 2, 1 January 1999 (1999-01-01), pages 115-119, XP002589750, ISSN: 0935-9648 scheme 1 -----	1-22
A	LEE J-I ET AL: "Color tuning in polyfluorenes by copolymerization with low band gap comonomers", SYNTHETIC METALS, ELSEVIER SEQUOIA, LAUSANNE, CH, vol. 102, 1 January 1999 (1999-01-01), pages 1087-1088, XP002589751, ISSN: 0379-6779 the whole document -----	1-22
A	EP 1 310 539 A1 (SUMITOMO CHEMICAL CO [JP]) 14 May 2003 (2003-05-14) compound polymer P1 to P4 -----	1-22
	-/--	

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2011/001480

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00/55927 A1 (CAMBRIDGE DISPLAY TECH [GB]; TOWNS CARL ROBERT [GB]; DELL RICHARD O [G] 21 September 2000 (2000-09-21) cited in the application compound XXXV	1
A	----- US 2009/066238 A1 (CHEN SHOW-AN [TW] ET AL) 12 March 2009 (2009-03-12) paragraph [0052] -----	1,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2011/001480

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2007244295	A1	18-10-2007	CN 101054515 A	17-10-2007
			JP 4211799 B2	21-01-2009
			JP 2007284491 A	01-11-2007
			KR 20070101772 A	17-10-2007
			TW 200808938 A	16-02-2008
			US 2007244295 A1	18-10-2007

EP 2110399	A1	21-10-2009	CN 101600752 A	09-12-2009
			EP 2110399 A1	21-10-2009
			JP 2008189759 A	21-08-2008
			KR 20090122914 A	01-12-2009
			US 2010090206 A1	15-04-2010
			WO 2008093821 A1	07-08-2008

EP 1281745	A1	05-02-2003	DE 60201231 D1	21-10-2004
			DE 60201231 T2	17-11-2005
			EP 1281745 A1	05-02-2003
			JP 4341212 B2	07-10-2009
			JP 2003155476 A	30-05-2003
			KR 20030011640 A	11-02-2003
			SG 94878 A1	18-03-2003
			TW 586332 B	01-05-2004
			US 2003064247 A1	03-04-2003

WO 2010119276	A1	21-10-2010	GB 2471062 A	22-12-2010
			WO 2010119276 A1	21-10-2010

WO 2007072741	A1	28-06-2007	EP 1866985 A1	19-12-2007
			JP 2007318063 A	06-12-2007
			KR 20080080383 A	03-09-2008
			KR 20100082026 A	15-07-2010
			US 2009066227 A1	12-03-2009
			WO 2007072741 A1	28-06-2007

EP 1310539	A1	14-05-2003	DE 60203235 D1	21-04-2005
			DE 60203235 T2	09-02-2006
			EP 1310539 A1	14-05-2003
			KR 20030038453 A	16-05-2003
			SG 112858 A1	28-07-2005
			TW 1249542 B	21-02-2006
			US 2003165713 A1	04-09-2003

WO 0055927	A1	21-09-2000	AU 3177700 A	04-10-2000
			CA 2367388 A1	21-09-2000
			CN 1347572 A	01-05-2002
			EP 1169741 A1	09-01-2002
			EP 2262026 A2	15-12-2010
			EP 2262027 A2	15-12-2010
			EP 2262028 A2	15-12-2010
			EP 2262029 A2	15-12-2010
			EP 2267813 A1	29-12-2010
			JP 4570253 B2	27-10-2010
			JP 2002539292 A	19-11-2002
			JP 2009091591 A	30-04-2009
			SG 129261 A1	26-02-2007
			US 6861502 B1	01-03-2005
			WO 0055927 A1	21-09-2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2011/001480

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009066238 A1	12-03-2009	TW 200911958 A US 2009066238 A1	16-03-2009 12-03-2009
