



(22) **Date de dépôt/Filing Date:** 2014/05/26

(41) **Mise à la disp. pub./Open to Public Insp.:** 2014/12/25

(45) **Date de délivrance/Issue Date:** 2016/08/30

(30) **Priorités/Priorities:** 2013/06/25 (US13/926,646);
2014/04/30 (US14/265,946)

(51) **Cl.Int./Int.Cl.** *B64F 5/00* (2006.01),
E04G 1/18 (2006.01), *F16M 11/24* (2006.01)


(72) **Inventeurs/Inventors:**
LARSON, KIM MARIE, US;
ENG, RAYMOND CHO, US;
MUNK, CLAYTON LYNN, US;
DAY, DAN DRESSKELL, US;
DAVIS, GORDON DALE, US

(73) **Propriétaire/Owner:**
THE BOEING COMPANY, US

(74) **Agent:** SMART & BIGGAR

(54) **Titre : SYSTÈME DE MONTANT MODULAIRE**

(54) **Title: MODULAR STANCHION SYSTEM**

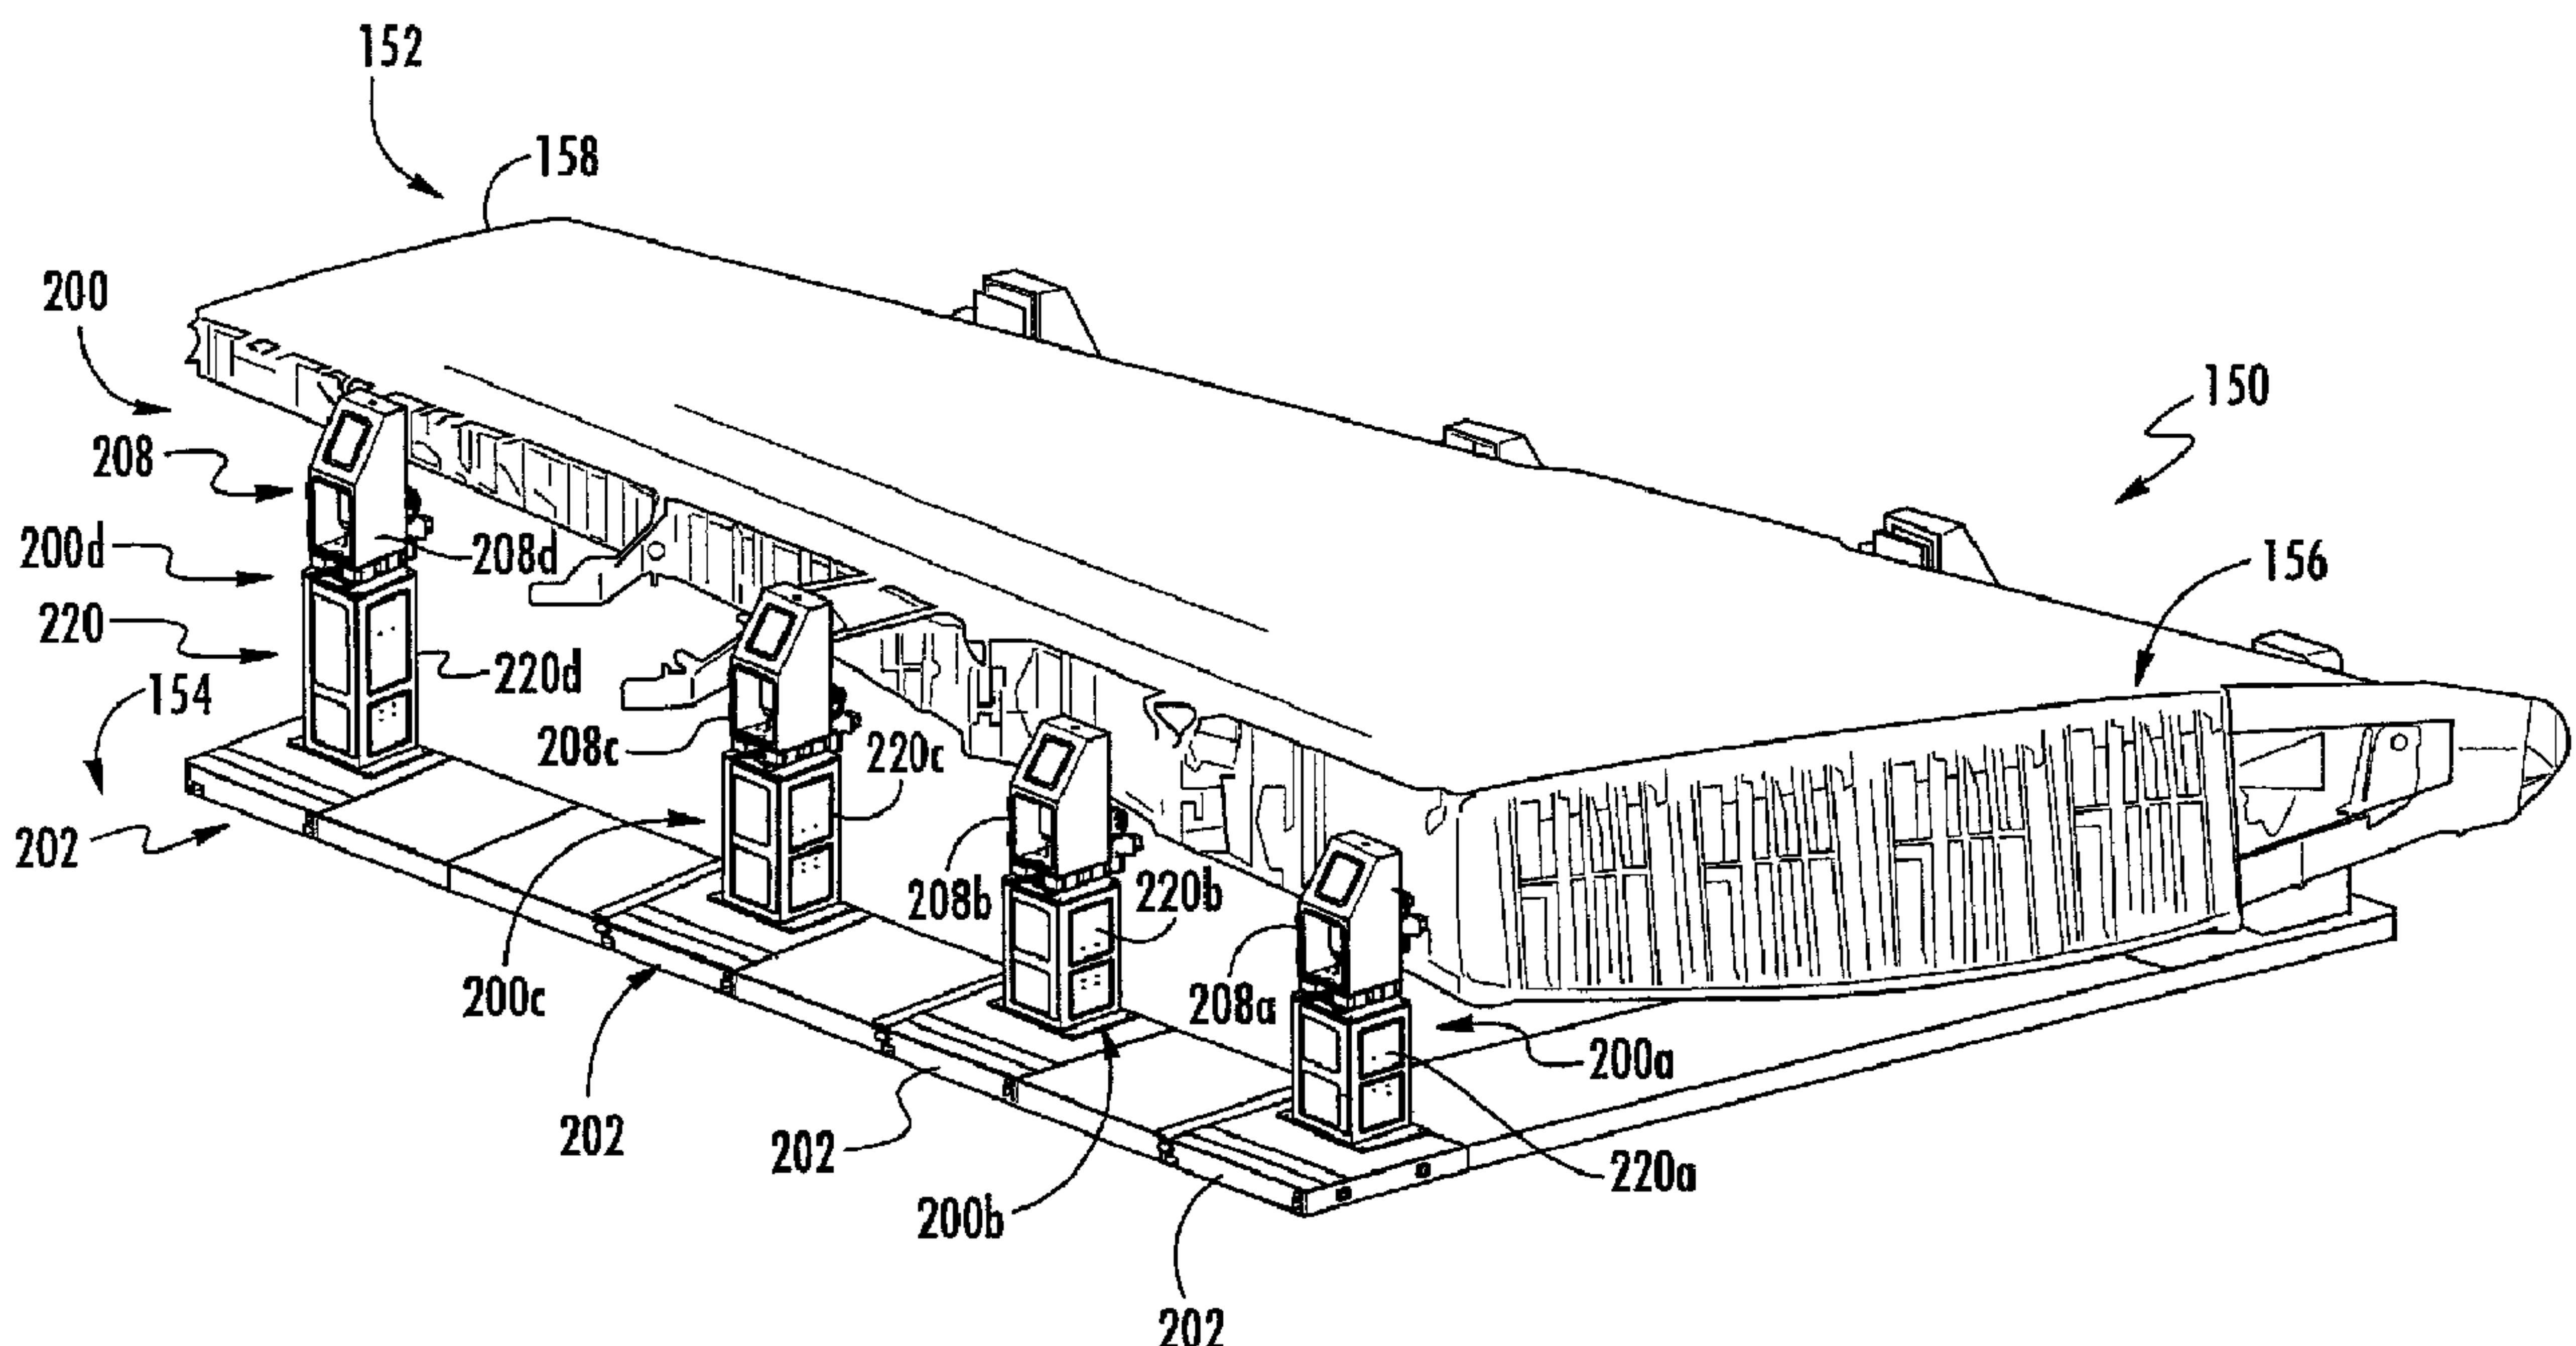

(57) **Abstrégé/Abstract:**

An apparatus for supporting a wing assembly at a wing assembly support height. Base sections are provided, each having a different predetermined height with respect to one another. A movable platform carries a plurality of base sections, and a plurality of wing assembly support sections rest on base sections and include wing assembly connectors, which are movable in a first plane and a second plane generally perpendicular relative to the first plane. A differential height is defined between the wing assembly support height and the combined heights of the platform and the height of wing assembly connector, relative to the bottom of the wing assembly support section. At least one of the base sections is of a predetermined height approximating the differential height and is carried on the platform. The wing assembly support section is carried on such base section.

ABSTRACT

An apparatus for supporting a wing assembly at a wing assembly support height. Base sections are provided, each having a different predetermined height with respect to one another. A movable platform carries a plurality of base sections, and a plurality of wing assembly support sections rest on base sections and include wing assembly connectors, which are movable in a first plane and a second plane generally perpendicular relative to the first plane. A differential height is defined between the wing assembly support height and the combined heights of the platform and the height of wing assembly connector, relative to the bottom of the wing assembly support section. At least one of the base sections is of a predetermined height approximating the differential height and is carried on the platform. The wing assembly support section is carried on such base section.

MODULAR STANCHION SYSTEM

5 FIELD

The present disclosure relates generally to configurations, systems, and methods for supporting relatively large, elongated structures. More specifically, certain aspects of the disclosure relate to configurations, systems, and methods for manufacturing, maintenance, inspection, testing, and evaluation of aircraft wing assemblies, wherein stanchions of readily
10 variable heights may be employed.

BACKGROUND

In the manufacture of elongated components, and in particular aircraft wings, support stands (also referred to as stanchions) of differing heights may be required. This may be the
15 case with aircraft wings in particular, wherein the thickness of an aircraft wing may change considerably, moving from the root of the wing (where the wing attaches to an aircraft fuselage) to the tip of such wing. To adequately support the wing, multiple stanchions are typically used along the length of both sides of the wing. These stanchions may be required to each be of a custom height in order to support a particular location of a specific model of wing,
20 depending on a number of factors, including, without limitation, the weight to be supported, the design tolerances, the type and amount of work and/or inspection to be done, etc. Further, support stands or stanchions may be required which, in addition to support, can provide proper alignment of an elongated component during assembly or transport. In some cases, it may be required that a support stand function as a jig in addition to support functions. Additionally,
25 operability within a range of alignment configurations may be required. Given the variety of wing models which may require manufacture, maintenance, inspection, testing, evaluation, etc., the construction of stanchions that are custom-made for each of the various wing models and/or configurations can be expensive, labor intensive, and can adversely bear on productions schedules.

Further, transport of elongated components, such as aircraft wings, may require adjustment of the height of support stands in order to compensate for changing terrain conditions beneath the stanchions. For example, movement of an elongated component across a workshop or assembly operation floor can result in load shifting during movement across uneven or unlevelled floor surfaces. Load shifting of this type may, in some cases, adversely affect structural integrity of elongated components. Distribution and/or re-distribution of changing loads along the elongated structure during transit may be required, in some cases involving measurement and height/load adjustment during transit. Moreover, in some cases, transport of elongated components may require positioning and/or repositioning of the support stands along one or more axes of rotation or along one or more planes in order to compensate for deviations from predetermined positions which are desired for certain assembly operations and which, in some cases, may not be associated with load shifting.

Further limitations and disadvantages of conventional and traditional approaches to the support of wings and other elongated structures may become apparent to one of skill in the art, through comparison of such systems with the teachings and examples set forth in the present disclosure.

SUMMARY

It would be desirable to provide systems, methods, and apparatuses that address the issues discussed above, as well as other potential issues, and also to provide a modular stanchion system which is readily reconfigurable for production systems of a variety of aircraft wing models. Moreover, it would be beneficial to provide configurations, systems, and methods for supporting aircraft wings and/or other elongated structures during manufacturing, maintenance, inspection, testing, and/or evaluation through use of stanchions of readily adaptable heights. Additionally, it would be beneficial to provide configurations, systems, and methods for providing proper alignment of an aircraft wing and/or other elongated structure during such operations through use of stanchions of readily adaptable heights.

Briefly, an example implementation of a modular stanchion system as disclosed herein may include a predetermined or preselected height upper section having an actuation system,

controls and a movable slide table together with one or more lower base sections of preselected heights. This arrangement allows for quickly configurable and/or reconfigurable stanchions for a variety of aircraft wing models or other elongated structures, in that the overall stanchion height can be changed by replacing the lower base with another lower base of a different height. Wing attachments for connecting the stanchion system to the wing can be varied as necessary or desired by attaching an arm to the slide table on the upper section. A modular movable platform may be provided that is also of a predetermined size and/or height for use in connection with one or more other such modular movable platforms for supporting the stanchions. Further example implementations of a modular stanchion system as disclosed herein may comprise load cells connected thereto, with each load cell automatically determining the load placed on one arm. Multiple load cells can be placed in communication with a control system capable of coordinating the operation of load cells and to provide height adjustments to arms on the upper sections of the stanchions.

Accordingly, configurations, systems, and method are disclosed for facilitating such support of wings and/or other large elongated structures substantially as shown in and/or described in connection with at least one of the figures, and as set forth more completely in the claims.

Examples of the present disclosure are generally directed to a method and apparatus for supporting one or more wings or other elongated structures. In one example implementation, a system, or apparatus, is disclosed for supporting a wing assembly at a wing assembly support height relative to a support surface, the apparatus comprising at least one movable platform having a first height and a plurality of base sections, each having a different predetermined height with respect to one another. A plurality of wing assembly support sections are provided, and a wing assembly connector is connected to each of the plurality of wing assembly support sections. At least wing one assembly connector is configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane. Each wing assembly support section defines a bottom, and the wing assembly connector is at a second height from the bottom. The movable platform and at least one wing assembly connector are configured such that the aggregate of the first height and the second height is less than the wing assembly

support height and such that the difference between the aggregate of the first height and the second height and the wing assembly support height defines a differential height. At least one of the base sections is of a predetermined height approximating the differential height and is carried on the movable platform. And, the wing assembly support section is carried on the at least one of the multiple base sections being of a predetermined height approximating the differential height. At least two of the wing assembly connectors each include an arm, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface. At least two of the wing assembly connectors each have a load cell connected thereto, wherein each load cell automatically determines load placed on one arm. Such example implementation may include arms which are movable in a third plane that is generally parallel to the first plane and generally perpendicular to the second plane.

Another example implementation may include an elevator device connected to each of the at least two wing assembly connectors, the elevator devices being operable to automatically move the arms in the second plane. Such an example implementation may further comprise a control system in communication with at least two load cells and at least two metrology devices and coordinating the operation of the load cells and/or the metrology devices. Further, the control system may be operable to automatically operate the elevator devices to move the arms in one or more planes in a manner which serves to distribute or re-distribute load on the at least two arms and/or to establish or reestablish a jugged position.

A further example implementation may include multiple, or a plurality of, movable platforms including at least one clamp mechanism that selectively joins the plurality of movable platforms to one another. Each of the plurality of movable platforms may include a first side and a second side generally opposite the first side, and at least one first clamp mechanism may be provided on the first side of each of the plurality of movable platforms, and at least one second clamp mechanism may be provided on the second side of each of the plurality of movable platforms, wherein, the first clamping mechanism and the second clamping mechanism cooperate with one another to selectively join the plurality of movable platforms to one another. Additionally or alternately at least one male index mechanism may

be provided on the front side of each of the plurality of movable platforms, and at least one female index mechanism may be provided on the rear side of each of the plurality of movable platforms, wherein, the first index mechanism and the second index mechanism cooperate with one another to selectively register the plurality of movable platforms to one another.

5 In another example implementation, the first side and the second side each platform may define an opening and a compartment may be provided extending between the first side and the second side and communicating with the opening in each of the first side and the second side. A door may be provided pivotally attached to the movable platform for selectively allowing access to the compartment.

10 An example implementation may comprise the movable platform including a plurality of wheels that permit the movable platform to move about the support surface.

Yet another example implementation may include at least one wing assembly support section defining a compartment and at least one access door that is in communication with the compartment.

15 Still another example implementation may include at least one wing assembly support section including a movable table interposed between the at least one wing assembly support section and at least one of the base sections and the movable table being configured to allow relative generally rectilinear movement between the assembly support section and the at least one base section.

20 Moreover, an example implementation may include at least one outrigger connected to the movable platform that stabilizes the platform.

In other exemplary aspects of the disclosure, configurations, systems, and methods for supporting aircraft wings and/or other elongated structures during manufacturing, maintenance, inspection, testing, and/or evaluation through use of a stanchion including an upper section of a
25 generally predetermined, fixed height having an actuation system, controls, and a movable table in combination with a base section selected from a collection of base sections, each being of a different, predetermined height.

In another exemplary implementation of the disclosure, a method is provided for supporting a wing assembly at a wing assembly support height relative to a support surface, the

method comprising the steps of: providing at least one wing assembly; providing at least one movable platform having a first height; providing multiple base sections, each having a different predetermined height with respect to one another; providing a plurality of assembly support sections, a number of which corresponds to a number of base sections, and a wing assembly connector movable in a first plane and a second plane generally perpendicular with respect to the first plane on each of the wing assembly support sections; the wing assembly support section defining a bottom, and the wing assembly connector being at a second height from the bottom; providing each of at least two of the wing assembly connectors with load cells connected thereto, wherein each load cell automatically determines load placed on one connector; providing each of at least two of the wing assembly connectors with metrology devices connected thereto, wherein each metrology device automatically determines positional data for one connector; providing a control system in communication with the load cells and the metrology devices; aggregating the first height of the movable platform and the second height of the wing assembly connector from the bottom of the wing assembly section; determining a differential height by comparing the totaled first height and second height to the wing assembly support height; selecting one of the multiple base sections of a predetermined height approximating the differential height and positioning the selected one of the multiple base sections upon the platform; positioning the wing assembly support section on top of the selected one of the multiple base sections; and connecting the wing assembly connector to the wing assembly for supporting the wing assembly.

In another example implementation, the method further comprises providing an elevator device connected to each of the at least two wing assembly connectors, the elevator devices being operable to automatically move the arms in the second plane. The method can further comprise adjusting the wing assembly connectors along one or more planes with the elevator devices in order to distribute or re-distribute load on the connectors as measured by the load cells when, for example, moving the wing assembly across a support surface. In some implementations, the method may further comprise providing metrology data to the control system and adjusting wing assembly connectors along one or more planes with the elevator

devices in order to establish or reestablish a jugged position as measured by the metrology devices.

The number of stanchions could, in one example arrangement, be determined by the size of a wing, the weight of the wing, and the design tolerances. Because an example
5 implementation stanchion system may be of modular design, an upper section could be designed to include an actuation system, controls, and/or a moving slide table to hold the wing in the correct orientation. The lower, base section may, accordingly, be varied in height in order to support the wing as the thickness of the wing varies from the wing's root to its tip. To facilitate positioning of the stanchions, modular rolling platforms may be provided which can
10 be linked together, for example with a coupling arrangement, to allow each stanchion to move individually, or if desired, in a generally horizontal plane collectively along a floor or other support surface.

In one embodiment, there is provided an apparatus for supporting at least one wing assembly. The apparatus includes a plurality of movable platforms supported by a support
15 surface, a plurality of base sections, wherein each base section is carried by one of the moveable platforms, and a plurality of wing assembly support sections, wherein each wing assembly support section is carried by one of the base sections. The apparatus further includes a respective wing assembly connector connected to each of the plurality of wing assembly support sections by an arm and configured to be attachable to the wing assembly. At
20 least one of the wing assembly connectors is configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface.

In another embodiment, there is provided a method for supporting a wing assembly at
25 a wing assembly support height relative to a support surface. The method involves the steps of providing the at least one wing assembly, providing a plurality of movable platforms, providing a plurality of base sections each positioned on one of the movable platforms, and providing a plurality of wing assembly support sections each positioned on one of the base sections and each having a wing assembly connector movable in a first plane and a second
30 plane generally perpendicular with respect to the first plane on each of the wing assembly

support sections. The method further involves the steps of providing each of at least two of the wing assembly connectors with load cells connected thereto, wherein each of the load cells is configured to automatically determine load placed on a respective one of the at least two connectors, providing each of at least two of the wing assembly connectors with metrology devices connected thereto, wherein each of the metrology devices is configured to automatically determine positional data for a respective one of the wing assembly connectors. The method further involves the steps of providing a control system in communication with the load cells and the metrology devices, and connecting the wing assembly connectors to the at least one wing assembly for supporting the at least one wing assembly.

10 In accordance with another embodiment, there is provided an apparatus for supporting a wing assembly at a wing assembly support height relative to a support surface. The apparatus includes at least one movable platform having a first height, a plurality of base sections, each having a different predetermined height with respect to one another, and at least one wing assembly support section. The apparatus further includes a wing assembly connector connected to the at least one wing assembly support section, the wing assembly connector being configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane, and the at least one wing assembly support section defining a bottom and the wing assembly connector being at a second height from the bottom. The movable platform and the wing assembly connector are configured such that the aggregate of the first height and the second height is less than the wing assembly support height and such that the difference between the aggregate of the first height and the second height and the wing assembly support height defines a differential height. At least one of the plurality of base sections is of a predetermined height approximating the differential height, the at least one of the plurality of base sections being of a predetermined height approximating the differential height being carried on the movable platform, and the at least one wing assembly support section being carried on the at least one of the plurality of base sections being of a predetermined height approximating the differential height.

In another embodiment, there is provided a method for supporting at least one wing assembly at a wing assembly support height relative to a support surface. The method

involves the steps of providing the at least one wing assembly, and providing at least one movable platform having a first height; providing multiple base sections, each having a different predetermined height with respect to one another; and providing at least one wing assembly support section and a wing assembly connector movable in a first plane and a second plane generally perpendicular with respect to the first plane. The at least one wing assembly support section defines a bottom and the wing assembly connector is at a second height from the bottom. The method further involves aggregating the first height of the movable platform and the second height of the wing assembly connector from the bottom of the wing assembly section, and determining a differential height by comparing the aggregated first height and second height to the wing assembly support height. The method further involves selecting one of the multiple base sections of a predetermined height approximating the differential height and positioning the selected one of the multiple base sections upon the platform; positioning the at least one wing assembly support section on top of the selected one of the multiple base sections, and connecting the wing assembly connector to the at least one wing assembly for supporting the at least one wing assembly.

In another embodiment, there is provided an apparatus for supporting a wing assembly at a wing assembly support height relative to a support surface. The apparatus includes at least one movable platform having a first height, a plurality of base sections, each having a different predetermined height with respect to one another, and a plurality of wing assembly support sections, wherein each wing assembly support section corresponds to a respective one of base sections; at least one wing assembly connector connected to each of the plurality of wing assembly support sections. The at least one wing assembly connector is configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane, and each of the wing assembly support sections defines a bottom and the wing assembly connector being at a second height from the bottom. At least one of the at least one movable platform and at least one of the at least one wing assembly connector are configured such that the aggregate of the first height and the second height is less than the wing assembly support height and such that the difference between the aggregate of the first height and the second height and the wing assembly support height defines a differential height, and at least one of the plurality of base sections is of a predetermined height

approximating the differential height. The at least one of the base sections is of a predetermined height approximating the differential height being carried on the movable platform, at least one of the wing assembly support sections carried on the at least one of the plurality of base sections is of a predetermined height approximating the differential height, and at least two of the at least one wing assembly connector each includes an arm, and the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface. The at least two of the wing assembly connectors each has a respective load cell connected thereto, each load cell being configured to automatically determine the load placed on one arm, the at least two of the wing assembly connectors each having a respective metrology device connected thereto, each metrology device being configured to automatically determine positional data for one connector. The apparatus further includes a control system in communication with each load cell and each metrology device.

In another embodiment, there is provided a method for supporting at least one wing assembly at a wing assembly support height relative, to a support surface. The method involves the steps of providing the at least one wing assembly, providing at least one movable platform having a first height, providing a plurality of base sections, each having a different predetermined height with respect to one another, and providing a plurality of wing assembly support sections wherein each wing assembly support sections corresponds to a respective one of the base sections, and a respective wing assembly connector movable in a first plane and a second plane generally perpendicular with respect to the first plane on each of the wing assembly support sections. Each of the wing assembly support sections defines a bottom and each of the wing assembly connectors being at a second height from the bottom. The method further involves providing each of at least two of the wing assembly connectors with load cells connected thereto, wherein each load cell automatically determines load placed on one connector, and providing each of the at least two of the wing assembly connectors with metrology devices connected thereto, wherein each metrology device automatically determines positional data for one connector. The method further involves providing a control system in communication with the load cells and the metrology devices, aggregating the first height of the at least one movable platform and the second height of one of the wing

assembly connectors from the bottom of one of the wing assembly support sections, and determining a differential height by comparing the aggregated first height and second height to the wing assembly support height. The method further involves selecting one of the plurality of base sections of a predetermined height approximating the differential height and
5 positioning the selected one of the plurality of base sections upon the at least one movable platform, positioning the one of the wing assembly support sections on top of the selected one of the plurality of base sections, and connecting the one of the wing assembly connectors to the at least one wing assembly for supporting the at least one wing assembly.

The features, functions and advantages discussed herein may be achieved
10 independently in various examples or may be combined in yet other exemplary aspects of the disclosure, the further details of which may be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Having thus described exemplary aspects of the disclosure in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

FIG. 1 illustrates a side elevational view of an aircraft wing assembly supported by example implementations of a system of modular stanchions;

20 FIG. 2 is a perspective view of an example modular movable platform contemplated by the present disclosure;

FIG. 3 is a perspective view of an example stanchion and an example modular movable platform contemplated by the present disclosure;

FIGs. 4A and 4B are sectional views taken along lines 2 -- 2 of FIG. 3 and an example upper stanchion moving horizontally between first and second positions with respect to a base section;

FIG. 5 is a sectional view similar to FIGs. 4A and 4B illustrating an example actuator system of an upper stanchion moving between first and second positions; and

FIG. 6 is a plan view of an example stanchion and an example modular movable platform contemplated by the present disclosure;

FIG. 7 is a flow diagram of aircraft production and service methodology; and

FIG. 8 is a block diagram of an aircraft.

FIG. 9 illustrates a side elevational view of an aircraft wing assembly supported by an example apparatus for supporting a wing assembly.

DETAILED DESCRIPTION

Examples of the present disclosure will now be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all examples of the disclosure are shown. Indeed, various exemplary aspects of the disclosure may be embodied in many different forms and should not be construed as limited to the examples set forth herein. Rather, these examples are provided so that this disclosure will be thorough and complete and will fully convey the scope of the disclosure to those skilled in the art. Like reference numerals refer to like elements throughout.

As used herein, "and/or" means any one or more of the items in the list joined by "and/or." As an example, "x and/or y" means any element of the three-element set $\{(x), (y), (x, y)\}$. As another example, "x, y, and/or z" means any element of the seven-element set $\{(x), (y), (z), (x, y), (x, z), (y, z), (x, y, z)\}$. Further, as used herein, the term "exemplary" means serving as a non-limiting example, instance, or illustration. Moreover, as used herein, the term, for example, or "e.g.," introduces a list of one or more non-limiting examples, instances, or illustrations.

Generally, in one example implementation of the present disclosure, a system is provided for supporting a wing assembly at a wing assembly support height relative to a

support surface shown in FIG. 1, the subject matter described herein relates generally to a horizontal build line, generally **150**, for a relatively large, elongated structure, such as an aircraft wing assembly, or simply, “wing,” generally **152**. Modular tooling stands, or stanchions, generally **200**, can be mounted to a support surface, such as the floor, generally
5 **154**, or to modular rolling platforms, generally **202**, which facilitate support wing assembly **152**, such as in an assembly line and/or for maintenance, inspection, testing, and evaluation purposes. Platform **202** is of a predetermined height, which could be approximately **12** inches or any other suitable height. Stanchions **200** may allow a manufacturer to relatively quickly configure and/or reconfigure production system of various aircraft model wing sizes and
10 configurations and/or other elongated structures.

As shown in FIGs. 1, 3, 4A, 4B, and 5, each stanchion **200** may include a wing assembly support section, such as a generally predetermined-height adjustable upper section, generally **208**, which may contain components and systems, such as an arm configuration, generally **210**, a movable slide table **214**, and an actuation system, generally **216**. A lower,
15 base section, generally **220**, is of a predetermined height and may be of construction of similar width and depth dimensions as compare to other lower sections shown herein as exemplary implementations, and also, could be one of a number of such base sections of varying heights, each being readily interchangeable with one another and fully compatible with an upper section **208** and a modular rolling platform, generally **202**. This arrangement allows for the same
20 overall stanchion design to be used in the assembly of wings with varying size/height requirements. Modular rolling platforms **202** are of a predetermined size and configuration, thereby allowing for generally interchangeable use with respect to a base section **220** and in stanchions **200**, generally.

FIG. 1 illustrates, in particular, four stanchions (**200a**, **200b**, **200c**, **200d**) each being
25 carried on a platform **202**. Each stanchion **200** includes a base section **220a**, **220b**, **220c**, and **220d**, respectively, and an upper section **208a**, **208b**, **208c**, and **208d**, respectively. Stanchion **200a** is positioned near the root, generally **156**, of wing **152** which is the thickest portion of wing **152**. Stanchions **200b**, **200c** and **200d** are spaced progressively further outwardly with respect to wing **152** and serve to support wing **152** as wing **152** is maintained, inspected, tested,

evaluated, etc. Stanchion **200d** is positioned furthestmost outwardly with respect to root **156** of wing **152**, and because the distance from floor **154** to a support portion of wing **152** increases as one moves from root **156** to tip **158** of wing **152**, for support purposes, stanchion **200d** is of a greater height from floor **154** than is stanchion **200a**. However, each of stanchions **200a** and **200d** include a generally interchangeable upper section, **208a** and **208d**, respectively, with each of upper sections **200a**, **200d** being of substantially the same height as one another. Each of stanchions **200a** and **200d** are also mounted on a modular rolling platforms, **202a**, **202d**, respectively, and each of modular rolling platforms **202** also being interchangeable with one another, i.e., of substantially the same height and configuration as compared to one another.

Accordingly, in order to provide the additional elevation, or height, required by stanchion **200d**, as compared to stanchion **200a**, base section **220d** of stanchion **200d** is of greater height than base section **220a** of stanchion **200a**.

Turning to FIG. 2, modular rolling platform **202** is shown in more detail. Platform **202** includes a top surface **240** on which a base section **220** rests and is carried, such as shown in FIG. 3. Platform **202** includes a front wall **242**, a rear wall **244** (FIG. 4A), a left side wall **246** (FIG. 6), and a right side wall **248**. Extending from front wall **242** and/or rear wall **244** is an outrigger assembly, generally **250**, that stabilizes platform **202** and which includes an arm **252** having a foot **254** configured to contact floor **154** is slidably carried for substantially rectilinear movement in slots **256** in which an upper portion **258** of foot member **242** may slide to and fro. Foot **254**, in one example implementation, is threadingly connected to upper block member **258** to allow the foot to be moved upwardly and downwardly with respect to arm **252** and to ultimately, via arm **252**, allow for platform **202** to be leveled, and/or generally fixed against movement with respect to floor **154**. Although only one outrigger assembly **250** is shown, it is to be understood that such outrigger assemblies could be provided in one or both channels **260**, **262** (FIG. 3) on front wall **242** of platform **202** and/or in rear wall **244**.

FIG. 6 illustrates an example implementation for an outrigger assembly **250** is provided on rear wall **244**. Front wall **242** of platform **202** also includes a clamp mechanism, generally **264**, which includes a handle **268** and a loop, or clasp, **266** which is engagable with a hook member **270** on an adjacent front wall **242** of an adjacent platform **202**, upon platforms **202**

being placed in an adjacent relationship with respect to one another, such as is shown in FIG. 1. Referring to FIG. 2, handle **268** may be pivoted or otherwise actuated to cause loop **266** to engage and snugly clamp and/or lock loop **266** into hook member **270**, similar to a buckle arrangement and/or a toggle-like manner. Similarly, rear wall **244** of platform **202** may include a loop and handle **266**, **268** combination and hook member **270** (FIG. 6) for attaching to adjacent rear walls **244** of adjacent platforms **202**, as shown in FIG. 1. Upon platforms **202** being placed adjacent one another, one or more loops **266** may engage one or more hook members **270**, respectively, and the respective handles **268** may be actuated to cause loops **266** to snugly lock into respective hook members and thereby secure adjacent platforms together.

Platforms **202** may also include on sides **246** and **248** additional connectors **272** of selectively securing adjacent platforms **202** to one another. For example, side wall **246** of a platform **202** may include one or more male index mechanisms, connectors **280** (FIG. 6) which engage with female connectors, or index mechanisms, **282**, that selectively register with one another to further secure adjacent platforms against relative movement with respect to one another, particularly against relative lateral movement with respect to one another (i.e., relative to the longitudinal dimension of wing **152**).

As shown in FIG. 2, platforms **202** may further include a wire tray, generally **288**, extending the length of platform **202** adjacent wall **244**. Wire tray **288** is configured to carry wiring, cabling, hosing, etc. (not shown) between adjacent platforms **202**, and such wiring may pass through openings **290**, which may be in communication with both wire tray **288** and sides **246** and **248** (opening **290** is shown only in side **248** in the drawings). The wiring, cabling, hosing, etc. carried in wiring tray **288** may supply power, controls, pressurized air and/or hydraulic hosing, etc. to base sections **220** and/or upper sections **208** and may provide power and/or control instructions to base sections **220** and/or upper sections **208** for operations of arm configuration **210**, movable slide table **214**, and/or actuation system **216**.

As shown in FIGs. 4A, 4B, and 5, the bottom portion of platform **202** may include castors, or wheels, generally **294**, proximate the corners of the bottom portion. Wheels **294** may be selectively actuatable between a locked configuration to generally prevent platform from moving and an unlocked position for allowing platform **202** to move generally freely

about the floor. Wheels **294** could also be configured to move between a retracted position above the lowermost edges **296** of the platform, such that the platform rests on the floor supported by lowermost edges **296** (to generally prevent platform from moving) and an extended, wherein wheels **294** extend below lowermost edges **296** and allow the platform to move generally freely about the floor. Brackets **297** (FIG. 3) may also be used to attach the platform to floor **154**, if desired.

FIGs. 3, 4A, 4B, and 5 illustrate base section **220**, which, as noted above, can be configured to be of different heights. Each base section **220** is configured to interchangeably attach to a platform **202**, and, if desired, to receive wiring, cabling, hosing, etc. from wire tray **288** or otherwise. Base sections **220** are, in an example implementation, generally box-shaped, but it is to be understood that base sections **220** could be of other shapes and constructions, including, but not limited to, open frame construction, cylindrical construction (none shown), if desired. Base sections **220** may include one or more access panels and/or doors, generally, **298**, on sides **300**, **302** (FIG. 6), and/or on the front **304** or back thereof. One or more flanges **306** may be provided at the bottom of a base section **220** and may include holes through which fasteners **308** such as screws, bolts, quick-release fasteners (none shown) may pass to attach base section **220** to a platform **202**. The upper surface **310** (FIG. 3) of base section **220** is configured to receive movable sliding table **214**, which allows upper section **208** to selectively move generally rectilinearly with respect to base **220** and towards and away from wing **152**. Movement of upper section **208** on the sliding table can be done manually and/or through a motorized and/or pressurized fluid configuration (not shown).

As shown in FIG. 4A, upper section **208** includes a cabinet **312** of a generally box-like configuration. Cabinet **312** includes an access door **314** (FIG. 3) which opens to a compartment **316** within cabinet **312**. Inside compartment **316** is actuation system **216** which actuates arm mechanism **210**, which is carried in a yoke **320**. Yoke **320** is mounted on a bearing plate mechanism, generally **322**, which is carried for generally rectilinear vertical movement upwardly and downwardly, such as shown in FIG. 5. An elevator device, such as a ball screw mechanism, generally **324**, may be used to provided yoke **320** with such vertical movement, although it is to be understood that other mechanisms (such as pneumatic and/or hydraulic

cylinders, cable mechanisms, etc.) (none shown) could also be used to cause such vertical movement, if desired. Ball screw mechanism **324** rotates a threaded shaft **324a** on which a threaded support block configuration **324b** is captured and restrained from rotation with respect to shaft **324a** and instead moves generally rectilinearly up and down along shaft **324a**, as shown by arrow **324d** in FIG. 5. Support block **324b** is connected to a bracket **325** (FIG. 6), and yoke **320** is carried on bracket **325** for side to side, or lateral, movement, as shown by arrow **325a** in FIG 6. Because support block **324b** is connected to bracket **325**, and yoke **320** is connected to bracket **325**, yoke **320** moves vertically correspondingly with support block **324b** and bracket **325**.

As shown in FIG. 4A, in one example implementation, controls in upper section **208** may include one or more ball screw mechanisms **324** is connected to a right angle drive gear reducer **330**, which is driven by a motor **334**. Ball screw actuator **324c** is powered by gear reducer **330** to rotate threaded shaft **324a** of ball screw mechanism **324**. Motor **334** is shown as being vertically disposed in FIG. 5, although it could be horizontally disposed or disposed at some other angle, if desired. Motor **334** may be powered via wiring, cabling, etc. carried in one or more platforms **202**.

Controls included in upper section **208** may comprise one or more load cell arrangements, generally, **340** may be provided in compartment **316** that automatically determines a load placed on arm arrangement **210** and may include a load cell **344** and a pull plate **346** adjacent to load cell **344**. Load cell arrangement **340** may be powered using wiring, cabling, etc. carried in one or more platforms **202**.

Yoke **320** carries arm arrangement **210**, which may include a generally L-shaped arm member **350** having ears **352** carried in receivers **354** in yoke **320**. Arm member **350** may include a wing assembly connector, or, attachment portion **358** (FIG. 4B) configured for coupling with a corresponding and/or mating coupling (not shown) provided on wing **152**. The coupling of attachment portion **358** with wing **152** (or other elongated structure) allows a portion of the weight and/or downward force of wing **152** to be borne by arm member **350**, which in turn transmits the force through ball screw mechanism **324**. The adjustability of upper section **308** towards and away from wing **152**, via sliding table **214** (in the direction of arrow

214a is FIG. 4B) and the horizontal adjustability (via yoke 320 on bracket 325) and the vertical adjustability (via yoke 320 carried on support block 324b) of arm member 350 allows for a variety of degrees of freedom by which arm member 350 can be attached to wing 152, such as at spars (not shown) or other portions of wing 152.

5 Some implementations of apparatus and/or methods for supporting a wing assembly comprise at least two metrology devices. Metrology devices can provide positional information related to one or more arms 350 of the apparatus or system. In some implementations, metrology devices are attached to one or more arms. Any metrology device not inconsistent with the objectives of the present disclosure can be used. For example,
10 metrology devices can comprise, consist, or consist essentially of one or more sensors operable to measure one or more of tilt motion, axial motion, radial motion, and face motion. In such configurations, metrology devices can measure and relay data corresponding to necessary positional changes of arms 350 to correct for deviations in arm 350 position from predetermined tolerances or values associated with a jugged position. Jugged positions
15 comprise predetermined parameters, tolerances and values associated with particular assembly tasks to be carried out on an elongated component, such as a wing 152. Such deviations may occur, for example, during or after transport of an elongated component such as a wing 152. Necessary or desired positional changes of the arms 350 may be along one or more planes.

 In certain example implementations, a control system, generally 204, may be placed in
20 communication with at least two load cells 340 and/or at least two metrology devices (not shown) in an apparatus or system for supporting a wing assembly. The control system 204 can, in some cases, coordinate operation of and relay information provided by the load cells 340. Control systems 204 of this type can be configured to automatically operate elevator devices, such as a ball screw device 324, based on input from the load cells 340. Such
25 operability can provide systems or apparatus comprising such control systems 204 with the ability to distribute or re-distribute load on the arms 350 of the apparatus or system. The control systems 204 can provide the ability for an apparatus or system for supporting a wing assembly with a mechanism for preventing imbalance of loads during transit or transport of elongated structures, such as a wing 152 when, for example, moving the wing assembly across

a support surface. In some cases, the control system **204** can coordinate operation of and relay information provided by the metrology devices (not shown). Control systems **204** of this type can be configured to automatically operate elevator devices, such as a ball screw device **324**, based on input from the metrology devices (not shown). Such operability can provide systems or apparatus comprising such control systems **204** with the ability to establish or reestablish a jugged position of the apparatus or system. The control systems **204** can provide the ability for an apparatus or system for supporting a wing assembly with a mechanism for preventing or correcting deviation from a jugged position during or after transit or transport of elongated structures, such as a wing **152** when, for example, moving the wing assembly across a support surface.

Control systems **204** for communication with at least two load cells **340** and/or at least two metrology devices (not shown) can have any configuration not inconsistent with the objectives of the present disclosure. For example, control systems **204** can comprise wired or wireless communication devices whereby load cells and/or metrology devices can relay data signals to the control systems. The control systems **204** may then parse and relay the data in various manners. In some cases, the control system can provide information to a user or operator who may then manually or automatically adjust the height of the arms in order to distribute or re-distribute load balance and/or to establish or reestablish a jugged position. Alternatively, the control system **204** can parse load cell **340** data or metrology data automatically and can distribute or re-distribute load and/or establish or reestablish a jugged position balance without further input from a user or operator by adjusting the elevator devices, such as a ball screw device **324**, in along one or more planes. Adjustment of the elevator devices can occur incrementally, as over predetermined time intervals. In one non-limiting example, a control system **204** described herein can parse or display input in intervals of about **10** seconds. Further, such implementations can perform adjustments to distribute or re-distribute load or to establish or reestablish a jugged position in **10** second intervals. Alternatively, adjustment of the elevator devices can occur in real time as load balance and/or wing position shifts. For the purposes of the present disclosure, “real time” indicates that adjustment responses initiating distribution or re-distribution of loads or establishment or

reestablishment of a jugged position occur on the order of less than about 1 second after detection of loads and/or positions outside of predetermined parameters for load balance and/or wing or arm position.

5 The control system **204** may be implemented or realized with a general purpose processor, a content addressable memory, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA), any suitable programmable logic device, discrete gate or transistor logic, discrete hardware components or any combination thereof, designed to perform the functions described herein. In this manner, a control system may comprise, consist, or consist essentially of a microprocessor, a controller, a
10 microcontroller, a state machine or the like. A processor may also be implemented as a combination of computing devices, e.g., a combination of a digital signal processor and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a digital signal processor core or any other such configuration. In practice, the processor module may include processing logic configured to carry out the functions, techniques, and
15 processing tasks associated with the operation of the control system **204**.

In other exemplary aspects of the disclosure, configurations, systems, and methods for supporting aircraft wings and/or other elongated structures during manufacturing, maintenance, inspection, testing, and/or evaluation through use of a stanchion including an upper section of a generally predetermined or preselected and/or fixed height having an actuation system,
20 controls, and a movable table in combination with a base section selected from a collection of base sections, each being of a different, predetermined height.

Examples of the present disclosure may be described in the context of an aircraft manufacturing and service method, generally depicted as **100**, shown schematically in FIG. 7, and an aircraft, generally depicted as **102**, shown schematically in FIG. 8, with the functions of service method **100** and construction of aircraft **102** being depicted as blocks and/or modules in
25 such figures. During pre-production, exemplary method **100** may include specification and design **104** of the aircraft **102** and material procurement **106**. During production, component and subassembly manufacturing **108** and system integration **110** of the aircraft **102** takes place. Thereafter, the aircraft **102** may go through certification and delivery **112** in order to be placed

in service **114**. While in service by a customer, the aircraft **102** is scheduled for routine maintenance and service **116** (which may also include modification, reconfiguration, refurbishment, and so on).

Each of the processes of method **100** may be performed or carried out by a system integrator, a third party, and/or an operator (e.g., a customer). For the purposes of this description, a system integrator may include, without limitation, any number of aircraft manufacturers and major-system subcontractors; a third party may include without limitation any number of vendors, subcontractors, and suppliers; and an operator may be an airline, leasing company, military entity, service organization, and so on.

As shown in FIG. **8**, the aircraft **102** produced by exemplary method **100** may include an airframe **118** with a plurality of systems **120** and an interior **122**. Examples of high-level systems **120** include one or more of a propulsion system **124**, an electrical system **126**, a hydraulic system **128**, and an environmental system **130**. Any number of other systems may be included. Although an aerospace example is shown, the principles of the invention may be applied to other industries, such as the automotive industry.

Apparatus and methods embodied herein may be employed during any one or more of the stages of the production and service method **100**. For example, components or subassemblies corresponding to the production process stage **108** may be fabricated or manufactured in a manner similar to components or subassemblies produced while the aircraft **102** is in service. Also, one or more apparatus examples, method examples, or a combination thereof may be utilized during the production stages **108** and **110**, for example, by substantially expediting assembly of or reducing the cost of an aircraft **102**. Similarly, one or more of apparatus examples, method examples, or a combination thereof may be utilized while the aircraft **102** is in service, for example and without limitation, for maintenance and service **116**.

The present disclosure is applicable in the context of manufacturing an air craft **102** and service method **100**, and/or in other manufacturing sectors, such as the automotive sector, space sector, heavy industry sector, surface and submarine vessel maritime sector, etc.

Exemplary implementations of configurations, systems, and methods for supporting elongated structures, such as aircraft wings, during manufacturing, maintenance, inspection,

testing, and/or evaluation are described above in detail. The systems and methods are not limited to the specific implementations described herein, but rather, components of systems and/or steps of the method may be utilized independently and separately from other components and/or steps described herein. The disclosed dimensional ranges include all sub
5 ranges there between. Further, tools and components described herein may be fabricated from any material that enables such tool or component to function as described herein. Each tool or component and each method step may also be used in combination with other components and/or method steps. Although specific features of various implementations may be shown in some drawings and not in others, this is for convenience only. Any feature of a drawing may be
10 referenced and/or claimed in combination with any feature of any other drawing.

Illustrative, non-exclusive examples of inventive subject matter according to the present disclosure are described in the clauses A1 to G15, below:

A1. An apparatus for supporting a wing assembly **152** at a wing assembly support height
15 relative to a support surface, the apparatus comprising:

- at least one movable platform **202** having a first height;
- a plurality of base sections **220**, each having a different predetermined height with respect to one another;
- at least one wing assembly support section **208**;
20 - a wing assembly connector **358** connected to the wing assembly support section;
- the wing assembly connector **358** being configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane;
- the wing assembly support section **208** defining a bottom and the wing assembly connector being at a second height from the bottom;
25 - the movable platform **202** and the wing assembly connector being configured such that the aggregate of the first height and the second height is less than the wing assembly support height and such that the difference between the aggregate of the first height and the second height and the wing assembly support height defines a differential height;

at least one of the multiple base sections **220** being of a predetermined height approximating the differential height;

the at least one of the multiple base sections **220** being of a predetermined height approximating the differential height being carried on the movable platform; and

5 the wing assembly support section **208** being carried on the at least one of the multiple base sections being of a predetermined height approximating the differential height.

A2. The apparatus of clause A1, further comprising:

10 the at least one movable platform **202** including a plurality of movable platforms; and

and each of the plurality of movable platforms including at least one clamp mechanism **264** that selectively joins the plurality of movable platforms to one another.

A3. The apparatus of any of clauses A1-A2, further comprising:

15 the at least one movable platform including a plurality of movable platforms;

and each of the plurality of movable platforms including a first side and a second side generally opposite the first side;

at least one first clamp mechanism **264** on the first side of each of the plurality of movable platforms;

20 at least one second clamp mechanism **270** on the second side of each of the plurality of movable platforms; and

wherein, the first clamping mechanism and the second clamping mechanism cooperate with one another to selectively join the plurality of movable platforms to one another.

25 A4. The apparatus of any of clauses A1-A3, further comprising:
the at least one movable platform **202** including a plurality of movable platforms;

and each of the plurality of movable platforms including a front side and a rear side generally opposite the front side;

at least one male index mechanism **280** on the front side of each of the plurality of movable platforms;

5 at least one female index mechanism **282** on the rear side of each of the plurality of movable platforms; and

wherein, the male index mechanism and the female index mechanism cooperate with one another to selectively register the plurality of movable platforms to one another.

10 **A5.** The apparatus of any of clauses **A1-A4** further comprising:

the at least one movable platform **202** defining a first side and a second side generally opposite the first side;

the first side and the second side each defining an opening;

15 a compartment **288** extending between the first side and the second side and communicating with the opening in each of the first side and the second side; and

a door pivotally attached to the movable platform for selectively allowing access to the compartment.

A6. The apparatus of any of clauses **A1-A5**, further comprising:

20 the at least one movable platform **202** including a plurality of wheels that permit the movable platform to move about the support surface.

A7. The apparatus of clauses **A1-A6**, further comprising:

the at least one wing assembly support section **208** defining a compartment; and

25 at least one access door (**214**) that is in communication with the compartment.

A8. The apparatus of any of clause **A1-A7**, further comprising:

the at least one wing assembly support section including a movable table **214** interposed between the at least one wing assembly support section and the at least one of the

multiple base sections being of a predetermined height approximating the differential height;
and

the movable table **214** being configured to allow relative generally rectilinear
movement between the at least one wing assembly support section and the at least one of the
5 multiple base sections being of a predetermined height approximating the differential height.

A9. The apparatus of any of clauses A1-A8, further comprising:
the wing assembly connector **358** including an arm **210**, and wherein the first
plane is generally perpendicular to the support surface and the second plane is generally
10 parallel to the support surface.

A10. The apparatus of any of claims A1-A9, further comprising:
the wing assembly connector **358** including an arm **210** movable in a third plane
that is generally parallel to the first plane and generally perpendicular to the second plane.
15

A11. The apparatus of any of clauses A1-A10, further comprising:
the wing assembly connector **358** including an arm **210**, and wherein the first
plane is generally perpendicular to the support surface and the second plane is generally
parallel to the support surface; and
20 an elevator device **324** connected to wing assembly connector that automatically
moves the arm in the second plane.

A12. The apparatus of any of clauses A1-A11, further comprising:
a movable bracket **325** connected to wing assembly connector that allows the
25 arm to move in the third plane.

A13. The apparatus of any of clauses A1-A12, further comprising:

the wing assembly connector **358** including an arm **210**, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface; and

5 a load cell **340** connected to the wing assembly connector that automatically determines a load placed on the arm.

A14. The apparatus of any of clauses A1-A13, further comprising:

10 the wing assembly connector including an arm **210**, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface;

an elevator device **324** connected to wing assembly connector that automatically moves the arm in the second plane; and

a motor **334** connected to the elevator device that powers the elevator device.

15 A15. The apparatus of any of clauses A1-A14, further comprising:

at least one outrigger **250** connected to the at least one movable platform that stabilizes the at least one movable platform.

A16. The apparatus of any of clauses A1-A15, further comprising:

20 the at least one movable platform **202** including a plurality of movable platforms;

and each of the plurality of movable platforms including at least one clamp mechanism that selectively joins the plurality of movable platforms to one another; and

25 the at least one movable platform including a plurality of wheels that permit the movable platform to move about the support surface.

A17. The apparatus of any of clauses A1-A16, further comprising:

the at least one wing assembly support section including a movable table **214** interposed between the at least one wing assembly support section and the at least one of the multiple base sections being of a predetermined height approximating the differential height;

the movable table being configured to allow relative generally rectilinear movement between the at least one wing assembly support section and the at least one of the multiple base sections being of a predetermined height approximating the differential height;

the wing assembly connector **358** including an arm **210**, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface; and

an elevator device **324** that automatically moves the arm in the second plane.

B18. An apparatus for supporting a wing assembly at a wing assembly support height relative to a support surface, the apparatus comprising:

a movable platform **202** having a first height;

a plurality of base sections **220**, each having a different predetermined height with respect to one another;

at least one wing assembly support section **208**;

a wing assembly connector connected to the wing assembly support section;

the wing assembly connector being configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane, and in a third plane that is generally parallel to the first plane and generally perpendicular to the second plane;

the wing assembly support section defining a bottom and the wing assembly connector **358** being at a second height from the bottom;

the movable platform and the wing assembly connector being configured such that the aggregate of the first height and the second height is less than the wing assembly support height and such that the difference between the aggregate of the first height and the second height and the wing assembly support height defines a differential height;

at least one of the multiple base sections **220** being of a predetermined height approximating the differential height;

the at least one of the multiple base sections being of a predetermined height approximating the differential height being carried on the movable platform;

the wing assembly support section being carried on the at least one of the multiple base sections being of a predetermined height approximating the differential height;

5 the at least one wing assembly support section including a movable table **214** interposed between the at least one wing assembly support section and the at least one of the multiple base sections being of a predetermined height approximating the differential height;

the movable table **214** being configured to allow relative generally rectilinear movement between the at least one wing assembly support section and the at least one of the
10 multiple base sections being of a predetermined height approximating the differential height;

the wing assembly connector including an arm **350**;

an elevator device **324** connected to wing assembly connector that automatically moves the arm in the second plane; and

a movable bracket connected to wing assembly connector that allows the arm to
15 move in the third plane.

B19. The apparatus of clause **18**, further comprising:

a load cell **340** connected to the wing assembly connector that automatically determines a load placed on the arm.

20

C20. A method for supporting a wing assembly at a wing assembly support height relative to a support surface, the method comprising the steps of:

providing at least one wing assembly **152**;

providing at least one movable platform **202** having a first height;

25 providing multiple base sections **220**, each having a different predetermined height with respect to one another;

providing at least one wing assembly support section **208** and a wing assembly connector **358** movable in a first plane and a second plane generally perpendicular with respect

to the first plane; the wing assembly support section defining a bottom and the wing assembly connector being at a second height from the bottom;

aggregating the first height of the movable platform and the second height of the wing assembly connector **358** from the bottom of the wing assembly section;

5 determining a differential height by comparing the aggregated first height and second height to the wing assembly support height;

selecting one of the multiple base sections of a predetermined height approximating the differential height and positioning the selected one of the multiple base sections upon the platform;

10 positioning the wing assembly support section on top of the selected one of the multiple base sections; and

connecting the wing assembly connector **358** to the wing assembly for supporting the wing assembly.

15 **D1.** An apparatus for supporting a wing assembly **152** at a wing assembly support height relative to a support surface **154**, the apparatus comprising:

at least one movable platform **202** having a first height;

a plurality of base sections **220**, each having a different predetermined height with respect to one another;

20 a plurality of wing assembly support sections **208**, wherein each wing assembly support section corresponds to a respective one of the base sections **220**;

a wing assembly connector **358** connected to each of the plurality of wing assembly support sections **208**;

25 at least one wing assembly connector **358** being configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane;

each of the wing assembly support sections **208** defining a bottom and the wing assembly connector **358** being at a second height from the bottom;

at least one movable platform **202** and at least one wing assembly connector **358** being configured such that the aggregate of the first height and the second height is less than at least

one of the wing assembly support heights and such that the difference between the aggregate of the first height and the second height and the wing assembly support height defines a differential height;

at least one of the multiple base sections **220** being of a predetermined height
5 approximating the differential height;

the at least one of the base sections **220** being of a predetermined height approximating the differential height being carried on the movable platform **202**;

at least one of the wing assembly support sections **208** carried on at least one of the multiple base sections **220** being of a predetermined height approximating the differential
10 height;

at least two of the wing assembly connectors **358** each including an arm **350**, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface;

at least two of the wing assembly connectors **358** each having a respective load cell **340**
15 connected thereto, each load cell being configured to automatically determine the load placed on one arm **350**;

at least two of the wing assembly connectors **358** each having a respective metrology device connected thereto, each metrology device being configured to automatically determine positional data for one connector **358**; and

20 a control system **204** in communication with each load cell **340** and each metrology device.

D2. The apparatus of clause 1, wherein the arms **350** are each movable in a third plane that is generally parallel to the first plane and generally perpendicular to the second plane.

25

D3. The apparatus of any of clauses D1-D2, further comprising:

an elevator device **324** connected to each of the at least two wing assembly connectors **358**, the elevator devices being in communication with the control system **204**, and the control

system being operable to direct the elevator devices **358** to automatically move the arms **350** in the second plane.

D4. The apparatus of clause **4**, wherein the control system **204** is operable to automatically operate the elevator devices **324** to move the arms **350** in the second plane in a manner which serves to distribute or re-distribute load on the at least two arms **350**.

D5. The apparatus of any of clauses D1-D3, further comprising:

the at least one movable platform **202** including a plurality of movable platforms; and

and each of the plurality of movable platforms **202** including at least one clamp mechanism **266**, **270** that selectively joins the plurality of movable platforms **202** to one another.

D6. The apparatus of any of clauses D1-D5, further comprising:

the at least one movable platform **202** including a plurality of movable platforms, each of the plurality of movable platforms including a first side and a second side generally opposite the first side;

at least one first clamp mechanism **266**, **270** on the first side of each of the plurality of movable platforms **202**;

at least one second clamp mechanism **266**, **270** on the second side of each of the plurality of movable platforms **202**; and

wherein, the first clamping mechanism and the second clamping mechanism cooperate with one another to selectively join the plurality of movable platforms **202** to one another.

D7. The apparatus of any of clauses D1-D6, further comprising:

the at least one movable platform **202** including a plurality of movable platforms;

and each of the plurality of movable platforms including a front side and a rear side generally opposite the front side;

at least one male index mechanism **280** on the front side of each of the plurality of movable platforms;

at least one female index mechanism **282** on the rear side of each of the plurality of movable platforms; and

5 wherein, the male index mechanism **280** and the female index mechanism **282** cooperate with one another to selectively register the plurality of movable platforms **202** to one another.

D8. The apparatus of any of clauses **D1-D7**, further comprising:

10 the at least one movable platform **202** defining a first side and a second side generally opposite the first side;

 the first side and the second side each defining an opening **290**;

 a compartment **288** extending between the first side and the second side and communicating with the opening in each of the first side and the second side; and

15 a door pivotally attached to the movable platform for selectively allowing access to the compartment.

D9. The apparatus of any of clauses **D1-D8**, further comprising:

20 the at least one movable platform **202** including a plurality of wheels **294** that permit the movable platform to move about the support surface.

D10. The apparatus of any of clauses **D1-D9**, further comprising:

 at least one wing assembly support section **208** defining a compartment **316**; and

 at least one access door **314** that is in communication with the compartment.

25

D11. The apparatus of any of clauses **D1-D10**, further comprising:

 at least one wing assembly support section **208** including a movable table **214** interposed between the at least one wing assembly support section **208** and at least one of the base sections **220** being of a predetermined height approximating the differential height; and

the movable table **214** being configured to allow relative generally rectilinear movement between the at least one wing assembly support section **208** and the at least one base section **220** being of a predetermined height approximating the differential height.

5 **D12.** The apparatus of any of clauses **D1-D11**, further comprising:

a movable bracket **325** connected to the wing assembly connector **358** that allows the arm **350** to move in the third plane.

D13. The apparatus of any of clauses **D1-D12**, further comprising:

10 the wing assembly connector **358** including an arm **350**, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface;

an elevator device **324** connected to wing assembly connector **358** that automatically moves the arm **350** in the second plane; and

15 a motor **334** connected to the elevator device **324** that powers the elevator device **324**.

D14. The apparatus of any of clauses **D1-D13**, further comprising:

at least one outrigger **250** connected to the at least one movable platform **202** that stabilizes the at least one movable platform **202**.

20

D15. The apparatus of any of clauses **D1-D14**, further comprising:

the at least one movable platform **202** including a plurality of movable platforms;

and each of the plurality of movable platforms including at least one clamp mechanism **266, 270** that selectively joins the plurality of movable platforms to one another; and

25 the at least one movable platform **202** including a plurality of wheels **294** that permit the movable platform **202** to move about the support surface.

D16. The apparatus of any of clauses **D1-D15**, further comprising:

at least one wing assembly support section **208** including a movable table **214** interposed between the at least one wing assembly support section **208** and the at least one of the multiple base sections **220** being of a predetermined height approximating the differential height;

5 the movable table **214** being configured to allow relative generally rectilinear movement between the at least one wing assembly support section **208** and the at least one of the multiple base sections **220** being of a predetermined height approximating the differential height;

the wing assembly connector **208** including an arm **350**, and wherein the first plane is
10 generally perpendicular to the support surface and the second plane is generally parallel to the support surface; and

an elevator device **324** that automatically moves the arm **350** in the second plane.

E17. A method for supporting a wing assembly **152** at a wing assembly support height
15 relative to a support surface, the method comprising the steps of:

providing at least one wing assembly **152**;

providing at least one movable platform **202** having a first height;

providing a plurality of base sections **220**, each having a different predetermined height with respect to one another;

20 providing a plurality of wing assembly support sections **208** wherein each wing assembly support sections **208** corresponds to a respective one of the base sections **220**, and a wing assembly connector **208** movable in a first plane and a second plane generally perpendicular with respect to the first plane on each of the wing assembly support sections **208**; the wing assembly support section defining a bottom and the wing assembly connector **358**
25 being at a second height from the bottom;

providing each of at least two of the wing assembly connectors **358** with load cells **340** connected thereto, wherein each load cell **340** automatically determines load placed on one connector **358**;

providing each of at least two of the wing assembly connectors **358** with metrology devices connected thereto, wherein each metrology device automatically determines positional data for one connector;

5 providing a control system **204** in communication with the load cells **340** and the metrology devices;

aggregating the first height of the movable platform **202** and the second height of the wing assembly connector **208** from the bottom of the wing assembly support section **208**;

determining a differential height by comparing the aggregated first height and second height to the wing assembly support height;

10 selecting one of the multiple base sections **220** of a predetermined height approximating the differential height and positioning the selected one of the multiple base sections **220** upon the platform **202**;

positioning the wing assembly support section **208** on top of the selected one of the multiple base sections **220**; and

15 connecting the wing assembly connector **358** to the wing assembly **152** for supporting the wing assembly **152**.

E18. The method of clause **17**, further comprising:

20 providing an elevator device **324** connected to each of the at least two wing assembly connectors **358**, the elevator devices **324** being operable to automatically move the arms **350** in the second plane one or more planes.

E19. The method of any of clauses E17-E18, further comprising:

25 moving the wing assembly **152** across the support surface **154**.

E20. The method of any of clauses E18-E19, further comprising:

adjusting the wing assembly connectors **358** along the second plane with the elevator devices **324** in order to distribute or re-distribute load on the connectors **358** as measured by the load cells **340**.

E21. The method of any of clauses **E18-E20**, further comprising:

adjusting wing assembly connectors **358** along one or more planes with the elevator devices **324** in order to establish or reestablish a jiggged position as measured by the metrology devices.

F1. An apparatus for supporting a wing assembly **152** at a wing assembly support height relative to a support surface **154**, the apparatus comprising:

a plurality of movable platforms **202**;

a plurality of base sections **220**, wherein each base section is carried by one of the moveable platforms **202**;

a plurality of wing assembly support sections **208**, wherein each wing assembly support section is carried by one of the base sections **220**; and

a wing assembly connector **358** connected to each of the plurality of wing assembly support sections **208** by an arm **350** and configured to be attachable to the wing assembly **152**, wherein

at least one wing assembly connector **358** being configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane and wherein

the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface.

F2. The apparatus of clause **1**, further comprising at least two load cells **340** each configured to automatically determine the load placed on an arm **350** associated with a connector **358**;

at least two metrology devices, each metrology device being configured to automatically determine positional data for a connector **358** having a load cell associated therewith; and

a control system **204** in communication with each load cell **340** and each metrology device.

F3. The apparatus of any of clauses F1-F2, wherein the arms **350** are each movable in a third plane that is generally parallel to the first plane and generally perpendicular to the second plane.

5

F4. The apparatus of any of clauses F2-F3, further comprising:

an elevator device **324** connected to each of wing assembly connectors **358**, the elevator devices being in communication with the control system **204**, and the control system being operable to direct the elevator devices **324** to automatically move the arms **350** in the second plane.

10

F5. The apparatus of clause F4, wherein the control system **204** is operable to automatically operate the elevator devices **324** to move the arms **350** in the second plane in a manner which serves to distribute or re-distribute load on the at least two arms **350**.

15

F6. The apparatus of any of clauses F1-F5, further comprising:

the plurality of movable platforms **202** including a plurality of wheels **294** that permit the movable platforms to move about the support surface.

20

F7. The apparatus of any of clauses F1-F6, further comprising:

a movable table **214** interposed between the wing assembly support sections **208** and the base sections **220**,

the movable table **214** being configured to allow relative generally rectilinear movement between the wing assembly support section **208** and the base section **220**.

25

F8. The apparatus of any of clauses F1-F7, further comprising:

a movable bracket **325** connected to the wing assembly connector **358** that allows the arm **350** to move in the third plane.

F9. The apparatus of any of clauses F1-F8, further comprising:

the wing assembly connector **358** including an arm **350**, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface;

5 an elevator device **324** connected to wing assembly connector **358** that automatically moves the arm **350** in the second plane; and

a motor **334** connected to the elevator device **324** that powers the elevator device **324**.

F10. The apparatus of any of clauses F1-F9, further comprising:

10 at least one clamp mechanism **266, 270** associated with each movable platform **202** associated with each movable platform that is configured to enable adjacent movable platforms to be joined together; and

the platforms **202** including a plurality of wheels **294** that permit the movable platforms **202** to move about the support surface.

15

G11. A method for supporting a wing assembly **152** at a wing assembly support height relative to a support surface, the method comprising the steps of:

providing at least one wing assembly **152**;

providing at least one movable platform **202** having a first height;

20 providing a plurality of base sections **220**, each having a different predetermined height with respect to one another;

providing a plurality of wing assembly support sections **208** wherein each wing assembly support sections **208** corresponds to a respective one of the base sections **220**, and a wing assembly connector **208** movable in a first plane and a second plane generally perpendicular with respect to the first plane on each of the wing assembly support sections **208**;
 25 the wing assembly support section defining a bottom and the wing assembly connector **358** being at a second height from the bottom;

providing each of at least two of the wing assembly connectors **358** with load cells **340** connected thereto, wherein each load cell **340** automatically determines load placed on one connector **358**;

5 providing each of at least two of the wing assembly connectors **358** with metrology devices connected thereto, wherein each metrology device automatically determines positional data for one connector;

providing a control system **204** in communication with the load cells **340** and the metrology devices;

10 aggregating the first height of the movable platform **202** and the second height of the wing assembly connector **208** from the bottom of the wing assembly support section **208**;

determining a differential height by comparing the aggregated first height and second height to the wing assembly support height;

15 selecting one of the multiple base sections **220** of a predetermined height approximating the differential height and positioning the selected one of the multiple base sections **220** upon the platform **202**;

positioning the wing assembly support section **208** on top of the selected one of the multiple base sections **220**; and

connecting the wing assembly connector **358** to the wing assembly **152** for supporting the wing assembly **152**.

20

G12. The method of clause G11, further comprising:

providing an elevator device **324** connected to each of the at least two wing assembly connectors **358**, the elevator devices **324** being operable to automatically move the arms **350** in the second plane one or more planes.

25

G13. The method of any of clauses G11-G12, further comprising:

moving the wing assembly **152** across the support surface **154**.

G14. The method of any of clauses G12-G13, further comprising:

adjusting the wing assembly connectors **358** along the second plane with the elevator devices **324** in order to distribute or re-distribute load on the connectors **358** as measured by the load cells **340**.

5 **G15.** The method of any of clauses **G12-G14**, further comprising:

adjusting wing assembly connectors **358** along one or more planes with the elevator devices **324** in order to establish or reestablish a jiggled position as measured by the metrology devices.

10 Many modifications and other exemplary aspects of the disclosure set forth herein will come to mind to one skilled in the art to which this disclosure pertains, having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the disclosure is not to be limited to the specific examples disclosed and that modifications and other exemplary aspects of the disclosure are intended to be
15 included within the scope of the appended claims. Moreover, although the foregoing descriptions and the associated drawings illustrate examples in the context of certain example combinations of elements and/or functions, it should be appreciated that different combinations of elements and/or functions may be provided by alternative examples without departing from the scope of the appended claims. For instance, different combinations of elements and/or
20 functions than those explicitly described above are also contemplated as may be set forth in the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. An apparatus for supporting a wing assembly, the apparatus comprising:

5

a plurality of movable platforms supported by a support surface;

a plurality of base sections, wherein each base section is carried by one of the
movable platforms;

10

a plurality of wing assembly support sections, wherein each wing assembly
support section is carried by one of the base sections; and

15

a respective wing assembly connector connected to each of the plurality of wing
assembly support sections by an arm and configured to be attachable to the wing
assembly,

20

wherein at least one of the wing assembly connectors is configured to be movable
in a first plane and a second plane generally perpendicular with respect to the first
plane and wherein the first plane is generally perpendicular to the support surface
and the second plane is generally parallel to the support surface.

2. The apparatus of claim 1, further comprising:

25

at least two load cells each configured to automatically determine a load
placed on an arm associated with a respective one of the wing assembly
connectors;

at least two metrology devices, each metrology device being configured to automatically determine positional data for a respective one of the wing assembly connectors having a load cell associated therewith; and

5 a control system in communication with each of the at least two load cells and each of the at least two metrology devices.

10 3. The apparatus of any one of claims 1-2, wherein the arms are each movable in a third plane that is generally parallel to the first plane and generally perpendicular to the second plane.

4. The apparatus of any one of claims 1-3, wherein:
the plurality of movable platforms include a plurality of wheels that permit the
15 movable platforms to move about the support surface.

5. The apparatus of any one of claims 1-4, further comprising:
a respective movable table interposed between each of the wing assembly
20 support sections and the base sections,
the movable tables being configured to allow relative generally rectilinear movement between the wing assembly support sections and the base sections.

25 6. The apparatus of claim 3, further comprising:
a respective movable bracket connected to each of the wing assembly connectors that allows the arm to move in the third plane.

30 7. The apparatus of any one of claims 1-6, further comprising:

at least one clamp mechanism associated with each of the movable platforms that is configured to enable adjacent ones of the movable platforms to be joined together; and

5

wherein the movable platforms include a plurality of wheels that permit the movable platforms to move about the support surface.

8. A method for supporting at least one wing assembly at a wing assembly support height relative to a support surface, the method comprising the steps of:

10

providing the at least one wing assembly;

providing a plurality of movable platforms;

15

providing a plurality of base sections each positioned on one of the movable platforms;

20

providing a plurality of wing assembly support sections each positioned on one of the base sections and each having a wing assembly connector movable in a first plane and a second plane generally perpendicular with respect to the first plane on each of the wing assembly support sections;

25

providing each of at least two of the wing assembly connectors with load cells connected thereto, wherein each of the load cells is configured to automatically determine load placed on a respective one of the at least two connectors;

providing each of at least two of the wing assembly connectors with metrology devices connected thereto, wherein each of the metrology devices is configured

to automatically determine positional data for a respective one of the wing assembly connectors;

providing a control system in communication with the load cells and the metrology devices; and

connecting the wing assembly connectors to the at least one wing assembly for supporting the at least one wing assembly.

10 **9.** The method of claim 8, further comprising:

providing a respective elevator device connected to each of the at least two wing assembly connectors, the elevator devices being operable to automatically move the wing assembly connectors in the second plane.

15

10. The method of claim 8 or 9, further comprising:

moving the wing assembly across the support surface.

20 **11.** The method of claim 9, further comprising:

adjusting the wing assembly connectors along the second plane with the elevator devices in order to distribute or re-distribute load on the connectors as measured by the load cells.

25

12. The method of claim 9 or 11, further comprising:

adjusting the wing assembly connectors along one or more planes with the elevator devices in order to establish or reestablish a jugged position as measured by the metrology devices.

30

13. An apparatus for supporting a wing assembly at a wing assembly support height relative to a support surface, the apparatus comprising:

5 at least one movable platform having a first height;

a plurality of base sections, each having a different predetermined height with respect to one another;

10 at least one wing assembly support section;

a wing assembly connector connected to the at least one wing assembly support section;

15 the wing assembly connector being configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane;

the at least one wing assembly support section defining a bottom and the wing assembly connector being at a second height from the bottom;

20

the movable platform and the wing assembly connector being configured such that the aggregate of the first height and the second height is less than the wing assembly support height and such that the difference between the aggregate of the first height and the second height and the wing assembly support height defines a differential height;

25

at least one of the plurality of base sections being of a predetermined height approximating the differential height;

the at least one of the plurality of base sections being of a predetermined height approximating the differential height being carried on the movable platform; and

the at least one wing assembly support section being carried on the at least one of the plurality of base sections being of a predetermined height approximating the differential height.

14. The apparatus of claim **13**, wherein:

the at least one movable platform includes a plurality of movable platforms; and

each of the plurality of movable platforms includes at least one clamp mechanism that selectively joins the plurality of movable platforms to one another.

15. The apparatus of claim **13**, wherein:

the at least one movable platform includes a plurality of movable platforms; and

each of the plurality of movable platforms includes a first side and a second side generally opposite the first side;

the apparatus further comprising:

at least one first clamp mechanism on the first side of each of the plurality of movable platforms; and

at least one second clamp mechanism on the second side of each of the plurality of movable platforms;

wherein, the at least one first clamp mechanism and the at least one second clamp mechanism cooperate with one another to selectively join the plurality of movable platforms to one another.

5 **16.** The apparatus of claim **13**, wherein:

the at least one movable platform includes a plurality of movable platforms; and

10 each of the plurality of movable platforms includes a front side and a rear side generally opposite the front side;

the apparatus further comprising:

15 at least one male index mechanism on the front side of each of the plurality of movable platforms;

at least one female index mechanism on the rear side of each of the plurality of movable platforms; and

20 wherein, the at least one male index mechanism and the at least one female index mechanism cooperate with one another to selectively register the plurality of movable platforms to one another.

25 **17** The apparatus of claim **13**, wherein:

the at least one movable platform defines a first side and a second side generally opposite the first side; and

the first side and the second side each defines an opening;

30

the apparatus further comprising:

a compartment extending between the first side and the second side and communicating with the opening in each of the first side and the second side; and

a door pivotally attached to the movable platform for selectively allowing access to the compartment.

10 **18.** The apparatus of claim **13**, wherein:

the at least one movable platform includes a plurality of wheels that permit the movable platform to move about the support surface.

15 **19.** The apparatus of claim **13**, wherein the at least one wing assembly support section defines a compartment and the apparatus further comprises at least one access door that is in communication with the compartment.

20 **20.** The apparatus of claim **13**, wherein:

the at least one wing assembly support section includes a movable table interposed between the at least one wing assembly support section and the at least one of the plurality of base sections being of a predetermined height approximating the differential height; and

the movable table is configured to allow relative generally rectilinear movement between the at least one wing assembly support section and the at least one of the plurality of base sections being of a predetermined height approximating the differential height.

21. The apparatus of claim **13**, wherein:

the wing assembly connector includes an arm, and

5 the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface.

22. The apparatus of claim **21**, wherein:

10 the wing assembly connector includes an arm movable in a third plane that is generally perpendicular to the first plane and generally parallel to the second plane.

23. The apparatus of claim **22**, further comprising: a movable bracket connected to the
15 wing assembly connector that allows the arm to move in the third plane.

24. The apparatus of claim **13**, wherein:

20 the wing assembly connector includes an arm, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface; and

the apparatus further comprises:

25 a load cell connected to the wing assembly connector that automatically determines a load placed on the arm.

25. The apparatus of claim **13**, further comprising: at least one outrigger connected to the at least one movable platform that stabilizes the at least one movable platform.

30

26. The apparatus of claim 13, wherein:

the at least one movable platform includes a plurality of movable platforms; and

5 each of the plurality of movable platforms includes at least one clamp mechanism that selectively joins the plurality of movable platforms to one another; and

the at least one movable platform includes a plurality of wheels that permit the movable platform to move about the support surface.

10

27. A method for supporting at least one wing assembly at a wing assembly support height relative to a support surface, the method comprising the steps of:

providing the at least one wing assembly;

15

providing at least one movable platform having a first height;

providing multiple base sections, each having a different predetermined height with respect to one another;

20

providing at least one wing assembly support section and a wing assembly connector movable in a first plane and a second plane generally perpendicular with respect to the first plane;

25

the at least one wing assembly support section defining a bottom and the wing assembly connector being at a second height from the bottom;

aggregating the first height of the movable platform and the second height of the wing assembly connector from the bottom of the wing assembly section;

30

determining a differential height by comparing the aggregated first height and second height to the wing assembly support height;

selecting one of the multiple base sections of a predetermined height approximating the differential height and positioning the selected one of the multiple base sections upon the platform;

positioning the at least one wing assembly support section on top of the selected one of the multiple base sections; and

connecting the wing assembly connector to the at least one wing assembly for supporting the at least one wing assembly.

28. An apparatus for supporting a wing assembly at a wing assembly support height relative to a support surface, the apparatus comprising:

at least one movable platform having a first height;

a plurality of base sections, each having a different predetermined height with respect to one another;

a plurality of wing assembly support sections, wherein each wing assembly support section corresponds to a respective one of base sections;

at least one wing assembly connector connected to each of the plurality of wing assembly support sections;

the at least one wing assembly connector being configured to be movable in a first plane and a second plane generally perpendicular with respect to the first plane;

each of the wing assembly support sections defining a bottom and the wing assembly connector being at a second height from the bottom;

at least one of the at least one movable platform and at least one of the at least one wing assembly connector being configured such that the aggregate of the first height and the second height is less than the wing assembly support height and such that the difference between the aggregate of the first height and the second height and the wing assembly support height defines a differential height;

at least one of the plurality of base sections being of a predetermined height approximating the differential height;

the at least one of the base sections being of a predetermined height approximating the differential height being carried on the movable platform;

at least one of the wing assembly support sections carried on the at least one of the plurality of base sections being of a predetermined height approximating the differential height;

at least two of the at least one wing assembly connector each including an arm, and wherein the first plane is generally perpendicular to the support surface and the second plane is generally parallel to the support surface;

the at least two of the wing assembly connectors each having a respective load cell connected thereto, each load cell being configured to automatically determine the load placed on one arm;

the at least two of the wing assembly connectors each having a respective metrology device connected thereto, each metrology device being configured to automatically determine positional data for one connector;

and a control system in communication with each load cell and each metrology device.

5 **29.** The apparatus of claim **28**, wherein the arms are each movable in a third plane that is generally parallel to the first plane and generally perpendicular to the second plane.

30. The apparatus of claim **28**, further comprising:

10 a respective elevator device connected to each of the at least two wing assembly connectors, the elevator devices being in communication with the control system, and the control system being operable to direct the elevator devices to automatically move the arms in the second plane.

15 **31.** The apparatus of claim **30**, wherein the control system is operable to automatically operate the elevator devices to move the arms in the second plane in a manner which serves to distribute or re-distribute load on the arms of the at least two wing assembly connectors.

20 **32.** The apparatus of claim **29**, wherein:

 the at least one movable platform includes a plurality of movable platforms; and

 each of the plurality of movable platforms includes at least one clamp mechanism
25 that selectively joins the plurality of movable platforms to one another.

33. The apparatus of claim **28**, wherein:

the at least one movable platform includes a plurality of movable platforms, each of the plurality of movable platforms including a first side and a second side generally opposite the first side;

5 the apparatus further comprising:

at least one first clamp mechanism on the first side of each of the plurality of movable platforms; and

10 at least one second clamp mechanism on the second side of each of the plurality of movable platforms;

wherein, the at least one first clamp mechanism and the at least one second clamp mechanism cooperate with one another to selectively join
15 the plurality of movable platforms to one another.

34. The apparatus of claim **28**, wherein:

the at least one movable platform includes a plurality of movable platforms; and
20

each of the plurality of movable platforms includes a front side and a rear side generally opposite the front side;

the apparatus further comprising:

25 at least one male index mechanism on the front side of each of the plurality of movable platforms;

at least one female index mechanism on the rear side of each of the plurality of movable platforms; and

30

wherein, the at least one male index mechanism and the at least one female index mechanism cooperate with one another to selectively register the plurality of movable platforms to one another.

5 **35.** The apparatus of claim **28**, wherein:

the at least one movable platform defines a first side and a second side generally opposite the first side;

10 each of the first side and the second side defines an opening;

the apparatus further comprising:

15 a compartment extending between the first side and the second side and communicating with the opening in each of the first side and the second side; and

a door pivotally attached to the movable platform for selectively allowing access to the compartment.

20

36. The apparatus of claim **28**, wherein:

the at least one movable platform includes a plurality of wheels that permit the movable platform to move about the support surface.

25

37. The apparatus of claim **28**, wherein:

at least one of the wing assembly support sections defines a compartment;

30 the apparatus further comprising:

at least one access door that is in communication with the compartment.

38. The apparatus of claim 28, wherein:

5

at least one of the wing assembly support sections includes a movable table interposed between the at least one of the wing assembly support sections and the at least one of the base sections being of a predetermined height approximating the differential height; and

10

the movable table is configured to allow relative generally rectilinear movement between the at least one of the wing assembly support section and the at least one of the base sections being of a predetermined height approximating the differential height.

15

39. The apparatus of claim 28, further comprising:

a respective movable bracket connected to each of the wing assembly connectors that allows the arm to move in a third plane.

20

40. The apparatus of claim 28, further comprising:

at least one outrigger connected to the at least one movable platform that stabilizes the at least one movable platform.

25

41. The apparatus of claim 28, wherein:

the at least one movable platform includes a plurality of movable platforms; and

each of the plurality of movable platforms includes at least one clamp mechanism that selectively joins the plurality of movable platforms to one another; and

the at least one movable platform includes a plurality of wheels that permit the movable platform to move about the support surface.

42. A method for supporting at least one wing assembly at a wing assembly support height relative, to a support surface, the method comprising the steps of:

providing the at least one wing assembly;

providing at least one movable platform having a first height;

providing a plurality of base sections, each having a different predetermined height with respect to one another;

providing a plurality of wing assembly support sections wherein each wing assembly support sections corresponds to a respective one of the base sections, and a respective wing assembly connector movable in a first plane and a second plane generally perpendicular with respect to the first plane on each of the wing assembly support sections;

each of the wing assembly support sections defining a bottom and each of the wing assembly connectors being at a second height from the bottom;

providing each of the at least two of the wing assembly connectors with load cells connected thereto, wherein each load cell automatically determines load placed on one connector;

providing each of the at least two of the wing assembly connectors with metrology devices connected thereto, wherein each metrology device automatically determines positional data for one connector;

5 providing a control system in communication with the load cells and the metrology devices;

10 aggregating the first height of the at least one movable platform and the second height of one of the wing assembly connectors from the bottom of one of the wing assembly support sections;

determining a differential height by comparing the aggregated first height and second height to the wing assembly support height;

15 selecting one of the plurality of base sections of a predetermined height approximating the differential height and positioning the selected one of the plurality of base sections upon the at least one movable platform;

20 positioning the one of the wing assembly support sections on top of the selected one of the plurality of base sections; and

connecting the one of the wing assembly connectors to the at least one wing assembly for supporting the at least one wing assembly.

25 **43.** The method of claim **42**, further comprising:

30 providing a respective elevator device connected to each of the at least two wing assembly connectors, the elevator devices being operable to automatically move arms of the at least two wing assembly connectors in the second plane.

44. The method of claim **42**, further comprising:

moving the at least one wing assembly across the support surface.

5

45. The method of claim **44**, further comprising:


adjusting the wing assembly connectors along the second plane with the
elevator devices in order to distribute or re-distribute load on the connectors as
measured by the load cells.

10



46. The method of claim **44**, further comprising:

adjusting the wing assembly connectors along one or more planes with the
elevator devices in order to establish or reestablish a jugged position as measured
by the metrology devices.

15

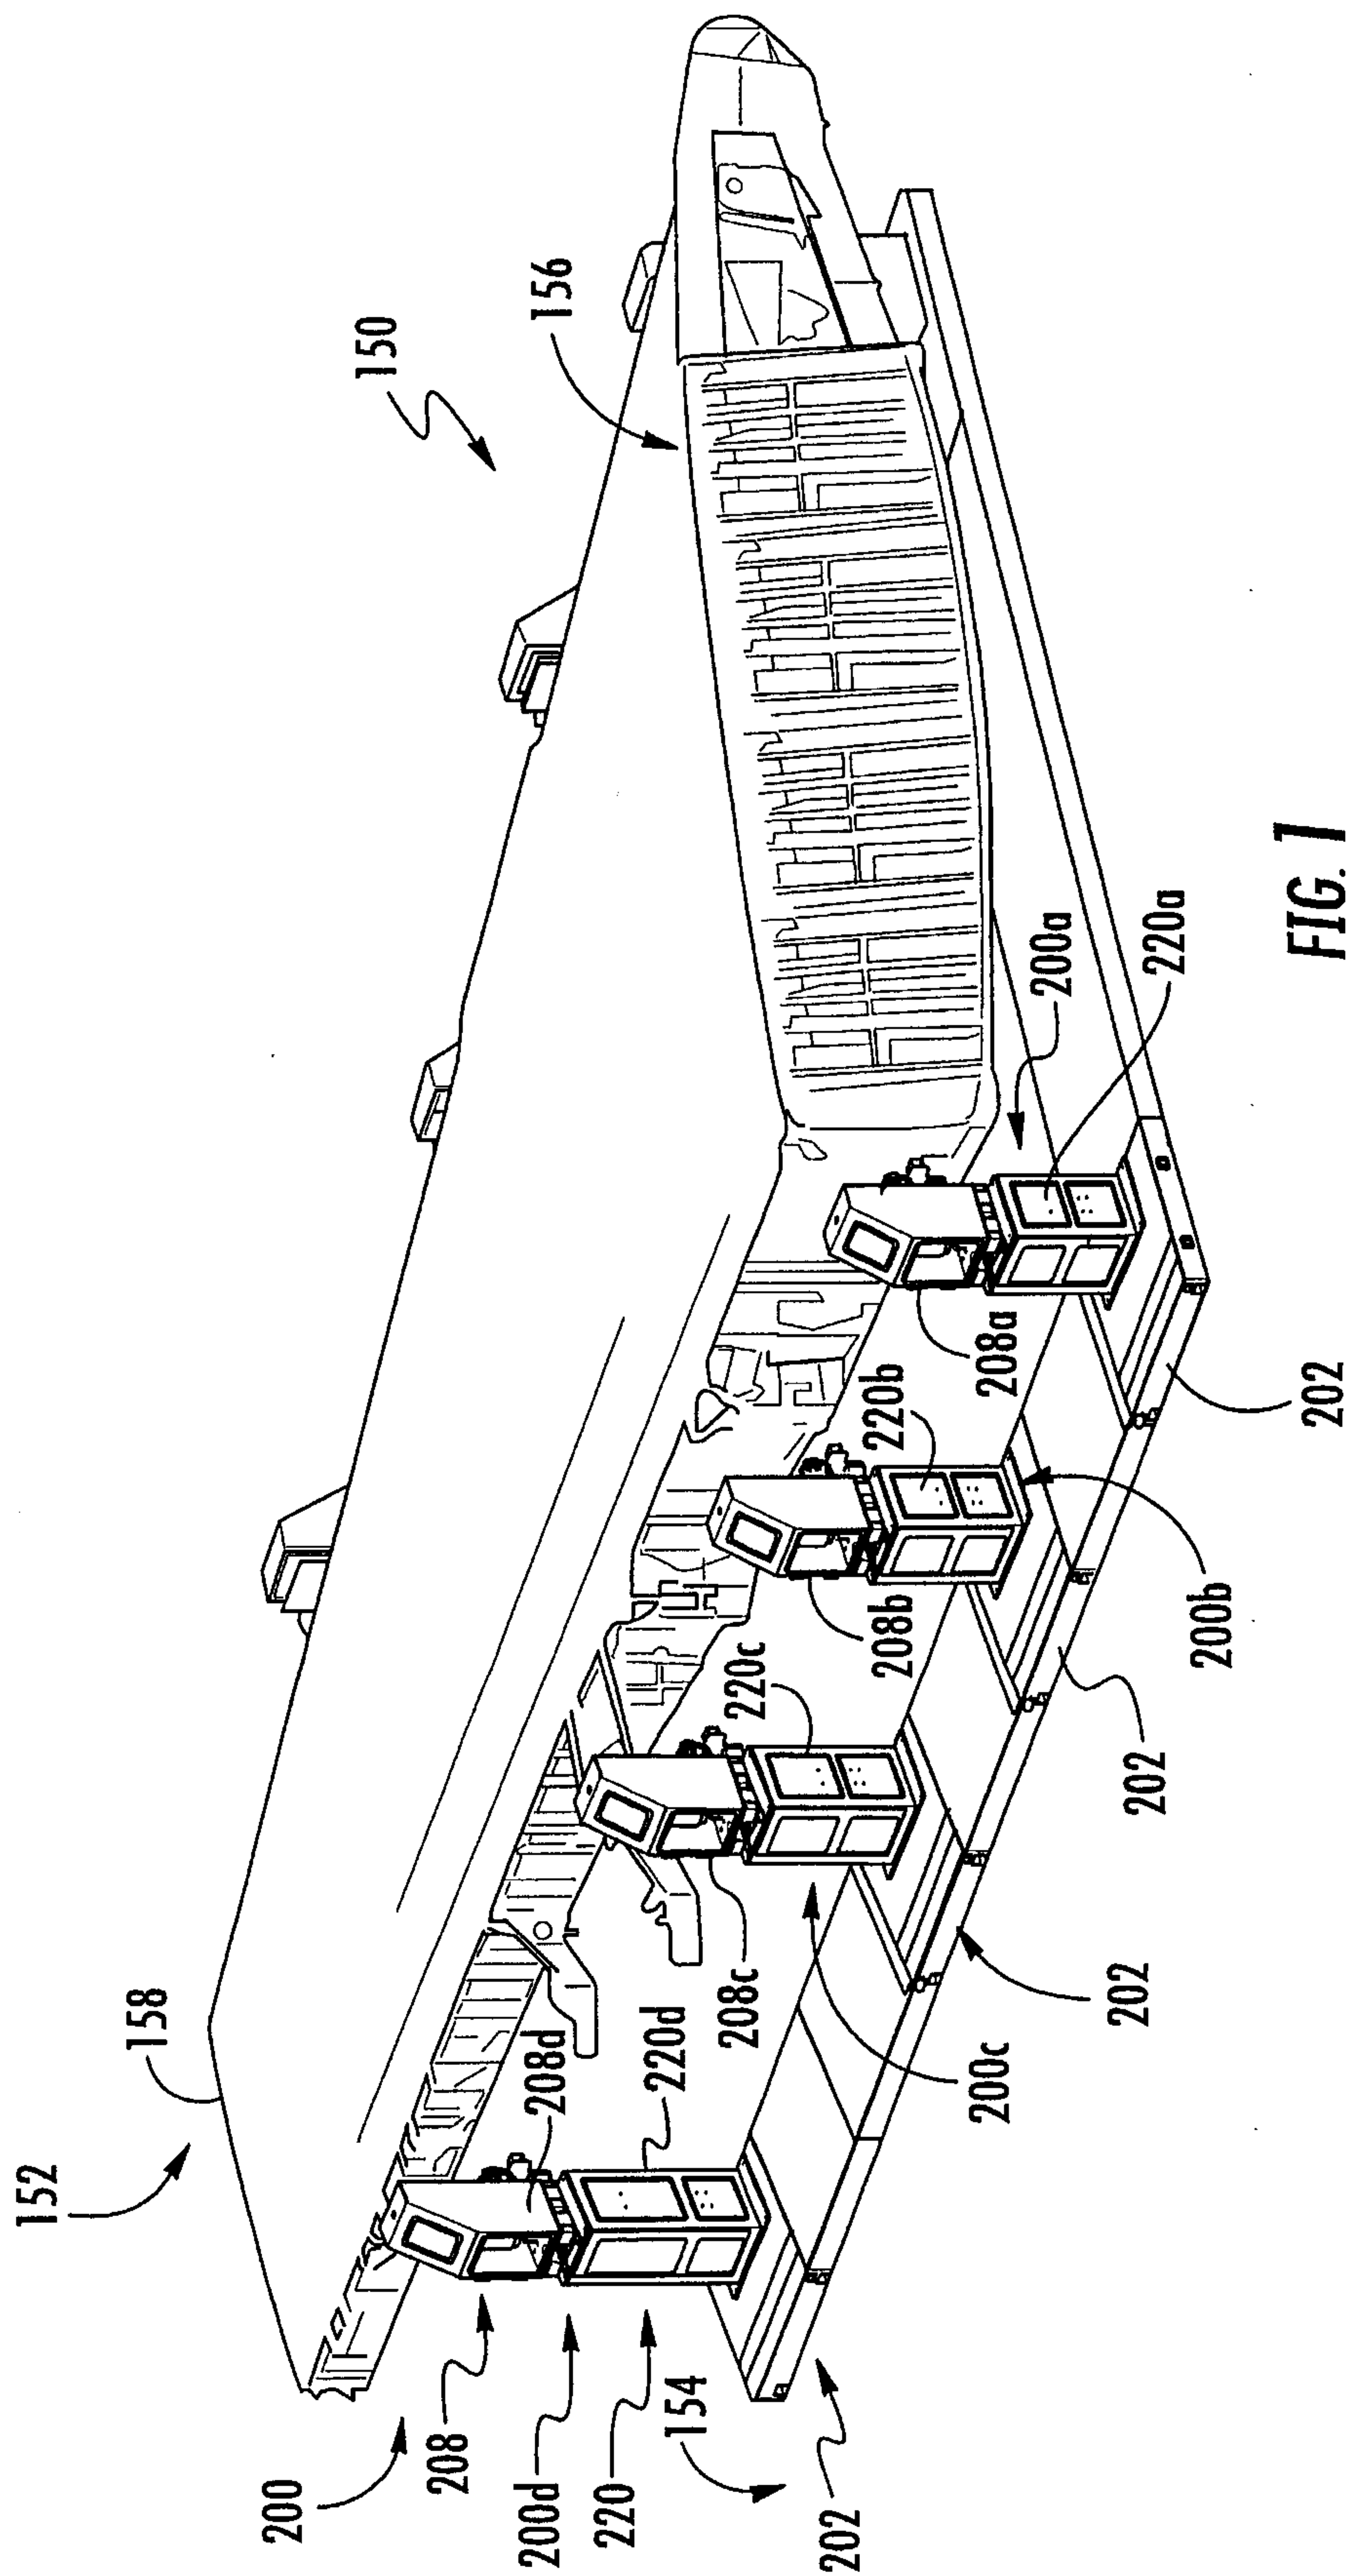

2/8

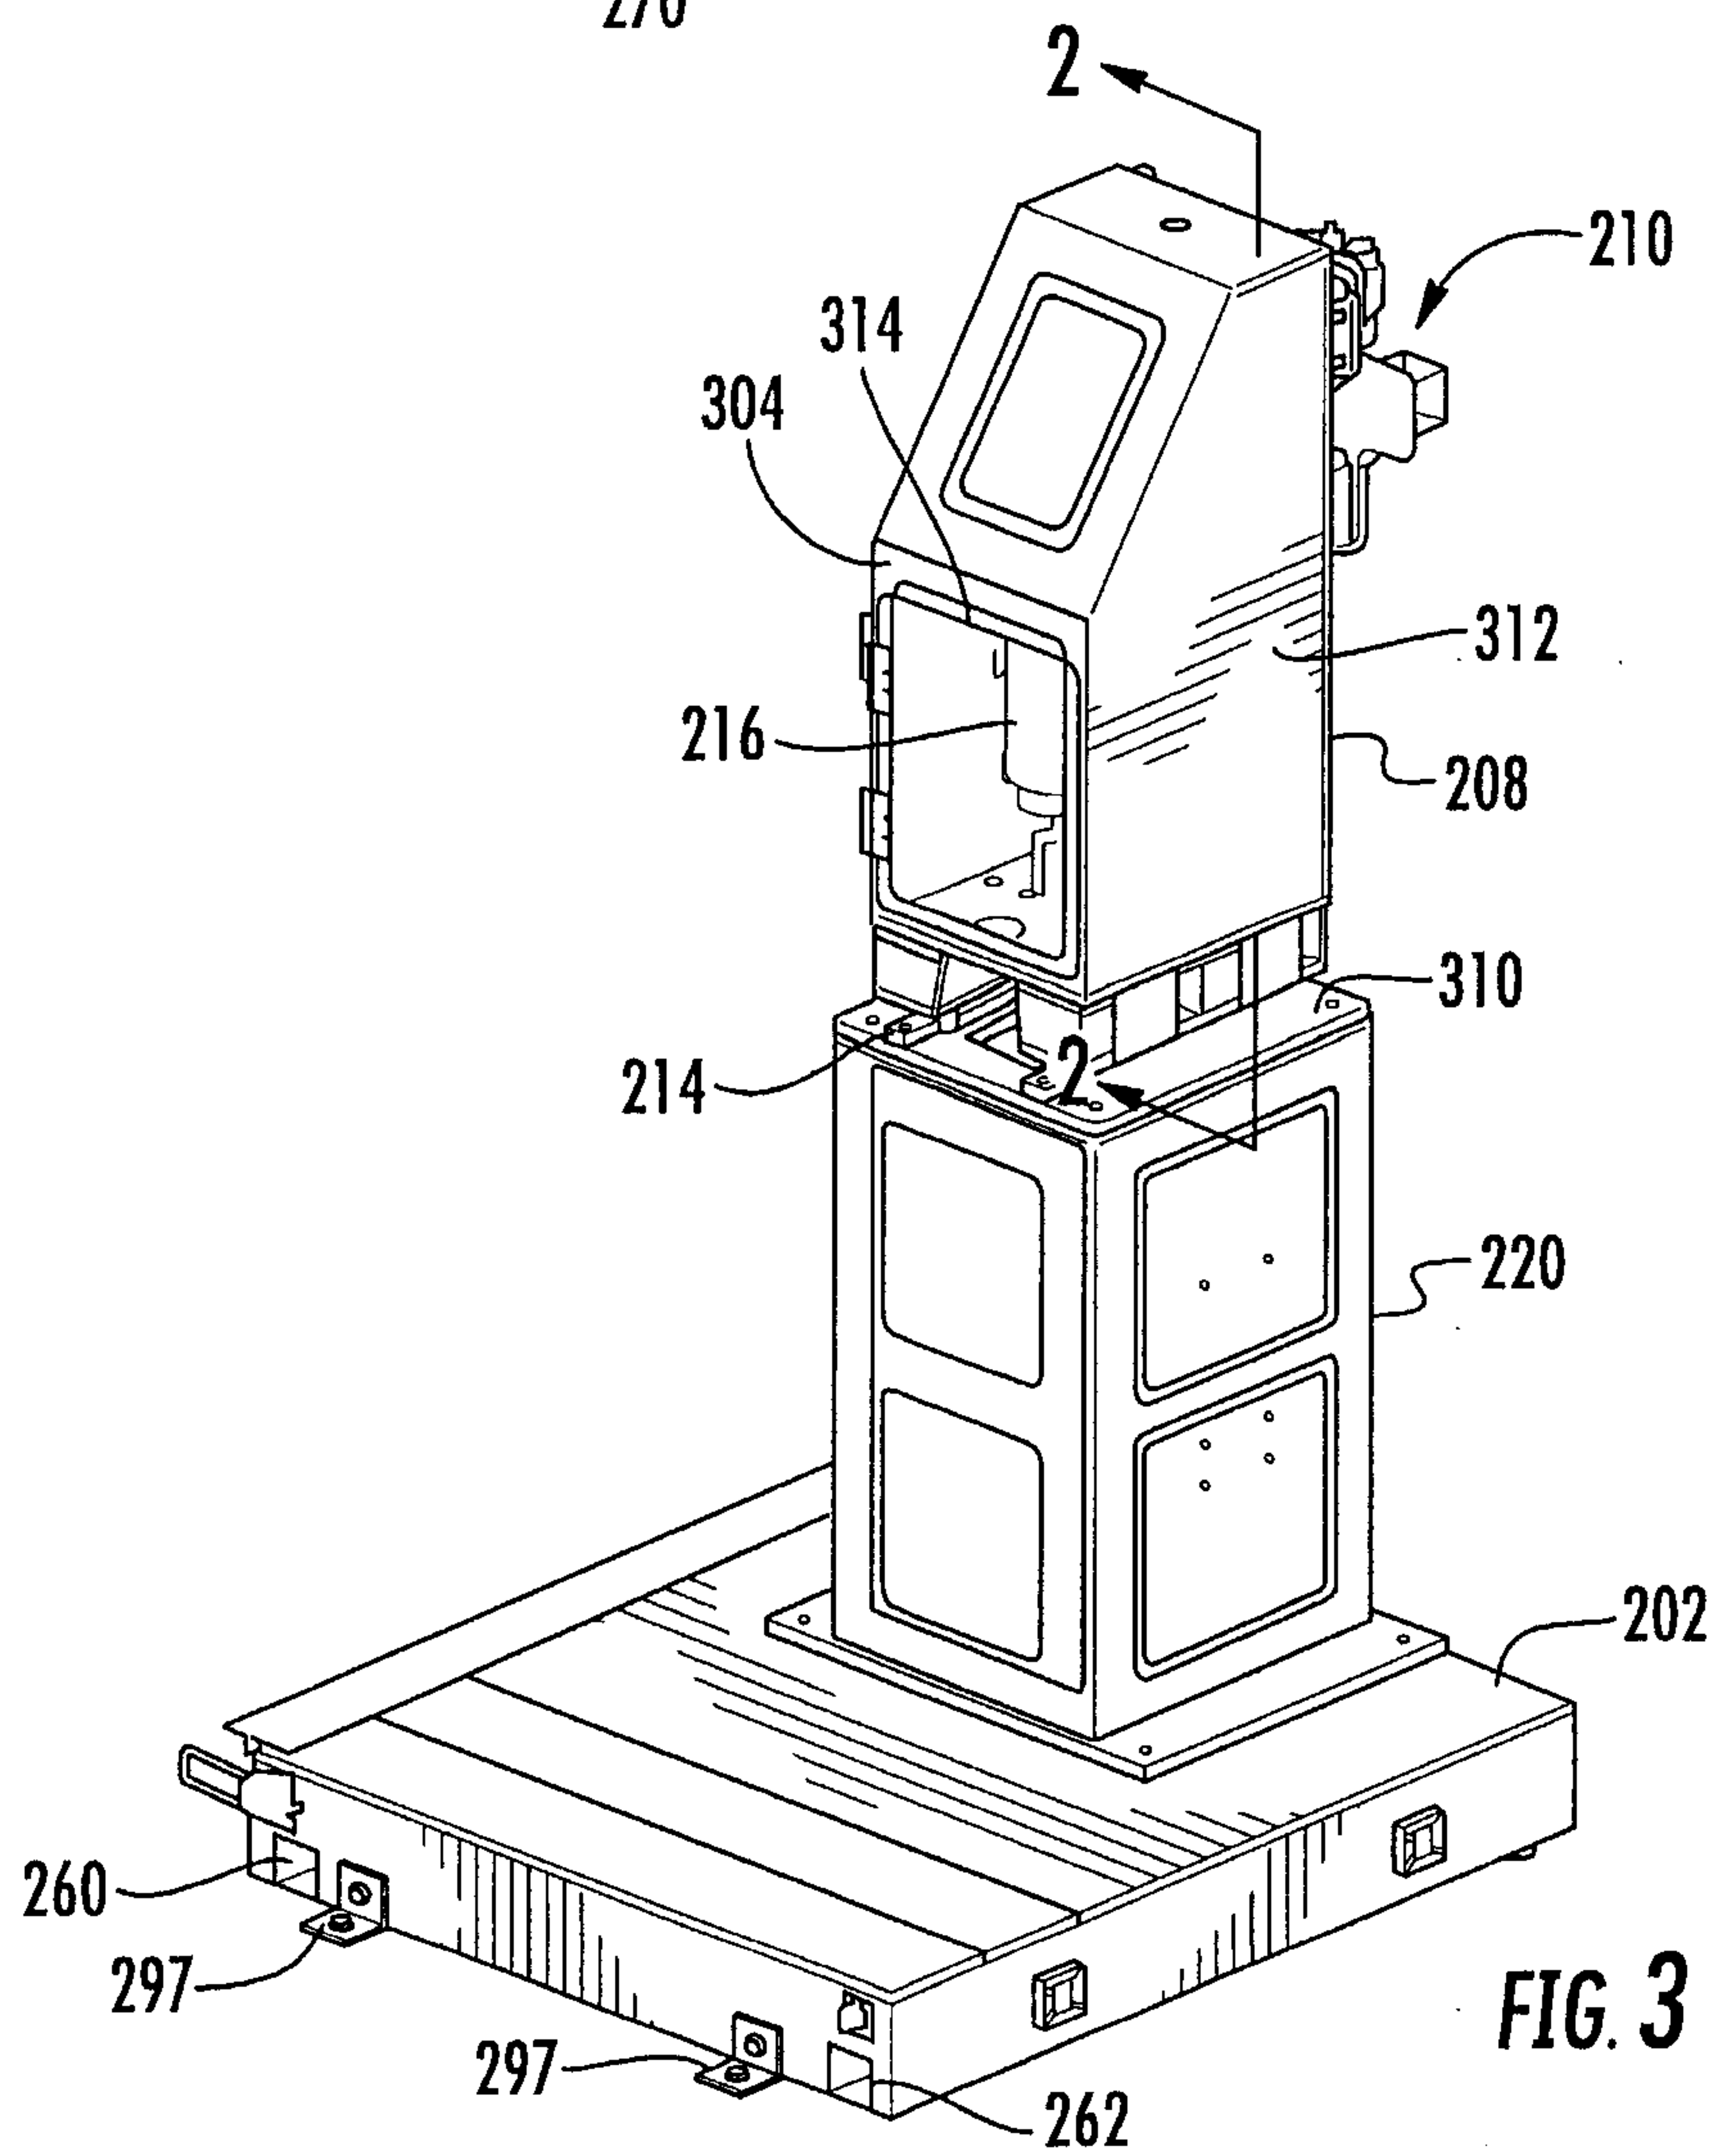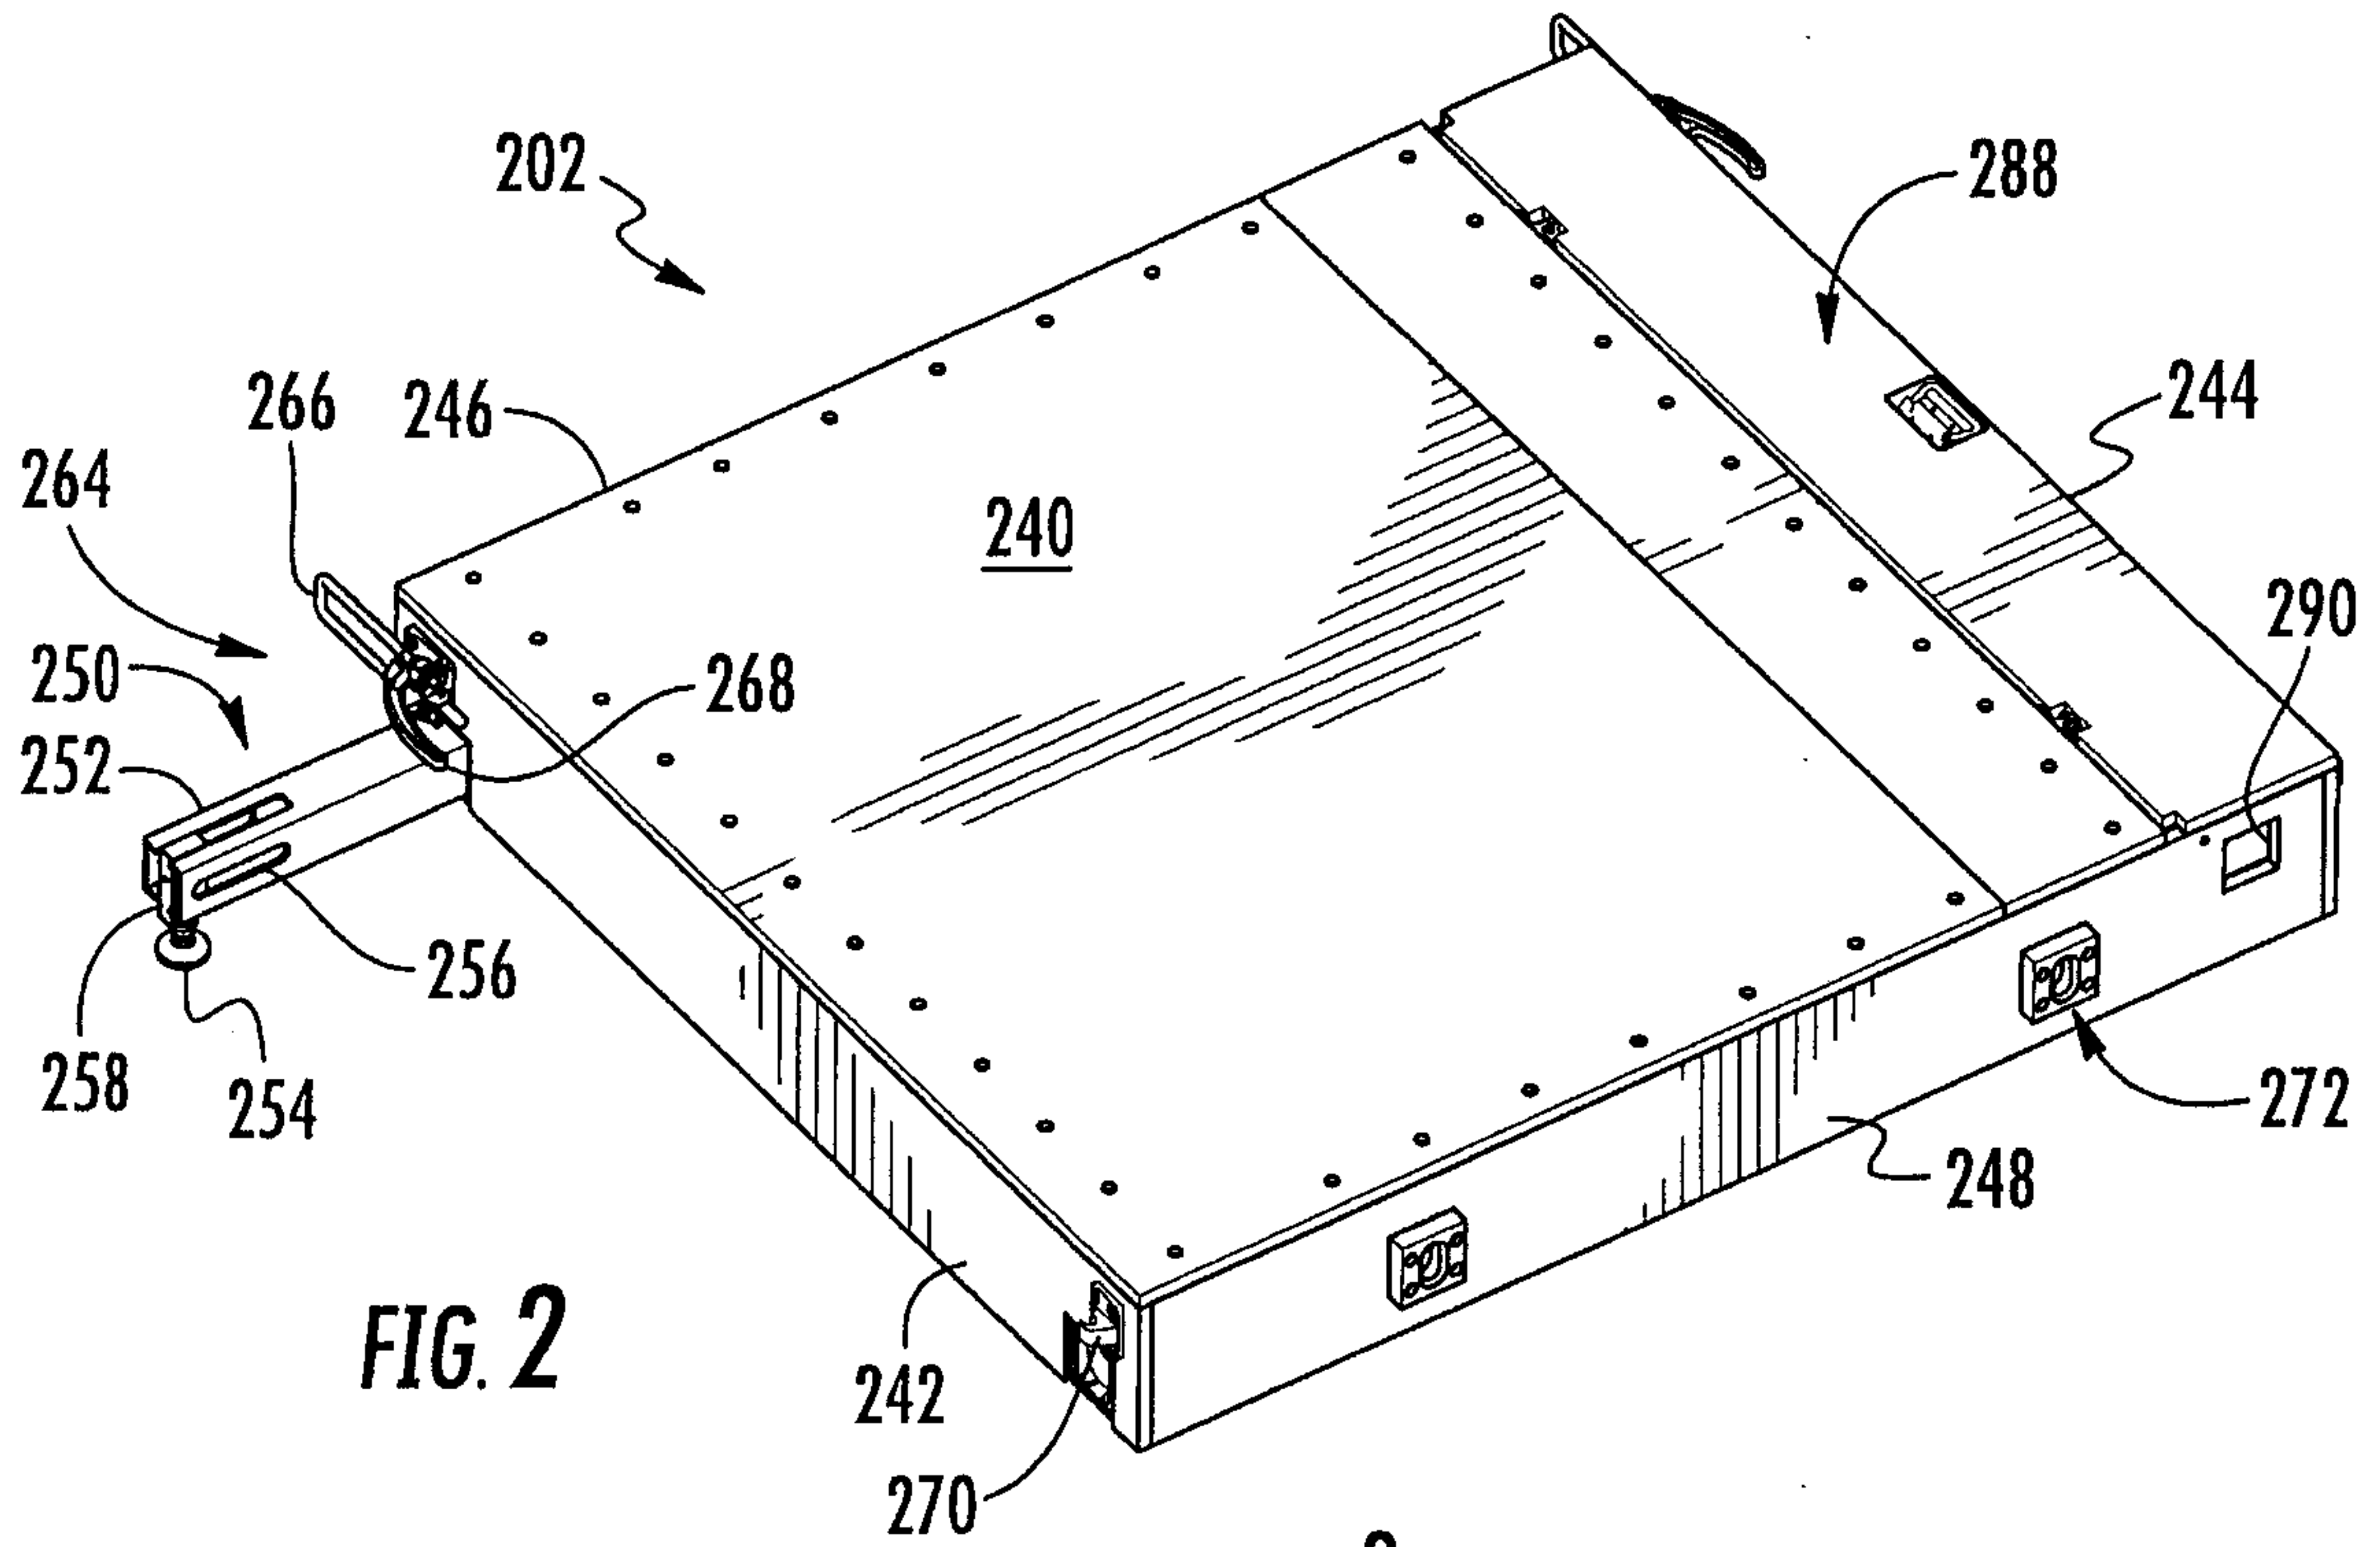

3/8



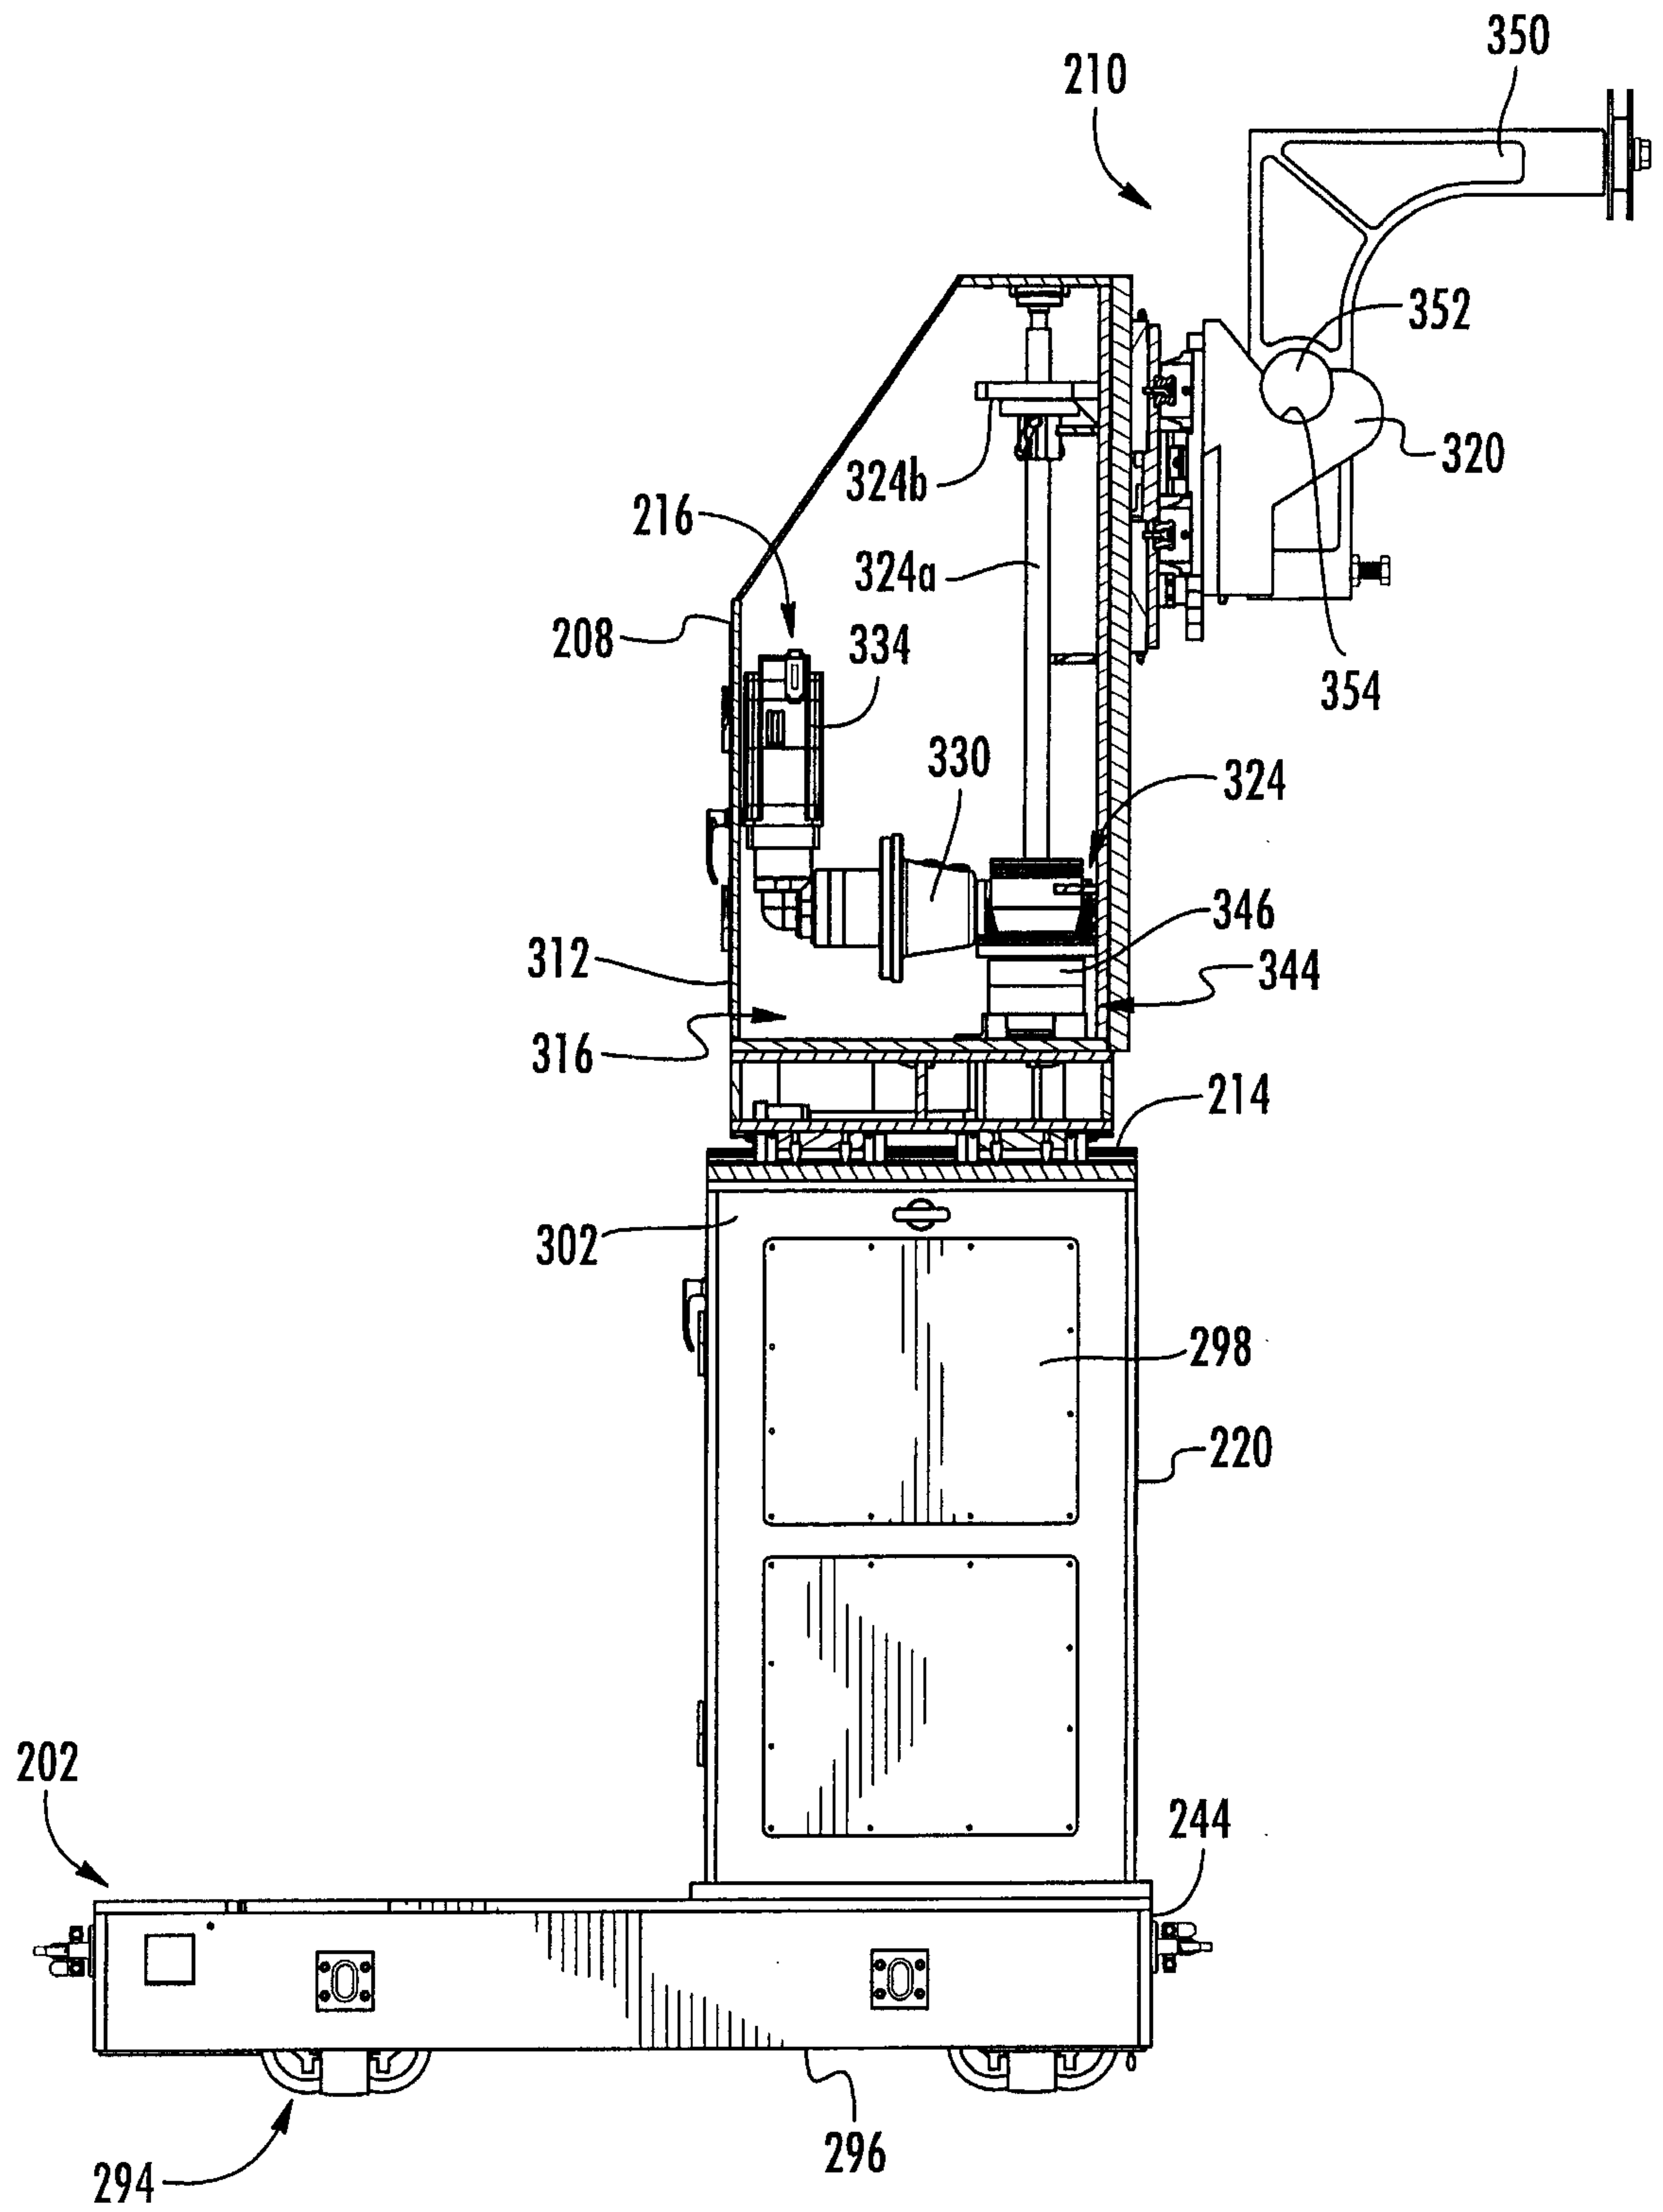


FIG. 4A

4/8

**FIG. 4B**

6/8

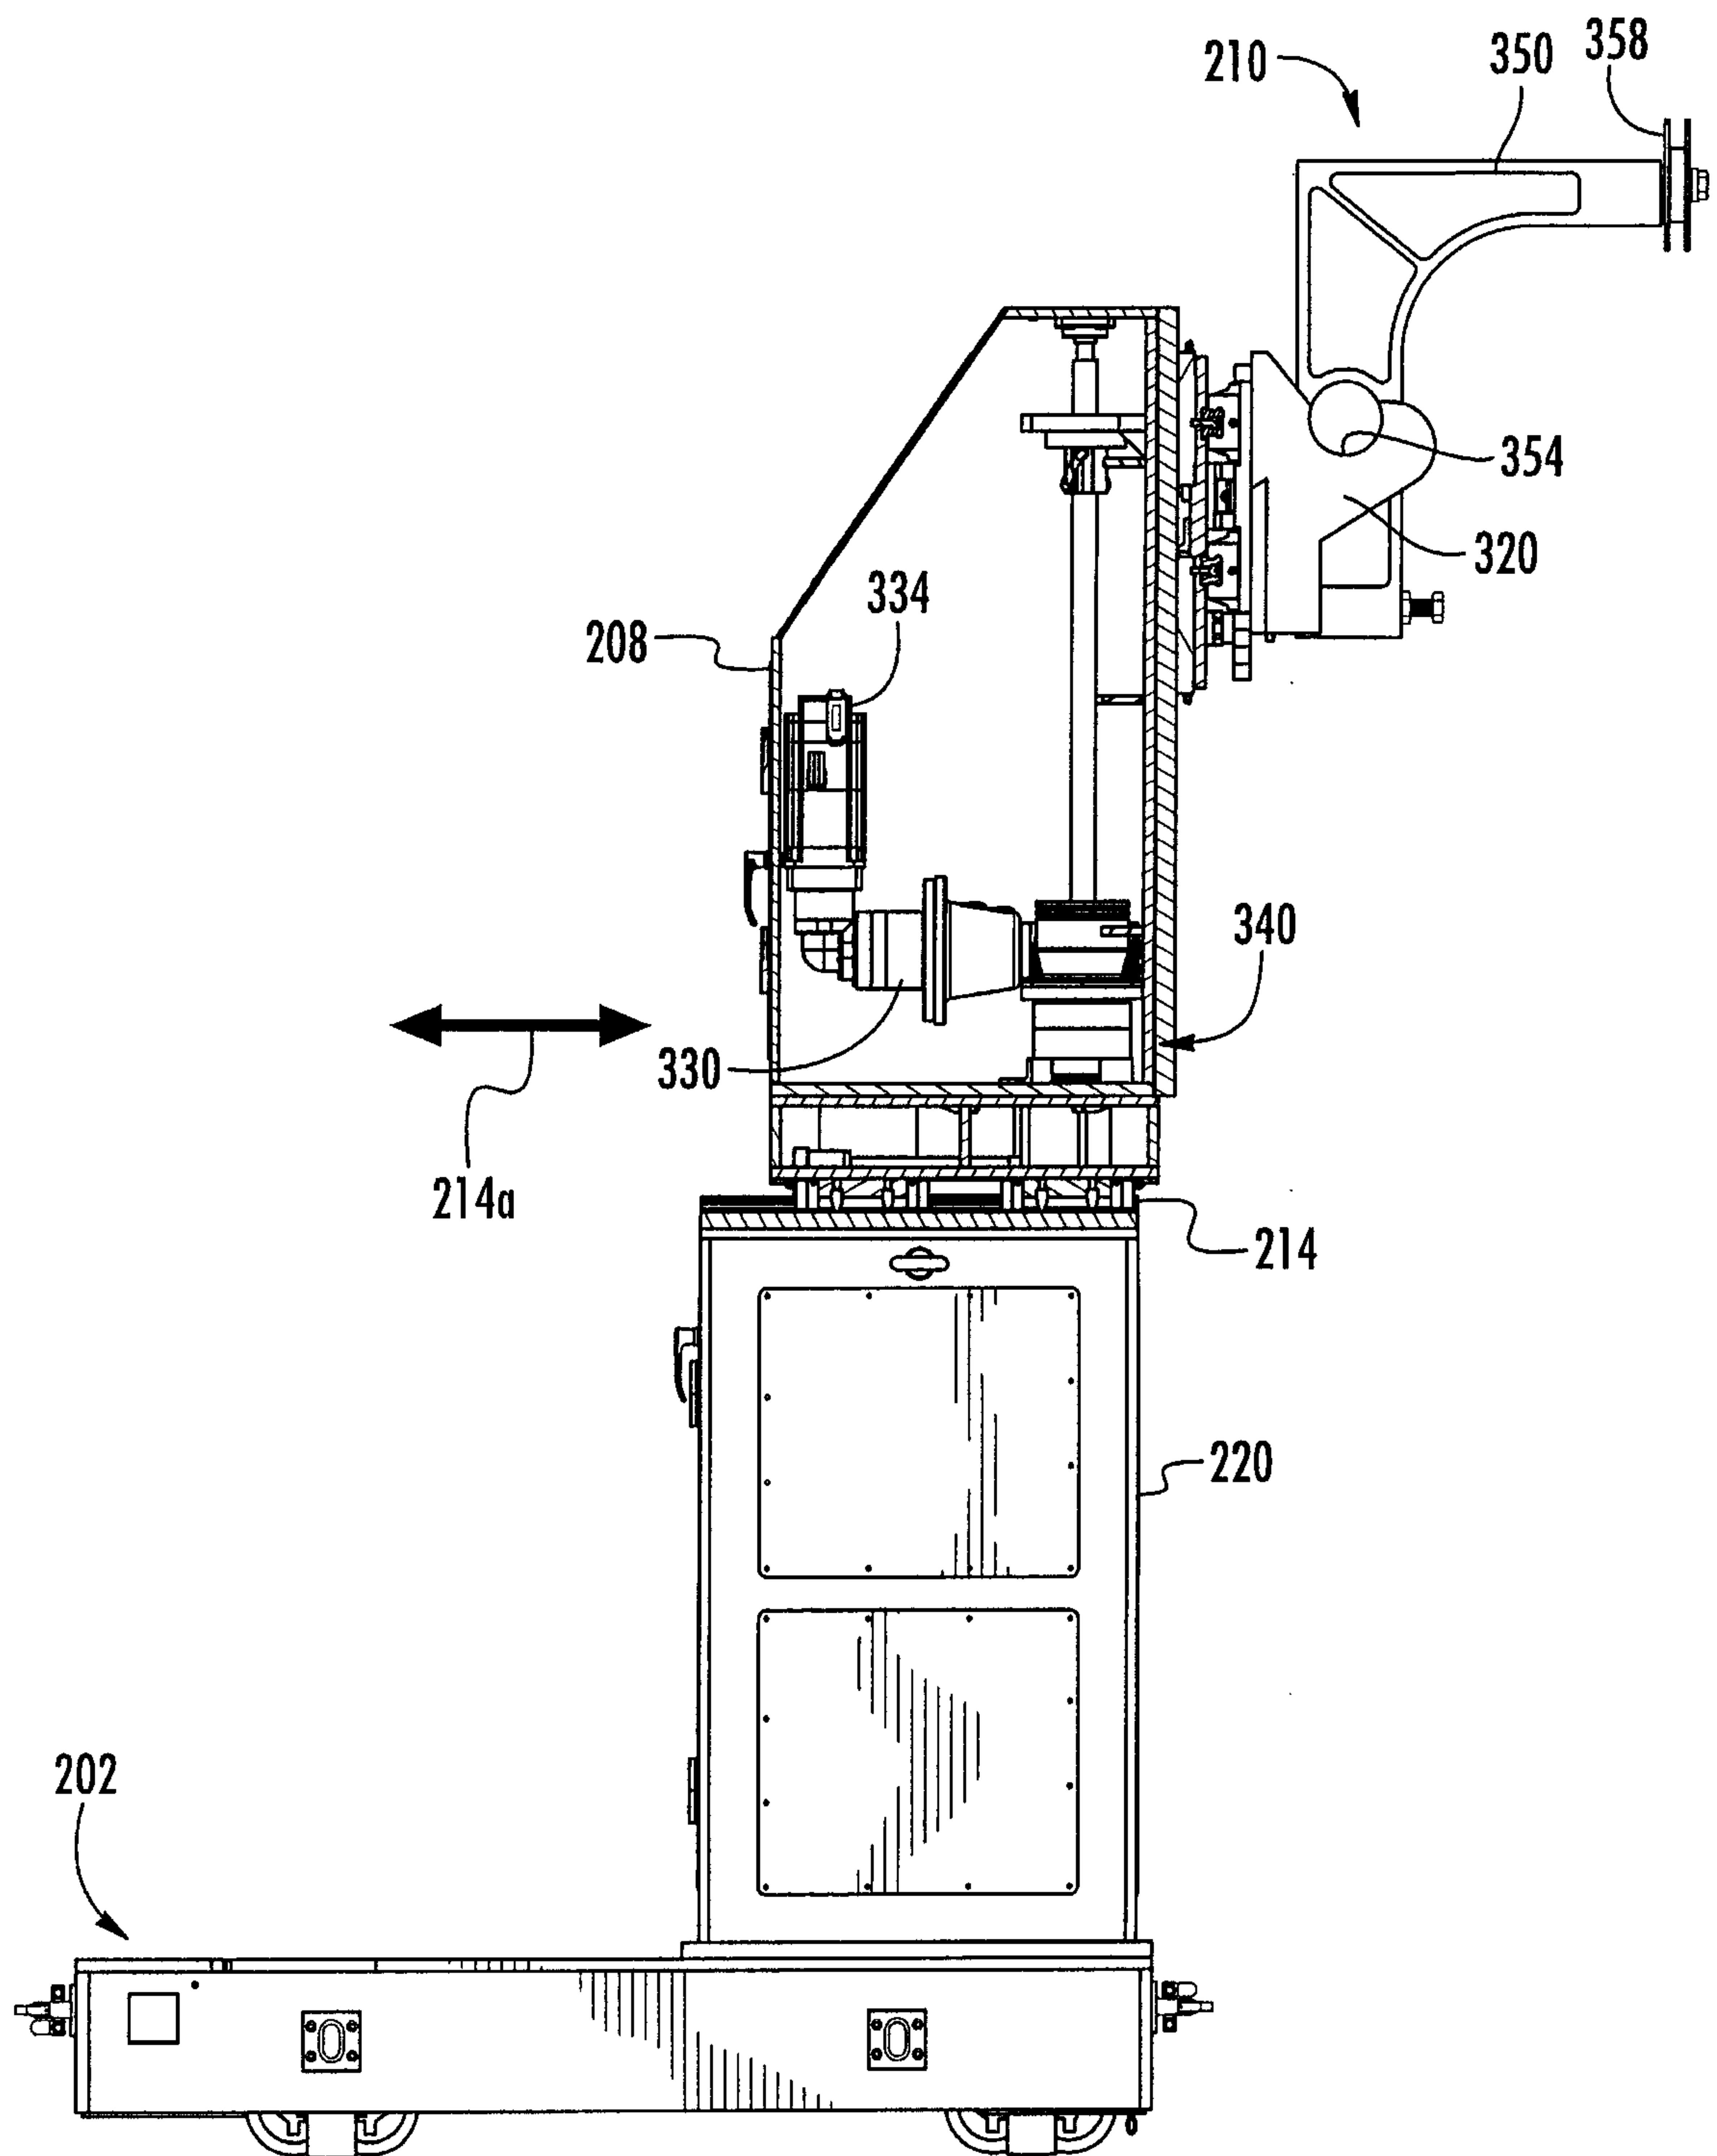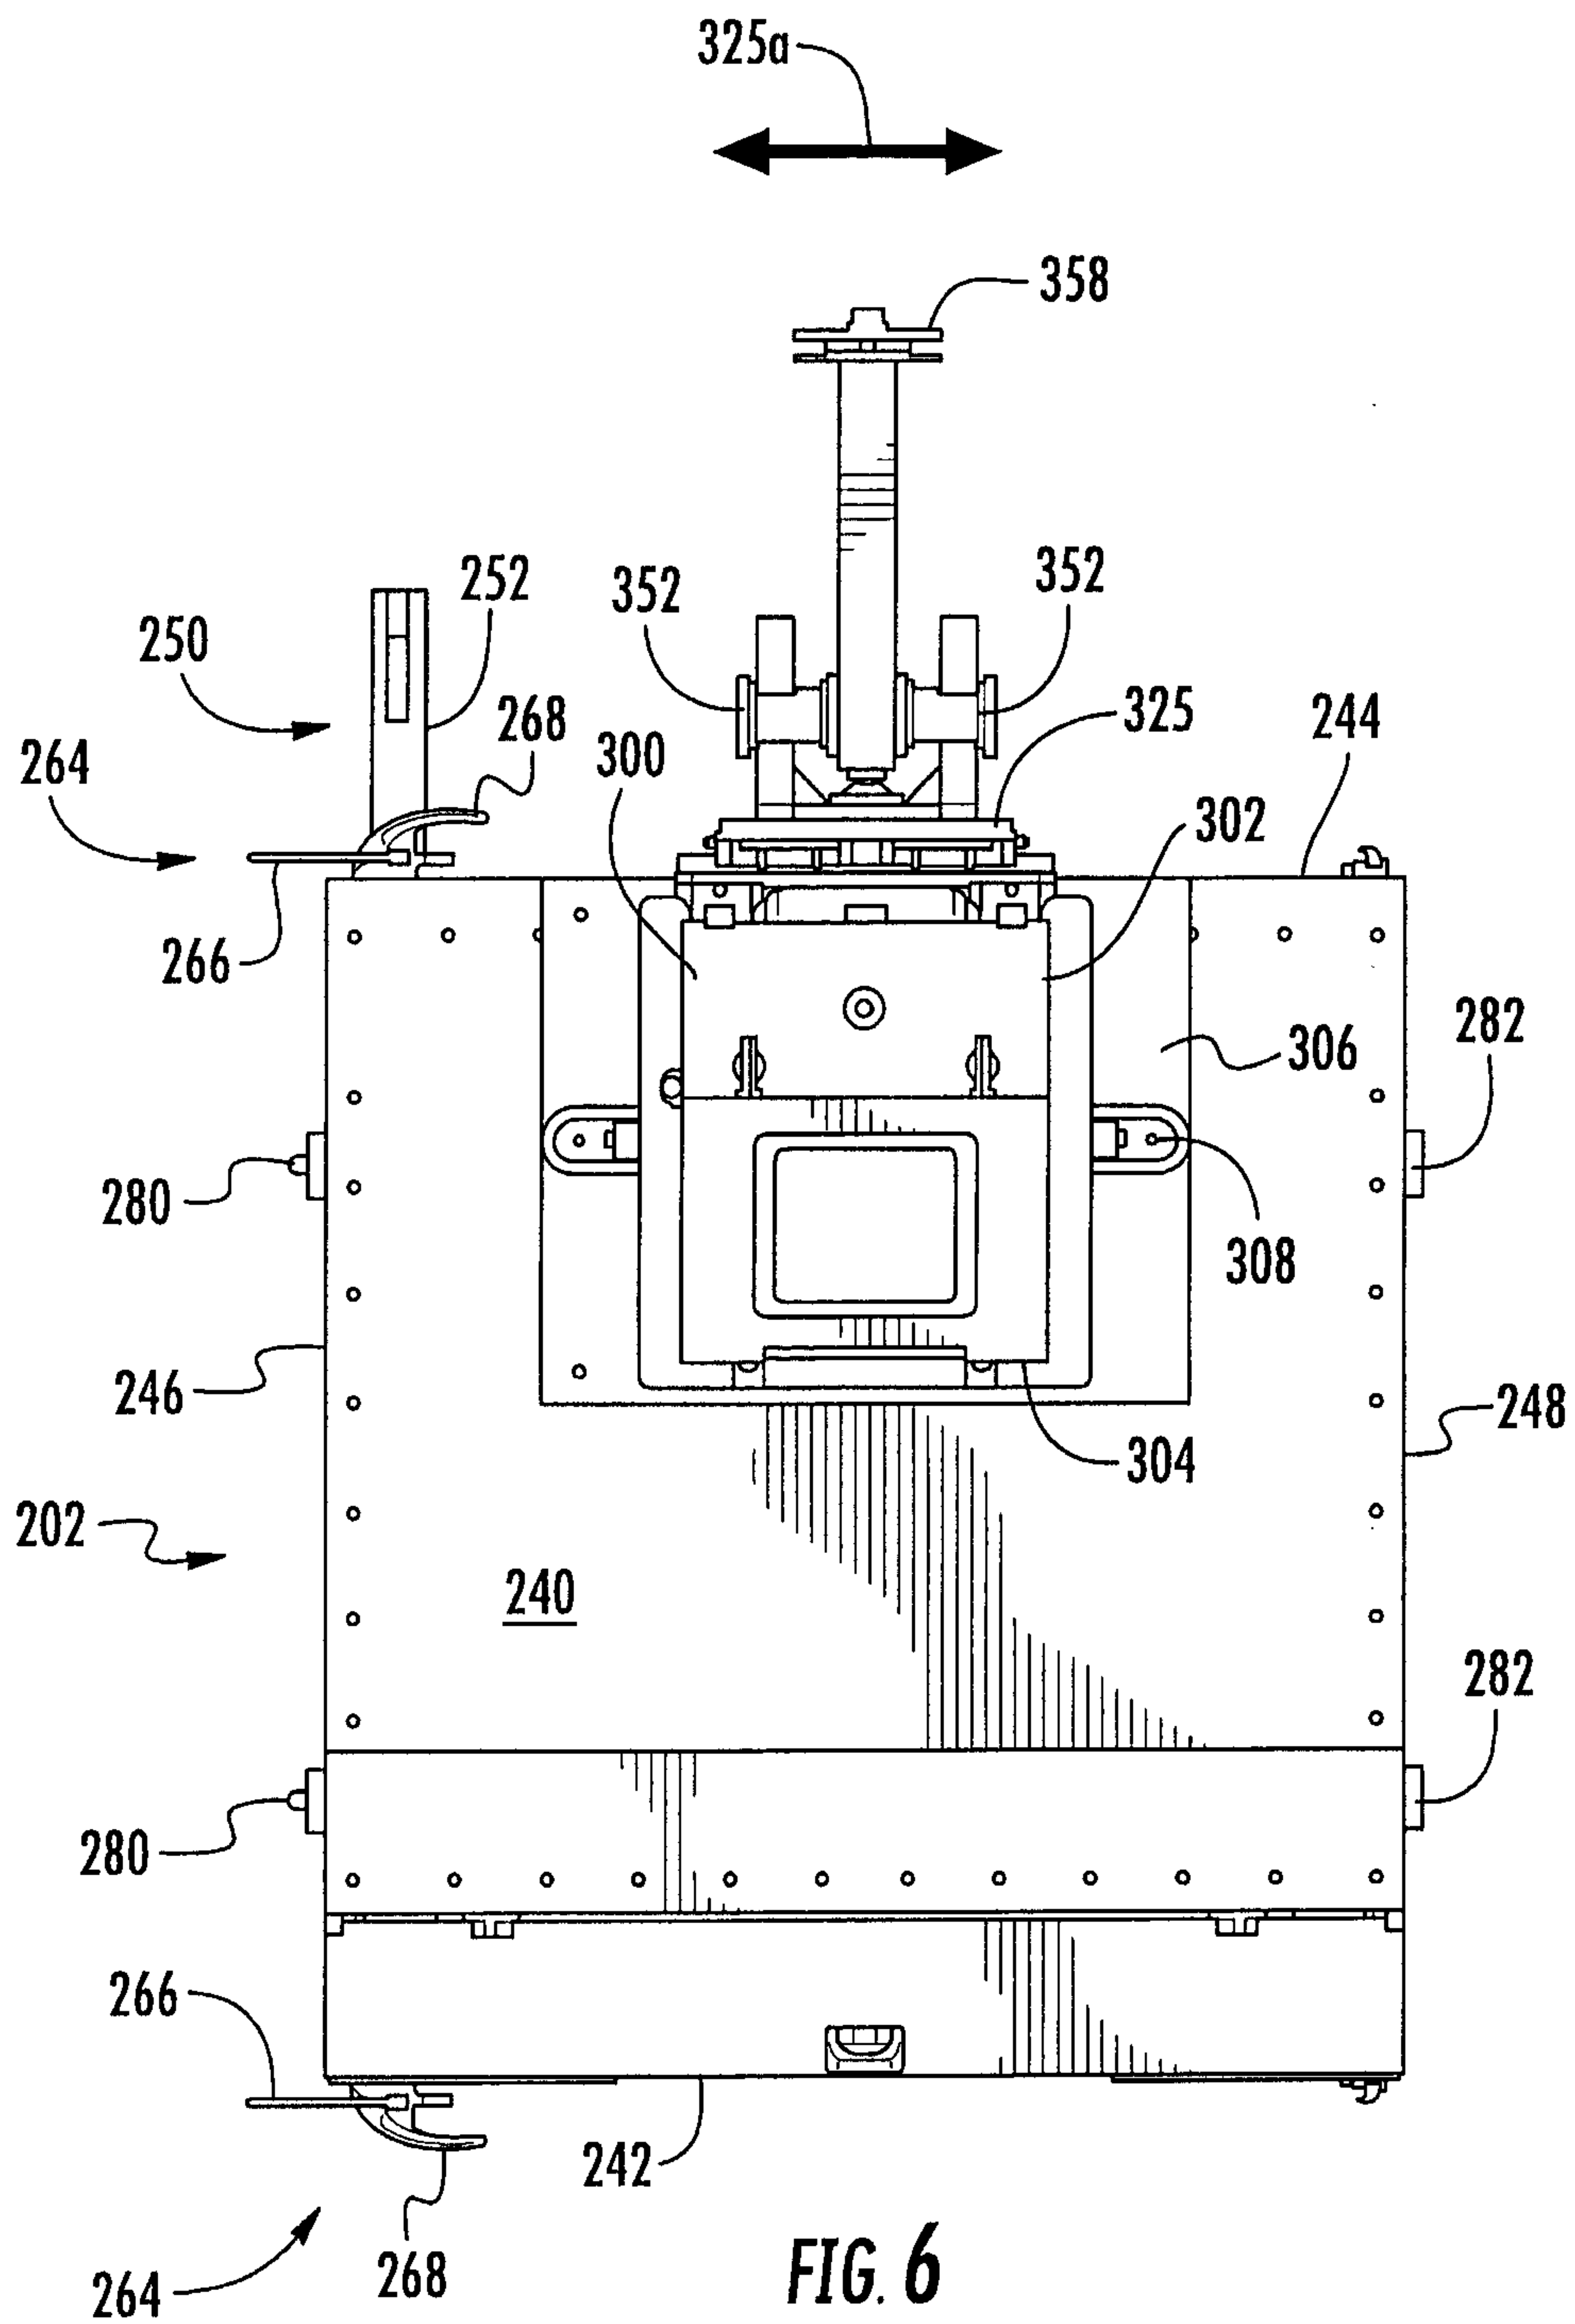

7/8

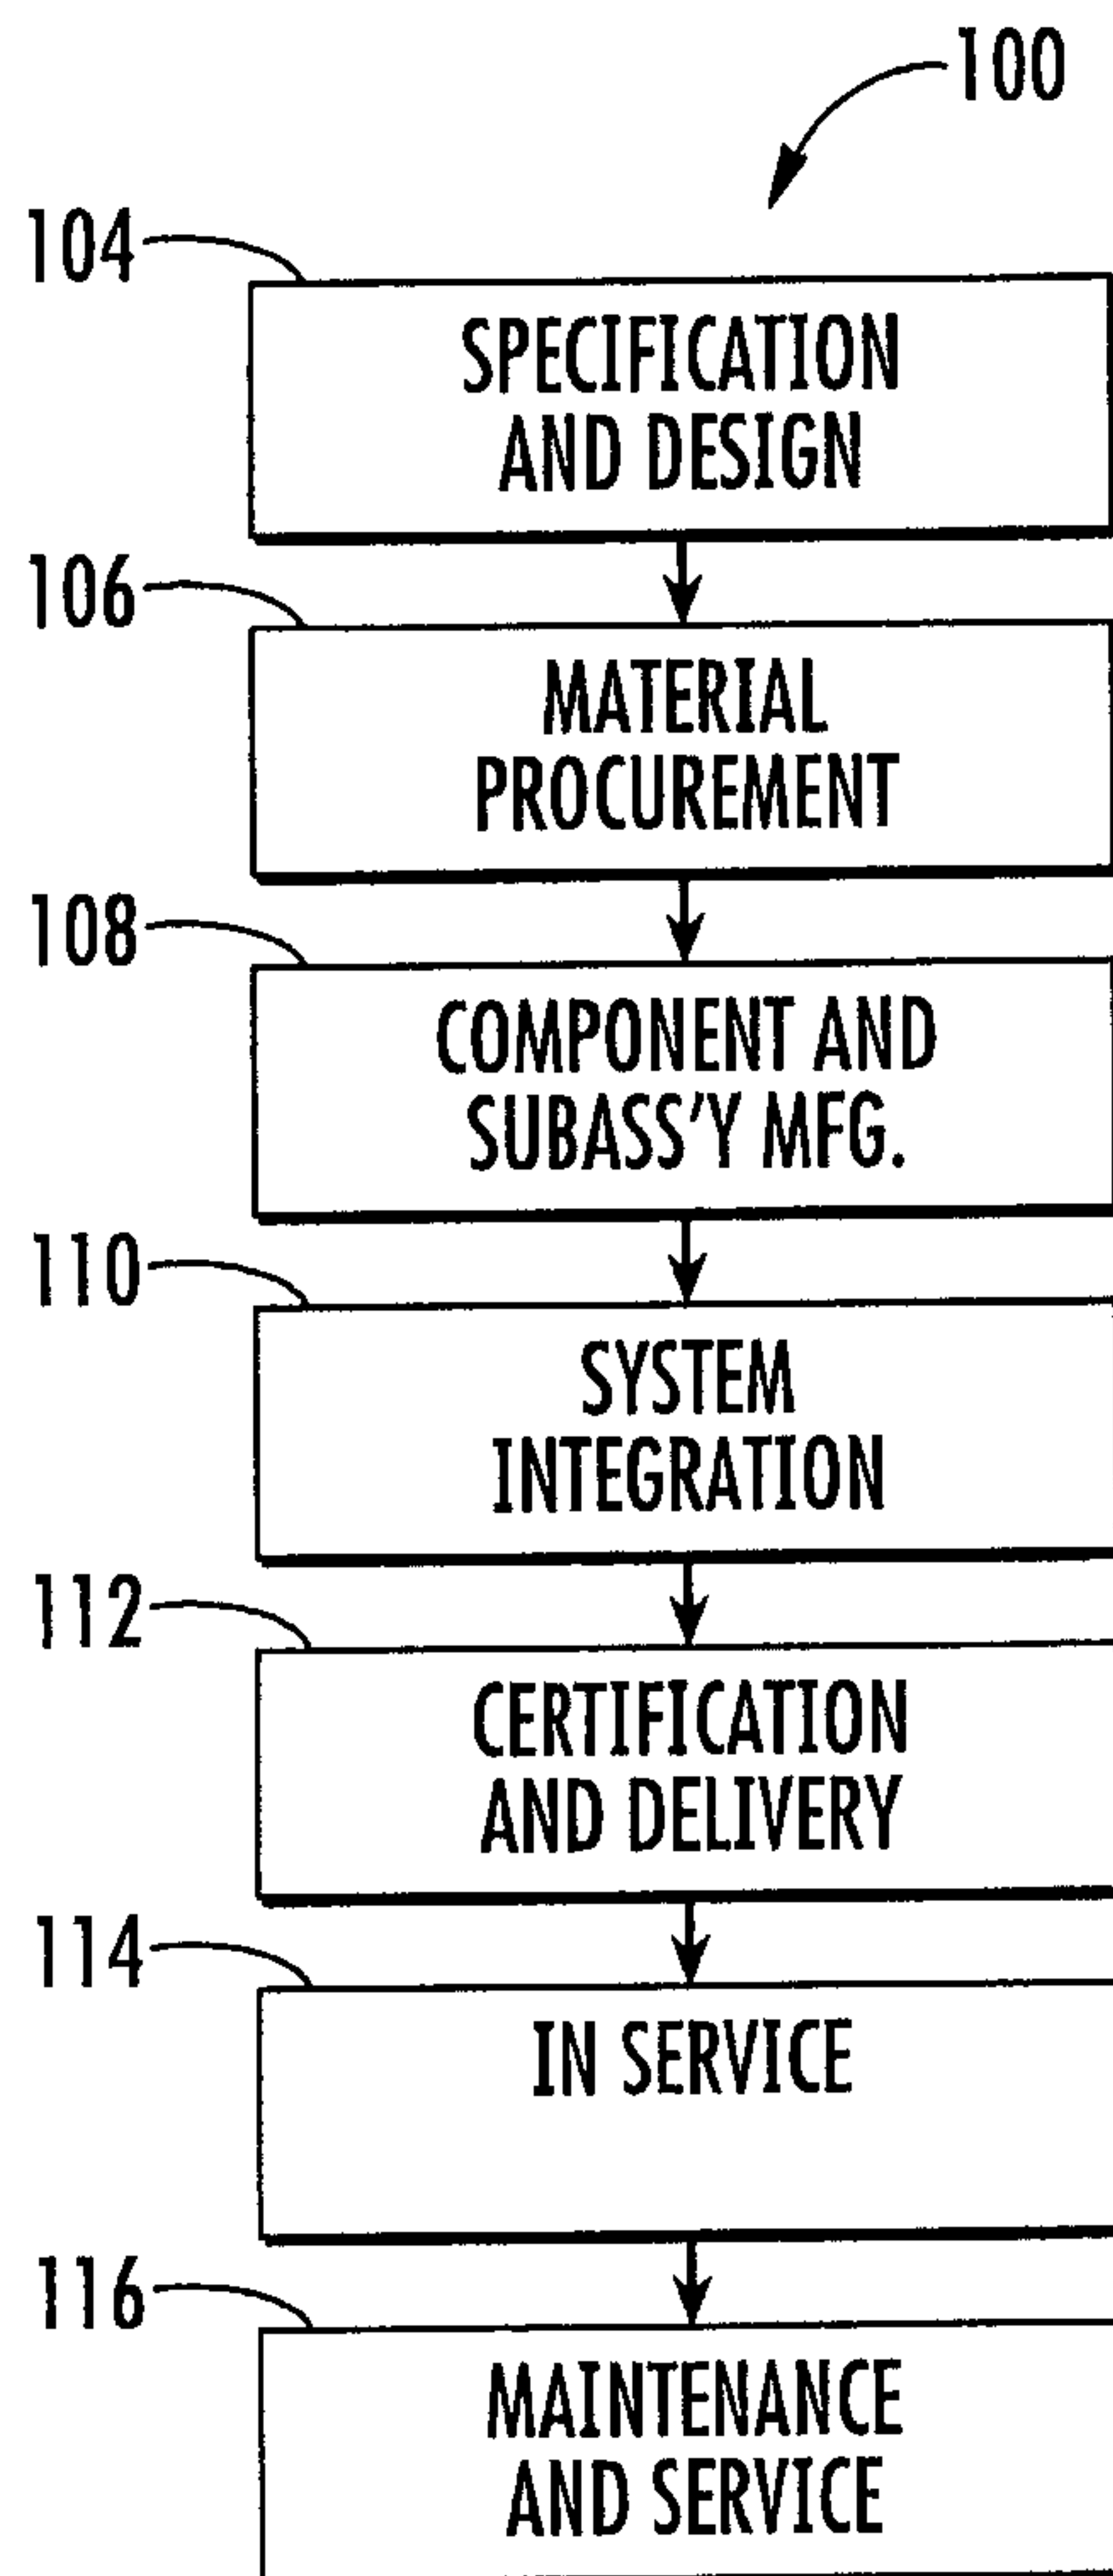


FIG. 7

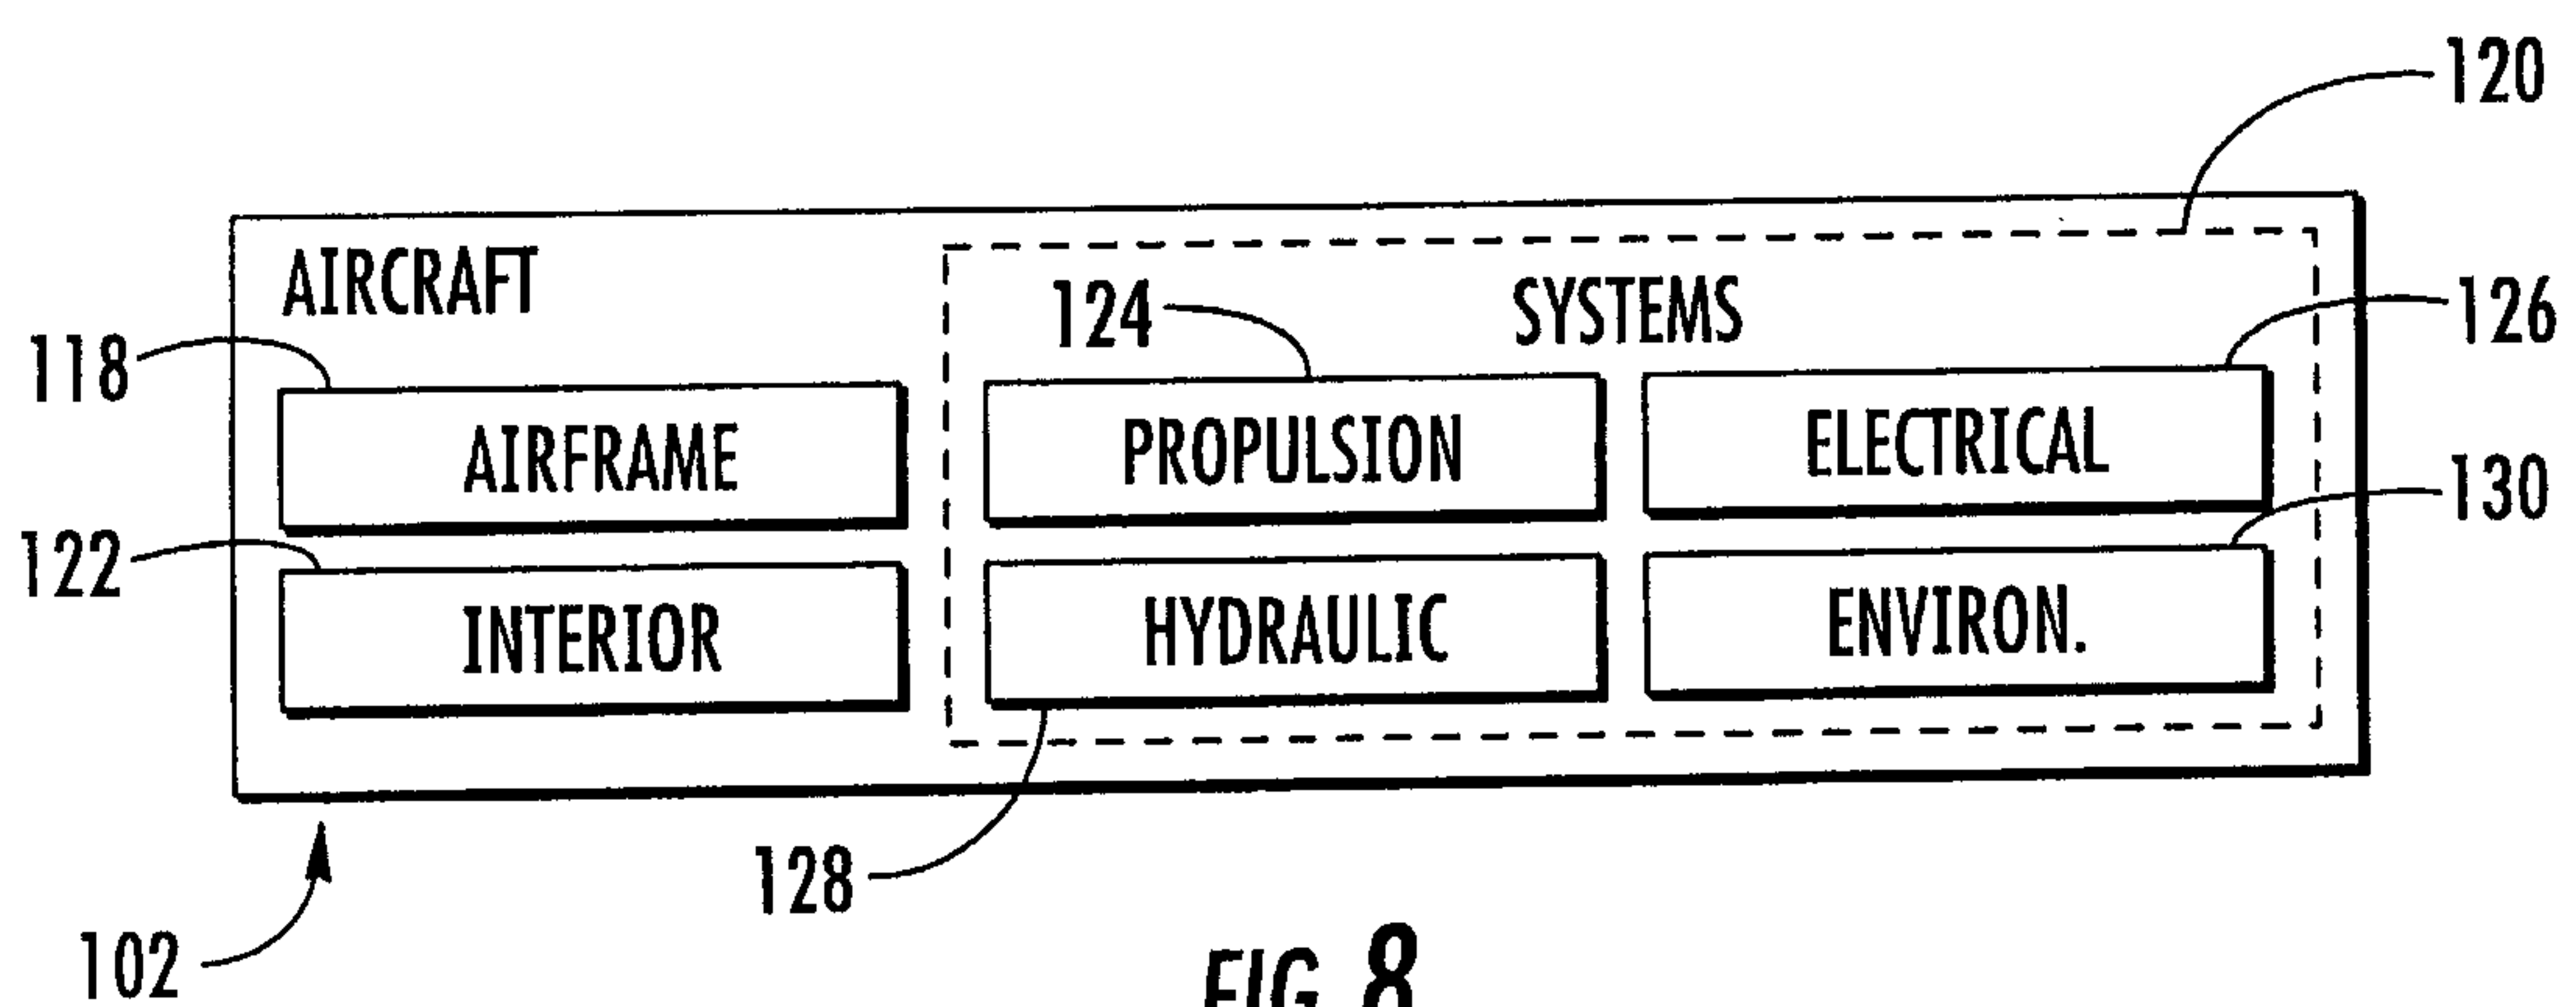


FIG. 8

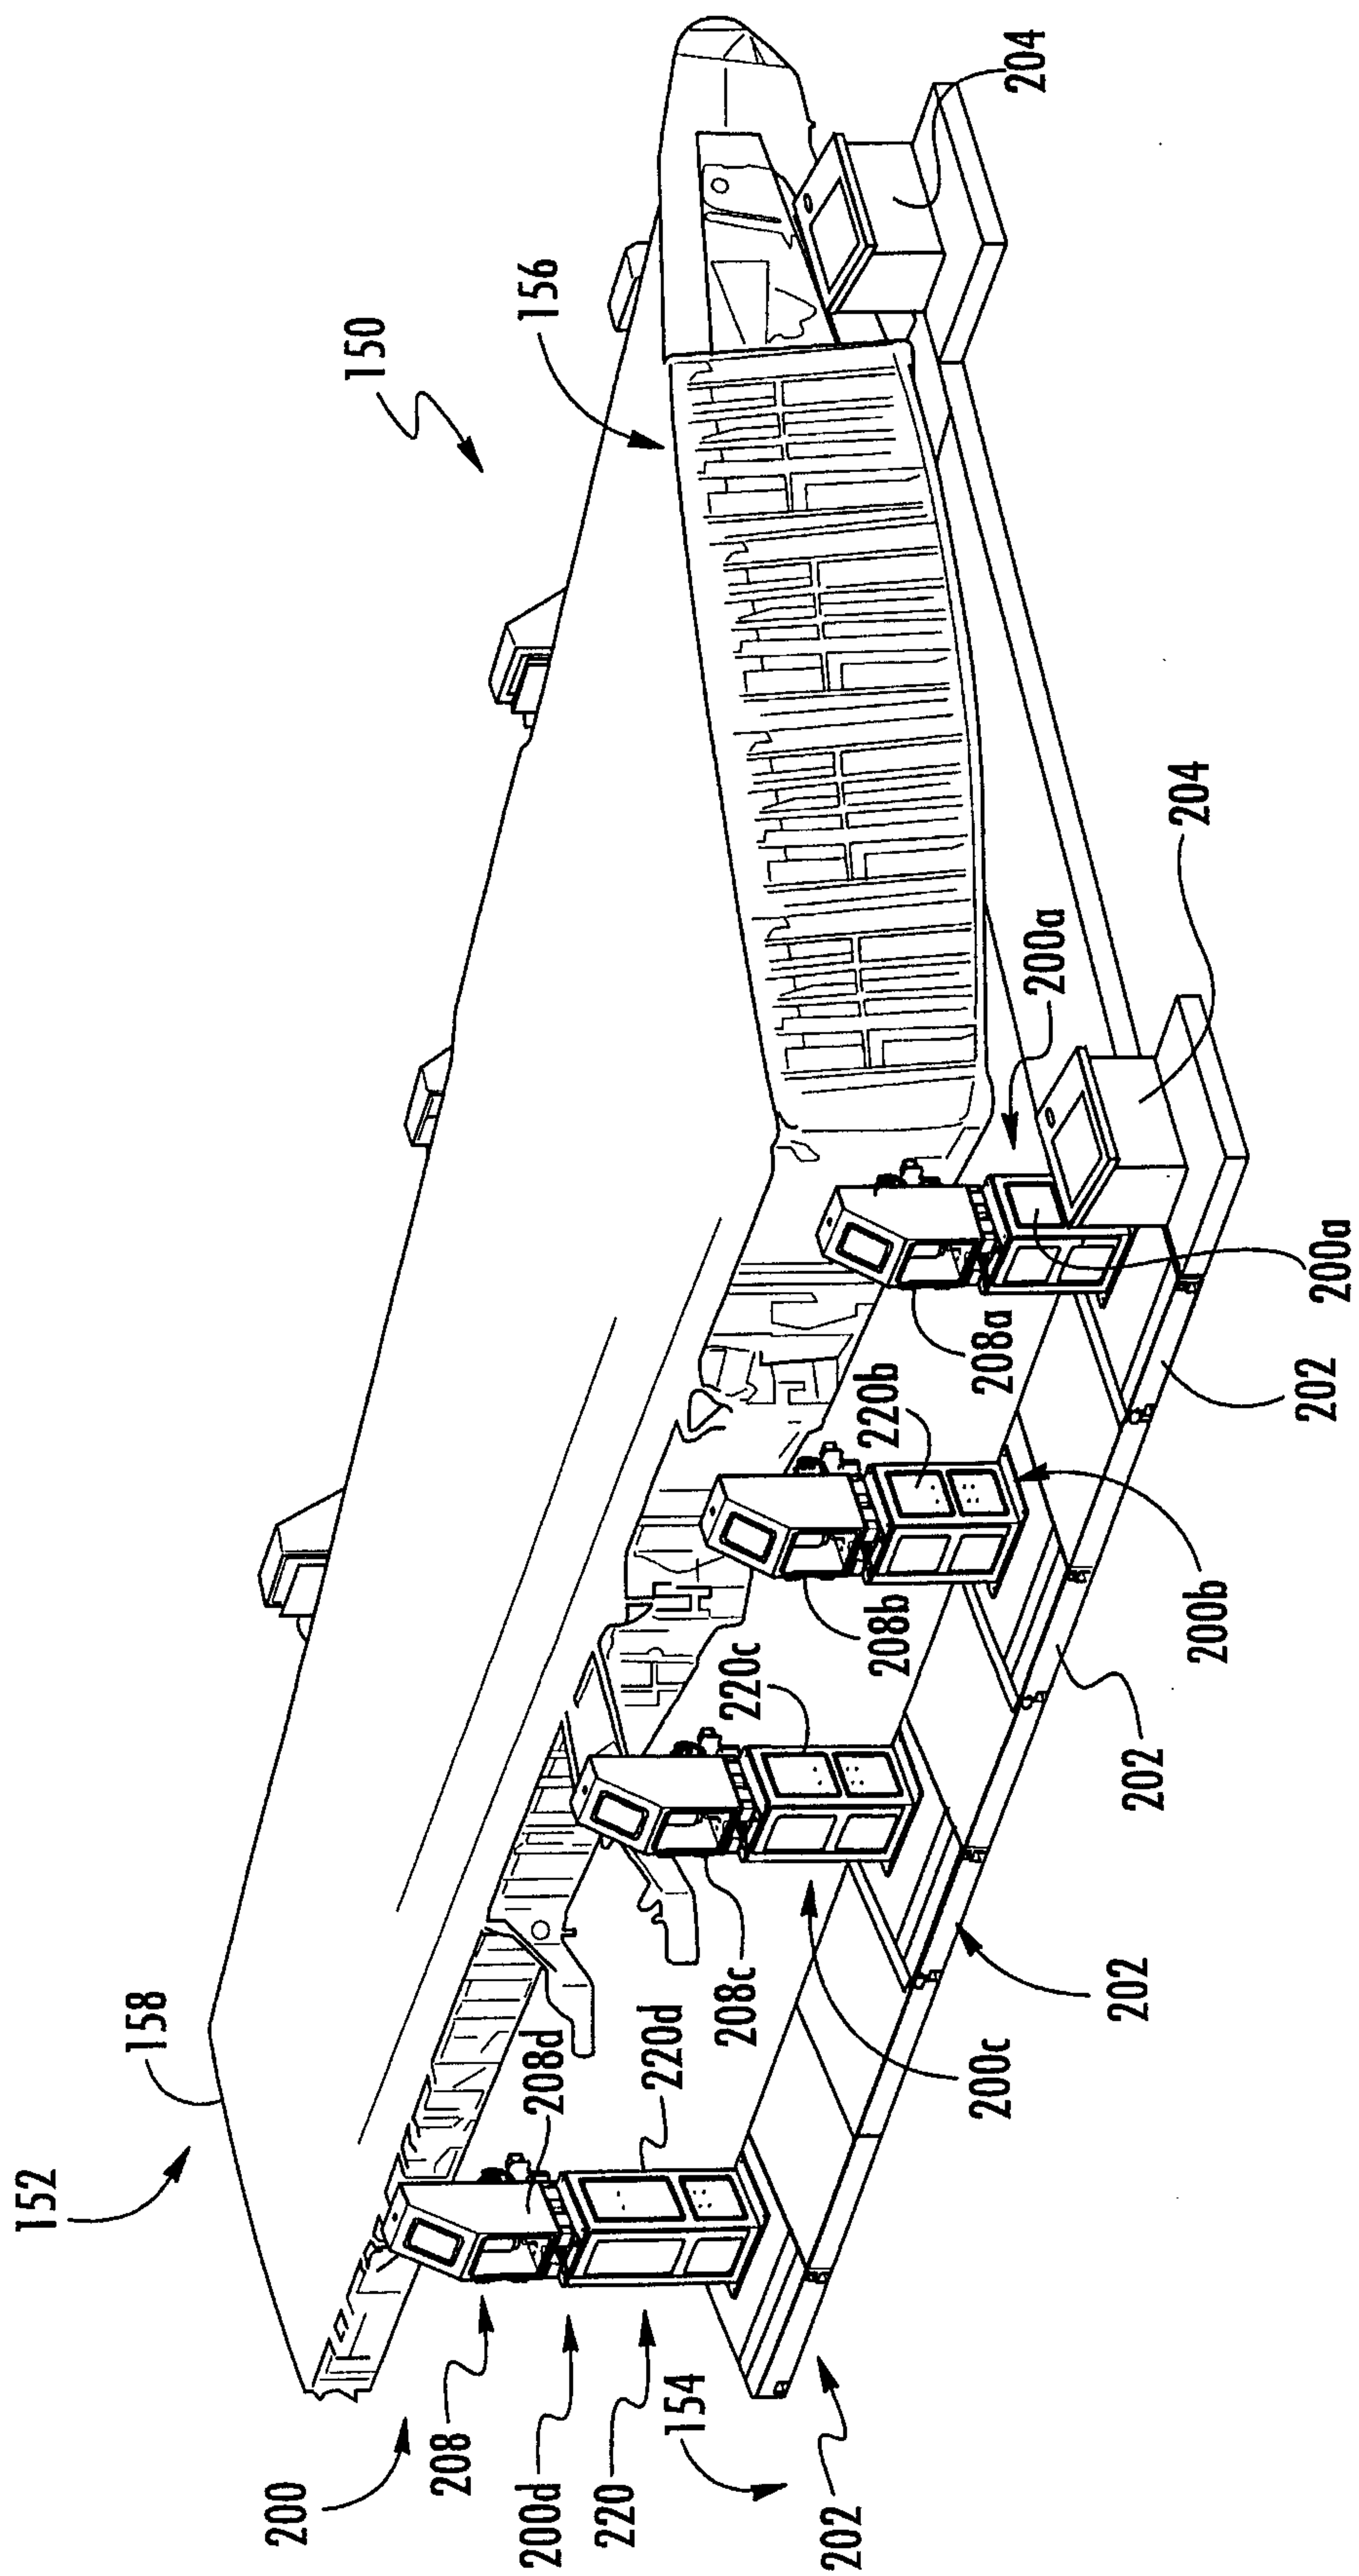


FIG. 9

