



(51) International Patent Classification:
H01F 6/06 (2006.01) *H01F 6/04* (2006.01)

(21) International Application Number:
PCT/IB2009/054429

(22) International Filing Date:
9 October 2009 (09.10.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/100,717 27 September 2008 (27.09.2008) US

(72) Inventors; and

(71) Applicants : **BAKER, Devlin** [US/US]; 220 Ashley Ave., #202, Bellingham, WA 98229 (US). **BATEMAN, Daniel** [US/US]; 1005 Hyde Street, #1, San Francisco, CA 94109 (US).

(74) Agent: **MATLOCK, K Brian**; Matlock Law Group, 1485 Treat Blvd., Suite 200, Walnut Creek, CA 94597 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))


Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR ELECTRICAL, MECHANICAL AND THERMAL ISOLATION OF SUPER-CONDUCTIVE MAGNETS

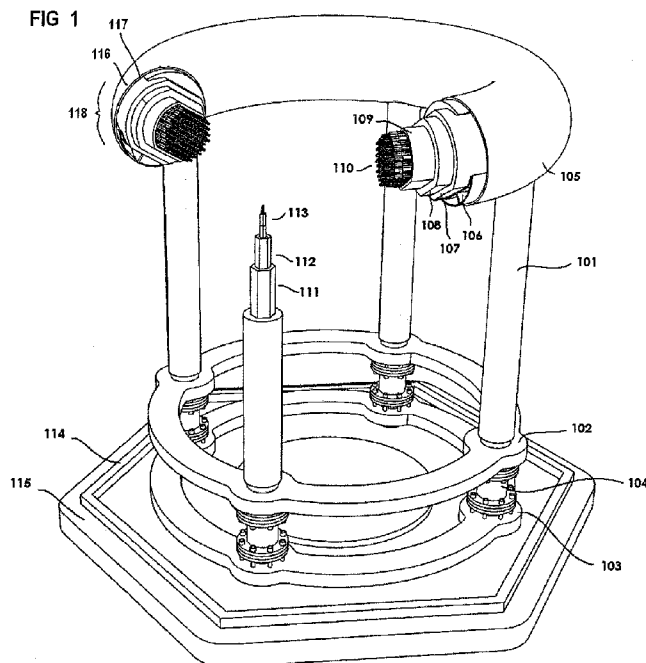FIG 1



(57) Abstract: A method and apparatus of electrical, mechanical and thermal isolation of superconductive magnet coils includes a superconductive magnet for environments wherein large differences of electrical potential between the interior superconductive winding and the exterior of the device, on the order of 103 to 106 Volts may exist. The methods and apparatus also includes insulation, cooling, and structural elements such that the interior of the device is capable of maintaining cryogenic temperatures needed for superconductivity, even in the presence of high heat flux incident on the overall winding housing. Finally, a device includes structural elements for support against gravity and other forces exerted on the assembly that include expansion jointing and stabilization to minimize warping or bending of the assembly due to temperature gradients. These supports include accoutrements for supplying electrical power, cryogenic coolant, and other supply leads to the magnet head, while also being isolated from thermal and electrical effects.



— the filing date of the international application is within
two months from the date of expiration of the priority pe-

riod (Rule 26bis.3)

**METHOD AND APPARATUS OF ELECTRICAL, MECHANICAL AND
THERMAL ISOLATION OF SUPERCONDUCTIVE MAGNETS**

5

COPYRIGHT NOTICE

[0001] A portion of the disclosure of this patent document contains material that is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

10

CROSS-REFERENCES TO RELATED APPLICATIONS

15

[0002] This application claims priority to and the benefit of U.S. Provisional Application Serial No. 61/100,717, filed September 27, 2008, the disclosure of which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

20

[0003] Embodiments in accordance with the present invention relate generally to superconductive magnets, and more particularly relates to methods for housing the magnets in environments of extreme electrical and thermal gradients. Embodiments of the invention may also be built as to be highly resistant to ionizing radiation and its deleterious effects on superconductive materials.

25

[0004] The electrical and thermal isolation abilities of the present invention are applicable to the field of Magnetohydrodynamic (hereinafter "MHD") devices such as direct kinetic-to-electrical energy converters. Compact and rugged MHD converter devices could be used to convert the kinetic energy of a jet or rocket exhaust stream into electrical power at high efficiency. Housing sensitive superconductive materials at the periphery of superheated exhaust stream is only practical with thermal and mechanical isolation of the superconductive magnet (i.e. the magnet coil, coil support structure, cooling system and thermal insulation) in accordance with the present invention.

[0005] The methods and apparatus of electrical, mechanical and thermal isolation of superconductive magnets relates to the field of superconductive magnet design, fabrication, and operation. More specifically, the methods and apparatus of electrical, mechanical and thermal isolation of superconductive magnets relates to methods for housing superconductive magnets in environments of extreme electrical and thermal gradients. Various embodiments may also be built as to be highly resistant to various forms of radiation (including ionizing radiation) and its deleterious effects on superconductive materials.

[0006] The disclosure herein applies additionally to other processes and devices requiring a high magnetic field wherein high heat or high thermal gradient(s), a high electric field or high electric field gradient(s), or various forms of radiation are present.

[0007] This invention also applies to the field of Nuclear Magnetic Resonance (hereinafter "NMR") and Magnetic Resonance Imaging (hereinafter "MRI"), wherein superconductive magnets constructed in accordance with the present invention will allow for material analysis and imaging devices to be able to withstand more extreme electrical, thermal, and radiative environments. The invention is also applicable to the field of Mass Spectrometry. Mass spectrometers built using superconductive magnets per the current invention will have a much greater operational range of temperature, vibration, and radiation exposure. The present invention also applies to the field of advanced space propulsion.

[0008] Finally, the current invention relates to the field of magnetic materials separation, where the invention will be used to provide intense magnetic fields to remove magnetic elements from the substance being processed. Magnets built in accordance with one or more of the current embodiments herein disclosed would allow a greater operational temperature range for such devices.

SUMMARY OF THE INVENTION

[0009] Methods and apparatus in accordance with various embodiments of the present invention are designs for a superconductive magnet housed within an assembly that provides cooling, thermal insulation, structural support, and may also provide high potential difference electric insulation. In certain aspects, various methods of cooling may include cryogenic cooling. Those skilled in the art may readily recognize additional cooling methods, which are contemplated to be implemented with the disclosed technology herein.

[0010] In one embodiment, the electric insulation includes one or more layers of dielectric material. In some embodiments, one or more of the dielectric layers may be ceramic, glass, polymer or other applicable dielectric materials depending on the particular application. The one or more dielectric layers insulating the superconductive magnet allow
5 an electrically conductive layer exterior to the dielectric layers to be held at high electric potential difference relative to the superconductive coil winding, cooling system and winding housing.

[0011] The innermost layers surrounding the superconductive coil winding consist of structural support for the coil winding itself, which may double as flow channels for
10 actively pumped coolant. In certain aspects, a layer of metalized woven polymeric fabric wrap (in various aspects, a reflective "superinsulation") in conjunction with a flexible low density silica-based layer of thermal insulation with extremely low thermal conductivity is provided between the dielectric layer and the structural support/cooling system layer.

[0012] Three or more struts may support the superconductive magnet assembly, which may provide support against the force of gravity or other forces incident on the
15 magnet assembly during operation. One or more of these support struts may be hollow, providing a cavity through which coolant supply, electrical supply, or other supply conduits may be run. In various aspects, the superconductive magnet assembly may optionally be toroidal or other applicable geometric configurations. In one embodiment, the outer one or
20 more layers of the support struts may be one or more layers of dielectric material.

[0013] When the outermost layer of the magnet assembly to be subjected to high heat flux or radiation of various forms, an additional near ambient temperature cooling system may be incorporated into the superconductive magnet assembly and associated systems. In one embodiment, the additional near ambient temperature cooling system has
25 dielectric coolant and dielectric coolant supply lines such that an outermost electrically conductive layer, in contact with one or more of the dielectric coolant materials or dielectric coolant supply lines, may still be held at high electric potential.

In another embodiment, a method of providing electrical insulation and mechanical support of one or more superconductive electromagnets, comprising the steps of encasing the
30 one or more superconductive magnets with one or more layers of dielectric material and encasing the one or more layers of dielectric material with one or more layers of electrically conductive material, said one or more layers of dielectric material collectively having a

dielectric strength greater than the quotient of (1) and (2) wherein (1) is a maximum electric potential difference (voltage) between (i) and (ii) wherein (i) is the one or more superconductive magnets; and (ii) is the one or more layers of electrically conductive material that encase the one or more layers of dielectric material that encase the one or more superconductive magnets; and (2) is a collective thickness of the one or more layers of dielectric material; and providing mechanical support for the one or more superconductive magnets wherein each magnet is held at a distance from a surface of a structure that supports the one or more superconductive magnets, such that the shortest distance between (3) and (4) is greater than the quotient of (5) and (6) wherein (3) is an outermost surface of the one or more layers of electrically conductive material; (4) is the surface of the structure that supports the one or more superconductive magnets; (5) is the maximum electric potential difference (voltage) between (i) and (ii) wherein (i) is the one or more superconductive magnets; and (ii) is the one or more layers of electrically conductive material that encase the one or more layers of dielectric material that encase the one or more superconductive magnets; and (6) is an effective dielectric strength of a medium (intervening substance) between (3) and (4).

[0014] In another embodiment, the method may also include steps for providing one or more innermost layers of high-K dielectric material comprising a structural support structure for the coil, which also functions as one or more flow channels for actively pumped cryogenic coolant.

[0015] In yet another embodiment, a method for mechanical support, electrical isolation, and thermal insulation of one or more superconductive electric magnets, comprises the steps of: supporting the superconductive electric magnet winding, winding housing, and cryogenic coolant; isolating one or more layer elements including a toroidal section of dielectric composed of an upper and lower half; and thermally insulating one or more superconductive magnetic coils.

[0016] In other various aspects of the embodiment, the method may include steps for isolating one or more layer elements including a toroidal section of dielectric composed of an upper and lower half and further including dissolving silicates in a hydroxide solution. In other various aspects, the method may also include steps for isolating one or more layer elements comprising a toroidal section of dielectric composed of an upper and lower half and further comprising the step of wrapping flexible glass fibers around a toroidal section; and treating said fibers with an epoxy solution. In certain aspects, the method may include steps wherein thermally insulating one or more superconductive magnetic coils

further comprises the step of incorporating a layer of radiation shielding between an outer layer and said dielectric layer.

5 [0017] In another embodiment, a method of providing electrical insulation and mechanical support of one or more superconductive electromagnets may further comprise steps for providing one or more layers of vacuum impinged metalized woven polymeric fabric wrapping coupled with a flexible low density silica-based layer of thermal insulation containing high reflectivity, low thermal conductivity material.

10 [0018] In another embodiment, a superconductive magnetic coil, comprises a layer of a high-K dielectric material; a layer of vacuum impinged fabric wrapping providing one or more layers of vacuum impinged metalized woven polymeric fabric wrapping coupled with a flexible low density silica-based layer of thermal insulation containing high reflectivity, low thermal conductivity material; and a layer of thermal insulation. In certain aspects, the embodiment may also include a layer of high-K dielectric material includes individual filaments contained in a copper matrix or larger cable comprised of multiple
15 braided filaments and additional binding material; a winding of cable-in-conduit Rutherford cables, wherein superconductive filaments in a copper matrix are braided around a central copper channel wherein the exterior cables are covered with an insulating material; a layer of vacuum impinged metalized woven polymeric fabric wrapping; and a layer of thermal insulation.

20 [0019] In another embodiment, a winding support structure, comprises a stainless steel toroidal container consisting of an upper and lower half affixed to a coil winding; one or more orifices coupled to a plurality of supply leads on said lower half wherein one or more cables are separated by an offset; mounting plates coaxial to said cable orifices; and one or more additional struts offset from a first pair of struts wherein said struts extend
25 downward along one or more coil radii. In certain aspects, the embodiment may also include a one or more surrounding layers of metalized nylon held under high vacuum; one or more layers surrounded by an airtight metal cavity; an additional layer of thermal insulation; and one or more flexible sheets of nanoporous gels wrapped in sheets and affixed together by a high strength fiber. In other various aspects, the embodiment may also
30 include a housing that contains the winding support structure within a vacuum chamber and provides an internal vacuum such that an inner structural element surrounding the winding is sealed. In other various aspects, the embodiment may include a cooling system, a cooling

system with high dielectric properties, channels wherein dielectric coolant may be pumped, channels etched into the exterior of the solid dielectric layer, tubing composed of dielectric material wherein said tubing provides dielectric coolant to the coil head and through the hollowed portions of interior support struts, a minor radius cross section following the
5 contour of a magnetic field line surrounding an outer metallic layer, and a coil with a minor radius cross section that is slightly elliptical.

[0020] Reference to the remaining portions of the specification, including the drawings and claims, will realize other features and advantages of the present invention. Further features and advantages of the present invention, as well as the structure and
10 operation of various embodiments of the present invention, are described in detail below with respect to the accompanying drawings. In the drawings, like reference numbers indicate identical or functionally similar elements.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] FIG 1 is a 3-dimensional cutaway representation of the exterior and
15 interior of one embodiment of the invention, designed for installation in a chamber.

[0022] FIG 2A is a cross-section of a toroidal magnetic coil head, with a large ratio of major radius to minor radius, having a coil container geometry that is conformal to the generated magnetic fields.

[0023] FIG 2B is a cross-section of a toroidal magnetic coil head, with a small
20 ratio of major radius to minor radius, having a coil geometry that is conformal to the generated magnetic fields, the coil geometry characterized by an offset or elongation of the outer coil container.

[0024] FIG 2C is a cross-section of a solenoid-type magnetic with non-circular winding cross section and having coil container geometry that is conformal to the generated
25 magnetic fields, characterized by a 'water droplet' shape, which is flattened on the face of the container within the bore of the coil.

[0025] FIG 3 depicts a minor radius cross section having multiple windings that is appropriate for use in toroidal or polygonal embodiments of the present invention. The multiple windings may be wired in parallel to provide a uniform current density, or at varied
30 currents (complimentary to or opposing the primary winding) to control the shape of the magnetic field at the exterior of the coil housing.

[0026] FIG 4 is a cutaway of a toroidal coil head of an embodiment of the invention having minor radius cross section like that of FIG 3.

[0027] FIG 5A is a cutaway of a polygonal (in this case, square) embodiment of the invention shown in perspective view.

5 [0028] FIG 5B shows the minor radius cross section appropriate for the generated magnetic field to be conformal to the container at a point mid-way along the straight section of the geometry shown in FIG 5A, specifically at the plane marked 509.

[0029] FIG 5C shows the minor radius cross section appropriate for the generated magnetic field to be conformal to the container at the corner of the geometry shown in FIG
10 5A, specifically at the plane marked 508.

[0030] FIG 6 depicts the cross section of circular coil that is conformal to the superposition of the generated magnetic fields and those due to a nearby diamagnetic plasma. This is characterized by an offset or elongation of the outer coil container along a line connecting the center of the minor radius and the divergence vector of the magnetic
15 field at the surface of the plasma.

[0031] FIG 7 shows the cross section of a toroidal system, including the location and design of power supply lines and thermal/electric isolation components.

[0032] FIG 8A is a cut-away of a coil head having a bottom-mounted ancillary cooling system for operation of the present invention under high external heat flux.

20 [0033] FIG 8B shows a detail view of the minor-radius cross section of the geometry shown in FIG 8A.

[0034] FIG 9 is a cutaway showing the arrangement of current carrying coils appropriate for shielding rear-mounted supports of a toroidal coil winding from charged particle impact.

25 [0035] FIG 10 is a method flowchart for providing electrical insulation and mechanical support of one or more superconductive magnets.

[0036] FIG 11 is a method flowchart further including additional steps for providing electrical insulation, mechanical support of one or more superconductive magnets and dielectric insulation.

[0037] FIG 12 is a method flowchart for providing electrical isolation between a superconductive magnet and its outermost container.

[0038] FIG 13 is a method flowchart for providing electrical isolation between a superconductive magnet and its outermost container.

5 [0039] FIG 14 is a method flowchart for providing electrical isolation between a superconductive magnet and its outermost container.

[0040] FIG 15 is a method flowchart for providing electrical isolation between a superconductive magnet and its outermost container.

10 [0041] FIG 16 is a method flowchart for providing electrical isolation, insulation, mechanical support and insulation of support rods for a superconductive electromagnet.

[0042] FIG 17 is a method flowchart for providing electrical isolation and insulation of a superconductive magnet and its support structure.

[0043] FIG 18 is a method flowchart for providing mechanical support, electrical isolation and thermal insulation of one or more superconductive magnets.

15 [0044] FIG 19 is a method flowchart further including additional steps for providing mechanical support, electrical isolation and thermal insulation of one or more superconductive magnets.

20 [0045] FIG 20 is a method flowchart further including additional steps for providing mechanical support, electrical isolation and thermal insulation of one or more superconductive magnets.

[0046] FIG 21 is a method flowchart further including additional steps for providing mechanical support, electrical isolation and thermal insulation of one or more superconductive magnets.

25 [0047] FIG 22 is a method flowchart further including additional steps for providing mechanical support, electrical isolation and thermal insulation of one or more superconductive magnets.

[0048] FIG 23 is a method flowchart for providing mechanical support, electrical isolation and thermal insulation of one or more superconductive magnets.

[0049] FIG 24 is a method flowchart further including additional steps for providing mechanical support, electrical isolation and thermal insulation of one or more superconductive magnets.

DETAILED DESCRIPTION

5 [0050] Methods and apparatus in accordance with various embodiments of the present invention overcome the aforementioned and other deficiencies in existing mechanical, electrical, and thermal isolation of one or more superconductive magnets.

[0051] In one embodiment of the invention, the superconductive winding is wound radially with a circular cross section, giving a dipole magnetic field. The winding
10 itself may be of individual superconductive filaments in a copper matrix, or of larger cable composed of multiple braided filaments and additional copper binders. The superconductive filaments may be of the high-temperature (HTSC) or low-temperature (LTSC) type. HTSC superconductors may be preferable in embodiments subject to greater heat flux, as the critical temperature for HTSC windings is higher, and subsequently the input power
15 required to cool them is reduced. However, LTSC windings present advantages of durability under the effects of radiation, at the cost of higher cooling power requirements. In certain aspects, all embodiments may variously include a superconductive magnet that comprises a superconductive winding, winding housing, cryogenic coolant, and coolant housing. All embodiments may also include an outer metallic layer comprising an electrically conductive
20 material that surrounds the dielectric material that surrounds the superconductive magnet. In other certain aspects, a first voltage comprises the electric potential difference between the superconductive magnet and the outer metallic layer. In other various aspects, embodiments variously include a surrounding medium wherein the medium which surrounds the outer metallic layer and surrounds the dielectric layer that also surrounds the support rods.

25 [0052] In the case of both LTSC and HTSC filaments, the preferred embodiment of the invention utilizes a winding of cable-in-conduit Rutherford type cables, where superconductive filaments in a copper matrix are braided around a central copper channel. This channel is filled with the desired cryogenic coolant, and pumped actively as to provide forced convection cooling. Possible coolants include various fluids including liquid helium,
30 liquid nitrogen, liquid hydrogen and supercritical gases, as well as many others. A fluid herein shall be considered as a continuous, amorphous substance whose molecules move

freely past one another and that has the tendency to assume the shape of its container. The exterior of these cables are covered by a durable electrical insulator such as polyamide.

5 [0053] Other embodiments include a solid winding, which is cooled by externally pumped cryogenic coolant, and windings cooled directly by conduction via closed-cycle cryocoolers.

10 [0054] The complete magnet winding may then be bound together with an epoxy under vacuum impregnation, or wrapped again with polyamide, as required for the specific application. In the embodiment mentioned earlier, this element is toroidal (donut shaped), with positive and negative leads of the internally cooled Rutherford type cable extending a few coil radii such that electrical power as well as coolant flow may be provided to the winding.

15 [0055] On the exterior of the winding, the next layer is composed of winding support structure(s). In one embodiment, this consists of a stainless steel toroidal container composed of an upper and lower half, which is bolted or welded together around the coil winding. Two small orifices on the bottom half allow for the supply leads (coolant and power) to be passed through.

20 [0056] In the preferred embodiment, these two cables are separated by 180 degrees. Coaxial to these cable orifices are mounting plates for the support struts, and a pair of additional struts are offset by 90 degrees from the first pair. The internal structural elements of the support struts are attached here, and extend downward along some number of coil radii. In various aspects, another embodiment may variously include welding the support struts to the toroidal container which houses the superconductive magnet.

25 [0057] Surrounding the steel support structure there may be multiple layers of metalized nylon, metalized woven polymeric fabric wrapping. These are to be housed in a container, the interior of the container to be held under high vacuum thereby providing thermal insulation properties. In one embodiment, this layer is surrounded by an air-tight metal cavity such that the area can be evacuated to high vacuum. In another embodiment, the assembly is designed to be housed within a vacuum chamber, and designed to create provisions for providing an internal vacuum. Note that in this embodiment, the inner structural element surrounding the winding is sealed, so that small coolant leaks do not ruin the vacuum.

30

[0058] The metalized woven or polymeric fabric wrapping layer is surrounded by an additional layer of thermal insulation, such as an extremely high R-value foam or silica-based blanket. One embodiment utilizes flexible sheets of extremely low density nanoporous gels. These may be wrapped in sheets, and held in place by a high strength fiber thread material.

[0059] Surrounding the thermal insulation layers elements designed for electrical isolation are present. These consist of a toroidal section of dielectric composed of an upper and lower half, or multilayer wrapping of a flexible dielectric. For maximum electrical isolation, one embodiment consists of fused-silica (low metal content glass) halves. These may be joined together by a number of methods, including melting and pressure welding of the two halves together. If this method is employed, great care must be taken as to not damage the internal coil windings, as superconductive materials are very sensitive to high temperatures. Filling the coolant chambers with a cryogenic coolant during this process is one method for minimizing the chance of thermal degradation of the windings.

[0060] A further method for joining the dielectric sections involves dissolution of silicates in a hydroxide solution. This solution may be applied to the interface, and upon evaporation of the solution solid a solid silicate bond will remain. Another embodiment may use a wrap of flexible glass fibers around the toroidal section to the desired thickness, which are then treated with an epoxy or silicate-hydroxide solution to seal any small orifices or pores. Additional embodiments may use an epoxy-based dielectric, ceramics, or polymers. Silica and ceramics are preferred for high-temperature and vacuum applications, as polymers and epoxies tend to out-gas and degrade when heated.

[0061] According to one aspect of the present invention, the exterior layer of the coil head is a rigid metallic element, designed to resist the effect of electromagnetic radiation of various wavelengths. Radio, infrared, and soft x-ray radiation as well as intermediate wavelengths will be largely absorbed by this layer. Polishing the exterior surface will act to increase the amount of electromagnetic radiation reflected, and increase its blackbody emissivity, speeding cooling.

[0062] Another embodiment is required when the electromagnetic or convective heat load on the outer layer is high, an additional cooling system would need to be included. In order to retain electrical isolation between the outer skin of the coil head and ground, this coolant must itself have strong dielectric properties. These requirements are met by but not

limited to: highly refined mineral oil, fluorinated hydrocarbons, and silicone based commercial transformer fluids. The best mode material for retaining electrical isolation is silicone based fluids, as they do not have the same risk of combustion as do mineral oils.

[0063] In yet another embodiment, the outer metallic element may include small channels within which the dielectric coolant may be pumped, or channel may be etched into the exterior of the solid dielectric layer, providing cooling along the metal-dielectric interface. With this embodiment, care must be taken that the solid dielectric material does not interact deleteriously with the dielectric fluid, as would be the case with a fluorinated hydrocarbon and some polymers. The tubing providing dielectric coolant to the coil head is run down the interior hollow section of the support struts, specifically those than do not house a superconductive cable lead. This tube must be also composed of dielectric material, as to avoid conducting electricity to the pumping systems, which are at ground potential.

[0064] In one embodiment, when high flux of neutral particle radiation such as neutrons or gamma rays is expected, the design should incorporate a layer of radiation shielding between the outer container and the dielectric layer. This is only practical on large devices, where the minor radius of the coil exceeds 10cm. This radiation shielding may be in the form of dense metals like lead, or borated carbon-composite sheeting.

[0065] In one embodiment, the high flux of charged particles requires that, the shape of the outer metallic layer conforms to the magnetic field lines. This not only reduces mechanical stresses on the device, but more importantly it reduces charged particle impacts by limiting the degree to which field lines, which are the guiding centers of charged particle gyromotion, terminate on a metal surface.

[0066] According to another embodiment, a single isolated coil, the preferable minor radius cross section is slightly elliptical, with the flattened side facing inward toward the axis of the coil. For arrays of coils or in the presence of external magnetic fields, the geometry of the cross section will vary accordingly such that a minor radius cross section follows the contour of a magnetic field line surrounding an outer metallic layer.

[0067] In another embodiment, the coil head is supported by a number of support struts, the inner structural element of which is hollow to provide a channel for support cables and conduits to be run. This element is covered with layers of thermal insulation and dielectric of similar thickness to that found on the coil head. However, there is not an outer metal layer on the struts, allowing the outermost metal container on the coil head to be

completely electrically isolated from the rest of the assembly. The struts are attached to a pair of support rings, which incorporate thermally insulated bushings and expansion joints. This prevents excessive degrees of heat from being conducted to the interior coil windings. The lower ring is attached to a mounting plate, which serves as a structural base, as well as a means to attaching the assembly to the desired location.

[0068] In one embodiment of the invention, the electrical insulation comprises a layer of high-K dielectric ceramic, glass or polymer, such that the outermost metallic layer of the assembly may be held at high electric potential difference from the coil winding. In certain aspects, a layer of vacuum-impinged metalized woven polymeric fabric wrapping, in conjunction with a flexible low density silica-based layer of thermal insulation with extremely low thermal conductivity is provided. The innermost layers provide structural support for the coil winding and cooling system, which may double as flow channels for actively pumped cryogenic coolant. The toroidal coil head assembly is then supported by three or more struts, providing gravity support. These struts are hollow, providing a cavity through which cryogenic and electrical supply conduits may be run. The outermost layer of the struts, in contrast to the toroidal coil head, is a thick dielectric rather than metal. If the exterior of the coil head is to be subjected to high heat flux, an additional near room temperature cooling system may be incorporated. This system has coolant and supply lines of dielectric materials such that the exterior of the coil head may still be held at high electric potential despite contact with the coolant without the risk of internal arcing.

[0069] FIG 1 further illustrates a 3-dimensional cutaway of one embodiment of the invention, designed for installation in a vacuum chamber. This embodiment is intended for generating a dipole magnetic field. The superconductive winding 110 is supplied with current and coolant by an input conduit 113 is surrounded by a structural element 109 that also serves as a container, which contains the liquid or gaseous coolant. In certain aspects, the coolant may be cryogenic coolant in a cryocontainer. Because the structural element must be maintained at extremely low temperature, austenitic steel alloys are preferred. The coolant may be one of a number of different types, including liquid gases such as liquid nitrogen or liquid helium, or supercritical gases at pressures sufficient to prevent phase-change at low temperature. If the transition temperature of the material used in the winding is below 10K, supercritical helium is the preferred option.

[0070] To isolate the super-cooled coil winding from conductive heating, a plurality of systems are employed. An insulating blanket layer composed of multiple vacuum-impinged mylar sheets (commonly known as "superinsulation") or an extremely low-density solid such as aerogel may be used for this purpose. A layer of insulation 108 is present on the coil head itself, covering the structural element. In certain aspects, the structural element 109 may variously be a winding housing or coil head cryocontainer 109. In other various aspects, the cryocontainer 109 may be a cryostat 109. A thermal insulation material 111 also covers the structural support rods 112. The support rods 112 are thus also super-cooled by conductive contact with the cryostat. The support rods must then be isolated from ambient temperature components by thermal standoffs 104. To provide structural integrity, two support rings 102 and 103 provide transverse rigidity of the assembly. The upper ring 102 is referred to as the "cold ring", as it is in partial contact with the cooling components. In certain aspects, the cooling components may include super-cooled cryogenic components. The lower ring 103 is referred to as the "warm ring", being at near-ambient temperature. The warm ring is attached to the base plate 115, which in this embodiment has a flange seal 114 for mounting the assembly in the port of a vacuum chamber. A secondary coolant system consists of a chilled dielectric coolant channel 106 that is near the surface of the assembly. In order to retain electrical isolation between the metallic outer skin (steel, tungsten, or titanium) of the coil head 105 and ground, this coolant must itself have strong dielectric properties. Highly refined mineral oil, fluorinated hydrocarbons, and silicone based commercial transformer fluids meet these requirements. Silicone based fluids are preferable, as they do not have the same risk of combustion as do mineral oils. This coolant is pumped through a system of chillers and heat sinks sufficient to maintain a near room-temperature (less than 70 C) temperature of the outer container, limiting the cooling power load on the primary cooling system. In certain aspects, the primary cooling system may be cryogenic. To isolate the coil head container 105 electrically from ground and from the coil winding, one or more layers of dielectric material 107 and 101 surround the thermal insulation layer 108 on the coil head and supports, respectively. The dielectric strength of this material must be relatively high. In some embodiments, the dielectric material may be fused-silica (quartz-glass) for this layer. The thickness is dictated by the voltages that must be maintained. In some embodiments, the dielectric material may be in a thickness ranging from about 0.1 cm to about 50 cm. The potential difference (v, voltage) between the coil head container 105 and the electrical ground varies as a function of the product of the dielectric strength (Dk) and the thickness

(L) of the dielectric material. In some embodiments using fused-silica, approximately 1cm is required for every 50kV of potential difference between the coil head container and ground. The coil head container 105 further comprises an outer diameter 116 and an inner diameter 117. The coil head assembly 118 comprises the superconductive winding 110, the cryostat/structural element 109, thermal insulation layer 108, dielectric material 107, the chilled dielectric coolant channel 106, and the coil head container 105.

[0071] Referring now to FIG 2A, a cross section of a coil head of similar form to that shown in FIG 1 is pictured. This is a toroidal winding of superconductor 205 around axis of symmetry 206 having a circular cross section. A cryostat/structural element 204, thermal blanket 203, one or more dielectric layers 202 and coil head container 201 surround the superconductive winding and share similar circular cross sections. This is necessary to provide maximum conformality between the material surface of the assembly and the generated magnetic field lines. This reduces mechanical stresses on the device and reduces charged particle impacts by limiting the degree to which field lines (which are the guiding centers of charged particle gyromotion) terminate on a metal surface. For systems to be used in contact or in close proximity to plasmas or charged particle sources this is very important, as it reduces heating of the exterior of the coil head which might otherwise overwhelm the cooling system. For a skinny coil with a large major radius, a circular cross section fulfills these requirements.

[0072] In another embodiment, a fatter coil with a comparatively smaller major radius is shown such as that pictured in FIG 2B, field lines in the bore of the coil, near axis of symmetry 207, are compressed by the proximity of the opposite side of the coil, and circular cross sections are no longer ideal. In this case, the circular cross section coil winding 213 is surrounded by circular cross section cryostat/structural element 212 and thermal insulation 211, but one or more dielectric layers 210 is offset outward and slightly elliptical to accommodate a field-conformal coil head container 209, which is similarly offset outward.

[0073] In yet another embodiment, non-circular coil winding cross sections are illustrated such as the rectangular solenoid 218 pictured in FIG 2C. In certain aspects, it is recommended that the cryostat/structural element 217 be of similar cross sectional geometry to that of the winding, but that all exterior layers such as thermal insulation 216 and one or more dielectric layers 215 be of similar cross sectional geometry to the field-conformal

outer coil head container 214. As shown in FIG 2C, the inward (bore-facing) face of the coil near axis of symmetry 208 is nearly flat in order to accommodate the substantially constant magnetic field in the bore of the magnet. The thickness of the thermal and electrical isolation layers must at all points be thicker than the minimum required for proper operation of the assembly.

[0074] The layout pictured in FIG 2C will tend to transmit heat more rapidly on the inward face of the coil, creating differential heating of the coiling winding 218 and cryostat/structural element 217. This can be detrimental to assembly operation and lifetime if the heat flux is high. In the case of high heat flux, it may instead be preferable to use additional coil windings to shape the magnetic field to be conformal to the container shape, rather than vice versa.

[0075] FIG 3 shows the minor-radius cross section of a coil head using this concept. The outer coil head container 301 is approximately circular, as is the one or more dielectric layers 302 and thermal insulation layer 303. The primary coil winding 310 is composed of a group of three rectangular windings nested together within a structural element 305. Two small 'bucking coils' composed of superconductive windings 307 and 308 may be run at varying amperages to achieve a field conformal to the outer container (magnetic field lines are parallel to the container at the surface of the container) despite externally imposed fields by other coils or current flows. In arrays of coils, it may be preferable to adopt an elliptical rather than circular cross section for all elements. This is particularly prudent in the case of spherical arrays of coils in close proximity to one another. The bucking coils must be supported by a structural brace 306, which rigidly holds the primary and bucking coils.

[0076] Referring now to FIG 4, a toroidal magnet having the cross section shown in FIG 3 is depicted. The rectangular cross section coil winding 404 is symmetric about axis of symmetry 401, as are bucking coils 403 and 402. An array of structural braces 406 maintain the spacing of the primary and bucking coils despite the forces that are generated between them. A solid structural element 405 provides the primary rigidity of the assembly, upon which the cryostat/structural element 407, thermal isolation layer 408, one or more dielectric layers 409 and coil head container 410 are attached.

[0077] For coils that are not circularly symmetric about an axis, the minor radius cross section for ideal field conformality is not constant along the length of the coil. FIG 5A

shows the cut away of a four-sided polygonal coil head container 501 mounted on a support base 503 with support rods 502. Coil winding 507 maintains a circular cross section along the length of the magnet, as does cryostat/structural element 506 and a thermal layer 505. The outer layers including the one or more dielectric layers 504 and coil head container 501 however have a non-constant cross section in order to maintain field conformality.

[0078] At the cross section indicated by slicing plane 509 the preferred layout is that shown in FIG 5B, wherein the circular cross section of the coil winding 511 is the same as that of the outer container 510.

[0079] At the corner as indicated by slicing plane 508 the layout must be altered to maintain field conformality, as reflected in FIG 5C. The center of the roughly circular cross section coil winding 513 of the outer coil head container 512 is offset by some small distance 515 toward the outboard side of the coil (the extra width is opposite the direction of the arrow shown in FIG 5C and further corresponds to the arrow in directional plane 508 shown in FIG 5A). Further, a short section of the inboard side 514 of the cross section of the slicing plane 508 is flattened, resulting in a shorter radius from the center of the superconductive winding. Cross sections in between these two planes are linear combinations of the two extremes, so that there is no discontinuity along the surface of the coil. A cryostat/structural element 516 surrounds and supports the superconductive winding 513 and may also provide flow channels for cooling purposes.

[0080] Referring now to FIG 6, the cross section of a coil head designed for field conformality in close proximity to diamagnetic plasma 601 is depicted. The cross section of the central superconductive winding 608 is circular, and if the coil in question is a dipole, symmetric around axis 602. The cryostat/structural element 607 and thermal insulation 606 are also circular in cross section, and are concentric with the winding. The one or more dielectric layers 604 is offset along a line normal to the surface of the plasma/field boundary at the coil edge and slightly elliptical to accommodate field-conformal coil head container 603, which is similarly offset. If the field-line compression due to the diamagnetic plasma is great enough, a small flat section on the plasma-facing side of the coil 605 should be included to ensure field conformality with the container.

[0081] Referring now to FIG 7, the cross section of the coil head, supports and feedthroughs of an embodiment of the invention is shown. A circular superconductive coil winding 702 is symmetric around the axis 701, while the supports are arranged as shown in

FIG 1. The cryostat/structural element 703 is attached rigidly to solid support strut element 713 on two of the supports, and to hollow support strut element 708 on the others, which houses the supply conduits 705 for coolant and power to the winding. On all support struts are thermal insulation layers 707 and dielectric shields 706, which extend into a bell-shaped cover for the strut mount plates 709 the cold ring 710 and warm ring 711 provide structural rigidity, while thermal standoffs 716 composed of low-thermal conductivity materials (surface-fused aerogels with isolated steel reinforcements in one embodiment) isolate the cold ring thermally. On the supply-conduit housing legs, the vacuum-insulated feedthrough element 712 contains the conduit after passing below the cold ring. One of the three support struts houses high voltage line 714, which either drains away accumulated charge from charged particle impacts on the coil head container, or is used to bias the coil head container to some desired electrical potential (voltage). The high voltage line is electrically isolated using glass fibers, and is imbedded below the surface of the dielectric support strut armor 706 until it exits at point 715.

[0082] FIG 8A shows a cutaway detail of a circular coil having an ancillary cooling system similar to that shown in FIG 1. Coil winding 801 is supported by structural supports 802 and braces 803, while a series of coolant lines 805 provides near-room temperature cooling from the coil container 804. A two dimensional cross section of the minor radius of the coil, depicted in FIG 8B shows that this ancillary cooling system is outside of the primary thermal blanket 808, and thus reduces the thermal load on the insulation systems by reducing the equilibrium temperature of the outside of the thermal insulation layer, which reduces the rate of heat transfer into the coil windings. This is accomplished by running fluid 805 of the previously described types through lines located in between the dielectric layer and the outer coil container 809. In this embodiment, these lines are located only on the bottom of the coil and conduction is counted on for heat flux incident on the top of the coil to be transmitted to the coolant. This is achieved by two means- first, the outer coil container 804 is thicker on the bottom of the coil than on the top, leading to enhanced heat transfer due to the greater heat capacity of the lower section. Second, a layer 806 having very high heat conductivity, such as copper in one embodiment, is attached to the coolant lines, and extends to the top of the coil. In other embodiments the coolant lines may be located along the entire surface of the coil, rather than only over part of the surface as in this embodiment. In applications of particularly extreme heat flux, it may be necessary to have a plurality of ancillary cooling systems, each separated by a

thermal insulation layer. In one embodiment, the equilibrium surface temperature could be as high as is possible based on materials concerns (somewhere around 2,500 K for tungsten) as long as sufficient ancillary coolant systems are present to prevent the outer surface of the primary insulation layer from exceeding approximately 70C (343K).

5 **[0083]** A second type of bucking coil arrangement is shown in cut away detail in FIG 9. This coil winding arrangement is designed to allow partial field conformality between the generated fields and the support rods, reducing the frequency of charged particle impacts on the dielectric armor of the support struts when housed near an energetic particle source or plasma. The primary coil winding 901 is flanked by small solenoid coils 10 902 that generate dipole fields along the axis of the support struts. The small solenoid coil windings must also be within the insulation, dielectric, and cooling elements just as the primary coil. A hollow region 903 is present to allow for the cryogenic coolant and power supply lines for the primary coils to be passed through.

15 **[0084]** In another embodiment, a method of providing electrical insulation, thermal insulation and mechanical support of one or more superconductive electromagnets is provided, as shown in FIG 10. A method of providing electrical insulation and mechanical support of one or more superconductive electromagnets 1000 comprises the following steps in any order, including: insulating a superconductive winding, winding housing, cryogenic cooling system and cooling system housing electrically 1001 with a 20 layer of dielectric material having dielectric strength greater than the product of (1) and (2). In certain aspects, (1) is the electric potential difference between: (i) the superconductive winding, winding housing, cryogenic cooling system and cooling system housing; and, (ii) the outermost surface of the electrically conductive material surrounds the dielectric material that surrounds the superconductive winding, winding housing, cryogenic cooling 25 system. In other aspects, (2) is the thickness of the dielectric material. In another step found in the method described above, supporting the superconductive winding, winding housing, cryogenic cooling system, and cooling system housing mechanically within a chamber by multiple support rods 1002, is provided such that the shortest distance between: (3) the outermost surface of the dielectric; and, (4) the innermost surface of the chamber 30 wall is greater than the quotient of (5) and (6) below. In some aspects, (5) is the electric potential difference between: (i) the superconductive winding, winding housing, cryogenic cooling system and cooling system housing; and (ii) the outermost surface of the dielectric material housing. In another step, insulating the support rods with a layer of dielectric

material 1003 is provided. In other various aspects, (6) is the effective dielectric strength of the medium surrounding: (i) the outermost surface of the dielectric material housing; (ii); and insulating the support rods with a layer of dielectric material having dielectric strength greater than the product of the first voltage and the thickness of the dielectric layer.

5 **[0085]** In another embodiment as shown in FIG 11, a method of providing electrical insulation, thermal insulation and mechanical support of one or more superconductive electromagnets 1100 further includes, in addition to all of the steps as shown in FIG 10, providing one or more innermost layers of high-K dielectric material 1104. In certain aspects, the one or more layers of high-K dielectric materials may be
10 coupled to a structural support structure for the coil which also functions as one or more flow channels for actively pumped cryogenic coolant; and providing one or more layers of vacuum impinged metalized woven polymeric fabric wrapping coupled with a flexible low density silica-based layer of thermal insulation that contains high reflectivity, low thermal conductivity material. In other various aspects, the one or more dielectric layers of high-K
15 dielectric materials may form a structural support structure which functions in other embodiments in one or more of the configurations noted above.

[0086] In another embodiment as shown in FIG 12, a method of providing electrical insulation, thermal insulation and mechanical support of one or more superconductive electromagnets 1200 comprises the steps, in any order, of electrically
20 isolating a superconductive coil from its outermost container 1201 and providing one or more dielectric layers that surround a support structure 1202.

[0087] In other aspects as shown in the flow chart of FIG 13, the method of FIG 10 may be provided wherein the one or more dielectric layers that surround a support structure is a cryocontainer. In other various aspects, the one or more dielectric layers may
25 themselves form a cryostat/structural element.

[0088] In other various aspects, as shown in FIG 14, the method of FIG 10 may be provided wherein one or more of the dielectric layers substantially withstand a maximum voltage of about 250,000V (250kV).

[0089] In certain aspects, as shown in FIG 15, the method of FIG 10 may be
30 provided wherein one or more of the dielectric layers have a thickness of a minimum thickness of about 0.5 centimeters to a maximum thickness of about 50 centimeters.

[0090] In yet another embodiment as shown in FIG 16, a method 1600 for mechanical support, electrical isolation, and thermal insulation of one or more superconductive electric magnets that are supporting the superconductive electric magnet winding, winding housing, and cryogenic coolant is provided that includes the steps of FIG 10 and further includes, in any order, electrically isolating a superconductive coil from its outermost container by providing one or more dielectric layers that surround a support structure 1601, insulating a superconductive winding, winding housing, cooling system and cooling system housing electrically with a layer of dielectric material 1602, supporting the superconductive winding, winding housing, cooling system, and cooling system housing mechanically within a chamber by multiple support rods 1603, and insulating the support rods with a layer of dielectric material 1604.

[0091] In another embodiment as shown in FIG 17, steps 1700 for isolating, supporting and insulating the superconductive winding, winding housing, cooling system, and cooling system housing include electrically isolating a superconductive coil from its outermost container by providing one or more dielectric layers that surround a support structure 1701, insulating a superconductive winding, winding housing, cooling system and cooling system housing electrically with a layer of dielectric material 1702, and insulating the support rods with a layer of dielectric material 1703. In certain aspects, the support structures may be support rods. In other various aspects, the chamber may comprise one or more dielectric layers to form a support structure.

[0092] In another embodiment as shown in FIG 18, steps 1800 for tri-isolating, the superconductive winding, winding housing, cooling system, and cooling system housing include mechanically supporting one or more superconductive windings, winding housings and cooling systems 1801, electrically isolating the superconductive winding, winding housing and cooling system 1802, and thermally insulating one or more superconductive magnetic coils 1803.

[0093] In another embodiment as shown in FIG 19, the steps of FIG 10 further include: structurally supporting a winding housing by one or more hollow struts 1904. In certain aspects, the method may utilize structural elements that include a cavity through which supply conduits may flow.

[0094] In other various aspects as shown in FIG 20, the method may further include steps, in any order for isolating one or more layer elements including a toroidal section of dielectric composed of an upper and lower half 2004.

5 [0095] In other various aspects as shown in flow chart in FIG 21, the method may further include, in addition to the steps shown in FIG 20, a method is provided for treating the fibers with an epoxy solution 2105.

[0096] In other various aspects as shown in FIG 22, the method may variously include, in addition to the steps in FIG 20, treating the fibers with a silicate hydroxide solution 2205.

10 [0097] Finally, an alternative embodiment is provided, as shown in FIG 23, in which the step of thermally insulating one or more superconductive magnetic coils is included wherein a layer of radiation shielding between the outer layer and the dielectric layer is provided 2303. In addition, the method may also include, in any order, a step for mechanically supporting one or more superconductive windings, winding housings and
15 cooling systems 2301, and electrically isolating the superconductive winding, winding housing and cooling system 2302.

[0098] In yet another embodiment as shown in FIG 24, a method includes, in addition to the steps in any order shown in FIG 18, steps for providing one or more layers of vacuum impinged metalized woven polymeric fabric wrapping coupled with a flexible low
20 density silica-based layer of thermal insulation containing high reflectivity, low thermal conductivity material.

[0099] In yet another embodiment, an apparatus is configured with a superconductive magnetic coil that has three layers. The first layer is made of a high-K dielectric material. The second layer is made of a vacuum impinged fabric wrapping
25 providing one or more layers of vacuum impinged metalized woven polymeric fabric wrapping coupled with a flexible low density silica-based layer of thermal insulation containing a high reflectivity and low thermal conductivity material. The third layer is made of a thermal insulation. The superconductive magnetic coil of the apparatus can have a layer of high-K dielectric material that includes individual filaments contained in a copper
30 matrix or even a larger cable comprised of multiple braided filaments and additional binding material. Finely, an alternative to this apparatus embodiment has a winding of cable-in-conduit Rutherford cables. These cables have superconductive filaments in a copper matrix

that are braided around a central copper channel. These exterior cables are covered with an insulating material, a layer of vacuum impinged metalized woven polymeric fabric wrapping and a layer of thermal insulation.

[00100] In another embodiment, an apparatus is provided that has a winding support structure, made up of a stainless steel toroidal container including an upper and lower half affixed to a coil winding. In other various aspects, the apparatus may also have one or more orifices coupled to a plurality of supply leads on the lower half wherein one or more cables are separated by 180 degrees. In certain aspects, it also has mounting plates that are coaxial to the cable orifices. Finally, another aspect of the embodiment includes one or more additional struts offset by 90 degrees from the first pair of struts with the struts extending downward along one or more coil radii. In other various aspects of this aspect of the embodiment, the winding support structure has one or more surrounding layers of metalized nylon held under high vacuum; one or more layers surrounded by an airtight metal cavity; an additional layer of thermal insulation; and one or more flexible sheets of nanoporous gels wrapped in sheets and affixed together by a high strength fiber.

[00101] In another embodiment, the winding support is housed within a vacuum chamber and provides an internal vacuum such that an inner structural element surrounding the winding is sealed. Further, the winding support structure has a cooling system. The winding support structure's cooling system can have high dielectric properties. The winding support structures can have channels wherein dielectric coolant may be pumped. The channels are etched into the exterior of the solid dielectric layer. The winding support structures can have tubing composed of dielectric material that provides dielectric coolant to the coil head and through the hollowed portions of interior support struts. The winding support structures can also contain a minor radius cross section following the contour of a magnetic field line surrounding an outer metallic layer. Finally, the winding support structures can have a coil with a minor radius cross section that is slightly elliptical.

[00102] In one embodiment, a superconductive coil housed within an assembly that provides cryogenic cooling, structural support, and high potential electrical isolation from the surrounding medium. The electrical isolation consists of a layer of high-K dielectric ceramic, glass or polymer, such that the outermost metallic layer of the assembly may be held at high electric potential difference from the coil winding. A layer of vacuum-impinged mylar wrapping in conjunction with a silica-based 'aerogel' blanket provides

thermal insulation with extremely low thermal conductivity. The innermost layers consist of structural support for the coil itself, which may double as flow channels for actively pumped cryogenic coolant. The toroidal coil head assembly is then supported by three or more struts, providing gravity support. These struts are hollow, providing a cavity through which cryogenic and electrical supply conduits may be run. The outermost layer of the struts, in contrast to the toroidal coil head, is a thick dielectric rather than metal. If the exterior of the coil head is to be subjected to high heat flux, an additional near room temperature cooling system may be incorporated. This system has coolant and supply lines of dielectric materials such that the exterior of the coil head may still be held at high potential despite contact with the coolant without the risk of internal arcing.

[00103] In yet another embodiment of the invention, the superconductive winding is wound radially with a circular cross section, giving a dipole magnetic field. The winding itself may be of individual superconductive filaments in a copper matrix, or of larger cable composed of multiple braided filaments and additional copper binders. The superconductive filaments may be of the high-temperature (HTSC) or low-temperature (LTSC) type. HTSC superconductors may be preferable in embodiments subject to greater heat flux, as the critical temperature for HTSC windings is higher, and subsequently the input power required to cool them is reduced. However, LTSC windings present advantages of durability under the effects of radiation, at the cost of higher cooling power requirements. In the case of both LTSC and HTSC filaments, the preferred embodiment of the invention utilizes a winding of cable-in-conduit Rutherford type cables, where superconductive filaments in a copper matrix are braided around a central copper channel. This channel is filled with the desired coolant, and pumped actively as to provide forced cooling. Possible coolants include liquid helium, liquid nitrogen and supercritical gases, as well as many others. The exterior of these cables are covered a durable electrical insulator such as polyamide. Other embodiments include a solid winding which is cooled by externally pumped cryogenic coolant, and windings cooled directly by conduction via closed-cycle cryocoolers.

[00104] In another embodiment, the complete magnet winding may then be bound together with an epoxy under vacuum impregnation, or wrapped again with polyamide, as required for the specific application. In the embodiment mentioned earlier, this element is toroidal (donut shaped), with positive and negative leads of the internally

cooled Rutherford type cable extending a few coil radii such that electrical power as well as coolant flow may be provided to the winding.

[00105] In another aspect, on the exterior of the winding, the next layer is composed of winding support structure(s). In one embodiment, this consists of a stainless steel toroidal container composed of an upper and lower half, which is bolted or welded together around the coil winding. Two small orifices on the bottom half allow for the supply leads (coolant and power) to be passed through. In the preferred embodiment, these two cables are separated by 180 degrees. Coaxial to these cable orifices are mounting plates for the support struts, and two additional struts are offset by 90 degrees from the first pair. The internal structural elements of the support struts are attached here, and extend downward some number of coil radii.

[00106] In certain aspects, surrounding the steel support structure there may be multiple layers of metalized nylon (mylar). These are to be held under high vacuum, providing thermal insulation properties. In one embodiment, this layer is surrounded by an air-tight metal cavity such that the area can be evacuated to high vacuum. In another embodiment, the assembly is designed to be housed within a vacuum chamber, and to provisions for providing an internal vacuum are required. Note that in this embodiment, the inner structural element surrounding the winding is sealed, so that small coolant leaks do not ruin the vacuum.

[00107] In other various aspects, the mylar layer is surrounded by an additional layer of thermal insulation, such as extremely high R-value foam or "Aerogel" type silica-based blankets. The preferred embodiment utilizes flexible sheets of extremely low density nanoporous gels, as described by US Patent #20070173157. These may be wrapped in sheets, and held in place by high strength fiber thread, such as Dyeema or Kevlar.

[00108] In another embodiment, surrounding the thermal insulation layers elements designed for electrical isolation are present. These consist of a toroidal section of dielectric composed of an upper and lower half, or multilayer wrapping of a flexible dielectric. For maximum electrical isolation, one embodiment consists of fused-silica (low metal content glass) halves. These may be joined together by a number of methods, including melting and pressure welding of the two halves together. If this method is employed, great care must be taken as to not damage the internal coil windings, as superconductive materials are very sensitive to high temperatures. Filling the coolant

chambers with a cryogenic coolant during this process is one method for minimizing the chance of thermal degradation of the windings. Another method for joining the dielectric sections involves dissolution of silicates in a hydroxide solution.

5 [00109] In yet another embodiment, this solution may be applied to the interface, and upon evaporation of the solution solid a solid silicate bond will remain. Another embodiment may use a wrap of flexible glass fibers around the toroidal section to the desired thickness, which are then treated with an epoxy or silicate-hydroxide solution to seal any small orifices or pores. Additional embodiments may use an epoxy-based dielectric, ceramics, or polymers. Silica and ceramics are preferred for high-temperature and vacuum applications, as polymers and epoxies tend to out-gas and degrade when heated.

10 [00110] In another embodiment, the exterior layer of the coil head is a rigid metallic element, designed to resist the effect of electromagnetic radiation of varying wavelengths. Radio, infrared, and soft x-ray radiation as well as intermediate wavelengths will be largely absorbed by this layer. Polishing the exterior surface will act to increase the amount of electromagnetic radiation reflected, and increase its blackbody emissivity, speeding cooling.

15 [00111] In another embodiment, if the electromagnetic or convective heat load on the outer layer is high, an additional cooling system may be included. In order to retain electrical isolation between the outer skin of the coil head and ground, this coolant must itself have strong dielectric properties. Highly refined mineral oil, fluorinated hydrocarbons, and silicone based commercial transformer fluids meet these requirements. Silicone based fluids are preferable, as they do not have the same risk of combustion as do mineral oils. The outer metallic element may include small channels within which the dielectric coolant may be pumped, or channel may be etched into the exterior of the solid dielectric layer, providing cooling along the metal-dielectric interface. If the latter embodiment is used, care must be taken that the solid dielectric material does not interact deleteriously with the dielectric fluid, as would be the case with a fluorinated hydrocarbon and some polymers. The tubing providing dielectric coolant to the coil head is run down the interior hollow section of the support struts, specifically those than do not house a superconductive cable lead. This tube must be also composed of dielectric material, as to avoid conducting electricity to the pumping systems, which are at ground potential.

[00112] In yet another embodiment, if high flux of neutral particle radiation such as neutrons or muons is expected, the design can incorporate a layer of radiation shielding between the outer container and the dielectric layer. This is only practical on large devices, where the minor radius of the coil exceeds 10cm. This radiation shielding may be
5 in the form of dense metals like lead, or borated carbon-composite sheeting.

[00113] In an embodiment, in the case of high flux of charged particles, it is beneficial to shape the outer metallic layer for maximum conformality to the magnetic field lines. This not only reduces mechanical stresses on the device, but more importantly it reduces charged particle impacts by limiting the degree to which field lines (which are the
10 guiding centers of charged particle gyromotion) terminate on a metal surface. For a single isolated coil, the preferable minor radius cross section is slightly elliptical, with the flattened side facing inward toward the axis of the coil. For arrays of coils or in the presence of external magnetic fields, the geometry of the cross section will vary accordingly.

[00114] As described briefly before, the coil head is supported by a number of
15 support struts, the inner structural element of which is hollow to provide a channel for support cables and conduits to be run. This element is covered with layers of thermal insulation and dielectric of similar thickness to that found on the coil head. However, there is not an outer metal layer, allowing the metal container on the coil head to be completely electrically isolated from the rest of the assembly. The struts are attached to a pair of
20 support rings, which incorporate thermally insulated bushings and expansion joints. This prevents excessive degrees of heat from being conducted to the interior coil windings. The lower ring is attached to a mounting plate that serves as a structural base, as well as a means to attaching the assembly to the desired location.

[00115] Based on the disclosure and teachings provided herein, a person of
25 ordinary skill in the art will appreciate other ways and/or methods to implement the various embodiments.

[00116] The specification and drawing are, accordingly, to be regarded in an illustrative rather than a restrictive sense. It will, however, be evident that various modifications and changes may be made thereunto without departing from the broader spirit
30 and scope of the invention as set forth in the claims.

WHAT IS CLAIMED IS:

- 1 1. A method of providing electrical insulation and mechanical support of one or more
2 superconductive magnets, comprising the steps of:
 - 3 encasing the one or more superconductive magnets with one or more layers of
4 dielectric material and encasing the one or more layers of dielectric material with one or more
5 layers of electrically conductive material, said one or more layers of dielectric material
6 collectively having a dielectric strength greater than the quotient of (1) and (2) wherein (1) is
7 a maximum electric potential difference (voltage) between (i) and (ii) wherein (i) is the one
8 or more superconductive magnets; and (ii) is the one or more layers of electrically conductive
9 material that encase the one or more layers of dielectric material that encase the one or more
10 superconductive magnets; and (2) is a collective thickness of the one or more layers of
11 dielectric material; and
 - 12 providing mechanical support for the one or more superconductive magnets wherein
13 each magnet is held at a distance from a surface of a structure that supports the one or more
14 superconductive magnets, such that the shortest distance between (3) and (4) is greater than
15 the quotient of (5) and (6) wherein (3) is an outermost surface of the one or more layers of
16 electrically conductive material; (4) is the surface of the structure that supports the one or
17 more superconductive magnets; (5) is the maximum electric potential difference (voltage)
18 between (i) and (ii) wherein (i) is the one or more superconductive magnets; and (ii) is the
19 one or more layers of electrically conductive material that encase the one or more layers of
20 dielectric material that encase the one or more superconductive magnets; and (6) is an
21 effective dielectric strength of a medium (intervening substance) between (3) and (4).
- 1 2. The method according to claim 1, further comprising:
 - 2 connecting each superconductive magnet to the support structure that supports the one
3 or more superconductive magnets with one or more magnet support devices wherein one or
4 more of the magnet support devices are electrically conductive magnet support devices, and
5 wherein one or more of the magnet support devices are hollow, allowing for one or more
6 supply conduits to be run through one or more hollow regions; and
 - 7 electrically insulating the electrically conductive magnet support devices by encasing
8 the electrically conductive magnet support devices with one or more layers of dielectric
9 material, said one or more layers of dielectric material that encase the one or more electrically

10 conductive magnet support devices collectively having a dielectric strength greater than the
11 quotient of (7) and (8) wherein (7) is the maximum electric potential difference (voltage)
12 between (i) and (ii) wherein (i) is the one or more superconductive magnets; and (ii) is the
13 one or more layers of electrically conductive material that encase the one or more layers of
14 dielectric material that encase the one or more superconductive magnets; and (8) is a
15 collective thickness of the one or more layers of dielectric material that encase the one or
16 more electrically conductive magnet support devices.

1 3. The method according to claim 1 wherein each superconductive magnet is connected
2 to the support structure that supports the one or more superconductive magnets with one or
3 more magnet support devices wherein one or more of the magnet support devices are
4 dielectric magnet support devices, and wherein one or more of the magnet support devices
5 are hollow, allowing for one or more supply conduits to be run through one or more hollow
6 regions.

1 4. The method according to claim 1, further comprising:

2 connecting a first set of one or more superconductive magnets to a second set of one
3 or more superconductive magnets, forming a connected group of superconductive magnets,
4 said group of superconductive magnets connected with one or more connecting devices
5 wherein said connecting devices are comprised of material selected from a group consisting
6 of a first material comprised entirely of one or more layers of dielectric material and a second
7 material comprised of one or more layers of electrically conductive material encased by one
8 or more layers of dielectric material; and,

9 connecting the group of superconductive magnets to a support structure that supports
10 the group of superconductive magnets with one or more magnet group support devices,
11 wherein one or more of the magnet group support devices are hollow, allowing for one or
12 more supply conduits to be run through one or more hollow regions, and wherein said magnet
13 group support devices are comprised of material selected from a group consisting of a first
14 material comprised entirely of one or more layers of dielectric material and a second material
15 comprised of one or more layers of electrically conductive material encased by one more
16 layers of dielectric material.

1 5. The method according to claim 1, further comprising:

2 providing mechanical support to one or more superconductive coil windings within
3 the one or more superconductive magnets by encasing the one or more superconductive coil
4 windings with one or more components of material selected from the group consisting of
5 electrically conductive and dielectric material, said one or more components providing one or
6 more winding support structures for the one or more superconductive coil windings, wherein
7 said winding support structures also provide one or more flow channels for one or more of
8 the superconductive coil windings, allowing pumped coolant to cool one or more of the
9 superconductive coil windings; and

10 connecting the one or more winding support structures to the support structure that
11 supports the one or more superconductive magnets with one or more magnet support devices,
12 wherein the magnet support devices are comprised of material selected from a group
13 consisting of electrically conductive material and dielectric material.

1 6. The method according to claim 1, further comprising:

2 providing mechanical support to one or more superconductive coil windings within
3 the one or more superconductive magnets by encasing the one or more superconductive coil
4 windings with one or more components of material selected from the group consisting of
5 electrically conductive material and dielectric material, said one or more components
6 providing one or more support structures for the one or more superconductive coil windings;

7 constructing one or more of the superconductive coil windings with one or more turns
8 of cable-in-conduit superconductive cable having one or more hollow regions within said
9 superconductive cable; and

10 cooling one or more of the superconductive coil windings with coolant pumped
11 through one or more of the hollow regions within said superconductive cable.

1 7. A method of supporting one or more superconductive magnets, comprising the steps
2 of:

3 mechanically isolating, and supporting with one or more magnet support devices, one
4 or more of the superconductive magnets at a distance greater than twenty (20) centimeters
5 from a nearest surface of a structure that supports said one or more superconductive magnets.

6 electrically isolating the one or more superconductive magnets from a high electric
7 field by encasing the one or more superconductive magnets with one or more dielectric layers
8 and encasing the one or more dielectric layers with one or more electrically conductive

9 layers, said one or more superconductive magnets having one or more superconductive
10 windings, one or more components that allow the one or more superconductive windings to
11 be supplied with coolant, one or more support structures for the one or more superconductive
12 windings and for the one or more components that allow the one or more superconductive
13 windings to be supplied with coolant, and one or more layers of thermal insulation; and

1 8. The method according to claim 7, further comprising:

2 thermally isolating one or more electrically and mechanically isolated
3 superconductive magnets from high heat by providing one or more dielectric components that
4 allow dielectric coolant to be supplied between the one or more electrically conductive layers
5 and the one or more dielectric layers.

1 9. The method according to claim 7, further comprising:

2 wrapping flexible fibers around the one or more support structures for the one or more
3 superconductive windings and for the one or more components that allow the one or more
4 superconductive windings to be supplied with coolant; and

5 treating said fibers with a solution selected from the group of an epoxy solution and a
6 silicate hydroxide solution.

1 10. A method according to claim 7, wherein thermally insulating one or more
2 superconductive magnetic coils further comprises the step of incorporating a layer of
3 radiation shielding between an outermost electrically conductive layer and said one or more
4 dielectric layers.

1 11. A superconductive coil winding support structure device, comprising:

2 an upper half comprising one or more layers of material selected from the group
3 consisting of electrically conductive and dielectric material;

4 a lower half comprising one or more layers of material selected from the group
5 consisting of electrically conductive and dielectric material, said lower half coupled to said
6 upper half;

7 one or more magnet support devices coupled to said upper and lower halves, said
8 upper and lower halves surrounding one or more superconductive coil windings; and

9 one or more superconductive magnets encasing the one or more electrically insulated
10 superconductive coil windings.

1 12. The device of claim 11, further comprising:

2 one or more flow channels for actively pumped coolant to cool the coil winding.

3 13. The device of claim 11, further comprising:

4 one or more orifices coupled to a plurality of supply leads on said lower half;

5 mounting plates coaxial to said cable orifices; and

6 one or more additional struts offset from a first pair of struts wherein said struts
7 extend downward along one or more coil radii.

1 14. One or more mechanically and electrically isolated superconductive magnet
2 apparatus, comprising:

3 one or more superconductive magnet coils comprised of one or more turns of one or
4 more superconductive materials;

5 one or more first cooling systems for said coils;

6 one or more support structures for said coils and said first cooling systems wherein
7 one or more of the support structures is a housing;

8 one or more layers of thermal insulation for said first cooling systems and said
9 structures;

10 one or more dielectric layers surrounding said insulation or said structures;

11 one or more electrically-conductive layers surrounding said dielectric layers wherein
12 said electrically-conductive layers are the outermost layers of said mag coil head container,
13 isolated from the cryocontainer and its components therein

14 one or more near-ambient temperature second cooling systems in conjunction with a
15 radiation shield fluid incorporated therein; and

16 one or more magnet support devices.

17 15. The apparatus of claim 14, further comprising:

18 a superconductive winding of cable-in-conduit Rutherford cables wherein the exterior
19 of the cables are covered with an electrically insulating material.


1 16. The apparatus of claim 15, further comprising:


2 superconductive wires that are braided around a central channel wherein the exterior
3 of the cables are covered with an electrically insulating material.


- 1 17. The winding support structure of Claim 11, further comprising:
2 one or more surrounding layers of metalized nylon held under high vacuum;
3 one or more layers surrounded by an airtight metal cavity;
4 an additional layer of thermal insulation; and
5 one or more flexible sheets of nanoporous gels wrapped in sheets and affixed together
6 by a high strength fiber.
- 1 18. The winding support structure of Claim 11, further comprising:
2 a sealed, inner structural element of the winding support structure that allows the
3 winding to be held at a vacuum.
- 1 19. The winding support structure of Claim 11, further comprising channels wherein
2 dielectric coolant may be pumped.
- 1 20. The winding support structure of Claim 11, further comprising channels etched into
2 the exterior of a solid dielectric layer.
- 1 21. The winding support structure of Claim 11, further comprising tubing composed of
2 dielectric material wherein dielectric coolant is flowing through said tubing to the coil head
3 and flowing through one or more hollowed portions of one or more support devices.
- 1 22. The electrically isolated, superconductive magnet of claim 14, further comprising:
2 one or more superconductive magnet coils having a geometry and positioned such that
3 a magnetic field line produced by said one or more coils follows the contour of the outermost
4 electrically conductive coil head container.
- 1 23. The electrically isolated, superconductive magnet of claim 14, further comprising a
2 coil with a minor radius cross section that is substantially elliptical.
- 1 24. An electrically isolated superconductive magnet system, comprising:
2 a superconductive magnet assembly comprising one or more magnet coils, a first
3 cooling system, a first cooling system container, one or more layers of thermal insulation and
4 one or more dielectric layers;
5 a near room temperature second cooling system in conjunction with a radiation shield
6 fluid incorporated therein;

- 7 an outermost electrically conductive container, isolated from the first cooling system
- 8 container and its components therein;
- 9 a support structure for the superconductive magnet assembly;
- 10 a superconductive coil winding that conducts electrical current;
- 11 a circulating fluid for cooling the superconductive coil winding;
- 12 a high voltage power supply coupled to an outermost electrically conductive coil head
- 13 container; and
- 14 a low voltage power supply electrically connected to a persistent current switch and
- 15 the superconductive coil winding.

FIG 1

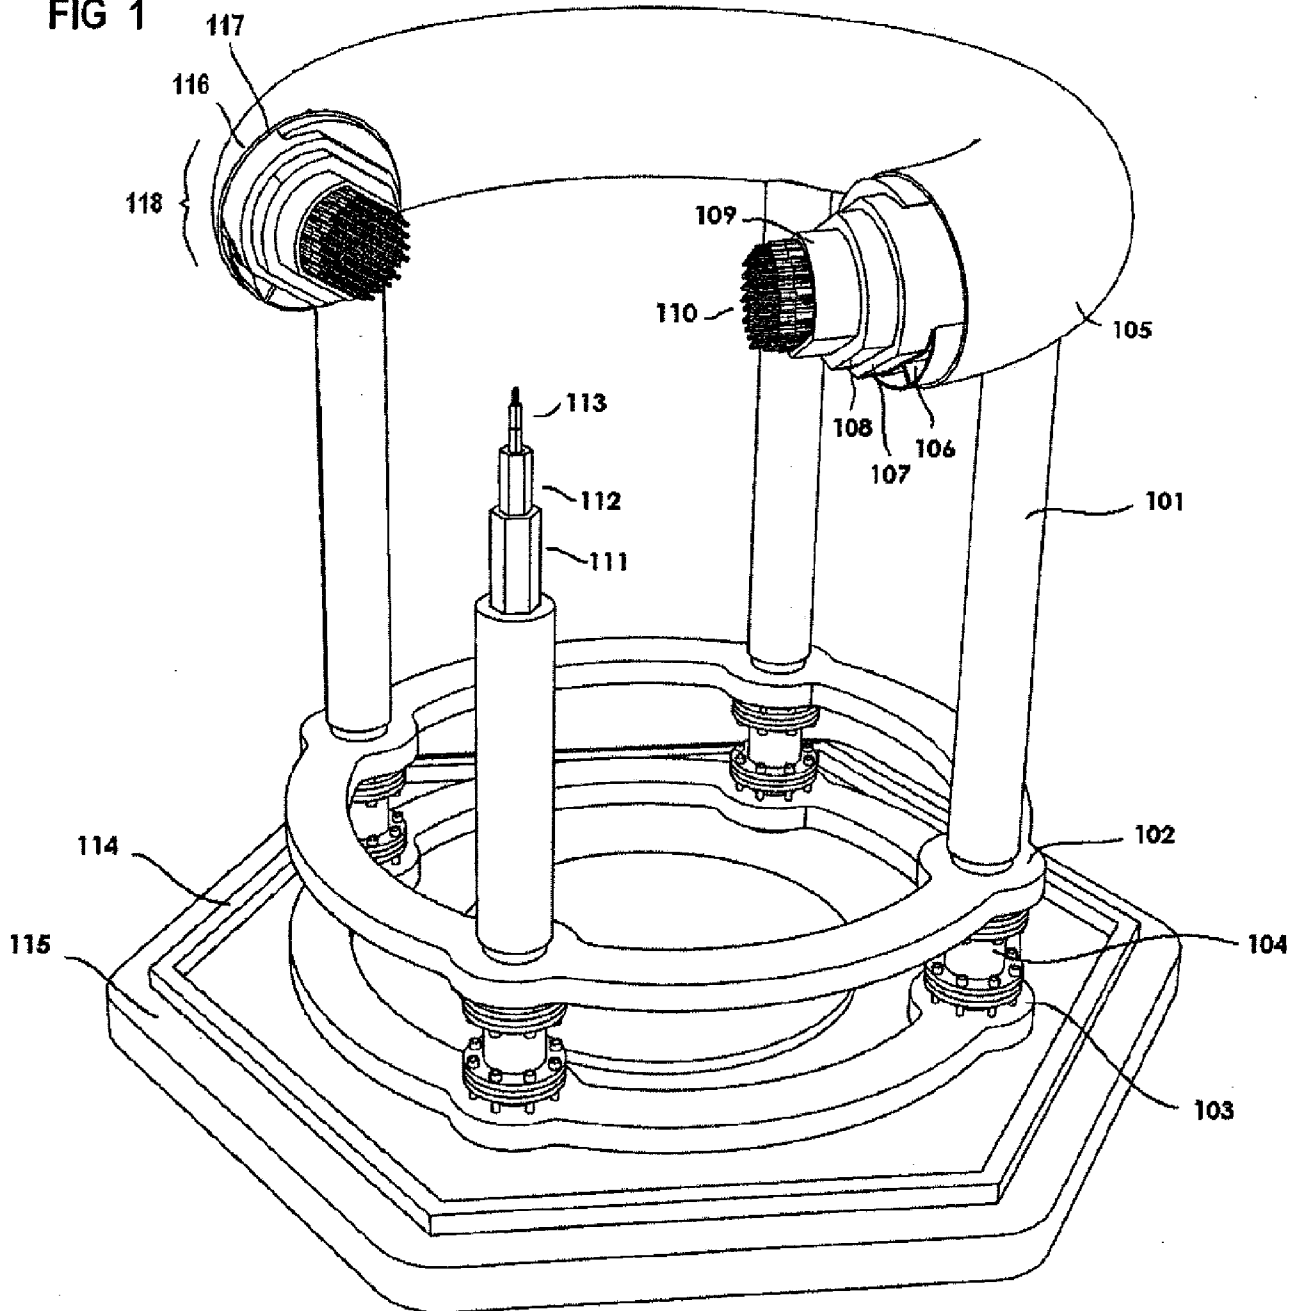

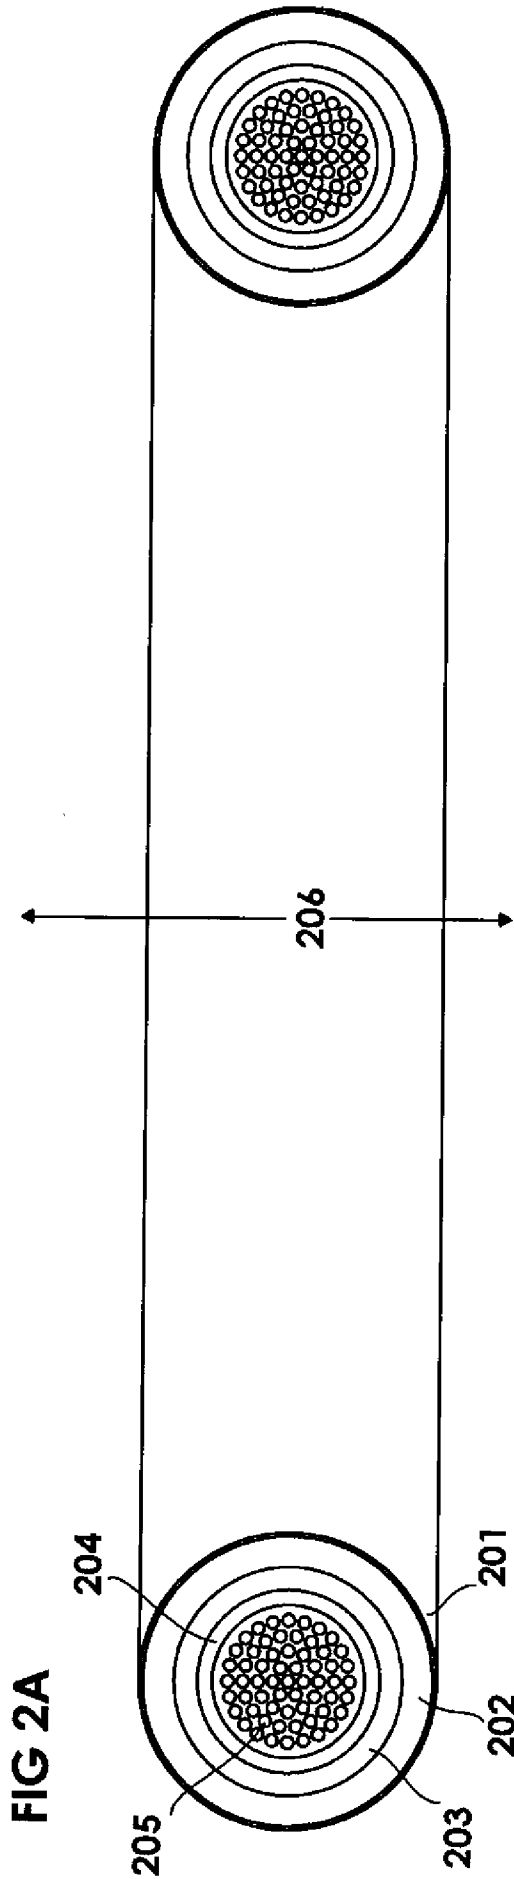

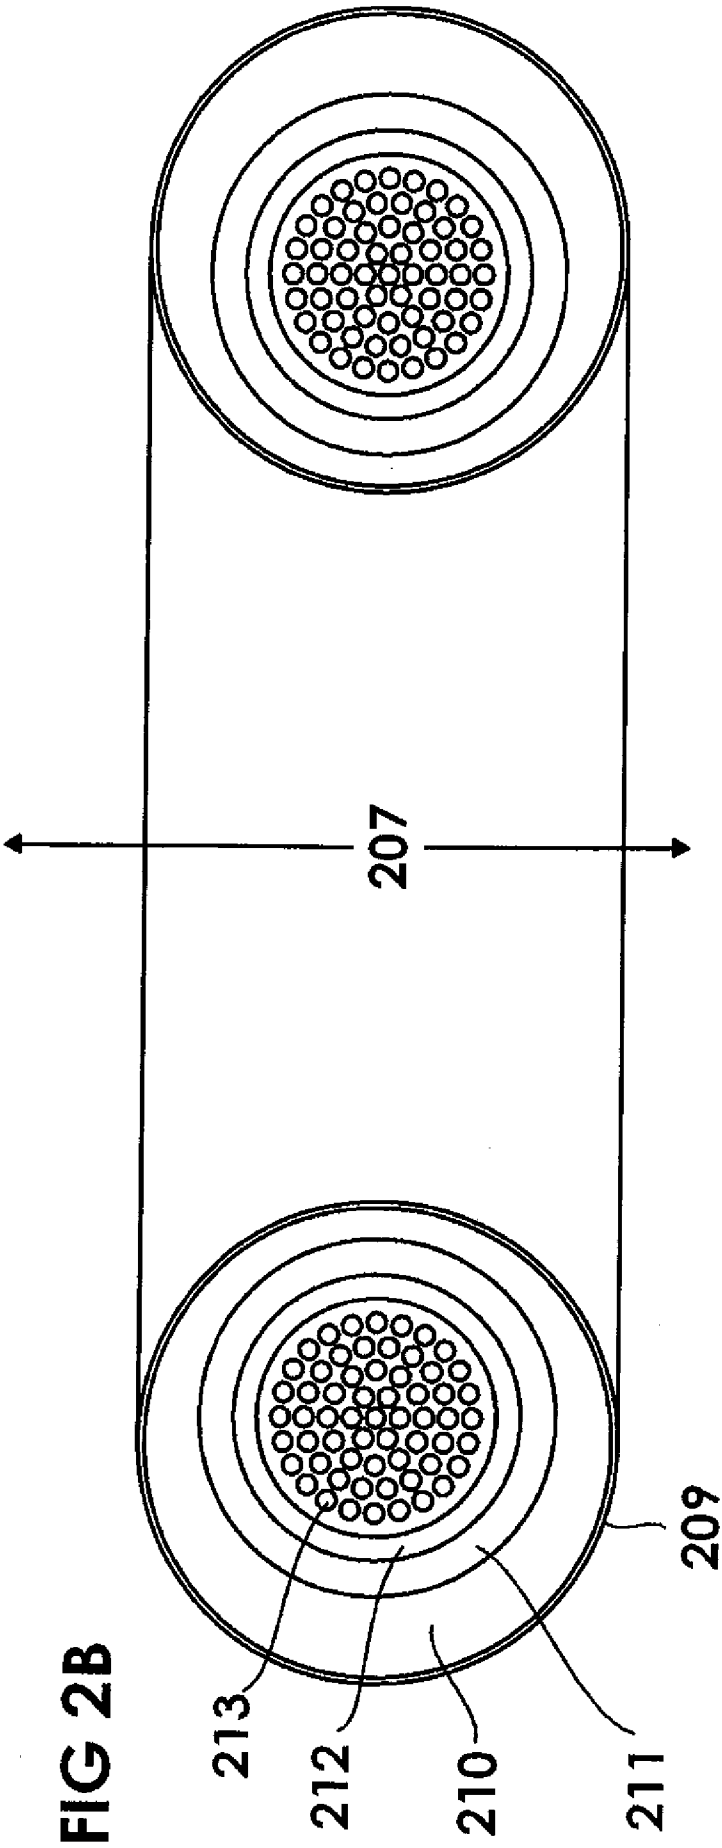

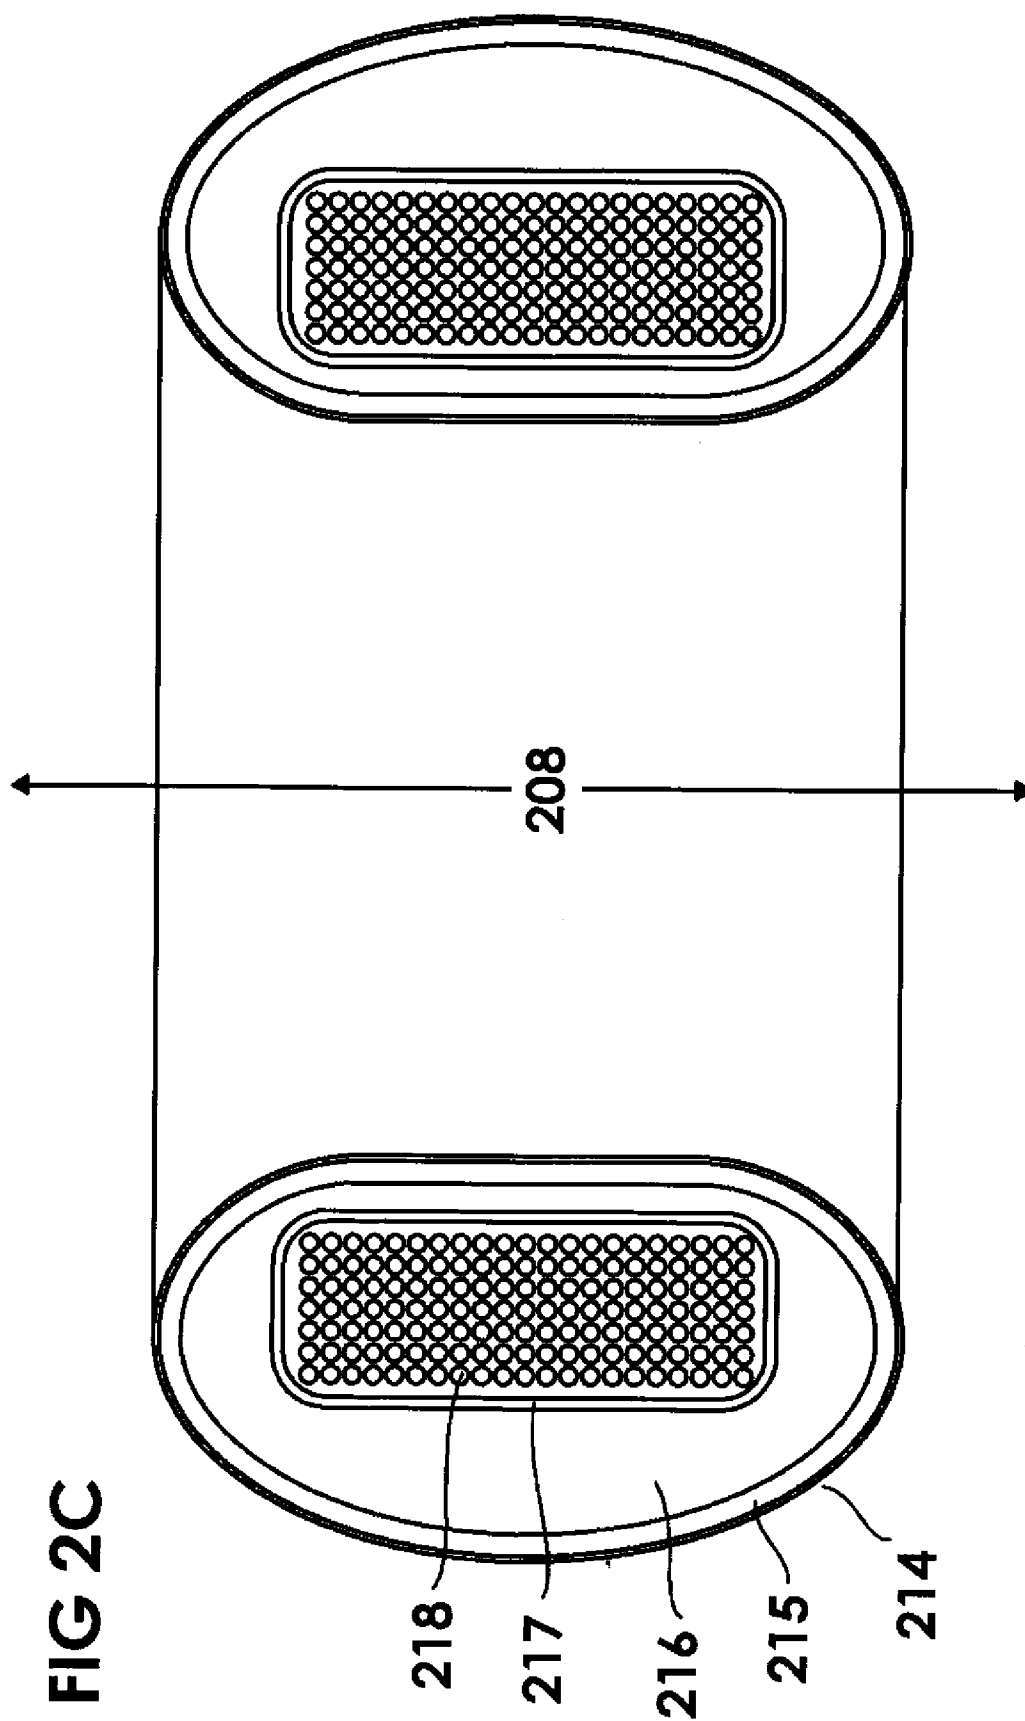




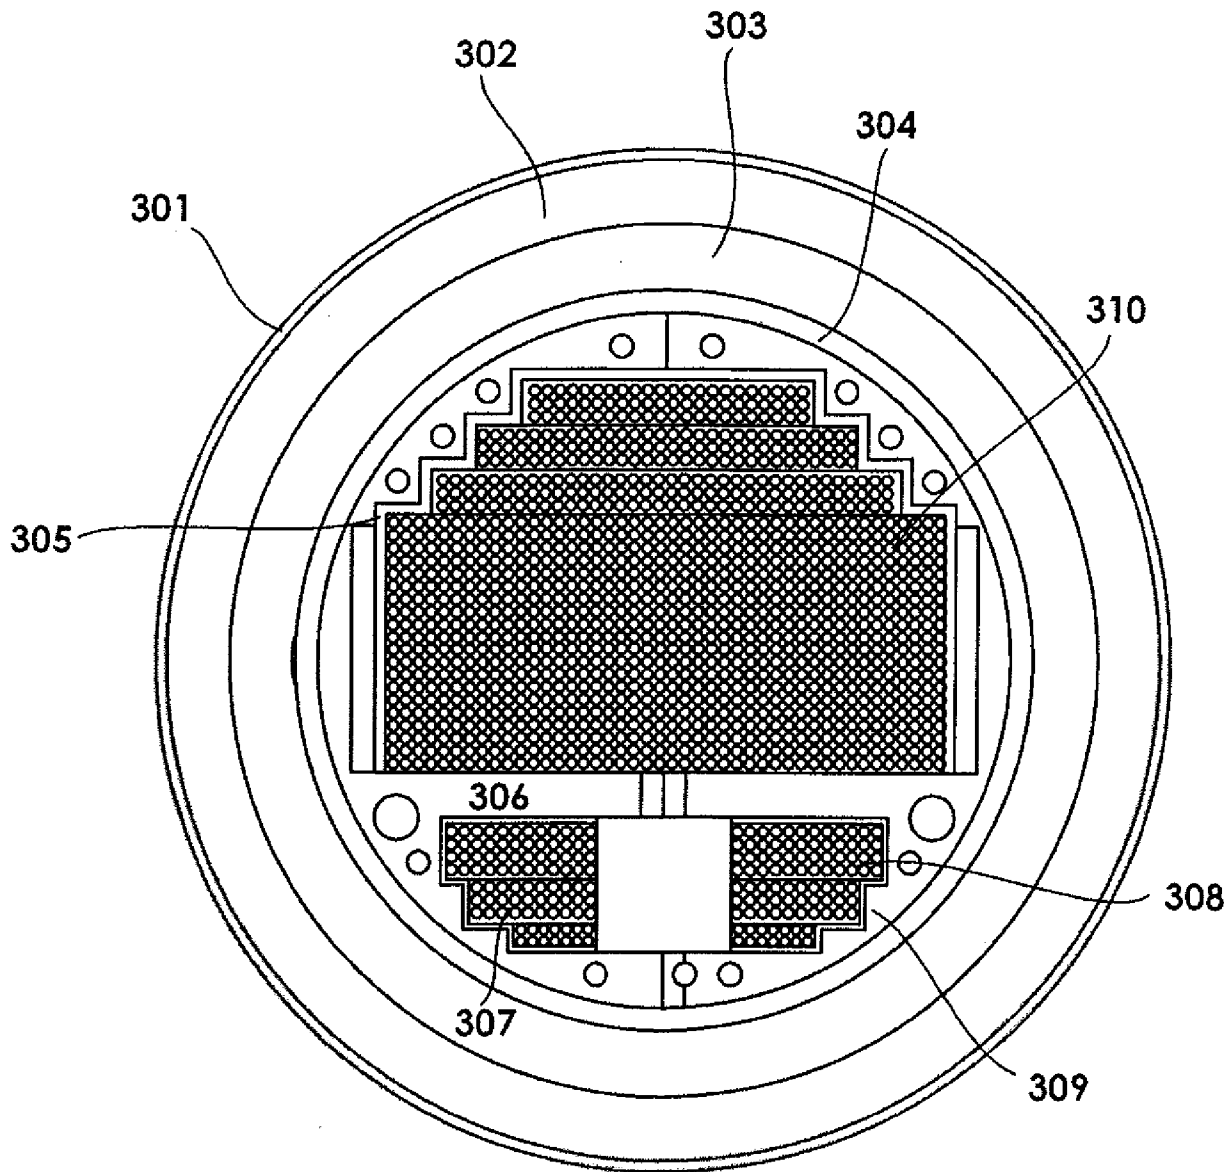
FIG 3

FIG 4

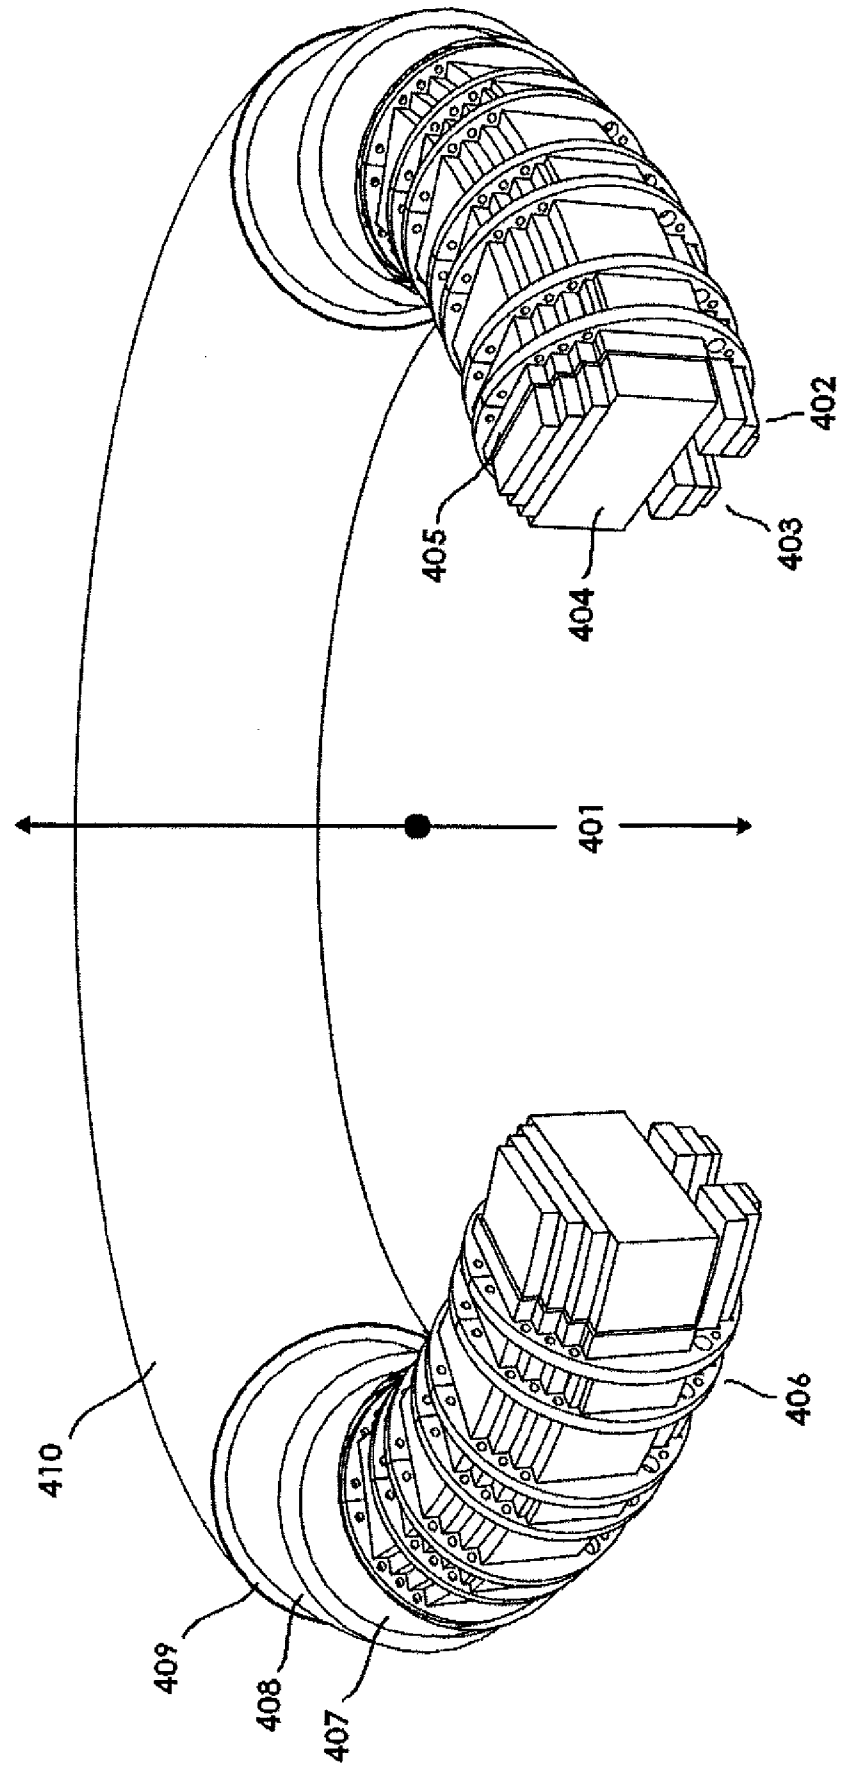

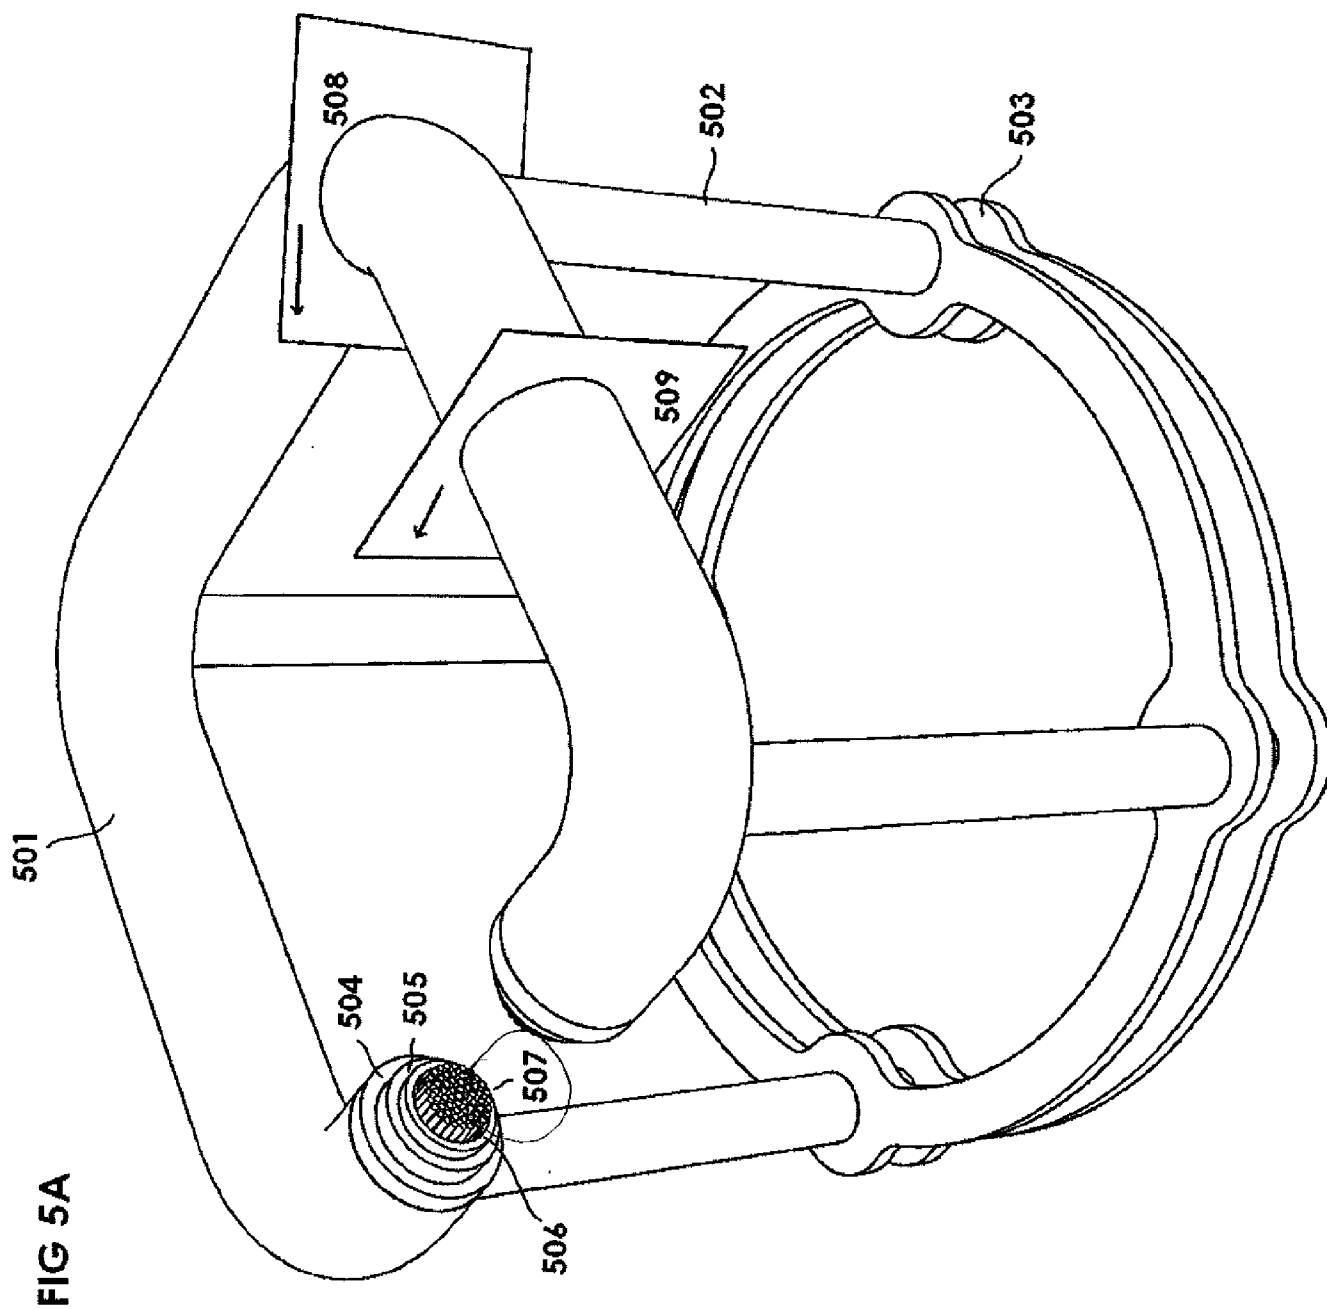

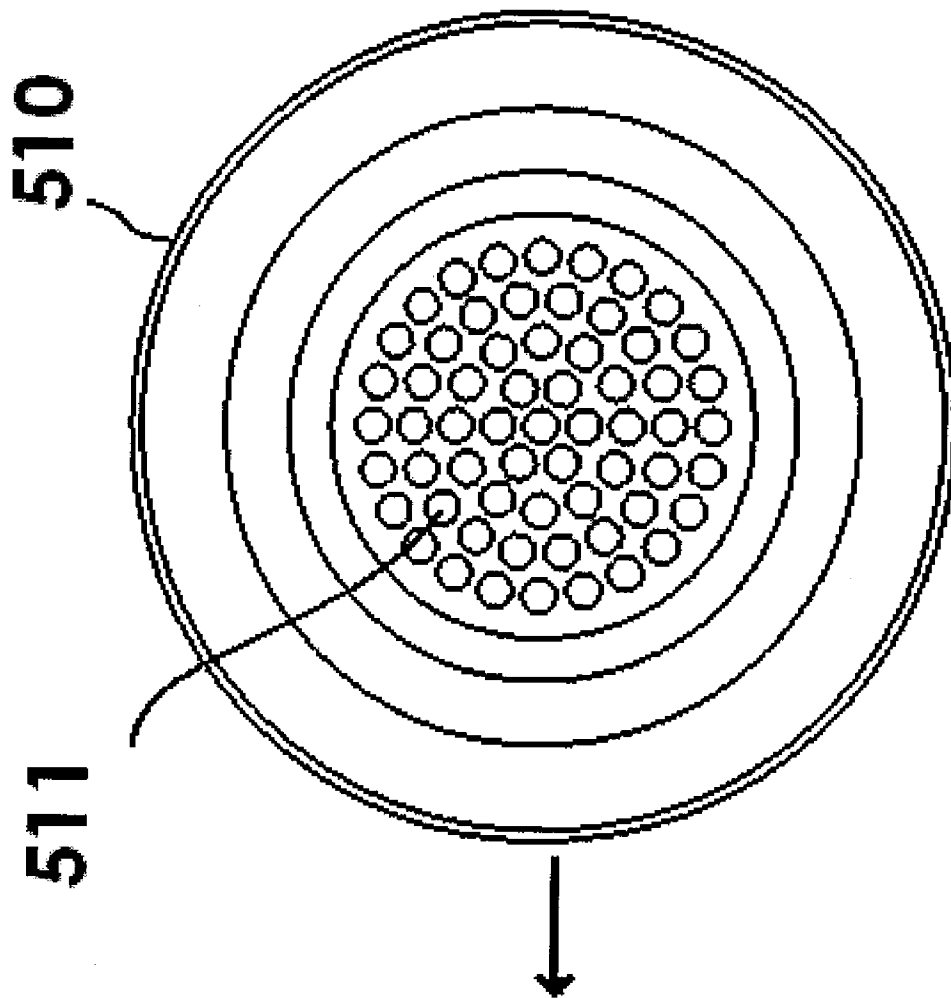


FIG 5B

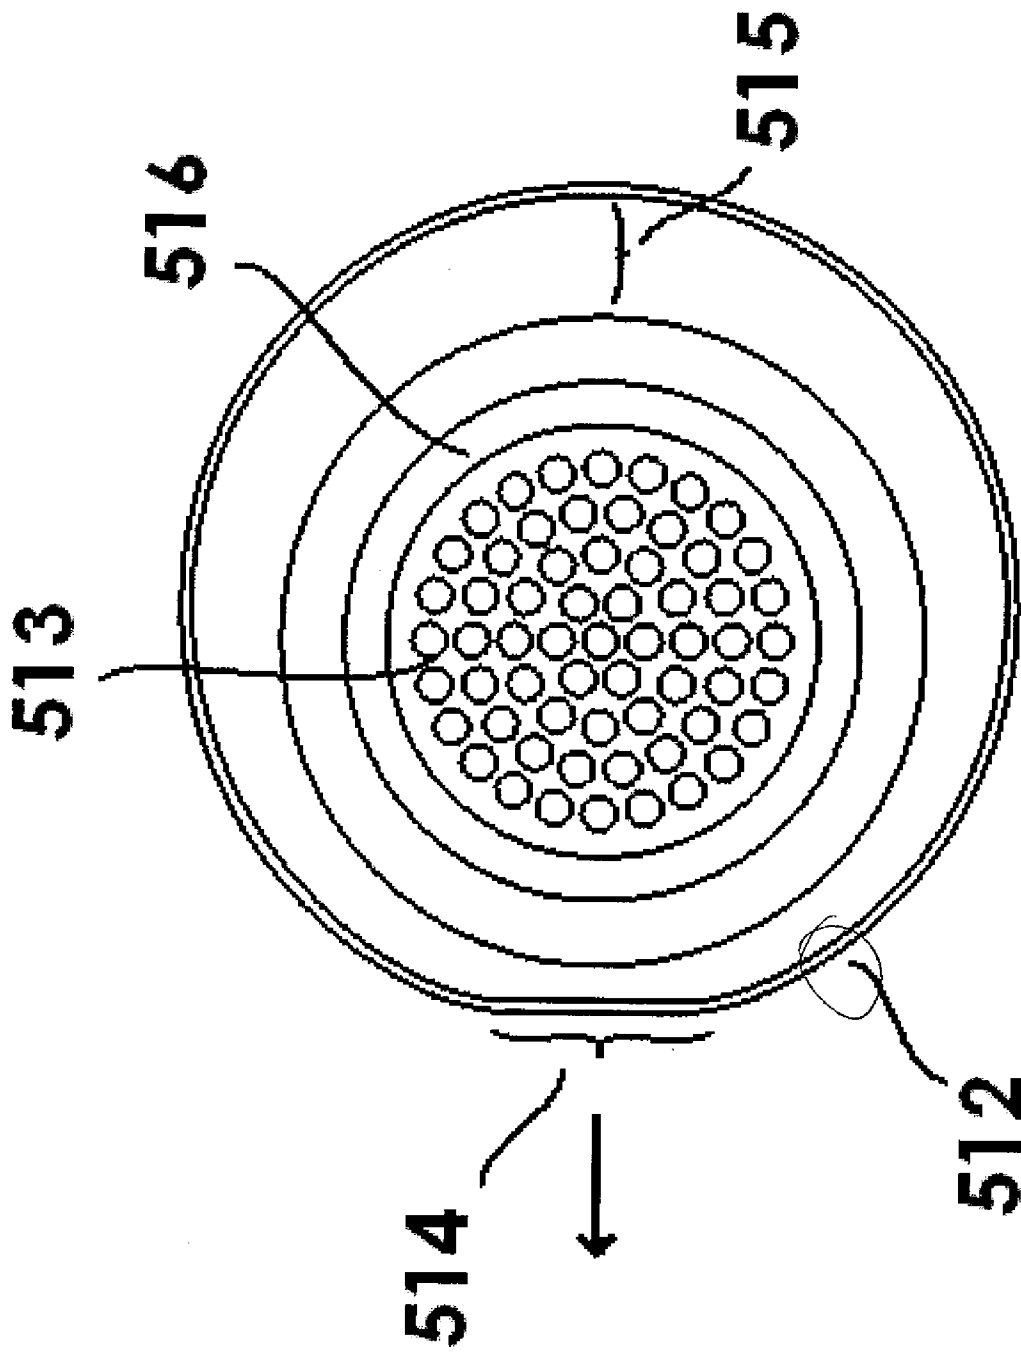


FIG 5C

FIG 6



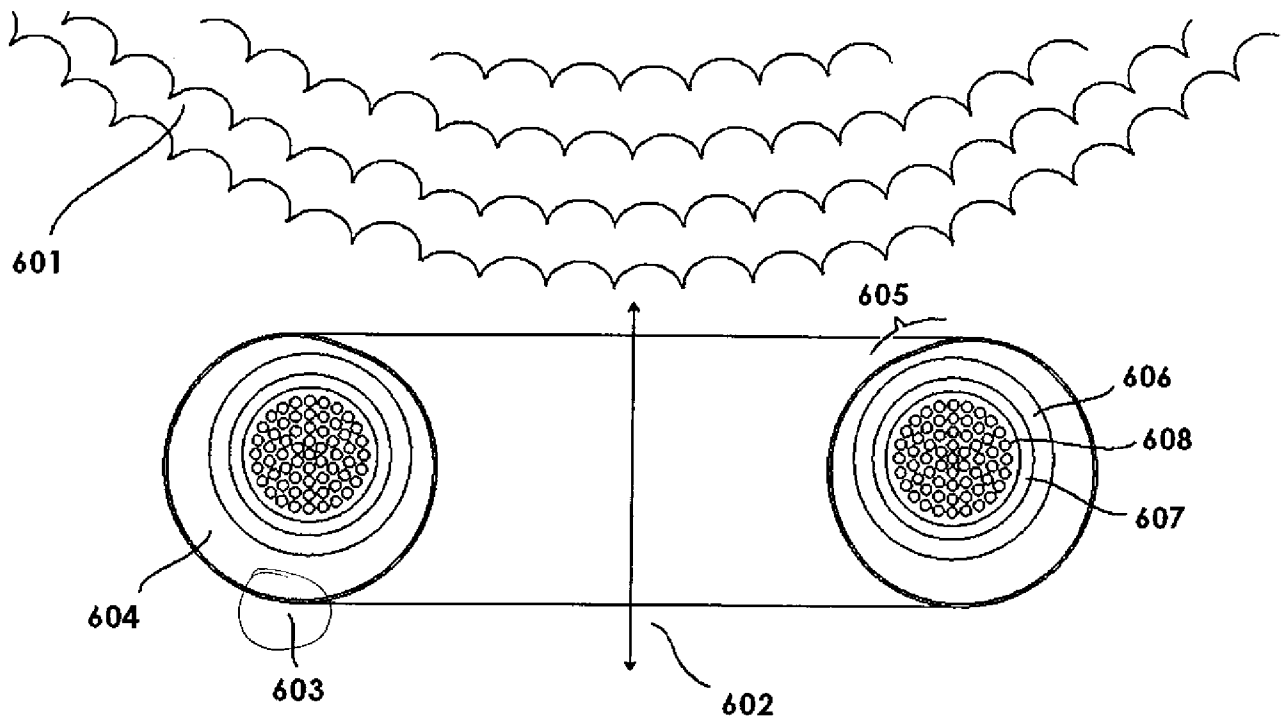


FIG 7

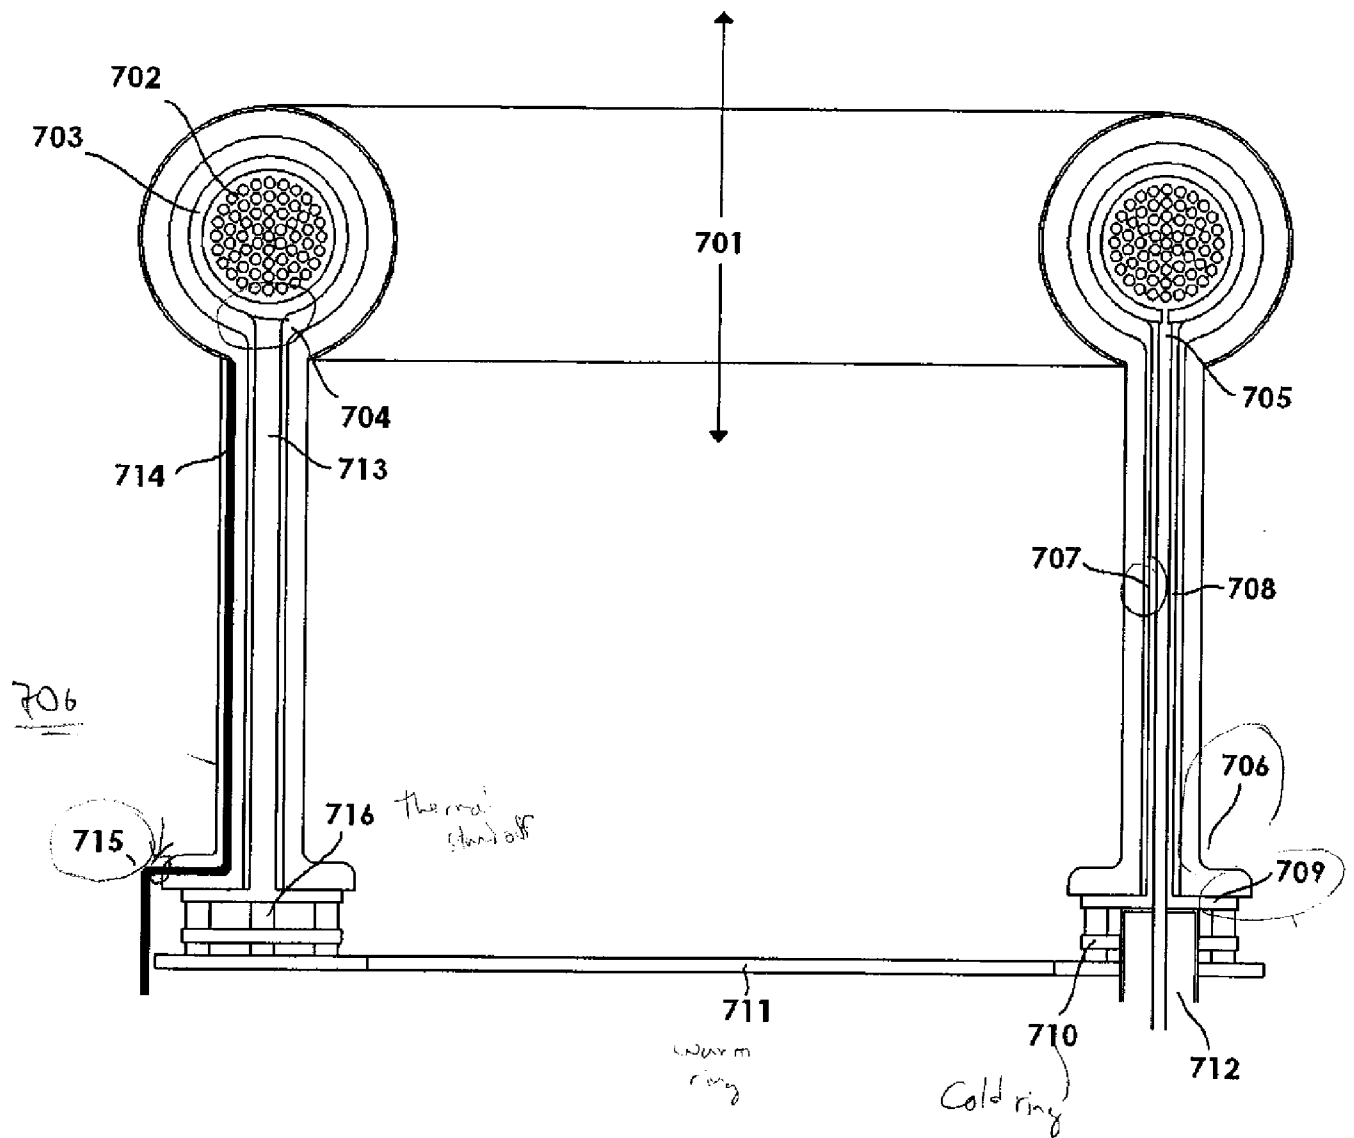

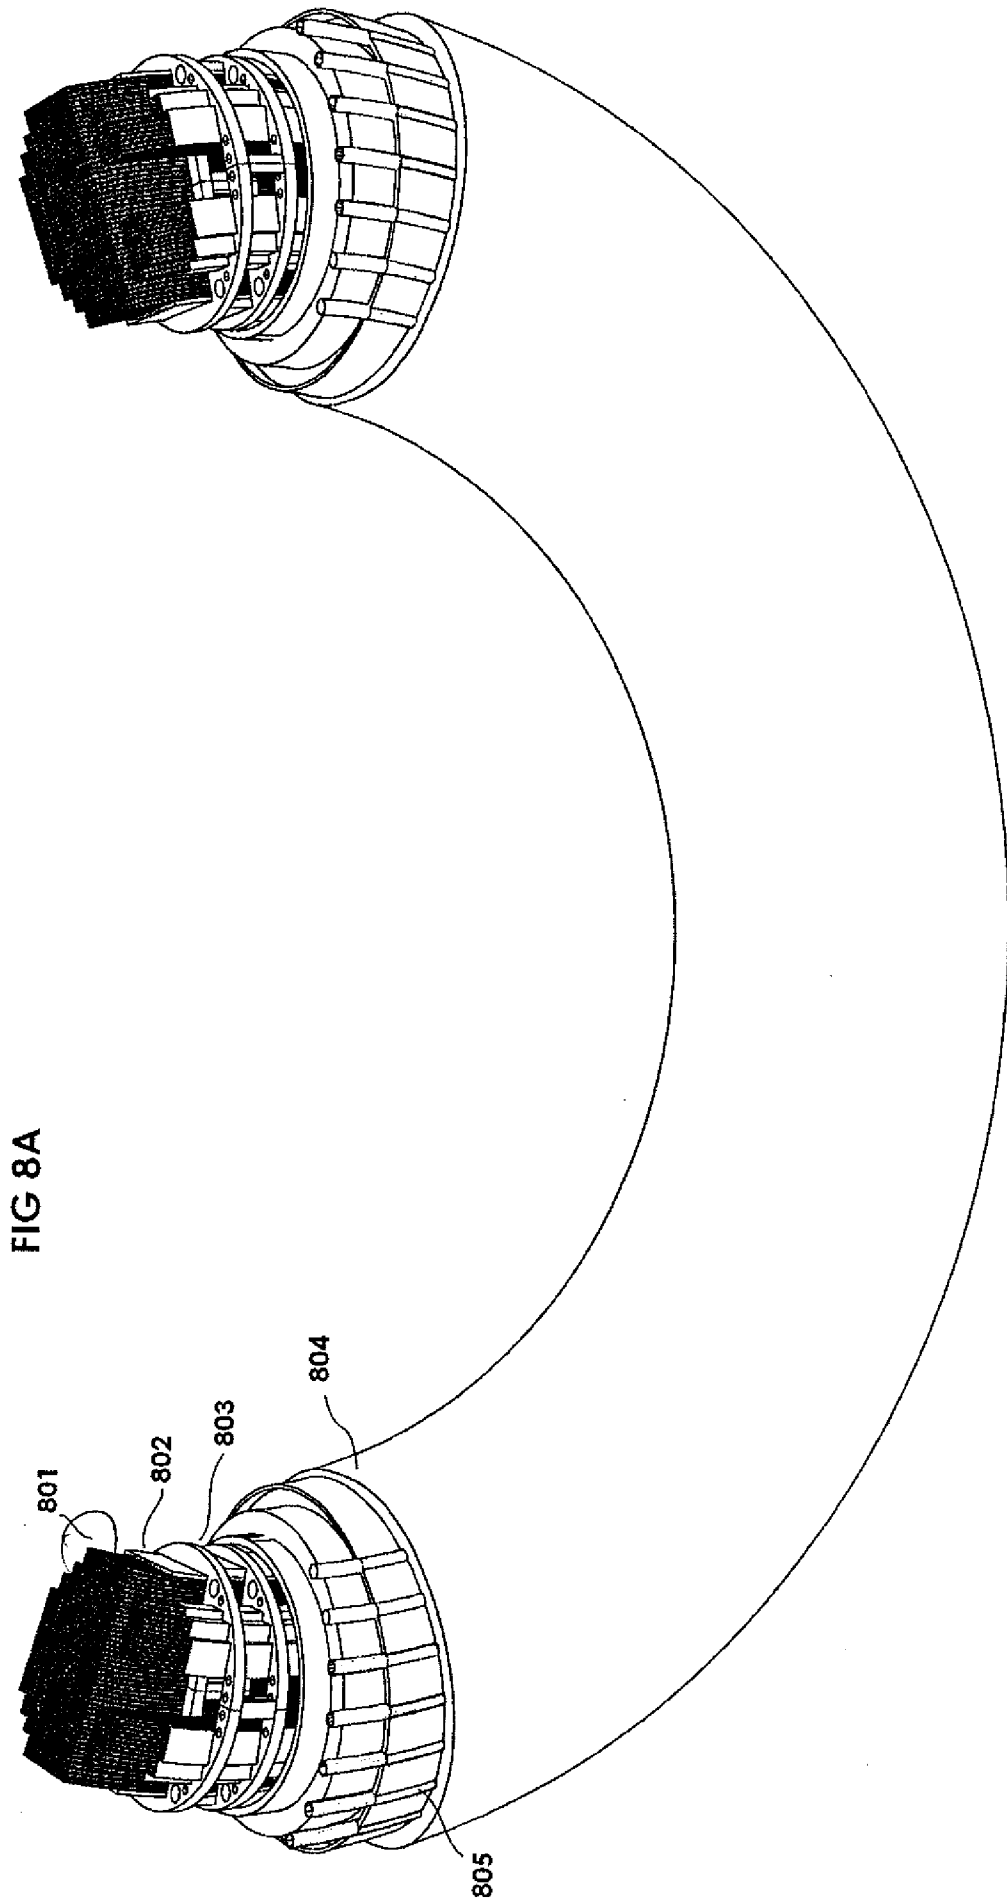

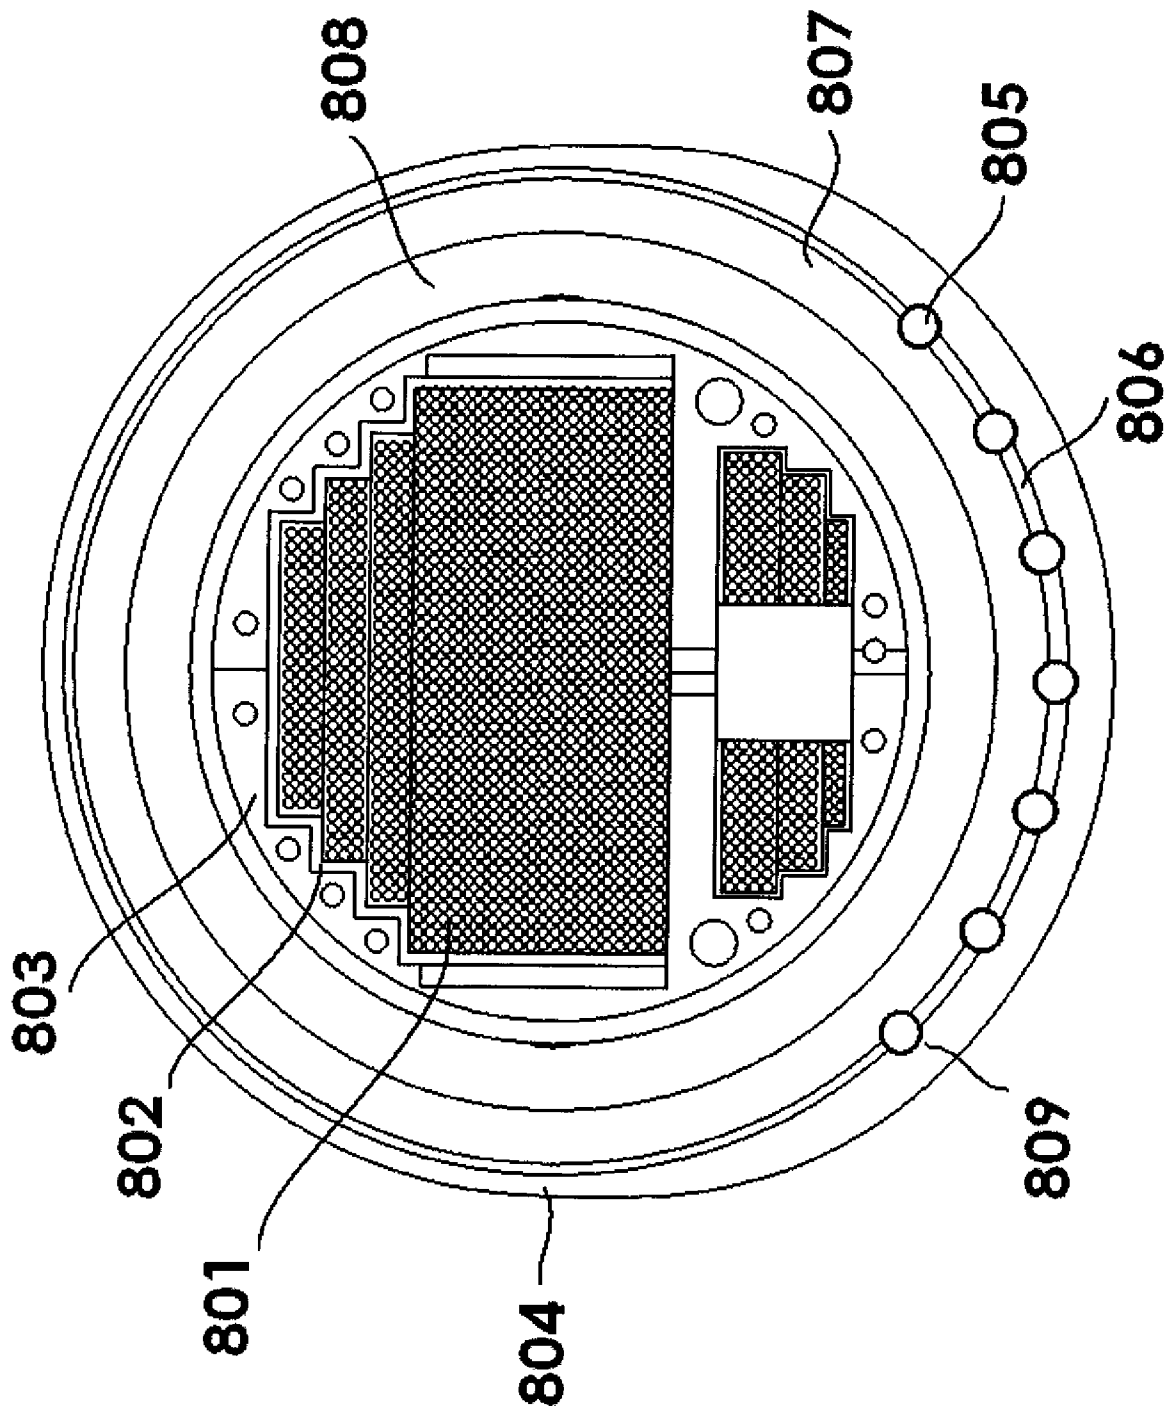


FIG 8B

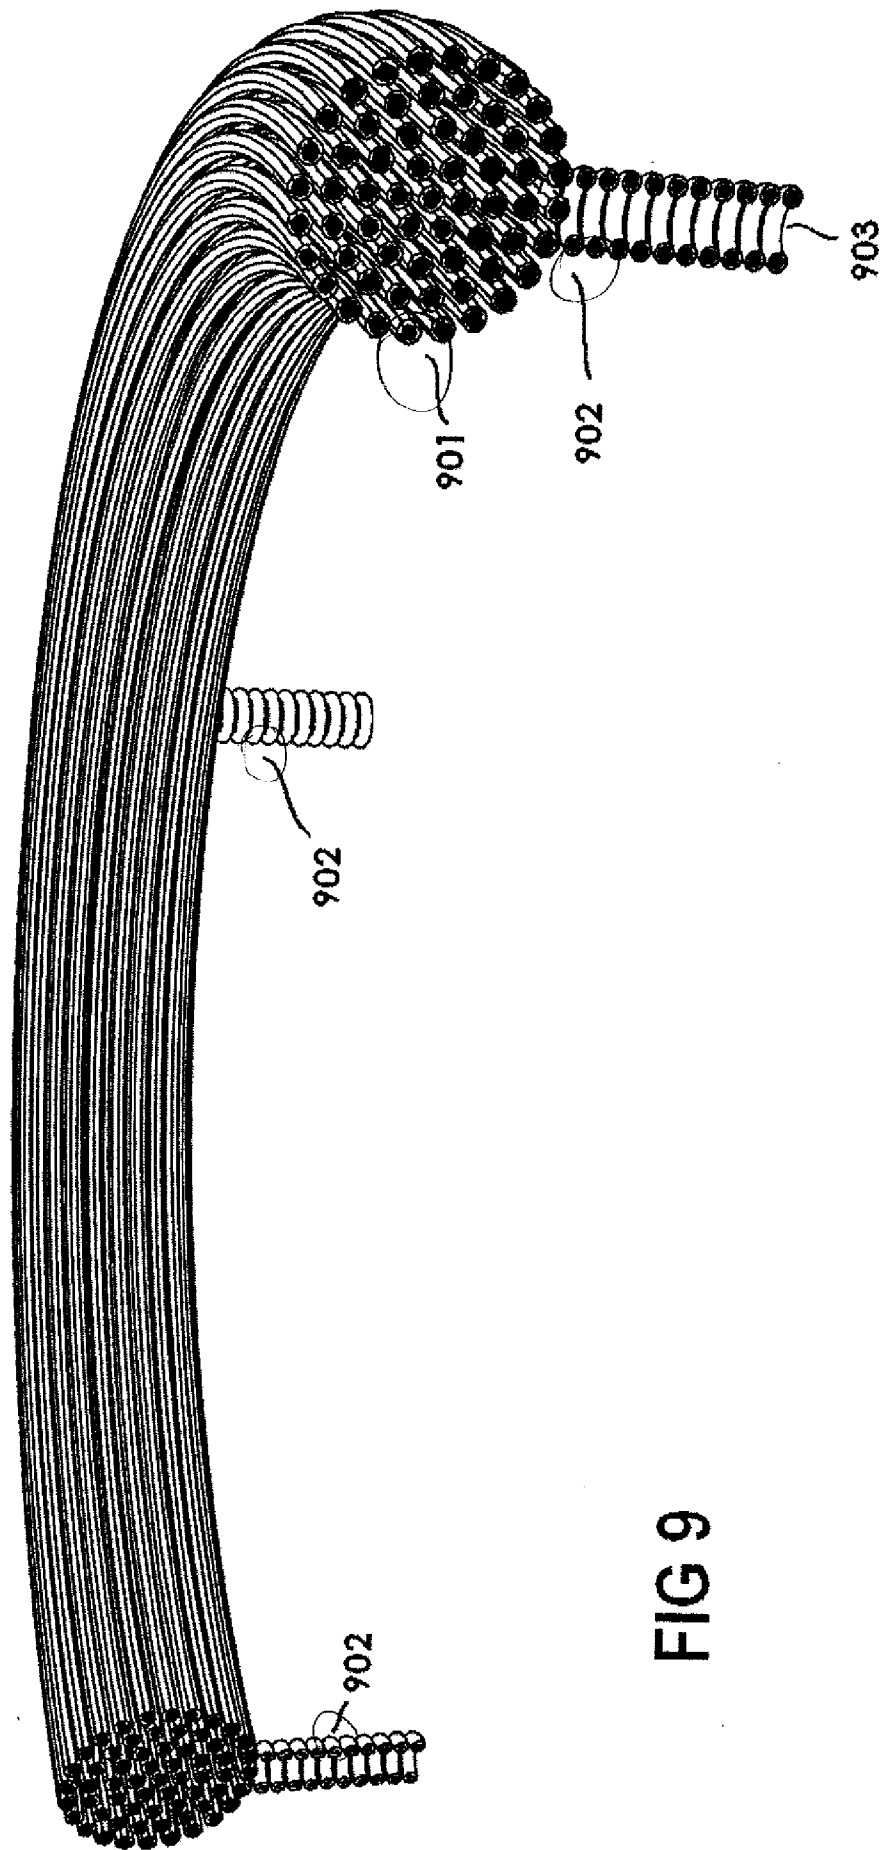


FIG 9

1000**1001**

Insulating a superconductive winding,
winding housing, coolant and coolant
container electrically

1002

Supporting the superconductive winding,
winding housing, cooling system and cooling
system housing with support devices

1003

Insulating the support devices with a layer of
dielectric material

FIG 10

1100**1101**

Insulating a superconductive winding, winding housing, coolant and coolant container electrically

**1102**

Supporting the superconductive winding, winding housing, cooling system, and coolant container mechanically with support devices

**1103**

Insulating the support devices with one or more layers of dielectric material

**1104**

Providing one or more layers of a high-K dielectric material enveloping a support structure for the one or more superconductive magnets

FIG 11

1200**1201**

Electrically isolating a superconductive coil from
its outermost container

1202

Providing one or more dielectric layers that
surround a support structure

FIG 12

1300**1301**

Electrically isolating a superconductive coil from its outermost container

**1302**

Providing one or more dielectric layers that surround a support structure that is a cryocontainer

FIG 13

1400**1401**

Electrically isolating a superconductive coil from its outermost container

1402

Providing one or more dielectric components that surround a support structure wherein the dielectric components withstand a maximum voltage of 250,000V

FIG 14

1500**1501**

Electrically isolating a superconductive coil from an outermost electrically conductive container

**1502**

Providing one or more dielectric layers that surround a support structure wherein the thickness of the dielectric layers are between about 0.5 centimeters to 30 centimeters

FIG 15

1600**1601**

Electrically isolating a superconductive magnet from its outermost container by providing one or more dielectric layers that surround a support structure

1602

Insulating a superconductive winding, winding housing, cooling system and cooling system housing electrically with one or more layers of dielectric material


1603


Supporting the superconductive winding, winding housing, cooling system, and cooling system housing mechanically within a chamber by one or more support structures

1604

Insulating the support structures with one or more layers of dielectric material

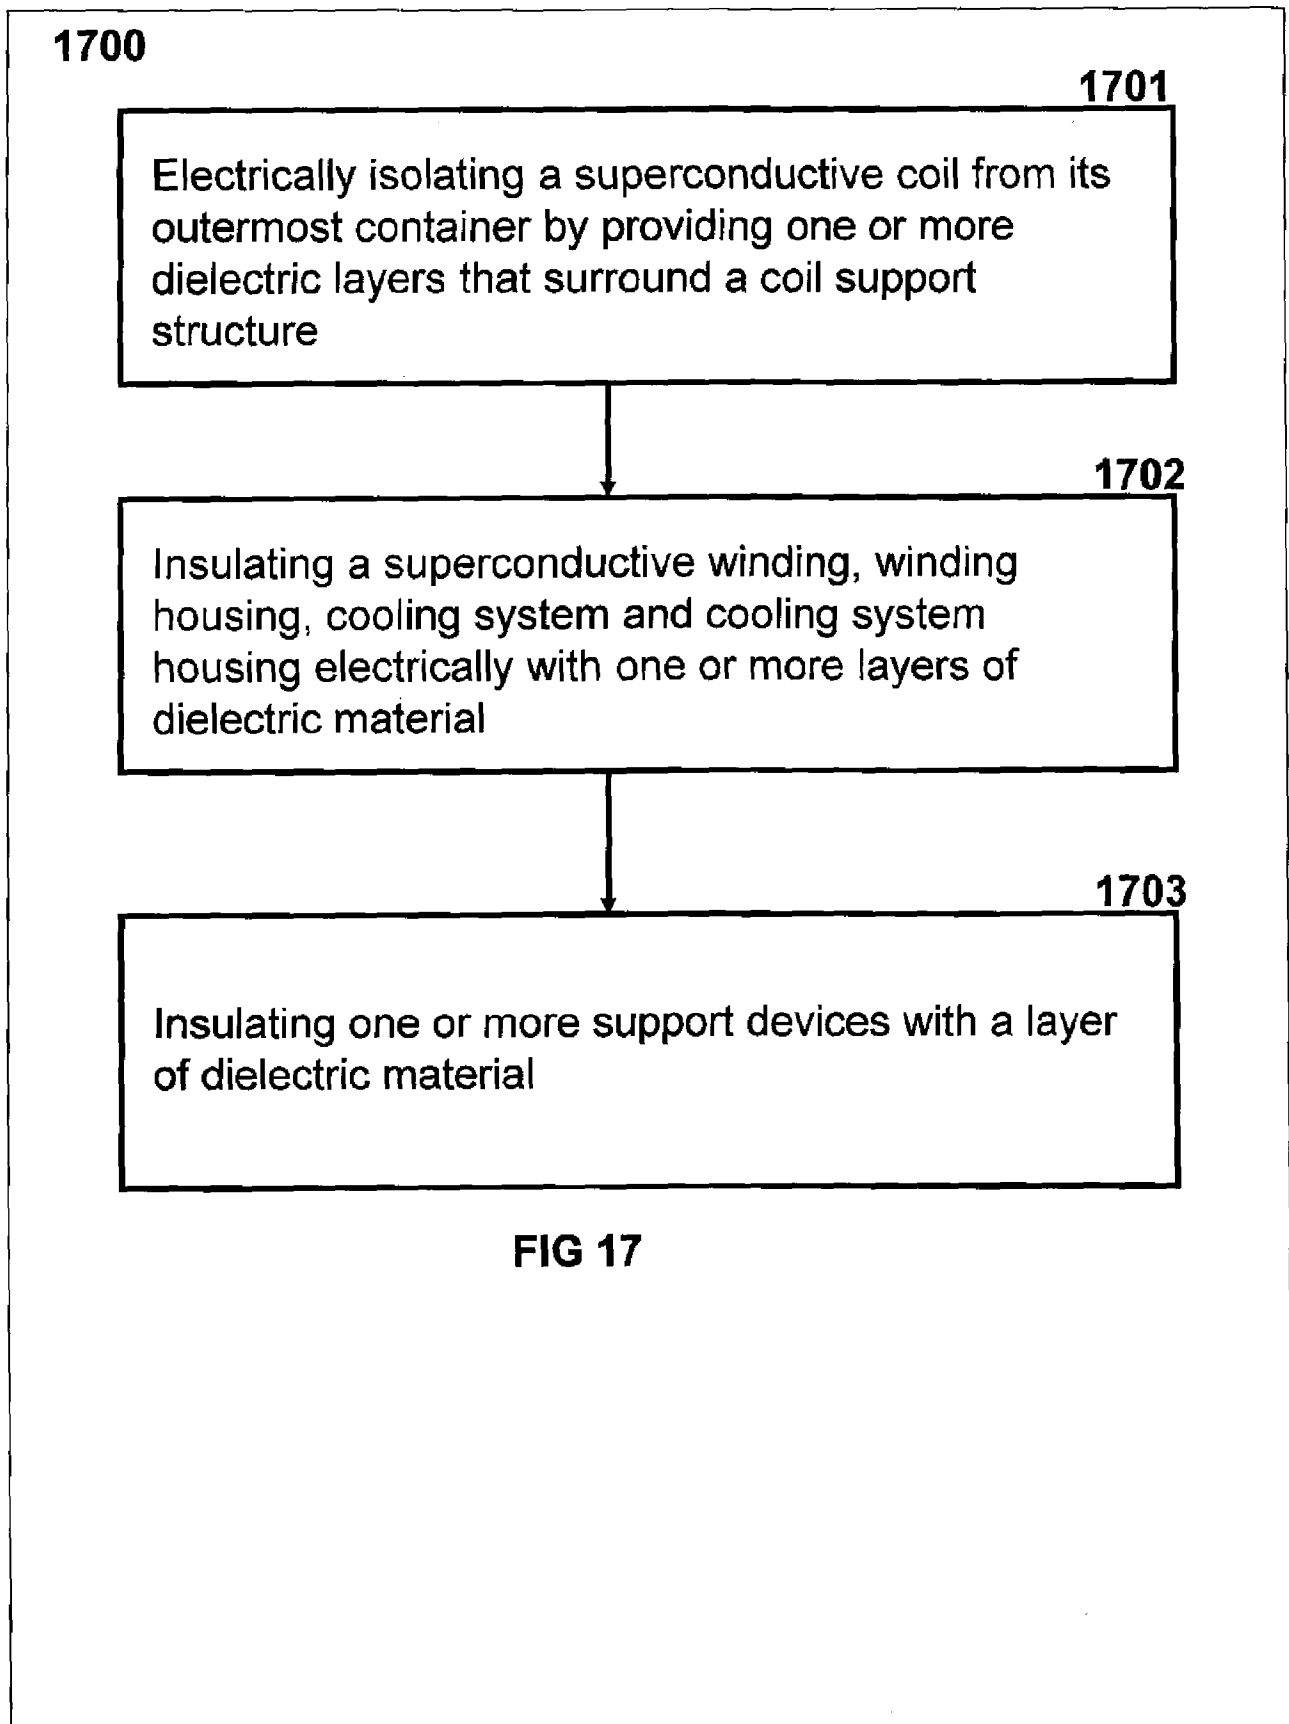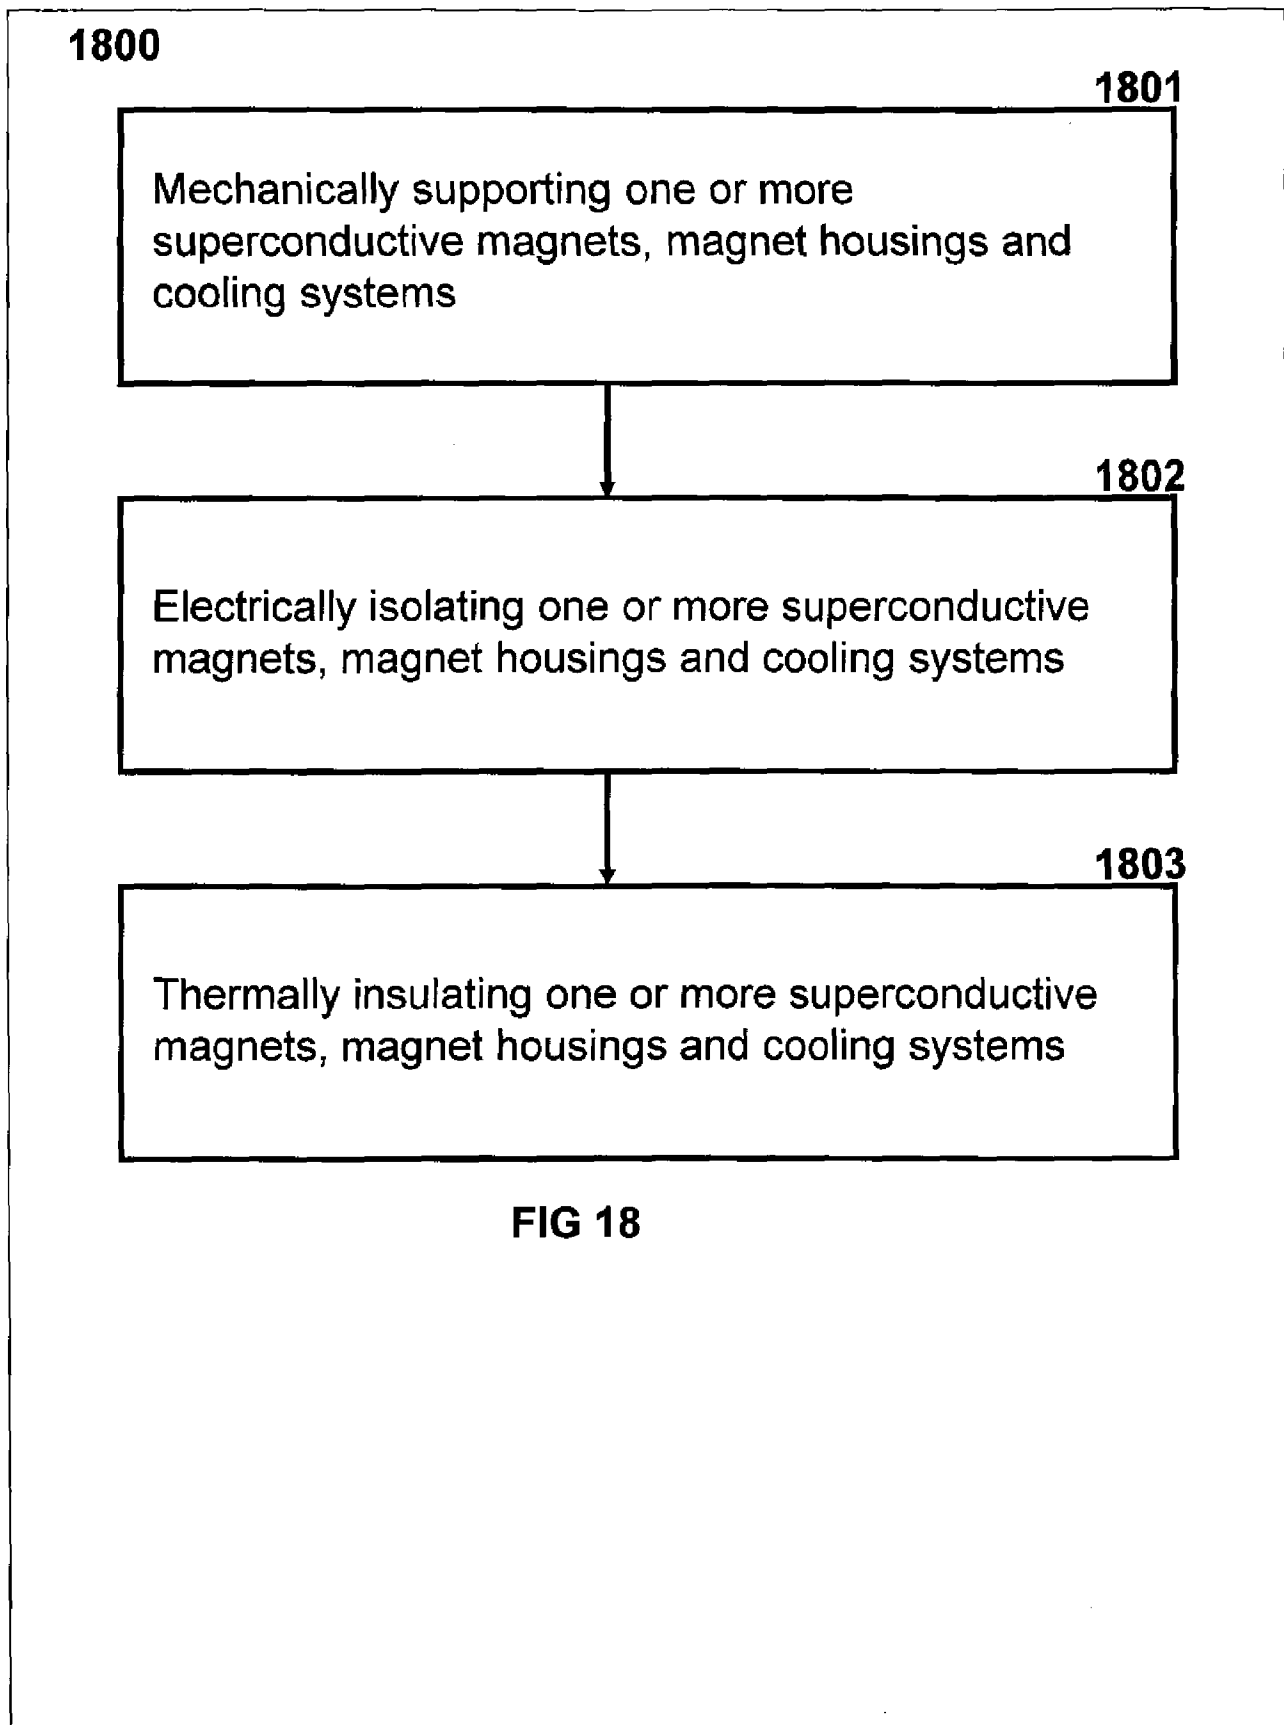FIG 16





1900**1901**

Mechanically supporting one or more superconductive windings, winding housings and cooling systems

1902

Electrically isolating one or more superconductive windings, winding housings and cooling systems


1903


Thermally insulating one or more superconductive windings, winding housings and cooling systems


1904

Structurally supporting one or more superconductive windings, winding housings and cooling systems with one or more hollow support devices

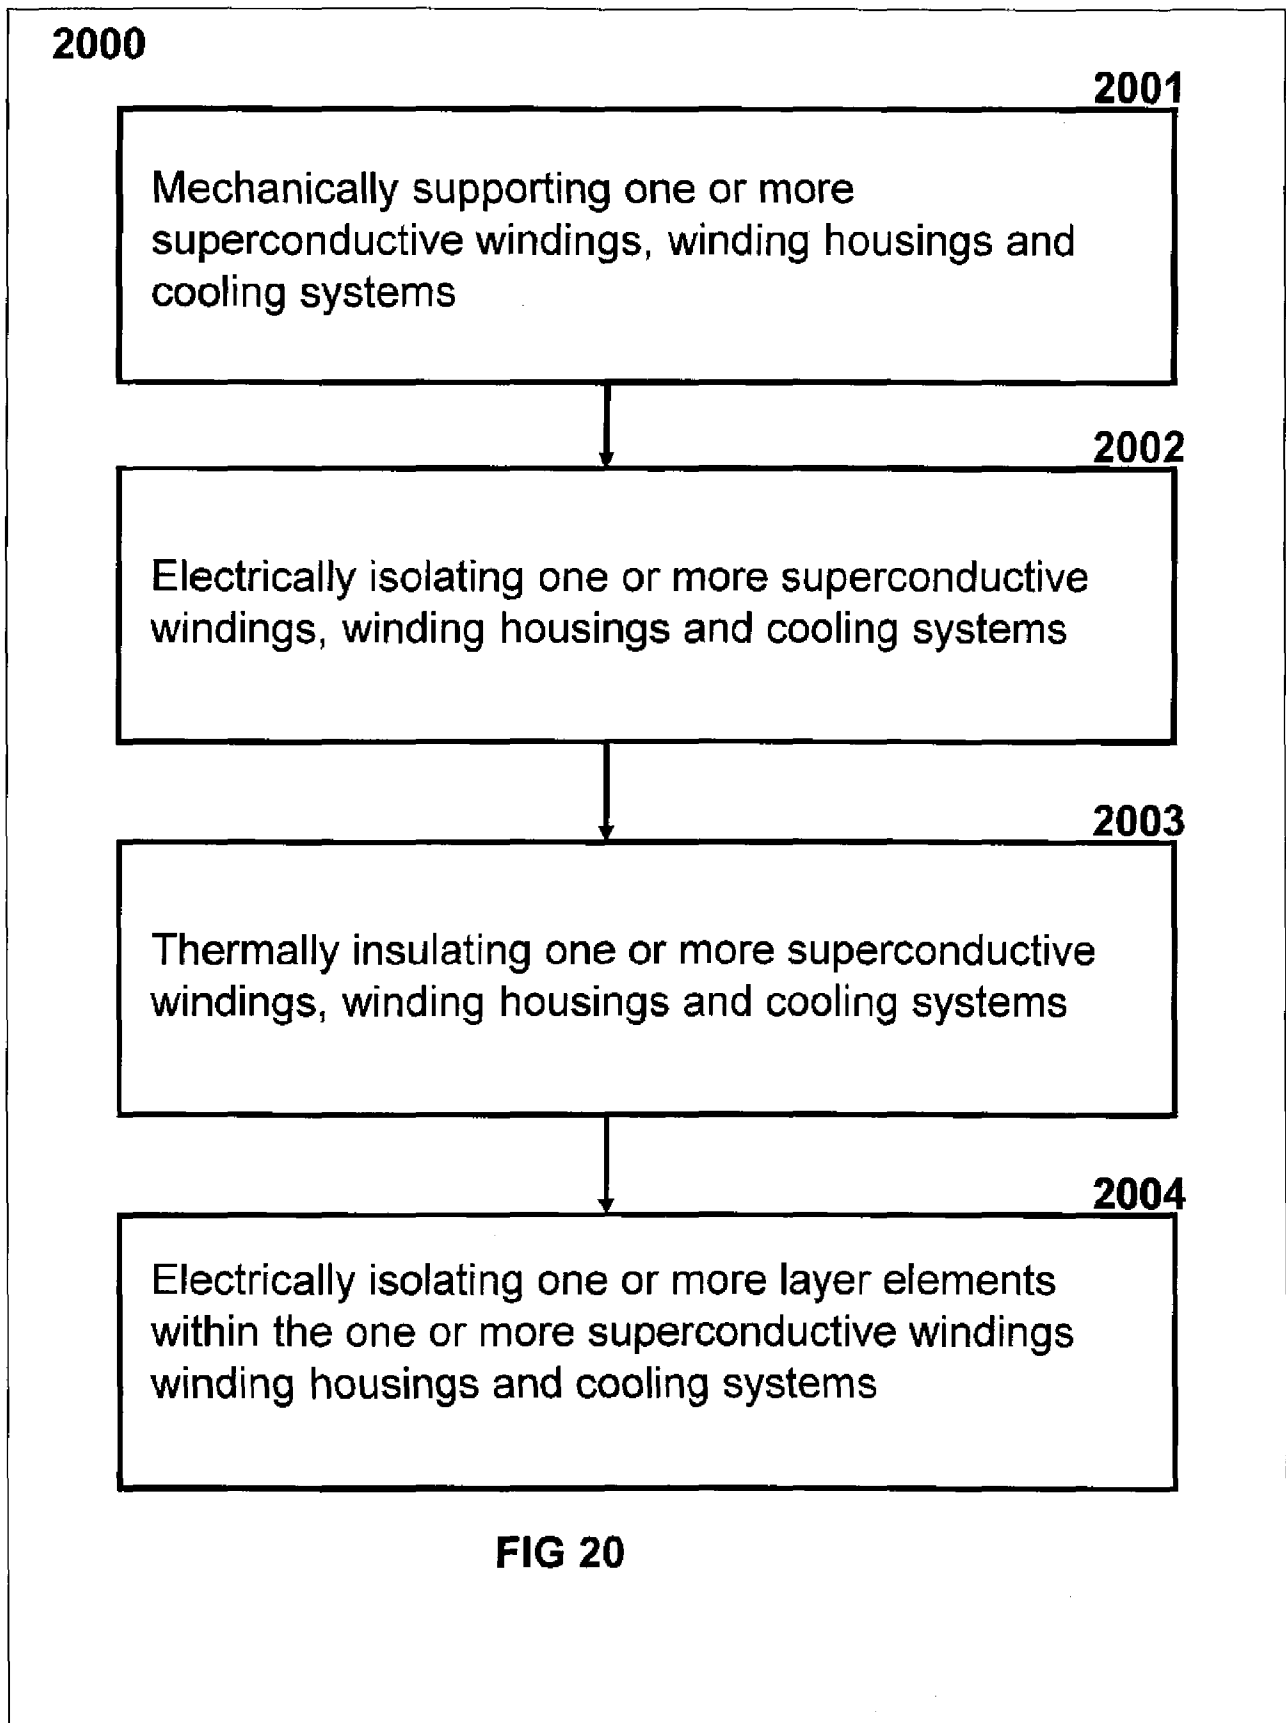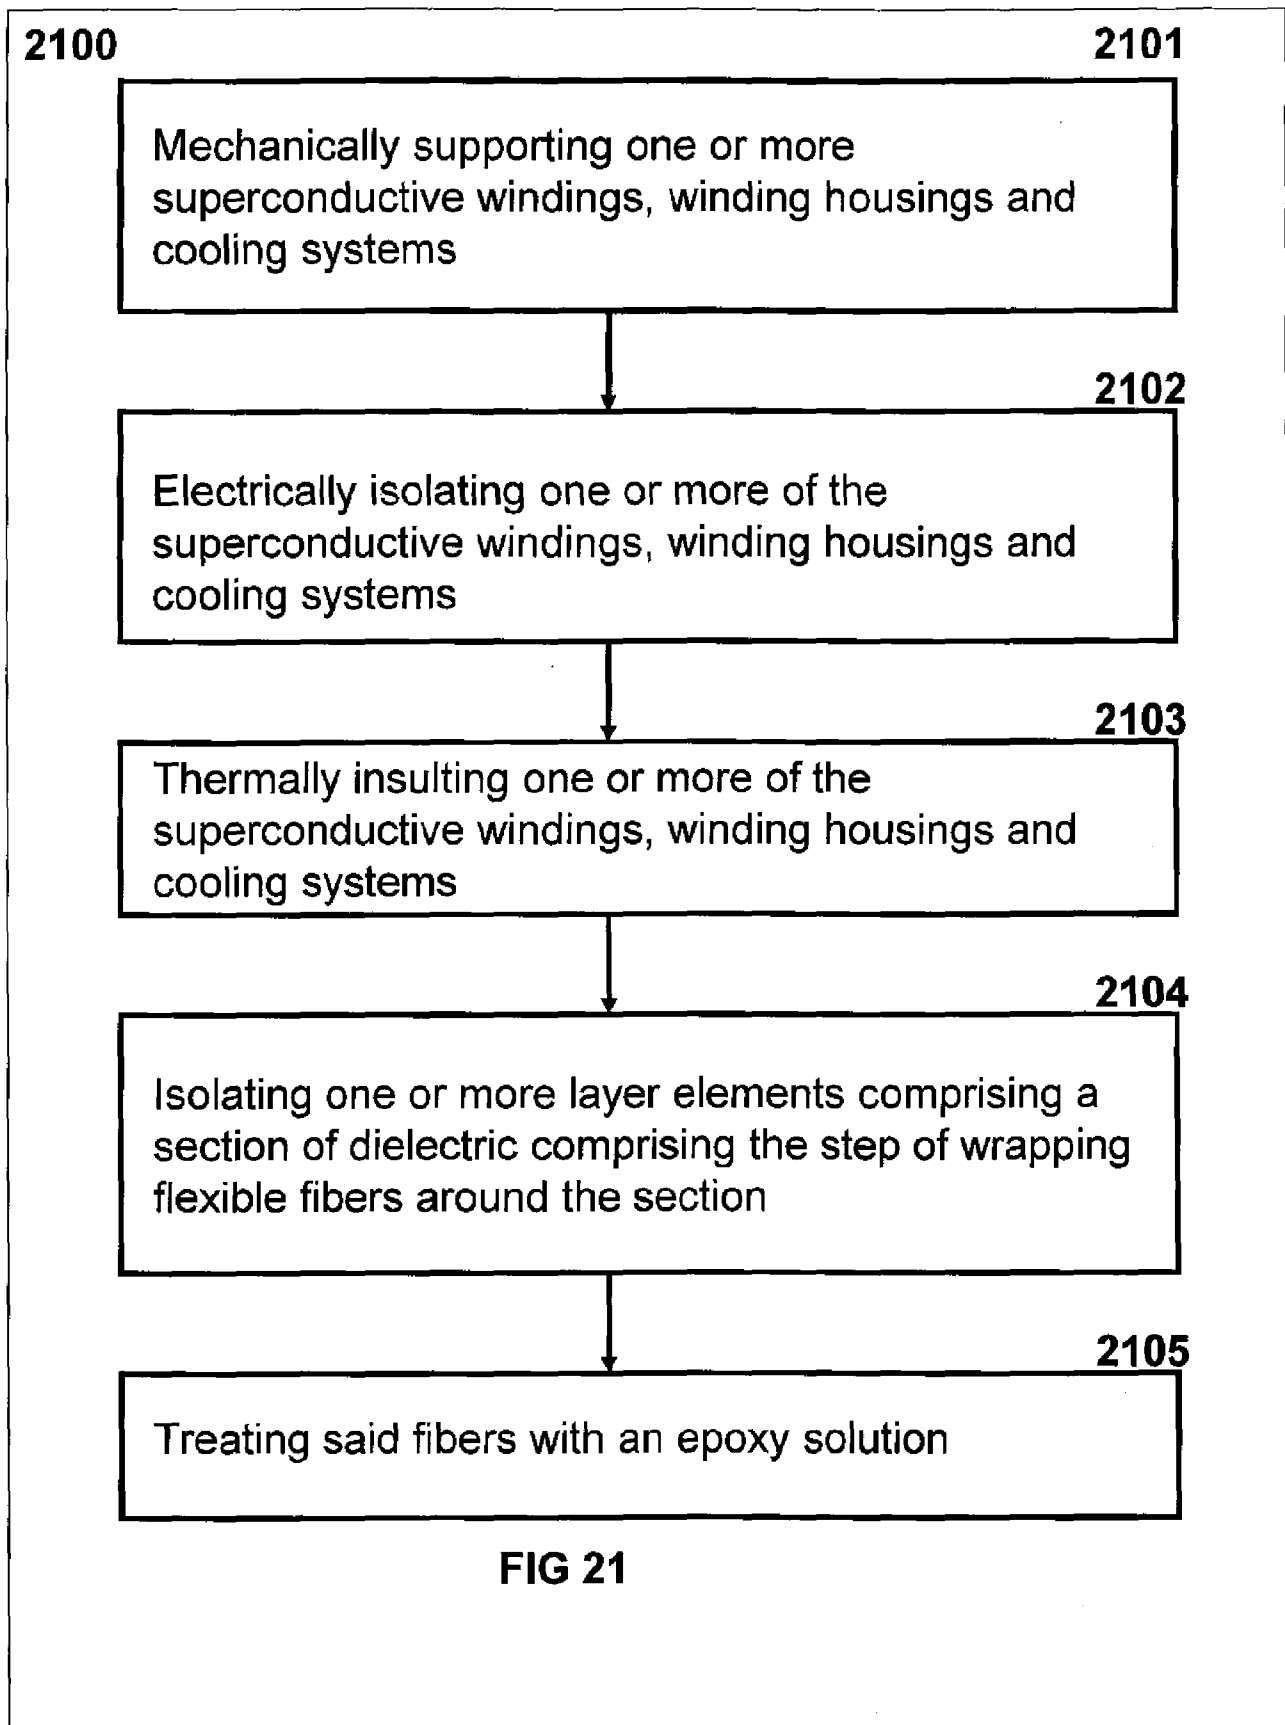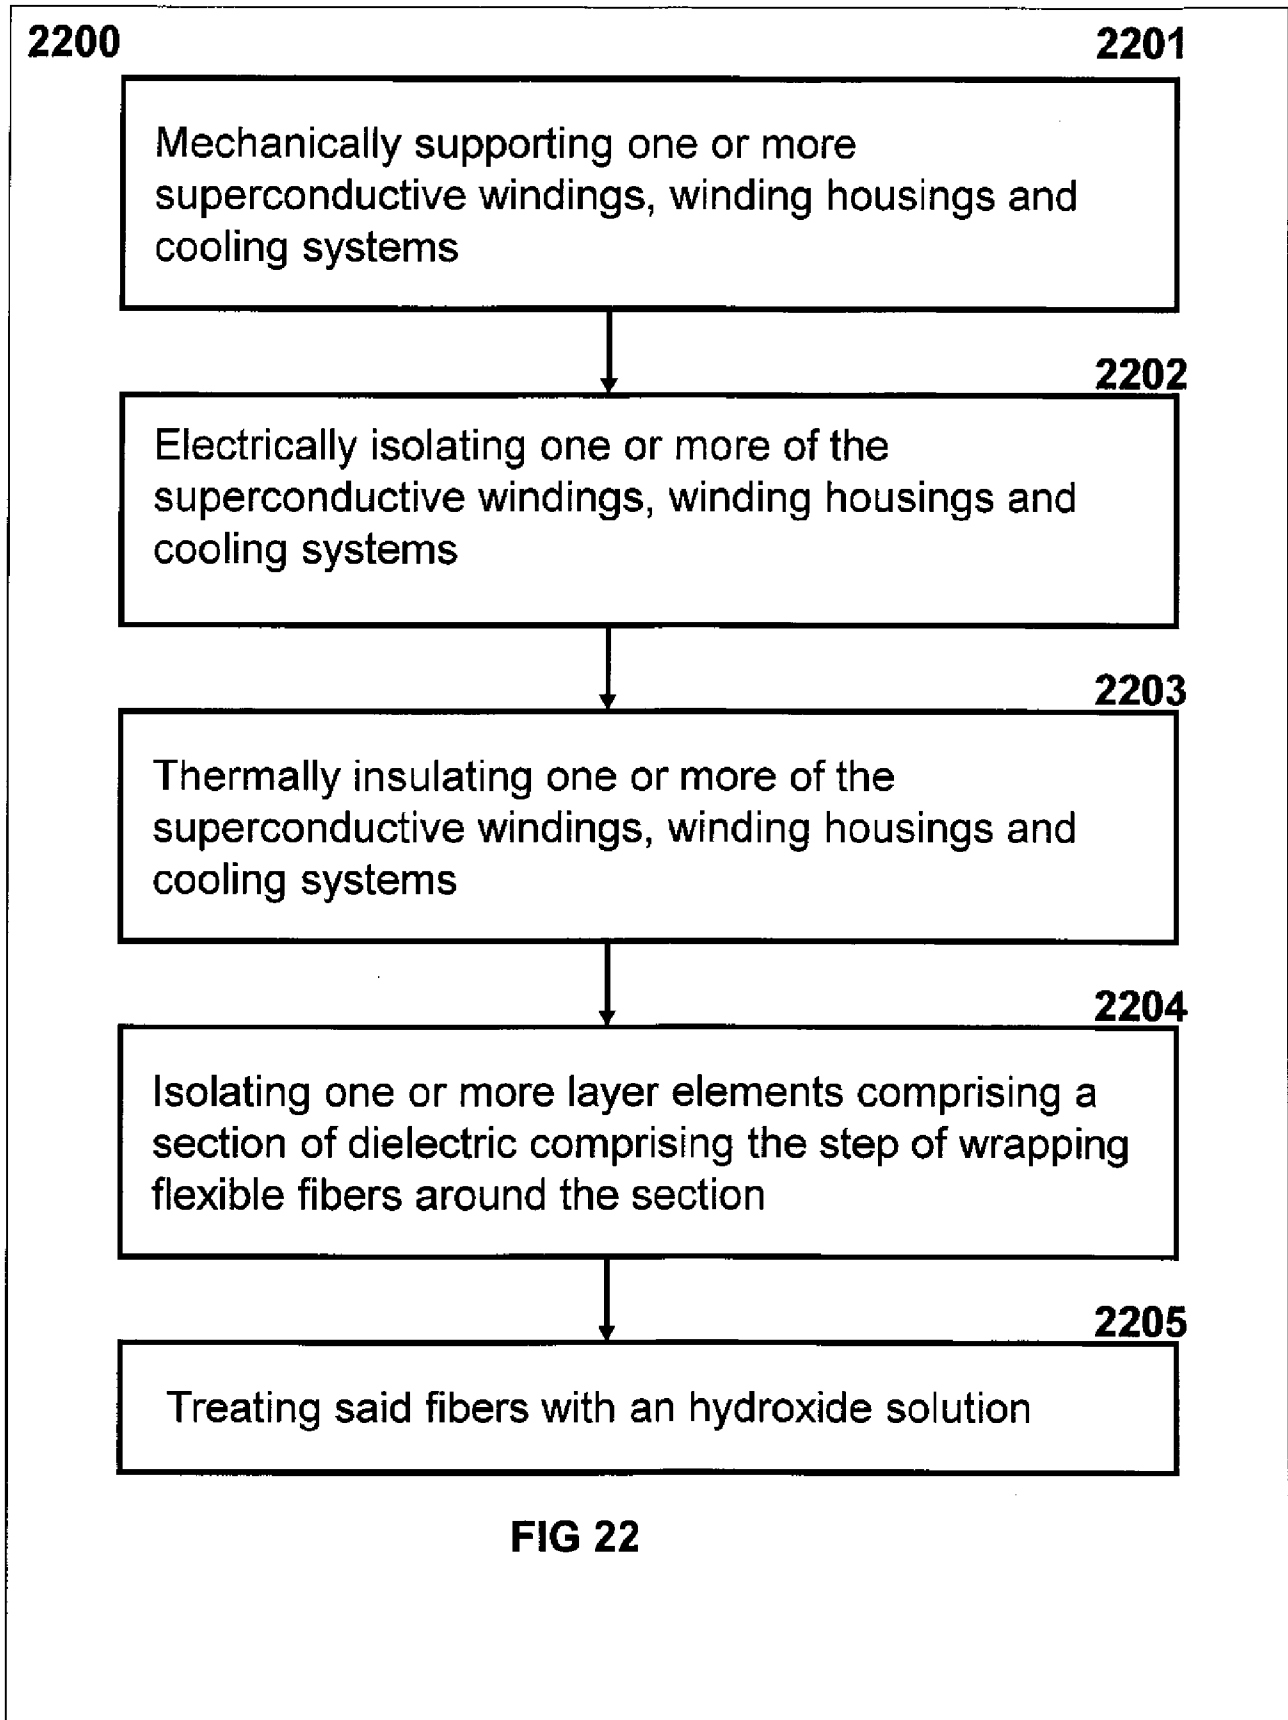FIG 19







2300**2301**

Mechanically supporting one or more superconductive windings, winding housings and cooling systems

2302

Electrically isolating one or more of the superconductive windings, winding housings and cooling systems

2303

Thermally insulating one or of the superconductive windings, winding housings and cooling systems, further comprising the step of incorporating a layer of radiation shielding within an outermost electrically conductive layer

FIG 23

2400**2401**

Mechanically supporting one or more superconductive windings, winding housings and cooling systems

2402

Electrically isolating one or more superconductive windings, winding housings and cooling systems

2403

Thermally insulating one or more superconductive windings, winding housings and cooling systems

2404

Providing one or more layers of vacuum impinged metalized woven polymeric fabric wrapping coupled with a flexible low density silica-based layer of thermal insulation containing high reflectivity, low thermal conductivity material

FIG 24