

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3292310 T3**

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **F 04 D 29/22 (2006.01)** **F 04 D 29/24 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2021-03-22**
- (80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2021-01-27**
- (86) Europæisk ansøgning nr.: **16789570.5**
- (86) Europæisk indleveringsdag: **2016-04-27**
- (87) Den europæiske ansøgnings publiceringsdag: **2018-03-14**
- (86) International ansøgning nr.: **JP2016063795**
- (87) Internationalt publikationsnr.: **WO2016178434**
- (30) Prioritet: **2015-05-04 IT UB20150308**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Ebara Corporation, 11-1 Haneda , Asahi-cho , Ohta-ku, Tokyo 144-8510, Japan**
- (72) Opfinder: **GROPPO, Renato, c/o EBARA Pumps Europe S.p.A., Via Campo Sportivo 30, 38023 Cles (Trento),
Italien**
MATTEAZZI, Mariano, c/o EBARA Pumps Europe S.p.A., Via Campo Sportivo 30, 38023 Cles (Trento), Italien
SAKIHAMA, Dai, c/o Ebara Corporation, 11-1 Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510, Japan
BALBO, Fabio, c/o EBARA Pumps Europe S.p.A., Via Campo Sportivo 30, 38023 Cles (Trento), Italien
- (74) Fuldmægtig i Danmark: **AWA Denmark A/S, Strandgade 56, 1401 København K, Danmark**
- (54) Benævnelse: **PUMPEHJULSAGGREGAT TIL CENTRIFUGALPUMPER**
- (56) Fremdragne publikationer:
WO-A1-2014/096604
CN-U- 201 650 848
JP-A- H02 161 200
SU-A1- 754 117
US-A- 3 246 605
US-A- 5 171 128
US-A1- 2011 182 748

DESCRIPTION

Technical Field

[0001] The present invention relates to an impeller assembly for centrifugal pumps, of a single or multi-stage type.

Background Art

[0002] As known, centrifugal pump impellers are generally composed of pairs of disc-like bodies, suitably shaped, facing each other in such a way as to form a cavity within which is located a set of blades connecting the two discs.

[0003] Each impeller is also provided with a central hub, or an equivalent coupling device, which allows to fasten the impeller to a shaft brought into rotation by motor means.

Summary of the Invention

Technical Problem

[0004] Most common types of impellers, despite being widely used, have some drawbacks; perhaps, the most important of these is related to axial thrust generation.

[0005] A centrifugal pump impeller is in fact subjected to different pressures acting on both sides: on the suction side, generally acts a pressure lower than the atmospheric pressure, while on the opposite side, acts a pressure almost equal to the delivery pressure.

[0006] This gives rise to an axial thrust which may become very strong, such as to create large losses, in terms of efficiency, and such as to create overloading that damages the motor bearings.

[0007] These critical issues are clearly emphasized in the case of multi-stage pumps.

[0008] In an attempt to solve the problems related to the axial thrust generation, some multistage pumps manufacturers connect half of the impellers in the opposite direction of the remaining ones.

[0009] However, this solution creates serious difficulties to realize inner flow channels.

[0010] The prior art also comprises the impeller assembly, in particular for centrifugal pumps, disclosed in the Italian Patent Application No. VI2014A000271 which allows to solve the above problems effectively. However, the impeller must have a disk with a specific and correct angular position with respect of the other disk and with respect to blades. This implies, in manufacturing the impeller assembly, the use of particular devices that may extend the manufacturing time and affect the final costs of the product.

[0011] Substantially, the same applies also for the impeller disclosed in the Italian Patent Application No. VI2015A000081. Also in this case, in fact, it is provided the use of a disk with particular shapes, which shall be precisely positioned with respect to the other disk, and with respect to blades.

[0012] CN201650848 discloses an impeller for a submersible pump for a well, wherein a flow channel for water to flow through is arranged between the front cover plate and the rear cover plate, the front cover plate and the rear cover plate are both made of plastics, and the diameter of the rear cover plate is smaller than that of the front cover plate.

[0013] US5171128 discloses a centrifugal fan wheel adapted to receive a flow medium for radially accelerated discharge by plurality radially extending impeller blades. A plurality of flow medium passage channels are positioned radially inwardly of an outer extent of the fan wheel to improve the efficiency of the fan. The flow medium passage channels are defined by alternating cutouts disposed between adjacent blades about the outer extent of a fan wheel back plate.

Solution to the Problem

[0014] The aim of the present invention is to solve the above-mentioned problems, by realizing an impelling structure for centrifugal pumps which allows to reduce the axial thrusts while maintaining maximum efficiency, and made of disc-like elements that can be easily assembled, with no special precautions.

[0015] Within the above aim, a further object of the invention is to realize an impeller assembly in which the two disc-like elements do not need to have a specific mutual angular position.

[0016] A further object of the present invention is to realize an impeller assembly which solves the problems linked to the traction that is generated on the transmission shaft.

[0017] Still a further object of the present invention is to realize an impeller assembly wherein the motor bearings are preserved.

[0018] A further object of the present invention is to provide an impeller assembly, which can be manufactured with a low number of components and which is therefore also advantageous

from a purely economic viewpoint.

[0019] The above aim and objects, and others which will become apparent hereinafter, are achieved by an impeller assembly for centrifugal pumps, as set forth in claim 1. Further embodiments are disclosed in the dependent claims. The impeller assembly comprises a first disk-like element, operatively arranged towards a coaxial inlet of a pump and facing a second disk-like element with a smaller diameter, operatively arranged towards the delivery of said pump; said second disk-like element being rigidly connected to said first disk-like element through a set of angularly spaced blades, and being centrally provided with fastening means for fastening to a drive shaft; said blades comprising appendices, in flat sheet form, adjacent to said second disk-like element; said appendices extending inside of a circular crown coplanar to said second disk-like element. The circular crown is within circumferences having diameters respectively coincident with those of said first disk-like element and said second disk-like element, said appendices are placed substantially in correspondence of areas subject to lesser axial thrust inside said circular crown, each appendix is constituted by a folded portion of the corresponding blade and the folded portion extends transversally to said blade substantially in correspondence of a fold line at the edge of said blade.

[0020] The present invention also relates to a centrifugal pump comprising at least one such impeller assembly and a substantially hollow body which accommodates the at least one impeller assembly fastened to a transmission shaft which is rotatable about a rotation axis; said transmission shaft being rotated by motor means.

Advantageous Effects of the Invention

[0021] The impeller assembly according to the invention considerably reduces the axial thrusts and at the same time ensures maximum efficiency and prevalence.

[0022] This is achieved by covering with the appendices only the areas subject to lesser axial thrust, relative to the circular crown coplanar to the second disk-like element, and corresponding to circumferences with diameters respectively coincident with those of the two disk-like elements.

[0023] By making the appendices in a single piece with the impeller blades, the two disk-like elements need not to be installed in precise reciprocal angular positions.

[0024] This allows to simplify and speed up the manufacturing of the impeller assembly, making it clearly more advantageous also from a merely economical point of view.

Brief Description of the Drawings

[0025] Further features and advantages will become apparent from the detailed description of the preferred embodiments of an impeller assembly according to the invention, illustrated in the attached drawings, where:

Figure 1 is a front view of an impeller assembly according to the invention;

Figure 2 is an enlarged perspective view of a detail of the impeller assembly of the previous figure;

Figure 3 is a front view of an impeller assembly according to a further aspect of the invention;

Figure 4 is a front view of an impeller assembly according to still a further aspect of the invention.

Description of the Embodiments

[0026] With reference to Figures 1 and 2, an impeller assembly for centrifugal pumps, according to the invention, is generally indicated with the reference number 1.

[0027] The impeller assembly 1 is designed for a multi-stage centrifugal pump; however, it is evident for any person skilled in the art that the impeller assembly of the present invention is also suitable for other types of pumps.

[0028] The multistage centrifugal pump, which is per se known and is not shown in the figures, comprises a substantially hollow body which accommodates in its interior a set of impellers, made according to the present invention, and coaxially mounted on a drive shaft rotating by motor means.

[0029] The impeller assembly 1 comprises a first disk-like element 2, operatively arranged at the pump inlet side, and a second disk-shaped element 3, operatively arranged at the pump delivery side.

[0030] The diameter of the second disk-like element 3 is smaller than the diameter of the first disk-like element 2.

[0031] The two disc-like elements 2 and 3 are coaxial to a rotation axis 1000, and are facing each other in such a way as to form a cavity of a substantially cylindrical shape.

[0032] Blades 4 are arranged inside the cavity. Each blade 4 is substantially flat and oblong and rigidly connects the first disk-like element 2 to the second disk-like element 3.

[0033] The blades 4 are angularly distributed around the rotation axis 1000, extending from

the center to the peripheral area of the two disk-like elements 2 and 3.

[0034] The blades 4 are arranged following a substantially spiral arcuate profile, without jutting out the first disk-like element 2, in such a way as to form radially arranged divergent ducts.

[0035] The second disk-like element 3 is provided with fastening means to a drive shaft, not shown in the figures, which is rotatable about the rotation axis 1000.

[0036] In the illustrated example, the fastening means are essentially constituted by a hub 5 in the middle of the second disk-like element 3.

[0037] Opposed to hub 5, a through hole 6 is centrally formed on the first disk-like element 2 and has a larger diameter than that of the drive shaft.

[0038] The through hole 6 in fact constitutes the suction inlet of the impeller assembly 1.

[0039] According to the present invention, each blade 4 comprises an appendix 7, in flat sheet form, placed at its edges.

[0040] According to the present invention, the appendix 7 is in one piece with the corresponding blade 4, and consists of a shaped portion of the blade 4, that is folded along a fold line 8.

[0041] The folds are made in such a way that each appendix 7 extends transversally to the corresponding blade 4.

[0042] In practice, when the blades 4 are mounted on the impeller assembly 1, the appendices 7 are parallel and coplanar to the second disk-like element 3.

[0043] Each appendix 7 has a side 9 resting on the second disk-like element 3, and extends inside of a circular crown coplanar to the second disk-like element 3; the circular crown is comprised within circumferences having diameters respectively coincident with those of the two disk-like elements 2 and 3.

[0044] It should be noted that the appendices 7 are placed substantially in correspondence of the areas subject to lesser axial thrust inside the aforesaid circular crown.

[0045] Each appendix 7 is also delimited by a shaped side that joins to the side coinciding with the fold line 8 and the side 9 which rests on the edge of the second disk-like element 3.

[0046] In the embodiment shown in Figures 1 and 2, the shaped side is constituted by a pair of segments 10a and 10b, consecutive and transverse between them.

[0047] In practice, the perimeter of each appendix 7 substantially has the shape of a circular

crown sector.

[0048] However, as will appear evident to person skilled in the art, the aforementioned appendices may vary in size and in shape, without departing from the scope of the invention which is solely defined by the appended claims.

[0049] In fact, for example, Figure 3 shows an impeller assembly, generally indicated with reference number 101, substantially similar to impeller assembly 1, but in which each appendix 107 is provided with a shaped side consisting of two segments 110a and 110b, that follow each other with a different angle.

[0050] It should also be noted that the shaped side may be discretized into a set of consecutive segments, differently positioned between them, which, at the limit, may also have the appearance of a curved portion.

[0051] Figure 4, for example, shows an impeller assembly, generally indicated with reference number 201, substantially similar to impeller assemblies 1 and 101, where however the appendices 207 are equipped with a shaped side including a straight portion 210a and a curved portion 210b, with the concavity facing outside of the second disk-like element 3.

[0052] According to another embodiment, not illustrated in the figures, the shaped side includes a convex portion.

[0053] It is clear how the appendices may vary in a manner substantially equivalent in shape, size and proportions, without departing the scope of the invention which is solely defined by the appended claims.

[0054] In the embodiments shown in Figures 3 and 4, the elements corresponding to those already described with reference to the embodiment shown in Figures 1 and 2 have been identified with the same reference numbers.

[0055] The impeller assembly, according to the invention, can be manufactured using various techniques, using metallic materials such as, for example, steel, stainless steel and similar, or other materials having the required technical features.

[0056] Regarding the operation of the impeller assembly according to the present invention, experimental tests and a careful analysis of resulting data have revealed that the presence of these appendices implies a greater fluid dynamic performance and a good prevalence, given the same axial thrusts reduction.

[0057] In practice, it has been observed that the impeller assembly according to the invention fully achieves the intended aim, reducing the axial thrusts and at the same time ensuring maximum efficiency and prevalence.

[0058] This is achieved by having the appendices covering only the areas subject to lesser axial thrust, relative to the circular crown coplanar to the second disk-like element, and corresponding to circumferences with diameters respectively coincident with those of the two disk-like elements.

[0059] The one piece construction of the appendices and blades allows to use two disk-like elements which do not need to be installed in precise reciprocal angular positions.

[0060] This allows to simplify and speed up the manufacturing process of the impeller assembly according to the invention, making it clearly more advantageous also from a merely economical point of view.

[0061] In practice, materials employed, so long as compatible with the specific use, as well as the contingent size and shapes, can be any according to the requirements and the state of the art.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [ITVI20140271A \[0010\]](#)
- [ITVI20150081A \[0011\]](#)
- [CN201650848 \[0012\]](#)
- [US5171128A \[0013\]](#)

P A T E N T K R A V

1. Pumpehjulsaggregat (1; 101; 201) til centrifugalpumper, omfattende et første skivelignende element (2) som er operativt arrangeret mod et koaksialt indløb af en pumpe og vender mod et andet skivelignende element (3) som har en mindre diameter og er
5 operativt arrangeret mod udløbet af pumpen;

hvor det andet skivelignende element (3) er stift forbundet til det første skivelignende element (2) gennem et sæt af blade (4) som er anbragt med vinkelafstand til hinanden, og er forsynet med et fastgørelsesmiddel (5) centralt for fastgørelse til en drevaksel;

hvor bladene omfatter vedhæftninger (7; 107; 207) som har en flad pladeform og er
10 tilgrænsende til det andet skivelignende element (3);

hvor vedhæftningerne (7; 107; 207) strækker sig inden i en cirkulær krone i samme plan som det andet skivelignende element (3);

hvor den cirkulære krone er indeholdt inden i omkredse med diametre som falder sammen med dem for henholdsvis det første skivelignende element (2) og det andet skivelignende element (3);
15

hvor vedhæftninger (7; 107; 207) er placeret i det væsentlige i overensstemmelse med områder som udsættes for mindre aksialkraft inden i den cirkulære krone;

hvor pumpehjulsaggregatet er k e n d e t e g n e t ved, at

hver vedhæftning (7; 107; 207) er konstitueret af en foldet del af det overensstemmende blad (4); og
20

den foldede del strækker sig tværgående til bladet (4) i det væsentlige i overensstemmelse med en foldlinje (8) ved kanten af bladet (4).

2. Pumpehjulsaggregat (1; 101; 201) ifølge krav 1, k e n d e t e g n e t ved, at hver vedhæftning (7; 107; 207) er afgrænset af mindst en første side som er defineret af foldlinjen (8), af mindst en anden side (9) som er tilgrænsende til den perifere kant af det
25 andet skivelignende element (3), og af mindst en formet side som er forbundet til første og anden side.

3. Pumpehjulsaggregat (1; 101; 201) ifølge krav 2, k e n d e t e g n e t ved, at den formede side omfatter mindst to segmenter (10a, 10b; 110a, 110b; 210a, 210b); hvilke
30 segmenter (10a, 10b; 110a, 110b; 210a, 210b) er på hinanden følgende og tværgående til hinanden.

4. Pumpehjulsaggregat (1; 101) ifølge krav 2, k e n d e t e g n e t ved, at den formede side omfatter en succession af i det væsentlige rette segmenter (10a, 10b; 110a, 110b).

5. Pumpehjulsaggregat (201) ifølge krav 2, k e n d e t e g n e t ved, at den formede side omfatter en buet del (210b) som har en konkavitet som vender mod ydersiden af det
35 andet skivelignende element (3).

6. Pumpehjulsaggregat (201) ifølge krav 2, k e n d e t e g n e t ved, at den formede side omfatter en buet del som har en konveksitet som vender mod ydersiden af det andet
40 skivelignende element (3).

7. Pumpehjulsaggregat (1; 101; 201) ifølge krav 2, ~~k e n d e t e g n e t~~ ved, at vedhæftningerne (7; 107; 207) og det andet skivelignende element (3) er i det væsentlige i samme plan.

8. Centrifugalpumpe omfattende:

5 mindst ét pumpehjulsaggregat (1; 101; 201) ifølge et hvilket som helst af de foregående krav; og

et i det væsentlige hult legeme som rummer det mindst ene pumpehjulsaggregat (1; 101; 201) som er fastgjort til en transmissionsaksel som kan roteres om en rotationsakse ved hjælp af et motormiddel.

DRAWINGS

FIG. 1

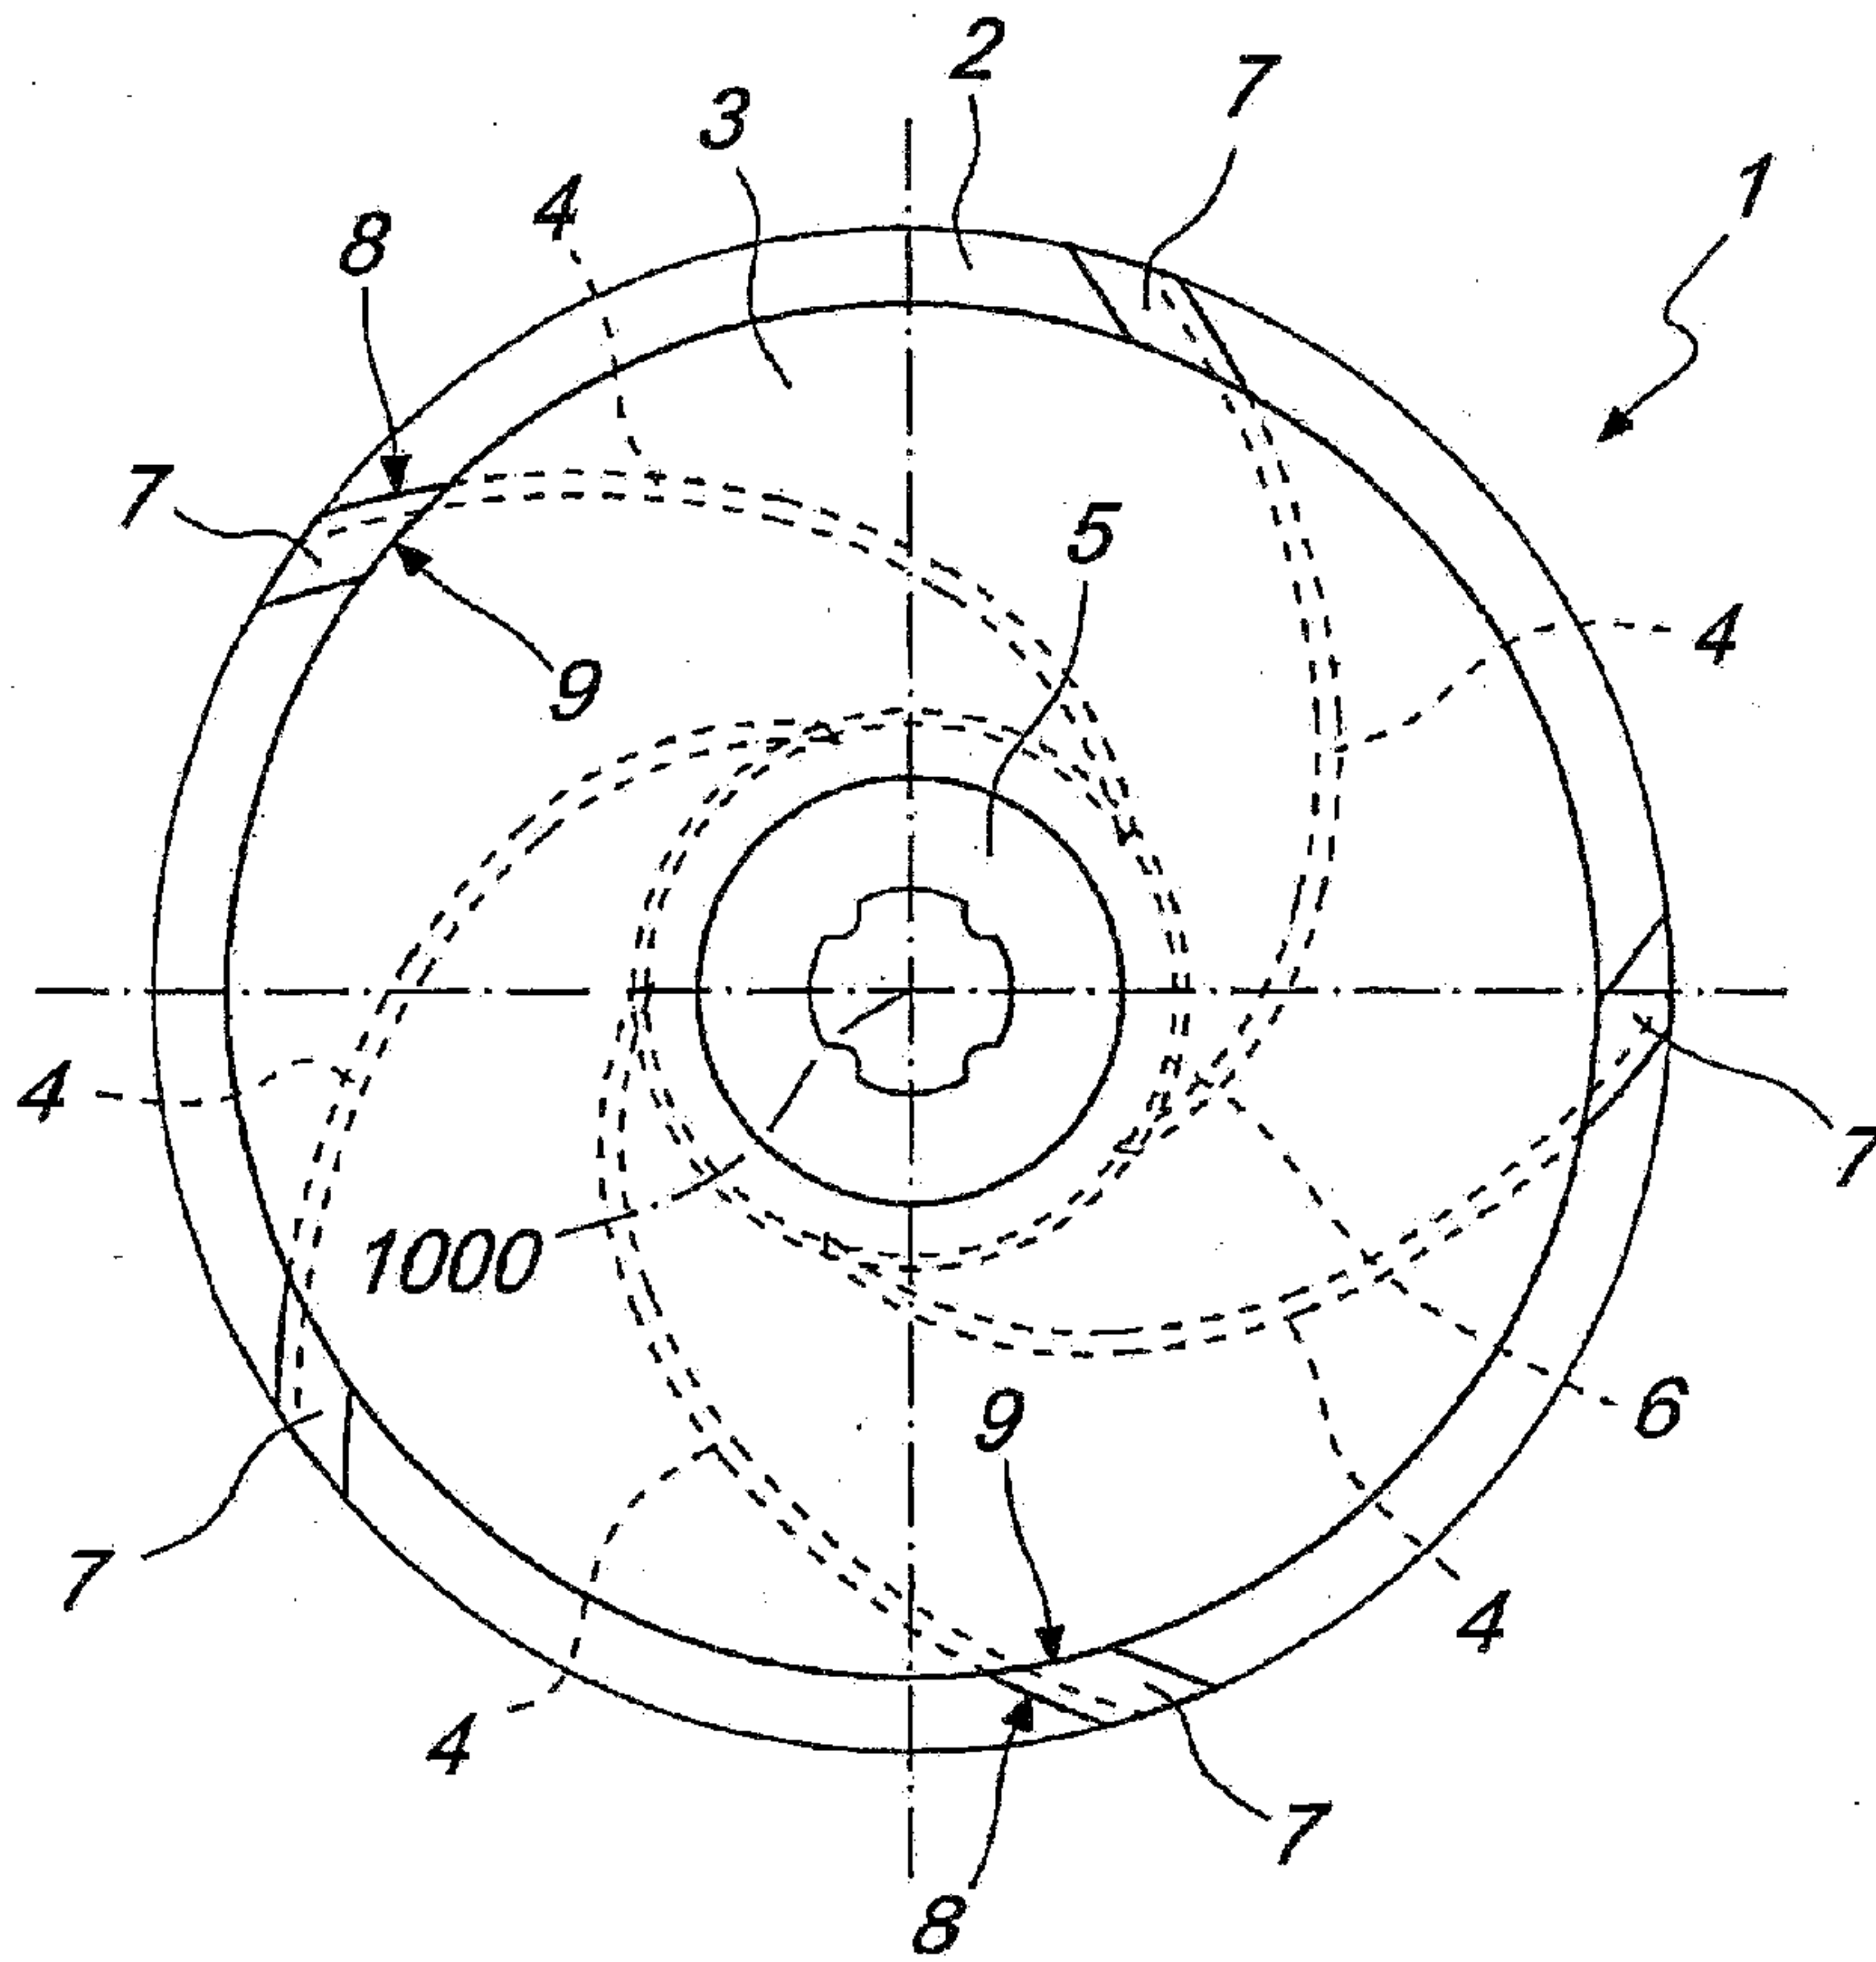


FIG. 2

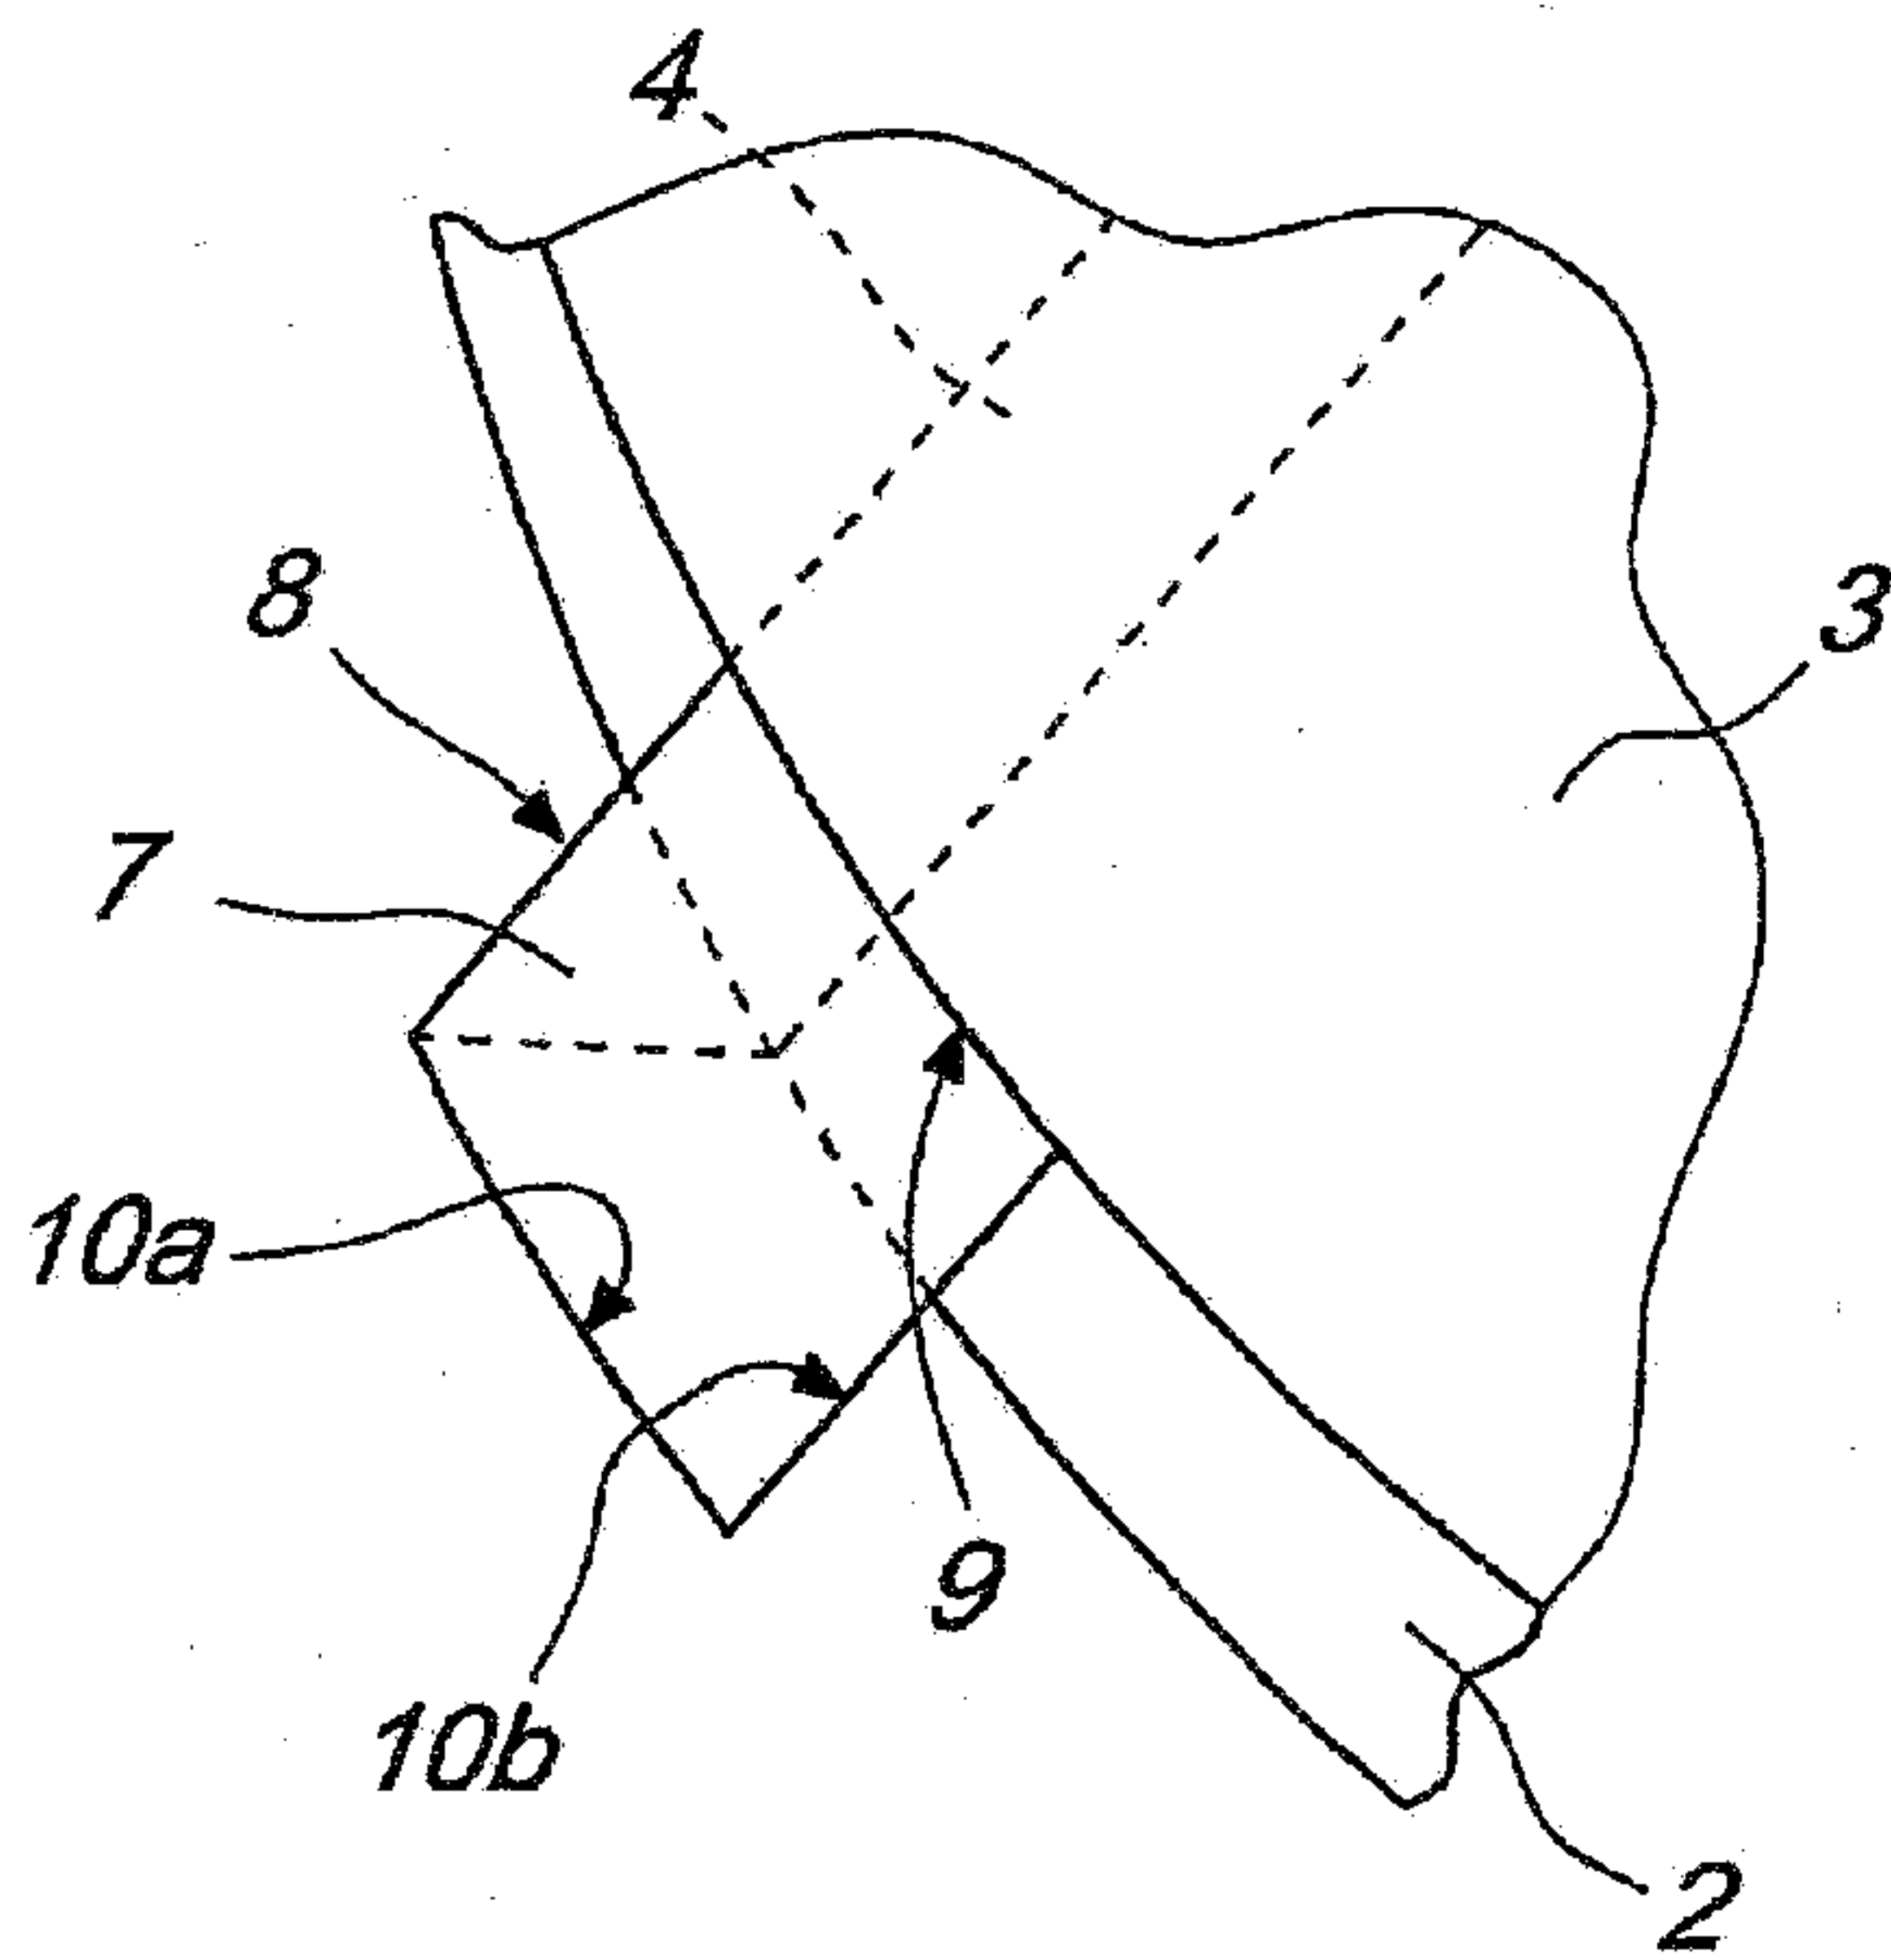


FIG. 3

