




(22) Date de dépôt/Filing Date: 2003/02/03
(41) Mise à la disp. pub./Open to Public Insp.: 2003/08/12
(30) Priorité/Priority: 2002/02/12 (10/074,741) US

(51) Cl.Int.⁷/Int.Cl.⁷ H01B 11/04, H01B 13/00
(71) Demandeur/Applicant:
COMMSCOPE, INC. OF NORTH CAROLINA, US
(72) Inventeur/Inventor:
PATEL, MAHESH, US
(74) Agent: SMART & BIGGAR

(54) Titre : CABLES DE COMMUNICATION A PAIRES ET FAISCEAUX TORSADES EN DIRECTIONS OPPOSEES
(54) Title: COMMUNICATIONS CABLES WITH OPPOSITELY TWINNED AND BUNCHED INSULATED CONDUCTORS

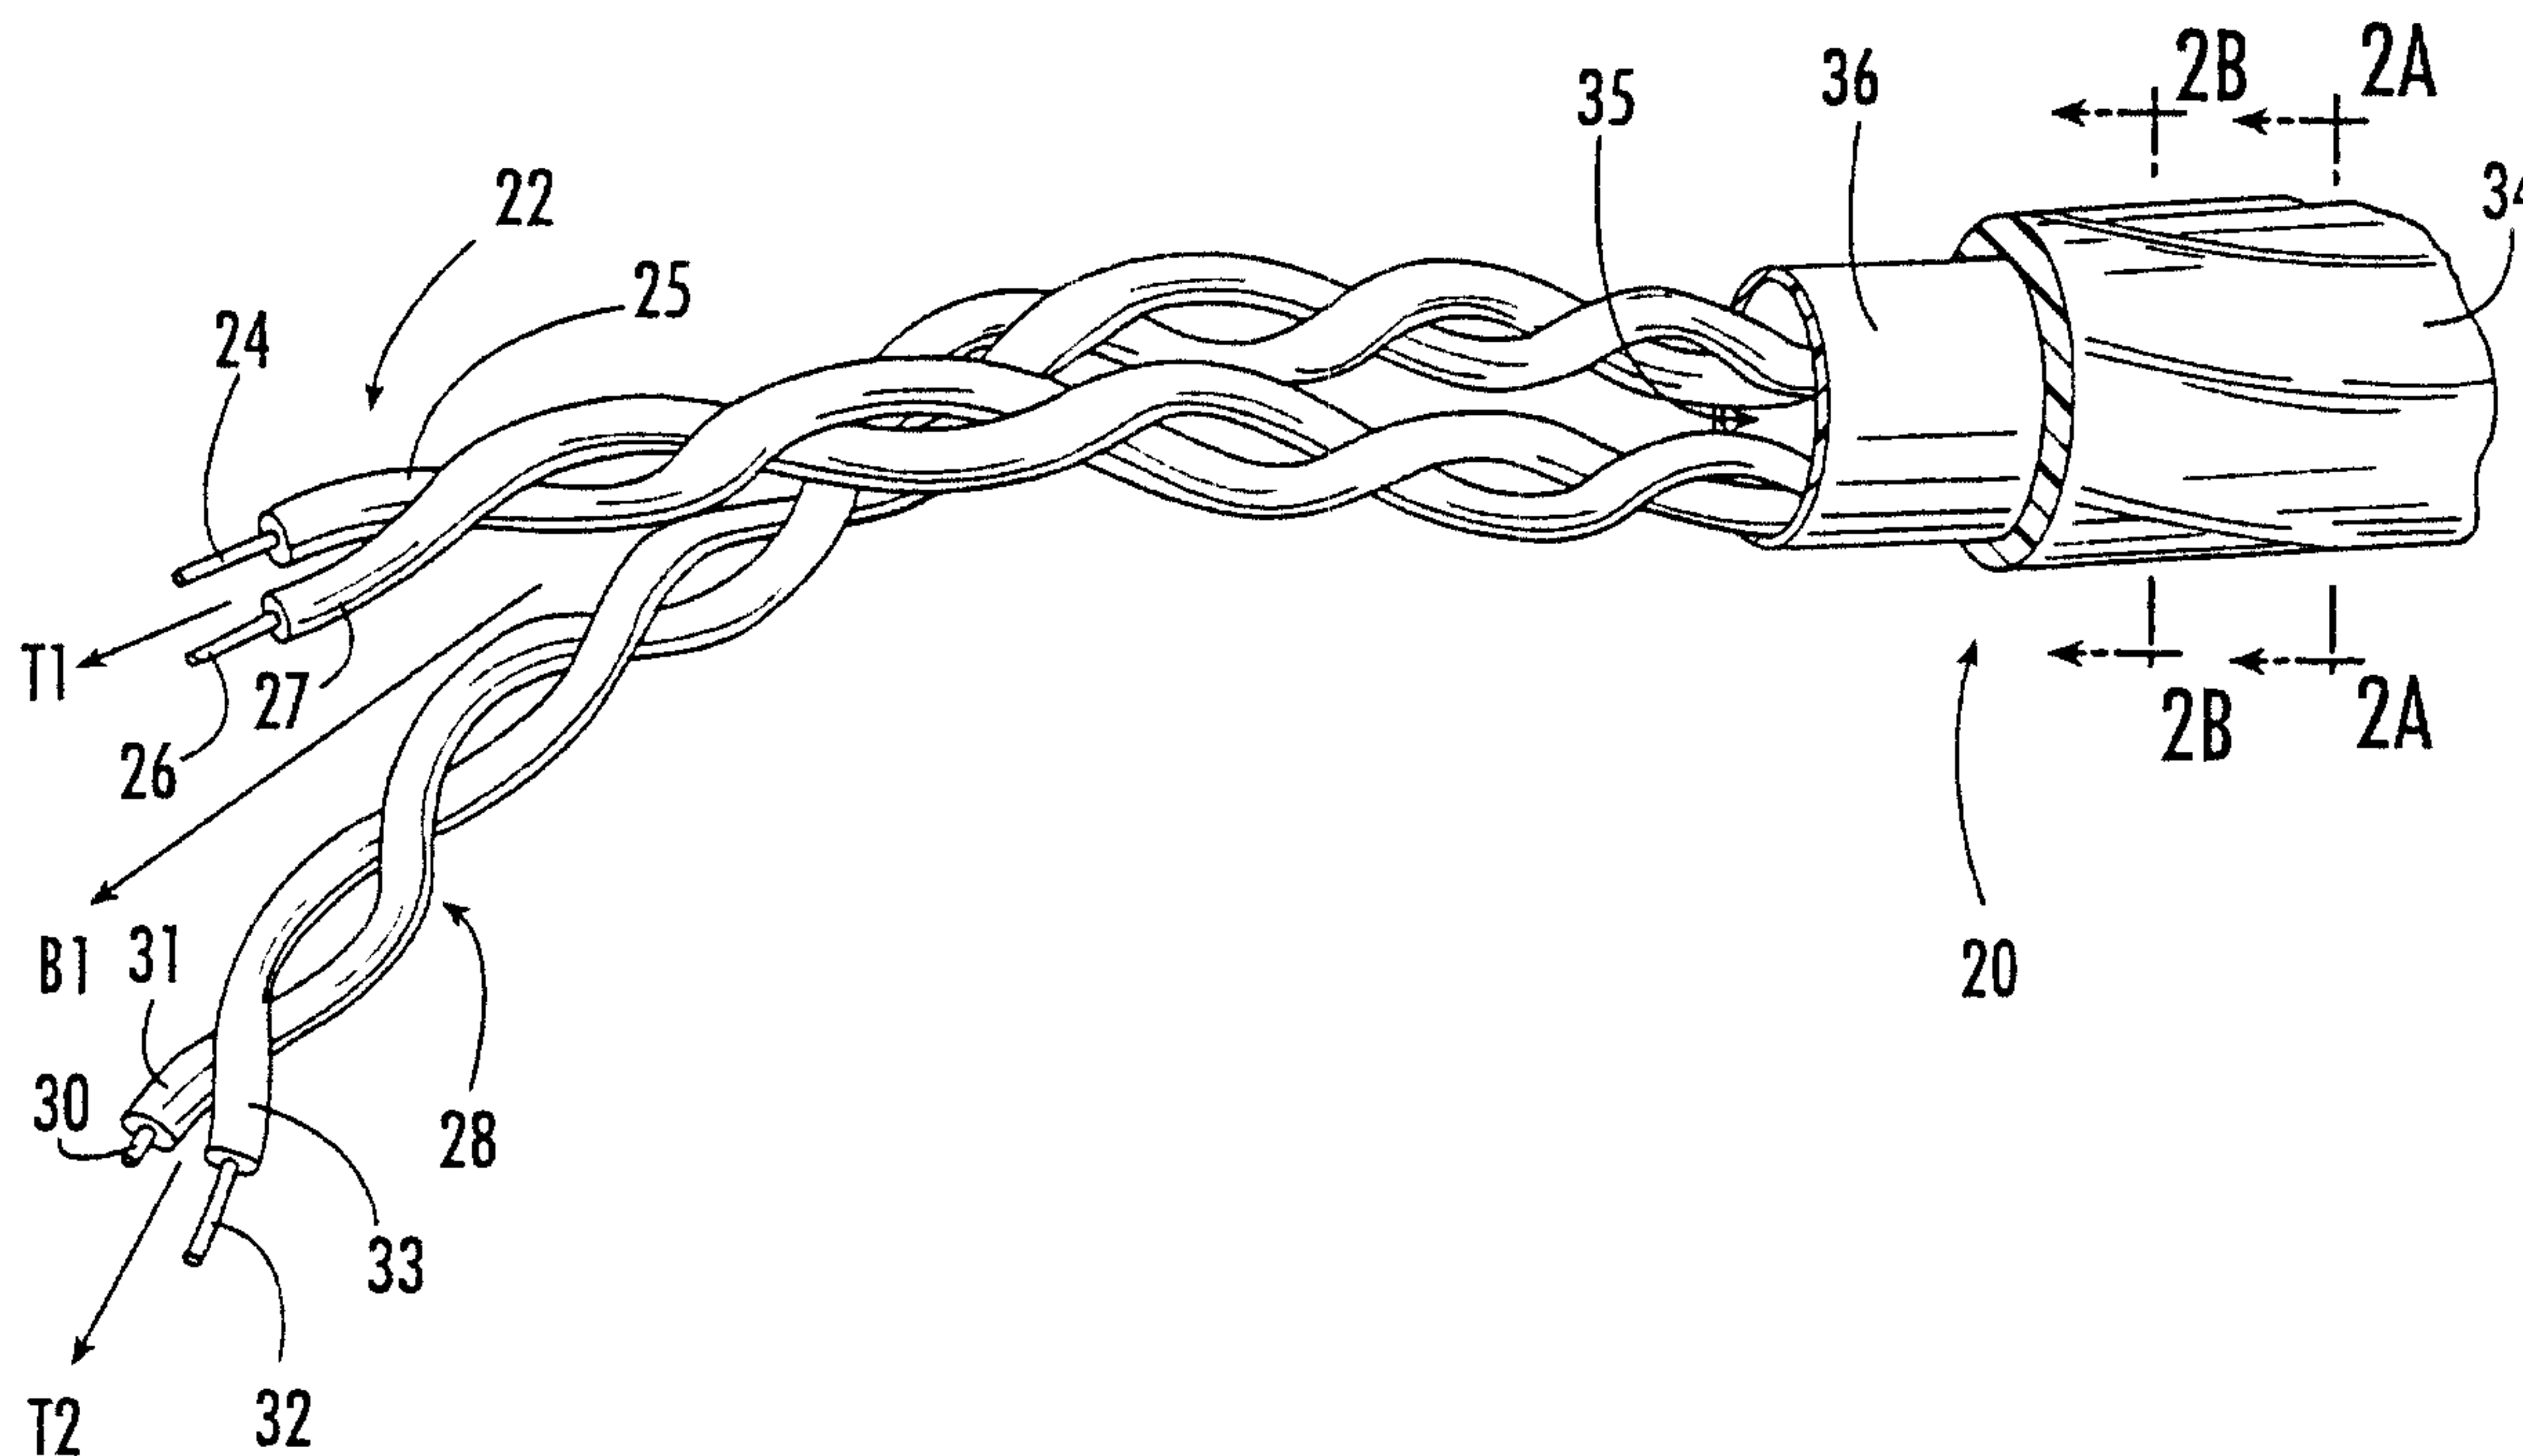

(57) Abrégé/Abstract:

A communications cable comprises an elongate cable jacket having an internal cavity and a plurality of twisted pairs of insulated conductors disposed in the internal cavity of the cable jacket, each of the conductors being insulated with a polymeric layer. Each of the insulated conductors within each of the twisted pairs of conductors defines a twinning helix having a first rotative direction, and each of the twisted pairs defines a bunching helix having a second rotative direction, the second rotative direction being opposite that of the first rotative direction. In this configuration, the communications cable can provide acceptable crosstalk and attenuation performance, even with foamed insulators that have demonstrated unacceptable performance when twinned and bunched in the same rotative direction.

Attorney Docket No. 9040-19

**COMMUNICATIONS CABLES WITH OPPOSITELY TWINNED AND
BUNCHED INSULATED CONDUCTORS**

5

Abstract of the Disclosure

A communications cable comprises an elongate cable jacket having an internal cavity and a plurality of twisted pairs of insulated conductors disposed in the internal cavity of the cable jacket, each of the conductors being insulated with a polymeric layer. Each of the insulated conductors within each of the twisted pairs of conductors defines a
10 twinning helix having a first rotative direction, and each of the twisted pairs defines a bunching helix having a second rotative direction, the second rotative direction being opposite that of the first rotative direction. In this configuration, the communications cable can provide acceptable crosstalk and attenuation performance, even with foamed insulators that have demonstrated unacceptable performance when twinned and bunched
15 in the same rotative direction.

20

COMMUNICATIONS CABLES WITH OPPOSITELY TWINNED AND BUNCHED INSULATED CONDUCTORS

Field of the Invention

The present invention relates broadly to communications cable and, more
5 particularly, to communications cable containing at least one twisted pair of insulated
conductors.

Background of the Invention

Insulated conductors such as those used in communications cable are often
10 provided as twisted pairs of insulated conductors having two insulated conductors
twisted, or "twinned", about each other to form a dual conductor group. A typical
assembly for these communications cables comprises two or more twisted pairs of
insulated conductors "bunched" together (*i.e.*, further twisted and in some instances
captured with a binder thread or cable) and contained in a cable jacket. The twisting and
15 bundling of the conductors can facilitate the installation of the cable and connection
between insulated conductors. Twisted pair conductors are commonly used in
applications such as local area network (LAN) cables and wireless cable network
architectures.

One problem associated with communications cable produced with the
20 conventional twisted pair assembly is that crosstalk can occur between twisted pairs of
insulated conductors that can negatively affect the signals transmitted by these
conductors. Crosstalk may especially present a problem in high frequency applications
because crosstalk may increase logarithmically as the frequency of the transmission
increases. Some twisted pairs are sufficiently impacted by crosstalk that insulating
25 spacers are positioned between pairs within the same cable. *See, e.g.*, U.S. Patent No.
5,969,295 to Boucino et al. Another technique for adjusting crosstalk performance
involves twinning the conductors of different pairs so that they have different lay lengths
and carefully selecting the lay length for bunching.

Attorney Docket No. 9040-19

The insulation employed for conductors is typically a polymeric material. Exemplary insulating materials include, but are not limited to, polyvinylchloride, polyvinylchloride alloys, polyethylene, polypropylene, and flame retardant materials such as fluorinated polymers. Exemplary fluorinated polymers, include but are not limited to, fluorinated ethylene-propylene (FEP), ethylenetrifluoroethylene (ETFE), ethylene chlorotrifluoroethylene (ECTFE), perfluoroalkoxypolymers (PFA's) like tetrafluoroethylene and perfluoropropylvinylether (*e.g.*, Teflon PFA 340), and mixtures thereof.

In an effort to reduce the weight and cost of insulation, conductors with foamed polymer insulation, and particularly foamed FEP insulation, have been constructed. The foaming process introduces air into the dielectric medium. Air having a lower dielectric constant increases the velocity of propagation (V_p). Higher V_p typically translates to improved signal transmission speed for high speed data or communications systems. However, the resulting foamed medium tends to become more susceptible to crushing during the twinning and bunching processes. Such crushing can undesirably raise the capacitance and lower the impedance of the finished cable, which can consequently degrade attenuation performance. In order to provide foamed dielectric insulation with sufficient crush resistance to provide adequate cable performance, additional dielectric material has been required, thereby negating some or all of the weight, cost and performance advantages of using a foamed dielectric. Accordingly, it would be desirable to provide a cable having a foamed dielectric with acceptable performance properties while reducing material weight and cost.

Summary of the Invention

The present invention is directed to a communications cable and an associated manufacturing method therefore that can utilize foamed insulators for electrical conductors and still provide acceptable performance. According to certain embodiments of the invention, a communications cable comprises: an elongate cable jacket having an internal cavity; and a plurality of twisted pairs of insulated conductors disposed in the internal cavity of the cable jacket, each of the conductors being insulated with a polymeric layer. Each of the insulated conductors within each of the twisted pairs of

Attorney Docket No. 9040-19

conductors defines a twinning helix having a first rotative direction, and each of the twisted pairs defines a bunching helix having a second rotative direction, the second rotative direction being opposite that of the first rotative direction. In this configuration, the communications cable can provide acceptable crosstalk and attenuation performance, even with foamed insulators that have demonstrated unacceptable performance when twinned and bunched in the same rotative direction.

It is preferred that at least one, and more preferably all, of the polymeric layers are formed of a foamed polymeric material (as used herein, a "foamed" polymeric material means both foamed and foam skin materials). It is also preferred that the twinning helices have different lay lengths, and the bunching helix also has a different lay length.

Brief Description of the Figures

Figure 1 is a perspective cutaway view of an embodiment of a twinned pair cable of the present invention.

Figure 2A is a section view of the cable of **Figure 1** taken along lines **2A—2A** thereof.

Figure 2B is a section view of the cable of **Figure 1** taken along lines **2B—2B** thereof.

Figure 3 is a perspective cutaway view of another embodiment of a twinned pair cable of the present invention, wherein the cable includes an insulating spacer.

Figure 4A is a section view of the cable of **Figure 3** taken along lines **4A—4A** thereof.

Figure 4B is a section view of the cable of **Figure 3** taken along lines **4B—4B** thereof.

Figure 5 is a perspective cutaway view of another embodiment of a twinned pair cable of the present invention.

Figure 6 is a graph plotting attenuation as a function of frequency for a cable sample twinned in a counterclockwise direction and bunched in a clockwise direction.

Attorney Docket No. 9040-19

Figure 7 is a graph plotting near end crosstalk as a function of frequency for a cable sample twinned in a counterclockwise direction and bunched in a clockwise direction.

Figure 8 is a graph plotting attenuation as a function of frequency for a cable
5 sample twinned in a counterclockwise direction and bunched in a counterclockwise direction.

Figure 9 is a graph plotting near end crosstalk as a function of frequency for a cable sample twinned in a counterclockwise direction and bunched in a counterclockwise
10 direction.

Detailed Description of the Invention

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should
15 not be construed as limited to the embodiments set forth herein. Instead, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. It will be understood that when an element (*e.g.*, cable jacket) is referred to as being "connected to" another element, it can be directly connected to the other element or intervening elements may
20 also be present. In contrast, when an element is referred to as being "directly connected to" another element, there are no intervening elements present. Like numbers refer to like elements throughout. Some dimensions and thicknesses may be exaggerated for clarity.

Referring now to the figures, a twinned pair cable, designated broadly at **20**, is
25 illustrated in **Figures 1, 2A and 2B**. The cable **20** comprises two twinned pairs **22, 28** of conductors, with the first pair **22** including conductors **24, 26** and the second pair **28** including conductors **30, 32**. The conductors **24, 26, 30, 32** are covered with, respectively, insulators **25, 27, 31, 33**. The conductors **24, 26, 30, 32** may be a metallic wire of any of the well-known metallic conductors used in wire and cable applications,
30 such as copper, aluminum, copper-clad aluminum and/or copper-clad steel. Preferably, the wire is 18 to 26 AWG gauge.

Attorney Docket No. 9040-19

Suitable insulating materials for the insulators **25, 27, 31, 33** include polyvinylchloride, polyvinylchloride alloys, polyethylene, polypropylene, and flame retardant materials such as fluorinated polymers. Exemplary fluorinated polymers for use in the invention include FEP, ETFE, ECTFE, PFA's, and mixtures thereof.

5 Exemplary PFA's include copolymers of tetrafluoroethylene and perfluoropropylvinylether (*e.g.*, Teflon PFA 340) and copolymers of tetrafluoroethylene and perfluoromethylvinylether (MFA copolymers, which are available from Ausimont S.p.A.). In addition, the material of the insulators **25, 27, 31, 33** may contain conventional additives such as pigments, nucleating agents, thermal stabilizers, acid
10 acceptors, processing aids, and/or flame retardant compositions (*e.g.*, antimony oxide). If desired, the insulating material may not be the same for each twisted pair **22, 28**. In accordance with the present invention, some or all of the insulators **25, 27, 31, 33** may be formed of polymeric materials that have been foamed or that have a foam skin structure, such as FEP or polyethylene. Typically, these materials are foamed to a density of
15 between about 50 and 80 percent of their solid volume.

As illustrated in **Figures 1, 2A and 2B**, the conductors **24, 26** of the pair **22** are twinned about a twin axis **T1** and follow a counterclockwise twinning helix when viewed from the viewing direction indicated in **Figure 1** and from the vantage point of **Figures 2A-2B**. Likewise, the conductors **30, 32** of the pair **28** are twinned about a twin axis **T2**
20 and follow a counterclockwise twinning helix when view from the viewing direction indicated in **Figure 1** and from the vantage point of **Figures 2A-2B**. However, the pairs **22, 28** are bunched about a bunching axis **B1** and follow a clockwise bunching helix when viewed from the viewing direction indicated in **Figure 1** and from the vantage point of **Figures 2A-2B**. It has been discovered that, when conductors with insulation
25 are helically twinned in one rotative direction and helically bunched in the opposite rotative direction, there can be reduced crushing of the insulators **25, 27, 31, 33** without the expected corresponding reduction in cross-talk performance.

Typically, the pairs **22, 28** are twinned such that the "lay length" (defined as the distance along each conductor required for the conductor to travel one complete
30 circumference of the helix) of twinning is between about 0.25 and 1.0 inches. In some embodiments, the lay lengths of the pairs **22, 28** will differ from one another (usually by

Attorney Docket No. 9040-19

about 20 to 50 percent). The pairs **22, 28** are typically bunched so that the lay length of bunching is between about 2.5 and 6.0 inches.

Those skilled in this art will recognize that, although the cable **20** is illustrated with pairs **22, 28** being twinned in a counterclockwise helix and being bunched in a clockwise helix, cables can also be constructed with pairs being twinned in a clockwise helix and bunched in a counterclockwise helix.

The pairs **22, 28** are enclosed within the cavity **35** of a jacket **34**. Preferably, the jacket **34** is made of a flexible polymer material and is formed by melt extrusion. As will be understood by those of skill in the art, any of the polymer materials conventionally used in cable construction may be suitably employed; these include, but are not limited to, polyvinylchloride, polyvinylchloride alloys, polyethylene, polypropylene and flame retardant materials such as FEP or another fluorinated polymer. Moreover, other materials and/or fabrication methods may be used. Preferably, the cable jacket **34** is extruded to a thickness of between 15 and 25 mils (thousandths of an inch), which may facilitate stripping the cable jacket **34** away from the twisted pairs **22, 28**. However, other dimensions may be used. The jacket may overlie one or more optional shielding layers **36**; these are typically formed of a wide variety of known conductive and/or nonconductive materials such as nonconductive polymeric tape, conductive tape, braid, a combination of nonconductive polymeric tape, conductive tape and/or braid, and/or other such materials as will be understood to one of skill in the art using conventional fabrication techniques.

The cable **20** may be used in a variety of computer, communication, and telecommunication environments, including residential and commercial buildings.

Another cable embodiment of the present invention, designated broadly at **50**, is illustrated in **Figure 5**. The cable **50** includes four twisted conductor pairs **52, 58, 64, 70**, which comprise, respectively, conductors **54** and **56** (insulated by insulators **55** and **57**), conductors **60** and **62** (insulated by insulators **61** and **63**), conductors **66** and **68** (insulated by insulators **67** and **69**), and conductors **72** and **74** (insulated by insulators **73** and **75**). Like the cable **20** illustrated in **Figures 1, 2A** and **2B**, the pairs **52, 58, 64, 70** are covered by a jacket **76** and an optional shielding layer **78**. The description of the materials appropriate for use in the conductors, insulators, jacket and shield of the cable

Attorney Docket No. 9040-19

20 are equally applicable to these components of the cable 50 and need not be repeated here.

The pairs 52, 58, 64, 70 are twinned such that they form clockwise helices along their respective twinning axes T3, T4, T5, T6, and are bunched such that they form
5 counterclockwise helices along the bunching axis B2. Lay lengths of the twinning and bunching helices are as described above for the cable 20.

A further cable embodiment of the present invention, designated broadly at 150, is illustrated in Figures 3, 4A and 4B. The cable 150 includes four twisted conductor pairs 152, 158, 164, 170 which comprise, respectively, conductors 154 and 156
10 (insulated by insulators 155 and 157), conductors 160 and 162 (insulated by insulators 161 and 163), conductors 166 and 168 (insulated by insulators 167 and 169), and conductors 172 and 174 (insulated by insulators 173 and 175). The cable 150 also includes a jacket 176 and an optional shielding layer 178. The discussions hereinabove regarding the materials and construction of the conductors, insulators, jacket and shield
15 layers are equally applicable to the cable 150 and need not be repeated here.

Unlike the cable 50, the cable 150 also includes a spacer 151 that extends the length of the cable 150 and separates the internal cavity of the cable 150 into four compartments 153a, 153b, 153c, 153d. Each of the pairs 152, 158, 164, 170 resides in a respective one of the compartments 153a, 153b, 153c, 153d. The spacer 151 is typically
20 included in a cable in order to regulate the distance between twisted pairs, which in turn can render crosstalk performance more consistent. Suitable different spacer configurations and materials are discussed in detail in U.S. Patent No. 5,789,711 to Gaeris et al., U.S. Patent No. 5,969,295 to Boucino et al. and co-pending and co-assigned U.S. Patent Application No. 09/591,349, filed June 9, 2000 and entitled Communications
25 Cables with Isolators; the contents of each of these documents are hereby incorporated herein by reference in their entireties.

The invention will now be described in great detail in the following non-limiting example.

Attorney Docket No. 9040-19

EXAMPLE 1

Testing was conducted comparing the performance of cables employing oppositely twinned and bunched conductors with cables having similarly twinned and bunched conductors.

5 Two cable samples were constructed, each having four twisted pairs of insulated conductors and having the specifications set forth in **Table 1**.

Table 1

Property	Value
Conductor Dimensions	24 gauge
Conductor Material	AWG copper wire
Insulator Material	3 pairs foam/skin FEP; 1 pair foam/skin PE
Insulator Thickness	0.007 in
Insulator Coaxial Capacitance	FEP 52 min., 57 max; PE 61 (pf/ft)
Cable Length	328 ft
Jacket Material	PVC Alloy (plenum rated)

10 The twisted pairs of each cable were twinned in a counterclockwise direction at a lay length of between 0.45 and 0.8 inches. One cable (Cable 1) was bunched in a clockwise direction at a lay length of 6 inches (such that the twinning and bunching were in opposite rotative directions), and the other cable (Cable 2) was bunched in a counterclockwise direction at a lay length of 6 inches (such that twinning and bunching were in the same rotative direction). The cables were evaluated under testing conditions
15 set forth in ASTM-D4566-2000.

Results of the evaluations are set forth in **Figures 6-9**. **Figures 6 and 7** are graphs illustrating the performance of Cable 1. **Figure 6** is a plot of cable attenuation as a function of frequency of Cable 1 and the permissible attenuation per specification. **Figure 6** demonstrates that the plot of Cable 1 falls below the specification (i.e., is
20 acceptable) for attenuation performance. **Figure 7** is a plot of near end crosstalk as a function of frequency for Cable 1 and specification. **Figure 7** shows that the plot for Cable 1 is positioned above the specification curve, thereby indicating acceptable performance. These results compare favorably to **Figures 8 and 9**, which show that

Attorney Docket No. 9040-19

Cable 2, while having acceptable crosstalk performance, was not able to meet the specification for attenuation.

The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of this invention have been
5 described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. The invention is defined by the following claims, with equivalents of the claims to be
10 included therein.

Attorney Docket No. 9040-19

That Which is Claimed is:

1. A communications cable, comprising:
an elongate cable jacket having an internal cavity; and
a plurality of twisted pairs of insulated conductors disposed in the internal cavity
5 of the cable jacket, each of the conductors being insulated with a polymeric layer;
wherein each of the insulated conductors within each of the twisted pairs of
conductors defines a twinning helix having a first rotative direction; and
wherein each of the twisted pairs defines a bunching helix having a second
rotative direction, the second rotative direction being opposite that of the first rotative
10 direction.
2. The communications cable defined in Claim 1, wherein each of the
polymeric layers is formed of a foamed polymeric material.
- 15 3. The communications cable defined in Claim 2, wherein the polymeric
material is selected from the group consisting of FEP and polyethylene.
4. The communications cable defined in Claim 2, wherein the foamed
polymeric material is foamed to a density of between about 50 and 80 percent of that of
20 the solid polymeric material.
5. The communications cable defined in Claim 1, wherein the plurality of
twisted pairs of insulated conductors comprises four pairs of insulated conductors.
- 25 6. The communications cable defined in Claim 1, wherein lay lengths of the
twinning helices defined by the insulated conductors are between about 0.25 and 1.0
inches.
7. The communications cable defined in Claim 6, wherein a lay length of the
30 bunching helix is between about 2.5 and 8.0 inches.

Attorney Docket No. 9040-19

8. The communications cable defined in Claim 1, wherein each of the twinning helices has a different lay length.

5 9. The communications cable defined in Claim 1, further comprising an elongate spacer that divides the internal cavity into compartments, each of the twinned pairs of cable residing in a separate compartment.

10 10. The communications cable defined in Claim 1, further comprising a shield layer underlying the cable jacket.

10

11. A communications cable, comprising:

an elongate cable jacket having an internal cavity; and

a plurality of twisted pairs of insulated conductors disposed in the internal cavity of the cable jacket, each of the conductors being insulated with a polymeric layer;

15

wherein each of the insulated conductors within each of the twisted pairs of conductors defines a twinning helix having a first rotative direction, each of the twinning helices having a different lay length; and

20

wherein each of the twisted pairs defines a bunching helix having a second rotative direction, the second rotative direction being opposite that of the first rotative direction, the bunching helix having a different lay length than any of those of the twinning helices.

12. The communications cable defined in Claim 11, wherein at least one of the polymeric layers is formed of a foamed polymeric material.

25

13. The communications cable defined in Claim 12, wherein the polymeric material is selected from the group consisting of FEP and polyethylene.

30

14. The communications cable defined in Claim 12, wherein the foamed polymeric material is foamed to a density of between about 50 and 80 percent of that of the solid polymeric material.

Attorney Docket No. 9040-19

15. The communications cable defined in Claim 11, wherein the plurality of twisted pairs of insulated conductors comprises four pairs of insulated conductors.

5 16. The communications cable defined in Claim 11, further comprising an elongate spacer that divides the internal cavity into compartments, each of the twinned pairs of cable residing in a separate compartment.

10 17. The communications cable defined in Claim 11, further comprising a shield layer underlying the cable jacket.

18. A communications cable, comprising:
an elongate cable jacket having an internal cavity; and
a plurality of twisted pairs of insulated conductors disposed in the internal cavity
15 of the cable jacket, each of the conductors being insulated with a polymeric layer, at least one of the polymeric layers comprising a foamed polymeric material;
wherein each of the insulated conductors within each of the twisted pairs of conductors defines a twinning helix having a first rotative direction; and
wherein each of the twisted pairs defines a bunching helix having a second
20 rotative direction, the second rotative direction being opposite that of the first rotative direction.

19. The communications cable defined in Claim 18, wherein the polymeric material is selected from the group consisting of FEP and polyethylene.
25

20. The communications cable defined in Claim 18, wherein the foamed polymeric material is foamed to a density of between about 50 and 80 percent of that of a solid polymeric material.

30 21. The communications cable defined in Claim 18, wherein the plurality of twisted pairs of insulated conductors comprises four pairs of insulated conductors.

Attorney Docket No. 9040-19

22. The communications cable defined in Claim 18, wherein lay lengths of the twinning helices defined by the insulated conductors are between about 0.25 and 1.0 inches.

5

23. The communications cable defined in Claim 22, wherein a lay length of the bunching helix is between about 2.5 and 8.0 inches.

24. The communications cable defined in Claim 18, wherein each of the twinning helices has a different lay length.

10

25. The communications cable defined in Claim 18, further comprising an elongate spacer that divides the internal cavity into compartments, each of the twinned pairs of cable residing in a separate compartment.

15

26. The communications cable defined in Claim 18, further comprising a shield layer underlying the cable jacket.

27. A method of manufacturing a communications cable, comprising:
20 (a) twisting two insulated conductors about a twinning axis to form a helical twisted conductor pair, the helix thereof having a first rotative direction;

(b) repeating step (a) to form a predetermined number of helical twisted conductor pairs, each of the helices of the helical twisted conductor pairs having the first rotative direction; and

25 (c) bunching the predetermined number of helical twisted conductor pairs about a bunching axis to form a helical bunch of twisted conductor pairs, the helix formed by the bunch of twisted conductor pairs having a second rotative direction opposite that of the first rotative direction.

30 28. The method defined in Claim 27, further comprising enclosing the bunch of twisted conductor pairs within a cable jacket.

Attorney Docket No. 9040-19

29. The method defined in Claim 27, wherein insulation on at least some of the conductors comprises a foamed polymeric material.


5 30. The method defined in Claim 29, wherein the foamed polymeric material is selected from the group consisting of FEP and polyethylene.

31. The method defined in Claim 27, wherein lay lengths of the helices of each of the twisted conductor pairs are different.

10

32. The method defined in Claim 31, wherein a lay length of the helix of the bunch of twisted conductor pairs has a lay length that differs from that any of the lay lengths of the twisted conductor pairs.

Smart & Biggar
Ottawa, Canada
Patent Agents

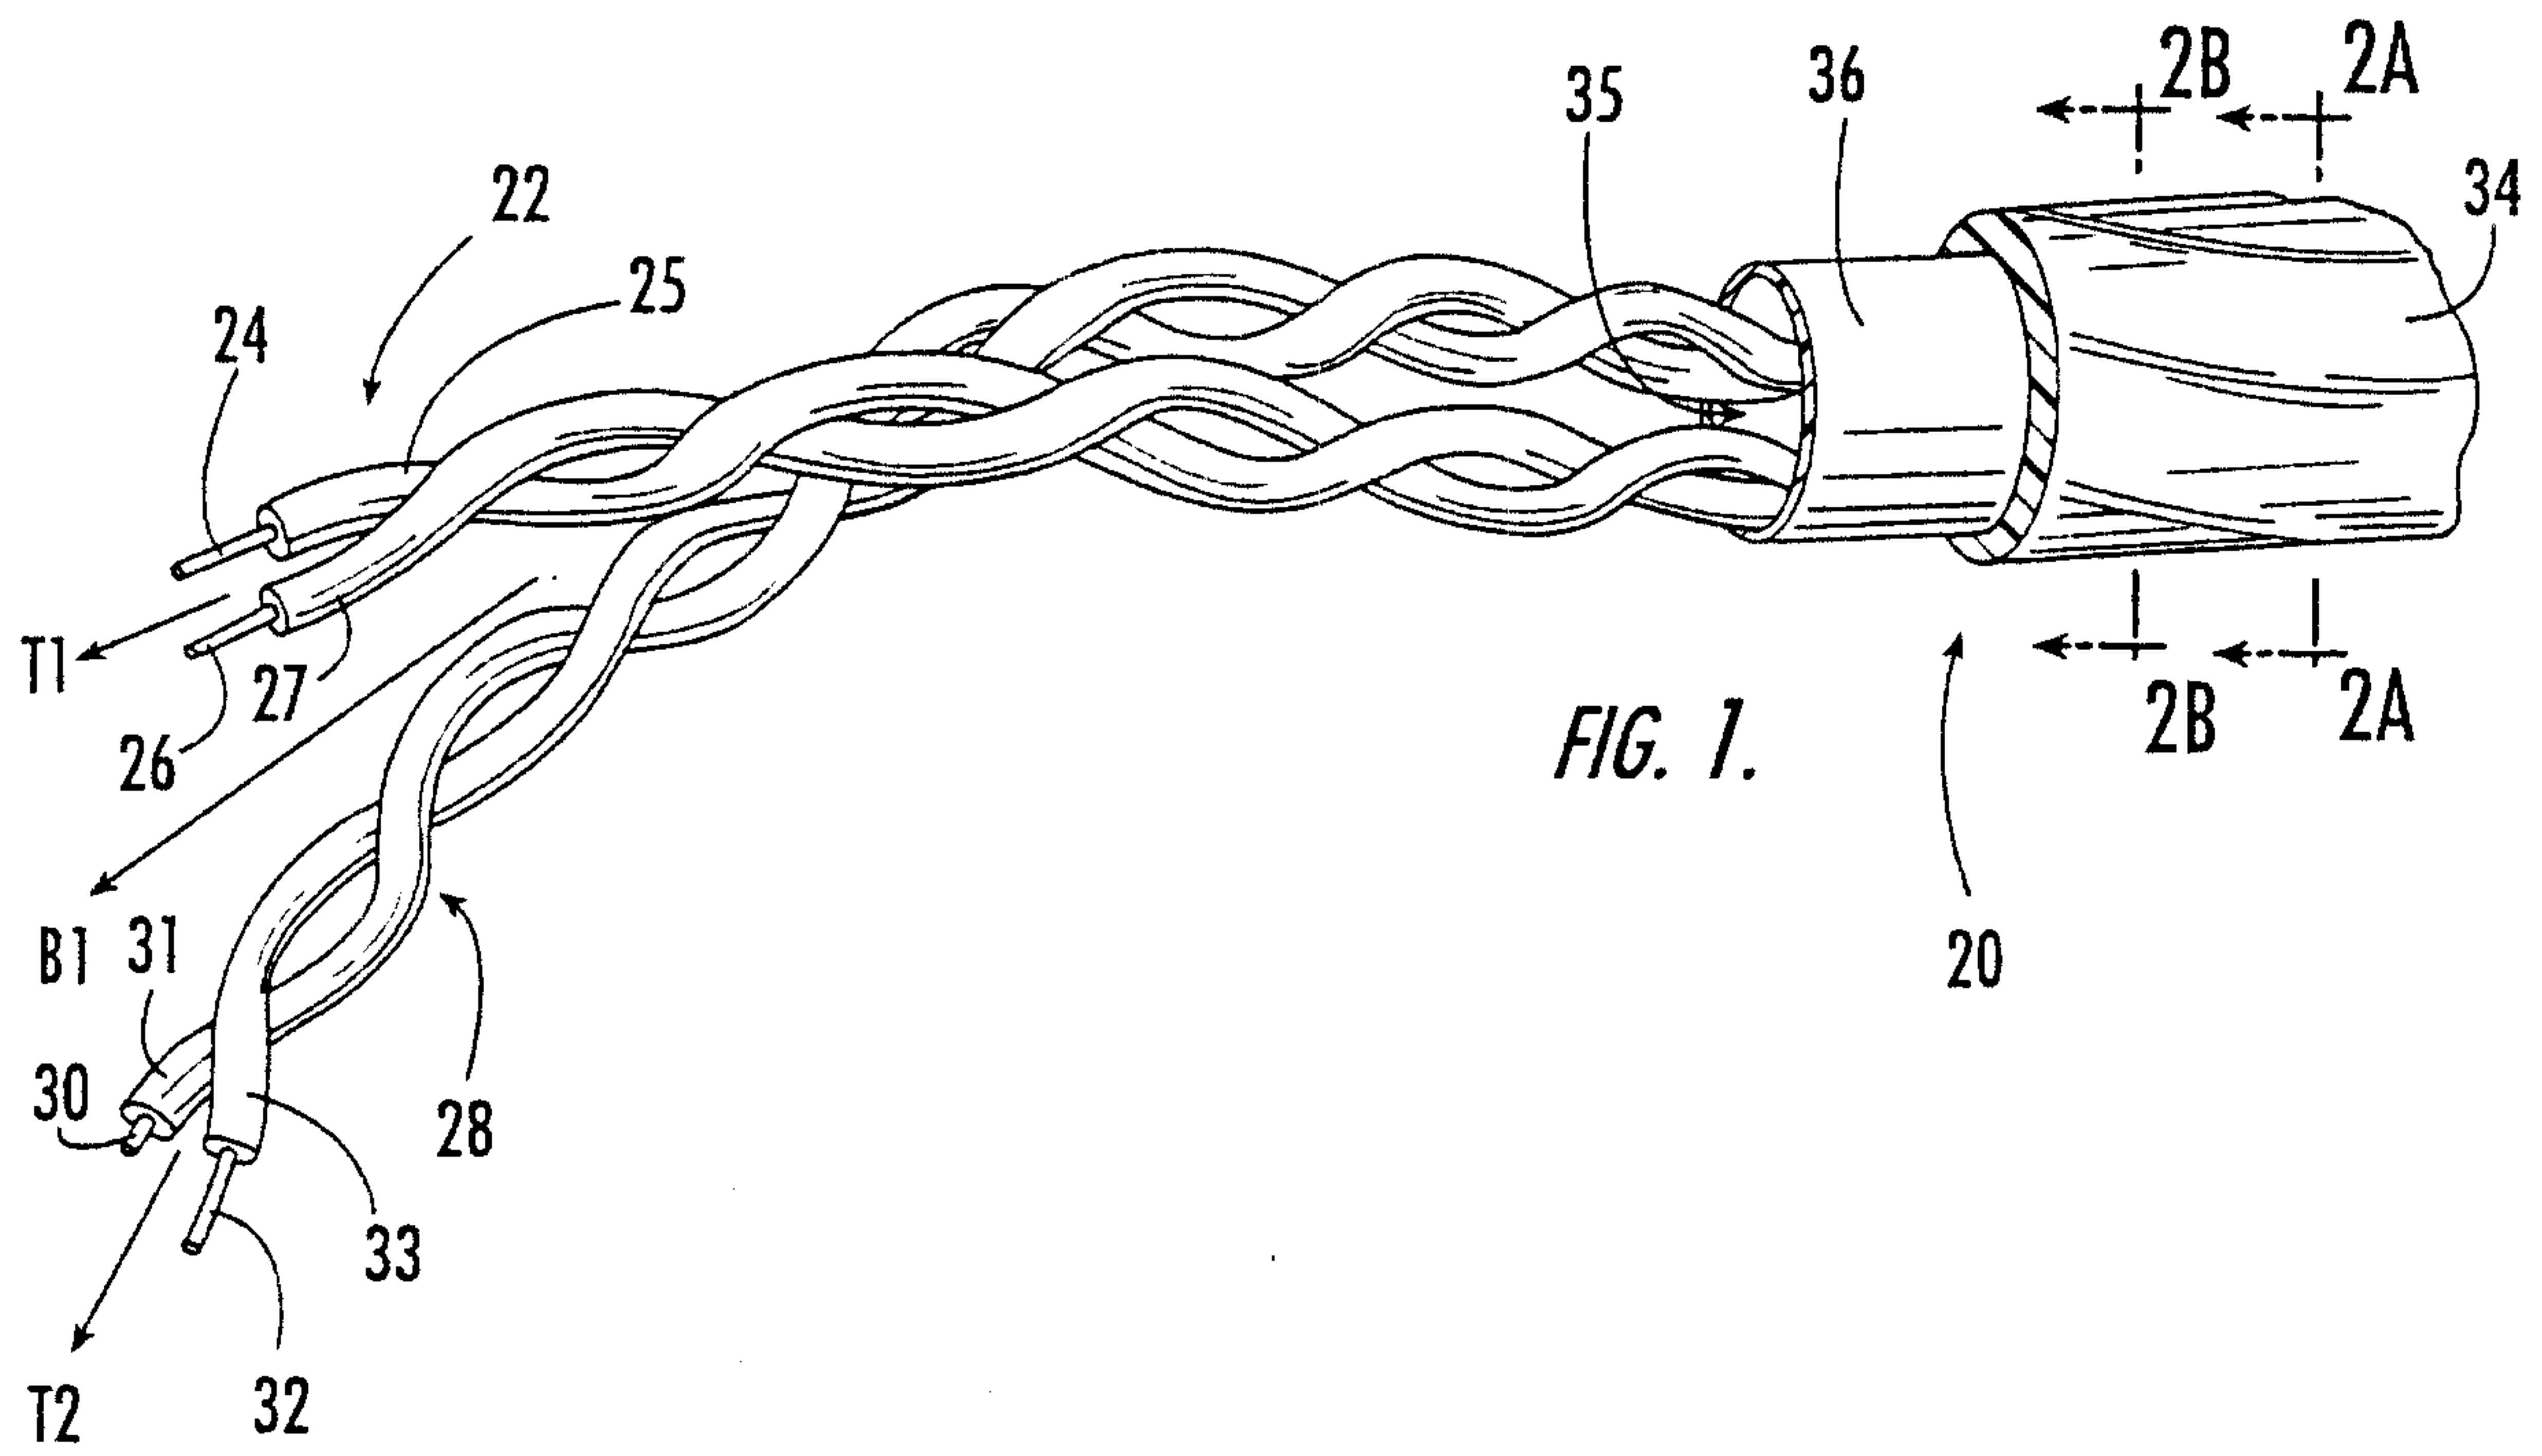

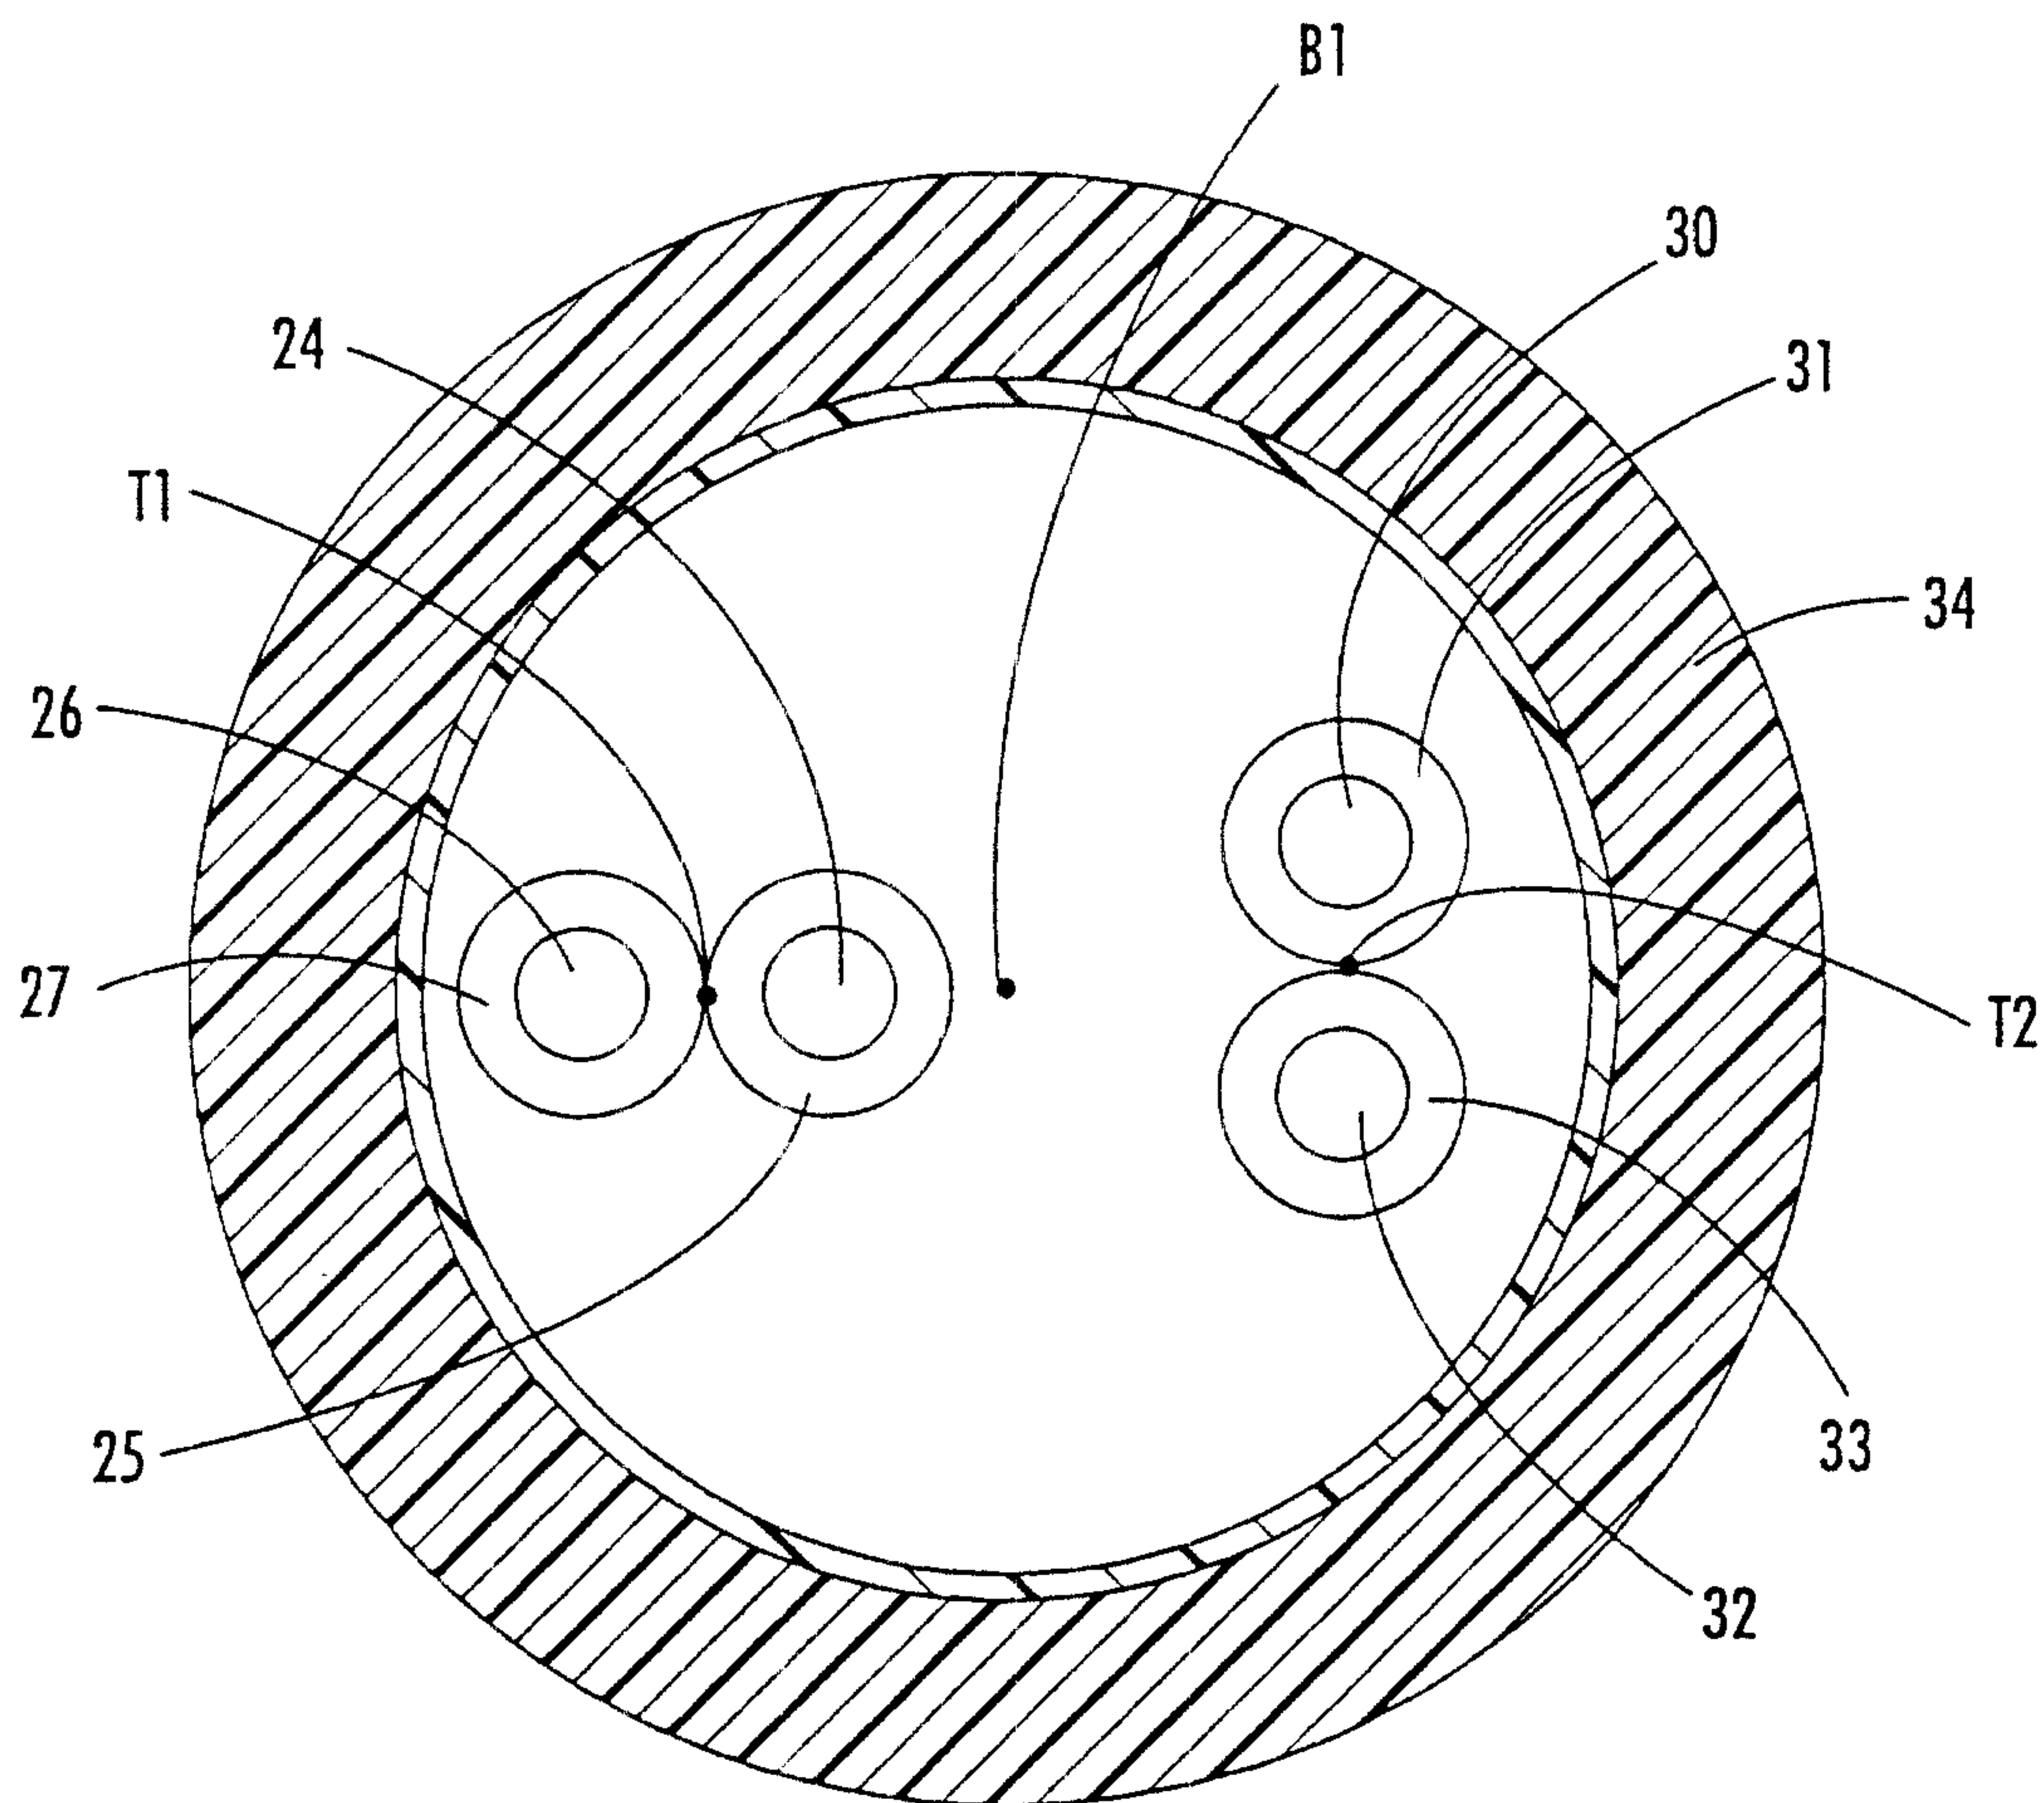


FIG. 2A.

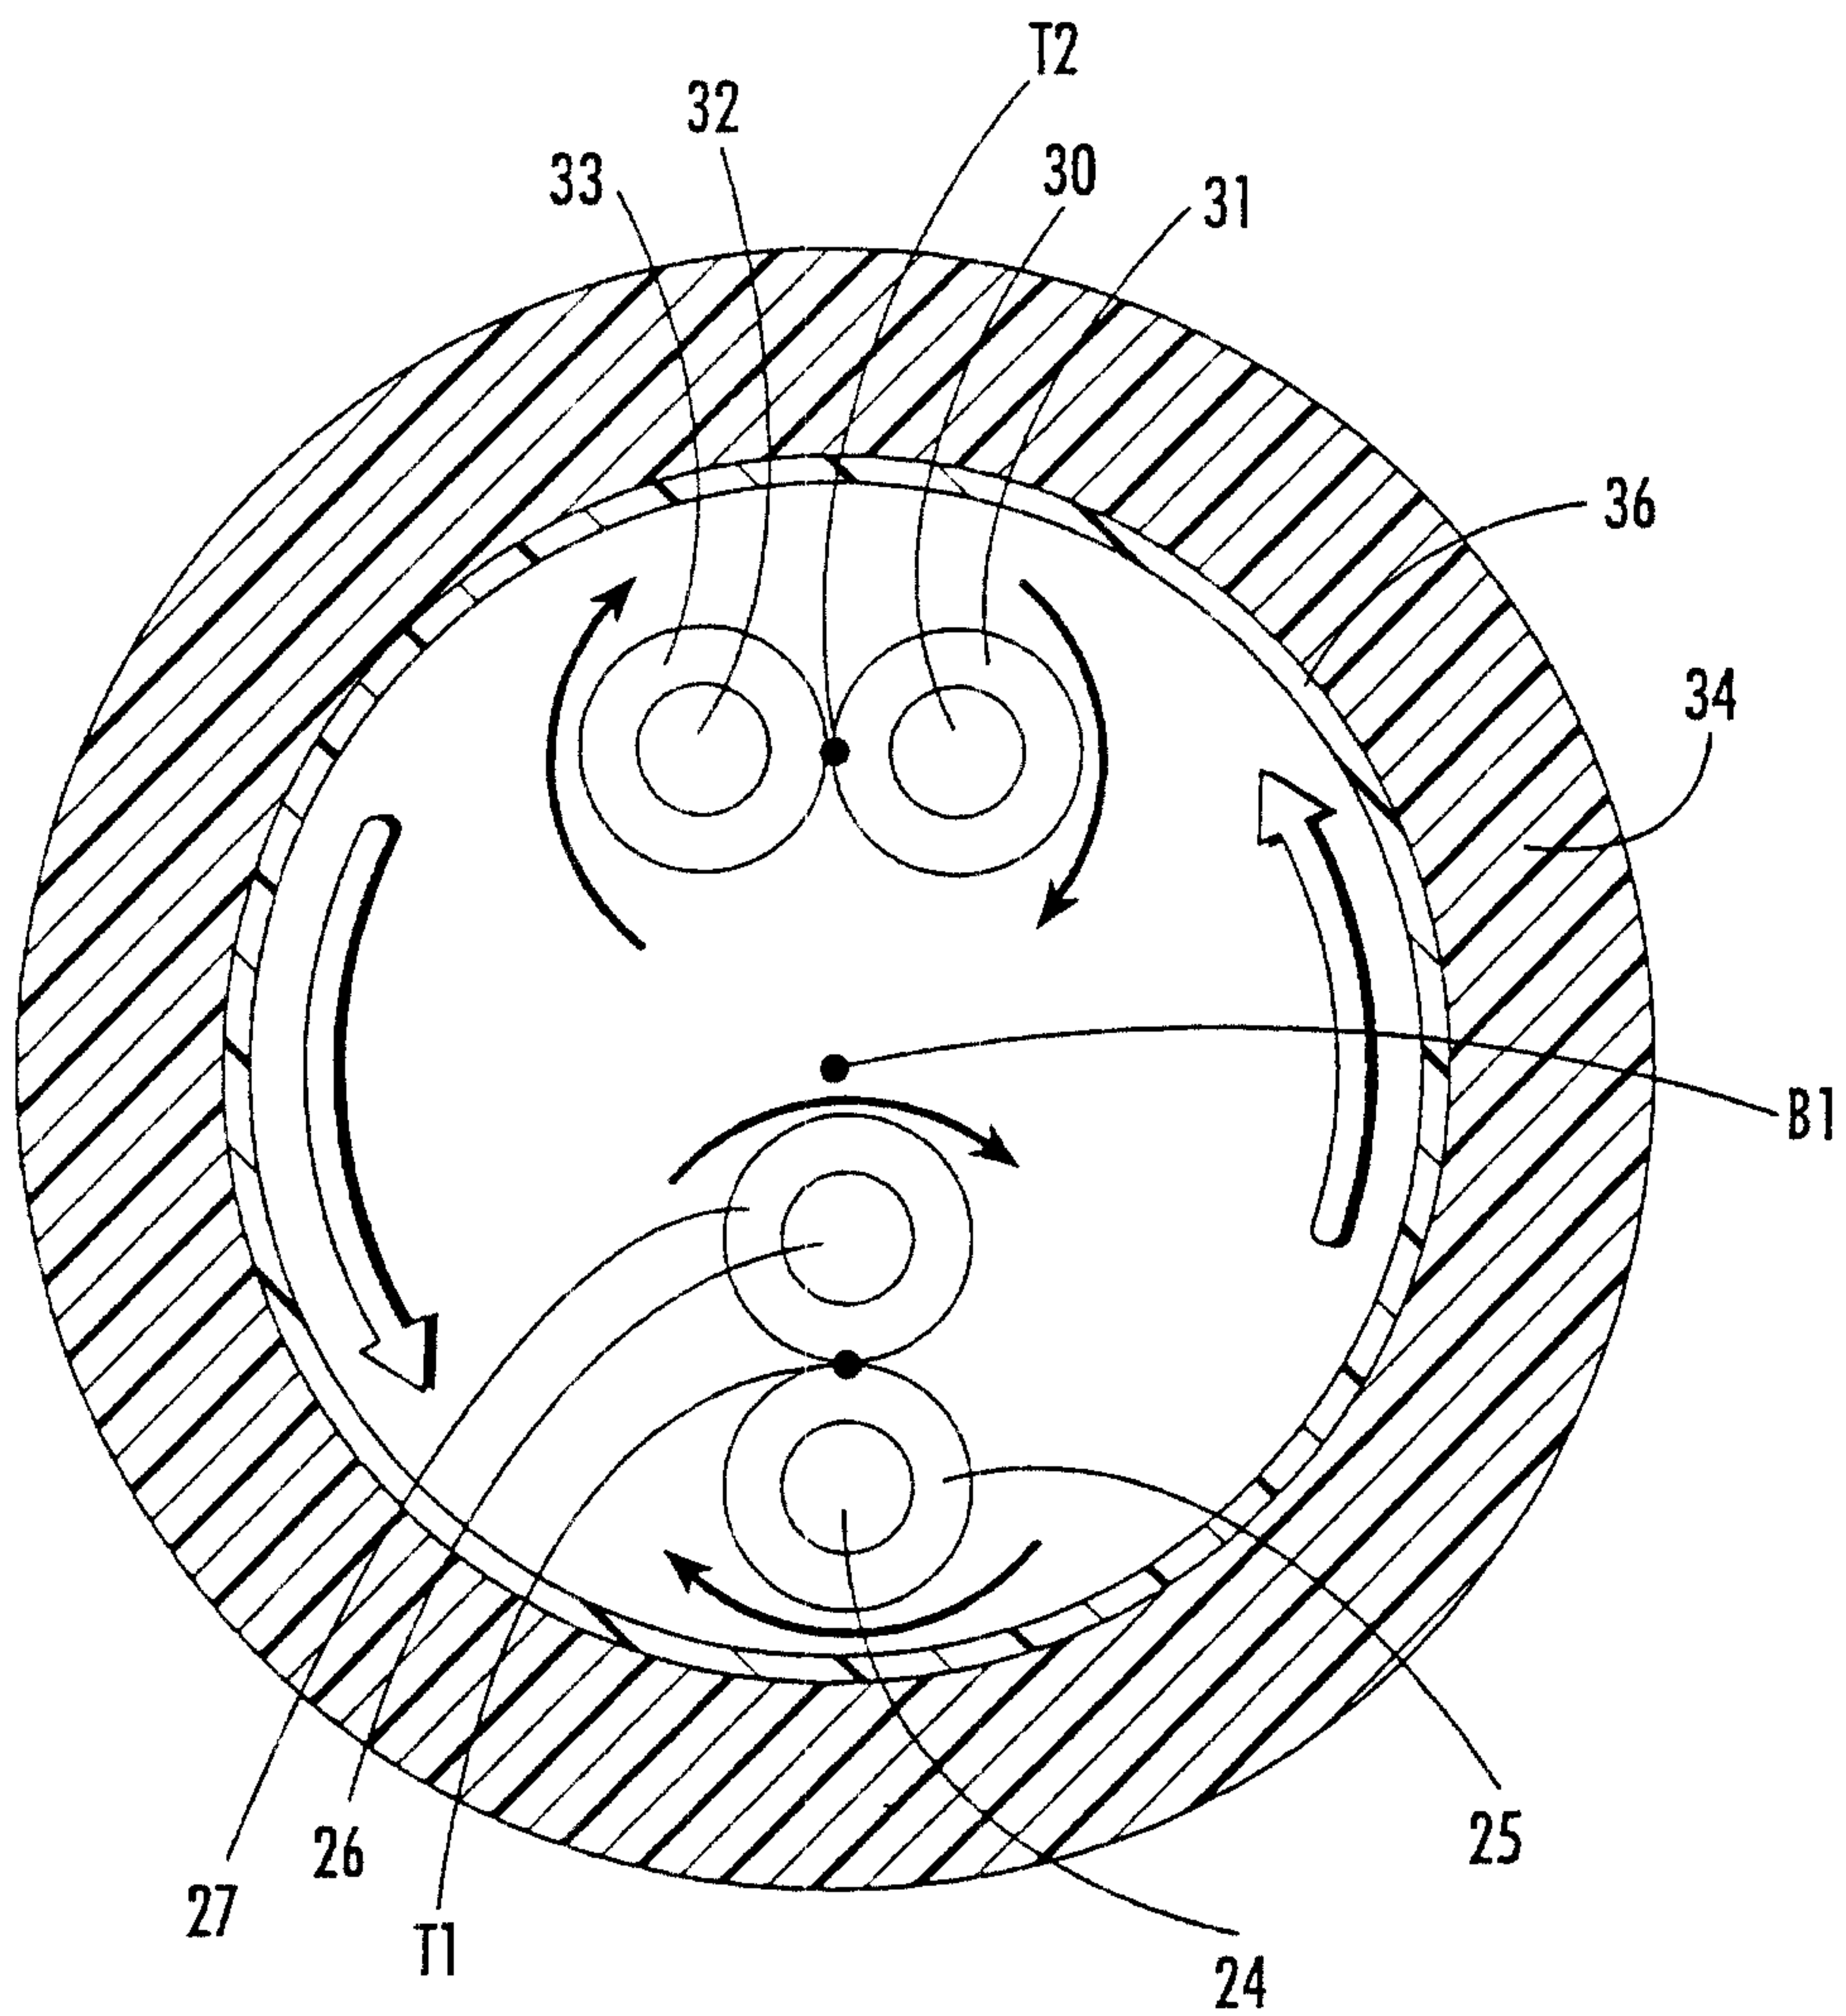


FIG. 2B.

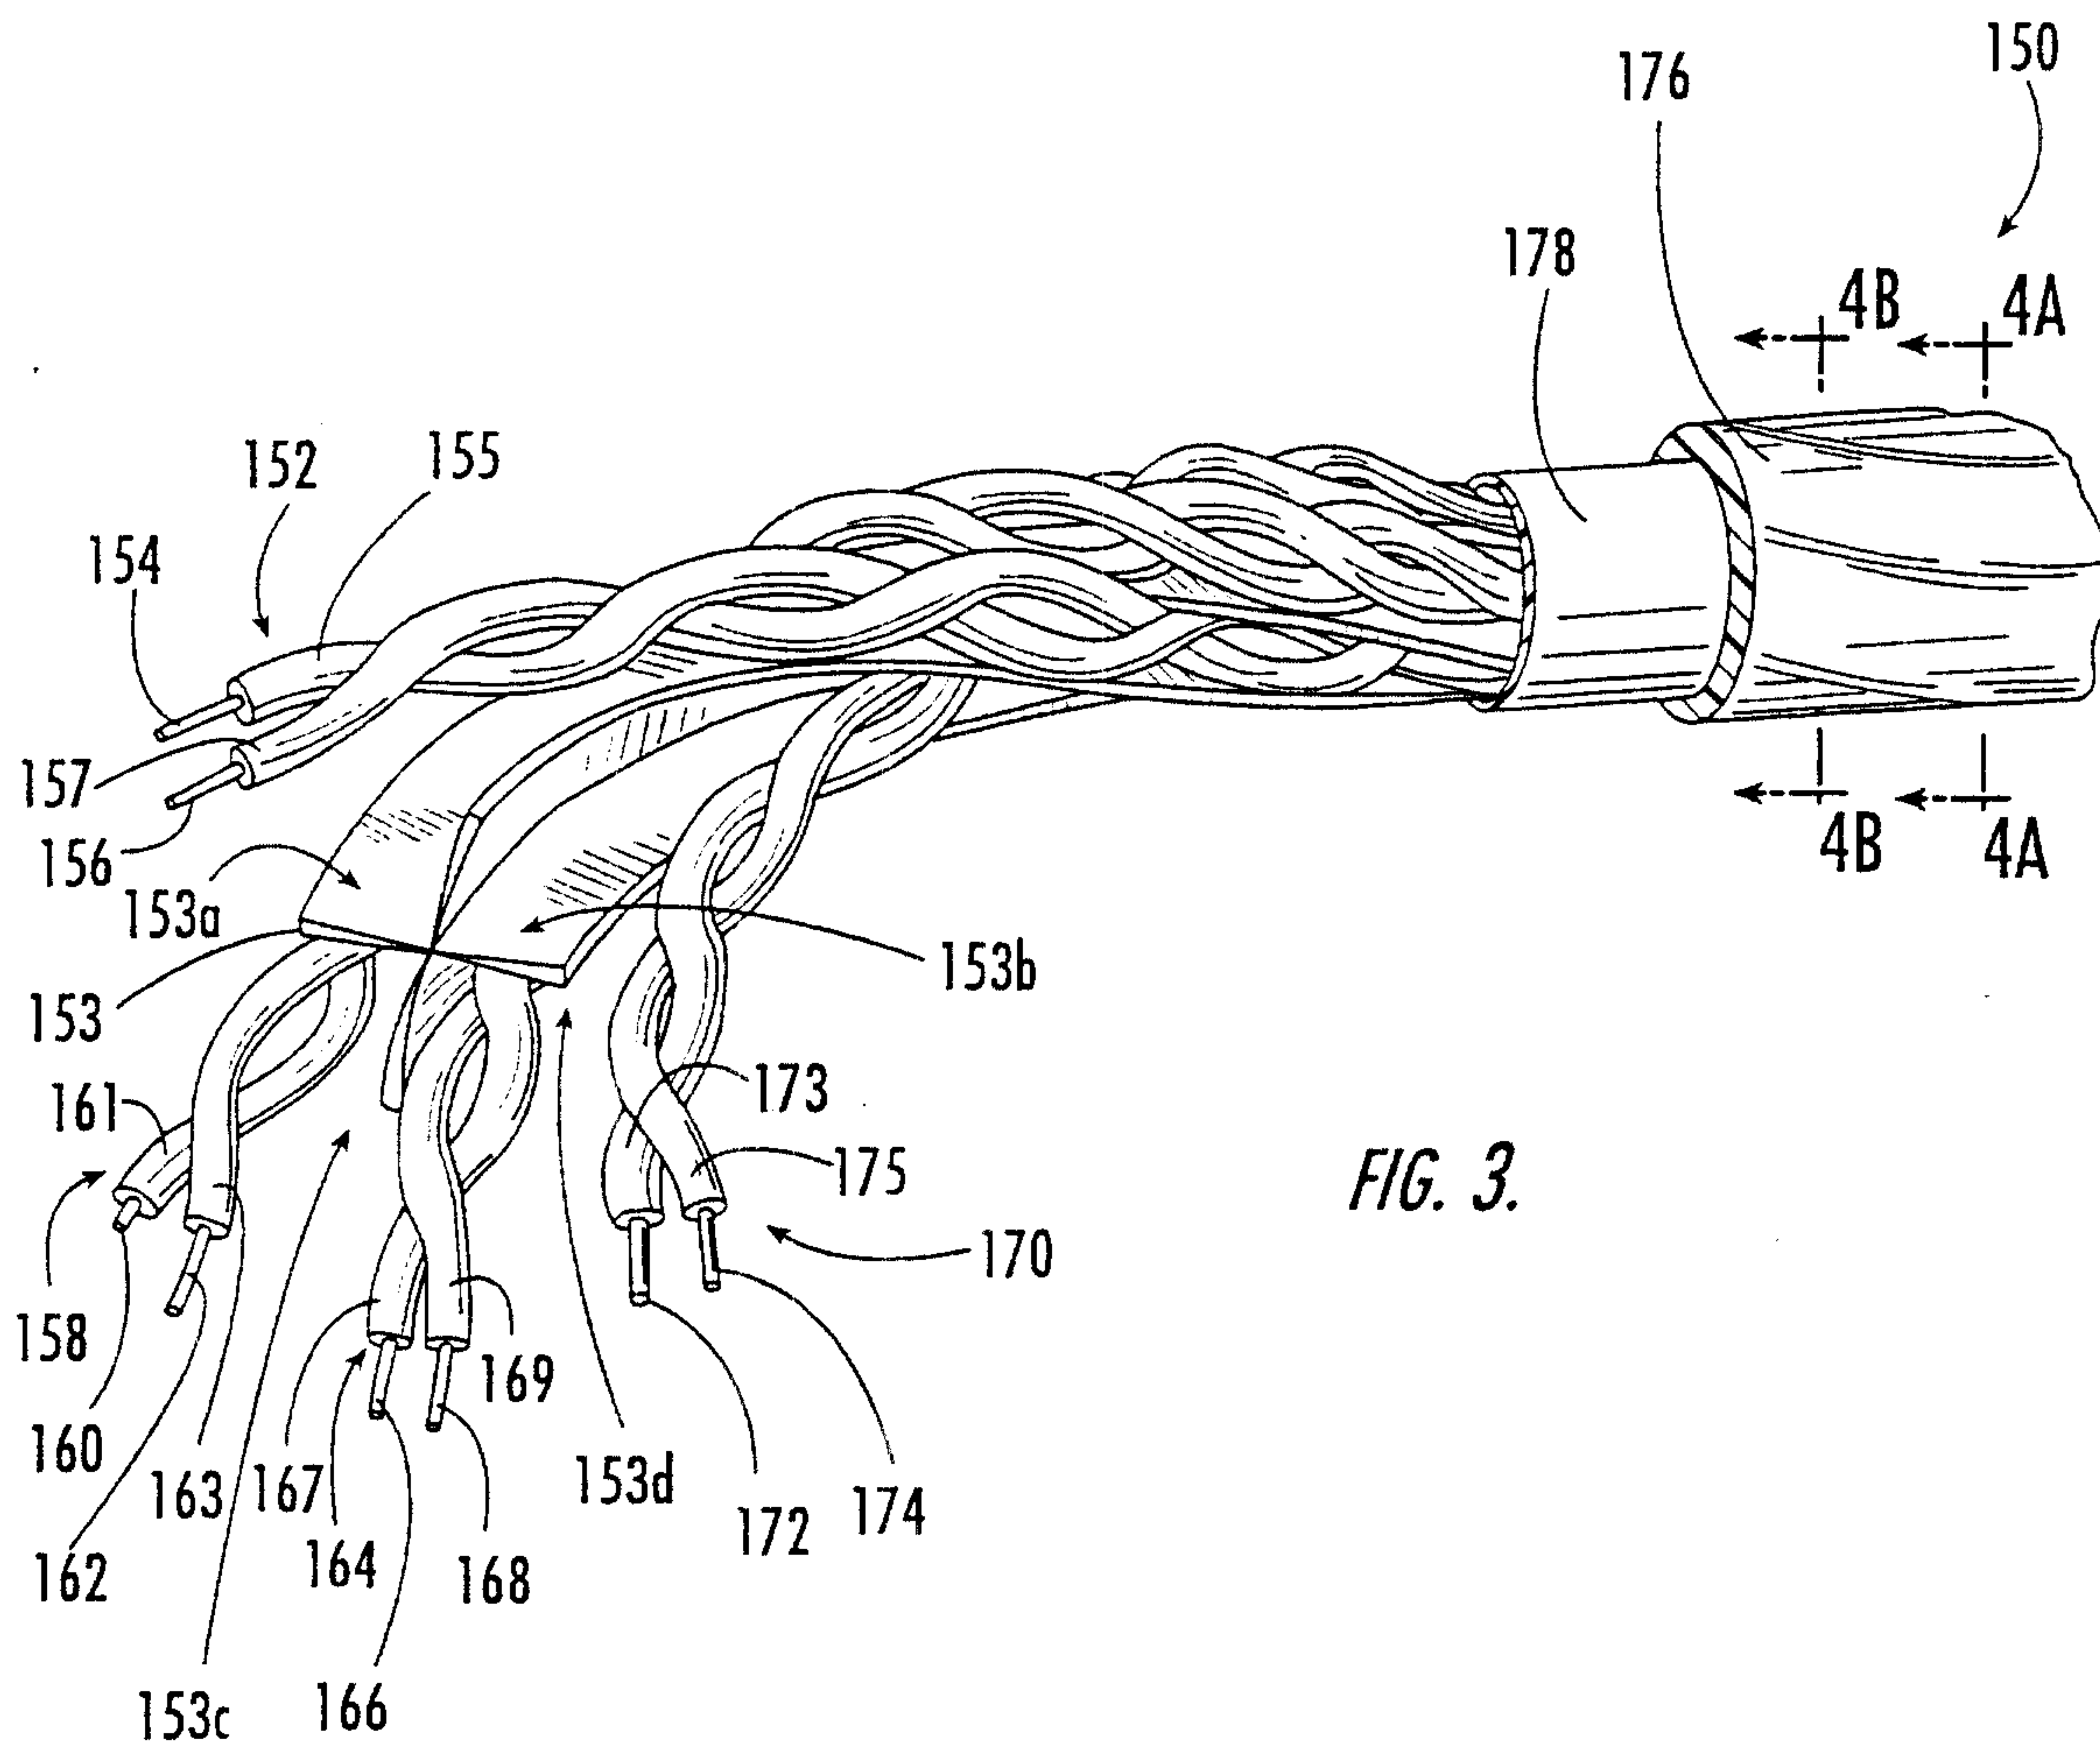


FIG. 3.

5/11

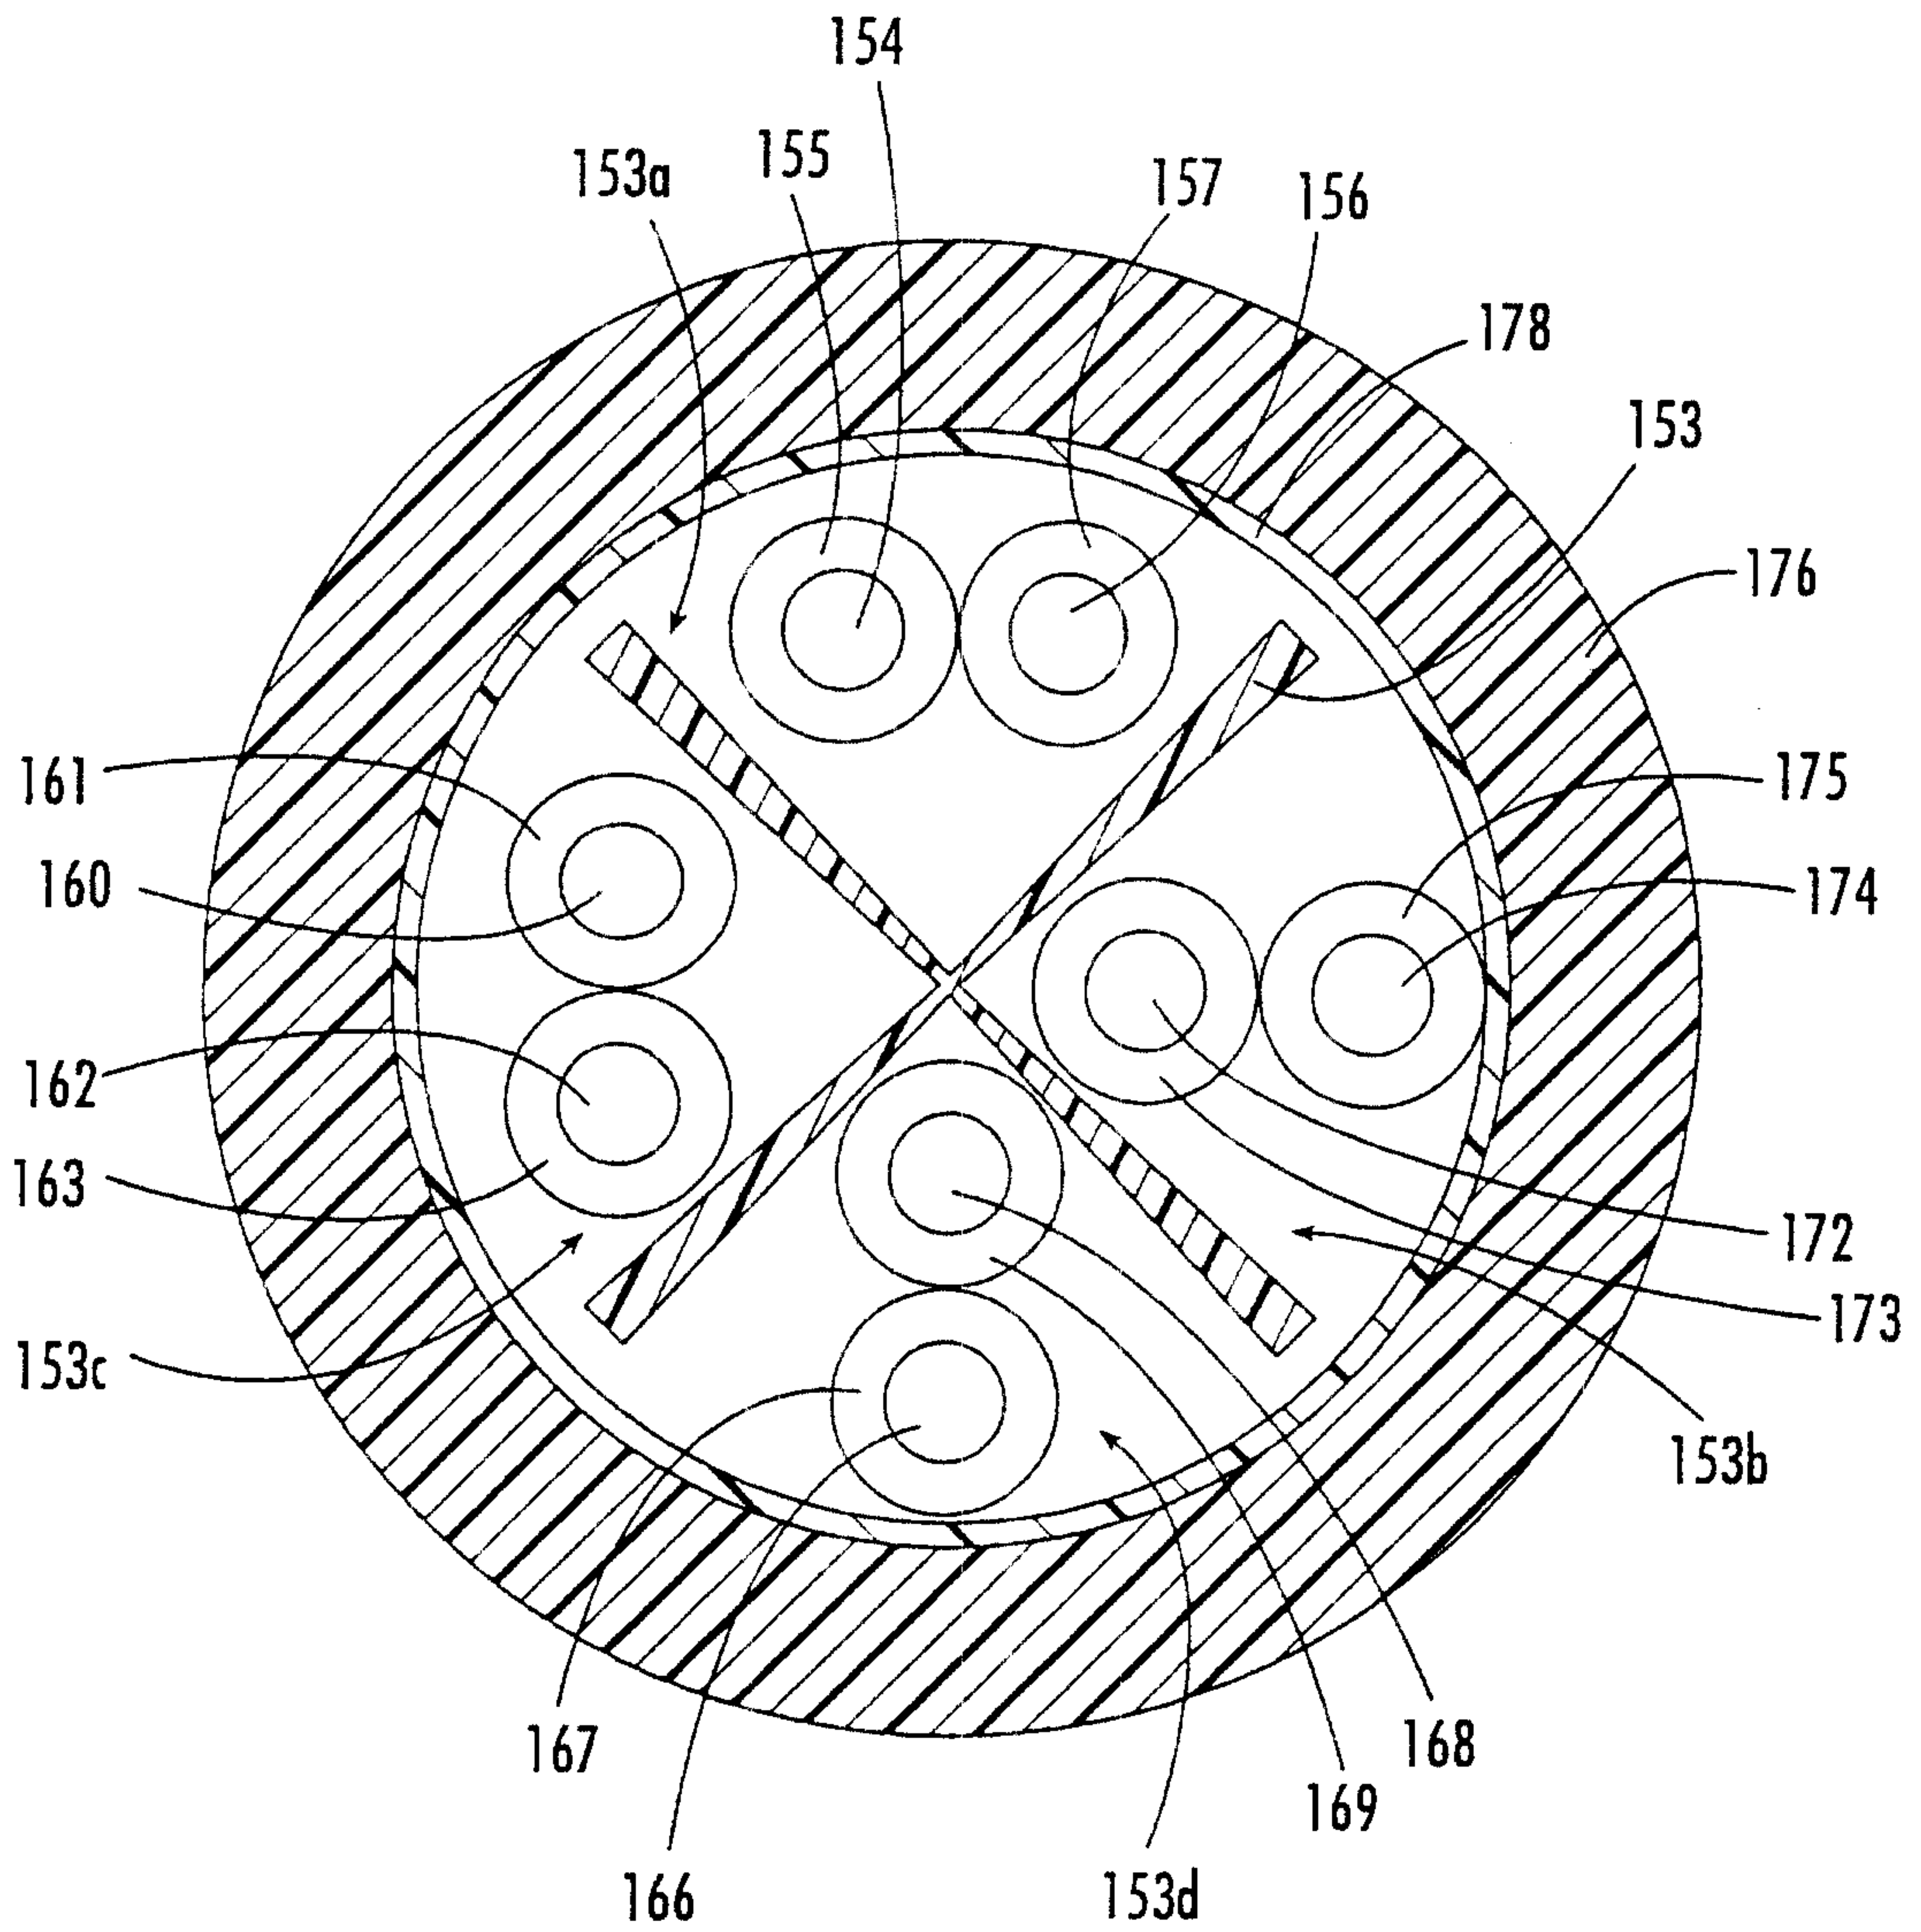


FIG. 4A.


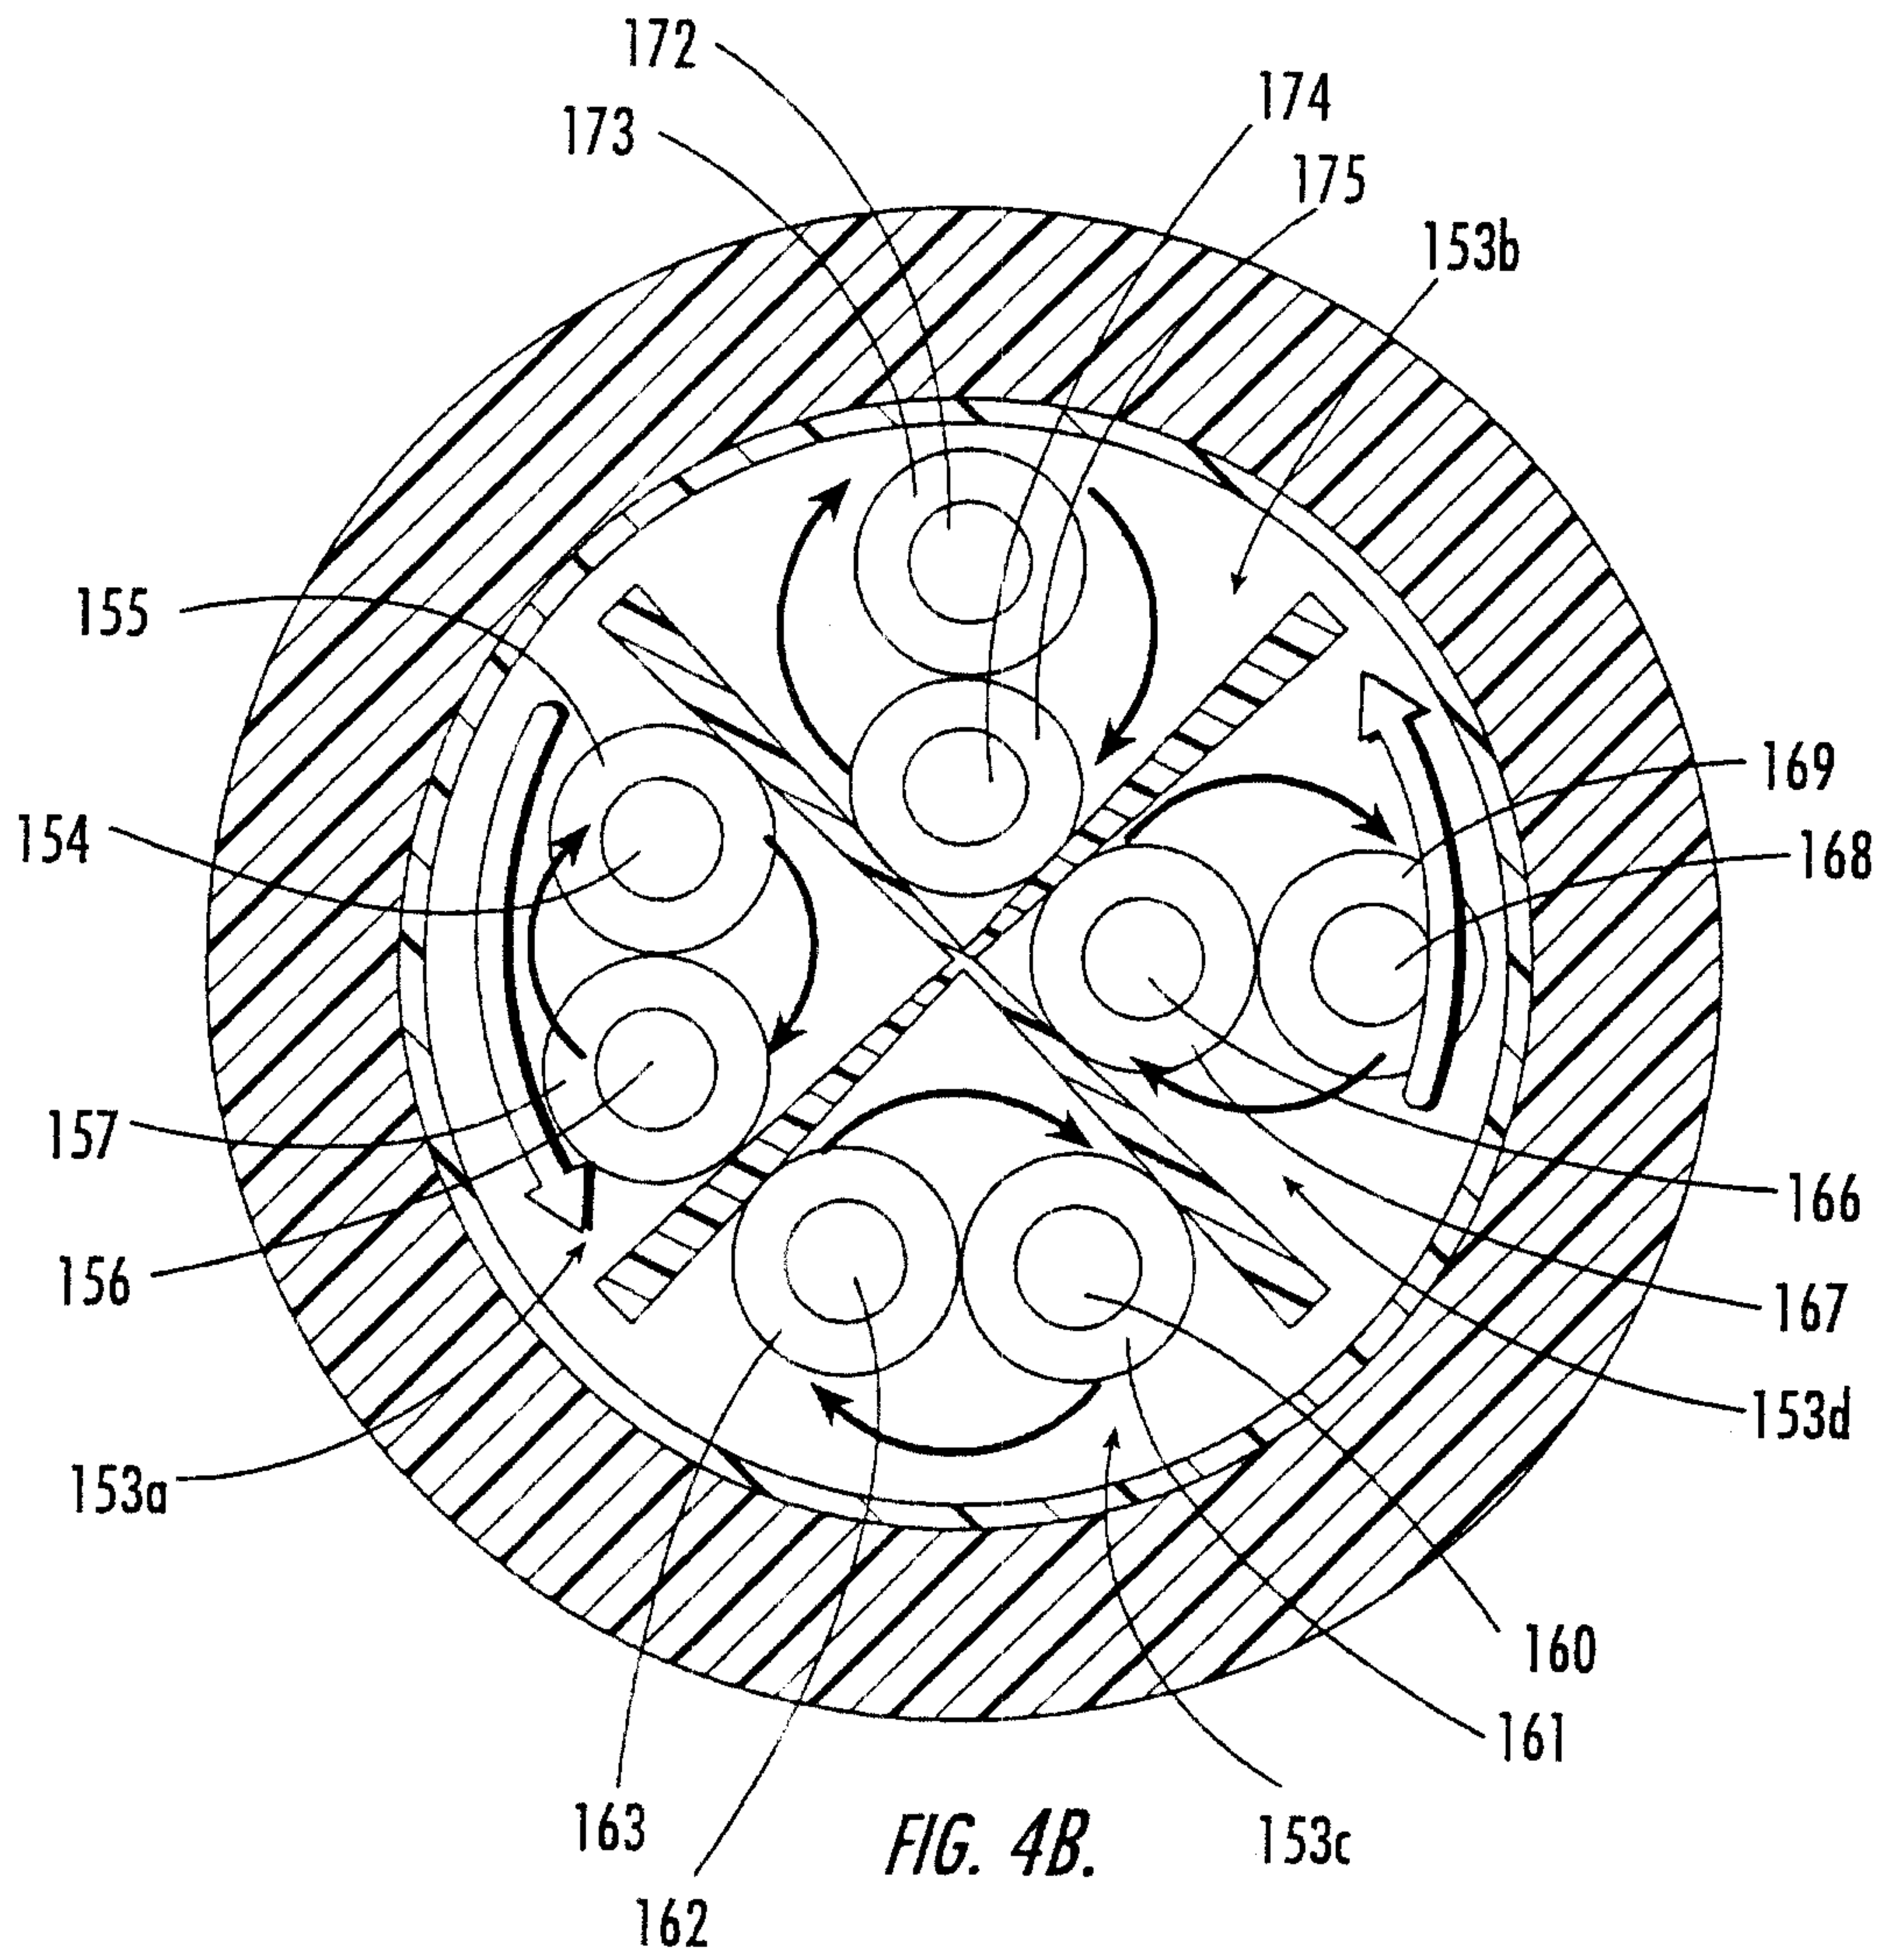


FIG. 4B.

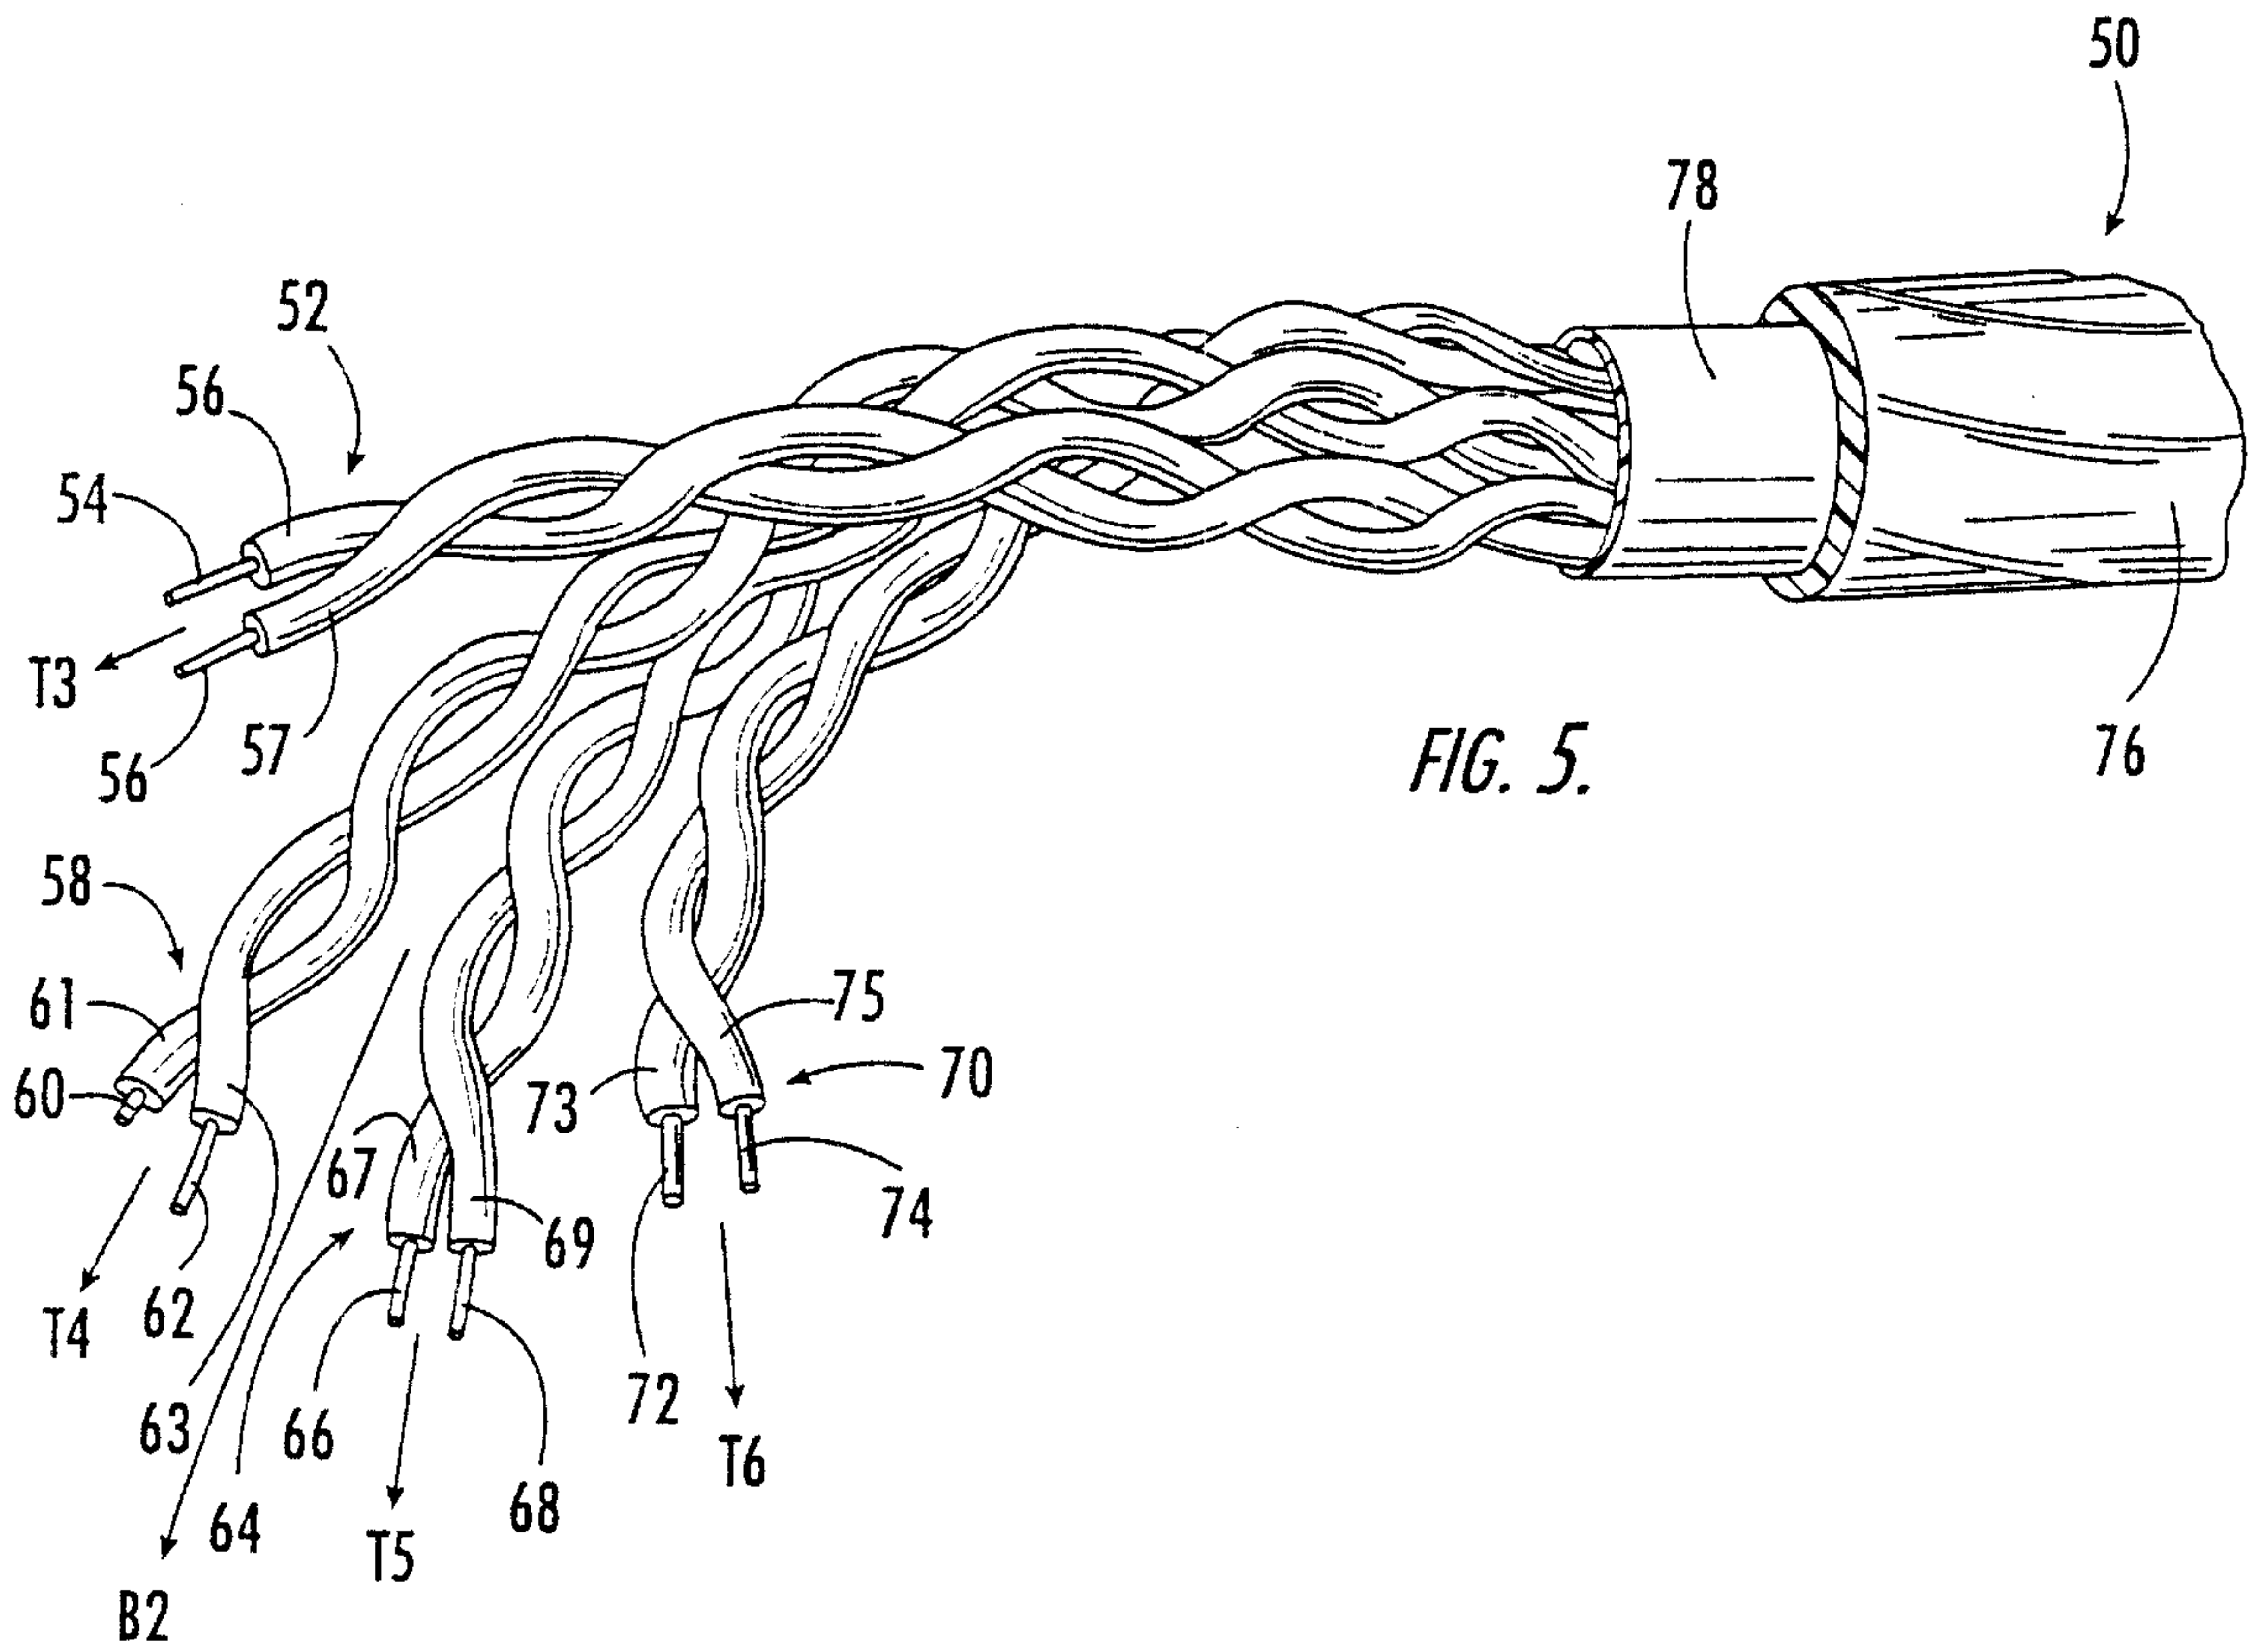

8/11

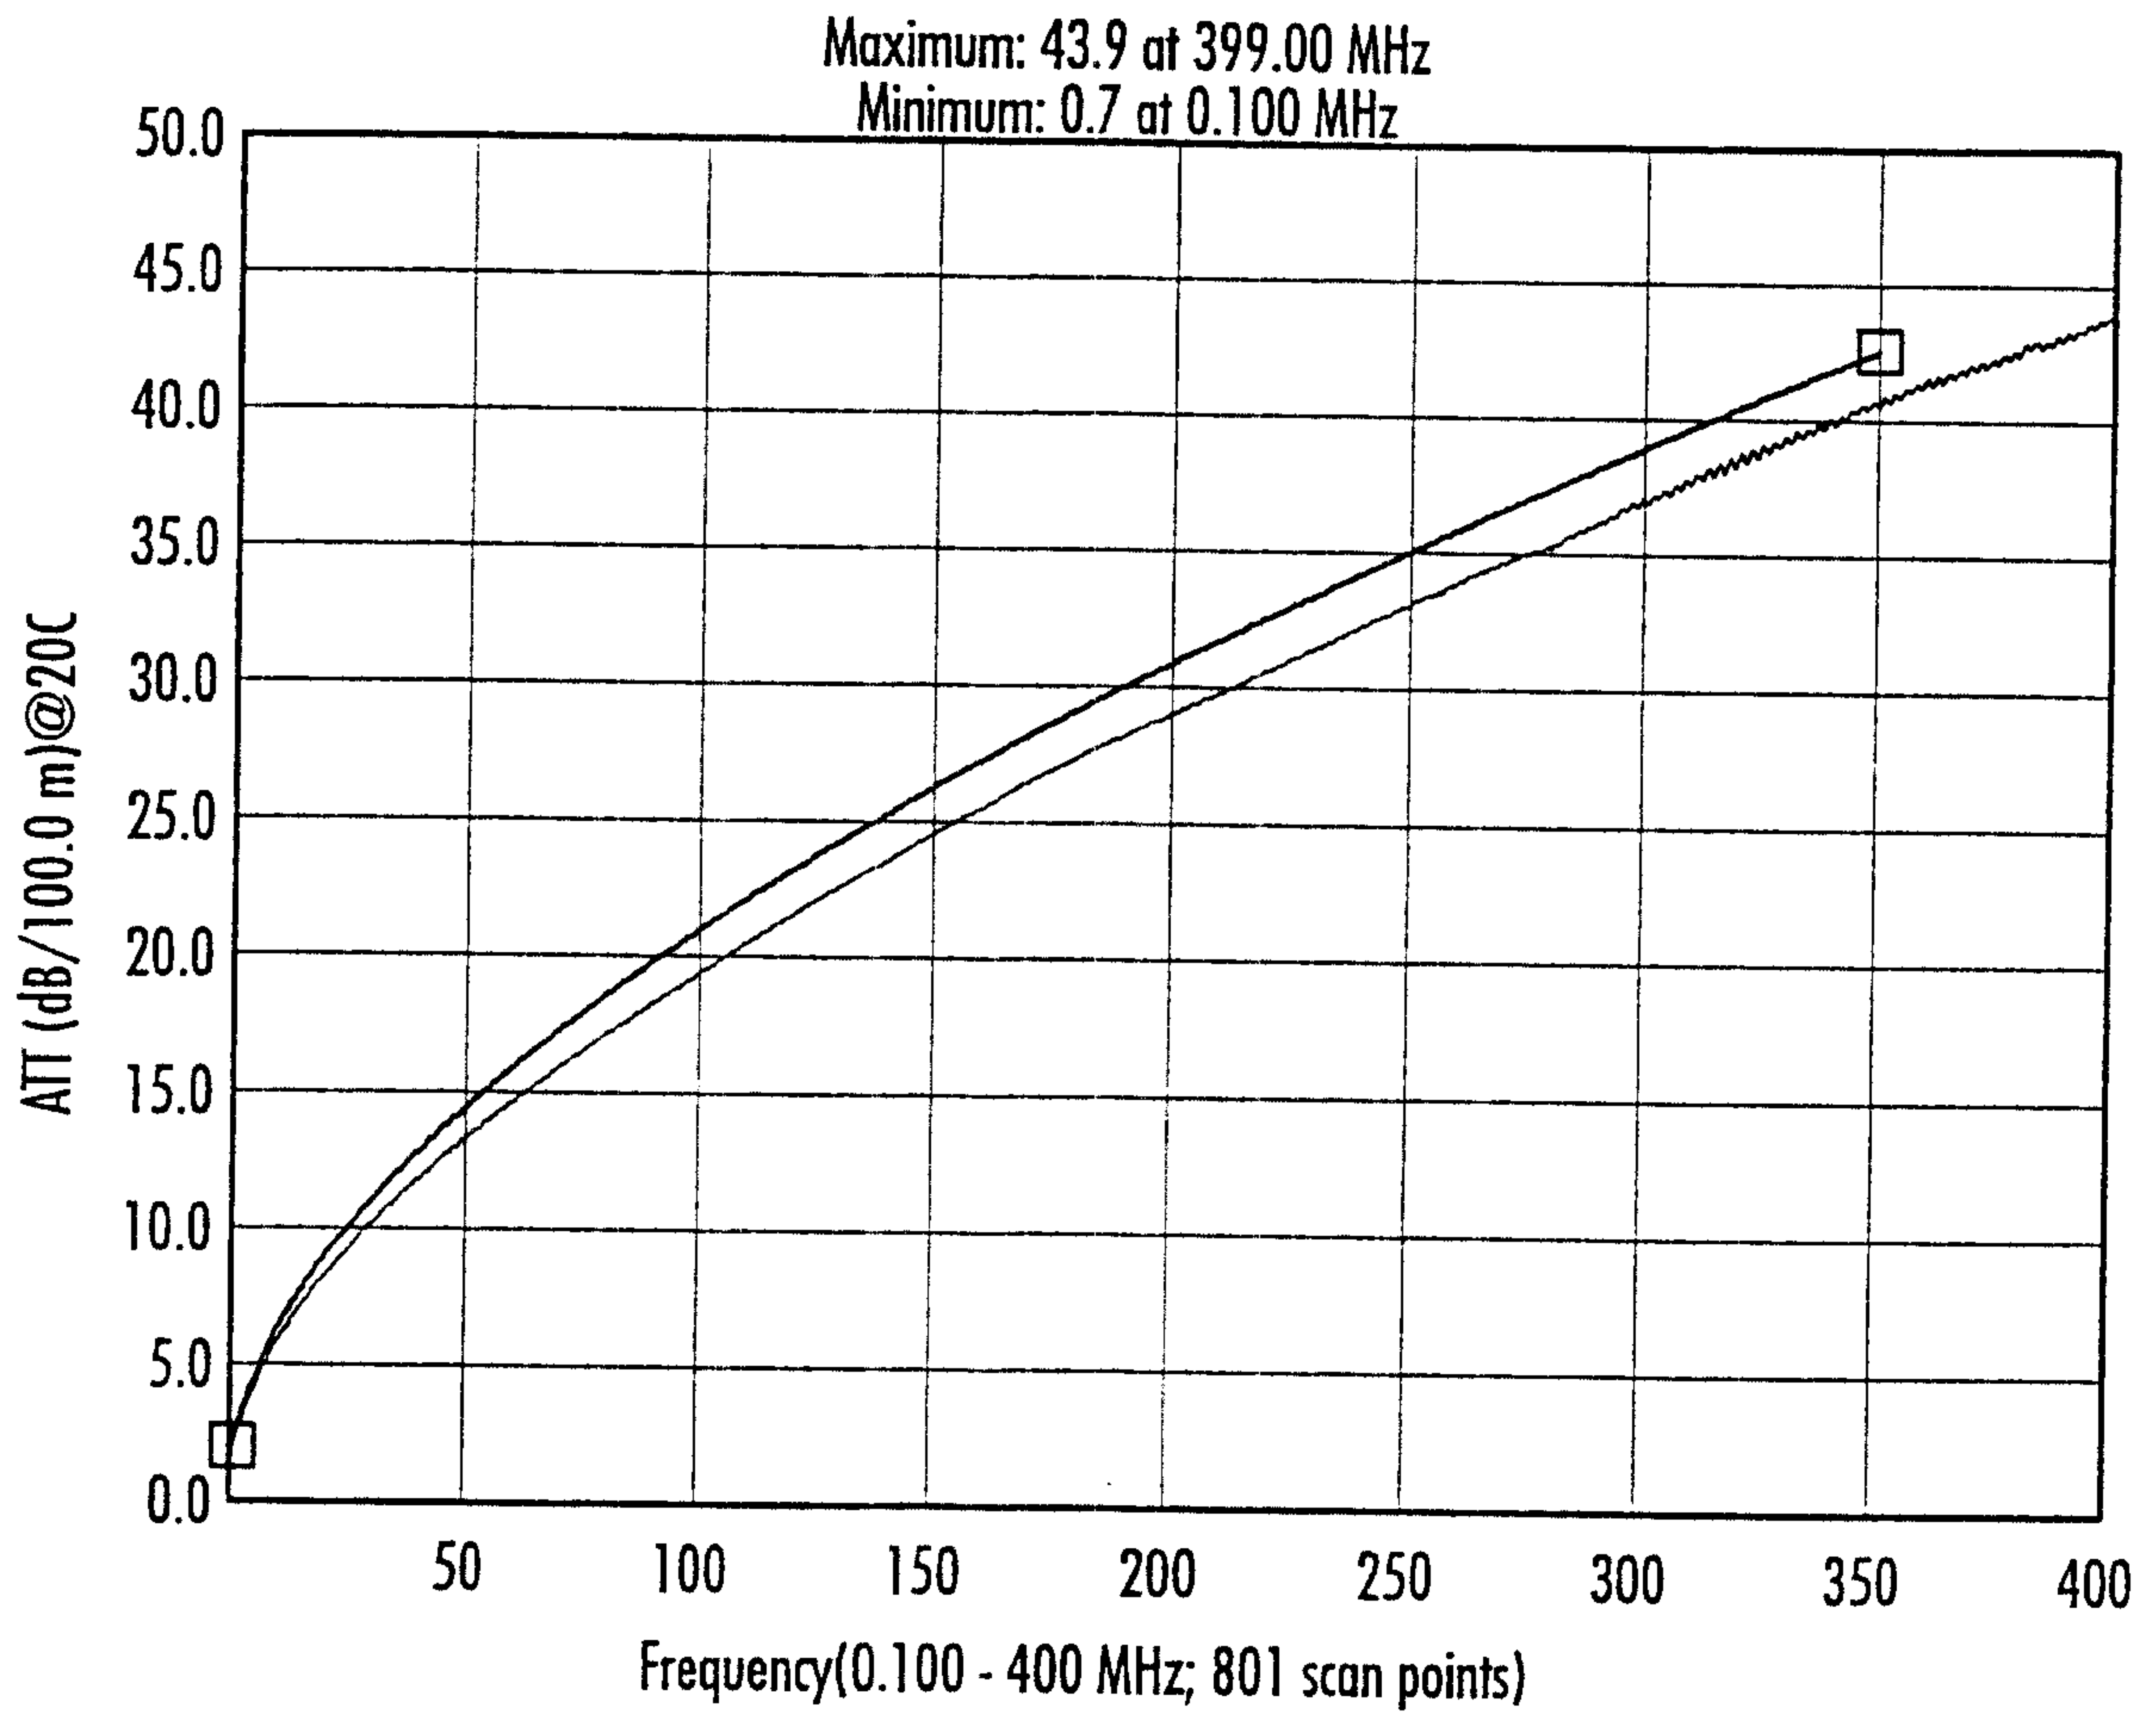


FIG. 6.

9/11

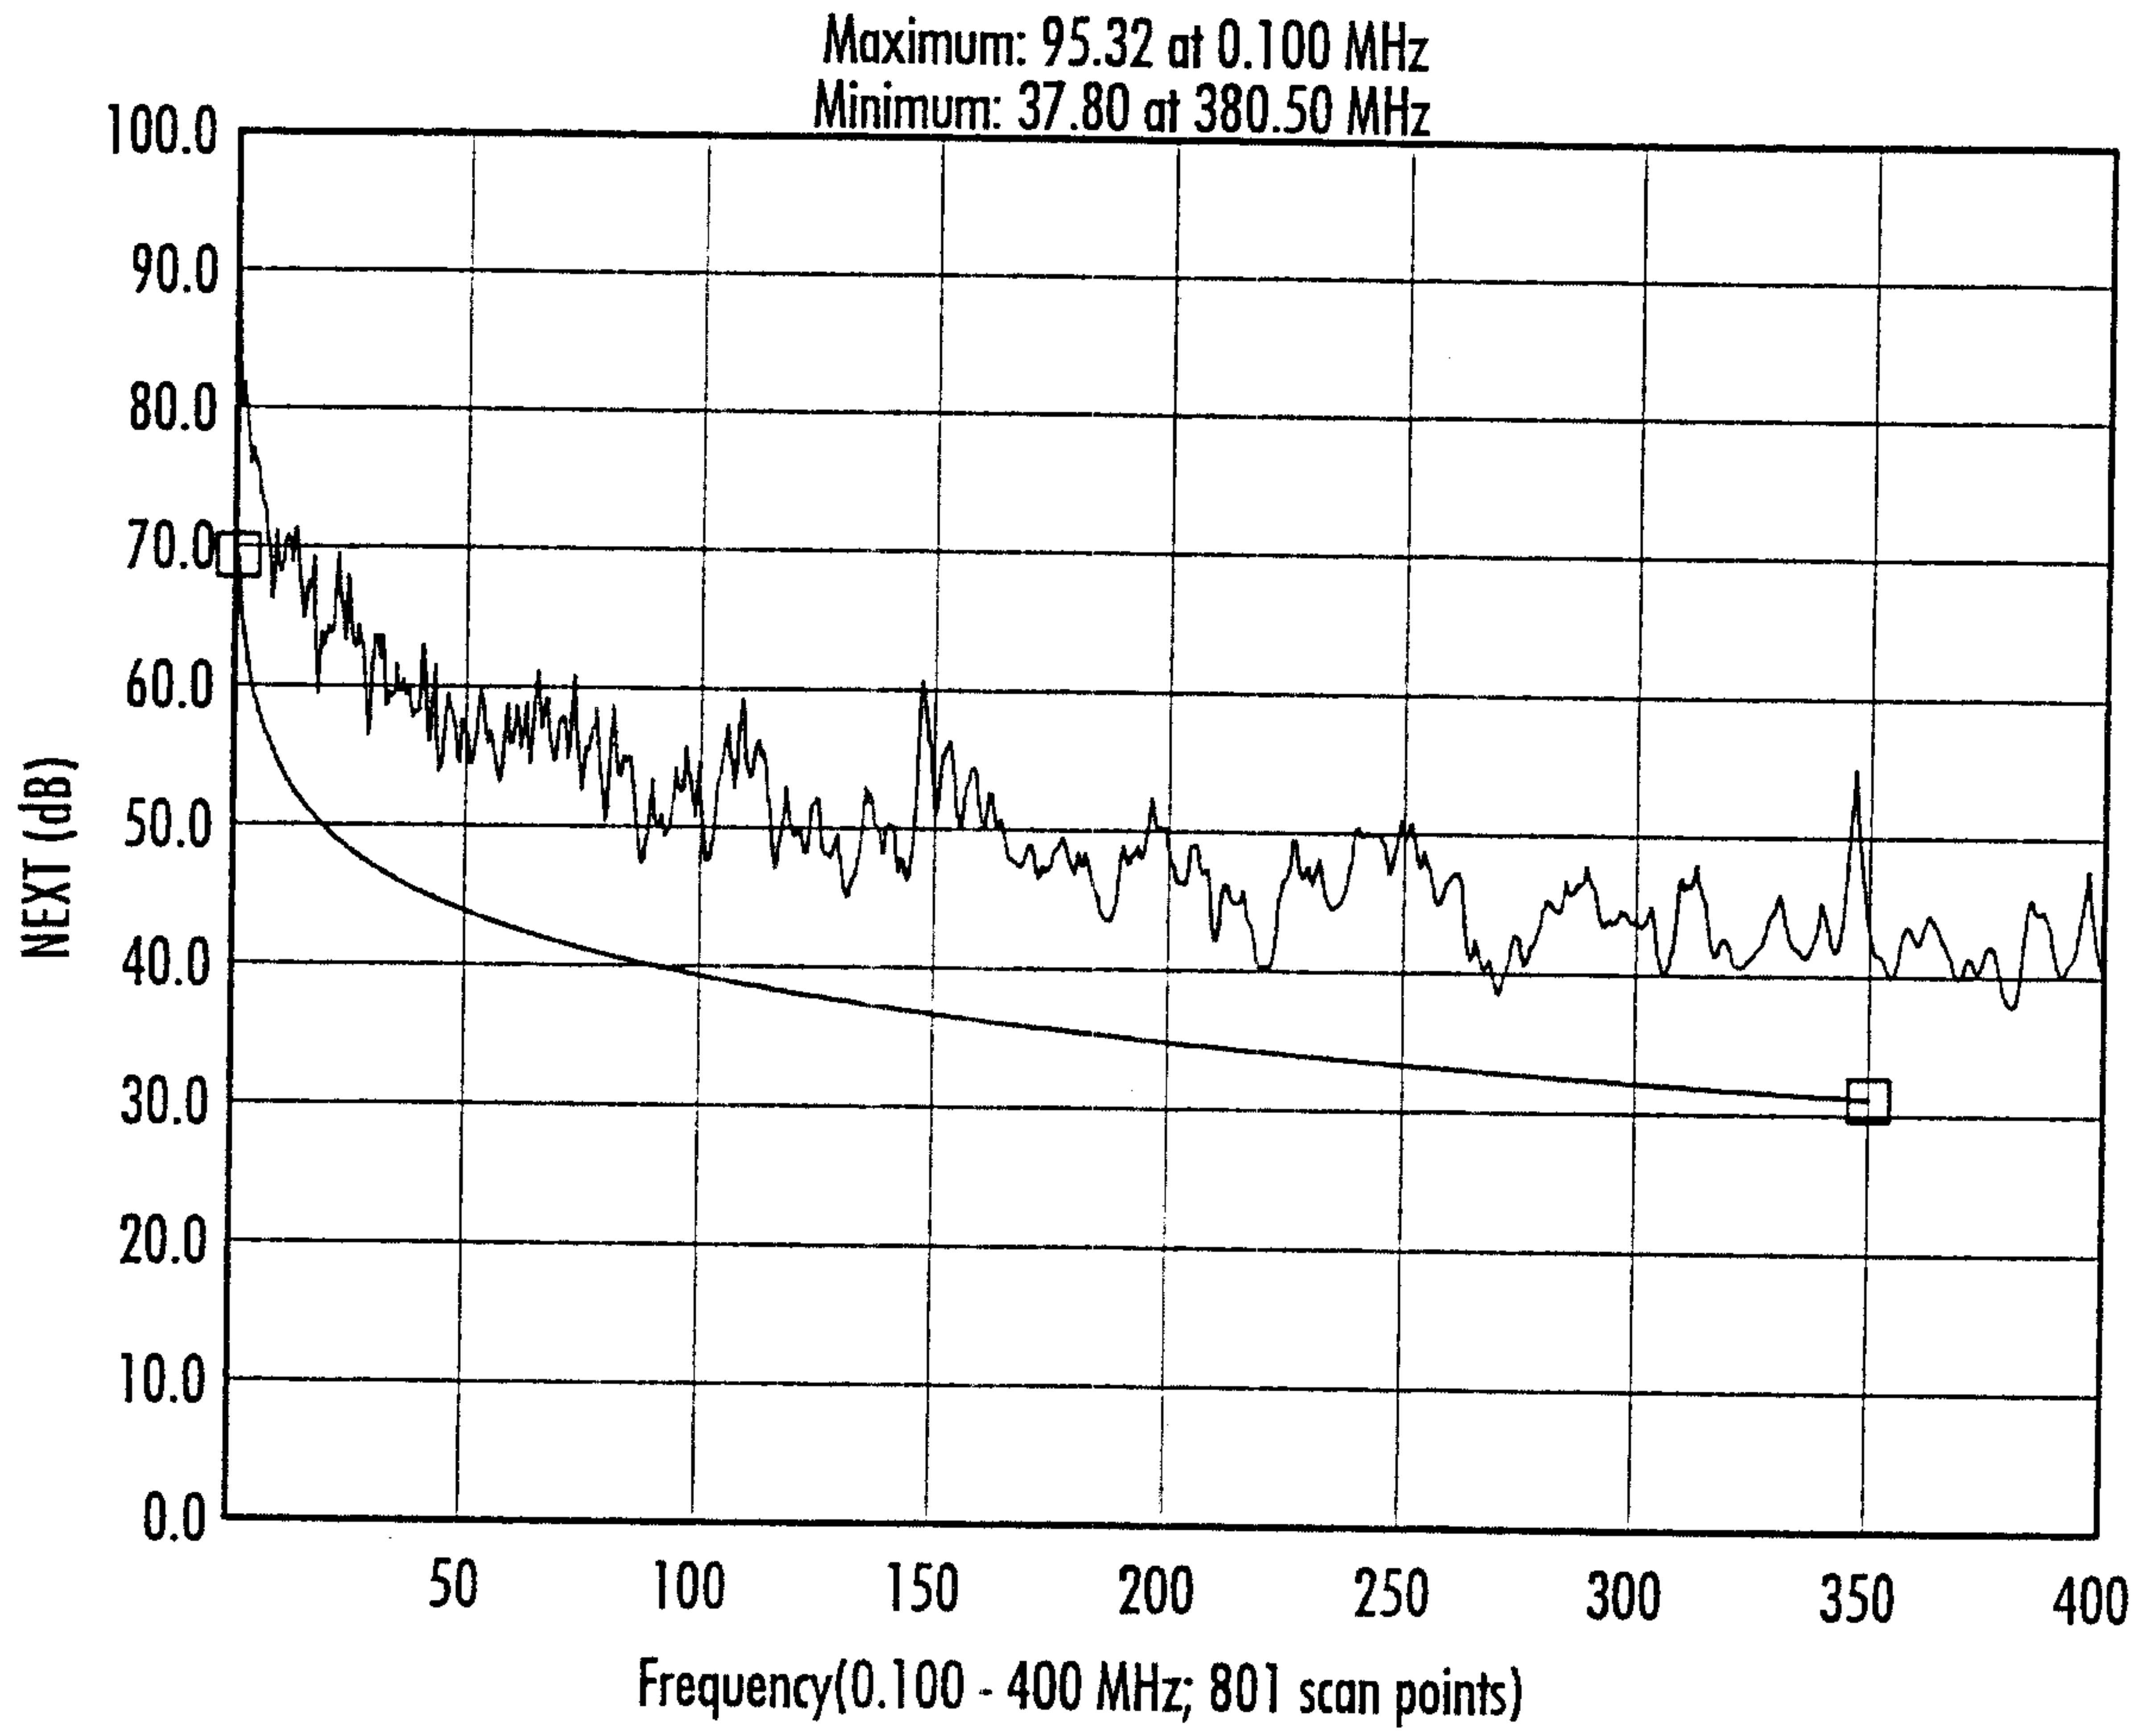


FIG. 7.

10/11

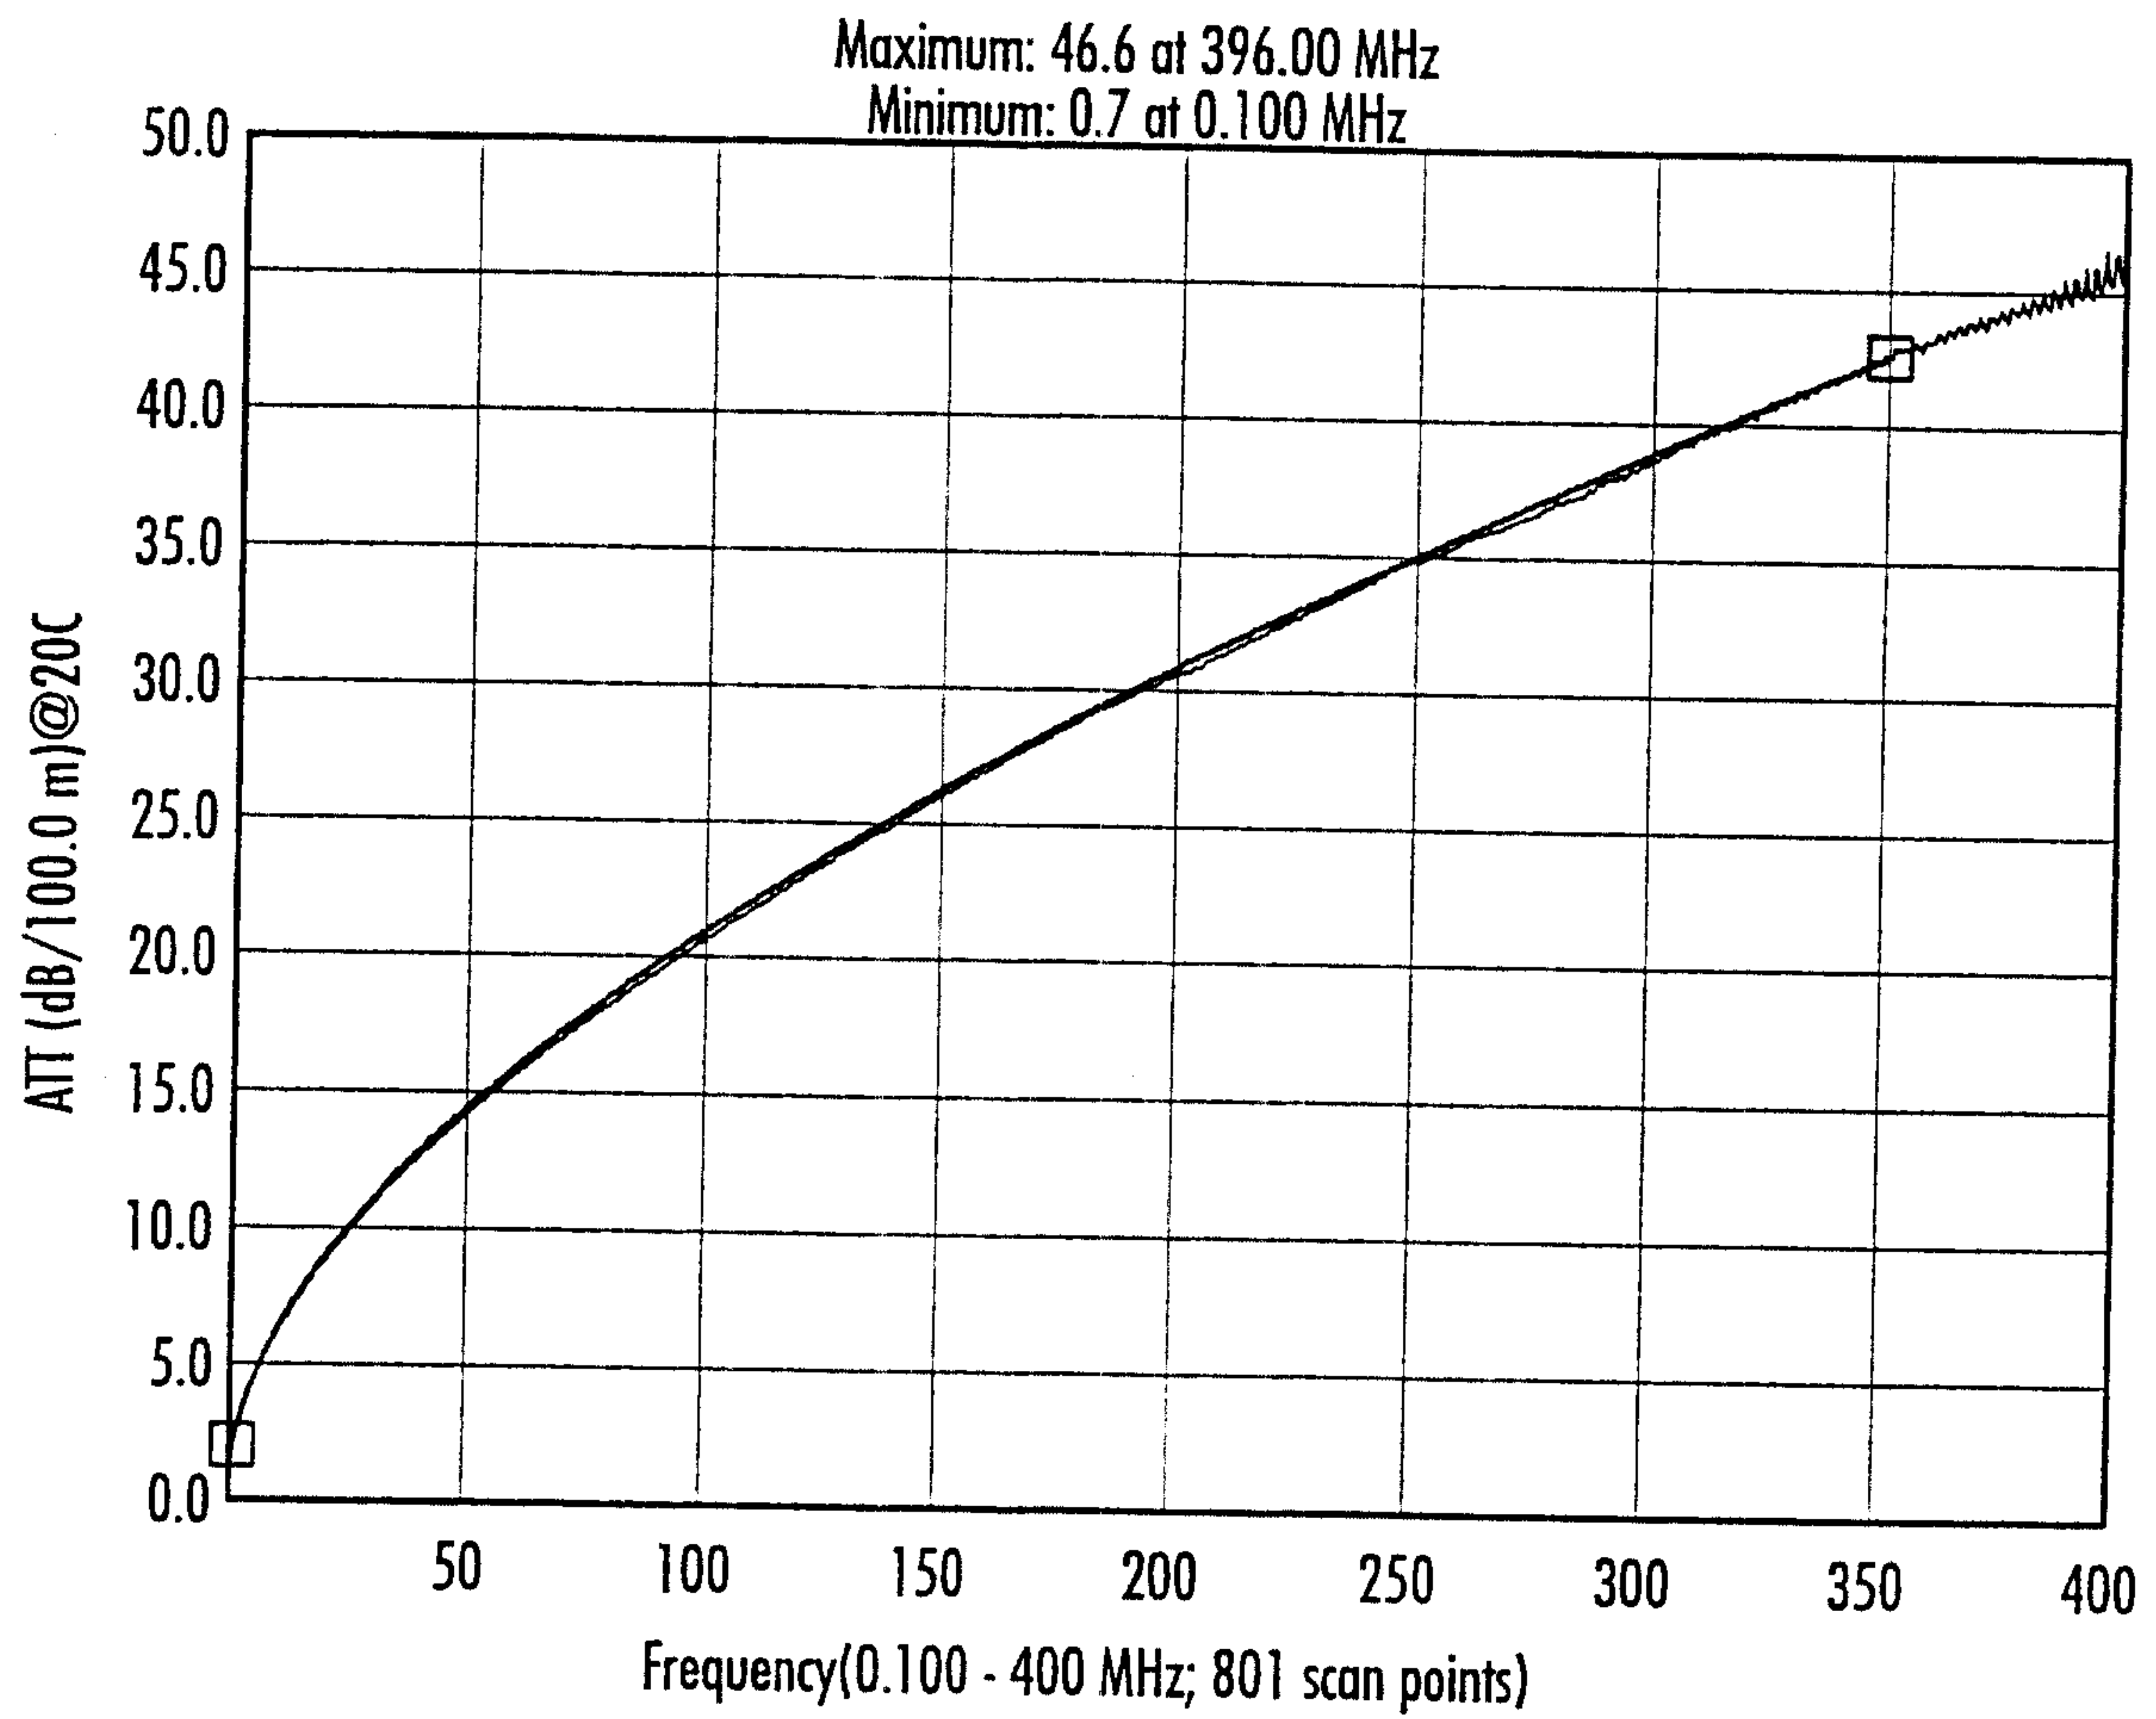


FIG. 8.

11/11

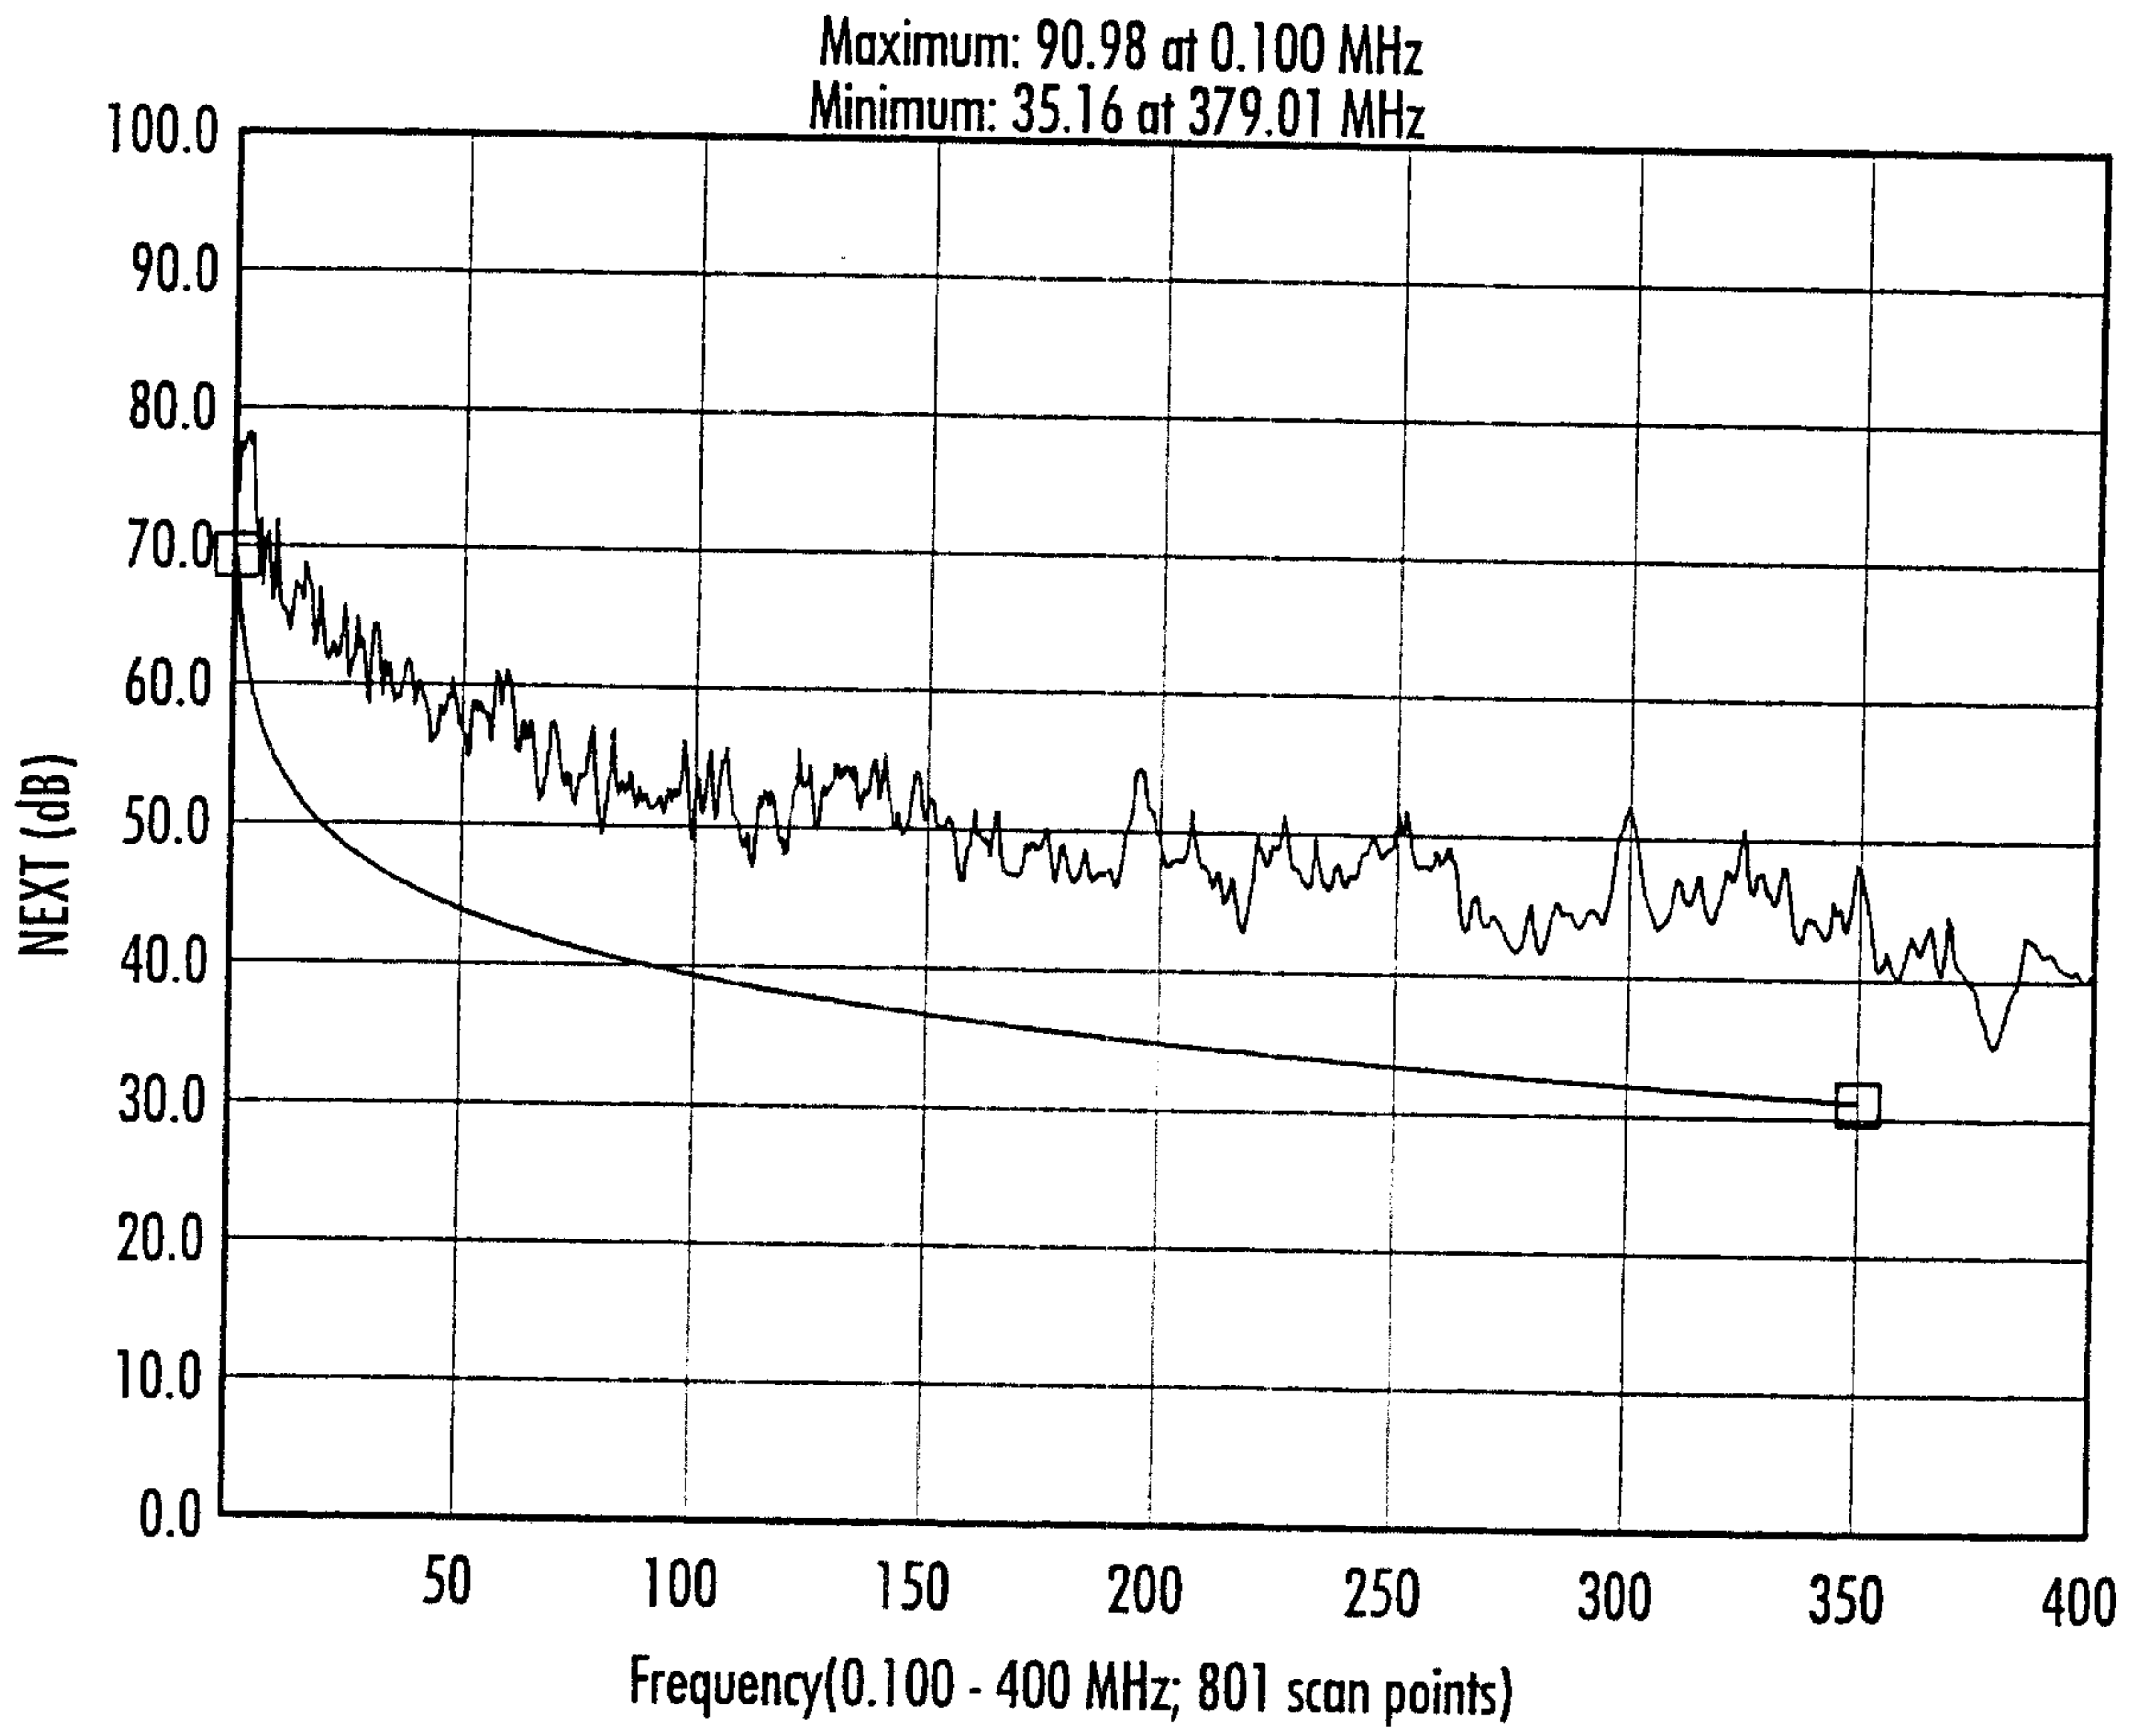


FIG. 9.

