



(86) Date de dépôt PCT/PCT Filing Date: 2007/07/20
(87) Date publication PCT/PCT Publication Date: 2008/02/07
(45) Date de délivrance/Issue Date: 2012/09/04
(85) Entrée phase nationale/National Entry: 2009/01/23
(86) N° demande PCT/PCT Application No.: JP 2007/064307
(87) N° publication PCT/PCT Publication No.: 2008/015918
(30) Priorités/Priorities: 2006/08/01 (JP2006-209700);
2007/06/14 (JP2007-157501)

(51) Cl.Int./Int.Cl. *A61M 15/00* (2006.01),
A61M 11/00 (2006.01), *A61M 11/02* (2006.01),
B05B 17/04 (2006.01), *B05B 7/24* (2006.01)


(72) Inventeurs/Inventors:
YAMADA, MANABU, JP;
SASAKI, HIROSHI, JP;
KATAYAMA, KAZUHIKO, JP;
YAJIMA, MORIO, JP

(73) Propriétaire/Owner:
JAPAN TOBACCO INC., JP

(74) Agent: ROBIC

(54) Titre : DISPOSITIF D'ASPIRATION D'AEROSOL ET SON PROCEDE D'ASPIRATION

(54) Title: AEROSOL ASPIRATOR AND AEROSOL SUCKING METHOD

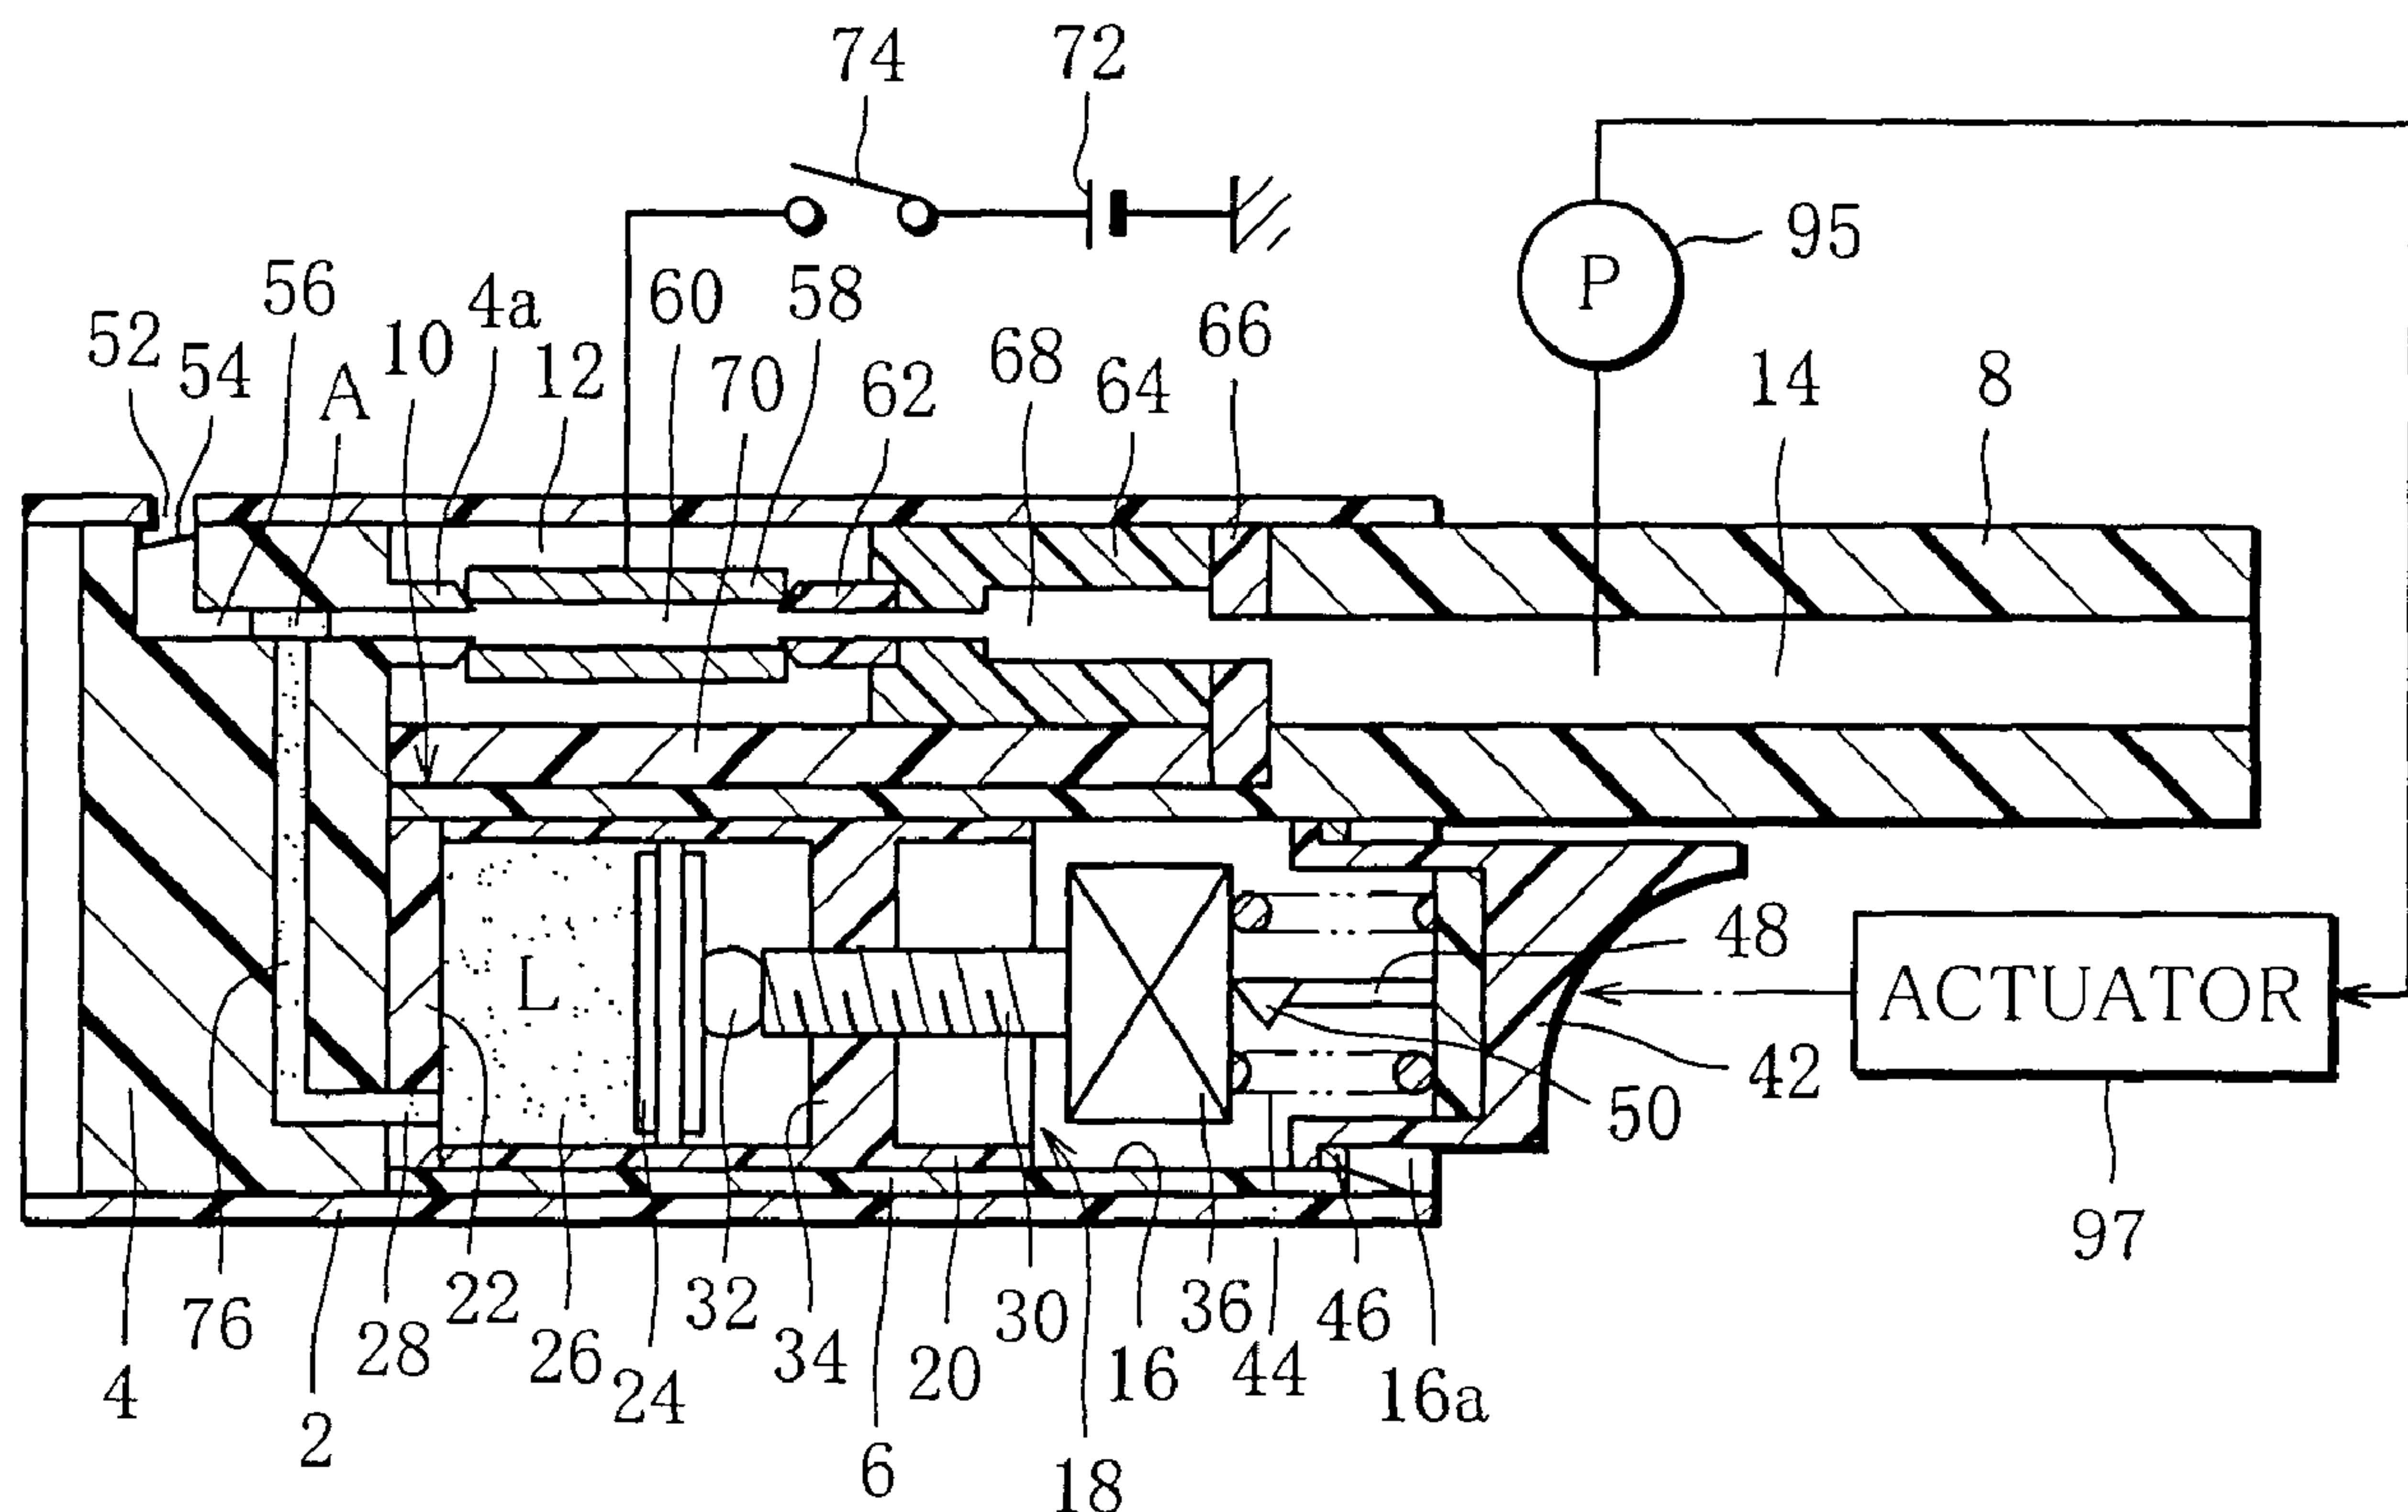

(57) Abrégé/Abstract:

Provided is an aerosol suction device comprising a casing (2) having a mouthpiece (8) and a fresh air inlet (52), production passages (56, 60 and 68) extending from the fresh air inlet (52) to the mouthpiece (8), a syringe pump (18) housed in the casing (2) for feeding a predetermined quantity of solution to a distribution position (A) of the production passages, and a tubular heater (58) disposed downstream of the distribution position (A) and forming part of the production passages. When the user executes the sucking action through the mouthpiece (8), the solution at the distribution position (A) is transferred from the distribution position (A) into and atomized in the heater (58), and is then condensed into an aerosol in the sucked air so that the aerosol is sucked together with the sucked air by the user.

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2008 年 2 月 7 日 (07.02.2008)

PCT

(10) 国際公開番号
WO 2008/015918 A1

(51) 国際特許分類:

A61M 15/00 (2006.01) B05B 17/04 (2006.01)
A61M 11/00 (2006.01) B05B 7/24 (2006.01)
A61M 11/02 (2006.01)

目 1 7 番 7 号 日本たばこ産業株式会社内 Tokyo (JP).
矢島盛雄 (YAJIMA, Morio) [JP/JP]; 〒1308603 東京都
墨田区横川一丁目 1 7 番 7 号 日本たばこ産業株式
会社内 Tokyo (JP).

(21) 国際出願番号: PCT/JP2007/064307

(74) 代理人: 長門侃二 (NAGATO, Kanji); 〒1050004 東京
都港区新橋 5 丁目 8 番 1 号 百楽ビル 5 階 Tokyo (JP).

(22) 国際出願日: 2007 年 7 月 20 日 (20.07.2007)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:

特願 2006-209700 2006 年 8 月 1 日 (01.08.2006) JP
特願 2007-157501 2007 年 6 月 14 日 (14.06.2007) JP

(71) 出願人 (米国を除く全ての指定国について): 日本た
ばこ産業株式会社 (JAPAN TOBACCO INC.) [JP/JP];
〒1058422 東京都港区虎ノ門二丁目 2 番 1 号 Tokyo
(JP).

(72) 発明者; および

(75) 発明者/出願人 (米国についてのみ): 山田学 (YA-
MADA, Manabu) [JP/JP]; 〒1308603 東京都墨田区横川
一丁目 1 7 番 7 号 日本たばこ産業株式会社内 Tokyo
(JP). 佐々木宏 (SASAKI, Hiroshi) [JP/JP]; 〒1308603
東京都墨田区横川一丁目 1 7 番 7 号 日本たばこ
産業株式会社内 Tokyo (JP). 片山和彦 (KATAYAMA,
Kazuhiko) [JP/JP]; 〒1308603 東京都墨田区横川一丁


(81) 指定国 (表示のない限り、全ての種類の国内保護が
可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH,
BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK,
DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM,
GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK,
SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, ZA, ZM, ZW.

(84) 指定国 (表示のない限り、全ての種類の広域保護が可
能): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD,
SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY,
KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AT, BE, BG,
CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE,
IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

添付公開書類:
— 国際調査報告書

(54) Title: AEROSOL SUCTION DEVICE, AND ITS SUCKING METHOD

(54) 発明の名称: エアロゾル吸引器及びその吸引方法

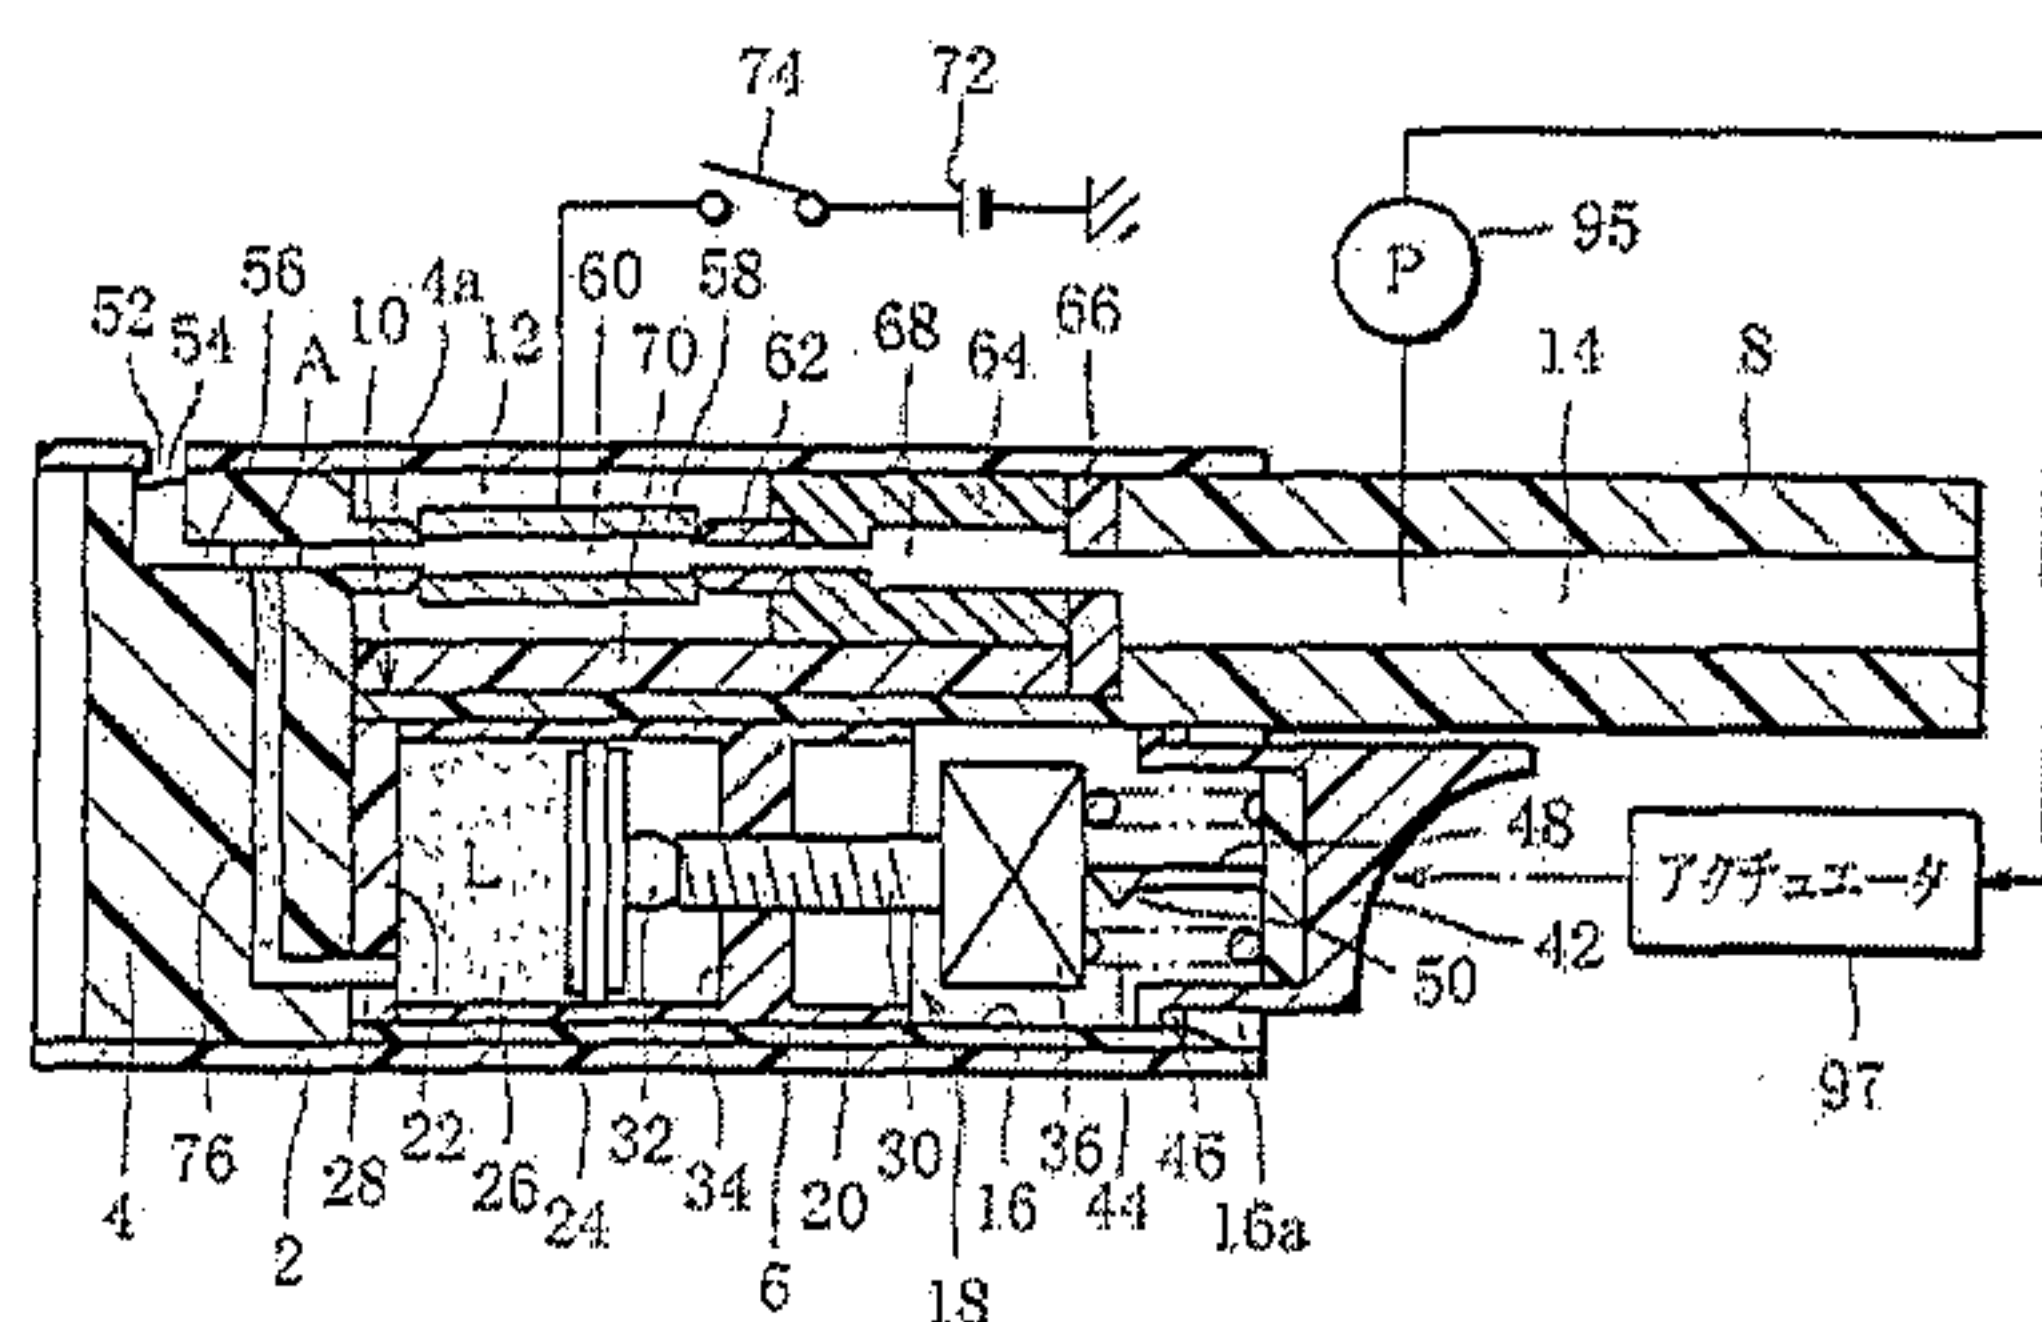

97 ACTUATOR

(57) Abstract: Provided is an aerosol suction device comprising a casing (2) having a mouthpiece (8) and a fresh air inlet (52), production passages (56, 60 and 68) extending from the fresh air inlet (52) to the mouthpiece (8), a syringe pump (18) housed in the casing (2) for feeding a predetermined quantity of solution to a distribution position (A) of the production passages, and a tubular heater (58) disposed downstream of the distribution position (A) and forming part of the production passages. When the user executes the sucking action through the mouthpiece (8), the solution at the distribution position (A) is transferred from the distribution position (A) into and atomized in the heater (58), and is then condensed into an aerosol in the sucked air so that the aerosol is sucked together with the sucked air by the user.

(57) 要約: エアロゾル吸引器は、マウスピース (8) 及び外気導入口 (52) を有するケーシング (2) と、外気導入口 (52) からマウスピース (8) まで延びる発生流路 (56, 60, 68) と、ケーシング (2) 内に收容され、発生流路の分配位置 (A) に一定量の溶液を供給するシリンジポンプ (18) と、分配位置 (A) よりも下流に設けられ、発生流路の一部を形成する管状のヒータ (58) とを備え、ユーザがマウスピース (8) を通じて吸引動作を実行したとき、分配位置 (A) の溶液は分配位置 (A) からヒータ (58) 内に移送され、ヒータ (58) 内にて霧化して後、吸引空気中にて凝縮してエアロゾルとなり、このエアロゾルは吸引空気とともにユーザに吸引される。

WO 2008/015918 A1

- 1 -

DESCRIPTION**AEROSOL ASPIRATOR AND AEROSOL SUCKING METHOD****5 Technical Field**

 This invention relates to an aerosol aspirator and an aerosol sucking method for providing medicaments, refreshing/relaxing materials or the like to a user in aerosol form.

10

Background Art

 An aerosol aspirator of this type is disclosed in Patent Document 1, for example. The aspirator in Patent Document 1 includes a supply device supplying a material in liquid form, a capillary tube with an open end to be filled with the material supplied by the supply device, a mouthpiece arranged adjacent to the open end of the capillary tube, and a heater arranged to surround the open end of the capillary tube. The heater heats, thereby evaporating the material in the capillary tube, so that the material in vapor form spurts out through the open end of the capillary tube.

 The user's sucking on the mouthpiece causes contact between the material in vapor form and sucked air, so that the material in vapor form condenses and forms an aerosol, and the aerosol thus formed is drawn into the user's mouth with air.

Patent Document 1: Japanese Patent KOHYO Publication 2000-510763 (WO 97/42993)

30

Disclosure of the Invention**Problem to be solved by the Invention**

 In the aspirator of Patent Document 1, in order that

- 2 -

the user's sucking action can quickly cause aerosol formation, it is required that the heater of the sucking apparatus have been raised to a predetermined temperature in advance. This however causes evaporation of the material in the capillary tube. Thus, in practice, after the user's sucking action is detected, the heater is raised to the predetermined temperature, and after that, a fixed amount of the material is supplied by the supply device to the capillary tube.

10 Thus, in the aspirator of Patent Document 1, there is a time lag between the user's staring sucking action and the user's actually sucking the aerosol, which time lag causes the user to feel uncomfortable.

15 Further, when the heating of the material by the heater is stopped, the heater temperature does not drop quickly, so that the material in vapor form continues spurting out through the capillary tube. This prevents the user's sucking a constant amount of aerosol with each sucking action.

20 An object of the present invention is to provide an aerosol aspirator and method of sucking aerosol which allow the user to suck an aerosol with high responsiveness to the user's sucking action, and which can improve aerosol delivery efficiency and the constancy of the aerosol quantity sucked by the user.

Means for solving the Problem

30 In order to achieve the above object, an aerosol aspirator according to the present invention comprises a casing with a mouthpiece, the casing including an outside air inlet open at an outer surface thereof; and a generation device disposed within the casing, for generating an aerosol, the generation device including an

aerosol generation passage extending from the outside air inlet to the mouthpiece and having a distributing position and an atomizing surface in a middle part thereof, a supply pump having a solution chamber holding a solution to be turned into an aerosol, for delivering the solution from the solution chamber to the distributing position in a fixed amount each time the supply pump is activated, and an atomizing gadget for atomizing the solution delivered to the distributing position at the atomizing surface, and wherein the aerosol
10 generation passage is a tubular passage. In this case the atomizing gadget includes a heater located downstream of the distributing position and upstream of the mouthpiece, the heater having a heating surface serving as the atomizing surface.

It is desirable that the heater be tubular in shape and forms a part of the generation passage.

In this aerosol aspirator, first a fixed amount of a solution is delivered to the distributing position in the aerosol generation passage. When the user's sucking action, namely the user's sucking at the mouthpiece draws air in the aerosol generation passage, the solution that has been
20 delivered to the distributing position is atomized, namely turned into an aerosol at the atomizing surface. The aerosol thus generated is sucked with the air flow by the user through the mouthpiece.

Here, the fixed amount of the solution that has been delivered to the distributing position is atomized simultaneously with or immediately after the user's sucking action. Thus, the aerosol is generated without a time lag relative to the user's sucking action. In other words, the aerosol aspirator of the present invention can generate the

aerosol with high responsiveness to the user's sucking action. Further, the solution is delivered to the distributing position in a fixed amount. Thus, the aerosol aspirator of the present invention can generate a fixed amount of aerosol with each sucking action, thereby ensuring the constancy of the aerosol quantity sucked by the user.

10 The supply pump may be a syringe pump. In this case, the generation device further includes a liquid passage connecting the syringe pump and the generation passage at the distributing position so that the generation passage is closed with the solution delivered by the syringe pump to the distributing position.


The aspirator may further comprise a switch for activating the heater prior to activating the syringe pump. In this case, the generation device may further include a push button manually operated to activate the syringe pump. Alternatively, the generation device may include an actuator for activating the syringe pump, and a sucking
20 sensing sensor for sensing sucking of air in the generation passage by means of the mouthpiece and activating the actuator.

The distributing position may be defined on the atomizing surface of the atomizing gadget. In this case, the generation device further includes an absorbing member fitted to a discharge port of the supply pump, for temporarily absorbing the solution discharged from the solution chamber, the discharge port being apart from the solution chamber by a predetermined distance, and

4a

delivering means for delivering the solution held in the absorbing member to the distributing position on the atomizing surface.

Specifically, the atomizing surface may be formed of a heating surface of a planar heater or a vibrating surface of an ultrasonic vibrator, where the delivering means

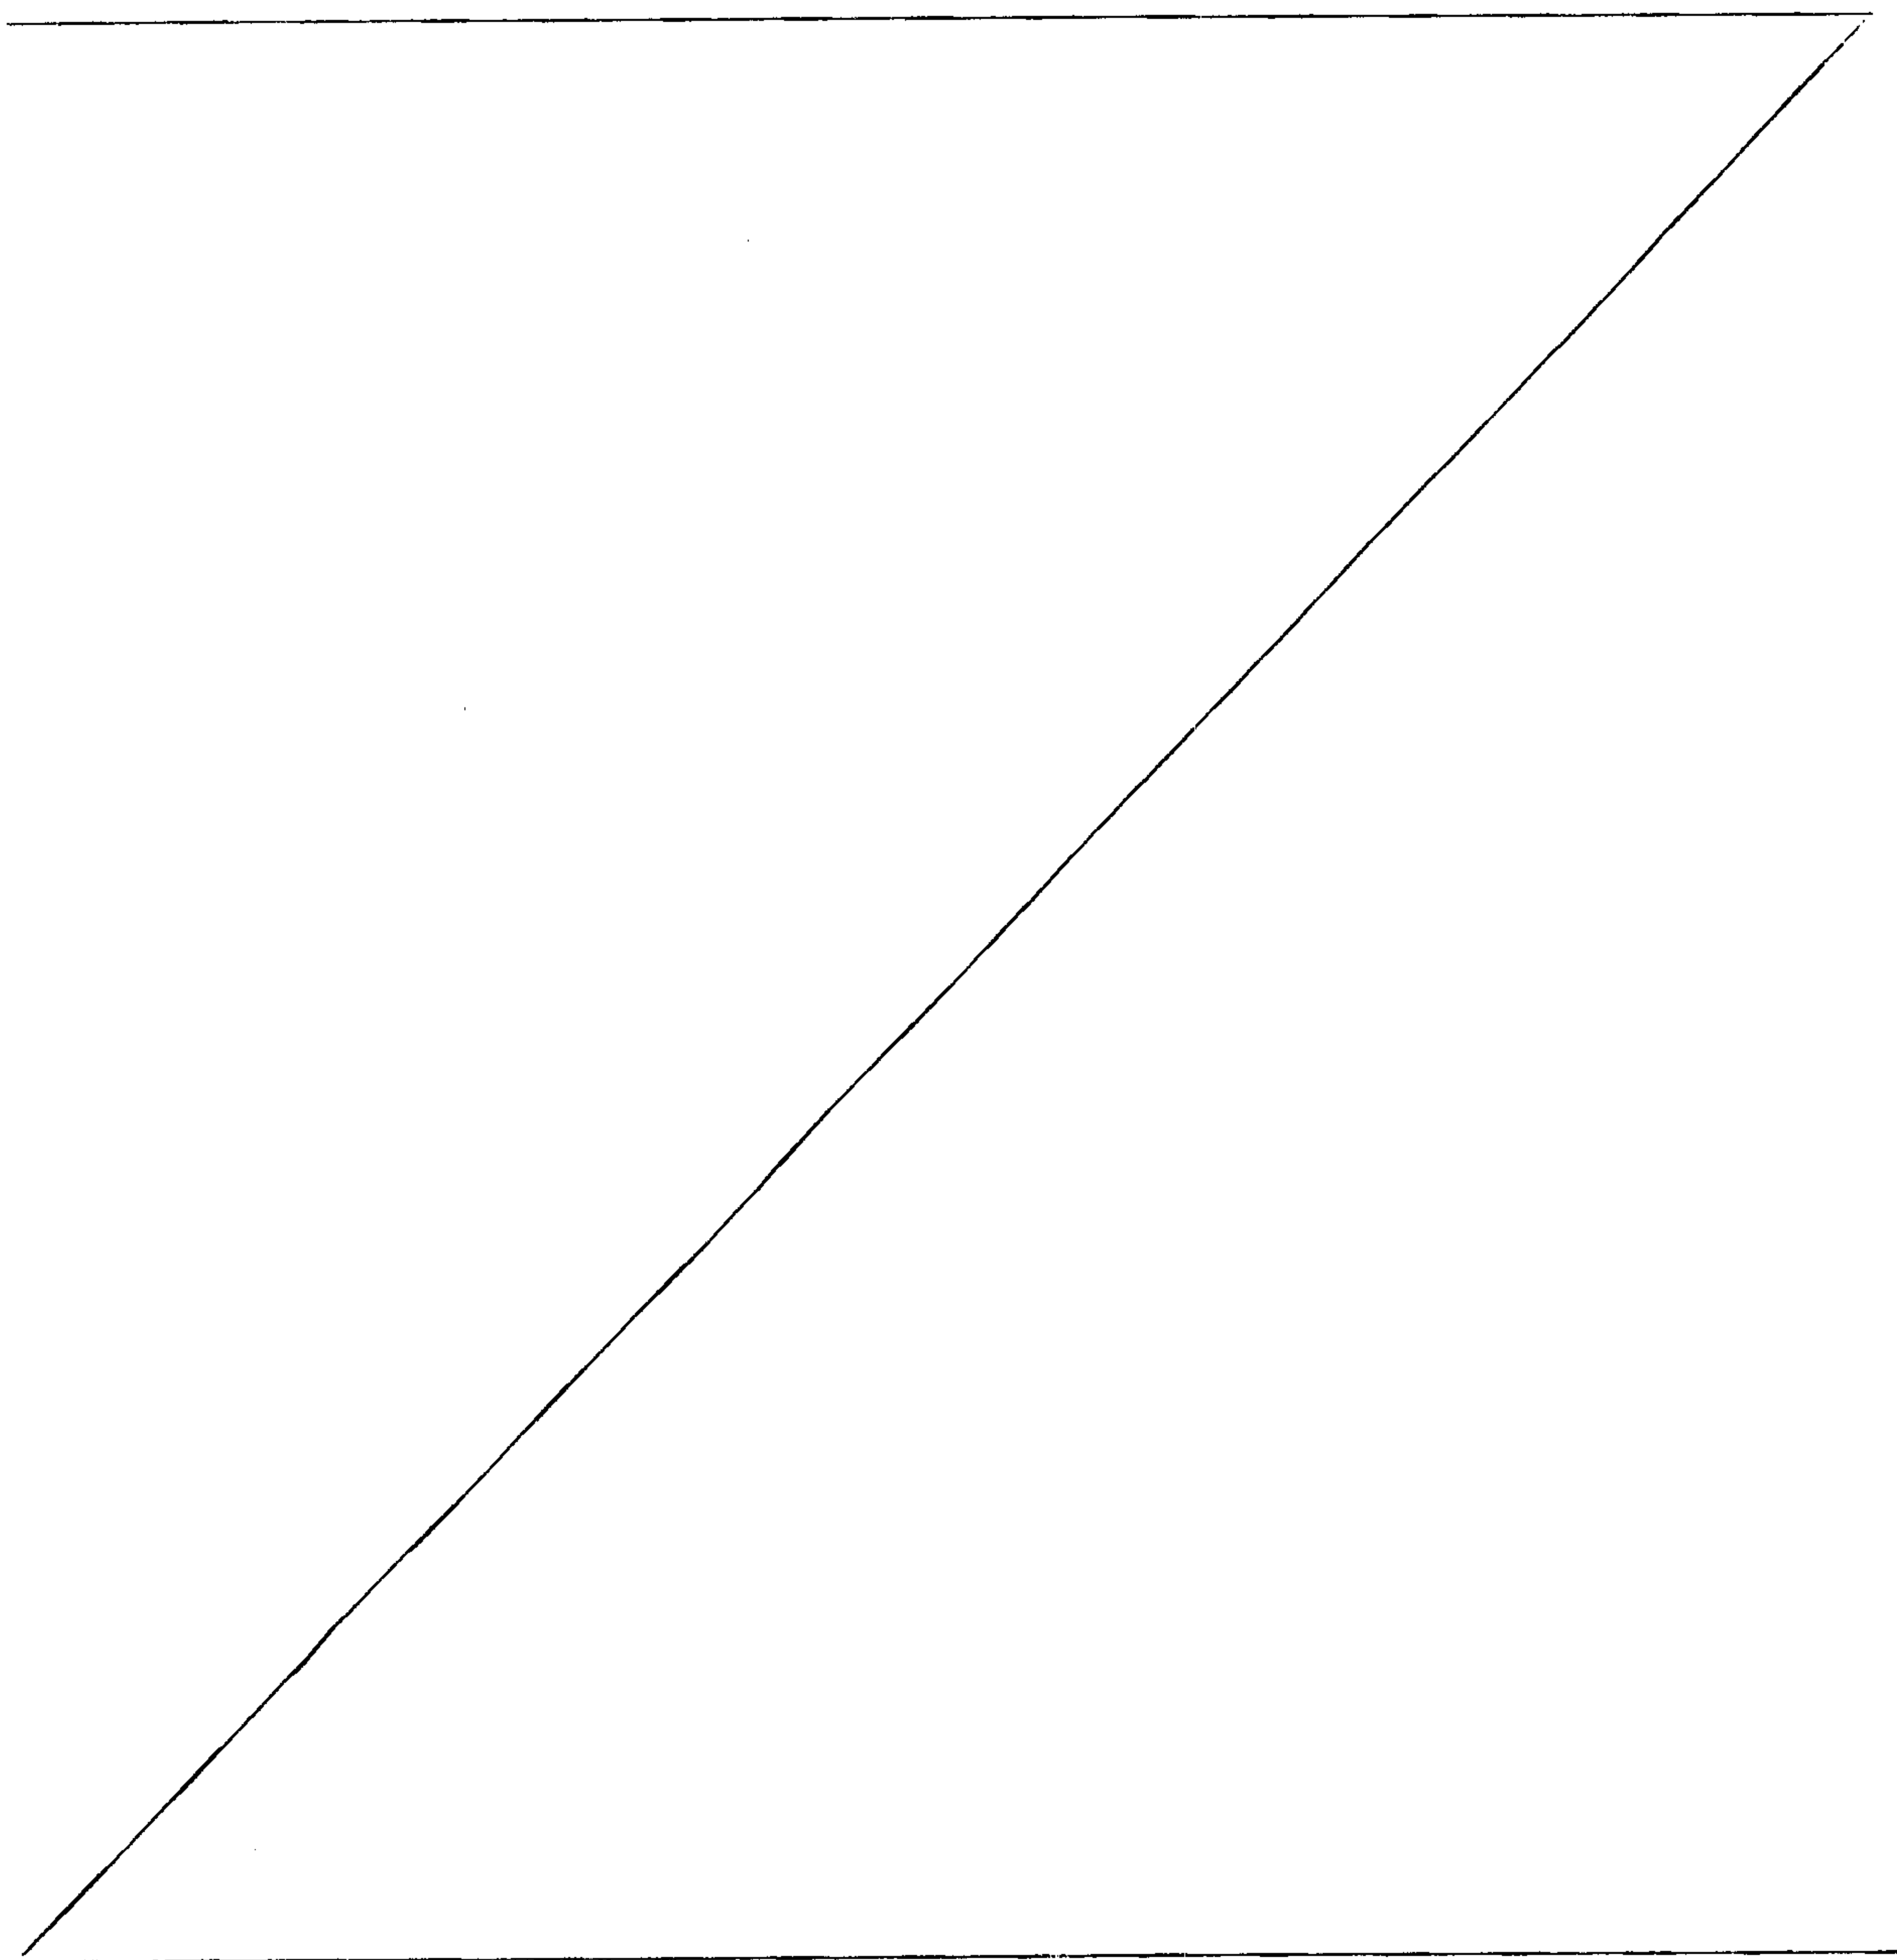

- 5 -

includes a drive means for advancing and withdrawing the adsorbing member together with the supply pump toward and from the atomizing surface so that the solution is transferred from the absorbing member onto the atomizing surface.

Also in this type of aerosol aspirator, the supply pump may be a syringe pump, and a switch as described above may be provided. As in the first-mentioned type of aerosol aspirator, the generation device may include a manually-operated push button, or alternatively, an actuator for the drive means and a sucking sensing sensor.

When the atomizing gadget includes a heater, the aspirator may further include a control device for controlling operation of the supply pump and the heater such that when air in the generation passage is sucked by means of the mouthpiece, an aerosol obtained by atomizing the solution is produced in the sucked air. Specifically, the control device includes a sucking sensing sensor for sensing the user's sucking action and emitting a sensing signal.

It is desirable that the aerosol aspirator further comprise a power source shared by the supply pump, the heater and the control device, a power switch associated with the power source, and an indicator for indicating the state of at least one of the supply pump, the heater and the power source.

The control device may include a temperature control process in which the heater is activated when the power switch is put in an "ON" position. This temperature control process has a preheating mode of maintaining the heater at a predetermined preheating temperature, and an atomizing heating mode of raising the heater to an atomizing heating temperature higher than the preheating

temperature, required to atomize the solution, the atomizing heating mode being initiated when the sensing signal is emitted.

The present invention also provides an aerosol aspirator comprising:

a casing with a mouthpiece, said casing including an outside air inlet open at an outer surface thereof,

a generation device disposed within said casing for generating an aerosol, said generation device including:

10 an aerosol generation passage extending from the outside air inlet to the mouthpiece and having a distributing position and an atomizing surface in a middle part thereof,

a supply pump having a solution chamber holding a solution to be turned into an aerosol, for delivering the solution from the solution chamber to the distributing position in a fixed amount each time the supply pump is activated, and

an atomizing gadget for atomizing the solution delivered to the distributing position at the atomizing surface,

20 wherein the distributing position is defined on the atomizing surface of the atomizing gadget, and said generation device further includes an absorbing member fitted to a discharge port of the supply pump, for temporarily absorbing the solution discharged from the solution chamber, the discharge port being apart from the distributing position by a predetermined distance, and

delivering means for delivering the solution held in the absorbing member to the distributing position on the atomizing surface, and

the atomizing surface is formed of a heating surface of a planar heater or a vibrating surface of an ultrasonic vibrator, and

the delivering means includes a drive means for advancing and withdrawing the adsorbing member together with the supply pump toward and from the atomizing surface so that the solution is transferred from the absorbing member onto the atomizing surface.

6a

The present invention also provides an aerosol aspirator comprising:

a casing with a mouthpiece, said casing including an outside air inlet open at an outer surface thereof,

a generation device disposed within said casing for generating an aerosol, said generation device including:

an aerosol generation passage extending from the outside air inlet to the mouthpiece and having a distributing position and an atomizing surface in a middle part thereof,

10 a supply pump having a solution chamber holding a solution to be turned into an aerosol, for delivering the solution from the solution chamber to the distributing position in a fixed amount each time the supply pump is activated, and

an atomizing gadget for atomizing the solution delivered to the distributing position at the atomizing surface,

wherein the atomizing gadget includes a heater for atomizing the solution delivered to the distributing position, by heating, and

the aspirator further comprises a control device for controlling operation of the supply pump and the heater such that when air in the generation passage is sucked by means of the mouthpiece, an aerosol obtained by atomizing the solution is produced in the sucked air, and

20 said control device includes a sucking sensing sensor for sensing the sucking of air and emitting a sensing signal,

said control device includes a temperature control process for activating the heater when the power switch is put in an "ON" position, and

said temperature control process has a preheating mode for maintaining the heater at a predetermined preheating temperature, and an atomizing heating mode for raising the heater to an atomizing heating temperature higher than the preheating temperature, required to atomize the solution, the atomizing heating mode being initiated when the sensing signal is emitted,

6b

said control device further includes a liquid supply switch manually operated to activate the heater, and the preheating mode includes a first stage of heating the heater to a temperature lower than the preheating temperature and maintaining it at this lower temperature until the liquid supply switch is put in an "ON" position, and a second stage of heating the heater to the preheating temperature and maintaining it at the preheating temperature after the liquid supply switch has been put in the "ON" position.

Brief Description of the Drawings

10

FIG. 1 illustrates a cross-sectional view showing an aerosol aspirator according to a first embodiment.

FIG. 2 illustrates a diagram showing a rotating cam of FIG. 1 in an inactive position, with its development form.

FIG. 3 illustrates a diagram showing the rotating cam of FIG. 2 in an active position.

FIG. 4 illustrates a cross-sectional view showing an aerosol aspirator according to a second embodiment.

FIG. 5 illustrates a cross-sectional view showing an aerosol aspirator according to a third embodiment.

20

FIG. 6 illustrates a diagram showing a syringe pump on an enlarged scale.

FIG. 7 illustrates a diagram schematically showing the configuration of a control device of FIG. 5 and input/output thereof.


FIG. 8 illustrates a graph showing solution delivery timing and a temperature control process of the heater, performed by the control device of FIG. 5.

FIG. 9 illustrates a diagram for explaining control of current supply to a heater.

6c

FIG. 10 illustrates a diagram for explaining the function of the control unit of FIG. 7 further in detail.

FIG. 11 illustrates a graph showing a variant of the temperature control process and solution delivery timing.

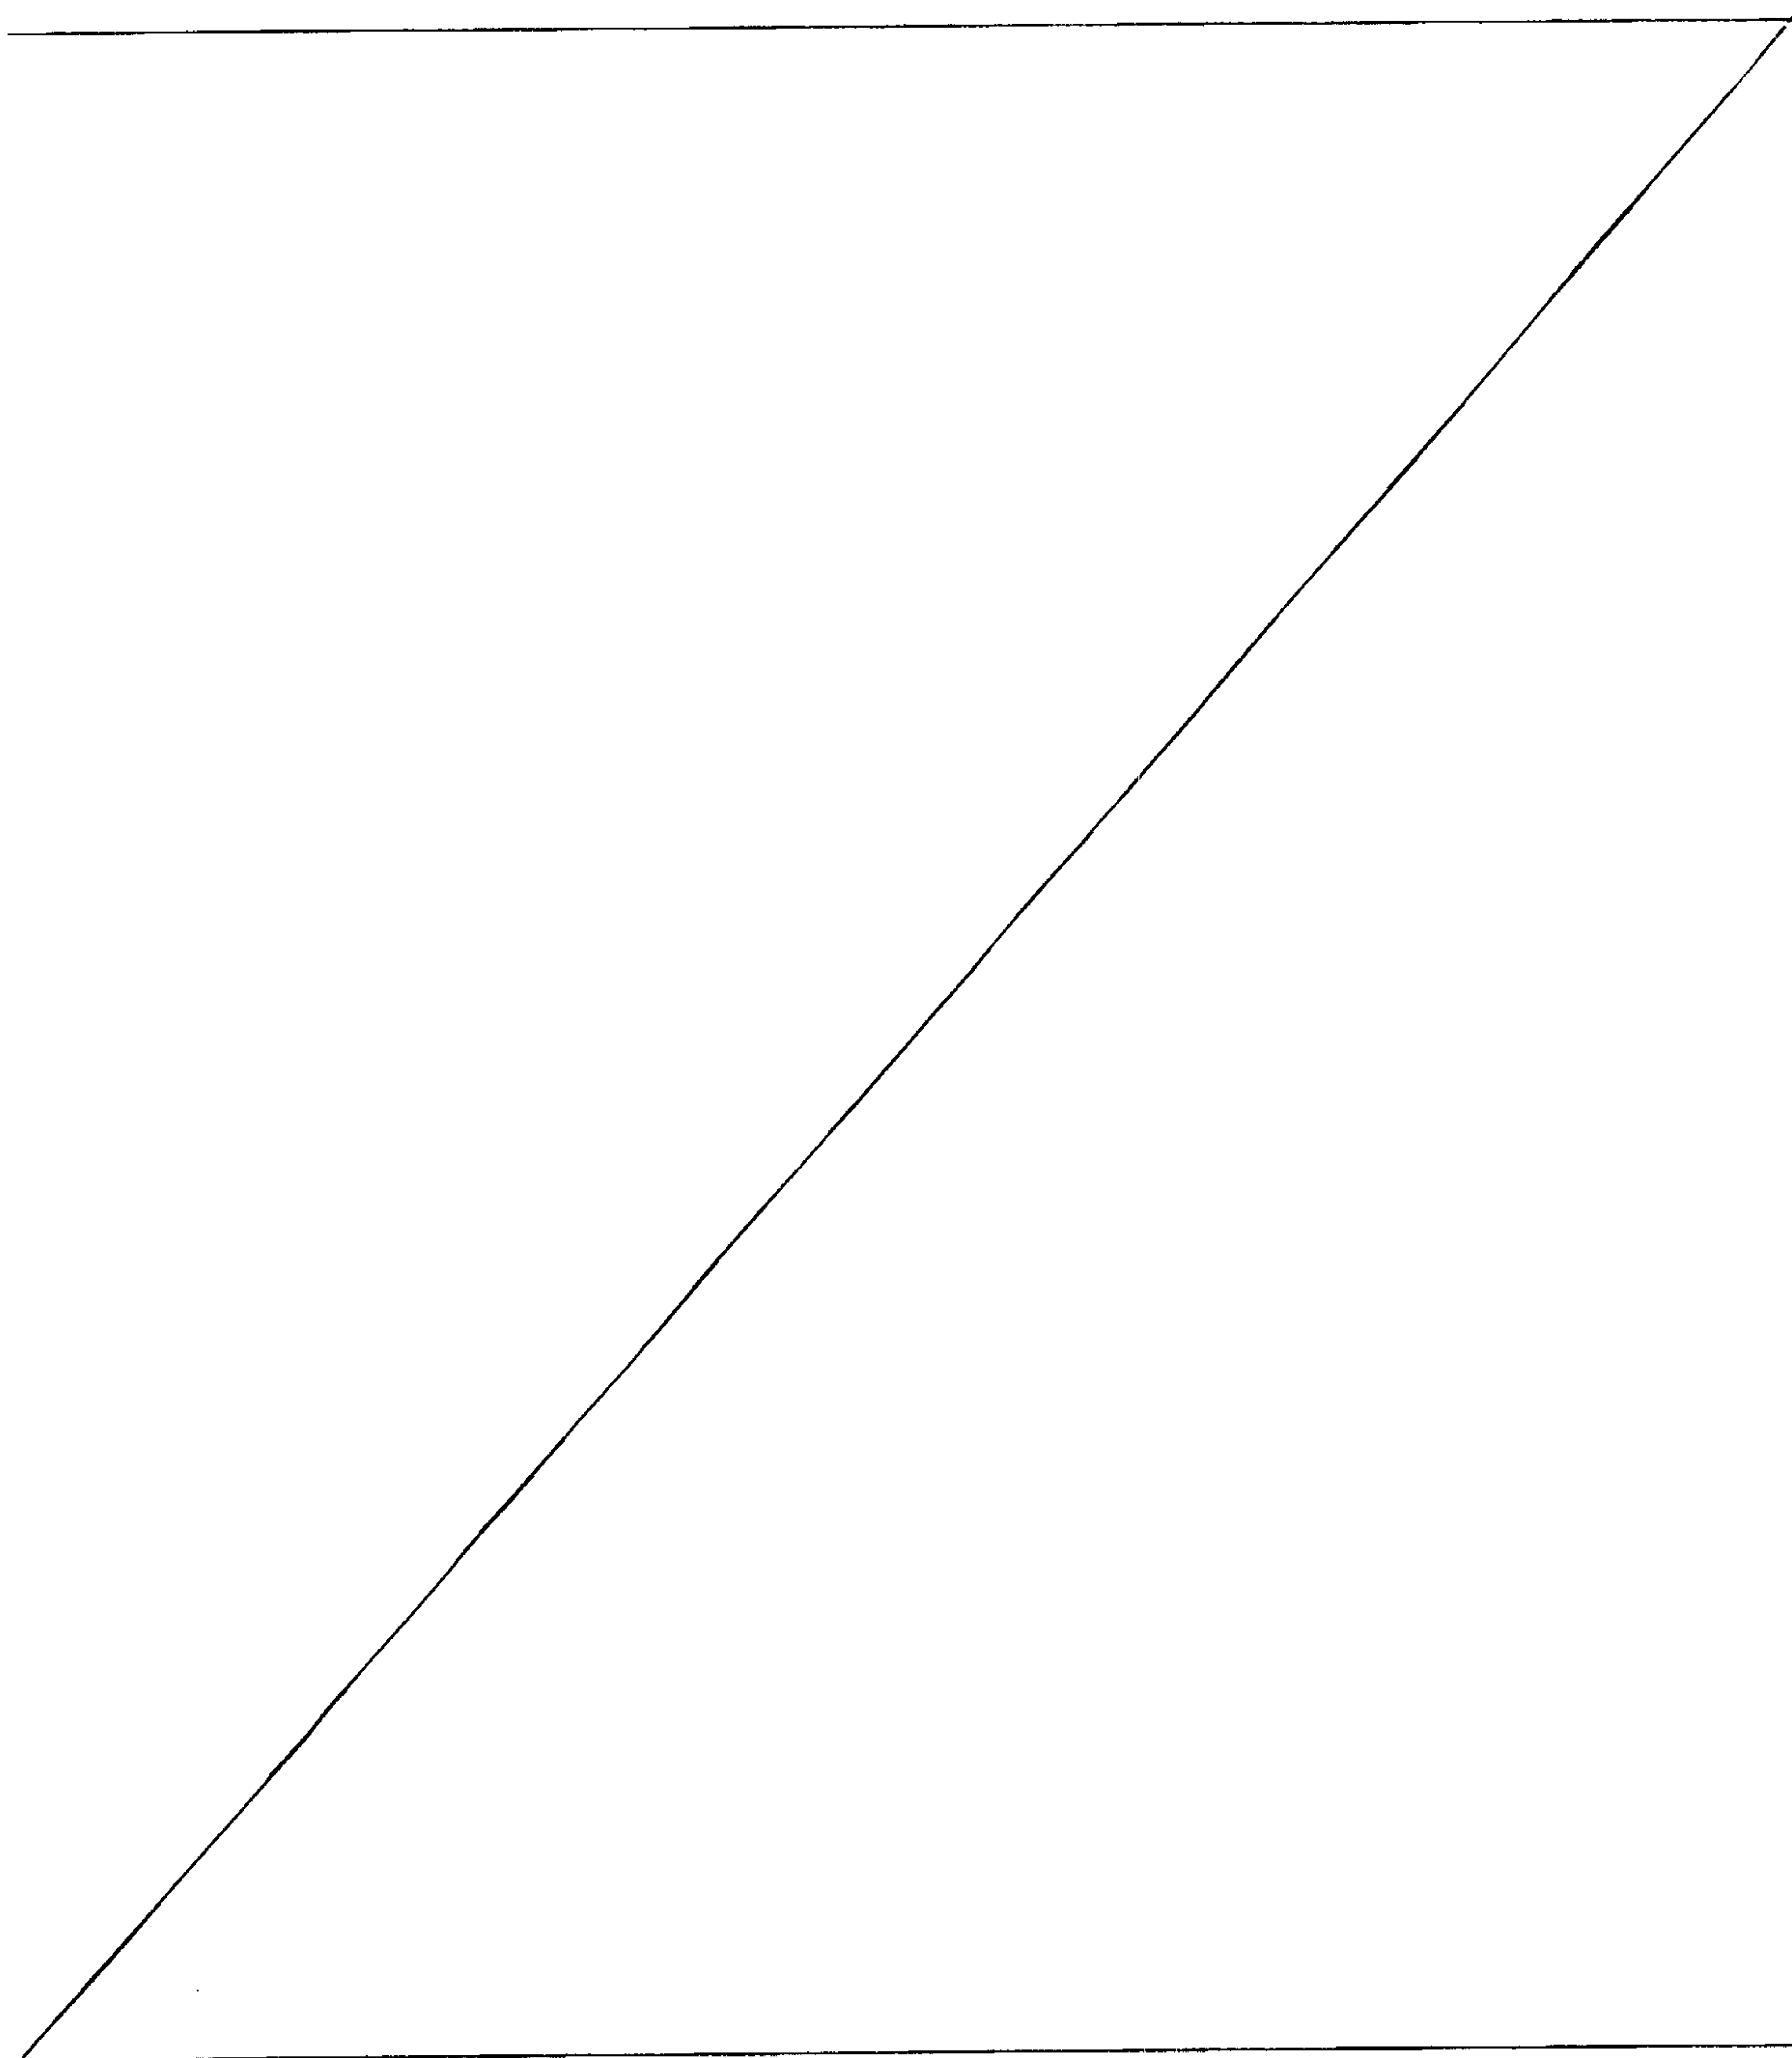

- 7 -

FIG. 12 illustrates a graph showing another variant of the temperature control process and solution supply timing.

Best Mode of Carrying out the Invention

5 FIG. 1 shows an aspirator according to a first embodiment.

 The aspirator of FIG. 1 includes a casing 2. The casing 2 has a hollow tubular shape and opens at each end. One open end of the casing 2 is closed with an end wall 4.
10 A cylinder block 6 is fitted within the casing 2. The cylinder block 6 has a bottom at one end thereof, which is in contact with the end wall 4, and an integrally-formed tubular mouthpiece 8 at the other end. The mouthpiece 8 projects outward through the other open end of the casing 2.

15 The cylinder block 6 has a recess 10 in the outer circumferential surface thereof. The recess 10 extends from the bottom of the cylinder block 6 toward the mouthpiece 8. The recess 10 defines a heater chamber 12, together with the inner circumferential surface of the
20 casing 2. The heater chamber 12 communicates with an internal passage 14 of the mouthpiece 8.

 The cylinder block 6 has further a cylinder bore 16. The cylinder bore 16 extends through the cylinder block 6, in the axial direction of the casing 2, parallel to the
25 heater chamber 12. Thus, the cylinder bore 16 has an open end 16a on the other side, or mouthpiece 8 side of the cylinder block 6.

 Within the cylinder bore 16, a manually-operated syringe pump 18 is removably accommodated. The syringe
30 pump 18 includes a hollow outer tube 20. The outer tube 20 has a closure wall 22 at one end thereof. The closure wall 22 is in contact with the end wall 4 of the casing 2. A piston 24 is fitted within the outer tube 20. The piston

- 8 -

24 has a piston ring. The piston 24 divides the interior of the outer tube 20 into two chambers, of which one is a pump chamber 26 defined between one end face of the piston 24 and the closure wall 22, and the other is a rod chamber. 5 The pump chamber 26 communicates with a discharge port 28. The discharge port 28 is formed in the closure wall 22.

The pump chamber 26 is used as a solution chamber, and charged with a solution L in advance. The solution L is a medicament, a refreshing/relaxing material or the like 10 which is to be turned into an aerosol. When the solution L is a refreshing/relaxing material, it can contain constituents of tobacco, for example.

Within the rod chamber of the outer tube 20, a screw rod 30 is arranged. The screw rod 30 is connected to the 15 piston 24 by a ball joint 32 at one end thereof, and extends coaxially with the outer tube 20. The rod chamber of the outer tube 20 is divided by a partition wall 34. The partition wall 34 has a threaded hole coaxial with the outer tube 20. The threaded hole extends through the 20 partition wall 34. Thus, the screw rod 30 extends through the partition wall 34, meshing with the threaded hole. Incidentally, the partition wall 34 is formed integrally with the outer tube 20.

The screw rod 30 has an end projecting beyond the 25 other end of the outer tube 20, and this projecting end is connected with a rotating cam 36. The rotating cam 36 is arranged within the cylinder bore 16, and can rotate integrally with the screw rod 30, allowing axial movement of the screw rod 30. Specifically, the rotating cam 36 and 30 the screw rod 30 are spline-connected.

As shown in FIG. 2, the rotating cam 36 has two rows of teeth on its circumferential surface, where the teeth in each rows are distributed all over the circumference of the

- 9 -

rotating cam 36 and the two tooth rows are apart from each other in the axial direction of the rotating cam 36. One of the two tooth row includes cam teeth 38, while the other includes cam teeth 40. The pitch between the adjacent two
5 cam teeth 38 is equal to the pitch between the adjacent two cam teeth 40. As clear from FIG. 2, however, the position of each cam tooth 38 is half the pitch displaced from the position of each cam tooth 40 in the circumferential direction of the rotating cam 36.

10 Each cam tooth 38 is triangular in shape with two sides projecting toward the cam tooth 40. One of these two sides, specifically an upper one of the two sides viewed in FIG. 2 forms a cam face 38a. The cam face 38a is inclined relative to the axial direction of the rotating cam 36.

15 Each cam tooth 40 is also triangular in shape with two sides projecting toward the cam tooth 38. One of these two sides of the cam tooth 40 forms a cam face 40b. The cam face 40b is inclined relative to the axial direction of the rotating cam 36, oppositely to the cam face 38a to be at
20 right angles to the cam face 38a.

The cam faces 38a and 40b are displaced from each other in the radial direction of the rotating cam 36. More specifically, the cam face 38a is located at the radially outer side of the cam face 40a.

25 A proximal end of a push button 42 is slidably fitted in the open end 16a of the cylinder bore 16. The push button 42 extends from the cylinder bore 16 outward, beneath the mouthpiece 8. A return spring 44 is arranged between the push button 42 and the rotating cam 44. The
30 return spring 44 is a compression coil spring. The return spring 44 exerts on the push button 42 such force that tends to cause the push button 42 to project through the open end 16a outward, so that the proximal end of the push

- 10 -

button 42 is pressed against a stopper ring 46. The stopper ring 46 is fixed at the open end 16a.

The push button 42 has a push rod 48. The push rod 48 extends from the push button 42 toward the rotating cam 36.

5 A pusher 50 is attached to the distal end of the push rod 48. The pusher 50 is triangular in shape with two pusher faces 50a, 50b. The pusher faces 50a, 50b are inclined oppositely relative to the axial direction of the rotating cam 36, and able to engage the cam face 38a of the cam

10 tooth 38 and the cam face 40b of the cam tooth 40, respectively.

More specifically, when the push button 42 is depressed from a rest position shown in FIG. 1 further into the cylinder bore 16 against the force exerted by the

15 return spring 44, the pusher 50 of the pusher rod 48 moves from the position shown in FIG. 2, passing between two adjacent cam teeth 40, so that the pusher face 50a comes into contact with the cam face 38a of a cam tooth 38 as shown in FIG. 3 and pushes the rotating cam 36 to the left

20 side in FIG. 3. At this time, since the pusher face 50a and the cam face 38a are both inclined relative to the axial direction of the rotating cam 16, the pusher 50's pushing force produces a component thereof which tends to cause the rotating cam 36 to rotate in one direction.

25 Consequently, the rotating cam 36 rotates about the axis thereof in one direction by a predetermined angle.

Then, when the push button 42 is released, the push button 42 with the push rod 48 returns to the rest position by the force exerted by the return spring 44, so that the

30 pusher face 50b of the pusher 50 comes into contact with the cam face 40b of a posterior one 40 of the aforementioned two cam teeth 40 viewed in the direction of rotation of the rotating cam 36 and pushes this cam face

- 11 -

40b, thereby causing the rotating cam 36 to further rotate about the axis in the same direction by a predetermined angle. The push rod 48 then returns to the position shown in FIG. 2.

5 As clear from the above description, each time the push button 42 is depressed and released, the rotating cam 36 is rotated in the same direction by a predetermined angle. Since the rotating cam 36 is connected with the screw rod 30, the screw rod 30 intermittently rotates with
10 the rotating cam 36. Since the screw rod 30 meshes with the threaded hole in the dividing wall 34, the screw rod 30 advances a predetermined distance toward the piston 24, thereby forcing the piston 24 into the pump chamber 26, each time the screw rod 30 rotates. Consequently, the
15 solution L in the pump chamber 26 is discharged through the discharge port 28 of the syringe pump 18 in a fixed amount each time.

 The casing 2 has an outside air inlet 52 open at its outer surface. The outside air inlet 52 is located near
20 the one end of the casing 2. The outside air inlet 52 is connected to the internal passage of the mouthpiece 8 by an aerosol generation passage. Next, this generation passage will be described in detail.

 The generation passage includes an introduction
25 passage 56 formed in the end wall 4 of the casing 2. The introduction passage 56 has an L shape and extends from the outside air inlet 52 to the heater chamber 12. As necessary, a check valve 54 is inserted in the introduction passage 54. In the present embodiment, the check valve 54
30 is a reed valve located near the outside air inlet 52, which allows only flow of outside air from the outside air inlet 52 into the introduction passage 56 and blocks air's flowing out of the introduction passage 56 through the

- 12 -

outside air inlet 52.

A tubular heater 58 is located within the heater chamber 12. The heater 58 has an internal heating passage 60. The heating passage 60 is connected to the
5 introduction passage 56 at one end thereof. Between the heater 58 and the mouthpiece 8, a joint 62, a connection pipe 64 and a connection ring 66 are disposed in this order, as viewed from the heater 58 side. These elements 62 to 66 define a connection passage 68 therein which connects the
10 heating passage 60 and the internal passage 14 of the mouthpiece 14. As clear from FIG. 1, the heating passage 60, the connection passage 68 and the internal passage 14 are linearly arranged.

More specifically, the connection pipe 64 is placed on
15 a spacer 70 which is located at the bottom of the heater chamber 12. The end wall 4 has a joint 4a integrally formed on its inner face and similar in shape to the joint 62. The joints 4a and 62 each have a taper end tapering toward the heater 58, and the heater 58 is held between the
20 taper ends of the joints 4a, 62 to be not in contact with the spacer 70. Thus, within the heater chamber 12, an annular space surrounding the heater 58 is provided. The introduction passage 56 extends through the joint 4a to communicate with the heating passage 60. The joint 4a may
25 be a separate member from the end wall 4.

The heater 58 is electrically connected to a power source 72 with a switch 74 between. The power source 72 is accommodated within the casing 2, while the switch 74 is mounted on the outer surface of the casing 2. Although the
30 heater 58 should desirably be a ceramic heater, it may be made of another chemical- and heat-resistant conductive material such as stainless steel.

From the generation passage, specifically from the

- 13 -

introduction passage 56 extends a liquid passage 76. The liquid passage 76 is formed in the end wall 4 of the casing 2 and connected to the discharge port 28 of the syringe pump 18.

5 Before the above-described aerosol aspirator is used first time, the solution L in the pump chamber 26 is delivered into the liquid passage 76 in a predetermined amount, so that the liquid passage 76 is filled with the solution L.

10 In this state, when the user puts the switch 74 in an "ON" position, the power source 72 supplies power to the heater 58, so that the heater 58 rises to a predetermined temperature. As long as the switch 74 is kept in the "ON" position, the heater 58 is maintained at the predetermined
15 heating temperature.

 In this state, when the user depresses the push button 42 and then releases it, the syringe pump 18 operates as described above, so that the solution L in the pump chamber 26 of the syringe pump 18 is delivered to the generation
20 passage, specifically the introduction passage 56, via the liquid passage 76, in a fixed amount.

 More specifically, the position at which the liquid passage 76 is connected to the introduction passage 56 defines a solution L distributing position A. The syringe
25 pump 18 delivers the solution L from the pump chamber 26 to the distributing position A in a fixed amount each time it is activated, and the solution L that has reached the distributing position A plugs the introduction passage 56 at the distributing position A.

30 Then, when the user sucks on the mouthpiece 8 to draw air in the generation passage to the mouthpiece, air downstream of the distributing position A within the generation passage flows toward the mouthpiece 8, since the

- 14 -

generation passage is closed at the distributing position. With this air flow, the solution L at the distributing position A instantaneously moves from the distributing position A toward the heater 58, so that all the delivered
5 solution enters the heating passage 60 of the heater 58, and outside air is drawn into the generation passage, specifically the introduction passage 56 through the outside air inlet 52.

Since the heater 58 has been raised to the
10 predetermined temperature as mentioned above, the solution L that has entered the heating passage 60 receives heat from the inner surface of the heater 58 and evaporates quickly. Upon contacting the air flow mentioned above, the vapor resulting from the solution L quickly condenses and
15 forms an aerosol. The aerosol formed is drawn into the user's mouth, through the internal passage 14 of the mouthpiece 8, with the air flow.

Thus, the user can draw the aerosol formed from the solution L into the mouth simultaneously with his/her
20 sucking on the mouthpiece 8. The amount of the aerosol generated is determined by the amount of the solution L delivered to the distributing position A, which means that a constant amount of aerosol is generated with each sucking action of the user. Thus, this aerosol aspirator can
25 generate an aerosol with high responsiveness to the user's sucking action and can ensure the constancy of aerosol generation quantity.

In the aspirator according to the first embodiment, the push button 42 and the rotating cam 36 may be replaced
30 with a linear or rotating actuator 97. The actuator 97 rotates the screw rod 30 of the syringe pump 18 in one direction by a predetermined angle at a time, thereby causing the solution L to be delivered from the syringe

- 15 -

pump 18 to the distributing position A in a fixed amount.

The aspirator according to the first embodiment can be adapted such that the actuator 97 is activated in association with the user's sucking action. In this case, as shown in FIG. 1, the aspirator has a sucking sensing sensor 95 in the generation passage or the internal passage 14 of the mouthpiece 8. When the user sucks on the mouthpiece 8, the sucking sensing sensor 8 detects a pressure drop in the generation passage or the internal passage 14, and supplies a detection signal to the actuator 97, thereby activating the actuator 97.

When the delivery of the solution L to the distributing position A is caused in association with the user's sucking action, the delivery of the solution L is completed in an early stage of the user's sucking action. This ensures that an aerosol is generated with sufficiently high responsiveness to the sucking action not to cause the user to feel uncomfortable.

In the aspirator according to the first embodiment, the push button 42 may be replaced with a linear actuator for rotating the rotating cam 36, and the heater 58 may be replaced with a planar heater. When the planar heater is used, the heater chamber 12 forms a part of the generation passage. Further, the aspirator according to the first embodiment may include a valve at the downstream end of the liquid passage 76, where the valve is opened in association with activating the syringe pump 18.

FIG. 4 shows an aerosol aspirator according to a second embodiment.

In the description of the second embodiment below, members and parts having the same function as those of the first embodiment are assigned the same reference characters, and the explanation of such parts and members are omitted.

- 16 -

The aerosol aspirator according to the second embodiment has a push-button mouthpiece 78 at an open end of the casing 2. This mouthpiece 78 functions as both the mouthpiece 8 and the push button 4 of the first embodiment.

5 The proximal end of the mouthpiece 78 is slidably fitted into the open end of the casing 2.

A syringe pump 18 has a closure wall 80, which substitutes the closure wall 22 of the first embodiment. The closure wall 80 is in the shape of a truncated cone
10 projecting toward the end wall 4 of the casing 2, and has a discharge port 28 at the tip end. A porous plug 82 is fitted in the discharge port 28. The plug 82 is made of a flexible sponge and projects from the closure wall 80 toward the end wall 4.

15 In the second embodiment, an outer cylinder 20 of the syringe pump 18 is fitted within the casing 2 and can reciprocate a predetermined distance in the axial direction of the casing 2. More specifically, an annular spring seat 86 is mounted to the inner circumferential surface of the
20 casing 2. The spring seat 86 is located near the closure wall 80 of the outer cylinder 20. A compression coil spring, or return spring 88 is arranged between the spring seat 86 and the closure wall 80. The return spring 88 presses the outer cylinder 20 toward the mouthpiece 78.
25 Here, the compression spring 88 is sufficiently stronger than the return spring 44 for the mouthpiece 78. The spring seat 86 has an end face facing the closure wall 80. An annular stopper 87 is attached to this end face of the spring seat 86. The stopper 87 restricts the movement of
30 the syringe pump 18 toward the end wall 4 of the casing 2.

The syringe pump 18 divides the interior of the casing 2 into an atomizing chamber 90 adjacent to the end wall 4 and a cam chamber 92 adjacent to the mouthpiece 78. The

- 17 -

rotating cam 36 as described above is arranged within the cam chamber 92. An axial passage 94 is formed in the circumferential wall of the outer cylinder 20. The axial passage 94 extends through the wall of the outer cylinder 20 to connect the atomizing chamber 90 and the cam chamber 92. A flexible tube 84 is arranged within the cam chamber 92. The tube 84 connects the axial passage 94 and the internal passage 14 of the mouthpiece 78. The tube 84 has a length enough to allow advancement and withdrawal of the mouthpiece 78 relative to the syringe pump 18 and reciprocation of the syringe pump 18, while maintaining the connection between the axial passage 94 and the internal passage 14. An outside air inlet 52 communicates with the atomizing chamber 90. Thus, in the second embodiment, the atomizing chamber 90, the axial passage 94 and the tube 84 forms an aerosol generation passage.

An atomizing plate 96 is located within the atomizing chamber 90. The atomizing plate 90 is mounted to the end wall 4 of the casing 2 by a plurality of supports 98. The atomizing plate 96 has a flat atomizing surface facing the closure wall 80 of the syringe pump 18. A distributing position A is defined on this atomizing surface.

Specifically, the atomizing plate 96 is formed of a planar heater or an ultrasonic vibrator, and the atomizing surface is a heating surface of the heater or a vibrating surface of the ultrasonic vibrator.

For the sake of simplicity, the description will be given on the assumption that the atomizing plate 96 is a heater plate.

When the syringe pump 18 is in a rest position shown in FIG. 4, the plug 82 is apart by a predetermined distance from the heater plate 96. This distance is slightly shorter than the distance that the syringe pump 18 moves

- 18 -

from the rest position until it hits against the stopper 87.

The heater plate 96 is electrically connected to a controller 93. The controller 93 is connected to the power source 72 with the switch 74 between, and to the sucking
5 sensing sensor 95. The controller 93, the power source 72 and the sucking sensing sensor 95 are accommodated within the casing 2.

As shown in FIG. 4, a linear actuator 99 is arranged within the cam chamber 92. The liner actuator 99 is
10 electrically connected to the controller 93. By receiving a command from the controller 93, the linear actuator 99 is activated to move the syringe pump 18 from the rest position shown in the drawing toward the heater plate 96.

In this aerosol aspirator according to the second
15 embodiment, when the user puts the switch 74 in an "ON" position, the controller 93 supplies power to the heater plate 96, thereby raising the heater plate 96 to a predetermined temperature.

Then, when the user depresses the mouthpiece 78 into
20 the casing 2 and then releases it, the push rod 48 and the rotating cam 36 work together in the same way as in the first embodiment to cause a fixed amount of the solution L to be discharged from the syringe pump 18 through the discharge port 28. The solution L discharged is absorbed
25 by the plug 82 and held within the plug 82.

As mentioned above, the return spring 44 on the mouthpiece 78 is weaker than the return spring 88. Thus, even when the mouthpiece 78 is depressed into the casing 2, the syringe pump 18 stays in the rest position shown in the
30 drawing.

Then, when the user sucks on the mouthpiece 78 and this sucking action is detected by the sucking sensing sensor 95, the sucking sensing sensor 95 supplies a

- 19 -

detection signal to the controller 93. Upon this, the controller 93 activates the linear actuator 99.

Consequently, the linear actuator 99 forces the syringe pump 18 forward through the partition wall 34, against the force exerted by the return spring 88, from the rest position toward the heater plate 96. During this movement of the syringe pump 18, the plug 82 butts the heater plate 96 before the syringe pump 18 hits against the stopper 87. Such butting causes compression of the plug 82, so that the solution L held by the plug 82 is squeezed out of the plug 82 onto the heater plate 96 (see a two-dot chain line in FIG. 4). In other words, the solution L in the fixed amount is transferred onto the heater plate 96 or the distributing position A.

Then, when the syringe pump 18 hits against the stopper 87 or the linear actuator 99 finishes a predetermined stroke, the controller 93 deactivates the linear actuator 99. Consequently, the syringe pump 18 is returned to the rest position shown in FIG. 4 by the force exerted by the return spring 88, so that the plug 82 separates from the heater plate 96.

As described above, the return spring 88, the controller 93 and the linear actuator 99 work together to distribute the solution L from the pump chamber 26 of the syringe pump 18 to the distributing position A in a fixed amount in each stroke.

Before the solution L is distributed to the position A, the heater plate has been raised to the predetermine temperature. Thus, when the solution L is distributed onto the heater plate 96, the solution evaporates quickly. Then, upon contacting the air flow in the atomizing chamber 90, the vapor resulting from the solution L is atomized, namely turns into an aerosol. Thus, the user can suck a fixed

- 20 -

amount of aerosol together with air immediately after starting the sucking action. In other words, also the aerosol aspirator according to the second embodiment ensures the constancy of aerosol sucking quantity and high
5 responsiveness.

It is to be noted that even if the heater plate 96 is always at the predetermined raised temperature, the plug 82 stays away from the heater plate by the predetermined distance 96 unless the user does the sucking action, so
10 that the solution L held within the plug 92 is prevented from evaporating by receiving heat from the heater plate 96. This contributes much to the constancy of aerosol generation quantity.

When the aerosol aspirator according to the second
15 embodiment uses, as the atomizing plate, an ultrasonic vibrating plate 96 in place of the heater plate, the ultrasonic vibrating plate 96 can turn the solution L into an aerosol directly, namely without evaporating it. Such ultrasonic vibrating plate 96 is particularly suited for
20 turning into an aerosol a solution that varies in qualities under rapid heating.

FIG. 5 shows an aerosol aspirator according to a third embodiment.

The aerosol aspirator of FIG. 5 includes a casing 102
25 made of synthetic resin. The casing 102 comprises, for example three casing parts, i.e., an upper casing part 102a, an intermediate casing part 102b and a lower casing part 102c.

A hollow mouthpiece 104 extends through a rear wall of
30 the upper casing part 102a backward, namely to the right side in FIG. 5. This mouthpiece 104 is detachably attached to the upper casing part 102b. Specifically, a support ring 106 is arranged within the upper casing part 102a to

- 21 -

be located adjacent to the rear wall. The mouthpiece 104 extends through the rear wall of the upper casing part 102a, with its inner end removably fitted into the support ring 106.

5 The upper casing part 2a has an outside air inlet 111 open at the upper surface, near the front end thereof. The outside air inlet 111 is connected to the inner end of the mouthpiece 104 by an aerosol generation passage 110. The aerosol generation passage 110 extends within the upper
10 casing part 102a. More specifically, in the third embodiment, a T-tube 112, a heater holder 114, a heater 116 and a heater holder 118, disposed in this order from the left side in FIG. 5, form the generation passage 110. The heater holder 114, the heater 116 and the heater holder 118
15 are tubular in shape and disposed coaxially with the mouthpiece 104. The heater holders 114, 118 have heat-resistant property.

 The T-tube 112 has first and second ends coaxial with the mouthpiece 104 and a third end connected to the outside
20 air inlet 111. The first end of the T-tube 112 is connected to the heater holder 116, and the second end of the T-tube 112 is closed. The internal passages of the heater holder 114, the heater 116 and the heater holder 118 are approximately equal in cross-sectional area to the
25 internal passage of the mouthpiece 104. A reed-valve type check valve (not shown) may be provided at the outside air inlet 111 to allow only an air flow from the outside air inlet 111 into the generation passage 110.

 The heater holders 114, 118 hold the heater 116 in a
30 manner pinching the heater 116 between them. The heater holder 114 is arranged within the upper casing part 102 by means of the support ring 120, while the heater holder 118 is inserted in the aforementioned support ring 106, thereby

- 22 -

connected to the mouthpiece 104.

Although in the third embodiment now being discussed, the heater 116 is a ceramic heater, it may be made of another chemical- and heat-resistant conductive material
5 such as stainless steel.

Preferably, the upper casing part 102a should include a lid (not shown) that can be opened and closed to allow the heater 116 to be removed from the upper casing part 102a.

10 The intermediate casing part 102b defines a rear chamber 122 and a front chamber 124 therein, where the rear chamber 122 and the front chamber 124 are separated by a partition wall. The rear chamber 122 extends between the aforementioned support rings 120 and 106.

15 Within the rear chamber 122, a support block 126 is arranged, and a syringe holder 128 is mounted on the support block 126. The syringe holder 128 is rectangular in cross section and extends parallel to the aforementioned generation passage 110. The syringe holder 128 has a
20 stepped cylinder bore defined therein. The cylinder bore is open at each end of the syringe holder 128.

A cartridge type syringe pump 130 is removably inserted in the syringe holder 128. A stopper sleeve 128a is fitted within the syringe holder 128, at its front end
25 thereof as viewed in the direction of inserting the syringe pump 130. Thus, when the syringe pump 130 is inserted in the syringe holder 128, the syringe pump 130 butts the stopper sleeve 28a.

FIG. 6 shows the syringe pump 130 in detail.

30 The syringe pump 130 includes an outer cylinder 132. A circular septum 136 is mounted on the front end of the cylinder 132 by means of an annular holder 134. A piston 138 is fitted into the cylinder 132. The piston 138 is

- 23 -

allowed to slide in the cylinder 132 but prevented from rotating about the axis thereof.

A pump chamber 140 is defined in the cylinder 132, between the piston 138 and the septum 136. The pump
5 chamber 140 is filled with a solution L of a type mentioned above. The piston 138 has a hollow drive rack 142. The drive rack 142 extends from the piston 138 toward the rear end of the outer cylinder 132, coaxially with the piston 138. The drive rack 142 has an end wall at the rear end
10 thereof. The end wall is formed as a nut, or in other words, the end wall of the drive rack 142 has a threaded hole, through which a screw rod 144 is screwed into the drive rack 142. The screw rod 144 meshes with the threaded hole, with a front end located within the drive rack 142
15 and a rear end outside the drive rack 142.

A gear 146 is mounted on the rear end of the screw rod 144. As shown in FIG. 5, when the syringe pump 130 is set within the syringe holder 128, the gear 146 meshes with a reduction gear 148 meshing with a drive gear 150. The
20 drive gear 150 is connected to a motor 152 as a drive source. The motor 152 can rotate normally and reversely and is mounted on the aforementioned support block 126. The motor 142 may be any of a step motor, a direct-current motor and a servomotor. The reduction gear 148 is
25 rotatably supported within the rear chamber 122.

As clear from FIG. 5, when the syringe pump 130 is set within the syringe holder 128, a hollow needle 154 is inserted into the pump chamber 140 of the syringe pump 130, through the septum 136. The needle 154 is supported by a
30 disc-shaped needle holder 156. The needle holder 156 is located within the rear chamber 122.

The needle 154 is connected to a liquid passage 158, and the liquid passage 158 is connected to the

- 24 -

aforementioned generation passage 110.

More specifically, the liquid passage 158 includes an internal passage extending in the heater holder 114, the support ring 120 and the upper and intermediate casing parts 102a, 102b, and a connection pipe extending within the rear chamber to connect the internal passage and the needle 154. The internal passage has an open end at a distributing position A defined on the inner surface of the heater holder 14.

Desirably, a lid (not shown) allowed to be opened and closed is provided at the back wall of the intermediate casing part 102b. With the lid opened, insertion of the syringe pump 130 into the syringe holder 128 and removal of the syringe pump 130 from the syringe holder 128 are possible.

A control device 160 is accommodated in the front chamber 124, and an electric cell 162 is accommodated in the aforementioned lower casing part 102c. For the electrical cell 162, a primary cell such as a fuel cell or a nickel-hydrogen cell, or a secondary cell such as a nickel-cadmium cell, a nickel-hydrogen cell or a lithium cell can be used. In the embodiment now being discussed, the electrical cell 162 is a lithium cell. The lower casing part 102c has an openable and closable lid (not shown), and with the lid opened, the cell 162 can be replaced.

By being set in the lower casing part 102c, the electrical cell 162 becomes electrically connected to the control device 160 via a connector 164, to serve as a power source for not only the control device 160 but also the aforementioned heater 116 and motor 152.

As shown in FIG. 7, the control device 160 includes a voltage stabilization circuit 166 and a control unit 168,

- 25 -

and the control unit 168 includes a microprocessor, memory, a peripheral, an input-output interface, etc., for example.

To the output of the control unit 168, the aforementioned heater 116, the motor 152 for the syringe pump 130, and an indicator 170 are electrically connected. The indicator 170 is, for example attached to the upper surface of the upper casing part 102a, near the mouthpiece 104.

To the input of the control unit 168, a power source switch 172 manually operated to allow or shut off the supply of power from the electrical cell 162, a liquid supply switch 174 to allow manual operation of the syringe pump 130, a sucking sensing sensor 176 to sense the user's sucking on the mouthpiece 104 that draws air in the generation passage to the mouthpiece, a cartridge sensing sensor 178 to sense insertion of the syringe pump 130 in the syringe holder 128, a temperature sensor 180 to detect temperature of the heater 116, etc. are electrically connected.

The power source switch 172 and the liquid supply switch 174 are disposed at the front wall as shown in FIG. 5, or a side wall. In the embodiment now being discussed, the sucking sensing sensor 176 is a pressure sensor disposed between the aforementioned heater holder 118 and the mouthpiece 104 to detect pressure in the generation passage 110.

As the sucking sensing sensor 176, a flow sensor to detect air flow in the generation passage 110 may be used in place of the pressure sensor. In this case, the aforementioned T-tube 112 has the second end open at the outer surface of the upper casing part 102a, and the flow sensor is disposed at this open second end.

The cartridge sensing sensor 178 is, for example a

- 26 -

limit switch and disposed on the stopper sleeve 128a of the syringe holder 128. The cartridge sensing sensor 178 is activated by the syringe pump 130 that has been inserted in the syringe holder 128. The temperature sensor 180 is
5 attached to the heater 116. A thermistor, a thermocouple or a platinum resistance wire can be used as the temperature sensor 180.

Alternatively, the control unit 168 may function as the temperature sensor 180. Specifically, the control unit
10 168 may estimate the temperature of the heater 116 from the power supplied to the heater 116.

The control unit 168 receives signals from the switches and sensors connected to its input, and controls heating of the heater 116 and operation of the syringe pump
15 130 on the basis of those signals. The control unit 168 further detects the operating state of at least one of the heater 116, the syringe pump 130 and the cell 162, and causes the indicator 170 to present the detection result. The indicator 170 will be described later.

20 Prior to describing the aerosol sucking method using the aspirator according to the third embodiment, preprocessing performed subsequent to insertion of the syringe pump 130 into the syringe holder 128, and postprocessing performed prior to replacement of the
25 syringe pump 130 will be described.

When a syringe pump 130 is inserted in the syringe holder 128 for the first time or a new syringe pump 130 is inserted in the syringe holder 128 to replace the old one 130, the aforementioned cartridge sensing sensor 178 senses
30 the insertion of the syringe pump 130 and supplies a sensing signal to the control unit 178, thereby causing the control unit 167 to perform preprocessing.

Specifically, the control unit 168 drives the motor

- 27 -

152 for the syringe pump 130 to rotate in one direction, thereby causing the gear 146 to rotate by a predetermined angle. Consequently, the piston 138 of the syringe pump 130 advances a predetermined distance in the direction
5 causing a reduction in volume of the pump chamber 140, namely toward the septum 138, thereby discharging the solution L from the pump chamber 140 of the syringe pump 130 into the liquid passage 158. The amount of the solution L discharged at this time corresponds to the
10 volume of the liquid passage 158, so that the liquid passage 15 is filled with the solution L. With this, the preprocessing is completed.

When the solution L in the syringe pump 130 decreases to a predetermined amount or below so that the syringe pump
15 130 requires replacement, the control unit 168 drives the motor 152 for the syringe pump 130 to rotate in the reverse direction, thereby causing the piston to withdraw. Such withdrawal of the piston 138 creates a negative pressure in the pump chamber 140. Consequently, the aforementioned
20 solution L filling the liquid passage 158 is all drawn back into the pump chamber 140, with which the postprocessing is completed.

As a result of the above-described postprocessing, the liquid passage 158 becomes empty. Thus, if the syringe
25 pump 130 is replaced with a new syringe pump holding a solution different from the solution L, mixing of the different solutions does not occur in the liquid passage 158.

Next, the basic operation of the aspirator according
30 to the third embodiment, or the basic aerosol sucking method will be described.

Prior to sucking on the mouthpiece 104, the user first puts the liquid supply switch 174 in an "ON" position.

- 28 -

Upon receiving an "ON" signal from the liquid supply switch 174, the control unit 168 causes the piston 138 of the syringe pump 130 to advance a predetermined distance. Consequently, a fixed amount of the solution L is delivered
5 from the pump chamber 140 of the syringe pump 130 to the distributing position A in the generation passage 110, and the solution L delivered plugs the generation passage 110 at the distributing position A.

Then, when the user sucks on the mouthpiece 104, air
10 in the generation passage 110 is drawn to the mouthpiece 104, and the solution L is transferred from the distributing position A into the heater 116, following the air drawn in. If, at this time, the heater 116 has reached the atomizing heating temperature, i.e., the temperature
15 enough to heat and atomize the solution L, all the solution L transferred into the heater 116 turns into an aerosol at once, and the aerosol thus formed is drawn into the user's mouth with the air flow.

The control unit 168 can control the temperature of
20 the heater 116, for example in a temperature control process shown in FIG. 8. Next, this temperature control process will be described.

Upon the user's putting the power switch 172 in the "ON" position, the control unit 168 starts supply of power
25 to the heater 16. While monitoring the heater 116 temperature on the basis of a detection signal from the temperature sensor 180, the control unit 168 quickly raises the heater 116 to a predetermined early preheating temperature T_a (150°C, for example) and maintains the
30 heater at this early preheating temperature T_a (first stage of a preheating mode).

Then, when the user puts the liquid supply switch 174 in the "ON" position with the intention to suck an aerosol

- 29 -

and an "ON" signal is supplied from the liquid supply switch 174 to the control unit 168, the control unit 168 drives the motor 152 for the syringe pump 130, thereby causing the piston 138 of the syringe pump 130 to advance a predetermined distance. Consequently, a fixed amount of the solution L is delivered to the distributing position A in the generation passage 110 from the pump chamber 140 of the syringe pump 130 via the liquid passage 158, and as mentioned above, the solution L delivered closes the generation passage 110 at the distributing position A.

At the same time as the solution L is delivered, the control unit 168 raises the heater 116 to a late preheating temperature T_b (185°C, for example) higher than the early preheating temperature T_a , on the basis of a detection signal from the temperature sensor 180, and maintains the heater at this late preheating temperature T_b (second stage of the preheating mode).

Then, when the user sucks on the mouthpiece 104, the user's sucking action is sensed by the sucking sensing sensor 176 and a sensing signal is supplied to the control unit 168. Upon receiving the sensing signal, the control unit 168 quickly raises the heater 116 from the late preheating temperature T_b to an atomizing heating temperature T_c (220°C, for example), on the basis of a detection signal from the temperature sensor 180 (atomizing heating mode). The atomizing heating temperature T_c is a temperature of the heater 116 enough to atomize the solution L, namely turn it into an aerosol.

Thus, when the user does sucking action, the solution L is transferred from the distributing position A toward the heater 116, simultaneously with which, the heater 116 is raised to the atomizing heating temperature T_c . Consequently, all the solution that has entered the heater

- 30 -

116 is atomized, namely turns into an aerosol, under heat from the heater 116, and the aerosol formed is drawn into the user's mouth through the mouthpiece 104 together with the air flow.

5 It is to be noted that when the heater 116 reaches the atomizing heating temperature T_c , the control unit 168 stops supply of power to the heater 116. After this, when a detection signal from the temperature sensor 180 indicates that the heater 116 has fallen to the early
10 preheating temperature T_a , the control unit 168 resumes supply of power to the heater 116 to maintain the heater 116 at the early preheating temperature T_a until the liquid supply switch 174 is put in the "ON" position next time (first stage of the preheating mode). The control unit 168
15 repeats the above-described temperature control.

 The above mentioned temperature control of the heater 116 is carried out by pulse-width modulation. As shown in FIG. 9, in the pulse-width modulation, duty cycle, namely the ratio of pulse "ON" time in which current is supplied
20 to the heater 116 to pulse period is modulated. Specifically, the duty ratio D_0 for the period from the time that the power switch 172 is put in the "ON" position until the heater 116 is raised to the early preheating temperature T_a is determined to be a maximum allowable for
25 the electrical cell 162. The duty ratios D_1 , D_2 for maintaining the heater 116 at the early and late preheating temperatures T_a , T_b , respectively, are each determined to be a minimum required for that. Further, the duty ratio D_3 for raising the heater 116 from the late preheating
30 temperature T_b to the atomizing heating temperature T_c is determined to be a maximum that does not cause a change in composition of the solution L. Such maximum value depends on the composition of the solution L.

- 31 -

The duty ratio D4 for raising the heater 116 from the early preheating temperature Ta to the late preheating temperature Tb may be determined to be equal to the duty ratio D3, for example.

5 As already clear from the above description, the heater 116 is raised to the late preheating temperature Tb before the user does sucking action. This reduces considerably the period of time between the user's starting sucking action and the heater 116 reaching the atomizing
10 heating temperature Tc, and therefore allows the solution L to form an aerosol in the air drawn by user simultaneously with the user's sucking action, thereby preventing the user from feeling uncomfortable due to a time lag before generation of the aerosol.

15 All the solution L delivered to the distributing position A in the generation passage 110 turns into the aerosol within the generation passage 110, specifically within the heater 116. Thus, the aerosol obtained from the solution L, together with the air drawn, is efficiently
20 sucked by the user, from the generation passage 110 through the mouthpiece 104. Consequently, the aerosol delivery rate does not depend on the volume of air sucked by the user and therefore is stable.

On the other hand, while the user stays without
25 sucking action, the heater 116 is maintained at the early preheating temperature Ta lower than the atomizing heating temperature Tc, and it is after the liquid supply switch 174 is put in the "ON" position that the heater 116 is raised from the early preheating temperature Ta to the late
30 preheating temperature Tb. This reduces the consumption of the electrical cell 162, namely prolongs the life of the cell 162.

In the above description, it is assumed that the user

- 32 -

starts sucking action with the heater 116 maintained at the late preheating temperature T_b (i.e., in the second stage of the preheating mode). In order to ensure that the user starts sucking action in such condition, the control unit 168 includes a temperature evaluation section 182 as shown in FIG. 10. The temperature evaluation section 182 determines whether or not the heater 116 has reached the late preheating temperature T_b , from a detection signal from the temperature sensor 180. If the result of determination is "true", the temperature evaluation section 182 causes the indicator 170 to indicate that the aspirator is "ready for sucking".

Specifically, in order to indicate that the aspirator is "ready for suction", the indicator 170 includes an indication lamp 184, so that the user can start sucking action after confirming that the indication lamp 184 is on. At the time that the user has started sucking action, the indication lamp 184 is turned off.

When the aspirator is configured such that the syringe pump 130 is activated by the user putting the liquid supply switch 11 in the "ON" position as described above, it is desirable that the control unit 168 further include an inhabitation determination section 186. The inhabitation determination section 186 keeps the liquid supply switch 174 unenable until the user starts sucking action, i.e., a sensing signal is emitted from the sucking sensing sensor 176 after the syringe pump 130 is activated. Thus, even if the user puts, by mistake, the liquid supply switch 174 in the "ON" position in this period, the syringe pump 130 is not double-activated. This ensures that the amount of the solution L delivered to the distributing position A in the generation passage 110 is determined by a single action of the syringe pump 130.

- 33 -

The indicator 170 may include an indication lamp 188 to indicate that activation of the syringe 170 is inhibited. In this case, the inhabitation determination section 186 turns on the indication lamp 188 simultaneously with
5 inhibiting activation of the syringe 170 to tell the user that double activation of the syringe pump 130, thus double delivery of the solution L is inhibited.

When the user does sucking action and then the heater 116 reaches the atomizing temperature T_c , or supply of
10 current to the heater 116 stops after that, activation of the syringe pump 130 is permitted and the indication lamp 188 is turned off.

The control unit 138 may further include a remaining quantity detection section 190 for detecting the amount of
15 the solution L remaining in the syringe pump 130 and a voltage detection section 192 for detecting the voltage of the electrical cell 162, and the indicator 170 may include indication lamps 194, 196 corresponding to the remaining quantity detection section 190 and the voltage detection
20 section 192, respectively.

As mentioned above, the amount of the solution L delivered from the syringe pump 130 each time the syringe pump 130 is activated is constant. Thus, the remaining quantity detection section 190 estimates the amount of the
25 solution L remaining in the syringe pump 130 from the amount of the solution discharged from the syringe pump 130 in the aforementioned preprocessing, and at least either the number of times that the syringe pump 130 has been activated or the number of times that the sensing signal
30 has been emitted from the sucking sensor 176. When the remaining quantity estimated decreases to a predetermined amount or below, the remaining quantity detection section 190 turns on the indication lamp 194 of the indicator 170

- 34 -

to tell the user that the remaining solution L is "scarce".

The voltage detection section 192 detects the output voltage of the electrical cell 162, and when the output voltage decreases to a predetermined value or below, turns
5 on the indication lamp 196 of the indicator 170 to tell the user that "the remaining cell charge is scarce".

Indicating the states of the aspirator, specifically of the heater 116, syringe pump 130 and electrical cell 162 by the ON/OFF of the indication lamps 184, 188, 194 and 196
10 can help the user's appropriate use of the aspirator to suck an aerosol, and urge the preparation of a new syringe pump or electrical cell to replace the syringe pump 130 and or electrical cell 162.

As mentioned above, the heater 166 is removably set
15 within the upper casing part 102a. This allows the user to remove the heater 116 and easily clean the generation passage 110 as well as the inside of the heater 116.

The indicator 170 may include a liquid crystal display in place of the indication lamps, for example. In this
20 case, the above-mentioned various states are presented on the liquid crystal display.

The liquid supply switch 174 is not indispensable. When the aspirator does not include the liquid supply switch 174, the control unit 168 controls the temperature
25 of the heater 116 in a temperature control process, as shown in FIG. 11 or 12.

After the power switch 172 is put in the "ON" position, the control unit 168 raises the heater 116 to a preheating temperature T_d lower than an atomizing heating temperature T_c and maintains it at this preheating temperature T_d
30 (preheating mode). Then the user starts sucking action, and when the sucking sensing sensor 176 emits a sensing signal, the control unit 168 raises the heater 116 to the

- 35 -

atomizing heating temperature T_c (atomizing heating mode) and stops the supply of current to the heater 116.

Then, when the heater 116 falls to the preheating temperature T_d or below, the control unit 168 resumes the
5 supply of current to the heater 116 to raise the heater 116 back to the preheating temperature T_d .

The control unit 168 may activate the syringe pump 130 to deliver a fixed amount of the solution L to the distributing position A in the generation passage 110,
10 while the heater 116 is rising to the atomizing heating temperature T_c .

Specifically, as seen from the temperature control shown in FIG. 11, the control unit 168 activates the syringe pump 130 to deliver the solution L, while the
15 heater 116 is rising from the preheating temperature T_d to the atomizing temperature T_c . In this case, at the time that the solution L is delivered, air in the generation passage 110 has already been drawn toward the mouthpiece by the user's sucking on the mouthpiece 104, so that the
20 solution L delivered to the distributing position A is immediately transferred into the heater 116, heated by the heater 116 and atomized, namely forms an aerosol with air sucked.

The solution L may be delivered while the heater 116
25 is maintained at the preheating temperature T_d . Only the first delivery of the solution L may be carried out at the time that the power switch 172 is put in the "ON" position.

The preheating temperature T_d may be equal to the aforementioned late preheating temperature T_b . However,
30 considering that the user may repeat the sucking action continuously, the preheating temperature T_d and the early preheating temperature T_a are so determined that the time taken for the heater 116 to reach the atomizing heating

- 36 -

temperature Tc after the user's starting sucking action, thus, the time taken for generation of an aerosol may not cause the user to feel uncomfortable, and that preheating may not cause a change in composition of the solution L.

5 It may be adapted such that when the syringe pump 130 is activated to deliver the solution L to the distributing position A in the generation passage 110 and then the user puts the power switch 172 in the "OFF" position without performing sucking action, the control unit 168 performs a
10 termination mode. The termination mode includes reverse operation of the syringe pump 130, thereby bringing the solution L back to the delivery portion or the pump chamber 140.

 Such termination mode is performed also in the
15 temperature control process shown in FIG. 8 using of the liquid supply switch 174.

 In order to dispense with the aforementioned termination mode, the control unit 168 can adopt the temperature control process as shown in FIG. 12. In this
20 temperature control process, the control unit 168 activates the syringe pump 130 upon receiving a sensing signal from the sucking sensing sensor 176. Since the delivery of the solution L is caused following the user's sucking action, the possibility that the solution L remains at the
25 distributing position A in the generation passage 110 is eliminated.

 In view of possible wrong operation of the power switch 172, it may be adapted such that the control unit 168 does not start or stop functioning unless the power
30 switch stays in the "ON" or "OFF" position for a predetermined period of time. It is however desirable that the supply of current to the heater 116 be started at the same time as the power switch 172 is put in the "ON"

- 37 -

position.

It may be adapted such that the control unit 168 makes ineffective the power switch 172 in the "ON" position, if the syringe pump 130 is not attached, or in other words, a
5 sensing signal is not emitted from the cartridge sensing sensor 178.

Further, it may be adapted such that the control unit 168 has a function of storing usage history such as how many times the user has done suction action, how long power
10 is supplied to the heater 116, how many times the syringe pump 130 has been replaced, etc.

Further, it may be adapted such that the aerosol aspirator includes a reading section to read information on the syringe pump 130 at the time that the syringe pump 130
15 is attached, if the syringe pump 130 has information such as the type and volume of solution in the form of a bar code or the like. In this case, it may be adapted such that the control unit 168 changes the temperature control process for the heater 116, depending on the solution type
20 identified from the information read by the reading section 168.

An identity verification system based on fingerprint, an IC tag, an IC card or the like may be incorporated into the aerosol aspirator to reliably prevent unauthorized use
25 of the aerosol aspirator. Further, the power source of the aerosol aspirator does not need to be accommodated within the casing.

Although the aerosol aspirator according to the embodiments described above all use a syringe pump to
30 supply a solution, another type of fixed displacement pump, such as a gear pump, can be used.

WHAT IS CLAIMED IS:

1. An aerosol aspirator, comprising:
 - a casing with a mouthpiece, said casing including an outside air inlet open at an outer surface thereof,
 - a generation device disposed within said casing for generating an aerosol, said generation device including:
 - an aerosol generation passage extending from the outside air inlet to the mouthpiece and having a distributing position and an atomizing surface in a middle part thereof,
 - 10 a supply pump having a solution chamber holding a solution to be turned into an aerosol, for delivering the solution from the solution chamber to the distributing position in a fixed amount each time the supply pump is activated, and
 - an atomizing gadget for atomizing the solution delivered to the distributing position at the atomizing surface, wherein the aerosol generation passage is a tubular passage, and the atomizing gadget includes a heater located downstream of the distributing position and upstream of the mouthpiece, the heater having a heating surface serving as the atomizing surface.
2. The aerosol aspirator according to claim 1, wherein the heater is tubular in shape and forms a part of the generation passage.
- 20 3. The aerosol aspirator according to claim 2, wherein the supply pump is a syringe pump, and said generation device further includes a liquid passage connecting the syringe pump and the generation passage at the distributing position so that the generation passage is closed with the solution delivered from the syringe pump to the distributing position.
4. The aerosol aspirator according to claim 3, further comprising a switch for activating the heater prior to activating the syringe pump.

5. The aerosol aspirator according to claim 4, wherein said generation device further includes a push button manually operated to activate the syringe pump.

6. The aerosol aspirator according to claim 4, wherein said generation device further includes an actuator for activating the syringe pump, and a sucking sensing sensor for sensing sucking of air in the generation passage by means of the mouthpiece and activating the actuator.

7. An aerosol aspirator comprising:

a casing with a mouthpiece, said casing including an outside air inlet open at an outer surface thereof,

10 a generation device disposed within said casing for generating an aerosol, said generation device including:

an aerosol generation passage extending from the outside air inlet to the mouthpiece and having a distributing position and an atomizing surface in a middle part thereof,

a supply pump having a solution chamber holding a solution to be turned into an aerosol, for delivering the solution from the solution chamber to the distributing position in a fixed amount each time the supply pump is activated, and

an atomizing gadget for atomizing the solution delivered to the distributing position at the atomizing surface,

20 wherein the distributing position is defined on the atomizing surface of the atomizing gadget, and said generation device further includes an absorbing member fitted to a discharge port of the supply pump, for temporarily absorbing the solution discharged from the solution chamber, the discharge port being apart from the distributing position by a predetermined distance, and

delivering means for delivering the solution held in the absorbing member to the distributing position on the atomizing surface, and

the atomizing surface is formed of a heating surface of a planar heater or a vibrating surface of an ultrasonic vibrator, and

the delivering means includes a drive means for advancing and withdrawing the adsorbing member together with the supply pump toward and from the atomizing surface so that the solution is transferred from the absorbing member onto the atomizing surface.

8. The aerosol aspirator according to claim 7, wherein the supply pump is a syringe pump.

9. The aerosol aspirator according to claim 8, further comprising a switch for activating the heater or the ultrasonic vibrator prior to activating the syringe pump.

10. The aerosol aspirator according to claim 9, wherein said generation device further includes a push button manually operated to activate the syringe pump.

11. The aerosol aspirator according to claim 9, wherein said generation device further includes an actuator for activating the syringe pump, and a sucking sensing sensor for sensing sucking of air in the generation passage by means of the mouthpiece and activating the drive means.

12. An aerosol aspirator comprising:

a casing with a mouthpiece, said casing including an outside air inlet open at an outer surface thereof,

a generation device disposed within said casing for generating an aerosol, said generation device including:

20 an aerosol generation passage extending from the outside air inlet to the mouthpiece and having a distributing position and an atomizing surface in a middle part thereof,

a supply pump having a solution chamber holding a solution to be turned into an aerosol, for delivering the solution from the solution chamber to the distributing position in a fixed amount each time the supply pump is activated, and

an atomizing gadget for atomizing the solution delivered to the distributing position at the atomizing surface,

wherein the atomizing gadget includes a heater for atomizing the solution delivered to the distributing position, by heating, and

the aspirator further comprises a control device for controlling operation of the supply pump and the heater such that when air in the generation passage is sucked by means of the mouthpiece, an aerosol obtained by atomizing the solution is produced in the sucked air, and

10 said control device includes a sucking sensing sensor for sensing the sucking of air and emitting a sensing signal,

said control device includes a temperature control process for activating the heater when the power switch is put in an "ON" position, and

said temperature control process has a preheating mode for maintaining the heater at a predetermined preheating temperature, and an atomizing heating mode for raising the heater to an atomizing heating temperature higher than the preheating temperature, required to atomize the solution, the atomizing heating mode being initiated when the sensing signal is emitted,

20 said control device further includes a liquid supply switch manually operated to activate the heater, and the preheating mode includes a first stage of heating the heater to a temperature lower than the preheating temperature and maintaining it at this lower temperature until the liquid supply switch is put in an "ON" position, and a second stage of heating the heater to the preheating temperature and maintaining it at the preheating temperature after the liquid supply switch has been put in the "ON" position.

13. The aerosol aspirator according to claim 12, further comprising:

a power source shared by the supply pump, the heater and said control device,

a power switch associated with said power source, and

an indicator for indicating the state of at least one of the supply pump, the heater and said power source.

14. The aerosol aspirator according to claim 12, wherein said control device further includes a temperature sensor for detecting the temperature of the heater and emitting a detection signal, and temperature evaluation means for causing the indicator to indicate that the aspirator is "ready for sucking" when determining that the heater has reached the preheating temperature, in accordance with the detection signal from the temperature sensor.

10 15. The aerosol aspirator according to claim 12, wherein said control device activates the supply pump meanwhile the heater is being raised toward the atomizing heating temperature.

16. The aerosol aspirator according to claim 12, wherein said control device activates the supply pump when the sucking sensing sensor emits a sensing signal.

17. The aerosol aspirator according to claim 12, wherein said control device includes an inhabitation means for inhibiting next activation of the supply pump until the sucking sensing sensor emits a sensing signal after the supply pump has been activated.

20 18. The aerosol aspirator according to claim 13, wherein said control device includes a remaining quantity detection means for detecting an amount of the solution remaining in the solution chamber and causing the indicator to indicate that "the remaining quantity is scarce" when the solution in the solution chamber decreases to a predetermined amount or below.

19. The aerosol aspirator according to claim 18, wherein the remaining quantity detection means determines the remaining quantity in accordance with at least

either the number of times that the supply pump has been activated or the number of times that the sensing signal has been emitted.

20. The aerosol aspirator according to claim 13, wherein the power source includes an electrical cell, and said control device includes a voltage detection means for detecting an output voltage of the electrical cell and causing the indicator to indicate that "the remaining cell charge is scarce" when the output voltage decreases to a predetermined value or below.

21. The aerosol aspirator according to claim 12, wherein the supply pump is a syringe pump.

10 22. The aerosol aspirator according to claim 21, wherein the syringe pump is in the form of a cartridge removably set within said casing.

23. The aerosol aspirator according to claim 12, wherein the heater is removably set within said casing.

1/8

FIG. 1


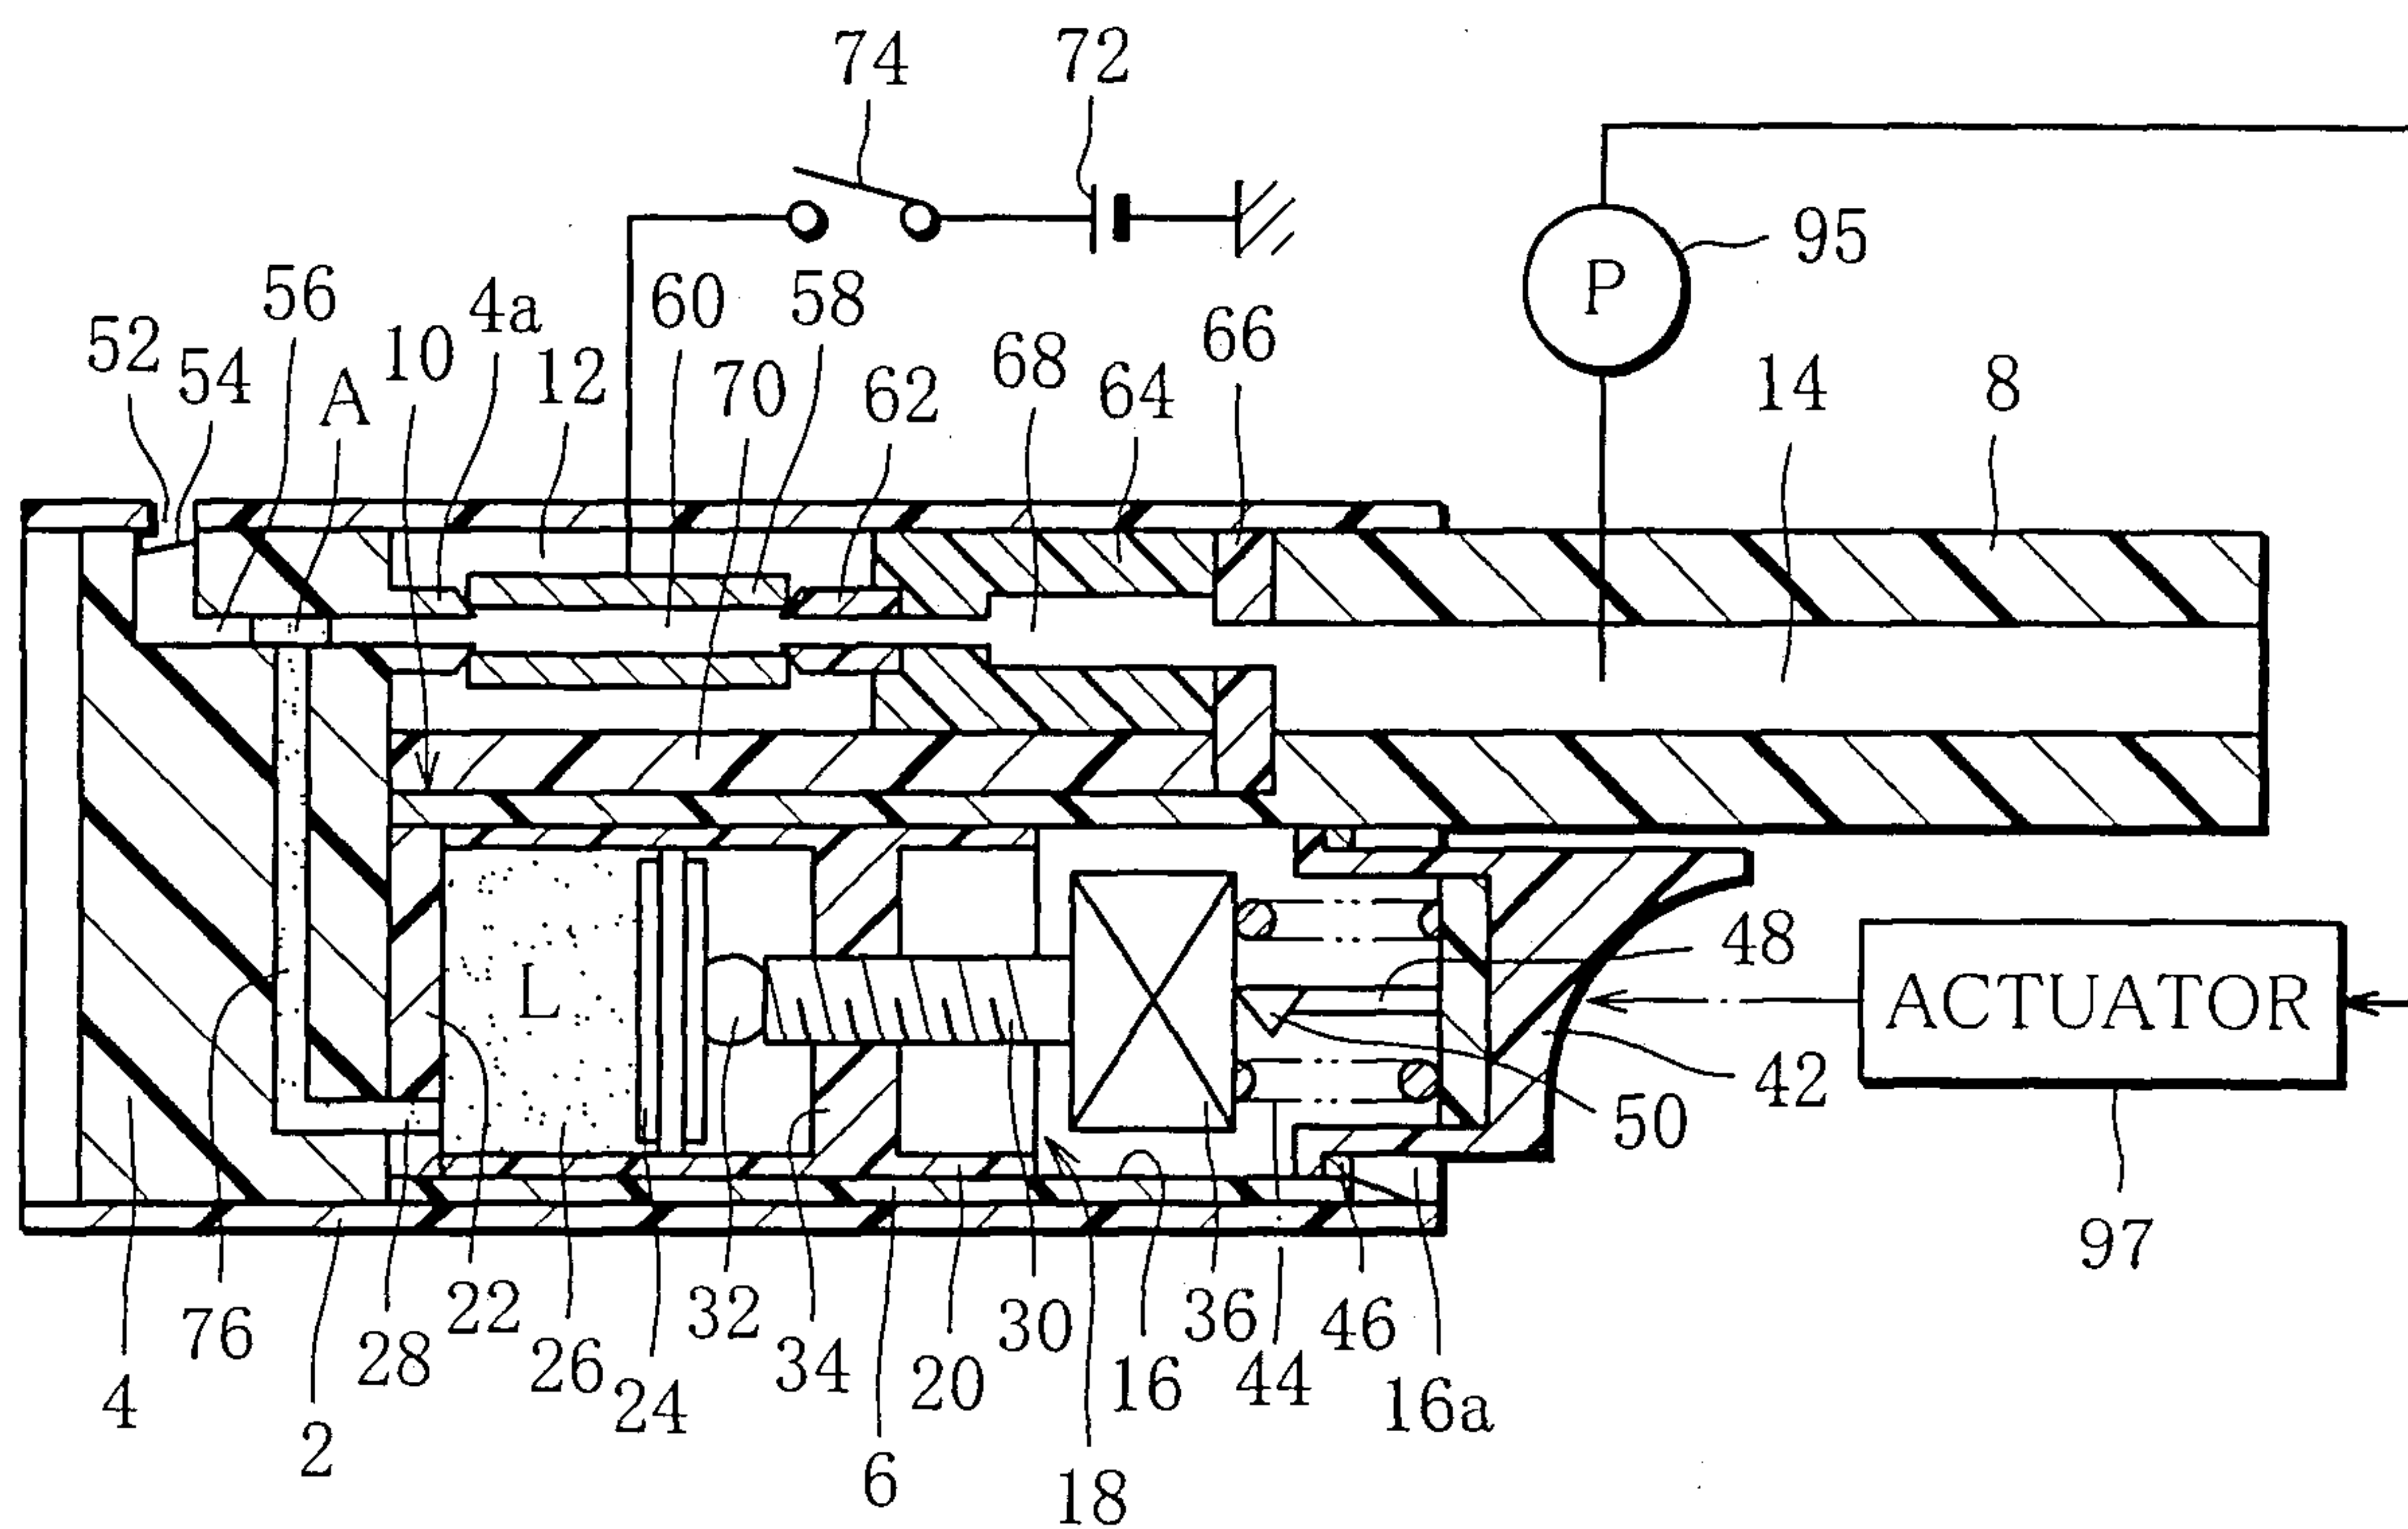


FIG. 2

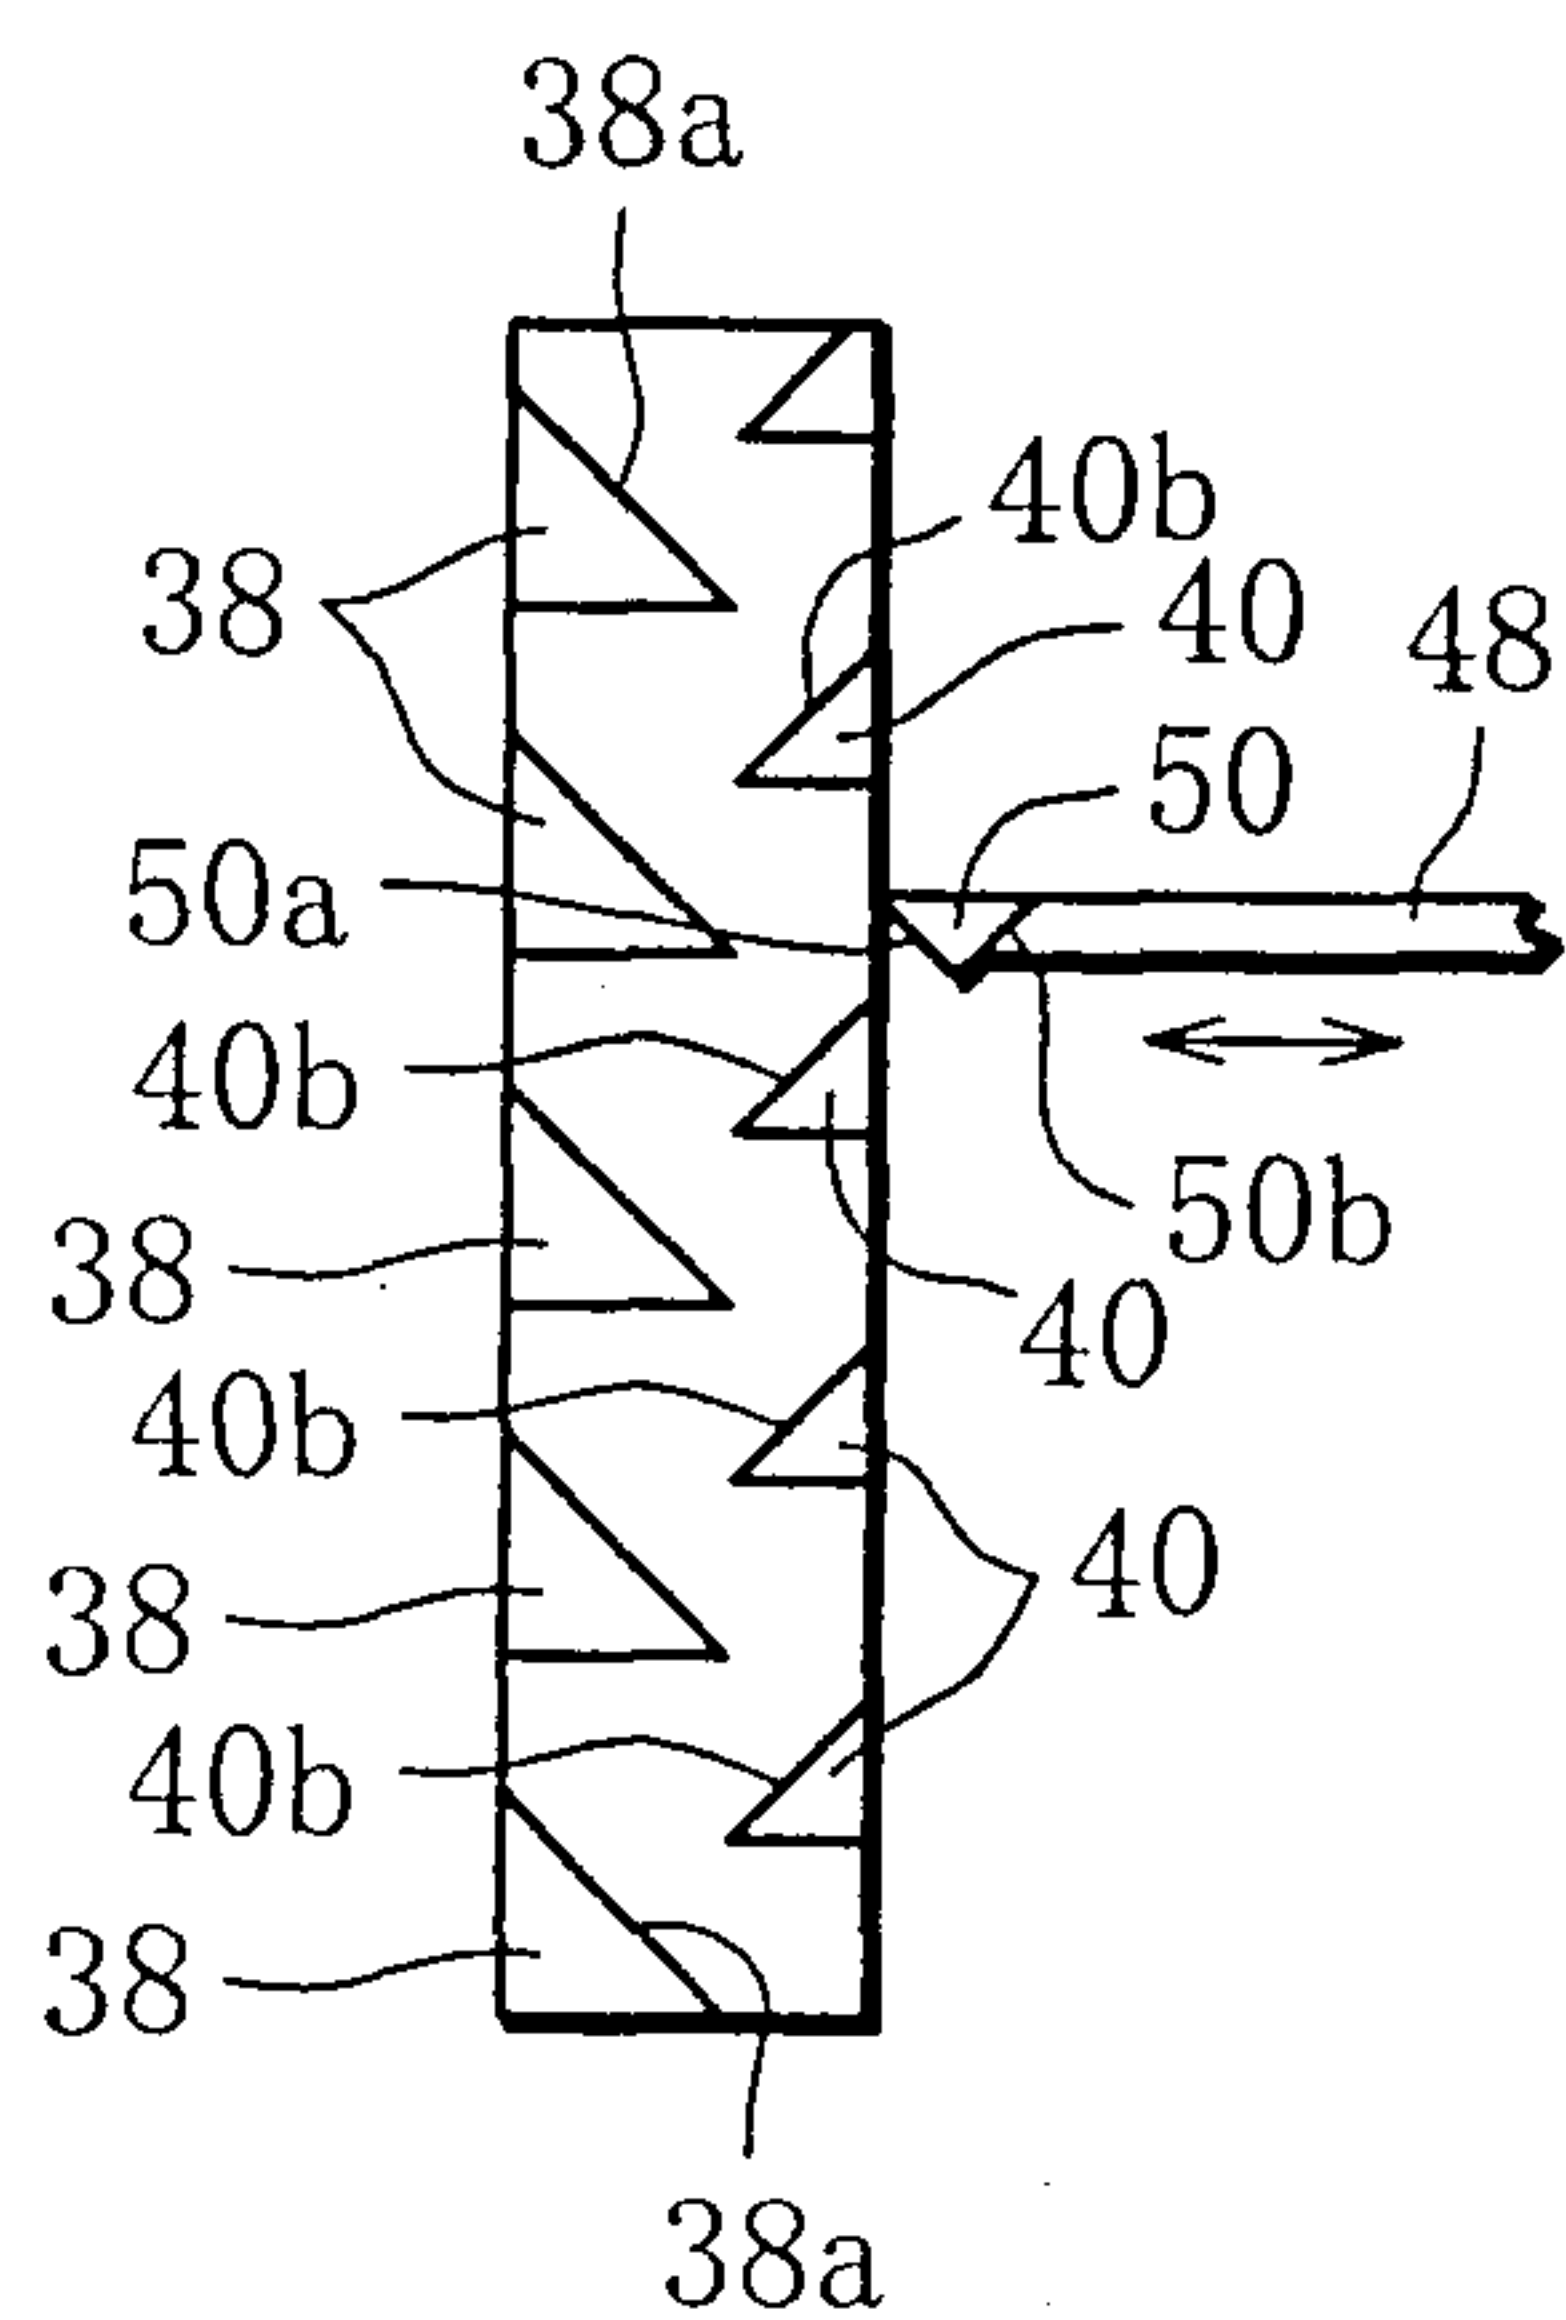

2/8

FIG. 3



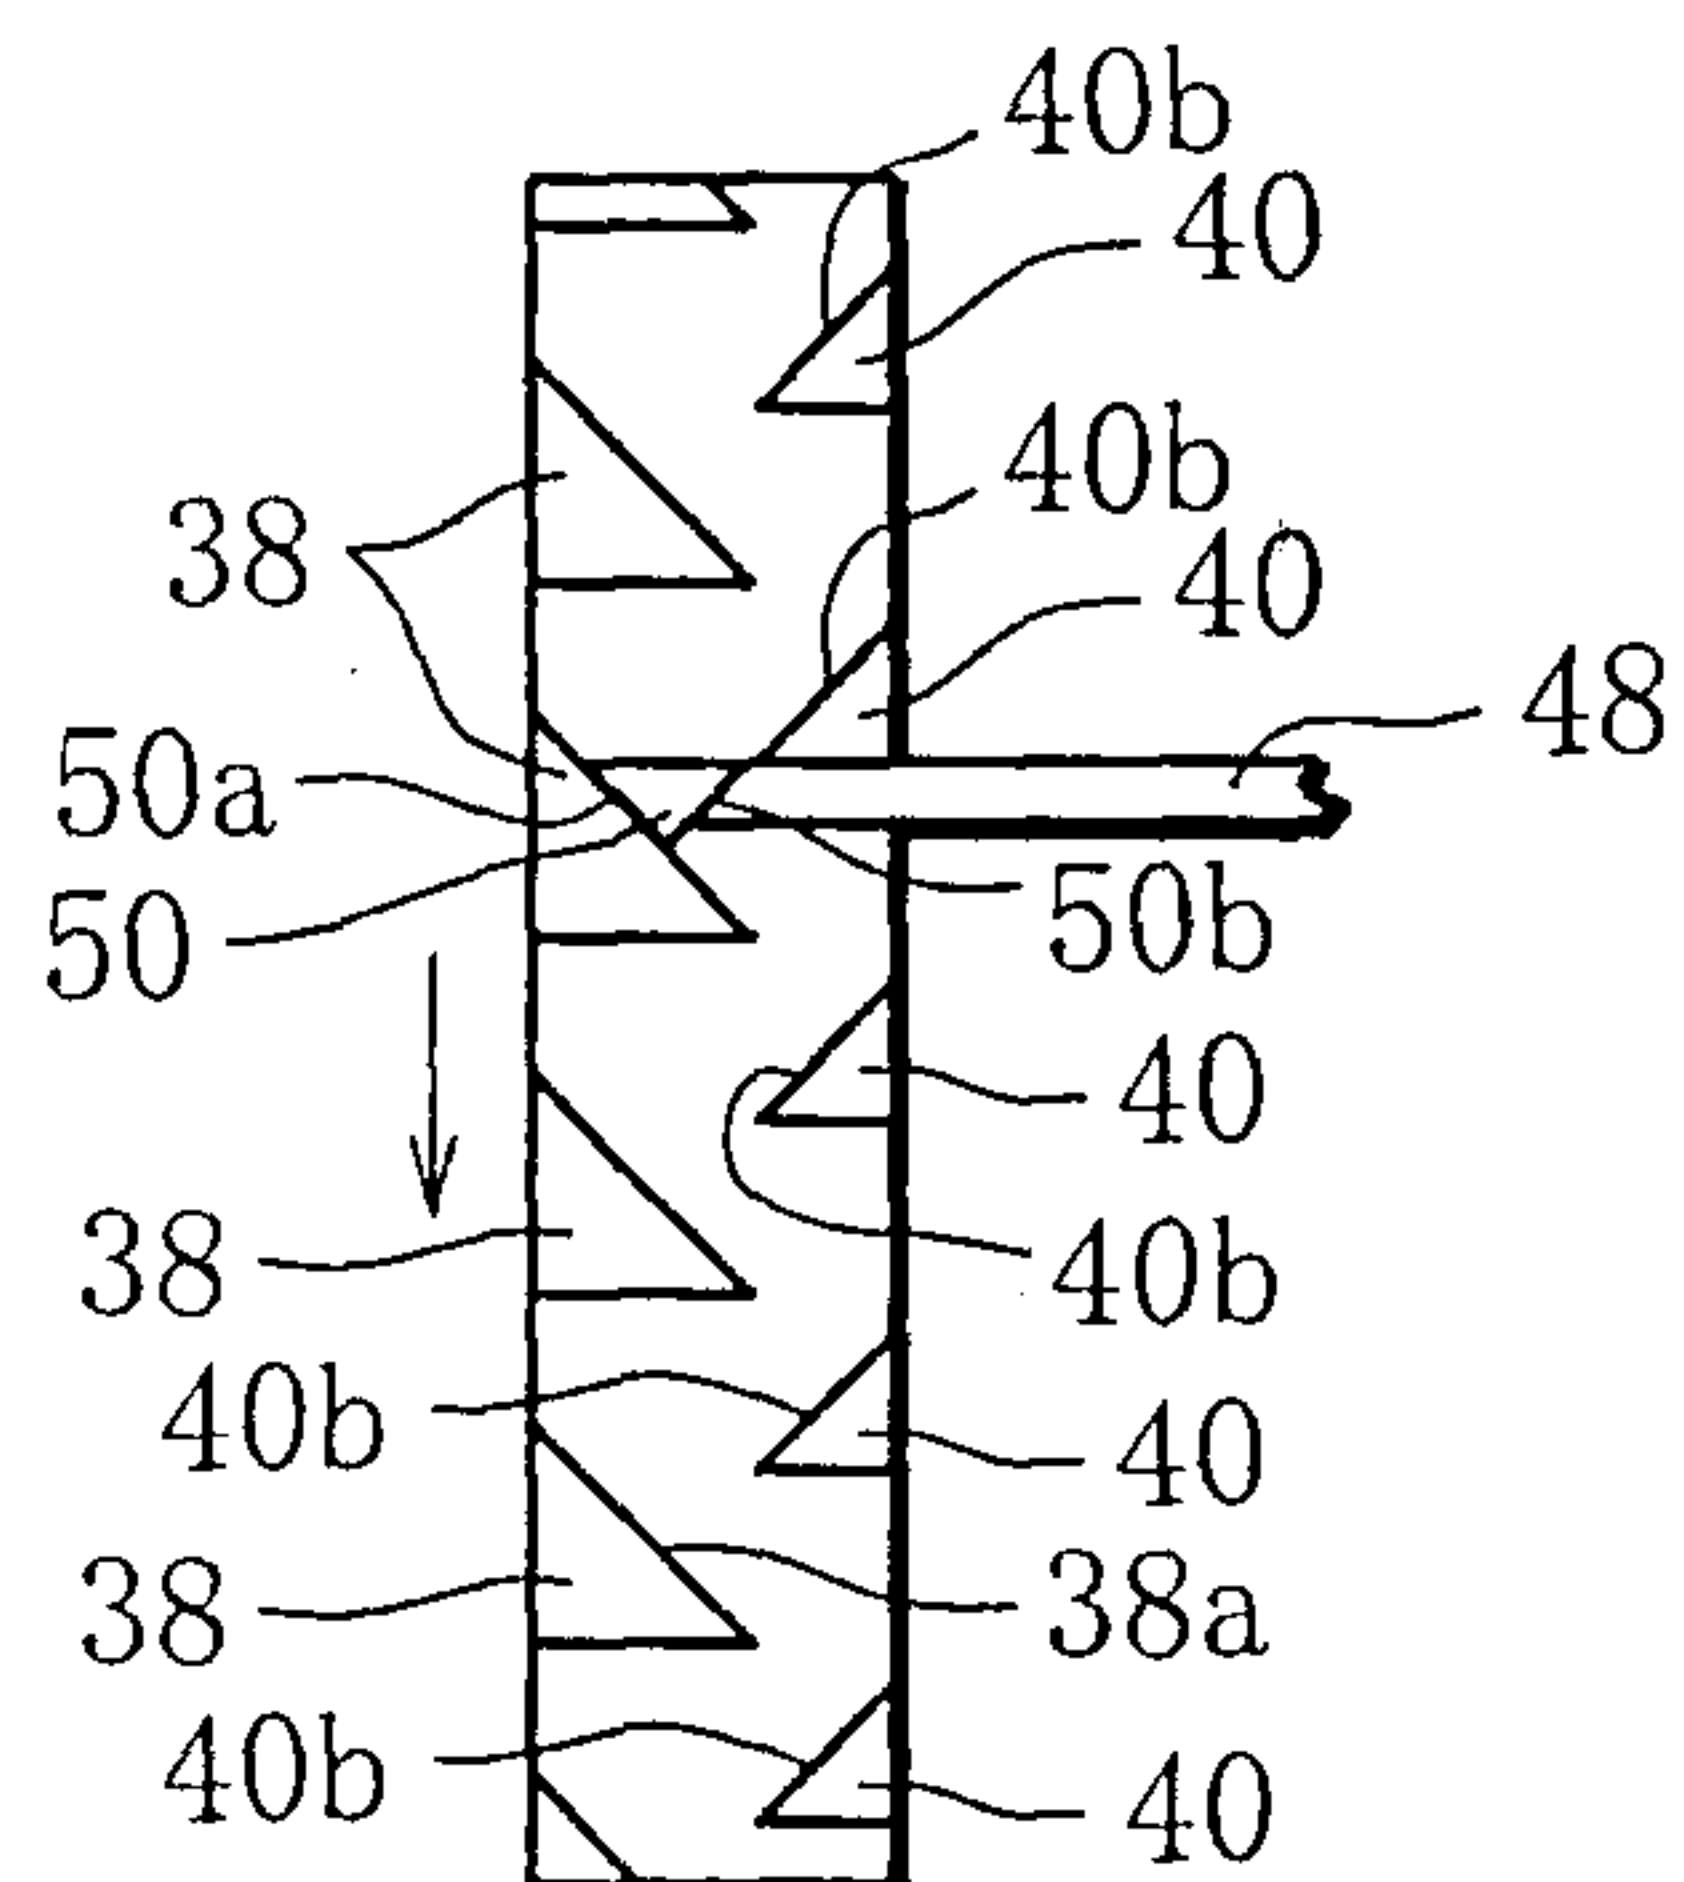


FIG. 4

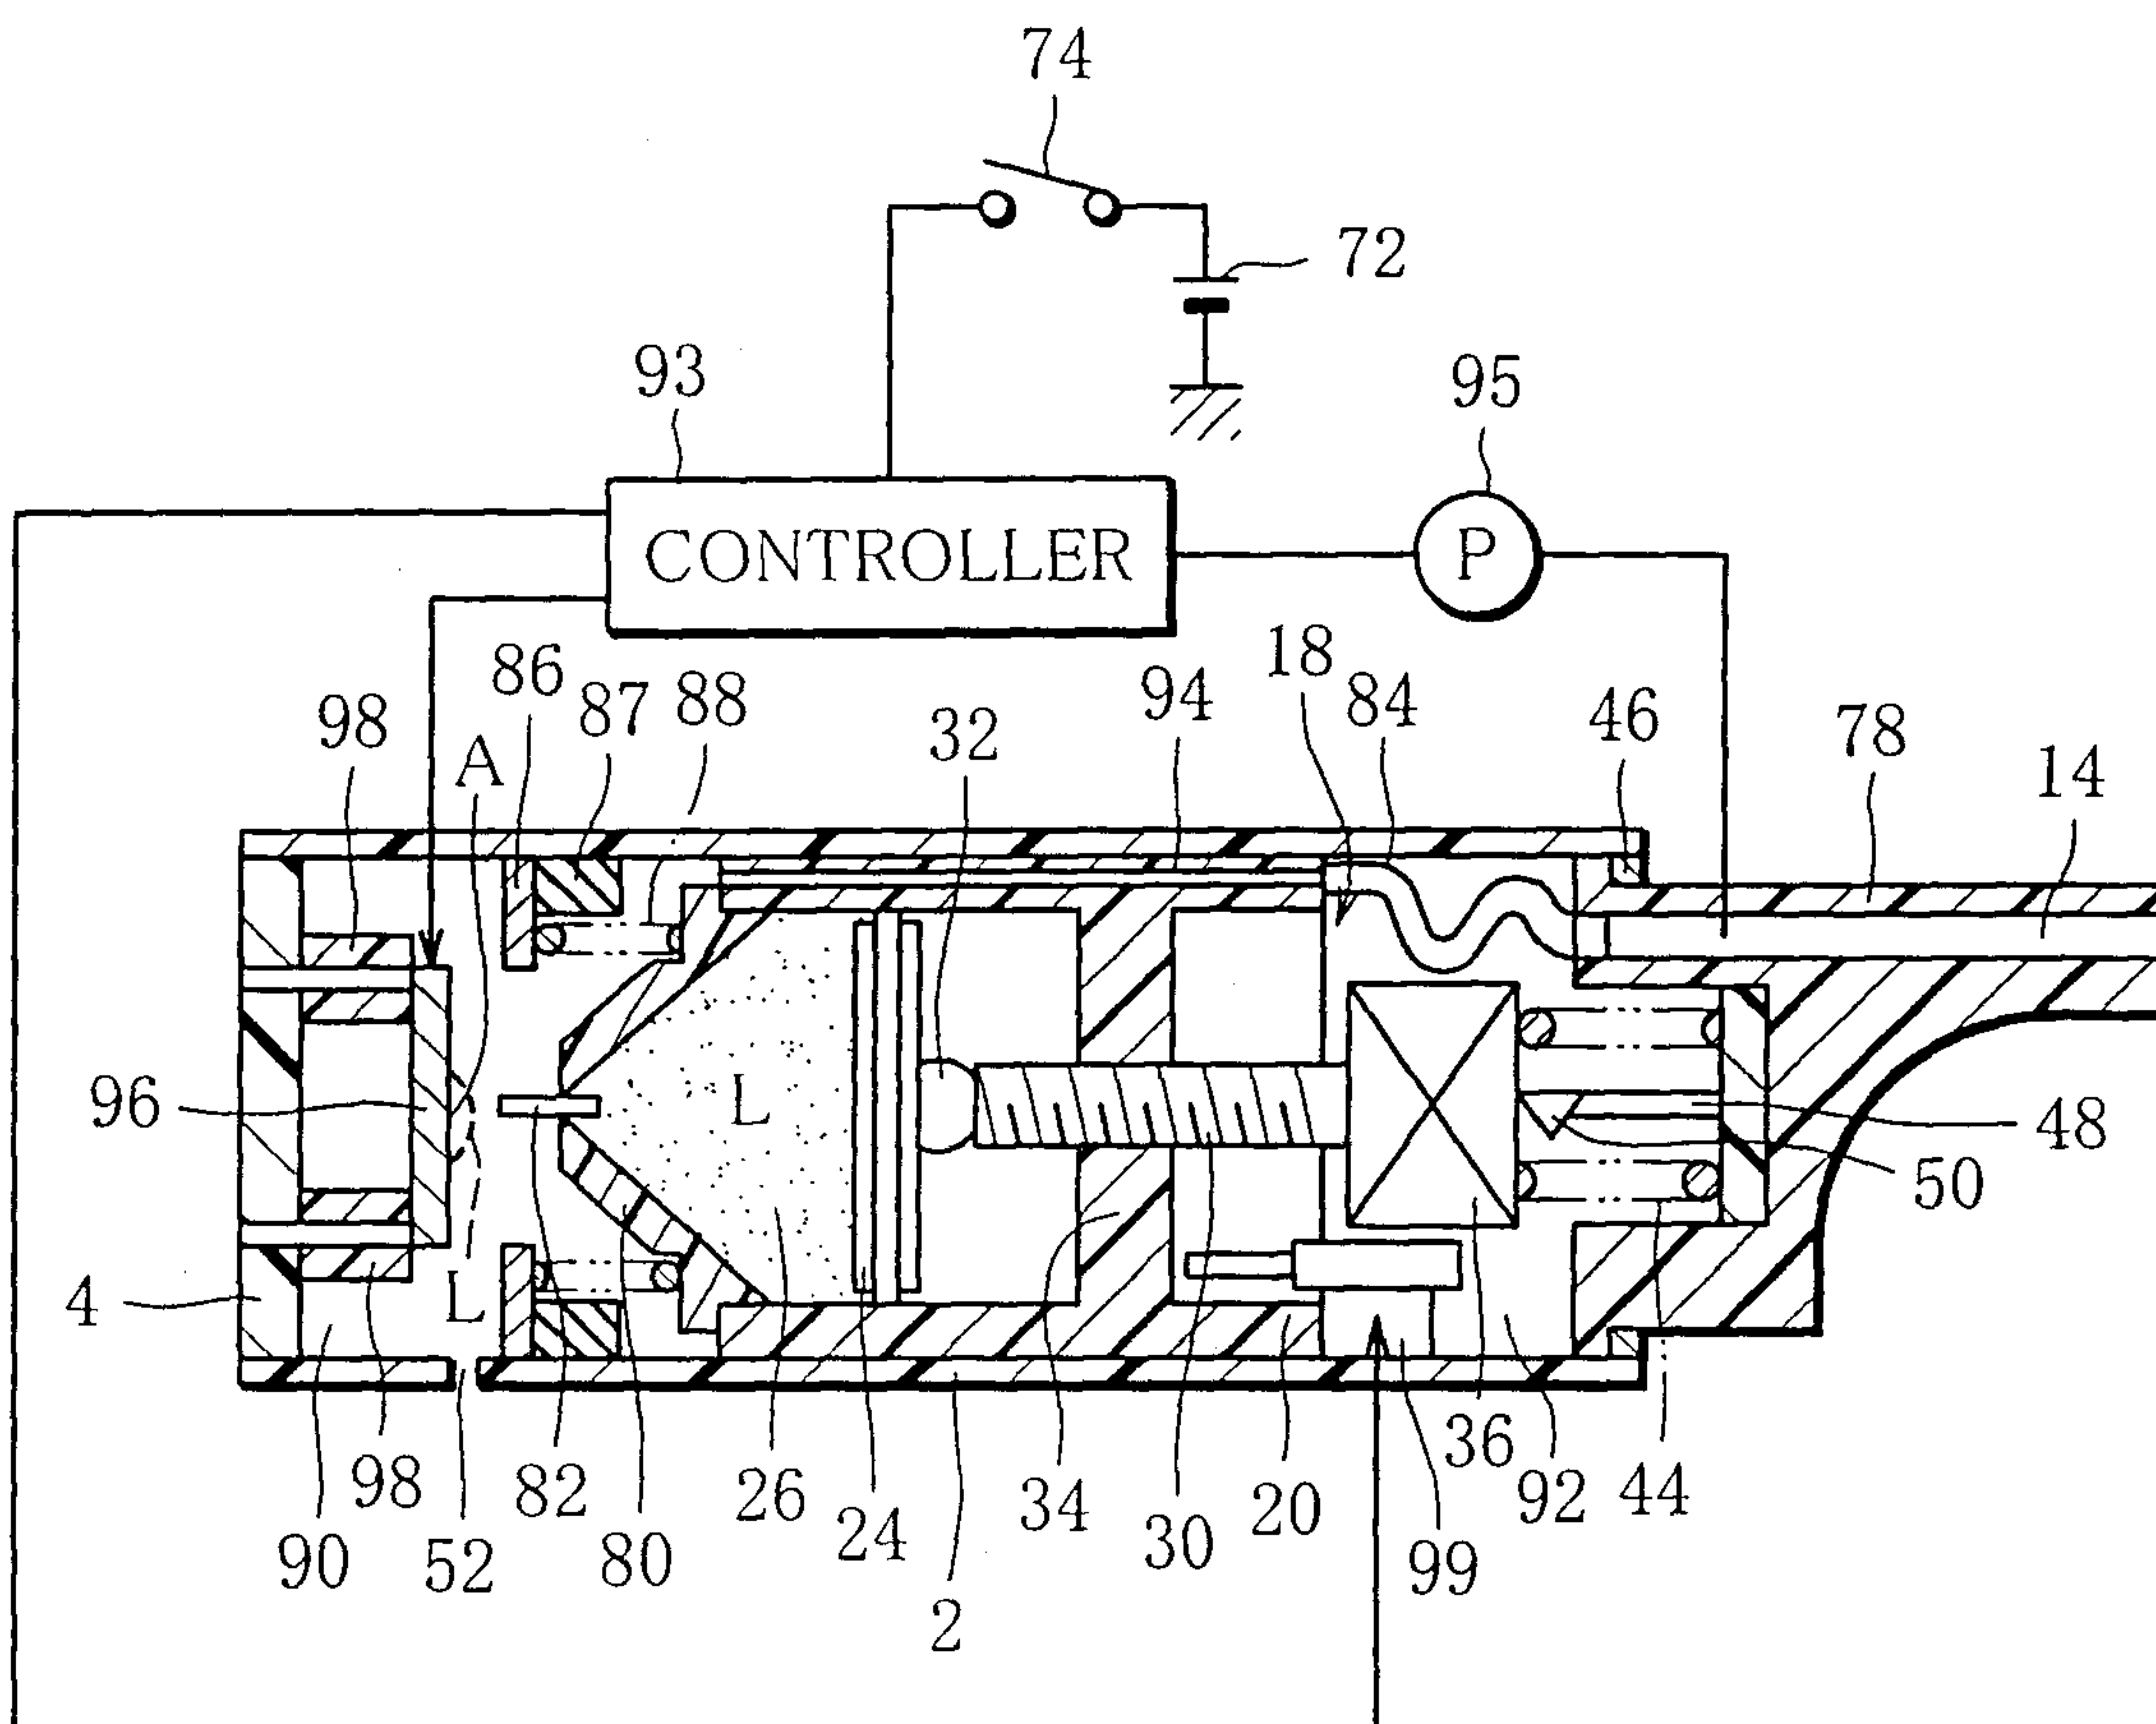


3/8

FIG. 5

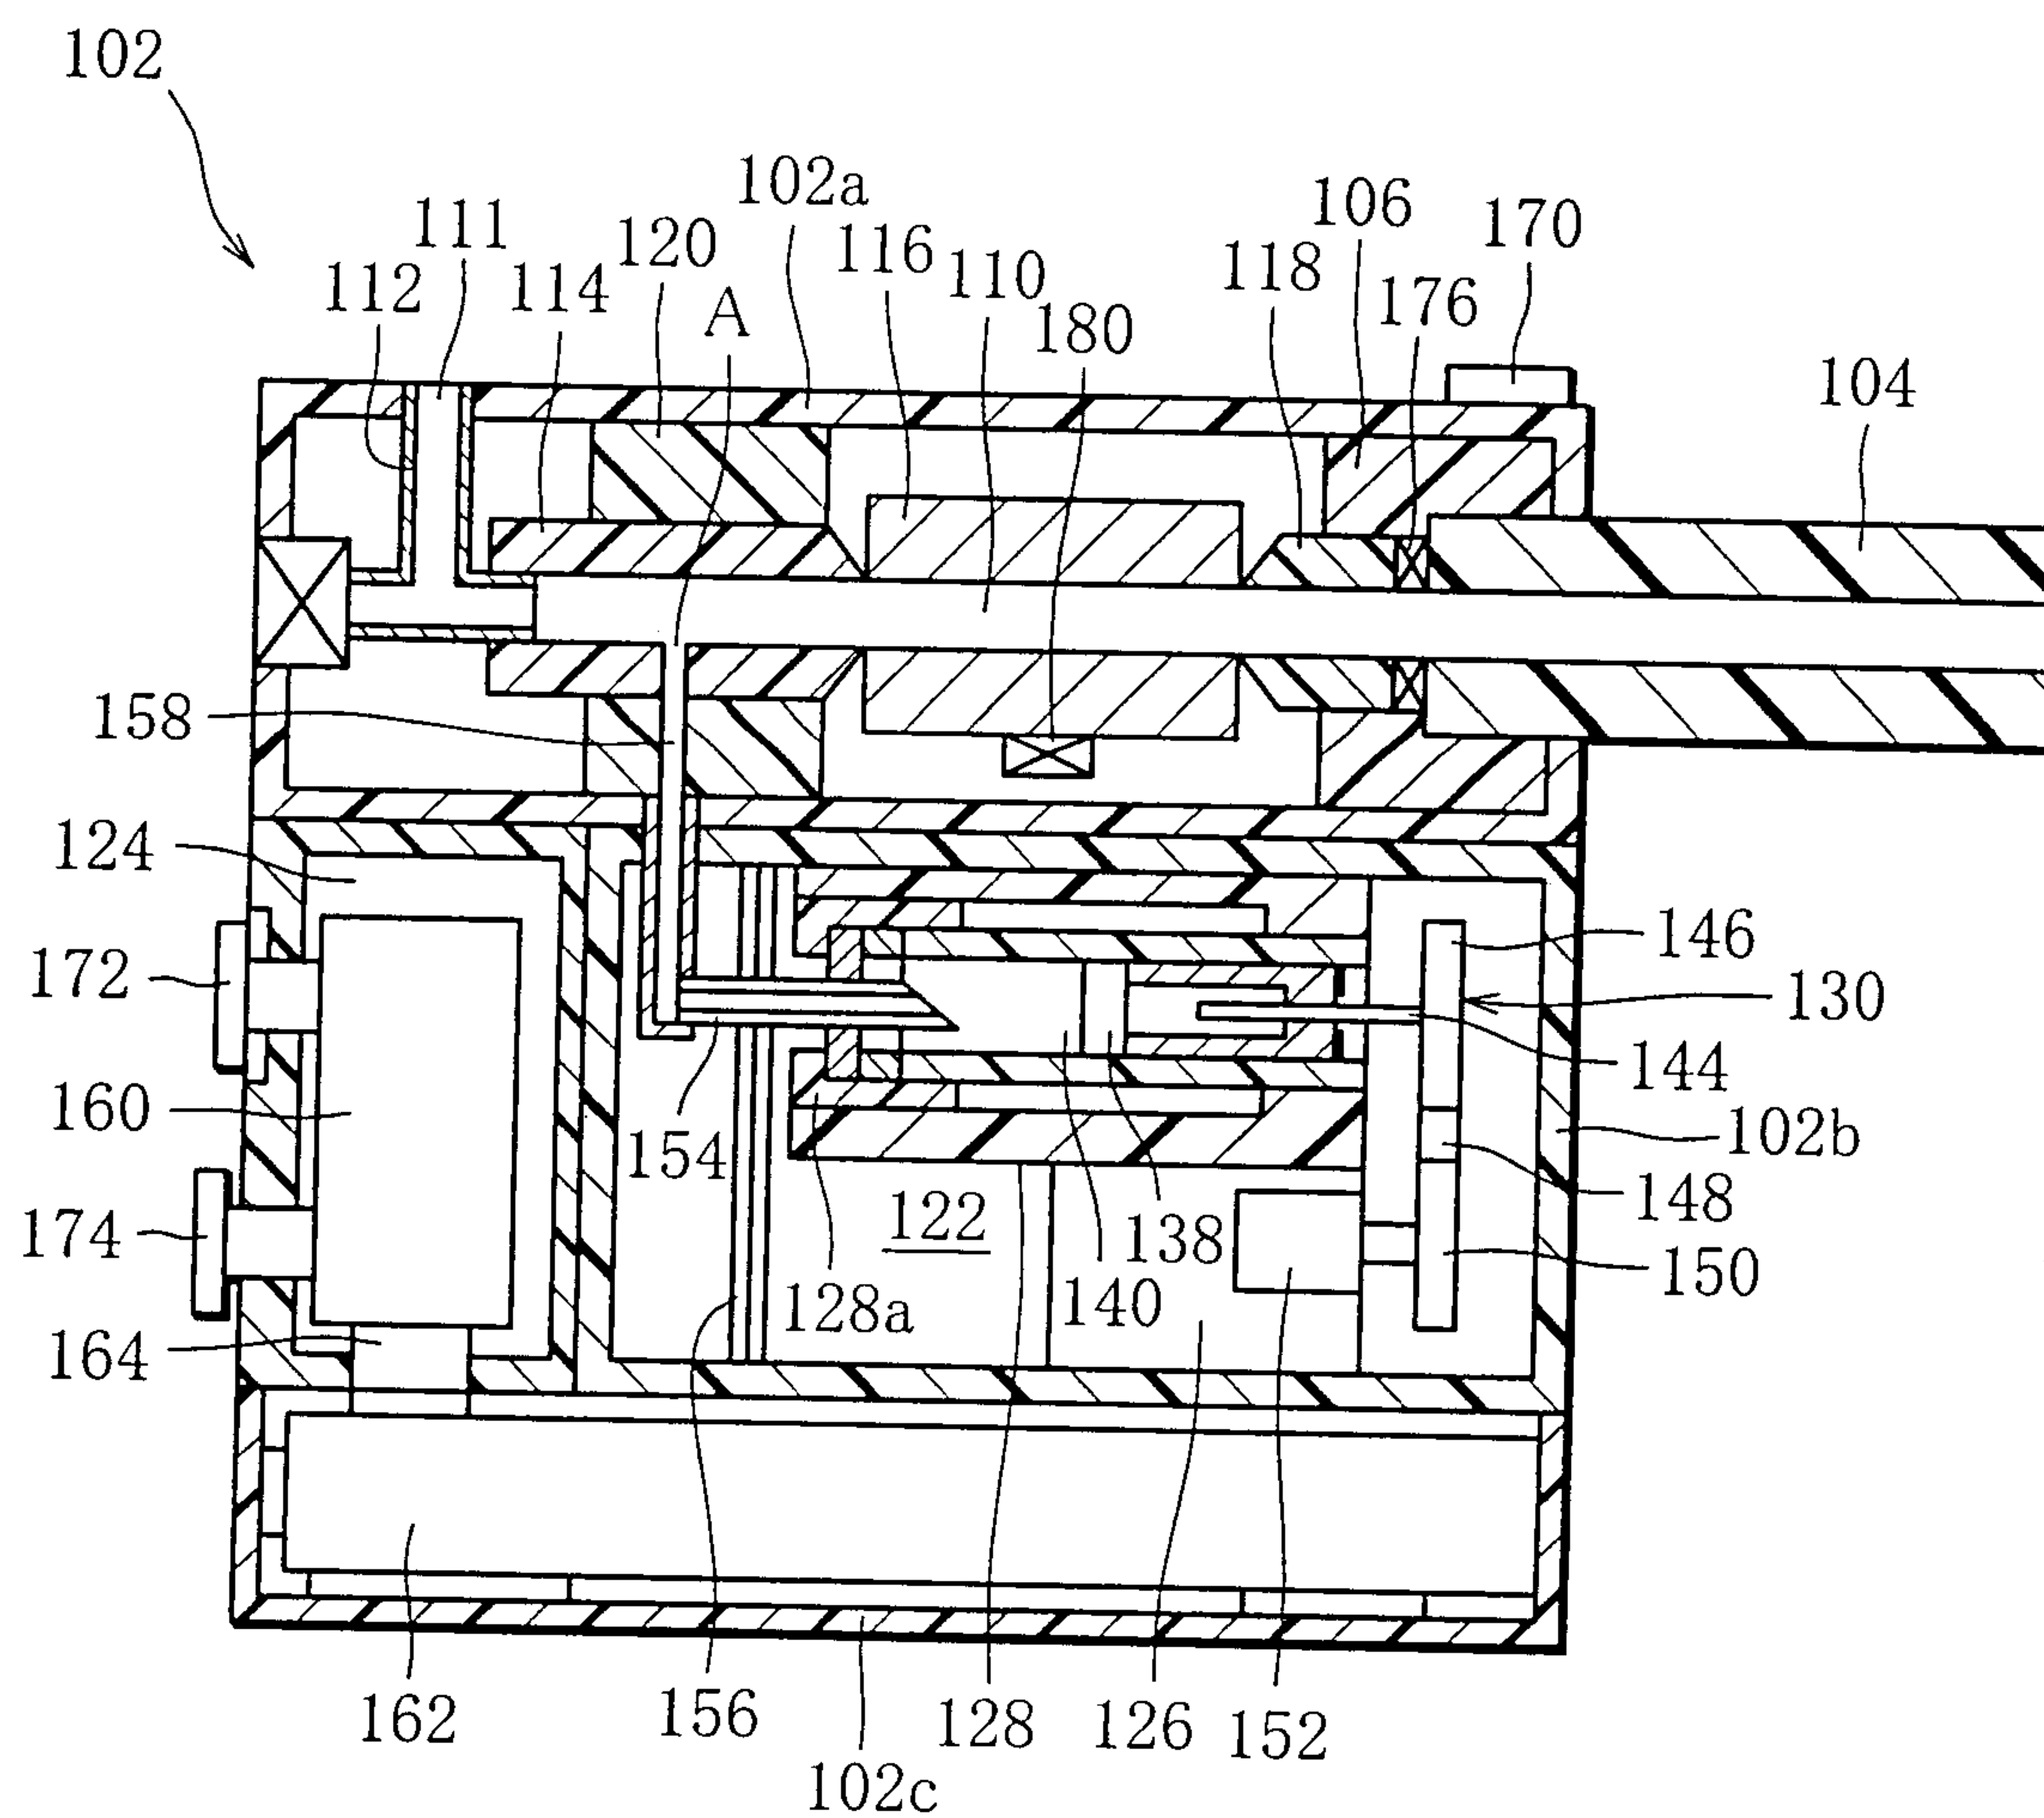


4/8

FIG. 6

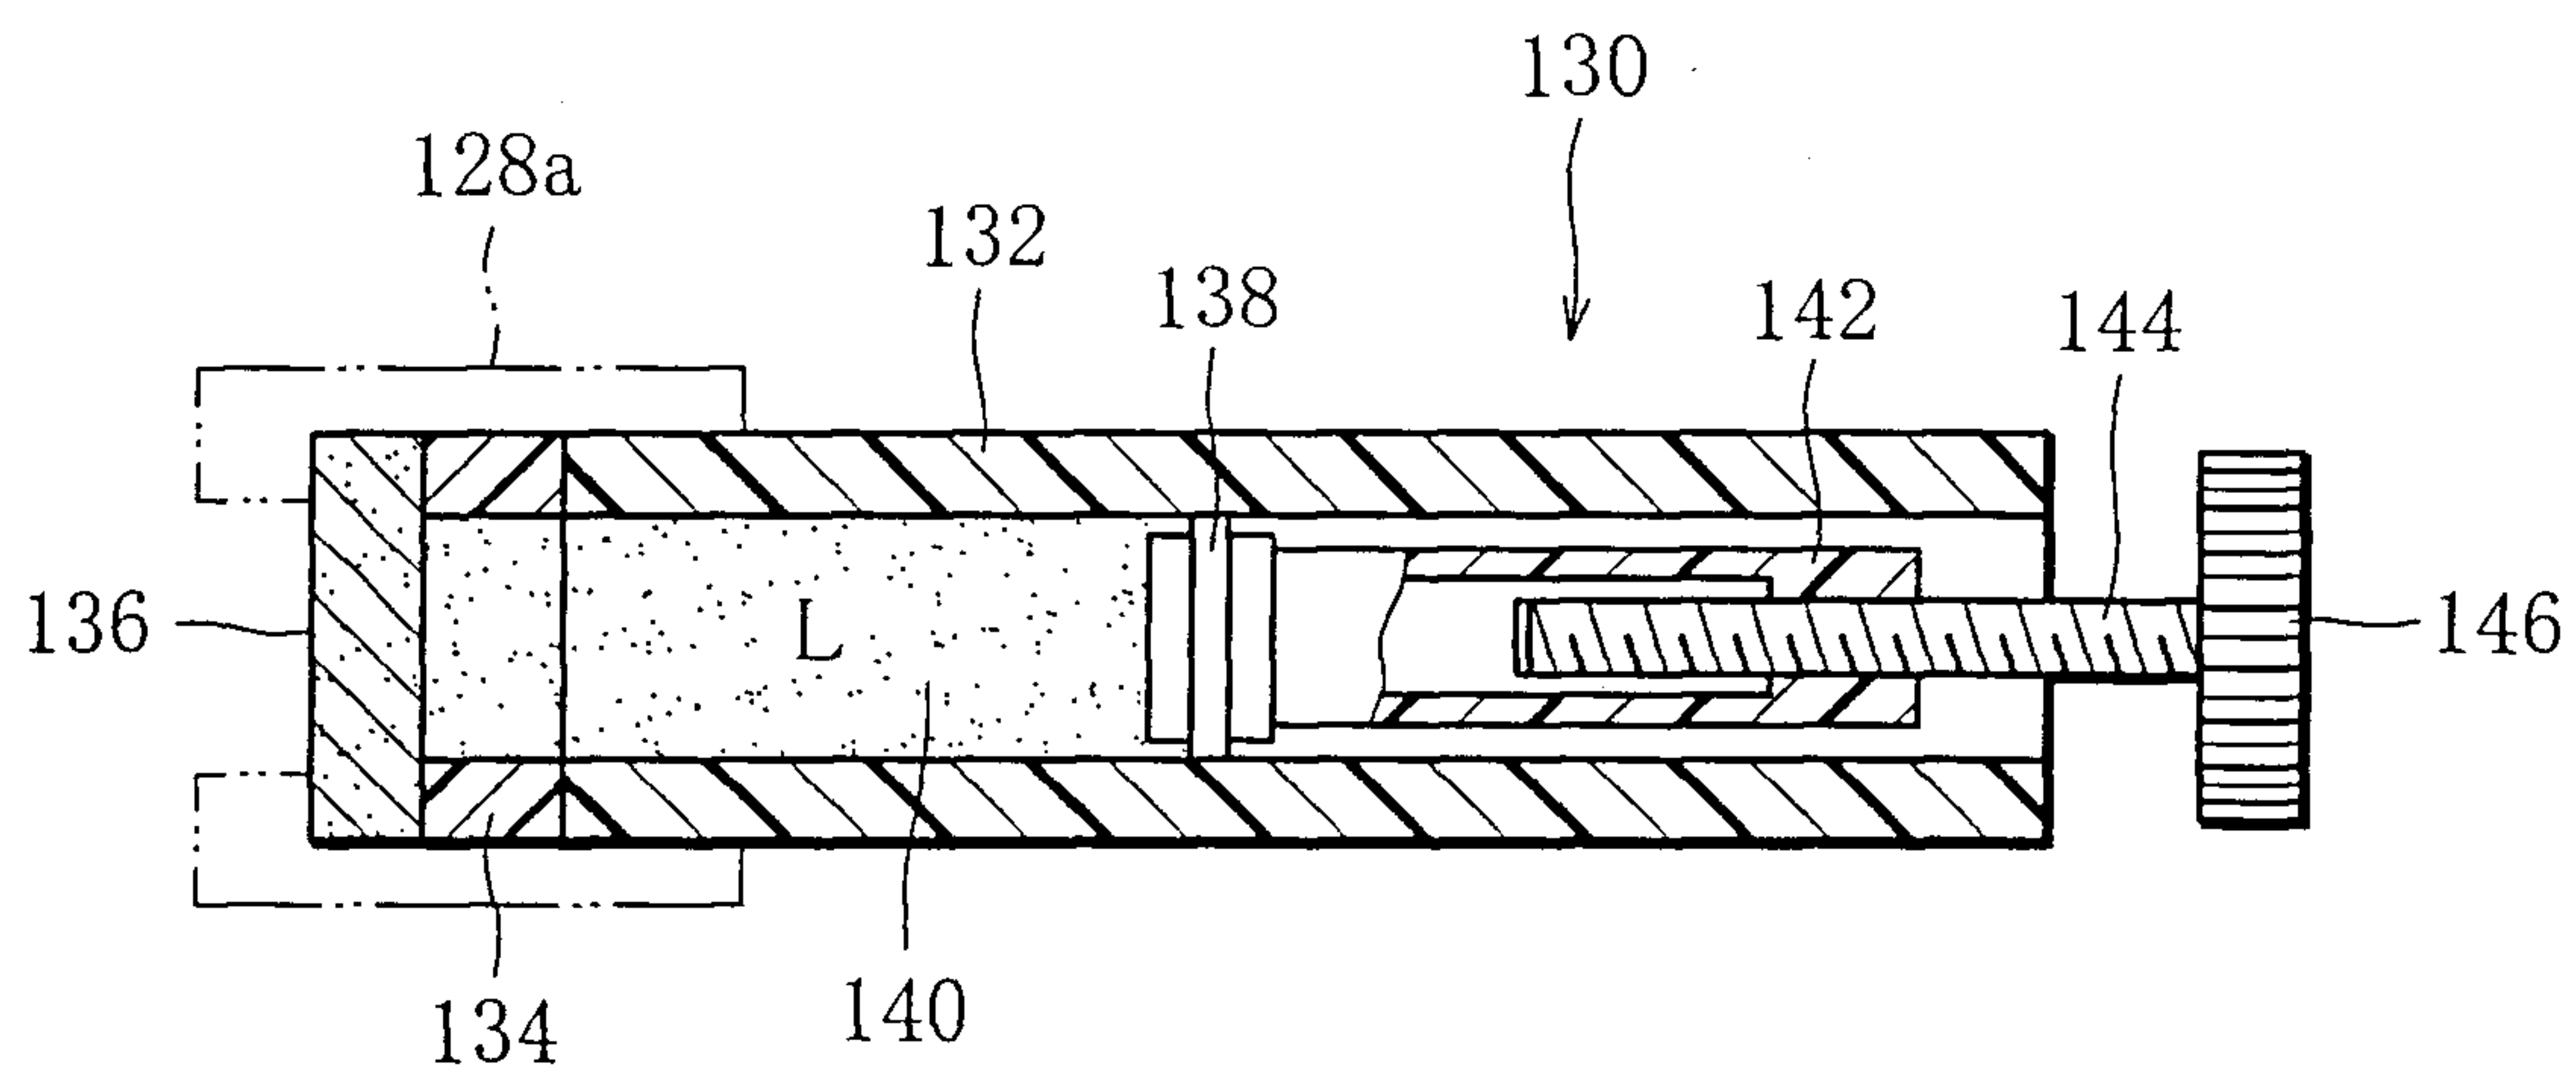

5/8

FIG. 7

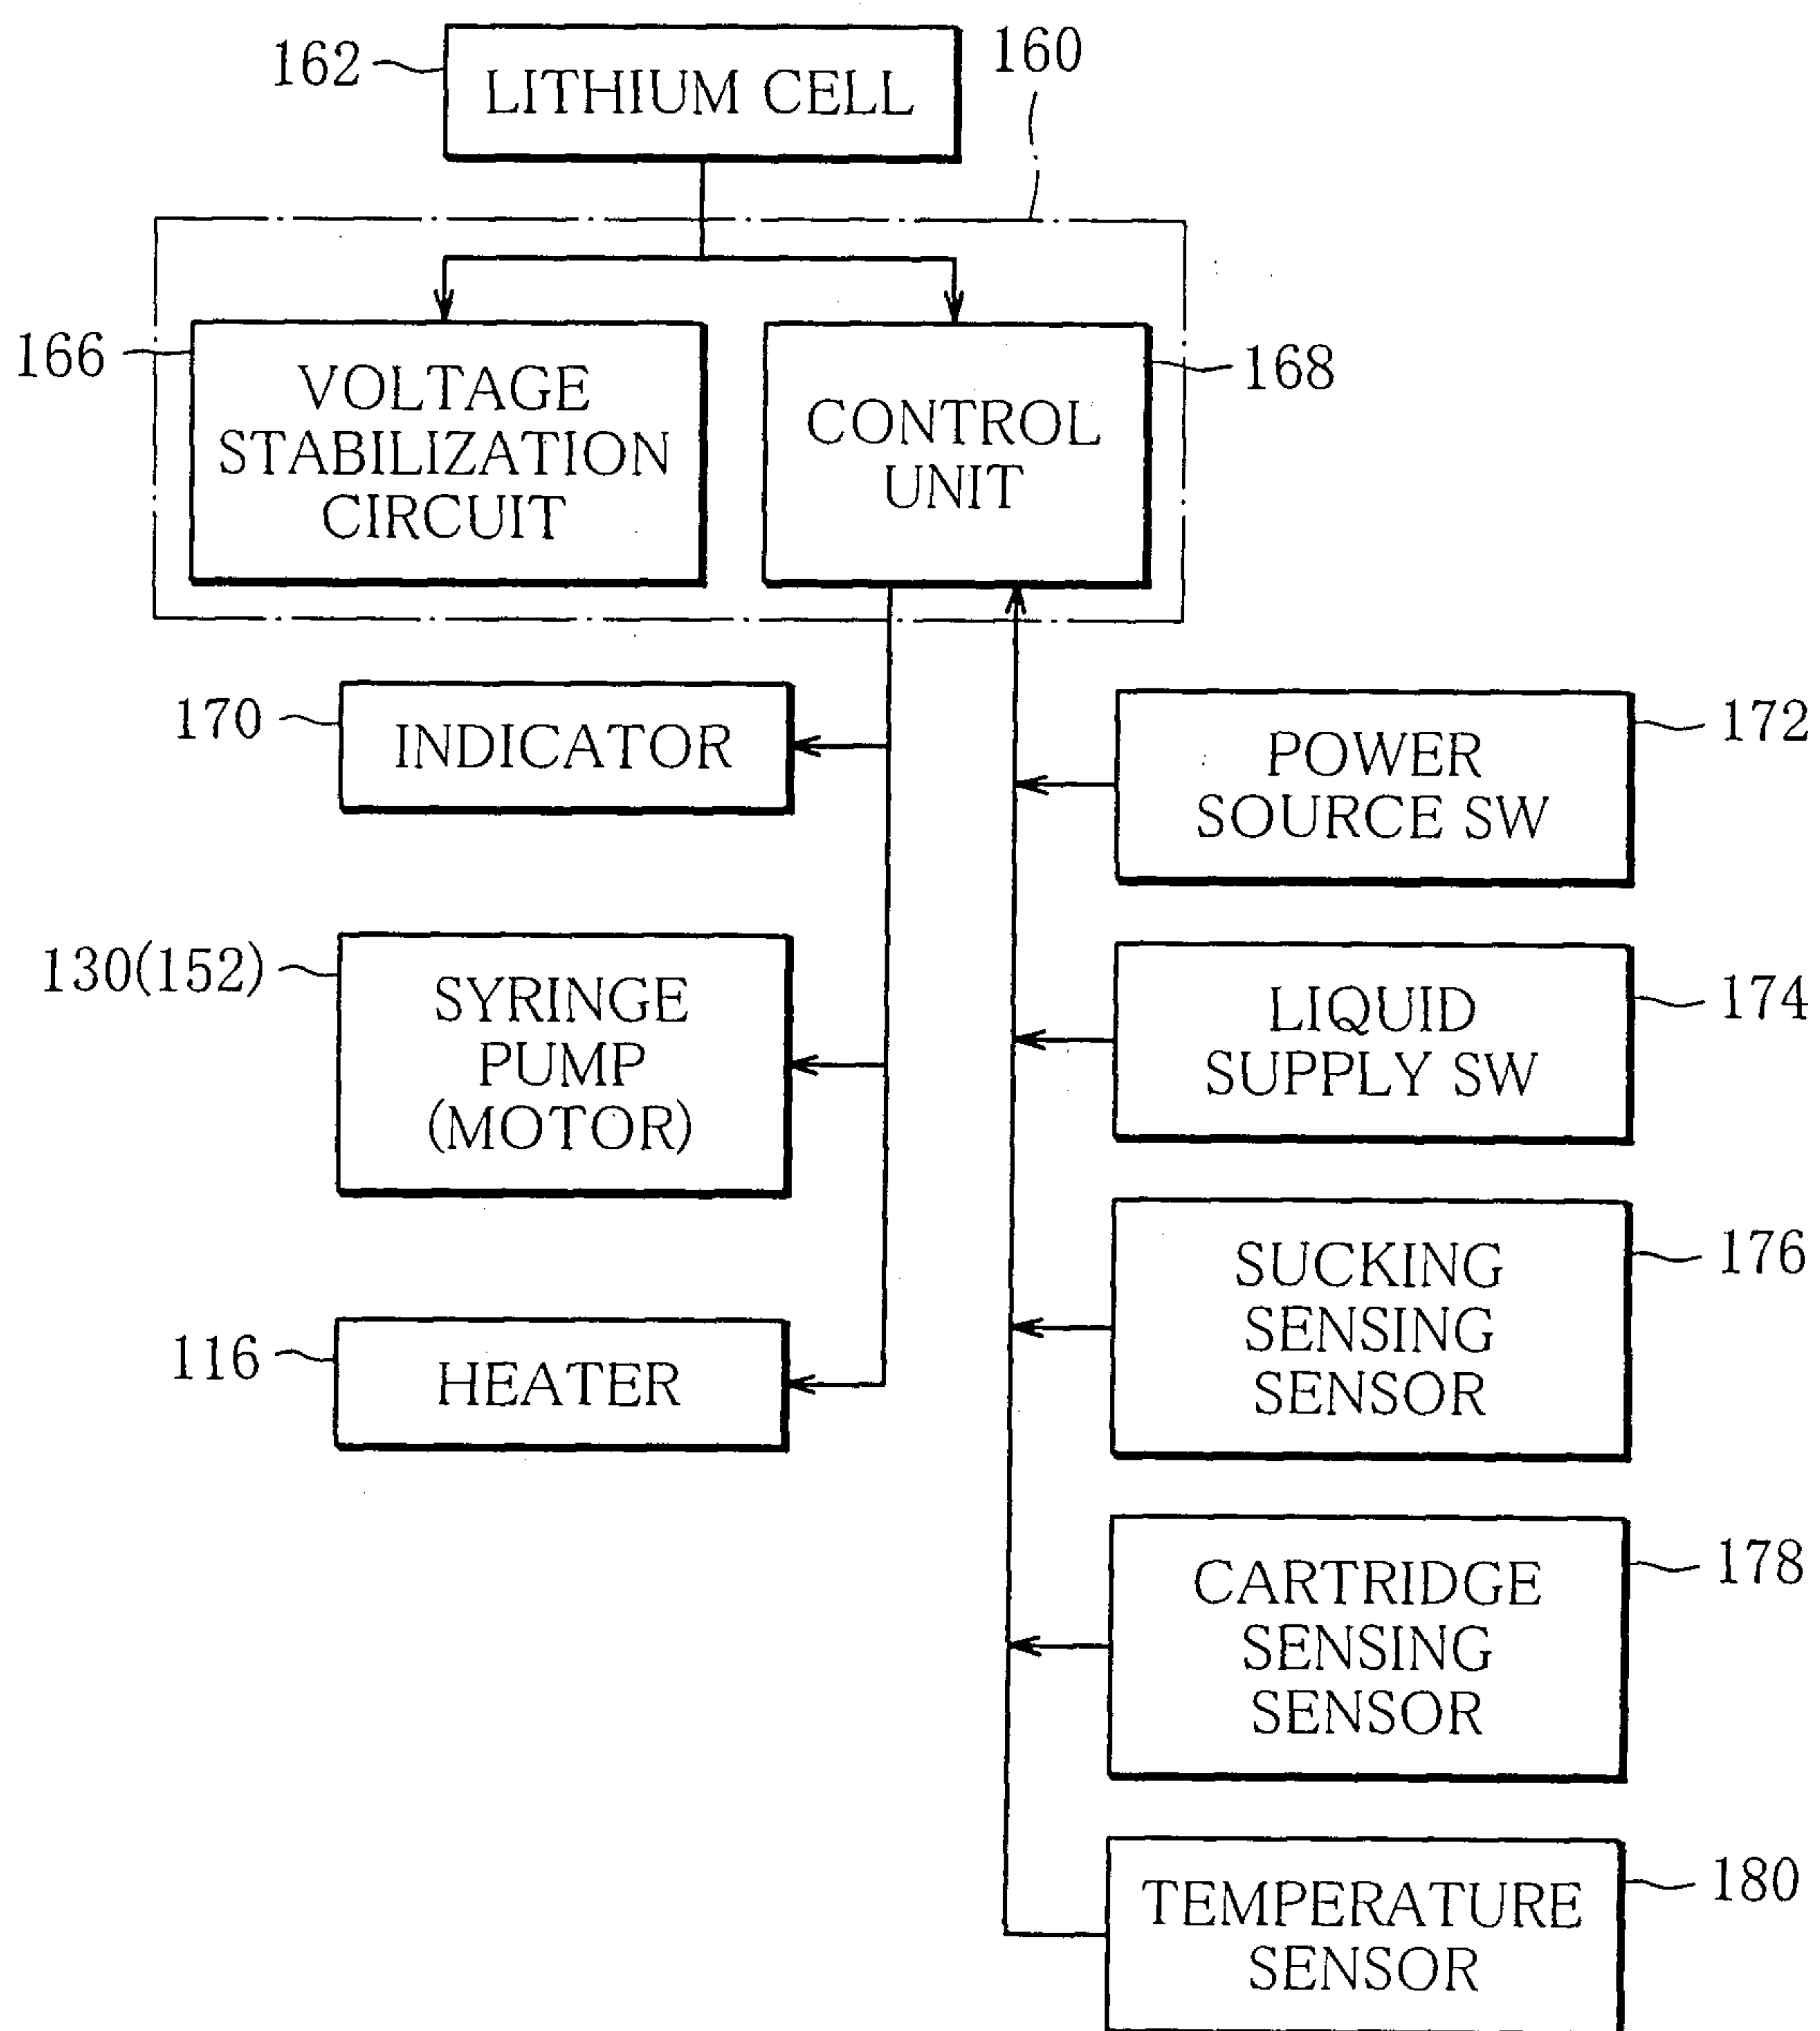

6/8

FIG. 8



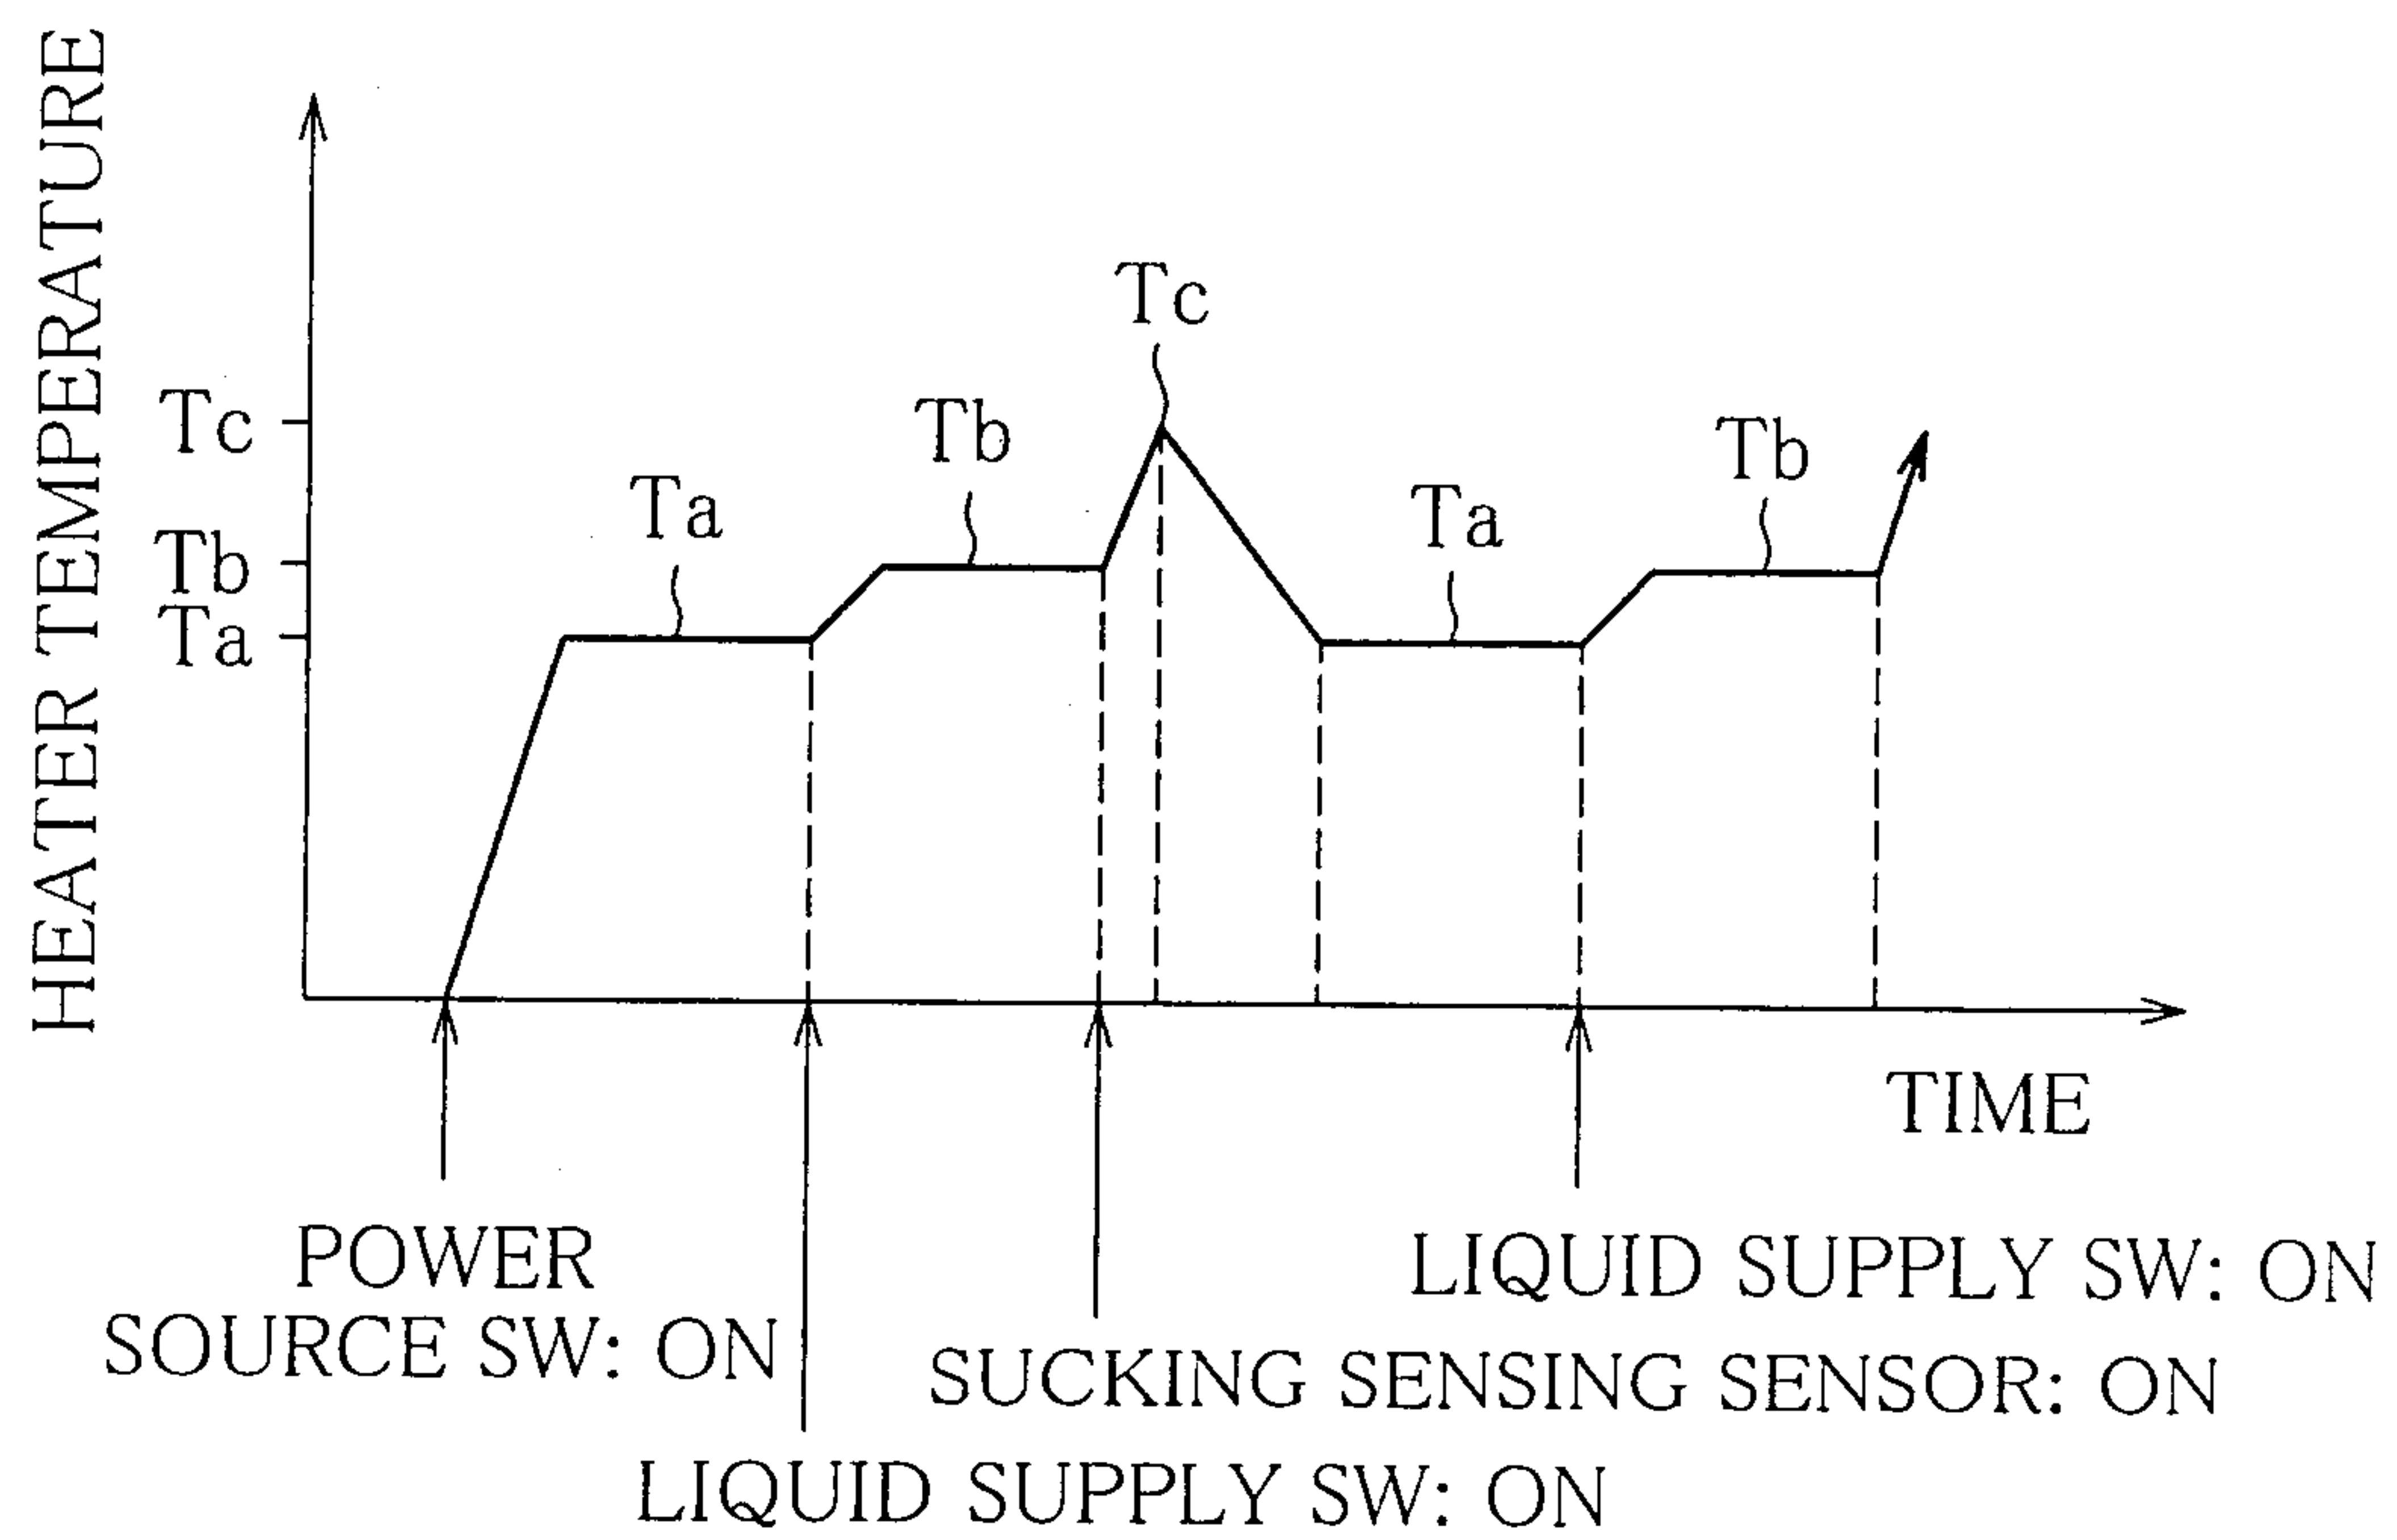


FIG. 9

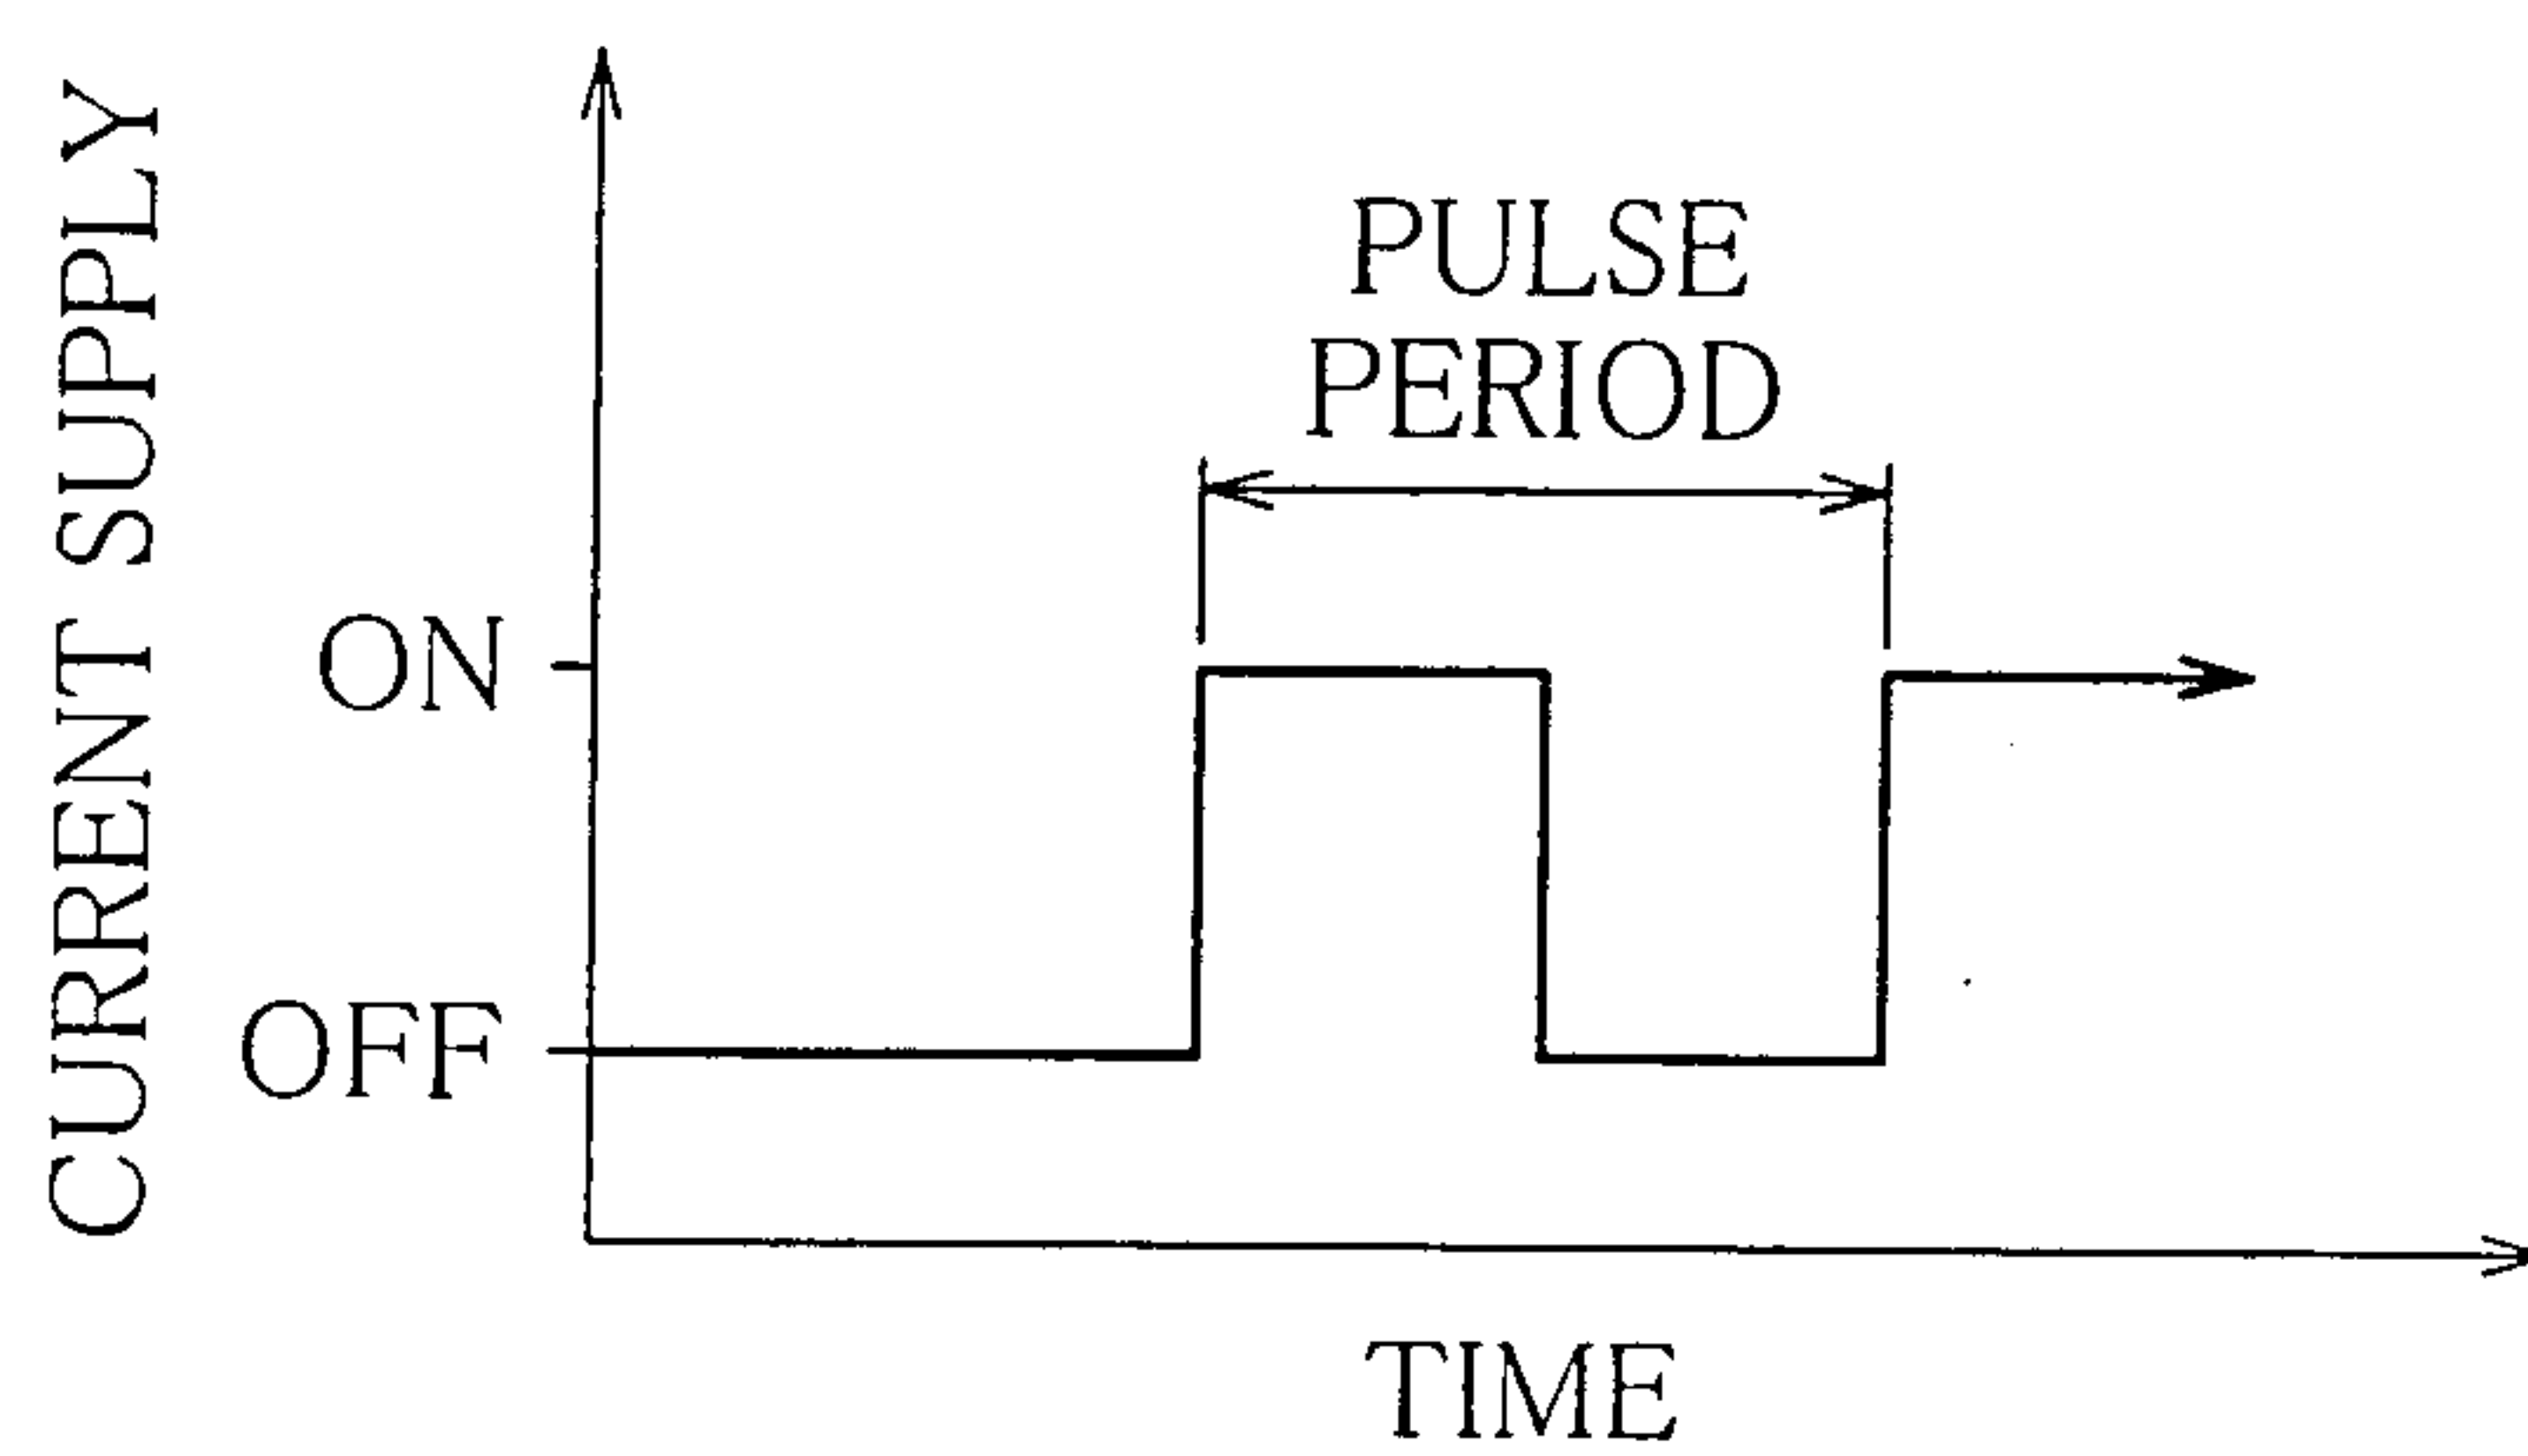

7/8

FIG. 10

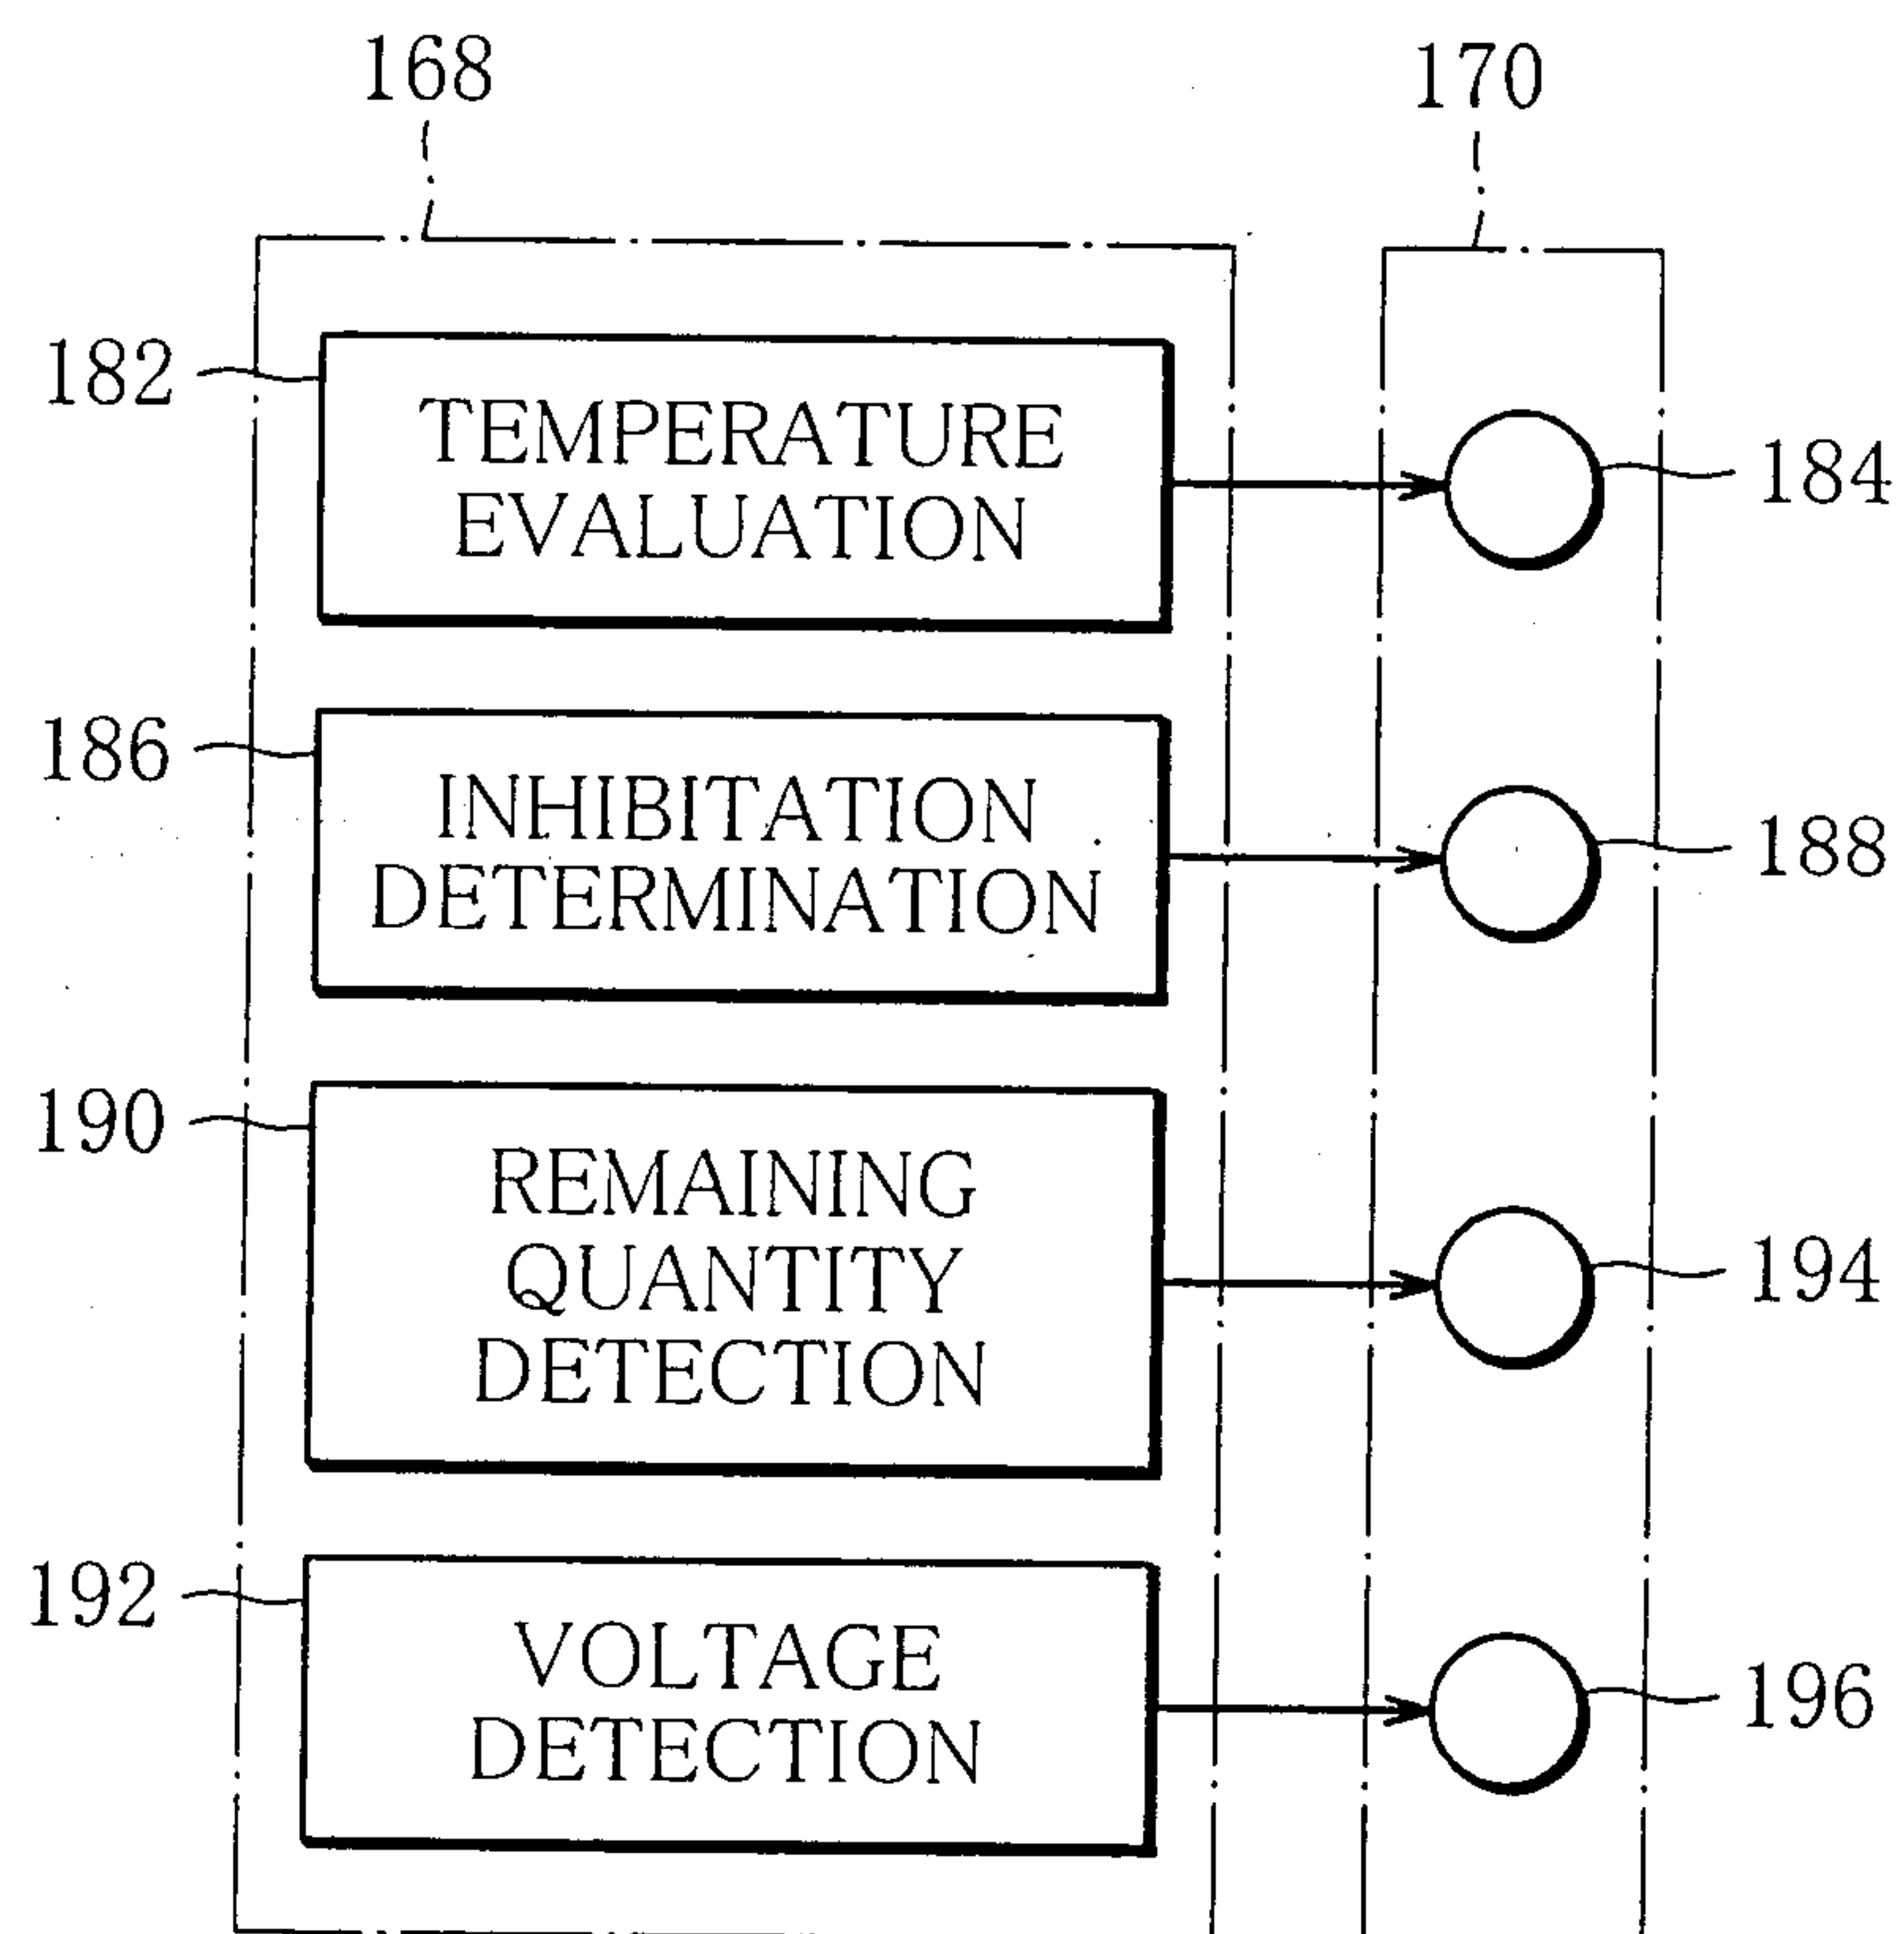

8/8

FIG. 11

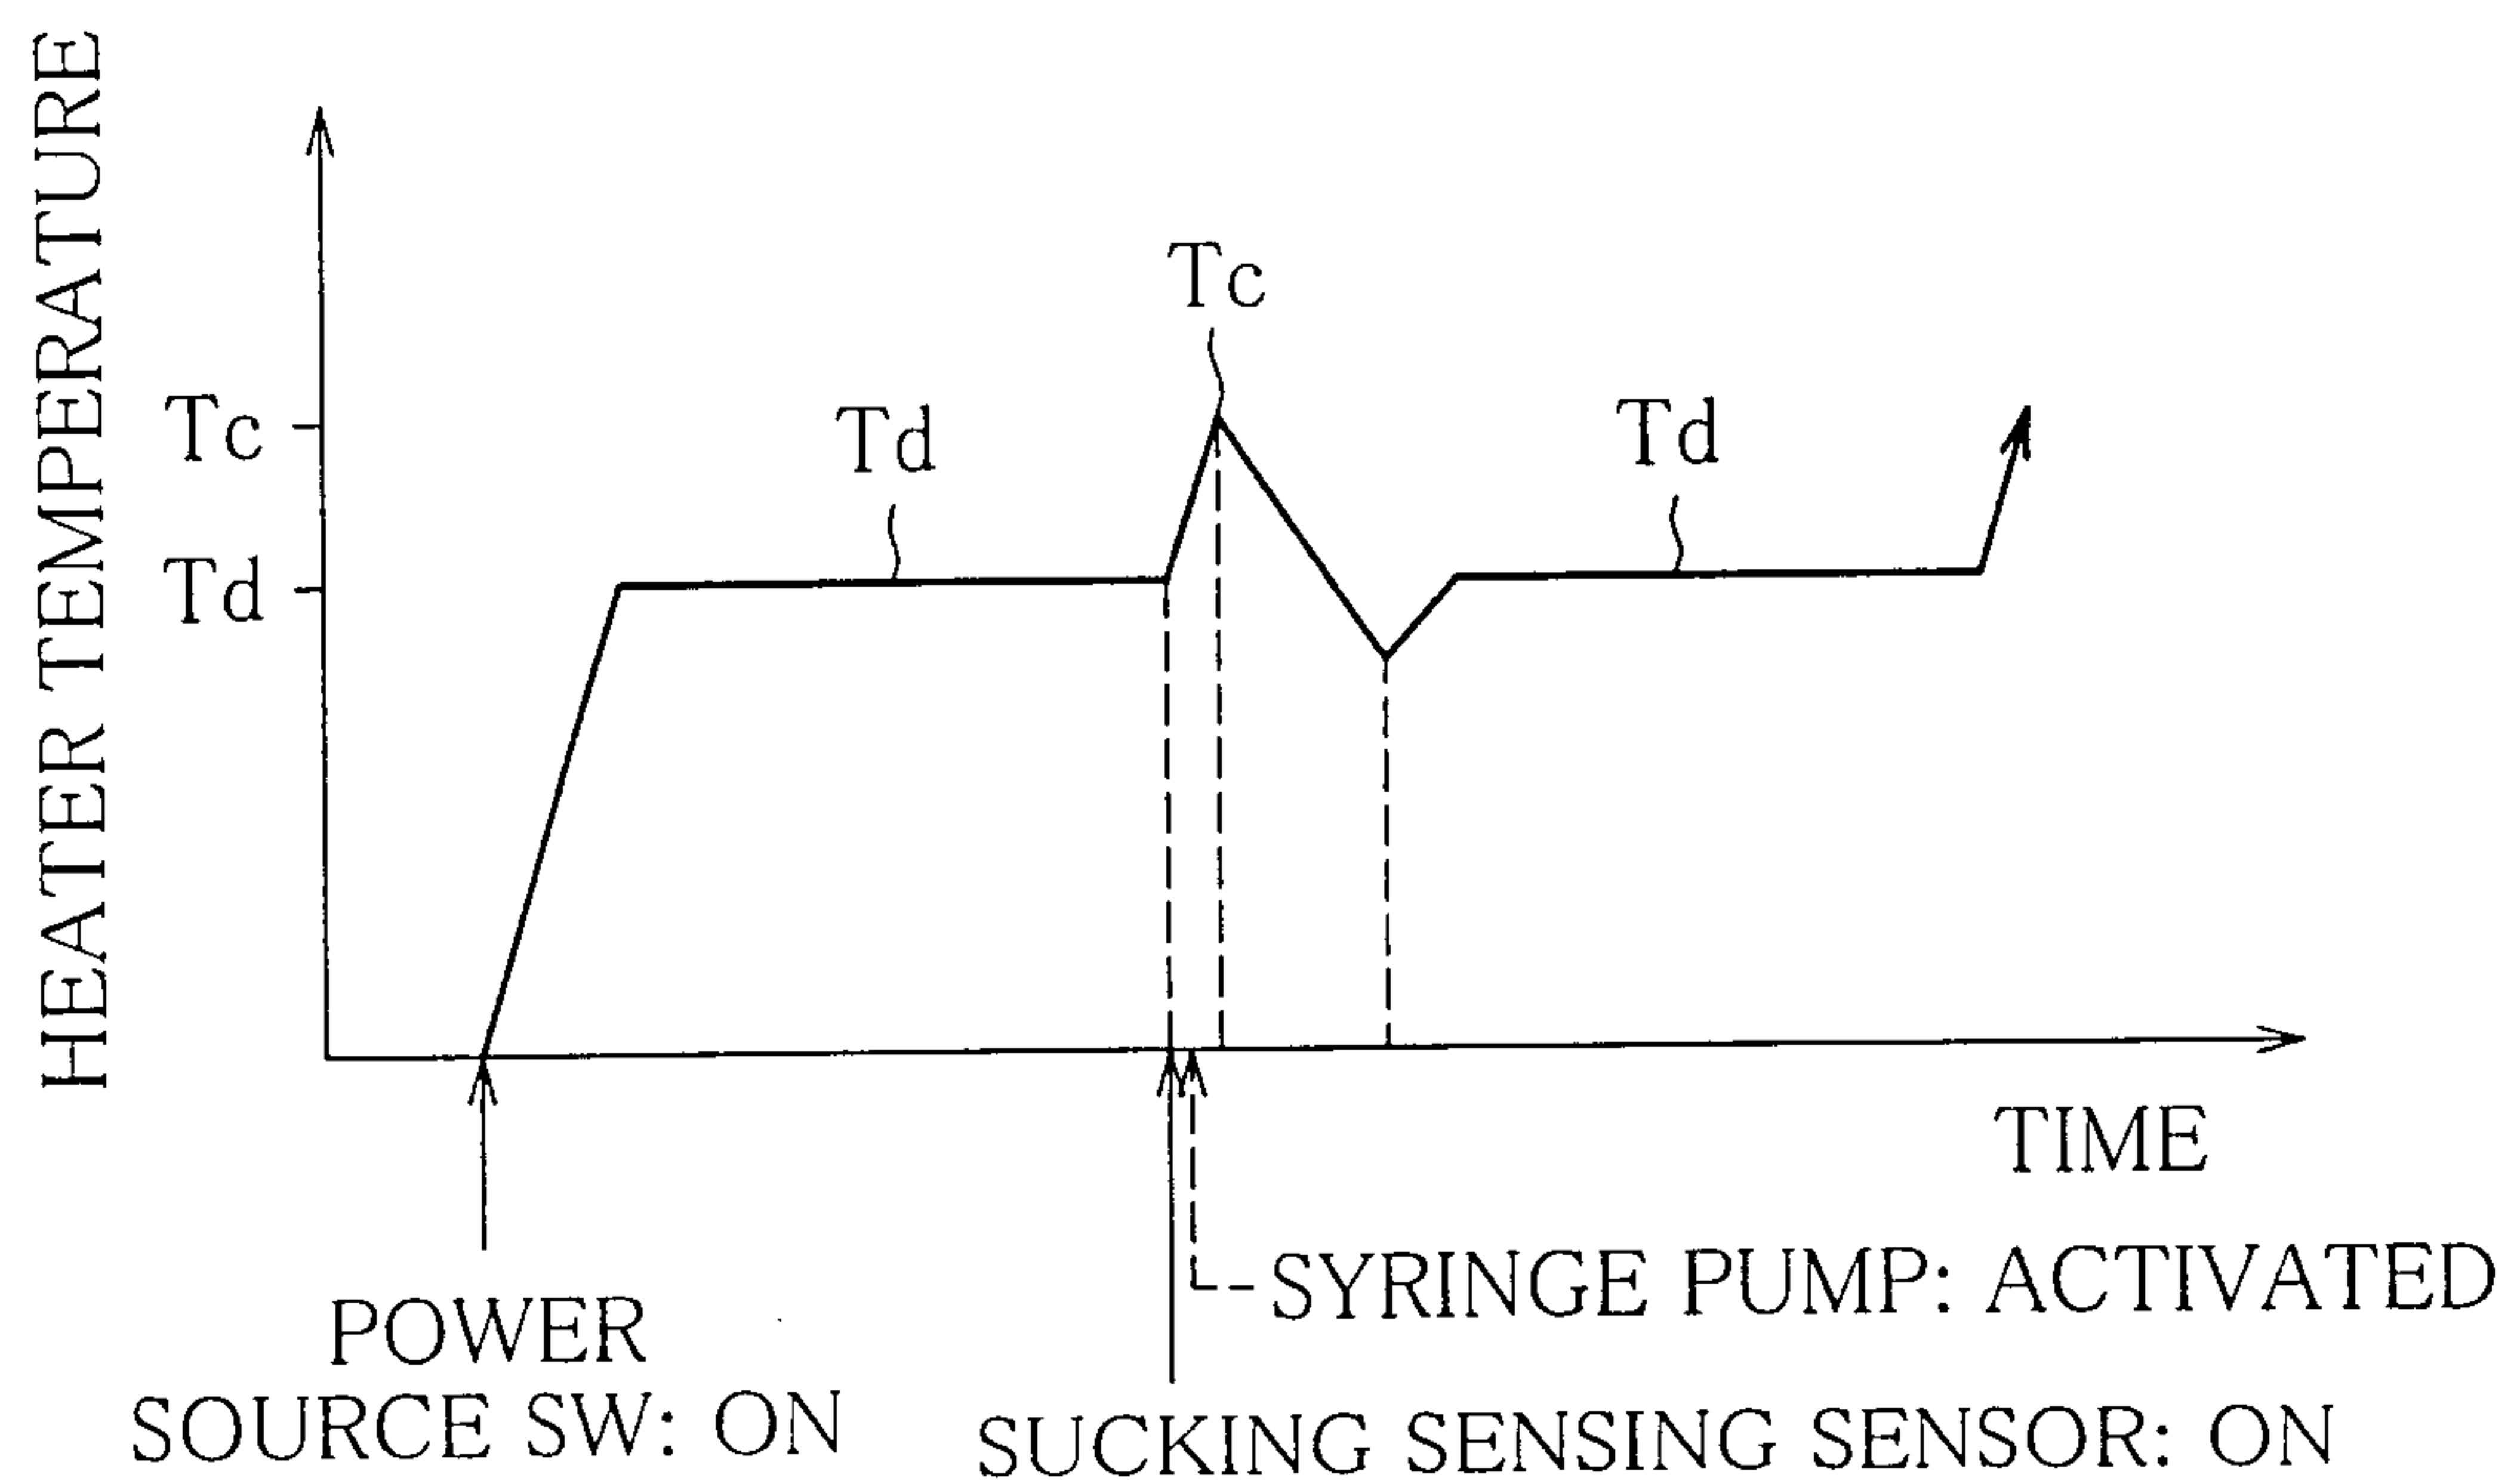


FIG. 12

