



(51) International Patent Classification:

E21B 37/00 (2006.01)

E21B 34/00 (2006.01)

E21B 34/06 (2006.01)

Aldine Westfield, Houston, Texas 77073 (US). **PORTER, Andre J.**; 17021 Aldine Westfield, Houston, Texas 77073 (US).

(21) International Application Number:

PCT/US2018/061785

(74) **Agent: HENDRYX, Thomas** et al.; Baker Hughes, a GE company, LLC, 14990 Yorktown Plaza Drive, Houston, Texas 77040 (US).

(22) International Filing Date:

19 November 2018 (19.11.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/818,285

20 November 2017 (20.11.2017) US

(71) Applicant: **BAKER HUGHES, A GE COMPANY, LLC**


[US/US]; 17021 Aldine Westfield, Houston, Texas 77073 (US).

(72) Inventors: **VAN HOVE, Joeri**; 17021 Aldine Westfield,

Houston, Texas 77073 (US). **MUNSHI, Ammar A.**; 17021

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: REVERSE CIRCULATION DEBRIS REMOVAL TOOL WITH WELL CONTROL FEATURE

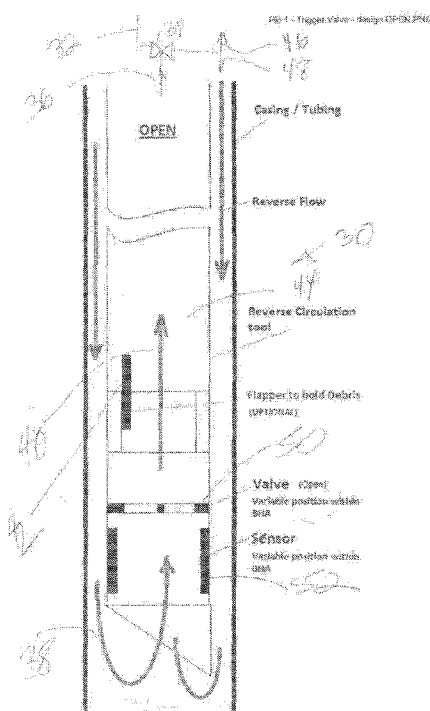

(57) **Abstract:** A reverse circulation debris cleanup tool has a pressure control valve that closes up a passage through the body based on a sensed well condition to help pressure control the well when rams close around the tool to isolate the surrounding annulus. The sensor can hold the valve open for a predetermined time to allow debris removal operations and then close. The debris chamber below an eductor in a VACS tool can be thousands of feet long and the valve can provide protection during running in or removal of the tool from well pressure events so as to avoid using shear rams and losing the bottom hole assembly in the borehole and a fishing operation to get it out.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

REVERSE CIRCULATION DEBRIS REMOVAL TOOL WITH WELL CONTROL FEATURE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Application No. 15/818285, filed on November 20, 2017, which is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

[0002] The field of the invention is wellbore cleaning devices and more particularly devices that collect debris with reverse circulation and employ a closure for well control when the device is run in or pulled out of the hole.

BACKGROUND OF THE INVENTION

[0003] Wellbore cleanup tools such as those offered by Baker Hughes Incorporated, a GE company under the name VACS have been in use to remove and capture borehole debris. These tools work on an eductor powered by tubing flow from the surface to draw debris laden flow into the bottom of the tool. The flow enters through an inlet tube surrounded by a debris reservoir. The heavier debris settles into the reservoir while smaller debris continues up the tool drawn by the eductor fluid inlet at which there is a reduced pressure due to the connected motive fluid. The drawn fluid is moved through a screen inside the tool to further remove particulates. The eductor discharge is laterally to the surrounding annulus where the flow can go in two opposed directions. Most of the flow goes to the surface through the annulus and the rest goes down the annulus and is drawn into the open lower end of the tool with fresh debris laden flow. Some examples of this tool are shown in US 7,472,745 and more recently as improved in US 9494005. Flapper valves to retain debris from falling out of a tool once brought into the tool and using sensors to detect well conditions in bottom hole assemblies in a jet cleaning application are shown in US 2009/0151936.

[0004] What the reverse circulation debris cleanup devices have not had in the past is a way to control the well as the devices are run in or being removed. The collected debris reservoirs have also increased in length to over 1000 meters below eductor **34**. The problem this causes is that the tool will have wall openings that cannot be captured in a lubricator because of limited length of lubricators of about 30 meters. This make a need for isolating the formation for running in or removal of the debris cleanup tool. The situation is schematically illustrated in FIG. 1. The debris removal tool **10** has a debris inlet **12** at the lower end. The

lower end **12** is open to flow during normal operation. Arrows **14** schematically illustrate a pressure surge from the formation below which needs to be controlled. Presently such a pressure surge can communicate to the surface despite the fact that rams **16** on a blowout preventer close off the annulus **18** with arrows **20** schematically representing the closure in the annulus **18**. The flow represented by arrows **14** continues unhindered to the surface despite the annulus **18** being secured with rams **16**.

[0005] The present invention addresses this shortcoming in the prior designs by providing a closure against pressure surges from the formation before they even begin. The device adds a valve that stays open for normal operation as shown in FIG. 2 and that can be triggered to close with a sensor that detects a predetermined condition to shut the isolation valve within the tool housing to control the well with the assistance of the closure of the rams to secure the surrounding annulus. These and other aspects of the present invention will be more readily apparent to those skilled in the art from a review of the description of the preferred embodiment and the associated drawings with the understanding that the full scope of the invention is to be determined by the literal and equivalent scope of the appended claims.

SUMMARY OF THE INVENTION

[0006] A reverse circulation debris cleanup tool has a pressure control valve that closes up a passage through the body based on a sensed well condition to help pressure control the well when rams close around the tool to isolate the surrounding annulus. The sensor can hold the valve open for a predetermined time to allow debris removal operations and then close. The debris chamber below an eductor in a VACS tool can be thousands of feet long and the valve can provide protection during running in or removal of the tool from well pressure events so as to avoid using shear rams and losing the bottom hole assembly in the borehole and a fishing operation to get it out.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a prior art schematic view of a reverse circulation debris removal tool without a pressure control valve in a passage therethrough;

[0008] FIG. 2 is a view of a normal operation of a reverse circulation debris removal tool with the through passage valve in the open position;

[0009] FIG. 3 is the view of FIG. 2 with the through passage valve in the closed position.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0010] FIG. 2 shows a reverse circulation debris removal tool **30** schematically. Line **32** comes from a surface location to provide the motive force for eductor **34** to reduce pressure in line **36** so that debris laden fluid represented schematically by arrows **38** can be drawn into the housing. The discharge line from the eductor **34** is connected to the housing and results in flow in the surrounding annulus indicated by arrows **46** and **48**. With line **32** closed at a surface or subsea location and valve **50** also closed, pressure from the formation is isolated from the surface when running in or pulling out of the hole. Arrow **40** indicates the debris laden flow going uphole past a flapper or other closure **42** designed to retain the debris in the housing passage **44** if circulation stops. In between arrow **40** and inlet **36** there is a screen to remove fine particles to minimize erosion in the eductor **34**. The outlet flow from the eductor **34** goes uphole as represented by arrow **46** and downhole as represented by arrow **48**. Valve **42** is designed to hold in captured debris but a pressure surge from the formation will open valve **42** making it ineffective in well control situations.

[0011] Valve **50** is provided in passage **44** below the eductor **34** and is controlled in a variety of ways to close at an appropriate time to contain formation pressure safely. A sensor **52** is schematically illustrated in the tool **30** but can easily be part of a communication system from the surface that will trigger the valve **52** to close to contain well pressure.

[0012] FIG. 3 illustrates valve **50** in the closed position. Arrows **54** and **56** schematically illustrate the contained formation pressure in passage **44**. Trapped debris **58** sits on closed flapper **42** that has closed due to lack of flow from the closure of valve **50**.

[0013] The system to trigger the valve **50** to close can include flow or lack of flow, flow rate change, temperature, vibration, magnetic force, rotation, acoustic, electric, applied pressure, pressure cycles, pressure drop or loss, hydrostatic pressure, presence of specific fluids or of fluids having specific physical properties, or a combination of any of the above. Other triggers to selectively close valve **50** pressure drop or vibration induced flow, time delays after the onset of flow to allow the debris cleanup to conclude, dropping objects or fluids into the string or magnets or other types of sonde to trigger the closure of the valve. The signal can be acoustic through the tubular wall or electric within or on either side of a tubular wall. A circulation sub above the debris removal tool can be used to allow circulation after the valve **50** is closed, if desired. Pressure can be delivered from the surface with the valve closed to make sure valve **50** is closed and holding pressure.

[0014] The use of the valve **50** allows tripping in or out with the valve closed for well control purposes. Standard barriers would impede the flow needed during debris capture operations. The implemented solution to provide pressure control protection has to be implemented after the suction created by the eductor has finished sucking in debris and the tool is ready to come out. The valve **50** can be designed to run in closed for protection going in the hole and then triggered to open for at least a predetermined time or until triggered to close either from local conditions or from a surface signal. The fact of the barrier valve **50** closing, if locally initiated, can be signaled to the surface. Alternatively the signal to close can come from the surface. The idea is to control well pressure excursions when running in or pulling out the tool assembly that could be longer than 100 meters for storage capacity.

[0015] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below:

CLAIMS

We claim:

1. A well control assembly for a debris removal tool that operates on a reverse circulation regime, comprising:
 - a housing having an inlet adjacent a lower end thereof;
 - an eductor to draw debris laden fluid into said lower end, said eductor operated with tubing flow into an eductor inlet, said eductor discharging fluid through a wall port in said housing to a surrounding annulus;
 - a debris storage volume in said housing above said lower end;
 - a barrier valve selectively operated to close a passage through said housing for pressure control of a formation below said housing.
2. The assembly of claim 1, wherein:
 - said barrier valve is located in said housing between said wall port and said lower end of said housing.
3. The assembly of claim 1, wherein:
 - said barrier valve controls formation pressure from passing through said passage.
4. The assembly of claim 1, wherein:
 - said barrier valve is located below a storage location for captured debris.
5. The assembly of claim 4, wherein:
 - said storage location for captured debris further comprises a flapper valve that falls shut on loss of flow through said storage location.
6. The assembly of claim 1, wherein:
 - said barrier valve is run in closed and can be locally or remotely operated to open to allow operation of said eductor to capture debris in said housing.
7. The assembly of claim 1, wherein:
 - said barrier valve can be triggered to close based on at least one locally sensed well condition.
8. The assembly of claim 1, wherein:
 - said barrier valve can be triggered to close based on a signal delivered from a remote location to said barrier valve.
9. The assembly of claim 1, wherein:
 - said barrier valve can transmit a signal to a remote location when triggered to close.

10. The assembly of claim 1, wherein:
sensed signals that can close said barrier valve comprises at least one of flow or absence of flow, housing movement, application of a field, passage of time, pressure variation, acoustic, electric, temperature change, physical property change in surrounding well fluid, flow variation and predetermined ambient pressure.
11. A well control method for use with a debris removal tool that operates on a reverse circulation regime, comprising:
providing a housing having an inlet adjacent a lower end thereof;
operating an eductor to draw debris laden fluid into said lower end, said eductor operated with tubing flow into an eductor inlet, said eductor discharging fluid through a wall port in said housing to a surrounding annulus;
locating a debris storage volume in said housing above said lower end;
locating a barrier valve selectively operated to close a passage through said housing for pressure control of a formation below said housing.
12. The method of claim 11, wherein:
locating said barrier valve in said housing between said wall port and said lower end of said housing.
13. The method of claim 11, wherein:
controlling formation pressure from passing through said passage with said barrier valve when running in or when pulling out of a hole.
14. The method of claim 11, wherein:
locating said barrier valve below a storage location for captured debris.
15. The method of claim 14, wherein:
providing a flapper valve that falls shut on loss of flow through said storage location, said flapper valve located adjacent said storage location for captured debris.
16. The method of claim 11, wherein:
running in said barrier valve closed and locally or remotely operating said barrier valve to open to allow operation of said eductor to capture debris in said housing.
17. The method of claim 11, wherein:
triggering said barrier valve to close based on at least one locally sensed well condition.
18. The method of claim 11, wherein:
triggering said barrier valve to close based on a signal delivered from a remote location to said barrier valve.

19. The method of claim 11, wherein:
transmitting a signal from said barrier valve to a remote location when said barrier valve is triggered to close.
20. The method of claim 11, wherein:
operating said barrier valve to close with a sensed signal that comprises at least one of flow or absence of flow, housing movement, application of a field, passage of time, pressure variation, acoustic, electric, temperature change, physical property change in surrounding well fluid, flow variation and predetermined ambient pressure.
21. A well control method for use with a debris removal tool that operates on a reverse circulation regime, comprising:
drawing debris laden fluid into the lower end of a housing having an inlet adjacent thereto using an eductor operated with tubing flow;
separating a portion of debris from the debris laden fluid;
storing the portion of debris separated from the debris laden fluid in a portion of the housing above the lower end;
retaining debris laden fluid previously drawn into the lower end of said housing and preventing additional fluid or pressure from the surrounding wellbore through said housing with a selectively closed barrier valve located between said lower end and said eductor in said housing.

Fig 3 - Trigger Valve - design NO VALVE.PNG

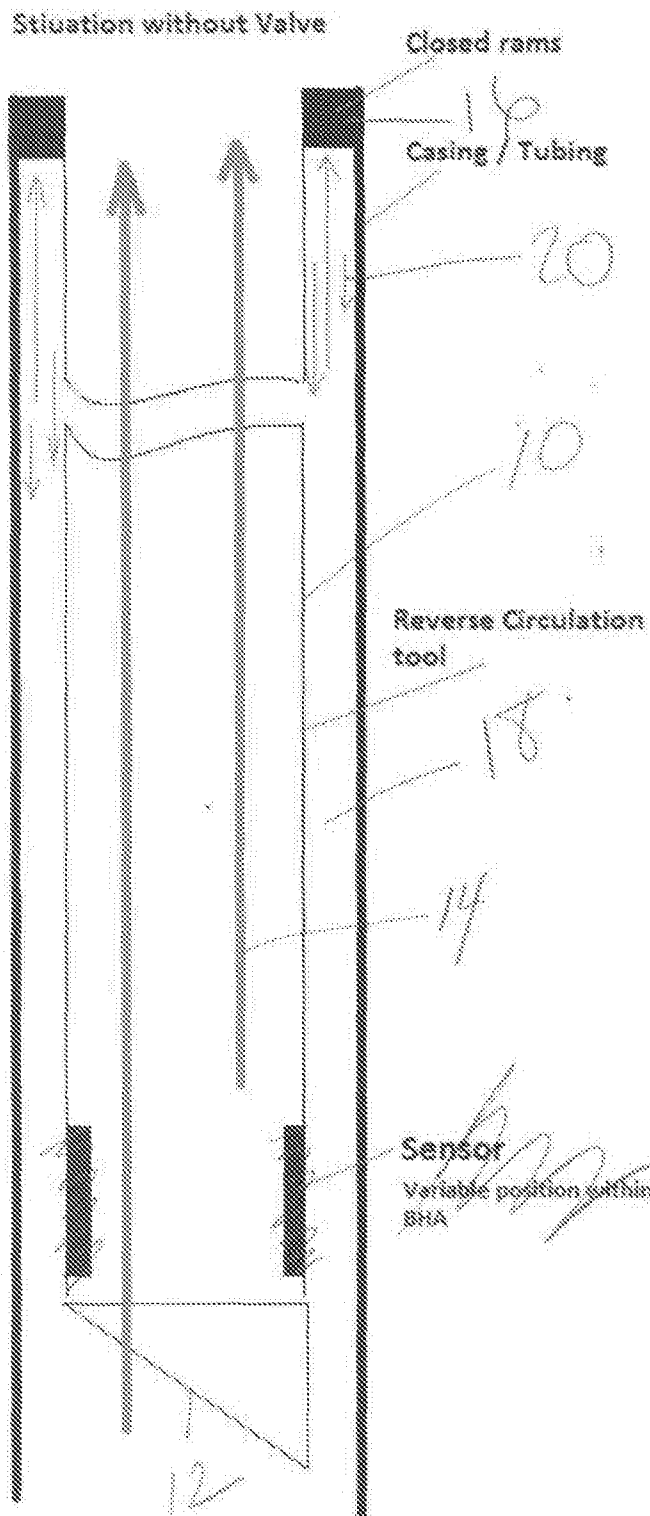


FIG 1
FIG 2
FIG 3

FIG 1 - Trigger Valve - design OPEN.PNG


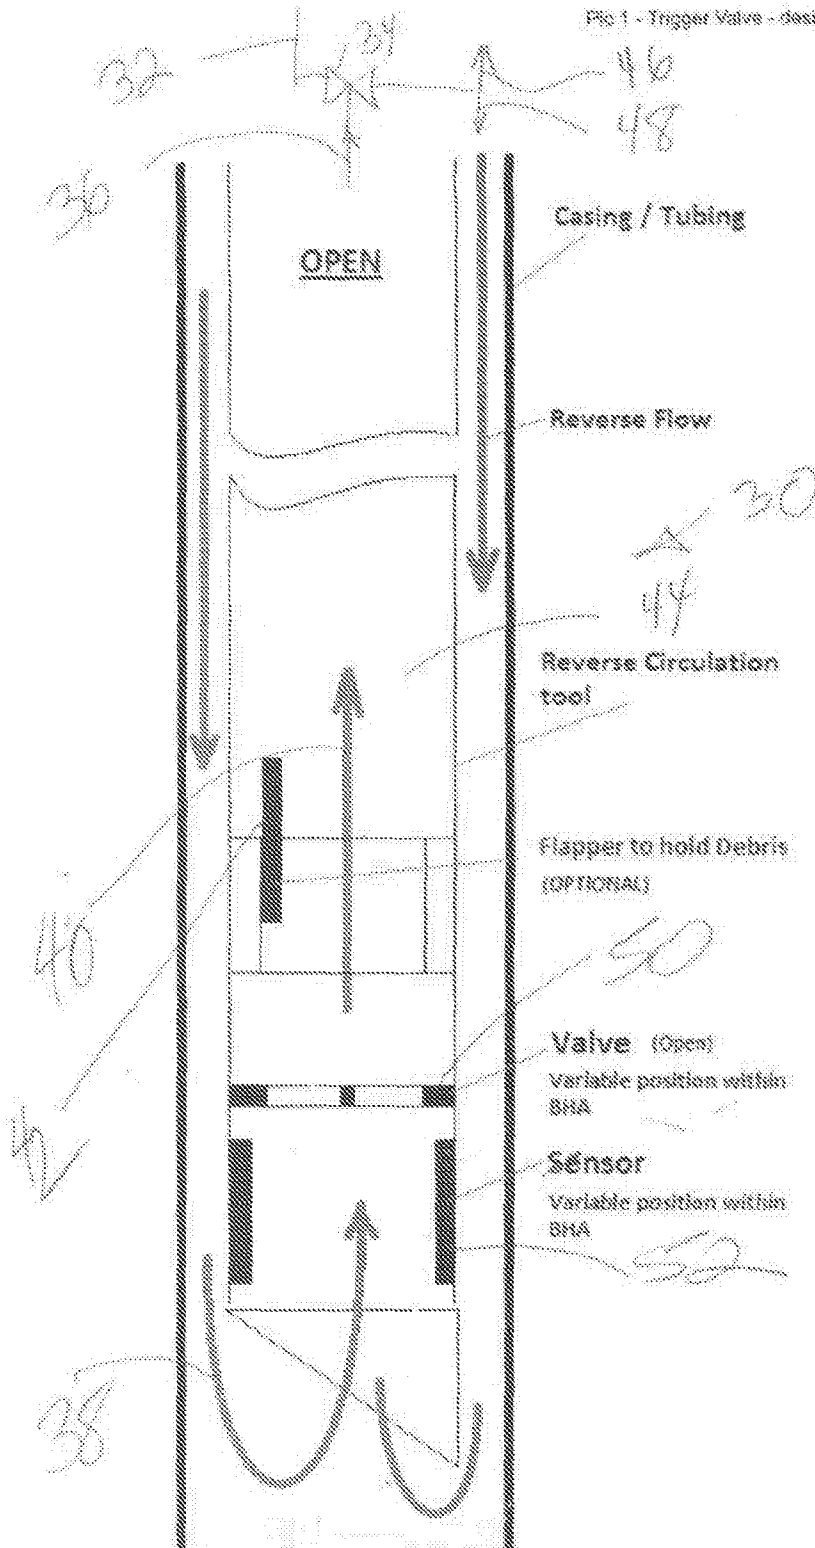


FIG 2

FIG. 2 - Trigger Valve - design CLOSED.PNG

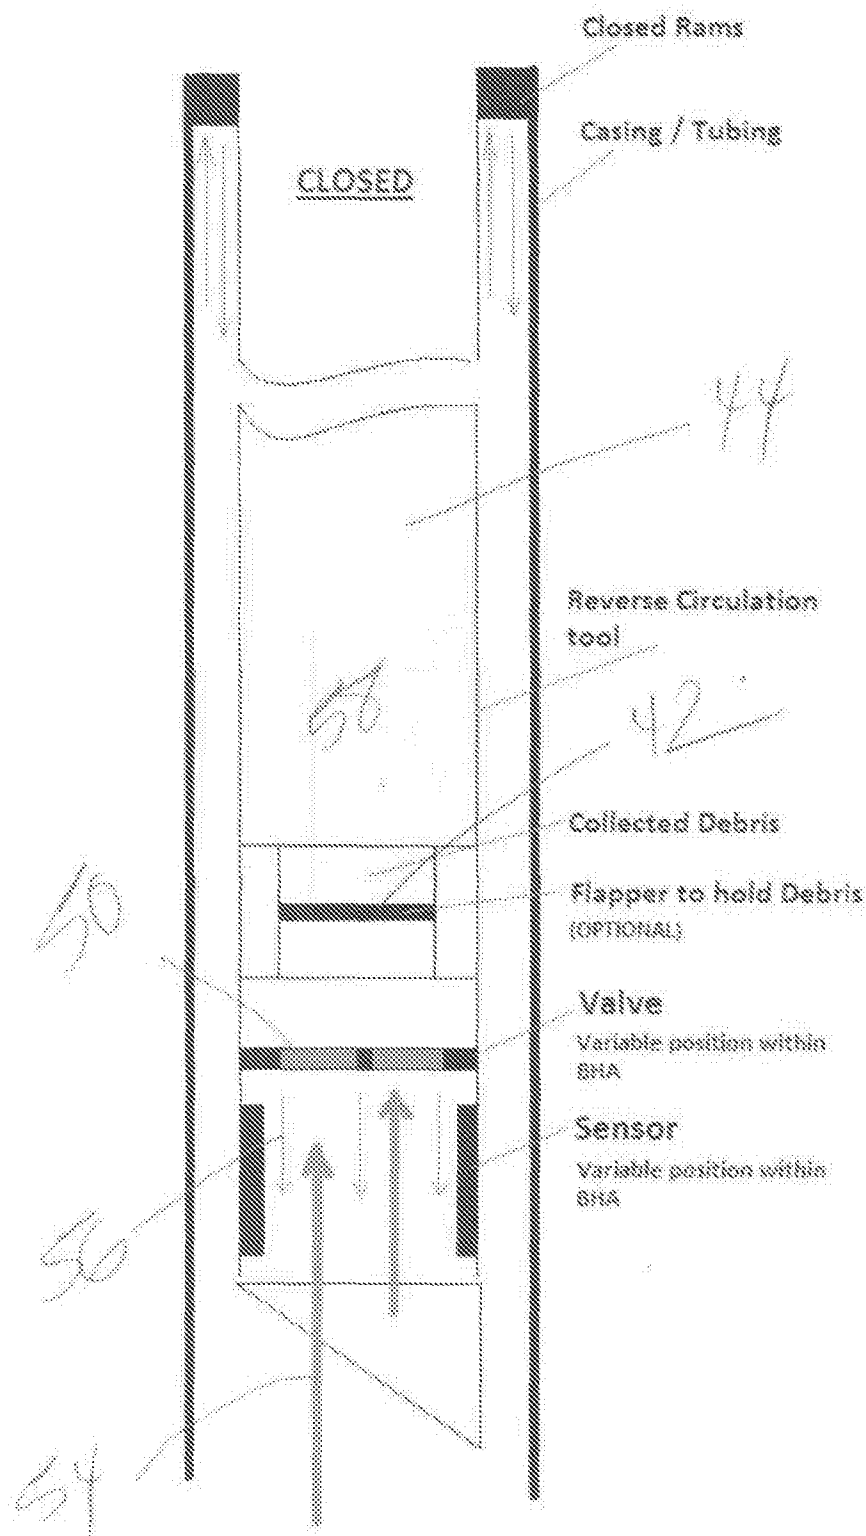

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/061785**A. CLASSIFICATION OF SUBJECT MATTER****E21B 37/00(2006.01)i, E21B 34/06(2006.01)i, E21B 34/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 37/00; E21B 31/08; E21B 34/06; E21B 43/12; E21B 43/38; E21B 34/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: well control assembly, housing, barrier valve, eductor, debris removal tool

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012-0145402 A1 (HILLIARD, PAUL) 14 June 2012 See paragraphs [0001]-[0060], claims 1-13 and figures 1a-1b, 2a-2b, 3a-3c.	1-21
A	US 2002-0174987 A1 (HOFFMAN et al.) 28 November 2002 See paragraphs [0004]-[0011] and figures 1-2.	1-21
A	US 2015-0345276 A1 (SCHLUMBERGER TECHNOLOGY CORPORATION) 03 December 2015 See paragraphs [0018]-[0021] and figures 2-3.	1-21
A	US 5176208 A (LALANDE et al.) 05 January 1993 See claims 1-9 and figures 1-3.	1-21
A	WO 2009-120957 A2 (M-I L.L.C.) 01 October 2009 See paragraphs [0035]-[0044] and figures 2A-2B.	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

05 March 2019 (05.03.2019)

Date of mailing of the international search report

06 March 2019 (06.03.2019)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

LEE, Hun Gil

Telephone No. +82-42-481-8525



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/061785

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0145402 A1	14/06/2012	CA 2764756 A1 EP 2440742 A2 WO 2010-143000 A2 WO 2010-143000 A3	16/12/2010 18/04/2012 16/12/2010 28/04/2011
US 2002-0174987 A1	28/11/2002	AU 4256401 A CA 2401116 A1 CA 2401116 C CA 2541947 A1 CA 2541947 C DK 1268975 T3 DK 1508667 T3 EP 1268975 A2 EP 1268975 B1 EP 1508667 A2 EP 1508667 A3 EP 1508667 B1 NO 20024090 A NO 329516 B1 US 2003-0226664 A1 US 2004-0177951 A1 US 6427776 B1 US 6640904 B2 US 6719056 B2 US 6978841 B2 WO 01-73262 A2 WO 01-73262 A3	08/10/2001 04/10/2001 05/06/2007 04/10/2001 22/09/2009 17/05/2005 02/01/2007 02/01/2003 09/03/2005 23/02/2005 27/04/2005 23/08/2006 30/10/2002 01/11/2010 11/12/2003 16/09/2004 06/08/2002 04/11/2003 13/04/2004 27/12/2005 04/10/2001 21/03/2002
US 2015-0345276 A1	03/12/2015	EP 3152390 A1 EP 3152390 A4 US 10072472 B2 WO 2015-187806 A1	12/04/2017 22/11/2017 11/09/2018 10/12/2015
US 5176208 A	05/01/1993	None	
WO 2009-120957 A2	01/10/2009	CA 2719792 A1 CA 2719792 C EP 2286059 A2 EP 2286059 A4 US 2011-0024119 A1 US 8672025 B2 WO 2009-120957 A3	01/10/2009 30/06/2015 23/02/2011 06/07/2016 03/02/2011 18/03/2014 14/01/2010