

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Constriction device including tear resistant structures

(51)⁶ International Patent Classification(s)
A61B 19/00 (2006.01) 2/00
A61B 17/00 (2006.01) 20060101ALI2007022
A61F 2/00 (2006.01) 4BMEP **A61F**
A61F 2/04 (2006.01) 2/04
A61F 13/00 (2006.01) 20060101ALI2006072
A61B 17/122 2BMEP **A61F**
(2006.01) 13/00
A61B 19/00 20060101ALI2007022
20060101AFI2005122 4BMEP **A61B**
OBMJP **A61B** 17/122
17/00 20060101ALN200707
20060101ALI2005122 21BMEP
OBMJP **A61F** PCT/US02/32886

(21) Application No: 2002353813

(22) Application Date: 2002 .10 .15

(87) WIPO No: W003/032864

(30) Priority Data

(31) Number	(32) Date	(33) Country
10/041,907	2001 .10 .18	US

(43) Publication Date : 2003 .04 .28

(43) Publication Journal Date : 2003 .07 .03

(71) Applicant(s)
spiration, Inc.

(72) Inventor(s)
Corcoran, Dean T

(74) Agent/Attorney
Cullen & Co, 239 George Street, Brisbane, QLD, 4000

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 April 2003 (24.04.2003)

PCT


(10) International Publication Number
WO 03/032864 A3

- (51) International Patent Classification: A61F 2/00
- (21) International Application Number: PCT/US02/32886
- (22) International Filing Date: 15 October 2002 (15.10.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/041,907 18 October 2001 (18.10.2001) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 10/041,907 (CON)
Filed on 18 October 2001 (18.10.2001)
- (71) Applicant (for all designated States except US): SPIRATION, INC. [US/US]; 18109 NE 76th St, Redmond, WA 98052 (US).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): CORCORAN, Dean, T. [US/US]; 3411 - 192nd St. SE, Bothell, WA 98012 (US).
- (74) Agents: KASEBURG, Frederick, A. et al.; Graybeal Jackson Haley LLP, 155-108th Avenue NE, Suite 350, Bellevue, WA 98004-5901 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
with international search report
- (88) Date of publication of the international search report:
16 October 2003
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 03/032864 A3

(54) Title: CONSTRICTION DEVICE INCLUDING TEAR RESISTANT STRUCTURES

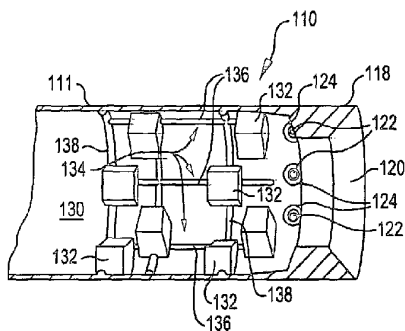

(57) Abstract: A constriction device (70) that constricts body tissue and is formed of relatively thin elastic material includes a tear resistance structure to preclude an inadvertent tear in the device from propagating through the device (70). The tear resistance structure (134) includes a plurality of intersecting ribs (136 and 138) formed in the elastic material. The ribs (136 and 138) circumscribe the device (70) and define rectangular (150 and 152), square (154 and 156), diamond (158), wavy (160 and 162), or knurled patterns.

CONstriction DEVICE INCLUDING TEAR RESISTANT STRUCTURES**BACKGROUND OF THE INVENTION**

- 5 [1] The present invention is generally directed to a
constriction device that constricts body tissue. The present
invention is more particularly directed to a constriction
device that includes tear resistant structures to preclude
propagation of a tear in the device for protecting the
10 integrity of the constriction device.
- [2] Constriction devices have been contemplated for
constricting body tissue. Such devices have been considered
for use, for example, in tissue resection procedures and in
treating pulmonary disease.
- 15 [3] Chronic Obstructive Pulmonary Disease (COPD) has
become a major cause of morbidity and mortality in the United
States over the last three decades. COPD is characterized by
the presence of airflow obstruction due to chronic bronchitis
or emphysema. The airflow obstruction in COPD is due largely
20 to structural abnormalities in the smaller airways. Important
causes are inflammation, fibrosis, goblet cell metaplasia, and
smooth muscle hypertrophy in terminal bronchioles.
- [4] The incidence, prevalence, and health-related costs
of COPD are on the rise. Mortality due to COPD is also on the
25 rise. In 1991 COPD was the fourth leading cause of death in
the United States and had increased 33% since 1979.
- [5] COPD affects the patient's whole life. It has three
main symptoms: cough; breathlessness; and wheeze. At first,
breathlessness may be noticed when running for a bus, digging
30 in the garden, or walking up hill. Later, it may be noticed
when simply walking in the kitchen. Over time, it may occur
with less and less effort until it is present all of the time.
- [6] COPD is a progressive disease and currently has no
cure. Current treatments for COPD include the prevention of

further respiratory damage, pharmacotherapy, and surgery. Each is discussed below.

[7] The prevention of further respiratory damage entails the adoption of a healthy lifestyle. Smoking cessation is
5 believed to be the single most important therapeutic intervention. However, regular exercise and weight control are also important. Patients whose symptoms restrict their daily activities or who otherwise have an impaired quality of life may require a pulmonary rehabilitation program including
10 ventilatory muscle training and breathing retraining. Long-term oxygen therapy may also become necessary.

[8] Pharmacotherapy may include bronchodilator therapy to open up the airways as much as possible or inhaled β -agonists. For those patients who respond poorly to the foregoing or who
15 have persistent symptoms, Ipratropium bromide may be indicated. Further, courses of steroids, such as corticosteroids, may be required. Lastly, antibiotics may be required to prevent infections and influenza and pneumococcal vaccines may be routinely administered. Unfortunately, there is no evidence
20 that early, regular use of pharmacotherapy will alter the progression of COPD.

[9] Lung transplantation is also an option. Today, COPD is the most common diagnosis for which lung transplantation is considered. Unfortunately, this consideration is given for
25 only those with advanced COPD. Given the limited availability of donor organs, lung transplant is far from being available to all patients.

[10] About 40 years ago, it was first postulated that the tethering force that tends to keep the intrathoracic airways
30 open was lost in emphysema and that by surgically removing the most affected parts of the lungs, the force could be partially restored. Although the surgery was deemed promising, the procedure was abandoned.

[11] The lung volume reduction surgery (LVRS) was later
35 revived. In the early 1990's, hundreds of patients underwent

the procedure. However, the procedure has fallen out of favor due to the fact that Medicare stopped remitting for LVRS. Unfortunately, data is relatively scarce and many factors conspire to make what data exists difficult to interpret. The
5 procedure is currently under review in a controlled clinical trial. However, what data does exist tends to indicate that patients benefited from the procedure in terms of an increase in forced expiratory volume, a decrease in total lung capacity, and a significant improvement in lung function, dyspnea, and
10 quality of life.

[12] Improvements in pulmonary function after LVRS have been attributed to at least four possible mechanisms. These include enhanced elastic recoil, correction of ventilation/perfusion mismatch, improved efficiency of
15 respiratory musculature, and improved right ventricular filling.

[13] The improvements in pulmonary function resulting from LVRS cannot be ignored. However, the surgery is very invasive and fraught with complications. Among the complications is the
20 potential for lung air leaks. Lung tissue is very thin, and fragile hence difficult to suture together. After a lung portion is sectioned and removed, the remaining lung is most often restructured with suture staples. In about thirty percent (30%) of the cases, the difficulty with suturing lung
25 tissue results in air leaks. Treatment for such air leaks depends upon their severity and often, in the most serious cases, requires further open chest surgery.

[14] Air leaks in lungs can be caused by other causes. With increasing age, a patient may develop a weakened section
30 of lung which may then rupture due to an extreme pressure differential, such as may result from simply a hard sneeze. AIDS patients can suffer from air leaks in their lungs. Air leaks in lungs can further be caused by a puncture from a broken rib or a stab wound.

[15] The invention disclosed and claimed in copending United States Application Serial No. 09/534,244, incorporated herein by reference, provides an improved therapy for treating COPD and air leaks in lungs. The therapy includes a
5 constriction device which, when deployed on a lung, suppresses air leaks in the lung tissue without requiring any suturing of the effected lung tissue. Still further, by constricting a large enough portion of a lung with the device, lung volume reduction with the concomitant improved pulmonary function may
10 be obtained without the need for any suturing of lung tissue at all.

[16] The lung constriction device includes a jacket or sheath of flexible material configured to cover at least a portion of a lung. The jacket has a pair of opened ends to
15 permit the lung portion to be drawn into the jacket. The jacket is dimensioned to constrict the lung portion after the lung portion is drawn therein. The lung constriction device is preferably formed of expandable, such as elastic, material for receiving the lung tissue while the device is in an expanded or
20 enlarged condition, and then contractible about the lung portion upon release of the expanded condition for constricting the lung tissue.

[17] An important aspect of the device and method disclosed in United States Application Serial No. 09/534,244 is
25 the ability to sever the constricting device intermediate its ends. This allows a significant portion of the constricted lung tissue to be removed altogether while permitting a portion of the constricting device to remain in the body for continued suppression of air leaks and maintenance of the remaining lung
30 tissue integrity.

[18] Devices and methods similar to those disclosed in United States Application Serial No. 09/534,244 may be employed to advantage in other and different procedures such as in
35 general resection procedures and for body tissue other than lung tissue. Resection procedures are commonly performed for

such body tissue as, for example, atrial appendage tissue, ovarian tissue, gall bladder tissue, pancreatic tissue, appendix tissue and spleen tissue. Resection procedures may be required to treat cancer, organ damage, or organ disease, for example.

5
[19] United States Application Serial No. 09/534,244 also discloses and claims various methods and apparatus for deploying the constricting device on body tissue such as lung tissue. One apparatus and method contemplates mechanically
10 expanding the device in a transverse dimension while physically pulling the tissue to be constricted into the device.

[20] Another method contemplates mounting the device over a vacuum chamber and pulling the tissue into the vacuum chamber by engaging the tissue with an opened end of the chamber and
15 then drawing a vacuum in the chamber. This draws the tissue into the chamber. Then, the chamber is withdrawn from the device, leaving the tissue constricted in the device.

[21] A further method contemplates inserting the device into a vacuum chamber and sealing the opened end of the chamber
20 to the device. The opened end of the chamber and the tissue are then brought into sealing engagement. A vacuum is next pulled in the chamber and the device to pull the tissue into the device and chamber. Once the tissue is within the device, the chamber is removed from over the device leaving the tissue
25 constricted in the device.

[22] Although various methods and apparatus have been conceived for effectively deploying constriction devices on body tissue, the constriction devices, over time, may become dislodged due to the nature of the soft tissue on which they
30 are deployed. More specifically, soft body tissue has a tendency to expand at the proximal end of the device causing longitudinal slippage of the device on the body tissue. This may eventually lead to the device slipping totally free from the tissue.

[23] To meet the needs for fixation, United States application Serial No. 09/902,821, filed July 10, 2001, and incorporated herein by reference, discloses and claims a constriction device having positive fixation structure for maintaining the constriction device deployed on the body tissue.

[24] One disclosed device includes a plurality of fixation elements on the inner surface of the sleeve that grasp the body tissue upon release of the sleeve from the expanded condition. More particularly, the fixation elements are adjacent to one of the opposed openings and arranged in a side-by-side relation to grasp the body tissue between adjacent fixation elements when the sleeve is released from the expanded condition. The fixation elements may be integral to the longitudinal side wall or adhered to the inner surface of the sleeve. Still further, the inner surfaces of the fixation elements may have roughened surfaces to further assist in grasping the constricted body tissue.

[25] While the fixation structures disclosed and claimed in the aforementioned United States application Serial No. 09/902,821 are believed to be sufficient alone for maintaining the constriction device on the constricted body tissue, other forms of fixation may be further employed alone or in combination with the above described fixation structures for maintaining the constriction device on the constricted body tissue. One additional form of fixation widely practiced in the medical field is suturing.

[26] While suturing would appear to be an option, simply suturing the constriction device to the constricted body tissue would pose a number of problems. Such problems would arise because the material from which the constriction device is formed is relatively thin elastic material. The suturing of such material could easily cause tearing of the device by the suture. Moreover, the very act of puncturing the device material with a suture needle could readily cause tearing of

the device material. Copending U.S. Application Serial No. 09/969,949 filed October 2, 2001 and incorporated herein by reference discloses a constriction device configured to permit the suturing of the device to constricted body tissue while
5 protecting against tearing of the device material by either the suture or a suture needle.

[27] In one disclosed embodiment, the device has an increased thickness about each suture hole to reinforce the suture holes. The increased thickness may have a tapered
10 cross-section for guiding a suture needle into the suture holes and may extend from the inner surface of the device or from the outer surface of the device.

[28] While the suture hole reinforcement mentioned above represents an important advancement towards protecting the
15 constriction device against tears during suturing, there is still the possibility that the device may be accidentally punctured or torn outside of a suture hole during deployment. Since, as previously mentioned, the device takes the form of a sleeve formed of relatively thin elastic material, still
20 further tear resistance would be helpful for protecting against tear propagation. The present invention provides such additional tear propagation protection.

SUMMARY OF THE INVENTION

[29] The present invention provides a constriction device that is tear resistant. The device includes an elongated sleeve having at least one opened end and being formed from elastic material to receive, when in an expanded condition, body tissue to be constricted and to constrict the body tissue
25 when released from the expanded condition. The device further includes a tear resistance structure about the sleeve that precludes propagation of a tear in the sleeve.

[30] The tear resistance structure may be an increased thickness of the sleeve defining a plurality of ribs in the
35 sleeve. The plurality of ribs may include a first plurality

of ribs and a second plurality of ribs which intersect each other. The intersecting ribs may define a pattern of squares, a pattern of diamonds, a pattern including waves, or a knurled pattern. Preferably the ribs are formed on an inner surface
5 of the sleeve.

[31] The present invention further provides a constriction device that constricts body tissue, the device including sleeve means formed of elastic material including at least one opened end for constricting body tissue received
10 therein and tear resistance means about the sleeve for precluding propagation of a tear in the sleeve means.

BRIEF DESCRIPTION OF THE DRAWINGS

[32] The features of the present invention which are
15 believed to be novel are set forth with particularity in the appended claims. The invention, together with further objects and advantages thereof, may best be understood by making reference to the following description taken in conjunction with the accompanying drawings, in the several figures of
20 which like reference numerals identify identical elements, and wherein:

[33] FIG. 1 is a simplified sectional view of a thorax illustrating a respiratory system having a constricting device embodying the present invention deployed on a portion of a
25 lung to effect lung volume reduction;

[34] FIG. 2 is a sectional view similar to FIG. 1 but illustrating the respiratory system after the constricted lung portion has been resected;

[35] FIG. 3 is a perspective view illustrating a
30 constricting device embodying the present invention;

[36] FIG. 4 is a perspective view of the interior of the device of FIG. 3 illustrating a tear resistance structure embodying the present invention;

[37] FIG. 5 is a plan view of one tear resistance
35 structure pattern embodying the present invention;

[38] FIG. 6 is a plan view of another tear resistance structure pattern configured in accordance with another embodiment of the present invention;

[39] FIG. 7 is a further plan view of still another tear resistance structure pattern embodying the present invention; and

[40] FIG. 8 is a still further plan view of another tear resistance structure pattern embodying the present invention.

10

DETAILED DESCRIPTION

[41] Referring now to FIG. 1, it is a sectional view of a respiratory system 20. The respiratory system 20 resides within the thorax 22 which occupies a space defined by the chest wall 24 and the diaphragm 26.

15 [42] The respiratory system 20 includes the trachea 28, the left mainstem bronchus 30, the right mainstem bronchus 32, and the bronchial branches 34, 36, 38, 40, and 42. The respiratory system 20 further includes left lung lobes 52 and 54 and right lung lobes 56, 58, and 60. Each bronchial branch
20 communicates with a respective different portion of a lung lobe, either the entire lung lobe or a portion thereof.

[43] A healthy respiratory system has an arched or inwardly arcuate diaphragm 26. As the individual inhales, the diaphragm 26 straightens to increase the volume of the thorax
25 22. This causes a negative pressure within the thorax. The negative pressure within the thorax in turn causes the lung lobes to fill with air to an inflated condition. When the individual exhales, the diaphragm returns to its original arched condition to decrease the volume of the thorax. The
30 decreased volume of the thorax causes a positive pressure within the thorax which in turn causes exhalation of the lung lobes.

[44] FIG. 1 also shows a constriction device 70 embodying the present invention deployed on lobe 58. The device 70 is
35 configured as a sleeve or sheath formed of a sheet of elastic

biocompatible material. The material may be formed from silicone rubber, polyurethane, expanded polytetrafluoroethylene, polyester and polyurethane, or nylon and polyurethane, for example. The sleeve is preferably
5 opened at both ends and may be generally cylindrical in configuration.

[45] The sleeve may be applied to the lung lobe while in an expanded condition. This may be accomplished by expanding the sleeve with a vacuum and then pulling the lung portion
10 into the sleeve with the vacuum. When the lung portion is within the sleeve, the expansion of the device is released. With the expansion released, the sleeve is permitted to contract or collapse about the lung portion to constrict the lung portion.

15 [46] The device 70 may be employed, for example, to suppress air leakages in lungs. It may also find use to advantage in constricting a lung portion suffering from COPD to simulate or achieve lung volume reduction. All of the beneficial effects of lung volume reduction surgery may be
20 realized and, most importantly, without requiring suturing of lung tissue. The constriction device 70 is sutured to the constricted lung tissue by a suture 71. To that end, the device 70 preferably includes a plurality of suture holes reinforced in accordance with one of the embodiments described
25 in the aforementioned pending U.S. Application Serial No. 09/969,949 so that neither the suture needle nor the suture tears or adversely affects the integrity of the device 70.

[47] FIG. 2 shows the respiratory system 20 after the constricted lung portion has been resected. The device 70
30 is preferably formed of severable material, such as, any of the materials previously described. This enables the device 70 to be severed or cut intermediate its ends with a suitable bladed instrument to resection the lung lobe 58. The portion of the device 70 remaining on the lobe 58 continues to
35 constrict the lung tissue therein to form an effective seal

from leakage. The suture 71 continues to maintain the device 70 on the remaining constricted tissue. Hence, lung volume reduction is rendered an available treatment while negating the need of conventional lung sectioning and avoiding the potentially severe complications which accompany such a procedure.

[48] FIGS. 3 and 4 illustrate a constriction device 110 embodying the present invention. As generally illustrated in FIG. 3, the device 110 is a generally cylindrical sleeve 111 having a longitudinal dimension 112 and a transverse dimension 114. As previously mentioned, the device 110 is preferably formed of a relatively thin elastic material permitting the device to expand in the longitudinal dimension and more importantly in the transverse dimension. For example, the device 110 may be formed from silicone. The device 110 has opposed opened ends 116 and 118. The device may further include at one end, for example, end 118, an integral rim 120.

[49] The device 110 further includes a plurality of suture holes 122. The suture holes 122 are preferably distributed about the device closely adjacent the opened end 118. About each suture hole 122 is a suture hole reinforcement structure 124. The suture hole reinforcement structure 124 of each suture hole 122 is an increased thickness or thickened portion in the sleeve wall forming a ring shaped structure about each suture hole on the inner surface 130 of the sleeve 111. The reinforcement structure 124 of each suture hole 122 may further define a tapered surface to help guide a suture needle through its corresponding suture hole.

[50] As may be best seen in FIG. 4, the device 110 further includes a plurality of fixation elements 132. The fixation elements are arranged in side-by-side relation and project inwardly from the inner surface 130 of the sleeve 111. As described in the aforementioned U.S. Application Serial No. 09/902,821, adjacent fixation elements 132 grasp the body

tissue upon deployment of the sleeve to further maintain the device 110 on the constricted body tissue.

[51] With continued reference to FIG. 4, and in accordance with the present invention, the device 110 includes a tear resistance structure 134. The tear resistance structure 134, in accordance with this embodiment, is an increased thickness in the sleeve 111 defining a plurality of ribs or ridges including a first plurality 136 of ribs and second plurality 138 of ribs. The ribs 136 and 138 are formed on the inner surface 130 of the sleeve 111. The ribs are further arranged so that the first plurality 136 and second plurality 138 of ribs intersect each other. Here, the ribs intersect to form a pattern of rectangles. The rib pattern circumscribes the sleeve 111. By virtue of the tear resistance structure of the rib pattern, any nick or tear will be precluded from propagating beyond the ribs or ridges enclosing the nick or tear. As a result, the overall integrity of the device 110 is protected notwithstanding an accidental or inadvertent nick or tear in the elastic material of the sleeve 111.

[52] FIG. 5 shows another pattern in which the tear resistance ribs may be formed. Here, first and second pluralities 150 and 152 of ribs intersect to form a diamond pattern. Other patterns are shown in FIGS. 6-8. In FIG. 6, first and second pluralities 154 and 156 of ribs intersect to form a pattern of squares. In FIG. 7, the ribs form a knurled pattern 158. In FIG. 8 a first plurality 160 of ribs form a pattern of waves which intersect a second plurality 162 of substantially parallel ribs. As will be appreciated by those skilled in the art, other rib patterns may be used without departing from the present invention.

[53] While the invention has been described by means of specific embodiments and applications thereof, it is understood that numerous modifications and variations could be made thereto by those skilled in the art without departing

2002353813 01 Apr 2008

from the spirit and scope of the invention. It is therefore to be understood that within the scope of the claims, the invention may be practiced otherwise than as specifically described herein.

[54] The term "comprise" and variants of the term such as
5 "comprises" or "comprising" are used herein to denote the inclusion of a stated integer or stated integers but not to exclude any other integer or any other integers, unless in the context or usage an exclusive interpretation of the term is required.

10 [55] Any reference to publications cited in this specification is not an admission that the disclosures constitute common general knowledge in Australia.

The claims defining the invention are as follows:

1. A constriction device that constricts body tissue, the device comprising:

5 an elongated sleeve including at least one opened end and being formed from elastic material to receive, when in an expanded condition, body tissue to be constricted and to constrict the body tissue when released from the expanded condition; and

10 a tear resistance structure about the sleeve that precludes propagation of a tear in the sleeve.

2. The device of Claim 1 wherein the tear resistance structure is an increased thickness of the sleeve.

3. The device of Claim 1 wherein the tear resistance structure is a plurality of ribs in the sleeve.

15 4. The device of Claim 3 wherein the plurality of ribs include a first plurality of ribs and a second plurality of ribs and wherein the first and second pluralities of ribs intersect each other.

20 5. The device of Claim 4 wherein the first and second pluralities of ribs intersect each other to form a pattern of squares.

6. The device of Claim 4 wherein the first and second pluralities of ribs intersect each other to form a pattern of diamonds.

25 7. The device of Claim 4 wherein one of the first and second pluralities of ribs forms a pattern of waves.

8. The device of Claim 7 wherein the pattern of waves is circumferential about the sleeve.

9. The device of Claim 3 wherein the plurality of ribs forms a knurl pattern.

2002353813 01 Apr 2008

10. The device of any one of the preceding claims wherein the tear resistance structure is on an inner surface of the sleeve.

11. The device of any one of the preceding claims wherein the sleeve is formed of a severable material.

5 12. Use of the constriction device of any one of Claims 1 to 11 for constricting body tissue inside a patient.

13. Use of the constriction device of any of Claims 1 to 11 for constricting lung tissue.

10 14. A constriction device substantially as hereinbefore described with reference to DETAILED DESCRIPTION.

15. A constriction device substantially as hereinbefore described with reference to Examples 3 and 4.

DATE: 1 April 2008

1/2

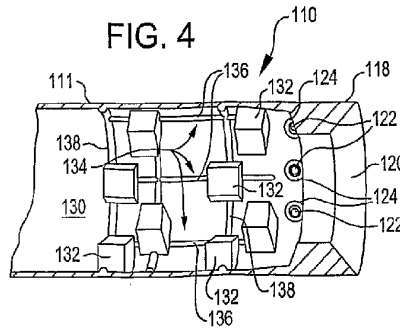
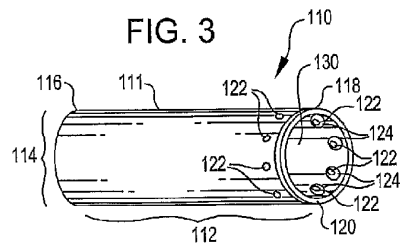
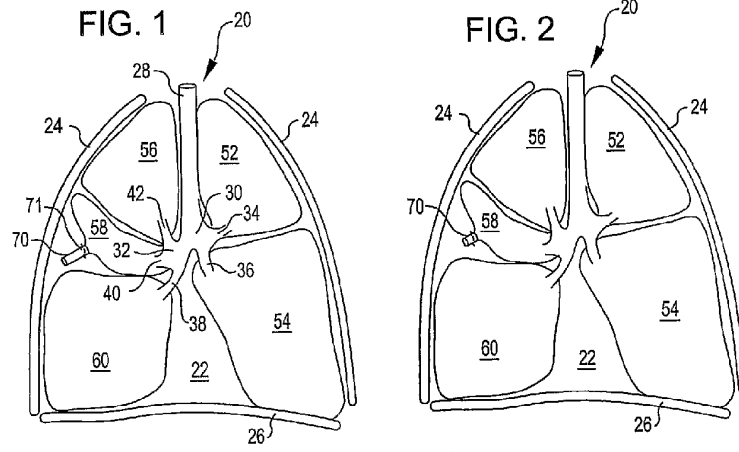


FIG. 5




FIG. 6




FIG. 7




FIG. 8

