



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 491 651 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
29.12.2004 Bulletin 2004/53

(51) Int Cl.7: **C23C 8/24, C22C 27/04**

(21) Application number: **03745433.7**

(86) International application number:
PCT/JP2003/003912

(22) Date of filing: **27.03.2003**

(87) International publication number:
WO 2003/083157 (09.10.2003 Gazette 2003/41)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(30) Priority: **29.03.2002 JP 2002098039**

(71) Applicants:
• **Japan Science and Technology Agency
Kawaguchi-shi Saitama 332-0012 (JP)**
• **National University Corporation Okayama
University
Okayama-shi, Okayama 700-8530 (JP)**
• **A.L.M.T. CORP.
Tokyo 110-0014 (JP)**

(72) Inventors:
• **Takada, Jun
Okayama-shi, Okayama 703-8243 (JP)**
• **Nagae, Masahiro
Tamano-shi, Okayama 706-0012 (JP)**
• **Nakanishi, Makoto
Okayama-shi, Okayama 700-0011 (JP)**
• **Takida, Tomohiro
Toyama-shi, Toyama 930-2243 (JP)**

(74) Representative: **Wagner & Geyer
Partnerschaft
Patent- und Rechtsanwälte
Gewürzmühlstrasse 5
80538 München (DE)**

(54) **NITRIDED Mo ALLOY WORKED MATERIAL HAVING HIGH CORROSION RESISTANCE, HIGH STRENGTH AND HIGH TOUGHNESS AND METHOD FOR PRODUCTION THEREOF**


(57) The present invention provides an innovative material which has properties which cannot be achieved with conventional materials, i.e., having satisfactory high corrosion resistance and high strength in very severe corrosive conditions, for example, a 75% sulfuric acid (H₂SO₄) aqueous solution (180°C) in addition to high strength at high temperatures and high toughness at low temperatures, and provides a method for effectively manufacturing the innovative material.

A worked molybdenum-alloy material, subjected to nitriding, which has high corrosion resistance, high strength, and high toughness, includes fine nitride particles formed by subjecting a nitride-forming-metal element dissolved to form a solid solution in an untreated worked molybdenum-alloy material to internal nitriding, the fine nitride particles being dispersed inside the worked molybdenum-alloy material subjected to nitrid-

ing; and a molybdenum nitride layer formed by subjecting a worked structure or a recovered structure at the surface of the untreated worked molybdenum-alloy material to external nitriding, the molybdenum nitride layer being provided at the surface of the worked molybdenum-alloy material subjected to nitriding. A method for manufacturing a worked molybdenum-alloy material subjected to nitriding includes the steps of subjecting an untreated worked alloy material in which at least any one of titanium, zirconium, hafnium, vanadium, niobium, and tantalum is dissolved to form a solid solution to multi-step internal nitriding treatment including a stepwise increase of the treatment temperature, and then subjecting the worked alloy material to external nitriding treatment.

EP 1 491 651 A1

FIG.1

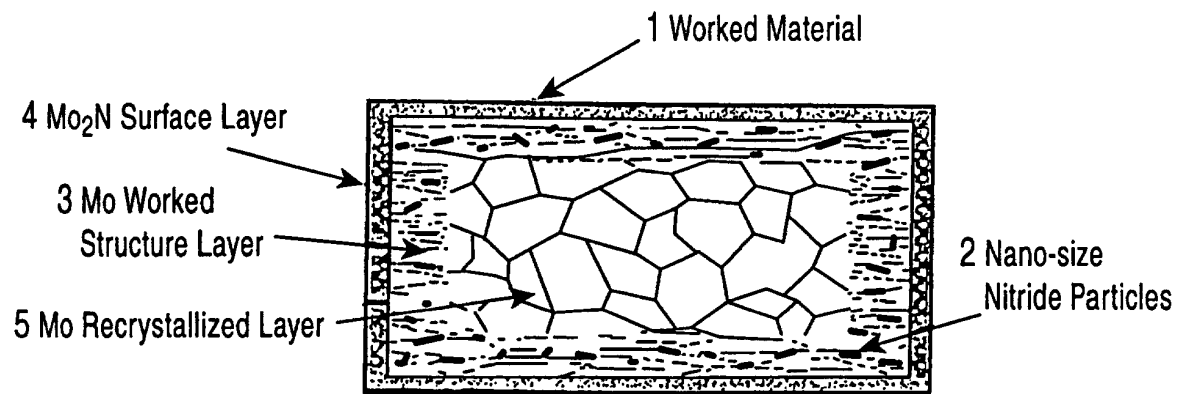

Description

Technical Field

[0001] The present invention relates to a worked molybdenum-alloy material, which is subjected to nitriding, having improved strength, toughness, and corrosion resistance as a result of a combination treatment of internal nitriding and external nitriding, and a method for manufacturing the worked molybdenum-alloy material subjected to nitriding.

Background Art

[0002] Molybdenum (Mo) that has, for example, a high melting point (about 2600°C), relatively high mechanical strength superior to other metals having high melting points, a low thermal expansion coefficient, excellent electrical conduction and thermal conduction properties, and a high corrosion resistance to a melted alkali metal and hydrochloric acid, can be applied to, for example, electrodes, components for vessels, components for semiconductors, components for heat-resistant structures, and materials for nuclear reactors.

[0003] A worked material having a worked structure exhibits high toughness due to suppressed crack growth. However, in a material recrystallized by heating (about 1050°C or more), strength at high temperatures is not satisfactory because a crack readily grows to cause embrittlement. Therefore, Mo-Ti(0.5)-Zr(0.08)-C(0.03) (TZM) alloy and Mo-Nb(1.5)-Ti(0.5)-Zr(0.03)-C(0.03) (TZC) alloy have been developed as molybdenum alloys having improved strength at high temperatures.

[0004] The inventors found that, in a worked refractory-metal-alloy such as an ultrafine-nitride-containing molybdenum alloy formed by multi-step internal nitriding treatment, high toughness and high strength are achieved by maintaining a worked structure in at least the surface region of the worked material (patent document 1, non-patent documents 1 to 3).

[0005] Molybdenum has excellent properties as described above. However, molybdenum has no corrosion resistance against oxidizing acids such as nitric acid and hot concentrated sulfuric acid. Regarding the improvement of the corrosion resistance, the inventors developed a highly corrosion-resistant molybdenum-based composite material having a molybdenum nitride (Mo₂N) with a thickness of 0.5 to 10 μm produced by nitriding molybdenum and a molybdenum alloy (patent document 2).

Patent document 1: Japanese Unexamined Patent Application Publication No. 2001-73060.

Patent document 2: Japanese Unexamined Patent Application Publication No. 11-286770.

Non-patent document 1: Masahiro Nagae, Jun Takada, Yoshito Takemoto, Yutaka Hiraoka, and Tetsuo Yoshio. J. Japan Inst. Metals, 64(2000)747-750.

Non-patent document 2: Masahiro Nagae, Jun Takada, Yoshito Takemoto, Yutaka Hiraoka, and Tetsuo Yoshio. J. Japan Inst. Metals, 64(2000)751-754.

Non-patent document 3: Masahiro Nagae, Jun Takada, Yoshito Takemoto, and Yutaka Hiraoka. Materia Japan, 40 (2001)666-667.

Disclosure of Invention

[0006] Only the metal tantalum (Ta) is useful as a material for use in very severe corrosive conditions (for example, a boiling concentrated sulfuric acid solution). However, tantalum has low strength, in particular, its strength is low at high temperatures; hence, it is inappropriate for an apparatus and a structural material which require high strength. The above-described highly corrosion-resistant molybdenum-based composite material which is developed as an alternative to tantalum by the inventors has a disadvantage in that a base material is recrystallized during the manufacturing process to cause the embrittlement of the entire material.

[0007] Accordingly, it is an object of the present invention to provide an innovative material, which has properties which cannot be achieved with conventional materials, i.e., having satisfactory high corrosion resistance and high strength in very severe corrosive conditions, for example, a 75% sulfuric acid (H₂SO₄) aqueous solution (180°C), in addition to high strength at high temperatures and high toughness at low temperatures, and to provide a method for effectively manufacturing the innovative material.

[0008] The inventors found that a worked molybdenum-alloy material having excellent corrosion resistance against oxidizing acids in addition to high strength and high toughness was effectively and inexpensively produced by subjecting a worked molybdenum material to a combination treatment of internal nitriding and external nitriding.

[0009] That is, a worked molybdenum-alloy material, subjected to nitriding, which has high corrosion resistance, high strength, and high toughness, includes fine nitride particles formed by subjecting a nitride-forming-metal element dissolved to form a solid solution in an untreated worked molybdenum-alloy material to internal nitriding, the fine nitride particles being dispersed inside the worked molybdenum-alloy material subjected to nitriding; and a molybdenum nitride

layer formed by subjecting a worked structure or a recovered structure at the surface of the untreated worked molybdenum-alloy material to external nitriding, the molybdenum nitride layer being provided at the surface of the worked molybdenum-alloy material subjected to nitriding.

[0010] In the above-described worked molybdenum-alloy material subjected to nitriding, the molybdenum nitride layer at the surface of the worked molybdenum-alloy material subjected to nitriding is composed of at least any one of δ -MoN, γ -Mo₂N, and β -Mo₂N.

[0011] In the above-described worked molybdenum-alloy material subjected to nitriding, a layer between the molybdenum nitride layer and the matrix in the inside of the worked molybdenum-alloy material subjected to nitriding has a worked structure or recovered structure.

[0012] In the above-described worked molybdenum-alloy material subjected to nitriding, the inside of the worked molybdenum-alloy material subjected to nitriding has a recrystallized structure.

[0013] A method for manufacturing a worked molybdenum-alloy material subjected to nitriding includes the steps of subjecting an untreated worked alloy in which at least any one of titanium, zirconium, hafnium, vanadium, niobium, and tantalum is dissolved to form a solid solution in a molybdenum matrix to multi-step internal nitriding treatment including a stepwise increase of the treatment temperature, and then subjecting the worked alloy to external nitriding treatment.

[0014] In the method for manufacturing a worked molybdenum-alloy material subjected to nitriding, the internal nitriding treatment is performed with a nitrogen gas, and then the external nitriding treatment is performed with an ammonia gas.

Brief Description of the Drawings

[0015] Fig. 1 is a schematic cross-sectional view of a worked molybdenum-alloy material subjected to nitriding of the present invention. Fig. 2 is a schematic view showing the structures of a worked material at each step (1) to (3) of the internal nitriding treatment in a manufacturing process of a worked molybdenum-alloy material subjected to nitriding. Fig. 3 is a graph showing the results of a corrosion test of a worked molybdenum-alloy material, which is subjected to nitriding, produced in EXAMPLE 1 and EXAMPLE 2 and also showing the result of a pure molybdenum material in COMPARATIVE EXAMPLE. Fig. 4 shows a photograph (a), which is an alternative to a drawing, of the cross-sectional structure of a worked molybdenum-alloy material subjected to nitriding, and also shows a macro photograph (b), which is an alternative to a drawing, after a specimen of a worked molybdenum-alloy material subjected to nitriding was tested by bending. The worked alloy shown in the photographs (a) and (b) are produced in EXAMPLE 2.

Best Mode for Carrying Out the Invention

[0016] Fig. 1 is a schematic view showing an example of the cross-sectional structure of a worked molybdenum-alloy material subjected to nitriding of the present invention. The worked molybdenum-alloy material subjected to nitriding shown in Fig. 1 has a triple-layer structure including a layer having nano-size nitride particles 2 dispersed in the surface region of a worked alloy material 1; a molybdenum nitride (Mo₂N) surface layer 4 produced by subjecting a worked structure or a recovered structure 3 to external nitriding; and a molybdenum recrystallized layer 5. When a worked material composed of an alloy is relatively thin, a worked structure can be completely maintained through the entire worked material. In this case, a double layer structure is produced without the molybdenum recrystallized layer 5.

[0017] A worked material is produced by processing, for example, rolling a dilute alloy which has a matrix composed of molybdenum and in which at least any one of titanium (Ti), zirconium (Zr), hafnium (Hf), vanadium (V), niobium (Nb), or tantalum (Ta) is dissolved to form a solid solution. The term "dilute alloy" means an alloy in which the content of the solute element(s) in a solid solution alloy is about 5 percent by weight or less.

[0018] A worked molybdenum-alloy material, which is subjected to nitriding, having high corrosion resistance, high strength, and high toughness according to the present invention is manufactured by an internal nitriding treatment including steps (1) to (3) and an external nitriding treatment (4) described below. Fig. 2 shows schematic views (1) to (3) illustrating the structures of a worked material at each step (1) to (3), respectively, of the internal nitriding treatment including a stepwise increase of the heating temperature.

(1) First nitriding step: A worked material is heated in a nitriding atmosphere between a temperature 200°C lower than the lower limit temperature of recrystallization and the upper limit temperature of recrystallization to nitride a nitride-forming-metal element. As a result, a worked material in which ultrafine nitride particles are dispersed is formed. In this first nitriding step, nitrogen is diffused into a worked dilute-alloy material while maintaining a worked structure X1 in the worked material. As a result, the nitride-forming-metal element that is dissolved to form a solid solution in a matrix is subjected to preferential nitriding to form subnano nitride particles, which have diameters of about 1 nm to about 2 nm, in the form of plates, the subnano nitride particles being dispersed in the matrix. The

term "preferential nitriding" means a phenomenon in which a nitride-forming-metal element alone is preferentially nitrided but a metal constituting a matrix is not nitrided. A recrystallization temperature is increased due to the pinning effect of the particles precipitated during this nitriding step.

(2) Second nitriding step: The worked alloy produced by the first nitriding step is heated at equal to or more than the lower limit temperature of recrystallization of the worked material in a nitriding atmosphere, thus leading to the grain growth and the stabilization of the ultrafine nitride particles. The grain growth and the stabilization of the precipitated particles induced by this second nitriding step further increase the recrystallization temperature. In nitriding, recrystallization occurs inside a worked material but a worked structure X2 still remains. When a worked material is relatively thin (3 mm or less), a worked structure can be completely maintained through the entire worked material.

(3) Third nitriding step and steps following the third step: The worked material produced by the previous steps is heated in a nitriding atmosphere at equal to or more than the lower limit temperature of recrystallization of the worked material, thus leading to the grain growth and the stabilization of the nitride particles. An object of the third step and steps following nitriding in the third step is to further grow and to further stabilize the nitride particles while retaining a worked structure X3. Bar-shaped nitride particles having a thickness of about 10 nm and having a length of about 50 nm are uniformly dispersed in the molybdenum matrix. For example, fourth and fifth nitriding steps after the third nitriding step can be performed, if necessary.

(4) External nitriding treatment: A molybdenum nitride layer is formed by a strong nitriding treatment. An ammonia gas atmosphere, a nitrogen gas atmosphere, a forming gas atmosphere (the ratio of hydrogen gas to nitrogen gas is 1:9 to 5:5), and an atmosphere produced by subjecting each gas to plasma discharge, may be used as a nitriding atmosphere. Molybdenum nitride formed is at least any one of δ -MoN, γ -Mo₂N, or β -Mo₂N. The external nitriding treatment is performed such that a worked structure or a recovered structure remains between the molybdenum nitride surface layer and the matrix of the inside of the worked material.

[0019] Table 1 shows the relationship between the temperature of heating treatment and the thickness of the surface layer of a Mo-Ti-alloy (Ti content: 0.5 percent by weight). The layer thickness increases with the increase in heating temperature. It is better to increase the layer thickness in view of corrosion resistance. However, it was found that toughness (bending properties) was reduced with the increase in layer thickness. Therefore, striking a balance between toughness and corrosion resistance requires that the external nitriding treatment (about 3 mm or less of layer thickness) be performed at 900°C or less.

(Table 1)

	Pure Mo	Material subjected to internal nitriding up to third step	(Internal nitriding up to third step) + (external nitriding) (2.8 μ m)
Yield strength	550 MPa	1190 MPa	1280 MPa
Maximum strength	750 MPa	1020 MPa	1870 MPa

[0020] A worked molybdenum-alloy material subjected to nitriding of the present invention is useful for, for example, supporting plates for semiconductors, ceramics, and metals; heaters for high-temperature furnaces; components for high-temperature furnaces; structural materials for chemical equipment and apparatuses used in corrosive atmospheres (including high-temperature incinerators); and materials for reactors with supercritical solutions and/or subcritical solutions. In addition, the worked molybdenum-alloy material subjected to nitriding is also useful for, for example, acid-resistant vessels and tubes for oxidizing acids such as sulfuric acid and nitric acid; materials for apparatuses used in very severe corrosive conditions (for example, a boiling concentrated sulfuric acid solution); ultra-high-temperature

heaters; injection molds for metals; and injection nozzles for diesel engines.

EXAMPLES

EXAMPLE 1

[0021] A worked Mo-Ti-alloy (Ti content: 1.0 percent by weight) in the form of a plate having a side of 10 mm and a thickness of 1 mm was subjected to internal nitriding up to the fourth step at predetermined heating temperatures in a nitrogen gas flow (1 atm). The profile of the heating temperature was set as follows: 900°C → 950°C → 1200°C → 1500°C.

[0022] By this multi-step nitriding treatment, the surface region of the worked material (up to about 200 μm in depth from the surface) maintained a worked structure or a recovered structure (the inside of the worked material consisted of a recrystallized structure). In addition, fine titanium nitride particles were precipitated and dispersed in the surface region. Subsequently, external nitriding treatment was performed at 1000°C for 4 hours in an ammonia (NH₃) gas flow (1 atm) to form a molybdenum nitride (for example, γ-Mo₂N) layer having a thickness of 14.0 μm at the surface of the worked material.

[0023] This worked material had a triple layer structure as follows: The surface of the worked material was composed of a molybdenum nitride layer. The inside of the molybdenum nitride layer was composed of a nitride layer of an element which is dissolved to form a solid solution in a molybdenum matrix of a worked structure or a recovered structure in which fine titanium nitride (TiN) particles are precipitated and dispersed. The inside of the nitride layer is composed of a molybdenum-alloy layer having a structure with isometric and coarse recrystallized grain.

[0024] Fig. 3 shows the results of a corrosion test in a boiling 75% concentrated sulfuric acid solution at 185°C in order to evaluate corrosion resistance in severe corrosive conditions. Fig. 3 also shows the results of pure molybdenum as a reference. As shown in Fig. 3, the pure molybdenum was heavily corroded and exhibited a high corrosion rate of 8 mm/year, while the worked material (EXAMPLE 1) of the present invention was hardly corroded and exhibited a corrosion rate of 0.076 mm/year. That is, it was found that the worked material of the present invention exhibited substantially complete corrosion resistance ((corrosion rate)<0.05 mm/year).

EXAMPLE 2

[0025] A worked Mo-Ti-alloy material (Ti content: 0.5 percent by weight) was subjected to internal nitriding up to the third step at predetermined heating temperatures in a nitrogen gas flow (1 atm). The profile of the heating temperature was set as follows: 900°C → 1200°C → 1500°C. The resulting Mo alloy subjected to the internal nitriding up to the third step was further heated (external nitriding treatment) at 900°C for 4 hours in an ammonia gas flow (1 atm) to uniformly form a molybdenum nitride (δ-MoN, γ-Mo₂N) layer at the surface of the worked material. The internal nitrided layer composed of a worked structure or a recovered structure, in which fine titanium nitride particles were precipitated and dispersed by the multi-step nitriding treatment, had a thickness of 310 μm. The external nitrided layer composed of molybdenum nitride had a thickness of 2.8 μm. An X-ray diffraction pattern showed that δ-MoN and γ-Mo₂N were formed at the external nitrided layer.

[0026] Fig. 3 shows the results of a corrosion test in a boiling 75% concentrated sulfuric acid solution at 185°C. The worked material of EXAMPLE 2 was hardly corroded and exhibited a corrosion rate of 0.046 mm/year. That is, the worked material exhibited complete corrosion resistance ((corrosion rate)<0.05 mm/year).

[0027] Table 2 shows the bending strength at room temperature (yield strength and maximum strength) of a worked material subjected to internal nitriding up to the third step (900°C → 1200°C → 1500°C) and a worked material subjected to external nitriding treatment (at 900°C for 4 hours) after internal nitriding up to the third step. Fig. 4 shows a photograph (a) of the cross-sectional structure and a macro photograph (b) of a specimen subjected to the bending test.

(Table 2)

1100°C 4 h	1000°C 4 h	940°C 4 h	900°C 4 h	850°C 4 h	800°C 4 h
30 μm	14.0 μm	4.7 μm	2.8 μm	1.7 μm	1.1 μm

[0028] As shown in Table 2, it was found that both yield strength and maximum strength of the worked material (having a molybdenum nitride layer thickness of about 2.8 μm) subjected to external nitriding treatment at 900°C for 4 hours in EXAMPLE 2 represented high stress values at the same level as those of the material (highly strengthened and highly toughened) subjected to only internal nitriding up to the third step.

[0029] That is, it was proved that a worked molybdenum-alloy material subjected to nitriding of the present invention

had very high strength in addition to high corrosion resistance.

Industrial Applicability

[0030] The present invention provides a worked molybdenum-alloy material, which is subjected to nitriding, having high strength and high toughness in addition to high corrosion resistance against oxidizing acids and thus can be used in the most extreme corrosive conditions. The worked molybdenum-alloy material is effectively and inexpensively produced by only nitriding. The worked molybdenum-alloy material subjected to nitriding contributes to enabling the practical use of molybdenum materials in various applications such as materials for apparatuses used in very severe corrosive conditions (for example, a boiling concentrated sulfuric acid solution), ultra-high-temperature heaters, injection molds for metals, and injection nozzles for diesel engines, as well as various applications of conventional molybdenum or molybdenum alloys.

Claims

1. A worked molybdenum-alloy material, subjected to nitriding, which has high corrosion resistance, high strength, and high toughness, comprising: fine nitride particles formed by subjecting a nitride-forming-metal element dissolved to form a solid solution in an untreated worked molybdenum-alloy material to internal nitriding, the fine nitride particles being dispersed inside the worked molybdenum-alloy material subjected to nitriding; and a molybdenum nitride layer formed by subjecting a worked structure or a recovered structure at the surface of the untreated worked molybdenum-alloy material to external nitriding, the molybdenum nitride layer being provided at the surface of the worked molybdenum-alloy material subjected to nitriding.
2. The worked molybdenum-alloy material subjected to nitriding according to Claim 1, wherein the molybdenum nitride layer at the surface of the worked molybdenum-alloy material subjected to nitriding comprises at least any one of δ -MoN, γ -Mo₂N, and β -Mo₂N.
3. The worked molybdenum-alloy material subjected to nitriding according to Claim 1 or 2, wherein a layer between the molybdenum nitride layer and the matrix in the inside of the worked molybdenum-alloy material subjected to nitriding has a worked structure or recovered structure.
4. The worked molybdenum-alloy material subjected to nitriding according to any one of Claims 1 to 3, wherein the inside of the worked molybdenum-alloy material subjected to nitriding has a recrystallized structure.
5. A method for manufacturing a worked molybdenum-alloy material subjected to nitriding according to any one of Claims 1 to 4, comprising the steps of: subjecting an untreated worked alloy material in which at least any one of titanium, zirconium, hafnium, vanadium, niobium, and tantalum is dissolved to form a solid solution in a molybdenum matrix to multi-step internal nitriding treatment including a stepwise increase of the treatment temperature, and then subjecting the worked alloy material to external nitriding treatment.
6. The method for manufacturing a worked molybdenum-alloy material subjected to nitriding according to Claim 5, wherein the internal nitriding treatment is performed with a nitrogen gas, and then the external nitriding treatment is performed with an ammonia gas.

FIG.1

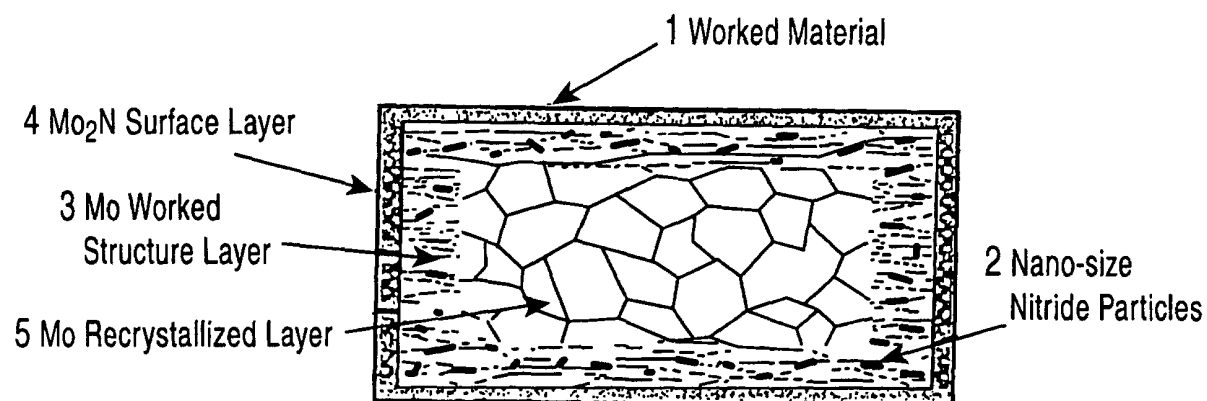


FIG.2

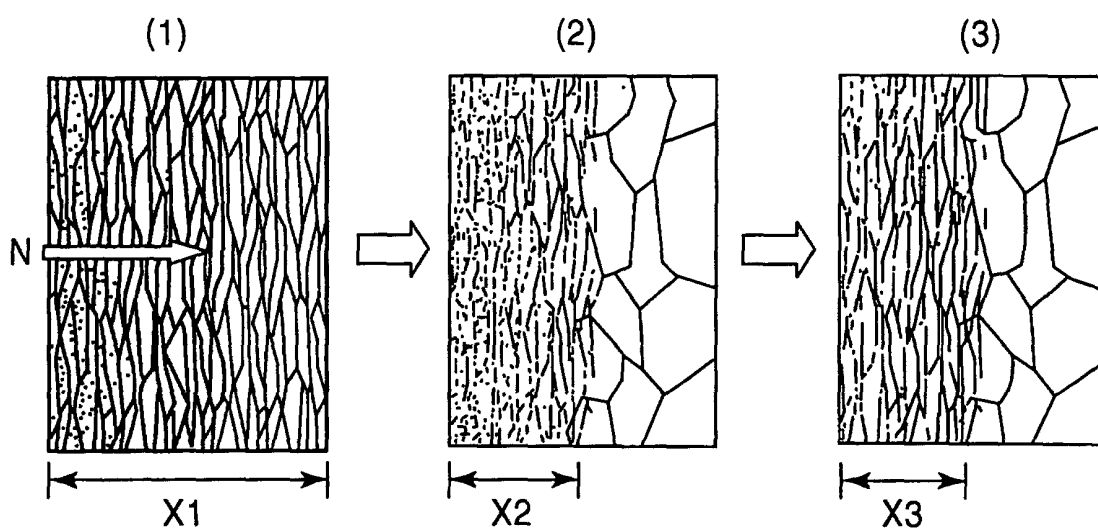


FIG.3

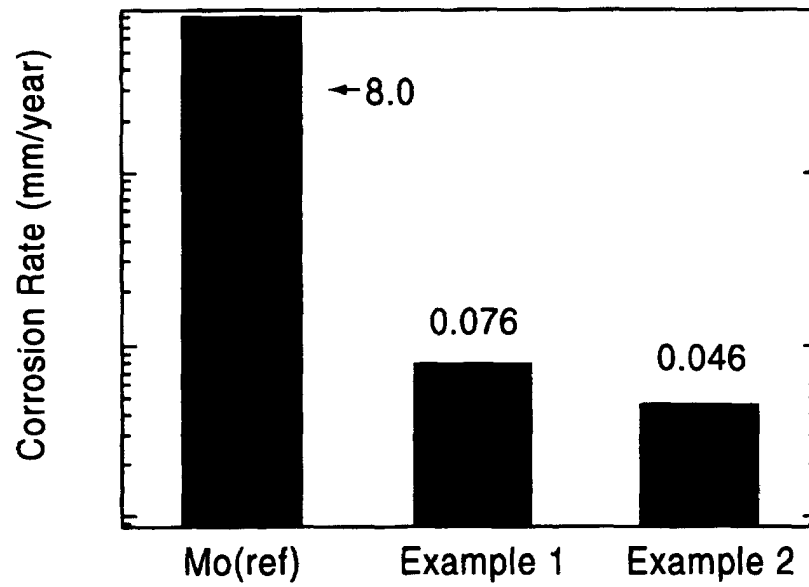


FIG.4(a)


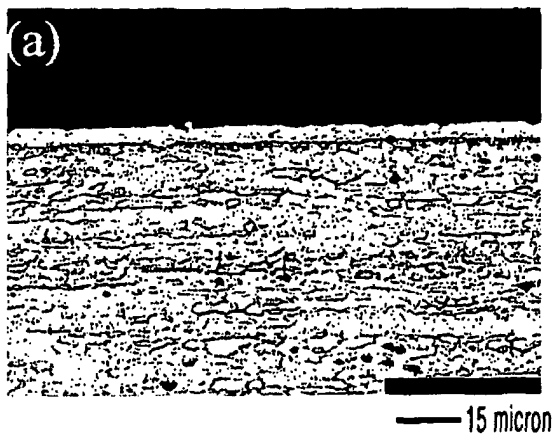


FIG.4(b)

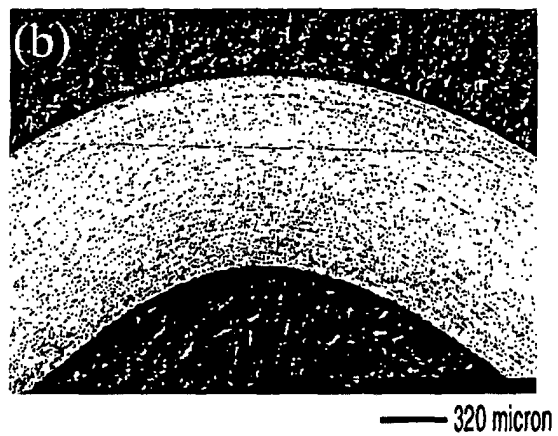

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP03/03912

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ C23C8/24, C22C27/04		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int.Cl ⁷ C23C8/24, C22C27/04		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2003 Kokai Jitsuyo Shinan Koho 1971-2003 Jitsuyo Shinan Toroku Koho 1996-2003		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01/18276 A1 (Japan Science and Technology Corp.), 15 March, 2001 (15.03.01), & KR 2040739 A & EP 1219722 A1	1-6
A	JP 59-208066 A (Toshiba Corp.), 26 November, 1984 (26.11.84), (Family: none)	1-6
A	JP 11-286770 A (Takashi YOSHIOKA), 19 October, 1999 (19.10.99), (Family: none)	1-6
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
Date of the actual completion of the international search 27 June, 2003 (27.06.03)		Date of mailing of the international search report 15 July, 2003 (15.07.03)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1998)