



(51) International Patent Classification:
A61N 5/06 (2006.01)

(21) International Application Number:
PCT/EP2018/073017

(22) International Filing Date:
27 August 2018 (27.08.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
17188135.2 28 August 2017 (28.08.2017) EP

(71) Applicant: **BRAINLIT AB** [SE/SE]; Scheelevägen 27,
223 70 Lund (SE).

(72) Inventors: **LÖWGREN, Truls Olof Johan**; Rosenstigen
9, 216 19 Malmö (SE). **ANDERSSON, Peter K**; Nobbavä-
gen 78, 263 72 Skåret (SE). **WINGREN, Tord**; Fabriks-
gatan 7, 222 36 Lund (SE).

(74) Agent: **AWA SWEDEN AB**; Box 5117, 200 71 Malmö
(SE).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: ILLUMINATION APPARATUS

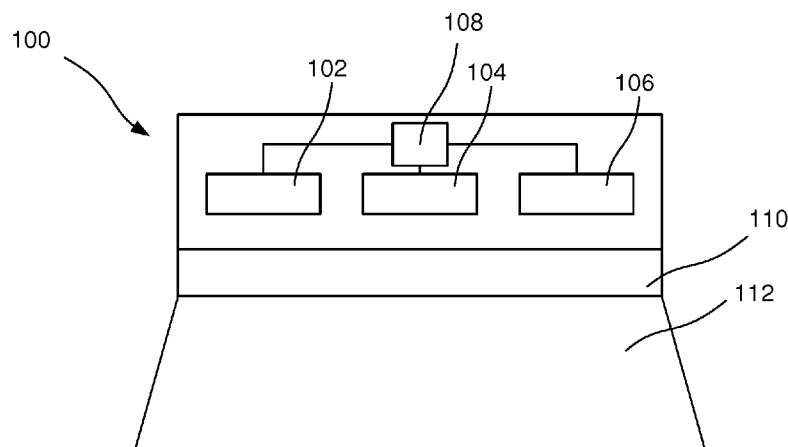


FIG. 1

(57) **Abstract:** The present invention relates to an illumination apparatus (100). The illumination apparatus (100) comprising: a first light source (102) configured to emit light having a first spectral light distribution having a first main light intensity peak about a first peak wavelength providing light stimulation, and a second light source (104) configured to emit light having a second spectral light distribution having a second main light intensity peak about a second peak wavelength being different from the first peak wavelength, a third light source (106) configured to emit light having a third spectral light distribution having a third main light intensity peak about a third peak wavelength being different from the first peak wavelength and from the second peak wavelength, wherein the illumination apparatus (100) is configured to provide adjustment of light intensity of the first light source (102) and of light of the second light source (104), thereby providing a relative light intensity between the first light source (102) and the second light source (104), wherein the illumination apparatus (100) is configured to provide adjustment of light intensity of the third light source (106) in to order to compensate for the adjusting of the relative light intensity between the first light source (102) and the second light source (104).

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

ILLUMINATION APPARATUS

Technical field

The present invention relates to an illumination apparatus.

5 Background

Light plays a fundamental role for the well-being of humans. In nature, the natural light varies in color spectra and intensity during the day. In the morning, the daylight has a bluer tone stimulating alertness. In the evening, the natural light turns redder which improves relaxation. More specifically, it is
10 known that the bluer light in the morning increases cortisol and reduces melatonin increasing attentiveness and focus, while the warmer red tone increases the body's melatonin and reduces cortisol causing the relaxation.

There is therefore an interest in mimicking natural light for achieving improvements in well-being and productivity. Recent advances in LED-based
15 lighting technologies allows for the desired mimicking of natural light in indoor environments. The illumination at the workplace should, however, be adapted to the work to be performed and it should also be adapted to the needs of each individual. Thus, there is a desire for more flexible illumination sources for indoor environments.

20

Summary of the invention

In view of the above, it is an object of the present invention to provide an illumination apparatus allowing for improved tailoring of the spectral light distribution of the light emitted.

25 According to a first aspect an illumination apparatus is provided. The illumination apparatus comprising:

a first light source configured to emit light having a first spectral light distribution having a first main light intensity peak about a first peak wavelength providing light stimulation, wherein the first light source is a cold
30 white light emitter and the first peak wavelength is within the range of 450 – 490 nm,

a second light source configured to emit light having a second spectral light distribution having a second main light intensity peak about a second peak wavelength being different from the first peak wavelength, wherein the second light source is a cold white light emitter and the second peak

5 wavelength is within the range of 440 – 450 nm or 490 – 500 nm, and wherein the first and second peak wavelengths are close in wavelength, within 10% of the visible spectral wavelength range, and

a third light source configured to emit light having a third spectral light distribution having a third main light intensity peak about a third peak

10 wavelength being different from the first peak wavelength and from the second peak wavelength, wherein the third light source is a warm white light emitter and the third peak wavelength is within the range of 500 – 700 nm,

wherein the illumination apparatus is configured to provide adjustment of light intensity of the first light source and of the second light source, thereby

15 providing a relative light intensity between the first light source and the second light source,

wherein the illumination apparatus is configured to provide adjustment of light intensity of the third light source in to order to compensate for the adjusting of the relative light intensity between the first light source and the

20 second light source.

An improved tailoring of the spectral light distribution from the illumination apparatus is thereby provided. The tuning of the light intensity of the first light source relative to the light intensity of the second light source and compensation of light intensity of the third light source allows for a

25 substantially maintained overall light output from the illumination apparatus. A reduced perceived change of the light emitted by the illumination apparatus is thereby obtained although there is a change in the relative light intensity between the first light source and the second light source.

The light emitted by the first light source may have a stimulating effect

30 whereas the light emitted by the second light source may have a non-stimulating effect. The illumination apparatus thereby allows for efficient transitions between stimulation and non-stimulation while keeping a

substantially unchanged spectral light distribution as perceived by a user illuminated by the illumination apparatus.

The wording light stimulation may be construed as light suitable for inducing a biological and/or behavioral effect on a human or animal. The
5 biological and/or behavioral effects may include a change in melatonin secretion, body temperature, cortisol secretion, heart rate, alertness, cognitive performance, psychomotor performance, brain blood flow and/or EEG response.

The first peak wavelength may be within the range of 450 – 512 nm,
10 preferably 450 – 490 nm.

The first light source may be a cold white light emitter and the first peak wavelength is within the range of 450 – 512 nm.

The light emitted by the first light source may thereby have a stimulating effect as the sensitivity of the melanopsin receptors is reported to
15 be in the span of 450 – 520 nm, typically having a peak sensitivity in the range 470 – 490 nm. The light emitted by the first light source may thereby increase cortisol and suppress melatonin in humans whereby an increasing attentiveness and focus may be achieved for a user illuminated by the illumination apparatus.

20 The second peak wavelength may be within the range of 440 – 450 nm or 490 – 500 nm.

When the second peak wavelength is within the range of 440 – 450 nm the second peak wavelength is preferably at least 7 nm smaller than the first peak wavelength.

25 When the second peak wavelength is within the range of 490 – 500 nm the second peak wavelength is preferably at least 7 nm larger than the first peak wavelength.

Such a difference in peak wavelengths is considered suitable for providing a possibility to balance stimulating effect and perceived relative light
30 intensity.

The second peak wavelength ranges are near but outside the wavelength range of the first peak wavelength, i.e. 450– 490 nm. A lower suppression of melatonin may thereby be achieved by the light having the

second peak wavelength. The light emitted by the second light source may thereby have a less stimulating effect.

The second light source may have a 50% intensity over a spectral wavelength range of at least 70 nm.

- 5 The third light source may be a green light emitter and the third peak wavelength is within the range of 490 - 580 nm.

The third light source may be a red light emitter and the third peak wavelength is within the range of 630 - 700 nm.

- 10 The illumination apparatus may further comprise a fourth light source configured to emit light having a fourth spectral light distribution having a fourth main light intensity about a fourth peak wavelength being different from the first peak wavelength, from the second peak wavelength and from the third peak wavelength, wherein the illumination apparatus is configured to provide adjustment of light intensity of the fourth light source in to order to in
15 combination with the adjusting of the third light source compensate for the adjusting of the relative light intensity between the first light source and the second light source.

- 20 An improved tailoring of the overall spectral light distribution of the light emitted by the illumination apparatus is thereby achieved. A desired color balance of the light may thereby be achieved with greater accuracy.

The fourth light source may be a red light emitter and the fourth peak wavelength is within the range of 630 - 700 nm.

- 25 The illumination apparatus may further comprise a further light source configured to emit light having a further spectral light distribution having a further main light intensity peak about a further peak wavelength being different from the first peak wavelength and from the second peak wavelength, the further peak wavelength being chosen to enhance the light stimulation provided by the first light source.

- 30 The apparatus may be configured to provide adjustment of light intensity of the further light source.

The further light may have a main light intensity peak at a peak wavelength within the range of 580 – 630 nm.

The further light source allows for light exposure at longer wavelength light, i.e. 580–630 nm in the orange–red part of the visible spectrum. Light within the range of 580 – 630 nm may trigger melanopsin chromophore regeneration and an increased subsequent intrinsic photosensitivity of intrinsically photosensitive retinal ganglion cells, ipRGCs. An improved suppression of melanin may thereby be obtained.

A further scope of applicability of the present invention will become apparent from the detailed description given below. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the scope of the invention will become apparent to those skilled in the art from this detailed description.

Hence, it is to be understood that this invention is not limited to the particular component parts of the device described or steps of the methods described as such device and method may vary. It is also to be understood that the terminology used herein is for purpose of describing particular embodiments only, and is not intended to be limiting. It must be noted that, as used in the specification and the appended claim, the articles "a," "an," "the," and "said" are intended to mean that there are one or more of the elements unless the context clearly dictates otherwise. Thus, for example, reference to "a unit" or "the unit" may include several devices, and the like. Furthermore, the words "comprising", "including", "containing" and similar wordings does not exclude other elements or steps.

25

Brief Description of the Drawings

The above and other aspects of the present invention will now be described in more detail, with reference to appended drawings showing embodiments of the invention. The figures should not be considered limiting the invention to the specific embodiment; instead they are used for explaining and understanding the invention.

As illustrated in the figures, the sizes of layers and regions are exaggerated for illustrative purposes and, thus, are provided to illustrate the

general structures of embodiments of the present invention. Like reference numerals refer to like elements throughout.

Fig. 1 illustrates an illumination apparatus.

Fig. 2a illustrates a spectral distribution of light emitted by an
5 illumination apparatus at a first situation.

Fig. 2b illustrates a spectral distribution of light emitted by the same illumination apparatus as in Fig. 2a at a second situation.

Fig. 3a illustrates a spectral distribution of light emitted by an illumination apparatus.

10 Fig. 3b illustrates another spectral distribution of light emitted by the same illumination apparatus as in Fig. 3a.

Fig. 4 illustrates a spectral distribution of light emitted by an illumination apparatus.

Fig. 5 illustrates a spectral distribution of light emitted by an illumination
15 apparatus.

Detailed description

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which currently preferred
20 embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided for thoroughness and completeness, and to fully convey the scope of the invention to the skilled person.

25 Fig. 1 illustrates an illumination apparatus 100. The illumination apparatus 100 comprises a first light source 102, a second light source 104 and a third light source 106. The illumination apparatus 100 may further comprise circuitry 108 for controlling the respective light sources 102, 104 and 106. The illumination apparatus 100 may comprise a light diffusing
30 element 110 arranged to mix and diffuse the light emitted by the respective light source 102, 104, and 106. Light may thereby be emitted with improved spatial uniformity. A more uniform distribution of the spectral distribution of the light emitted 112 by the illumination apparatus 100 may also be obtained. The

light diffusing element 110 may mix of the light emitted by the respective light source 102, 104, and 106, by scattering and/or multiple reflection within the light diffusing element 110.

The first light source 102 is configured to emit light having a first
5 spectral light distribution Γ_1 , with a first main light intensity peak P_1 , about a first peak wavelength λ_1 , see Fig. 2a. The first light source 102 is further configured to emit light providing light stimulation, as will be discussed below.

The second light source 104 is configured to emit light having a second spectral light distribution Γ_2 , with a second main light intensity peak P_2 , about
10 a second peak wavelength λ_2 . The second peak wavelength λ_2 is different from the first peak wavelength λ_1 .

The third light source 106 is configured to emit light having a third spectral light distribution Γ_3 having a third main light intensity peak P_3 about a third peak wavelength λ_3 . The third peak wavelength λ_3 is different from the
15 first peak wavelength and from the second peak wavelength, see Fig. 2a. The first light distribution Γ_1 and the second light distribution Γ_2 are in Fig. 2a illustrated to be overlapping, but may alternatively cover wavelength ranges which are not overlapping. To this end, the first λ_1 and the second λ_2 peak wavelengths may, be close in wavelength, within 10% of the visible spectral
20 wavelength range.

The illumination apparatus 100 is configured to provide adjustment of light intensity of the first light source 102 and of the second light source 104, thereby providing a relative light intensity $R_{1,2}$ between the first light source 102 and the second light source 104. To illustrate this, Fig. 2a shows the
25 spectral distribution of light emitted by the illumination apparatus 100 at a first situation 114 in which the relative intensity $R_{1,2}$ is set such that the light intensity I_1 of the light emitted by the first light source 102 is larger than the light intensity I_2 of the light emitted by the second light source 104.

As a comparison, Fig. 2b illustrates a spectral distribution of light
30 emitted by the same illumination apparatus 100 at a second situation 116. In the second situation 116 the light intensity of the light emitted by the first light source 102 and the second light source 104 is adjusted relative to the first situation 114. As a non-limiting example, a relative intensity $R'_{1,2}$ is achieved

such that the light intensity I'_2 of the light emitted by the second light source 104 is larger than the light intensity I'_1 of the light emitted by the first light source 102.

5 The spectral light distribution of the light emitted 112 by the illumination source 100 may thereby be set to a desired value. As the light emitted by the first light source 102 may have a stimulating effect, whereas the light emitted by the second light source 104 may have a non-stimulating effect the degree of stimulation may be set to a desired value by adjusting the relative light intensity $R_{1,2}$ to a desired value.

10 It may be noted, that the relative ratio of the relative light ratio may be understood to be any value. The relative intensity may further include zero or infinite, if there is no light or substantially no light emitted by one of the first light source 102 or the second light source 104 relative to the other light source.

15 The illumination apparatus 100 is further configured to provide adjustment of light intensity of the third light source 106 to compensate for the adjusting of the relative light intensity $R_{1,2}$ between the first light source 102 and the second light source 104 the illumination apparatus 100. The illumination apparatus 100 thereby allows for a tuning of the relative light
20 intensity $R_{1,2}$ while keeping a substantially unchanged spectral light distribution of the light emitted 112 by the illumination apparatus 100. Again, referring to Figs. 2a and 2b, this is illustrated by the varied light intensity of the third light source 106, compare I_3 to I'_3 .

25 In the following, an example of light stimulation achievable by the illumination apparatus 100 is discussed, with reference to Figs. 3a and 3b.

It is known that the sensitivity of melanopsin receptors appear to be in the wavelength range 450 – 490 nm, commonly reported to be in the range 450 – 520 nm, typically having a peak sensitivity in the range 470 – 490 nm. Thus, light emitted in the wavelength range 450 – 490 nm influences, for
30 example, hormone secretion, heart rate, body temperature, sleep propensity and/or alertness for humans. Also animals are affected by light in the above wavelength range. To this end, melanopsin photoreceptors are sensitive to a range of wavelengths and have a peak light absorption at blue light

wavelengths around 480 nm. It may be noted that other wavelengths of light activate the melanopsin signaling system with decreasing efficiency as they move away from the optimum 480 nm.

Thus, the light emitted by the first light source 102 may have a
5 stimulating effect by increasing cortisol and suppression of the production of melatonin in humans. As a result, an increased attentiveness and focus may be achieved for a user illuminated by the illumination apparatus.

To achieve the above stimulation, the first peak wavelength λ_1 may be selected to be within the range of 450 – 512 nm, preferably 450 – 490 nm.

10 Thus, the first light source may be arranged to emit light having a first spectral light distribution having a first main light intensity peak about a first peak wavelength within the range of 450 – 512 nm, preferably 450 – 490 nm.

The first peak wavelength λ_1 may be selected within the range of 460 – 490 nm.

15 The first peak wavelength λ_1 may be selected within a wavelength range comprising wavelengths larger than 450 nm.

The first peak wavelength λ_1 may be selected within a wavelength range comprising wavelengths smaller than 512 nm, preferably below 490 nm.

20 The first peak wavelength λ_1 may be selected within the range of 470 – 490 nm.

The first peak wavelength λ_1 may be selected to be at 480 nm.

The first light source 102 may, for instance, emit blue light at 460 nm. The first light source 102 may be a light emitting diode or a laser diode.

25 To provide an alternative light source, e.g. in the blue wavelength range of visible light, commonly defined to be in the range 400 to 500 nm, see e.g. Edwin R. Jones. Physics 153 Class Notes. University of South Carolina, 1999, the second peak wavelength λ_2 may be within the range of 440 – 450 nm or 490 – 500 nm. Light within this wavelength range have a lower
30 stimulating effect than the light emitted having a first spectral light distribution having a first main light intensity peak about the first peak wavelength at 450 – 490, e.g. at 460 nm.

The skilled person is knowledgeable of that different definitions of which wavelength range that corresponds to a give color exists. Blue color may for example alternatively be defined to be within the wavelength range 424 – 491 nm, see e.g. CRC Handbook of Chemistry and Physics, 1966.

5 The second light source 104 may, for instance, emit blue light at 440 – 450 nm, also referred to as “Royal blue”. The first light source 102 may be a light emitting diode or a laser diode. As discussed, in relation to Figs. 2a and 2b above, the illumination apparatus 100 is configured to provide adjustment of light intensity of the first light source 102 and of the second light source
10 104, thereby providing a relative light intensity $R_{1,2}$ between the first light source 102 and the second light source 104. Thus, the relative light intensity $R_{1,2}$ determines the degree of stimulation of the light emitted 112 by the illumination apparatus 100. More specifically, the light emitted 112 by the illumination apparatus 100 in Fig. 3a has a stimulating effect as the light
15 intensity I_1 of the light emitted by the first light source 102 is larger than the light intensity I_2 emitted by the second light source 104. In contrast, in Fig. 3b, the relative light intensity is changed to $R'_{1,2}$, for which the light intensity I'_2 of the light emitted by the second light source 104 is larger than the light intensity I'_1 of the light emitted by the first light source 102. Thus the light
20 emitted 112 in Fig. 3b has a lower or no stimulating effect.

Alternatively, the first peak wavelength λ_1 may be selected to be within the range of 470 – 490 nm. The second peak wavelength λ_2 may then be selected to be within the range of 450 – 470 nm or 490 – 500. The first and the second peak wavelength may differ by at least 5 nm, preferably 7 nm.

25 The illumination apparatus 100 is further configured to provide adjustment of light intensity I_3 of the third light source 106 to compensate for the adjusting of the relative light intensity $R_{1,2}$ between the first light source 102 and the second light source 104 the illumination apparatus 100, illustrated by the varied light intensity of the third light source 106, compare I_3 to I'_3 in Figs. 3a
30 and 3b, respectively. I'_3 is thereby larger than I_3 . The illumination apparatus 100 thereby allows for a tuning of the relative light intensity, $R_{1,2}$ versus $R'_{1,2}$, while keeping a substantially unchanged spectral light distribution of the light

emitted 112 by the illumination apparatus 100. A reduced perceived change in the overall light distribution of the light emitted 112 is thereby achieved.

The third light source 106 may be a light emitting diode emitting white light. The white light may be generated by the use of phosphors together with
5 a short-wavelength LED, e.g. a phosphor material emitting light with a broad spectral light distribution, typically 500 – 700 nm, which is illuminated by blue light around 450 to 470 nanometers.

The first light source 102 may alternatively be a cold white light emitter, see solid line in Fig. 4, and the first peak wavelength may be within the range
10 of 450 – 490 nm as discussed above.

The second light source 104 may be a cold white light emitter and the second peak wavelength is within the range of 440 – 450 nm, see the dashed line in Fig. 4. Thus, the relative intensity of the light emitted by the respective cold white light emitters may be used to tailor the stimulating effect of the light
15 emitted by the illumination apparatus.

The second light source 104 may alternatively be a cold white light emitter and the second peak wavelength is within the range of 490 – 500 nm.

A cold white light emitter may be defined as a light source producing white light having a color temperature of 5000 – 9500 K CCT, where the Color
20 Correlated Temperature, CCT, of light is defined as the temperature of the Planckian radiator whose perceived color most closely resembles that of a given stimulus at the same brightness and under specified viewing conditions. The skilled person realizes that other color temperature ranges may be used to define the color of a white light emitter.

25 To this end the third light source 106 may be a warm white light emitter and the third peak wavelength is within the range of 540 – 650 nm, see the dash-dotted line in Fig. 4. The illumination apparatus 100 may thereby provide an improved control of the color balance of the light emitted 112.

A warm white light emitter may be defined as a light source producing
30 white light having a color temperature of 1600–4000 K CCT. To this end,

A light source may be a neutral white light emitter which may be defined as a light source producing white light having a color temperature of 3700 to 5500 K CCT.

As a non-limiting example, the second light source may have a 50% intensity over a spectral wavelength range of at least 70 nm.

The skilled person realizes that the illumination apparatus may comprise a light source emitting substantially at a single wavelength. The light
5 may be emitted around a single wavelength with a narrow spectral range having a full-width-at-half-maximum, FWHM, of about 4 – 10% of the central emission wavelength.

In the above discussion, the illumination apparatus 100, comprise light emitting diodes emitting light at a narrow wavelength range, cold light emitters
10 and/or warm light emitters.

The illumination apparatus 100, may comprise at least three narrow band light emitters, such as light emitting diodes, as illustrated in figure 5. narrow band light emitters are configured to emit light around a predetermined central wavelength. The illumination apparatus 100 may be
15 referred to as a red-green-blue light emitter, RGB-emitter. More specifically, the first 102 and second 104 light sources may be configured to emit light in the blue spectral range of the visible range. As a non-limiting example, the first light source 102 may be configured to emit light having a first spectral light distribution Γ_1 having a first main light intensity peak P_1 about a first peak
20 wavelength λ_1 within the range of 450 – 490 nm which provides light stimulation as discussed above. The second light source 104 may be configured to emit light having a second spectral light distribution Γ_2 having a second main light intensity peak P_2 about a second peak wavelength λ_2 within the range of 440 – 450 nm or 490 – 500 nm. The first 102 and the second 104
25 light sources may therefore be referred to as a first, B_1 , and a second B_2 blue light emitter, respectively. The third light source 106 may further be a green light emitter, G, configured to emit light having a third spectral light distribution Γ_3 having a third main light intensity peak P_3 about a third peak wavelength λ_3 within the range of 490 - 580 nm.

30 The third light source 106 may be a green light emitter, G, configured to emit light having a third spectral light distribution Γ_3 having a third main light intensity peak P_3 about a third peak wavelength λ_3 within the range of 520 – 560 nm.

It may be noted that, alternatively, third light source may be a red light emitter, R, and the third peak wavelength is within the range of 630 - 700 nm.

The third peak wavelength may be within the range of 640 - 700 nm.

The illumination apparatus 100 may further comprise a fourth light
5 source, not shown, configured to emit light having a fourth spectral light distribution Γ_4 having a fourth main light intensity a P_4 about a fourth peak wavelength λ_4 . The fourth peak wavelength is different from the first peak wavelength, from the second peak wavelength and from the third peak wavelength. The fourth light source may be a red light emitter, R, and the
10 fourth peak wavelength is within the range of 630 - 700 nm, see figure 5.

The fourth peak wavelength may be within the range of 640 - 700 nm.

The illumination apparatus 100 is further configured to provide adjustment of light intensity of the fourth light source in to order to in combination with the adjusting of the third light source 106 compensate for
15 the adjusting of the relative light intensity between the first light source 102 and the second light source 104.

The illumination apparatus 100 may thereby provide light emission over different color ranges of the visible spectrum. The colors of the light emitted may, moreover be mixed providing white light. The light emitted by
20 the illumination apparatus may thereby have a more or a less stimulating effect by the relative intensity of the light emitted by the first 102 and the second 104 light sources.

The illumination apparatus 100 may further comprise a further light source, not shown, configured to emit light having a further spectral light
25 distribution Γ_f having a further main light intensity peak P_f about a further peak wavelength λ_f , see the dashed line in figure 5. The further peak wavelength λ_f , is different from the first peak wavelength λ_1 and from the second peak wavelength λ_2 . The illumination apparatus 100 may further be configured to provide adjustment of light intensity of the further light source. The further
30 peak wavelength λ_f may be chosen to enhance the light stimulation provided by the first light source 102.

As a non-limiting example, the further light may have a main light intensity peak P_f at a peak wavelength within the range of 580 – 630 nm.

Thus, the further light source allows for light exposure at longer wavelength light, i.e. 580–630 nm in the orange–red part of the visible spectrum. Light within the range of 580 – 630 nm may trigger melanopsin chromophore regeneration and an increased subsequent intrinsic photosensitivity of intrinsically photosensitive retinal ganglion cells, ipRGCs. An improved suppression of melanin may thereby be obtained. An illumination apparatus 100 providing increased stimulation may thereby be provided.

It should be noted that the illumination apparatus 100 may be configured to at a first point in time emit light from the further light source and from at a second point in time emit light from the first light source 102. A prior exposure to longer wavelength light, here exemplified by the orange light emitted by the further light source, relative to the shorter wavelength, exemplified by the blue light emitted by the first light source 102, enhances the subsequent impact of light on executive brain responses. An improved suppression of melatonin may thereby be obtained.

In the above the description it has been exemplified that the illumination apparatus illuminates a human. A skilled person, however, realizes that in other embodiments animals such as pets or livestock may be illuminated. The above mentioned benefits of the illumination apparatus for illuminating humans, when applicable, apply also to animals.

A method for controlling illumination may further be provided. The method comprising:

adjusting a relative light intensity between a first light source and a second light source, wherein the first light source is configured to emit light having a first spectral light distribution having a first main light intensity peak about a first peak wavelength providing light stimulation, and the second light source is configured to emit light having a second spectral light distribution having a second main light intensity peak about a second peak wavelength being different from the first peak wavelength,

adjusting a light intensity of a third light source configured to emit light having a third spectral light distribution having a third main light intensity peak about a third peak wavelength being different from the first peak wavelength and from the second peak wavelength in to order to compensate for the

adjusting of the relative light intensity between the first light source and the second light source.

The method according may further comprise adjusting a light intensity of a fourth light source configured to emit light having a fourth spectral light distribution having a fourth main light intensity about a fourth peak wavelength being different from the first peak wavelength, from the second peak wavelength and from the third peak wavelength in to order to in combination with the adjusting of the third light source compensate for the adjusting of the relative light intensity between the first light source and the second light source.

The adjusting of a light intensity may further comprise using a further light source configured to emit light having a further spectral light distribution having a further main light intensity peak about a further peak wavelength being different from the first peak wavelength and from the second peak wavelength, the further peak wavelength being chosen to enhance the light stimulation provided by the first light source.

The person skilled in the art realizes that the present invention by no means is limited to the preferred embodiments described above. On the contrary, many modifications and variations are possible within the scope of the appended claims.

For example, an illumination system may be provided. The illumination system comprising a first illumination apparatus and a second illumination apparatus, wherein the first illumination apparatus is configured to illuminate a first region in space, and the second illumination apparatus is configured to illuminate a second region in space, the first and the second regions being different. The above mentioned features of respective illumination apparatus have been described above. Thus, in order to avoid undue repetition, reference is made to the above. An advantage of the illumination system is that the relative light intensity between the first light source and the second light source for the first illumination apparatus may be different to the relative light intensity between the first light source and the second light source for the second illumination apparatus. The stimulation by light may thereby differ between in the first and the second regions. As respective first and the

second illumination apparatus is further configured to provide adjustment of light intensity of the third light source to compensate for the adjusting of the relative light intensity the illumination system thereby allows for a tuning of the relative light intensity between the two regions while keeping a substantially
5 unchanged spectral light distribution of the light emitted by the first and the second illumination apparatus. A more uniform illumination in a space may therefore be achieved while allowing for different regions in space having different degrees of stimulation. The first region may, for example, be stimulating while the second region is non-stimulating or at least less
10 stimulating.

The first and the second regions may be partially overlapping. The first and the second regions may be physically separated, i.e. non-overlapping.

It may be noted that the stimulation effect is often referred to as related to blue light. However, the wavelength discussed above may according to
15 some references be considered as green light. For sake of clarity, we have referred to blue light even if the wavelength intervals may comprise blue-green or even green light.

Additionally, variations to the disclosed embodiments can be understood and effected by the skilled person in practicing the claimed
20 invention, from a study of the drawings, the disclosure, and the appended claims.

CLAIMS

1. An illumination apparatus comprising:
 - 5 a first light source (102) configured to emit light having a first spectral light distribution having a first main light intensity peak about a first peak wavelength providing light stimulation, wherein the first light source (102) is a cold white light emitter and the first peak wavelength is within the range of 450 – 490 nm,
 - 10 a second light source (104) configured to emit light having a second spectral light distribution having a second main light intensity peak about a second peak wavelength being different from the first peak wavelength, wherein the second light source (104) is a cold white light emitter and the second peak wavelength is within the range of 440 – 450 nm or 490 – 500
 - 15 nm, and wherein the first and second peak wavelengths are close in wavelength, within 10% of the visible spectral wavelength range, and a third light source (106) configured to emit light having a third spectral light distribution having a third main light intensity peak about a third peak wavelength being different from the first peak wavelength and from the
 - 20 second peak wavelength, wherein the third light source (106) is a warm white light emitter and the third peak wavelength is within the range of 500 – 700 nm,
- wherein the illumination apparatus (100) is configured to provide adjustment of light intensity of the first light source (102) and of light of the
- 25 second light source (104), thereby providing a relative light intensity between the first light source (102) and the second light source (104),
- wherein the illumination apparatus (100) is configured to provide adjustment of light intensity of the third light source (106) in to order to compensate for the adjusting of the relative light intensity between the first
- 30 light source (102) and the second light source (104).



2. The illumination apparatus according to claim 1, wherein the second light source (104) has a 50% intensity over a spectral wavelength range of at least 70 nm.
- 5 3. The illumination apparatus according to claim 1 or 2, wherein the third light source (106) is a green light emitter and the third peak wavelength is within the range of 500 - 580 nm.
4. The illumination apparatus according to claim 1 or 2, wherein the third
10 light source (106) is a red light emitter and the third peak wavelength is within the range of 630 - 700 nm.
5. The illumination apparatus according to any one of claims 1-4, further comprising a fourth light source configured to emit light having a fourth
15 spectral light distribution having a fourth main light intensity about a fourth peak wavelength being different from the first peak wavelength, from the second peak wavelength and from the third peak wavelength, wherein the illumination apparatus (100) is configured to provide adjustment of light intensity of the fourth light source in to order to in combination with the
20 adjusting of the third light source (106) compensate for the adjusting of the relative light intensity between the first light source (102) and the second light source (104).
6. The illumination apparatus according to claim 5, wherein the fourth
25 light source is a red light emitter and the fourth peak wavelength is within the range of 630 - 700 nm.
7. The illumination apparatus according to any one of the claim 1 – 6, further comprising a further light source configured to emit light having a
30 further spectral light distribution having a further main light intensity peak about a further peak wavelength being different from the first peak wavelength and from the second peak wavelength, the further peak

wavelength being chosen to enhance the light stimulation provided by the first light source.

8. The illumination apparatus according to claim 7, the apparatus being
5 configured to provide adjustment of light intensity of the further light source.

9. The illumination apparatus according to claim 7 or 8, wherein the further light has a main light intensity peak at a peak wavelength within the range of 580 – 630 nm.

1/4

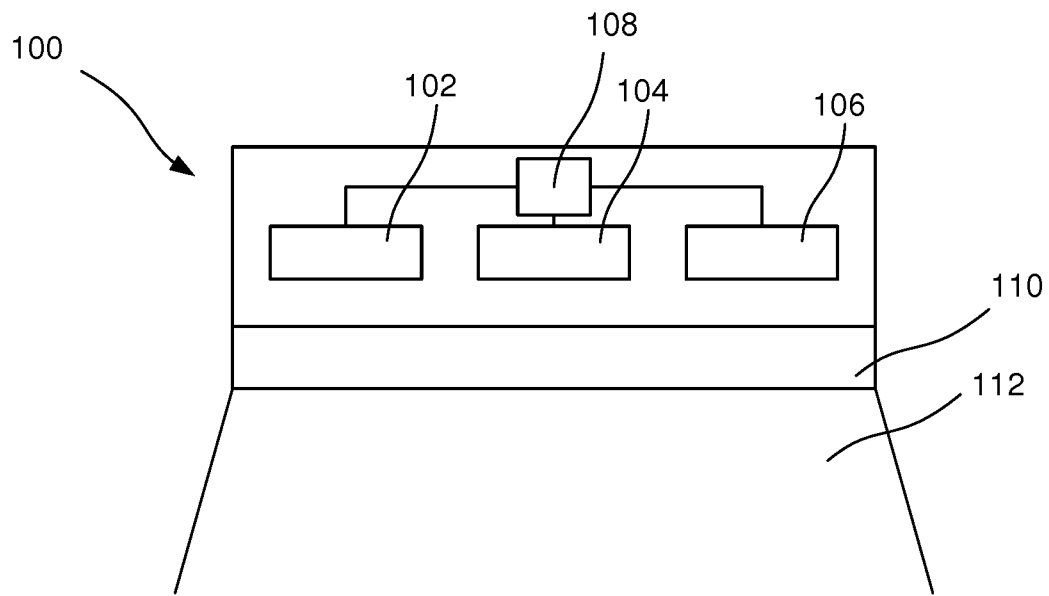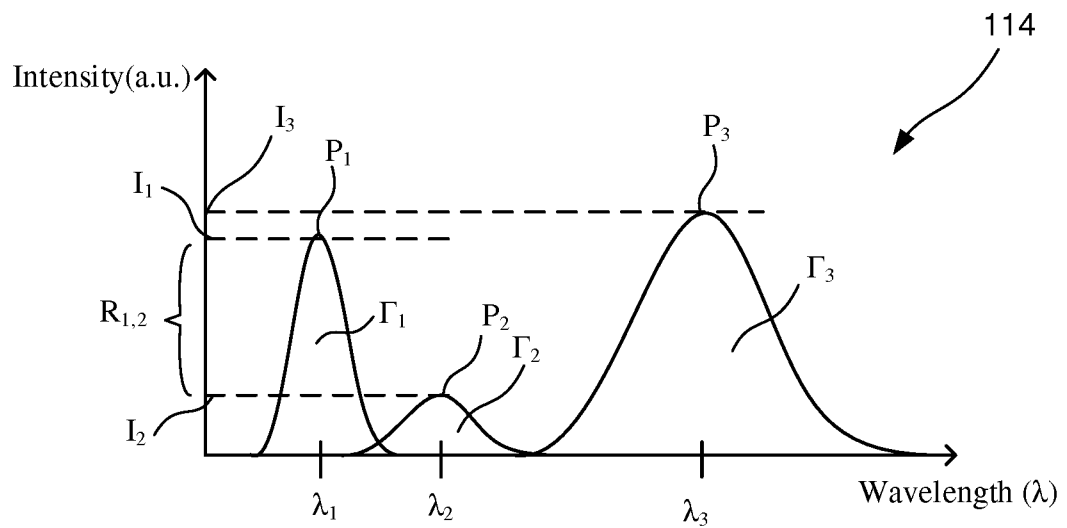**FIG. 1****FIG. 2a**

2/4

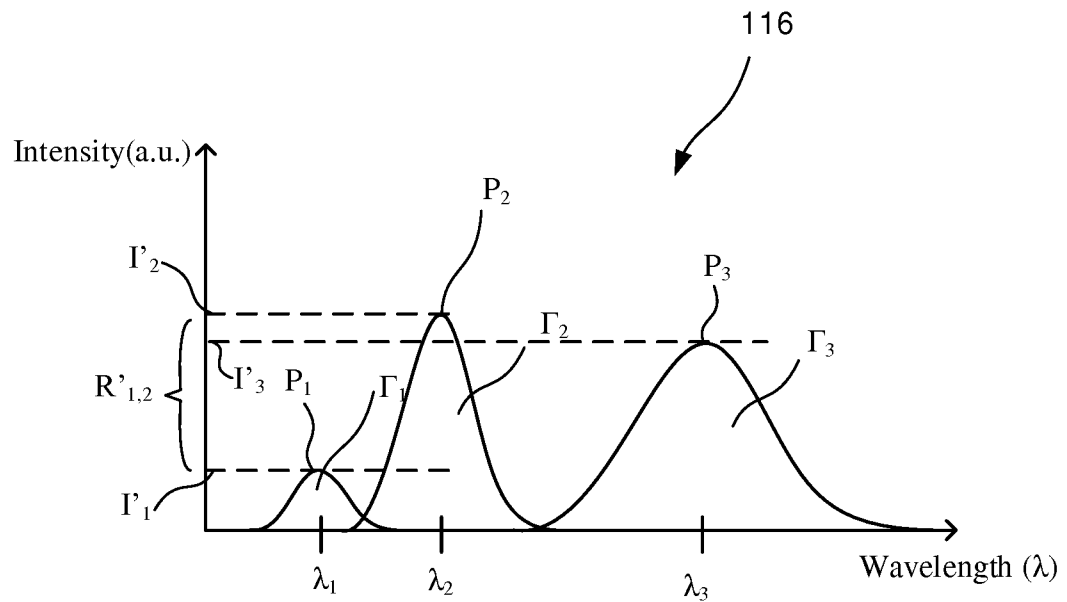


FIG. 2b

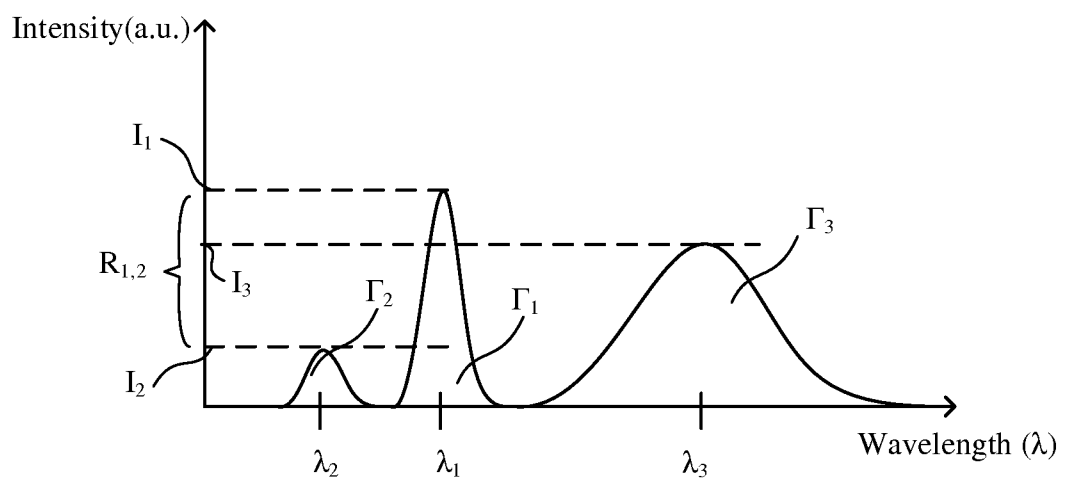
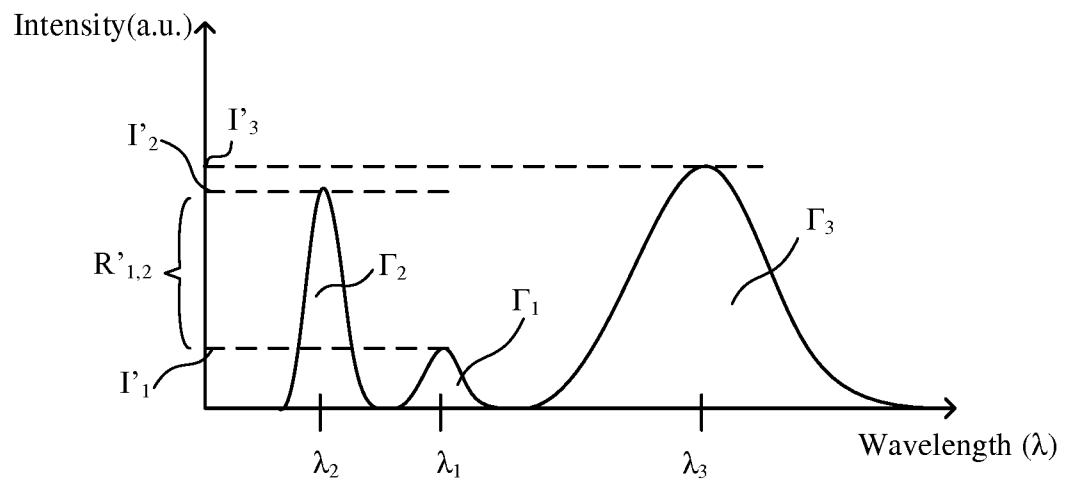
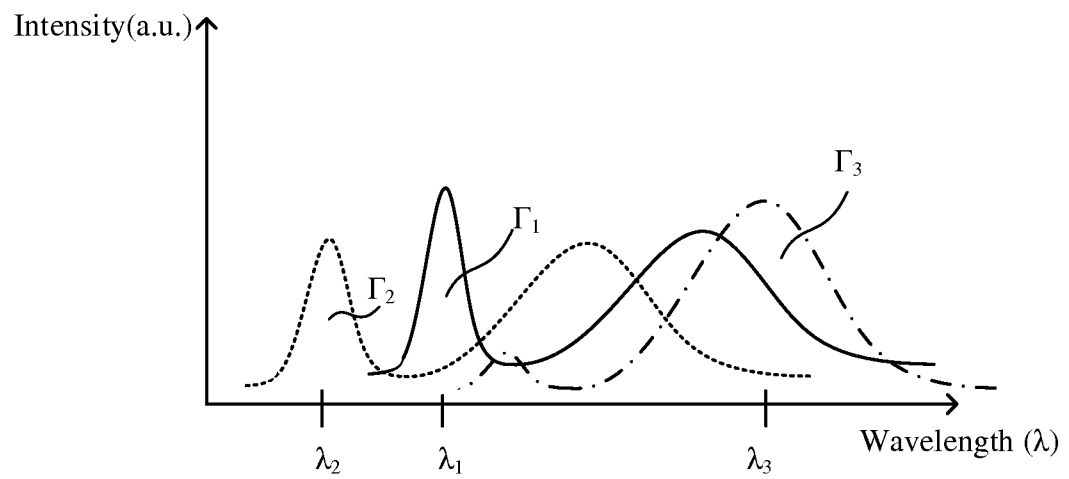
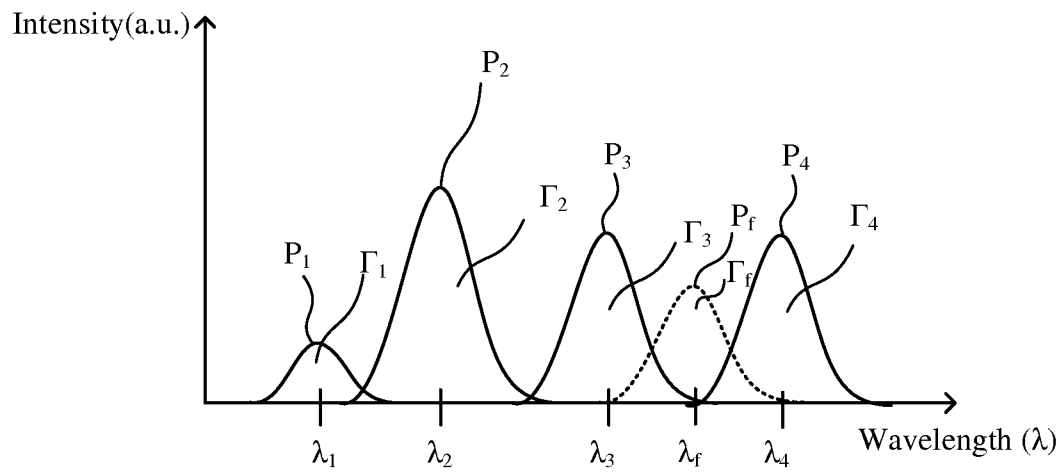


FIG. 3a

3/4

**FIG. 3b****FIG. 4**

4/4

**FIG. 5**

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/073017

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61N5/06
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 094 064 A1 (SHARP KK [JP]) 26 August 2009 (2009-08-26) paragraph [0034] - paragraph [0049]; figures 5-9	1-9
X	EP 2 199 657 A2 (PANASONIC ELEC WORKS CO LTD [JP]) 23 June 2010 (2010-06-23) paragraph [0009] - paragraph [0018]; figures 1-9	1-9
X	WO 2008/052318 A1 (TIR TECHNOLOGY LP [CA]; ASHDOWN IAN [CA]; SALSBURY MARC [CA]) 8 May 2008 (2008-05-08) paragraph [0027] - paragraph [0034]; figures 1-10	1-9
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 November 2018

Date of mailing of the international search report

29/11/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gentil, Tamara

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2018/073017

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/052207 A1 (KONINKL PHILIPS NV [NL]) 16 April 2015 (2015-04-16) page 11, line 15 - page 13, line 6; figures 1-3 -----	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2018/073017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2094064	A1	26-08-2009	CN 101589652 A 25-11-2009
			EP 2094064 A1 26-08-2009
			JP 4966315 B2 04-07-2012
			JP WO2008069101 A1 18-03-2010
			US 2010063566 A1 11-03-2010
			WO 2008069101 A1 12-06-2008
EP 2199657	A2	23-06-2010	CN 101749578 A 23-06-2010
			EP 2199657 A2 23-06-2010
			JP 5382849 B2 08-01-2014
			JP 2010147333 A 01-07-2010
			US 2010157573 A1 24-06-2010
WO 2008052318	A1	08-05-2008	BR PI0718085 A2 05-11-2013
			JP 2010508651 A 18-03-2010
			KR 20090082449 A 30-07-2009
			US 2008106887 A1 08-05-2008
			WO 2008052318 A1 08-05-2008
WO 2015052207	A1	16-04-2015	CN 105992612 A 05-10-2016
			DK 3055022 T3 15-10-2018
			EP 3055022 A1 17-08-2016
			JP 2016532995 A 20-10-2016
			US 2016243379 A1 25-08-2016
			WO 2015052207 A1 16-04-2015