



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification<sup>6</sup> : <b>A61M 5/00</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/16485</b></p> <p>(43) International Publication Date: 8 April 1999 (08.04.99)</p>
<p>(21) International Application Number: PCT/US98/17409</p> <p>(22) International Filing Date: 21 August 1998 (21.08.98)</p> <p>(30) Priority Data: 08/939,479 29 September 1997 (29.09.97) US</p> <p>(71) Applicant (for all designated States except US): BECTON DICKINSON AND COMPANY [US/US]; One Becton Drive, Franklin Lakes, NJ 07417-1880 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): BIRKLAND, Katherine [US/US]; 44 Nimitz Road, Wayne, NJ 07470 (US). BIT-DINGER, Ralf, V. [DE/US]; 36 West 76th Street, New York, NY 10023 (US). CHANOCH, Lawrence [US/US]; 153 Fisher Road, Mahwah, NJ 07430 (US). WILSON, John, B. [US/US]; 42 Cannonball Road, Wanaque, NJ 07465 (US).</p> <p>(74) Agent: WARK, Allen, W.; Becton Dickinson and Company, One Becton Drive, Franklin Lakes, NJ 07417-1880 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i></p>
<p>(54) Title: INJECTION DEVICE AND DRUG CARTRIDGE FOR PREVENTING CROSS-USE OF THE DEVICE AND DRUG CARTRIDGE</p>		
<p>(57) Abstract</p> <p>An injection device such as a pen (10) is described for injecting fluids. The pen (10) includes a pen body assembly (12), and a cartridge assembly (14) with the assemblies being keyed to one another to reduce or otherwise eliminate cross-use of the pen with other drug cartridges. In addition, a drug cartridge (40) is described which reduces or otherwise eliminates cross-use of the drug cartridge with other pens.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

INJECTION DEVICE AND DRUG CARTRIDGE FOR PREVENTING  
CROSS-USE OF THE DEVICE AND DRUG CARTRIDGE

**FIELD OF THE INVENTION**

The present invention generally relates to drug delivery devices, and more specifically relates to injection devices for injecting drugs or medicaments into patients  
5 which are commonly known in the field as pens with the pen of present invention preventing cross-use of the drug cartridge assembly with other pens. In addition, the present invention relates a drug cartridge assembly usable with only designated pens. Also, the present invention relates to a method of assembling a medication delivery pen for preventing cross-use of the pen with other drug cartridge assemblies and/or  
10 preventing cross-use of the drug cartridge assemblies with other pens.

**BACKGROUND OF THE INVENTION**

Hypodermic syringes are used to deliver selected doses of medication to patients.  
15 The prior hypodermic syringe includes a syringe barrel having opposed proximal and distal ends. A cylindrical chamber wall extends between the ends and defines a fluid receiving chamber. The proximal end of the syringe barrel is substantially open and receives a plunger in sliding fluid tight engagement. The distal end of the syringe barrel includes a passage communicating with the chamber. A needle cannula may be mounted  
20 to the distal end of the syringe barrel, such that the lumen of the needle cannula communicates with the passage and the chamber of the syringe barrel. Movement of the plunger in a proximal direction draws fluid through the lumen of the needle cannula and into the chamber. Movement of the plunger in a proximal-to-distal direction urges fluid from the chamber and through the lumen of the needle cannula.

25

Medication to be injected with the prior hypodermic syringe often is stored in a vial having a pierceable elastomeric seal. Medication in the vial is accessed by piercing the elastomeric seal with the needle cannula. A selected dose of the medication may be

drawn into the chamber of the syringe barrel by moving the plunger a selected distance in a proximal direction. The needle cannula may be withdrawn from the vial, and the medication may be injected into a patient by moving the plunger in a distal direction.

5           Some medication, such as insulin is self-administered. The typical diabetes patient will require injections of insulin several times during the course of a week or day. The required dose of insulin will vary from patient to patient, and for each patient may vary during the course of the day and from day to day. Usually, each diabetes patient will establish a regimen that is appropriate for his or her own medical condition and for  
10 his or her lifestyle. The regimen typically includes some combination of a slow or medium acting insulin and a faster acting insulin. Each of these regimens may require the diabetes patient to periodically self-administer insulin in public locations, such as places of employment or restaurants. The required manipulation of the standard hypodermic syringe and vial can be inconvenient and embarrassing in these public  
15 environments. Examples of syringes are described in U.S. Patent Nos. 5,250,037 (Bitdinger) and 5,667,495 (Bitdinger), and an example of a filler for mixing insulins is described in U.S. Patent No. 5,542,760 (Chanoch), the disclosures of which are hereby incorporated by reference in their entirety.

20           Medication delivery pens have been developed to facilitate the self-administration of medication. An example of one such medication delivery pen is described in U.S. Patent No. 5,279,585 (Balkwill), which includes a vial holder into which a vial of insulin or other medication may be received, the disclosure of which is hereby incorporated by reference in its entirety. The vial holder is an elongate generally tubular structure with  
25 proximal and distal ends. The distal end of the vial holder includes mounting means for engaging a double-ended needle cannula. The proximal end also includes mounting means for engaging a driver and dose setting apparatus as explained further below. A

disposable vial for use with the vial holder includes a distal end having a pierceable elastomeric seal that can be pierced by one end of a double-ended needle cannula. The proximal end of this vial includes a plunger slidably disposed in fluid tight engagement with the cylindrical wall of the vial. This medication delivery pen is used by inserting  
5 the vial of medication into the vial holder. A pen body then is connected to the proximal end of the vial holder. The pen body includes a dose setting apparatus for designating a dose of medication to be delivered by the pen and a driving apparatus for urging the plunger of the vial distally for a distance corresponding to the selected dose. Other examples of pens are described in U.S. Patent Nos. 5,645,534 (Chanoch), 5,582,598  
10 (Chanoch) and 5,569,214 (Chanoch), the disclosure of which are hereby incorporated by reference in their entirety.

The user of the pen mounts a double-ended needle cannula to the distal end of the vial holder such that the proximal point cannula of the needle cannula pierces the  
15 elastomeric seal on the vial as described, for example, in U.S. Patent No. 5,549,575 (Giambattista et. al.), the disclosure of which is hereby incorporated by reference in its entirety. The user then selects a dose and operates the pen to urge the plunger distally to deliver the selected dose. The user then removes and discards the needle cannula, and keeps the medication delivery pen in a convenient location for the next required  
20 medication administration. The medication in the vial will become exhausted after several such administrations of medication. The user then separates the vial holder from the pen body. The empty vial may then be removed and discarded. A new vial can be inserted into the vial holder, and the vial holder and pen body can be reassembled and used again as explained above.

25

The above described reusable medication delivery pen is effective and much more convenient for self-administration of medication than the typical hypodermic

syringe and separate medication vial. However, it has been found that there is a need for additional features and improvements for such a medication delivery pen. For example, with the increased use of pens for self-injection of drugs other than insulin, there is a need to prevent cross-use of insulin pens with other drugs and/or cross-use of drug  
5 cartridges with other pens. The problems associated with cross-use could also pose a potential hazard, where the dose dials of the pens are different, which might result in the administration of the wrong dosage of the drug. This is particularly hazardous where an overdose of insulin could lead to hypoglycemia and ER treatment.

10 Thus, there has been a need for a pen, as well as a drug cartridge assembly, which would eliminate the problems and limitations associated with the prior devices discussed above, most significant of the problems being cross-use of the pen with other drug cartridge assemblies and/or cross-use of the drug cartridge assembly with other pens.

15

### SUMMARY OF THE INVENTION

In contrast to the prior devices discussed above, it has been found that a pen particularly suited for use in reducing or otherwise eliminating cross-use can be  
20 constructed in accordance with the present invention. Specifically, the pen and the drug cartridge assembly of the present invention are keyed, i.e., they have a connection interface which mechanically prevents the cross-use of cartridge assemblies among designated pens by, for example, using matching threads, bayonets or snap fits on the pen and the holding sleeve of the drug cartridge assembly. Also, the cartridge assembly  
25 can have an embedded drug cartridge, not readily separable from each other.

Another object of the present invention is to improve the design of the drug cartridge and holder sleeve so that they are a single integral unit for containing the drug, with a rubber septum for multiple needle penetrations along with a standard thread to attach the pen needle. On the far end of the pen needle thread, a connection interface prevents connection to pens other than the one for which use of the drug container is designed. In this way, the drug cartridge assembly will have minimal dead space and an insert molded rubber septum.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

10

The various features, objects, benefits, and advantages of the present invention will become more apparent upon reading the following detailed description of the preferred embodiment(s) along with the appended claims in conjunction with the drawings, wherein like reference numerals identify corresponding components, and:

15

Fig. 1 is a top view of the injection pen of the present invention, with Fig. 1A being an end view;

20

Fig. 2 is a cross-sectional view of the injection pen shown in Fig. 1 with an advancing member in the form of a lead screw retracted;

Fig. 3 is a partial, cross-sectional view of the injection pen similar to Fig. 2 with the lead screw retracted and a drug vial retained therein;

25

Fig. 4 is an exploded, side view of the cartridge assembly of the present invention and the drug cartridge and the corresponding portion of the pen shown in Fig. 3;

Fig. 5 is a partial, cross-sectional view of the cartridge assembly shown in Fig. 4 assembled;

Fig. 6 is a partial, cross-sectional view of an alternative embodiment of the  
5 cartridge assembly of the present invention;

Fig. 7 is a partial, cross-sectional view of another alternative embodiment of the cartridge assembly of the present invention; and

10 Fig. 8 is a partial, cross-sectional view of yet another alternative embodiment of the cartridge assembly of the present invention.

#### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)**

15 The medication delivery pen of the present invention is illustrated in Figs. 1 through 5, with the pen being generally designated 10. As shown in Figs. 1-3, the pen includes a pen body assembly 12, a cartridge assembly 14 and a cap 16, with the cartridge assembly being situated between the body assembly and the cap 16 and typically having sufficient medication for several doses. The pen body assembly and the  
20 cartridge assembly are keyed, i.e., they have a connection interface which mechanically prevents the cross-use of cartridges among designated pens by, for example, threadedly engaged by corresponding threads and grooves, bayonet threads and grooves, snap fits or a pair of lugs that mate in a reverse Luer-lock manner. In addition, all of these elements have a generally cylindrical configuration and are arranged coaxially from opposed  
25 proximal and distal ends 18 and 20 of the pen 10 respectively to define a generally cylindrical housing which can easily be handled by a patient or medical attendant.



Referring to Figs. 1 and 2, and in greater detail in Fig. 3, the body assembly 12 is used to set a desired dose of medication to be delivered by the pen 10 and includes an advancing member preferably in the form of a lead screw 22 with a distal end 24 movable in the distal direction based on the dose set by a dose setting mechanism within the pen body 12. The dose setting mechanism determines the distance through which lead screw 22 is to be moved during the injection of medication by the pen 10. It is understood, however, that variations from this preferred embodiment may be provided, and are considered to be within the scope of the subject invention. Particularly, the specific construction of the pen body 12, including the mechanisms for advancing the lead screw, may include those, for example, disclosed in U.S. Patent Nos. 5,279,585 (Balkwill), 5,279,586 (Balkwill), 5,549,575 (Giambattista et. al.), 5,569,214 (Chanoch), 5,582,598 (Chanoch) and 5,645,534 (Chanoch), and co-pending U.S. Patent Application Serial No. 08/314,179 (Chanoch et. al.), the disclosures of which are hereby incorporated by reference in their entirety. Accordingly, the particular pen body is not essential to the present invention and is merely a matter of choice.

As shown in Figs. 1-3, and in greater detail in Figures 4 and 5, the cartridge assembly 14 is divided into two parts, i.e., an upper vial retainer 30 and a lower vial retainer 32, with the lower vial retainer defining a vial retaining cavity 34 formed in the lower vial retainer. As explained further herein, one end 36A of the upper vial retainer 30 is preferably dimensioned and configured to threadedly engage one end 38A of the lower vial retainer 32 and the other end 36B of the lower vial retainer is configured to securely but releasably engage a needle cannula assembly (not shown). The particular needle cannula assembly is not essential to the present invention and may include the type disclosed in co-pending U.S. Patent Application (P-4059) filed on September 12, 1997 and entitled "PEN NEEDLE ASSEMBLY," the disclosure of which is hereby

incorporated by reference in its entirety. The upper and lower retainers 30, 32 both are described in greater detail below.

The cartridge assembly 14, as shown in Figs. 3, 4 and 5, includes a drug vial or  
5 cartridge 40, with the cavity 34 dimensioned and configured to securely receive and  
retain the drug cartridge therein. The drug cartridge 40 includes a generally tubular  
barrel 42 with a distal end 44A defined by an inwardly converging shoulder 46 and an  
open proximal end 44B. A smaller diameter neck 48 projects distally from the shoulder  
46 of the barrel 42, and is provided with a large diameter annular bead (not shown)  
10 extending circumferentially thereabout at the extreme distal end of the neck. A  
pierceable and resealable elastomeric seal or septum 50 is securely mounted across the  
open distal end defined by the neck 48. The seal 50 is held in place by a metallic sleeve  
52 which is crimped around the circumferential bead at the distal end of the neck 48.  
Medication is pre-filled into the drug cartridge 40 and is retained therein by an  
15 elastomeric stopper or plunger 54. The plunger 54 is in sliding fluid-tight engagement  
with the tubular wall of the barrel 42. Distally directed forces on the plunger 54 urge the  
medication from the pen as explained further below.

The portion of the lower retainer 32 defining the cavity 34 is of substantially  
20 uniform diameter which is slightly greater than the diameter of the vial barrel 42. The  
interior of the upper vial retainer 30 includes an inwardly extending annular portion or  
stop 60 dimensioned to prevent the drug cartridge 40 from moving within the vial  
retainers 30, 32. In this way, when the drug cartridge 40 is inserted into the cavity 34  
and the vial retainers 30, 32 threadedly engaged, the drug cartridge 40 is securely held in  
25 the cavity 34 at the open proximal end 44B of the tubular barrel 42 by the annular stop 60.  
More particularly, the neck 48 and crimped metallic sleeve 52 of the drug cartridge 40  
are inserted in a proximal to distal direction into the open proximal end of the lower

retainer 32 with the crimped metallic sleeve 52 eventually passing entirely into the lower  
retainer 32, which will require entry of the crimped metallic sleeve into the portion  
thereof for mounting the needle cannula assembly. Then, with the vial retainers 30, 32  
threadedly engaged, the open proximal end 44 of the drug vial 40 abuts the stops 60 of  
5 the upper vial retainer 30.

Preferably, when using standard drug vials or cartridges 40, the vial retainers 30,  
32 are permanently secured to one another by glue, locking threads or other fastening  
means. In this way, the cartridge assembly 14 with the drug vial 40 secured therein may  
10 disposed of after being used.

The pen body assembly 12 includes an array of threads 62 for threaded  
engagement with the threaded other end 36B of the upper vial retainer 30, and when  
threadedly engaged, the plunger 54 is disposed in sliding fluid tight engagement in the  
15 cartridge assembly 40. As shown in Fig. 3, the lead screw 22 initially is disposed  
substantially adjacent the plunger 54 of the drug cartridge 40. The portion of drug  
cartridge 40 between the plunger 54 and the seal 50 is filled with a medication 66. In this  
way, advancement of the plunger 54 causes the medication 66 to be forced from the drug  
cartridge 40 through the needle cannula.

20

Preferably, the pen body assembly 12 is reusable and the drug cartridge 40 in the  
cartridge assembly 14 will contain a volume of medication 66 sufficient for  
administration of several doses. After exhaustion of the medication 66, the cartridge  
assembly 14 will be threadedly disengaged from pen body assembly 12 and the drug  
25 cartridge 40 discarded. A new assembly containing a drug cartridge may then be  
mounted to the reusable pen body assembly 12.

The assembled reusable pen body assembly 12 and cartridge assembly 14 may be stored until a selected dose of medication is required. Just prior to use, a needle cannula assembly may be threadedly engaged to distal end 38B of cartridge assembly 14. This threaded engagement will cause a proximal tip of a needle cannula to pierce the seal 50 and provide communication with medication 66.

A desired dose of medication may be set by rotating a dose knob 70 located at the distal end 20 of the pen which will cause advancement of the lead screw 22 into the cavity 34 of the cartridge assembly 14. When the desired dose is set, injection is achieved by merely pushing on actuator button 72 and the lead screw 22 will be advanced axially into cartridge assembly 14. This axial advancement of lead screw 22 causes distal end 24 thereof to come in contact with the plunger 54 and urge the plunger distally into the drug cartridge 40, and hence causes the medication 66 to be injected through the needle cannula. Injection will be terminated when the dose knob 70 is fully depressed into engagement with the pen body assembly 12.

Upon completion of the injection, the needle cannula assembly may be disengaged from the cartridge assembly 14 and safely discarded. The cap 16 may be mounted over cartridge assembly 14, and the pen 10 may be stored or carried in a convenient location until the next dose of medication is required. A subsequent dose of medication will be set in exactly the manner as described above. However, for such a subsequent dose, the plunger 54 will be in a partly advanced position as a starting point. Dose setting and injections can be carried out until all of medication 66 has been used. The cartridge assembly 14 may then be threadedly disengaged from pen body assembly 12, and slidably separated from the lead screw 22 and discarded in order to be replaced as described above.

Fig. 6 shows an alternative embodiment of the cartridge assembly 114 which is disposable and includes an upper vial retainer 130 and a lower vial retainer 132. In this embodiment, once a drug cartridge 140 is placed in the cavity 134, the vial retainers 130,  
5 132 are permanently secured to one another by glue or other fastening means 190. In this way, upon utilization of the medication, the drug cartridge assembly 114 along with the empty drug cartridge 140 may be disengaged from the pen body assembly and safely discarded.

10 Fig. 7 shows another alternative embodiment of the cartridge assembly 214 which is disposable and is in the form of a single integral unit having a generally tubular barrel 242 with a distal end 244A defined by an inwardly converging shoulder 246 and an open proximal end 244B. A smaller diameter neck 248 projects distally from the shoulder 246 of the barrel 242, and is provided with a pierceable and resealable elastomeric seal or  
15 septum 250 securely mounted across the open distal end defined by the neck 248. Medication is pre-filled into the integral cartridge assembly 214 and is retained therein by an elastomeric stopper or plunger 254. The plunger 254 is in sliding fluid-tight engagement with the tubular wall of the barrel 242. Distally directed forces on the plunger 254 urge the medication from the pen as explained interconnection with the  
20 preferred embodiment. In this embodiment, the proximal end 244B of the integral cartridge assembly 214 include bayonet threads 280 which are engageable with corresponding groove 282 formed in the distal end of the pen body 212. The distal end 244A of the tubular barrel is configured to securely but releasably engage a needle cannula assembly (not shown).

25

The cartridge assembly 214 shown in Fig. 7 may be assembled and pre-filled by any suitable means, including those disclosed, for example, in U.S. Patent Nos.

5,279,585 (Balkwill), 5,531,255 (Vacca), 5,519,984 (Veussink et al.), 5,373,684 (Vacca), 5,207,983 (Liebert et al.), 4,718,463 (Jurgens, Jr. et al.), and 4,628,969 (Jurgens, Jr. et al.), and PCT Application No. WO 94/13328 (Hagen), the disclosures of which are hereby incorporated by reference in their entirety.

5

Fig. 8 shows yet another alternative embodiment of the cartridge assembly 314 which is disposable and includes single vial retainer 332. However, a stop has been situated in the distal end 338B of the vial retainer 332 which permit the drug cartridge 340 to be inserted into the cavity 334 in one direction but resists removal of the drug cartridge, i.e., the insertion force is less than the removal force. Specifically, protrusions 360 project inwardly and extend along the neck 348 of the drug cartridge 40 to securely retain it in the cartridge assembly. In this way, upon utilization of the medication, the drug cartridge assembly 314 along with the empty drug cartridge 340 may be disengaged from the pen body assembly and safely discarded.

15

The particular material of which the cartridge assembly is made is not essential to the present invention but preferably includes a polymeric material such as polycarbonate. However, the particular material is a matter of choice depending upon availability, the manufacturing process used and the intended use of the cartridge assembly. For example, where the cartridge assembly 214 is pre-filled with the medication, the polymeric material must be compatible with the medication contained therein.

20

It should be appreciated from the detailed description of the preferred embodiments, that the particular means by which the pen body assembly 12 and the cartridge assembly are keyed, i.e., engaged so as to reduce or otherwise eliminate cross-use is essential and may be threadedly engaged by corresponding threads and grooves, bayonet threads and grooves, snap fits or a pair of lugs that mate in a reverse Luer-lock manner. In this way, the pen body assembly 12 includes either a female or male mating

25

member and the cartridge assembly 14 includes a corresponding female or male mating member engageable with one another for interconnecting the two assemblies, with the mating members selected so as to prevent cross-use with other assemblies, e.g., the pitch of the threads may be angled so as to mate only with one another and not with other  
5 assemblies.

Also, the cartridge holder sleeve can have an embedded cartridge, not readily separable from each other as described in connection with one alternative embodiment. In addition, the drug cartridge can be designed as a single integral unit for containing the  
10 drug as described in connection with another alternative embodiment.

While the preferred embodiments of the present invention have been described so as to enable one skilled in the art to practice the device of the present invention, it is to be understood that variations and modifications may be employed without departing from  
15 the concept and intent of the present invention as defined in the following claims. The preceding description is intended to be exemplary and should not be used to limit the scope of the invention. The scope of the invention should be determined only by reference to the following claims.

What is claimed is:

1. A medication delivery pen comprising:

5 a reusable pen body assembly including an advancing member having a distal end projecting from said body assembly, said pen body assembly having opposed proximal and distal ends;

a cartridge assembly for holding a disposable drug-containing cartridge having a plunger in sliding fluid tight engagement within said drug cartridge and for selective engagement with said distal end of said advancing member, said cartridge assembly  
10 having opposed proximal and distal ends; and

a pair of mating means keyed to one another and engageable with one another for interconnecting said pen body assembly with said cartridge assembly with one of said mating means being associated with the distal end of said pen body assembly and the other mating means being associated with the proximal end of said cartridge assembly to  
15 prevent cross-use of said pen body assembly with other cartridge assemblies.

2. The medication delivery pen of Claim 1, wherein said mating means includes an array of threads on the distal end of said pen body assembly and a corresponding array of threads on said proximal end of said cartridge assembly.

20

3. The medication delivery pen of Claim 2, wherein said cartridge assembly defines a mounting cavity adjacent said proximal end thereof, said plurality of threads of said cartridge assembly defining internal threads in said mounting cavity, said distal end of said pen body assembly being dimensioned for threaded engagement in said mounting  
25 cavity of said cartridge assembly.



4. The medication delivery pen of Claim 1, wherein said sealed end of said drug cartridge includes a pierceable elastomeric seal, and wherein said cartridge assembly further includes needle mounting means at said distal end for mounting a needle cannula assembly to said cartridge assembly.

5

5. A medication delivery pen comprising:

a reusable pen body assembly including an advancing member having a distal end projecting from said body assembly, said pen body assembly having opposed proximal and distal ends;

10 a disposable cartridge assembly for containing a drug to be delivered by said pen, said cartridge assembly including a tubular barrel and a plunger in sliding fluid tight engagement within said tubular barrel and for selective engagement with said distal end of an advancing member, said cartridge assembly having opposed proximal and distal ends; and

15 a pair of mating means keyed to one another and engageable with one another for interconnecting said pen body assembly with said cartridge assembly with one of said mating means being associated with the distal end of said pen body assembly and the other mating means being associated with the proximal end of said cartridge assembly to prevent cross-use of said cartridge retainer assembly with other pen assemblies.

20

6. A cartridge retainer assembly for retaining a medication cartridge having a barrel and a neck, said cartridge retainer assembly comprising:

a generally tubular body having opposed proximal and distal ends and being dimensioned for securely receiving a barrel of a cartridge therein;

25 a generally tubular needle mounting collar having opposed proximal and distal ends and being dimensioned for receiving a neck of the cartridge therein; and

means for preventing use of said pen cartridge retainer assembly with other than a designated pen body assembly.

7. The cartridge retainer assembly of Claim 6, wherein said mating means  
5 includes an array of threads on the distal end of said pen body assembly and a corresponding array of threads on said proximal end of said cartridge assembly.

8. A cartridge assembly for containing a medication having a barrel and a neck defining a smaller cross-section than the barrel, said cartridge assembly comprising:  
10 a generally tubular body having opposed proximal and distal ends and a chamber there between, with a plunger being located at the distal end of the tubular body in sliding fluid tight engagement within said tubular body and a seal being located at the proximal end of said tubular body; and

mating means for interconnecting said cartridge assembly with a pen body  
15 assembly and said mating means being associated with the proximal end of said cartridge assembly and keyed for preventing cross-use of said cartridge assembly with pen assemblies other than those pen assemblies for which it is keyed.

9. The cartridge assembly of Claim 8, wherein said mating means includes  
20 an array of threads on said proximal end of said cartridge assembly.

10. The cartridge assembly of Claim 9 wherein said generally tubular body includes an upper vial retainer and a lower vial retainer, with one of said vial retainers including at least one inwardly projecting stop for retaining a drug cartridge in said  
25 cartridge assembly.

11. The cartridge assembly of Claim 8 wherein said chamber is dimensioned and configured for engaging a barrel of a drug cartridge therein, said body further including at least one inwardly projecting support defining a distal end of said chamber.

5 12. The cartridge assembly of Claim 9, said upper vial retainer defines a mounting cavity adjacent said proximal end thereof, said plurality of threads of said cartridge assembly defining internal threads in said mounting cavity, said distal end of said pen body assembly being dimensioned for threaded engagement in said mounting cavity of said cartridge assembly.

10

13. A cartridge assembly for containing a medication having a barrel and a neck defining a smaller cross-section than the barrel, said cartridge assembly comprising:

a generally tubular body having opposed proximal and distal ends and a chamber there between, with a plunger being located at the distal end of the tubular body and seal  
15 being located at the proximal end of said tubular body; and

mating means for interconnecting said cartridge assembly with a pen body assembly and said mating means being associated with the proximal end of said cartridge assembly and keyed for preventing cross-use of said cartridge assembly with pen assemblies other than those pen assemblies for which it is keyed.

20

14. The cartridge assembly of Claim 13, wherein said mating means includes an array of threads on said proximal end of said cartridge assembly.

15. A method of assembling a medication delivery pen for preventing cross-use of a pen body assembly and a cartridge assembly of the pen, the method including the steps of:

providing a reusable pen body assembly including an advancing member having a  
5 distal end projecting from said body assembly, said pen body assembly having opposed proximal and distal ends with said distal end of said pen body assembly including first mating means;

providing a cartridge assembly having a plunger in sliding fluid tight engagement  
10 within said drug cartridge and for selective engagement with said distal end of said advancing member, said cartridge assembly having opposed proximal and distal ends with the proximal end of said cartridge assembly including a second mating means keyed to said first mating means and engageable with one another for interconnecting said pen body assembly with said cartridge assembly;

engaging said first mating means with said second mating to interconnected said  
15 assemblies with one another and preventing cross-use of said assemblies with other assemblies.

16. The method of Claim 15, further comprising the step of inserting a disposable drug-containing cartridge into a mounting cavity in said cartridge assembly.

20

177

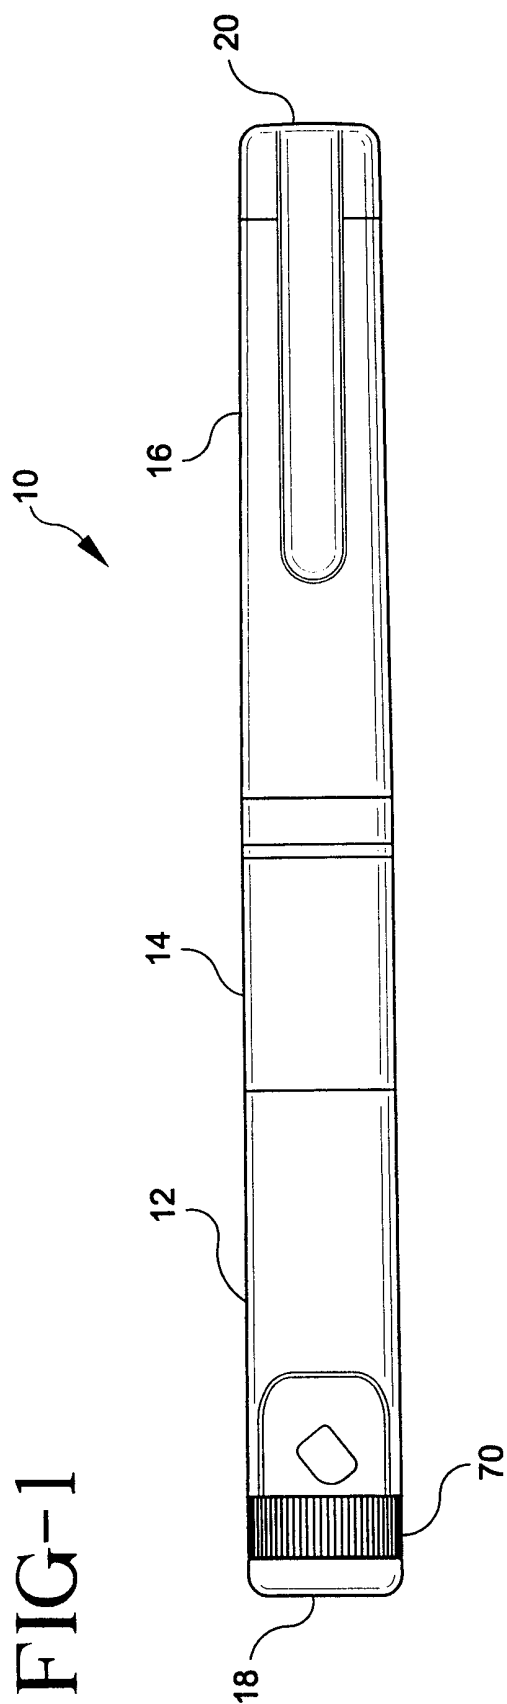


FIG-1A








FIG-2

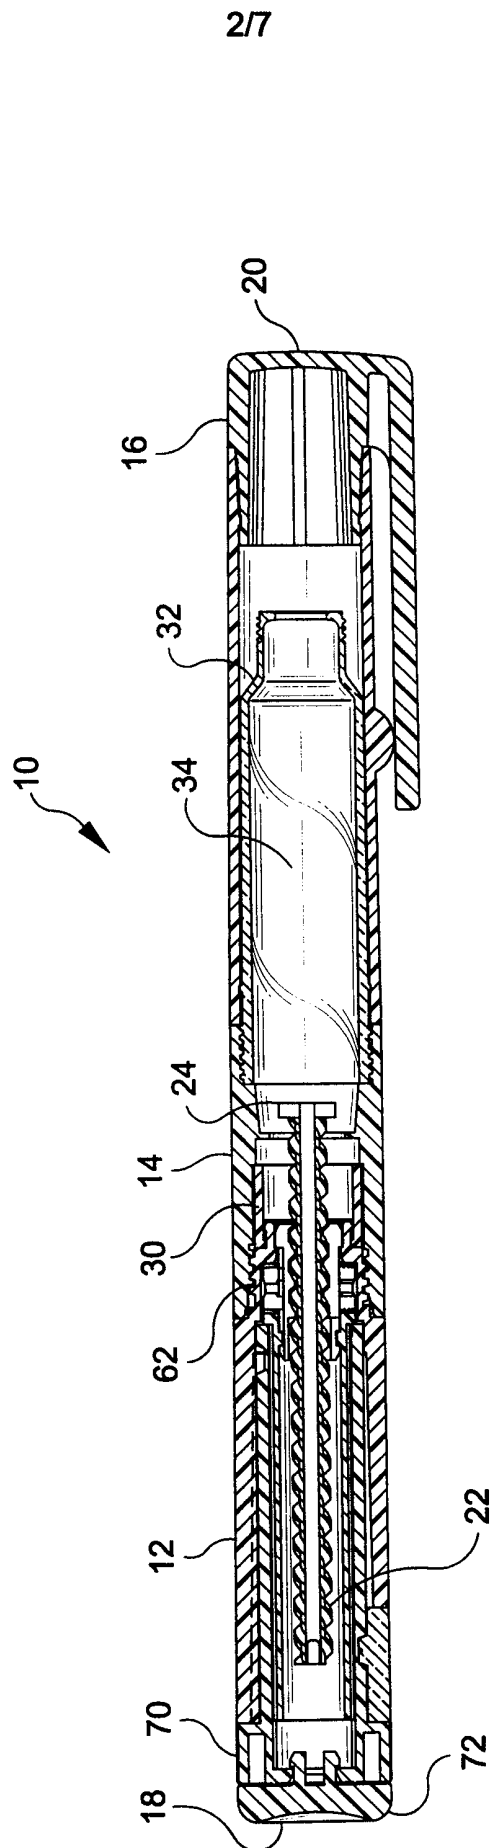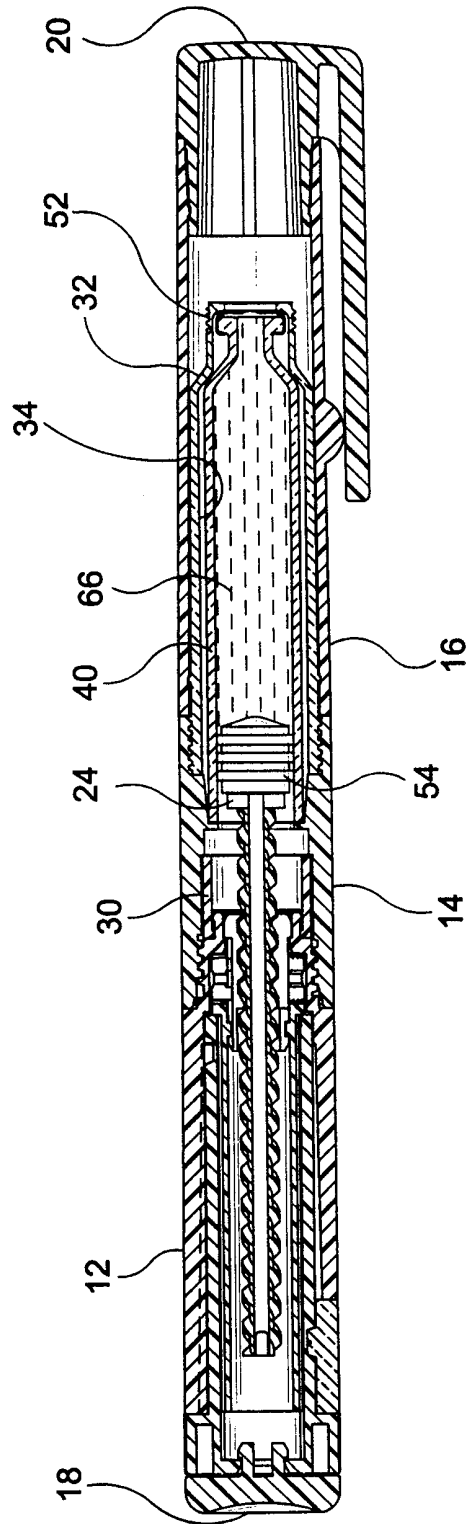

3/7

FIG-3



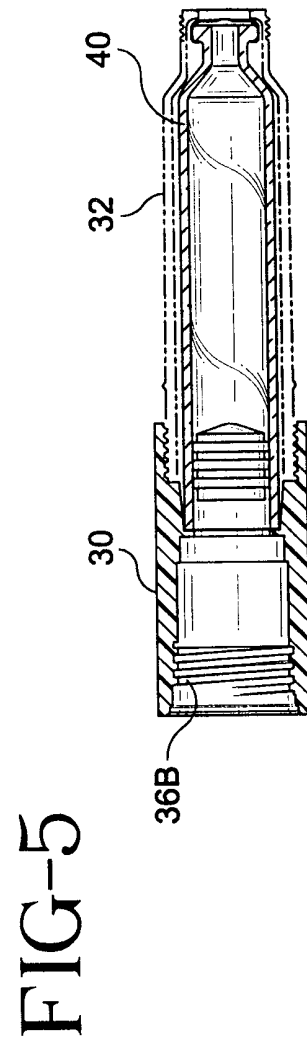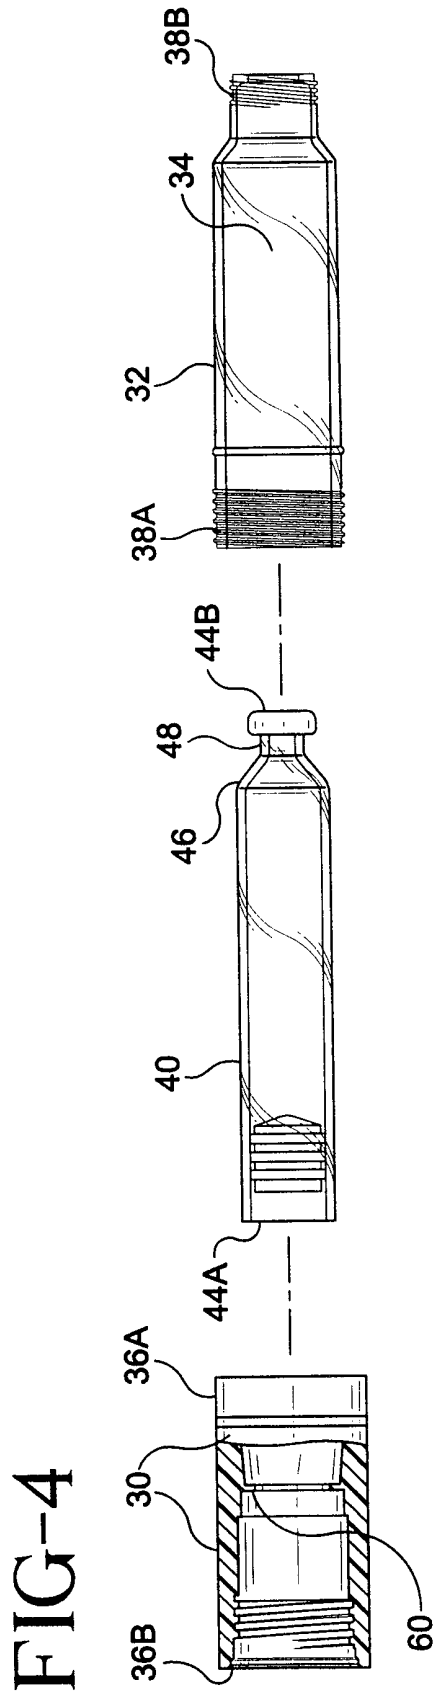



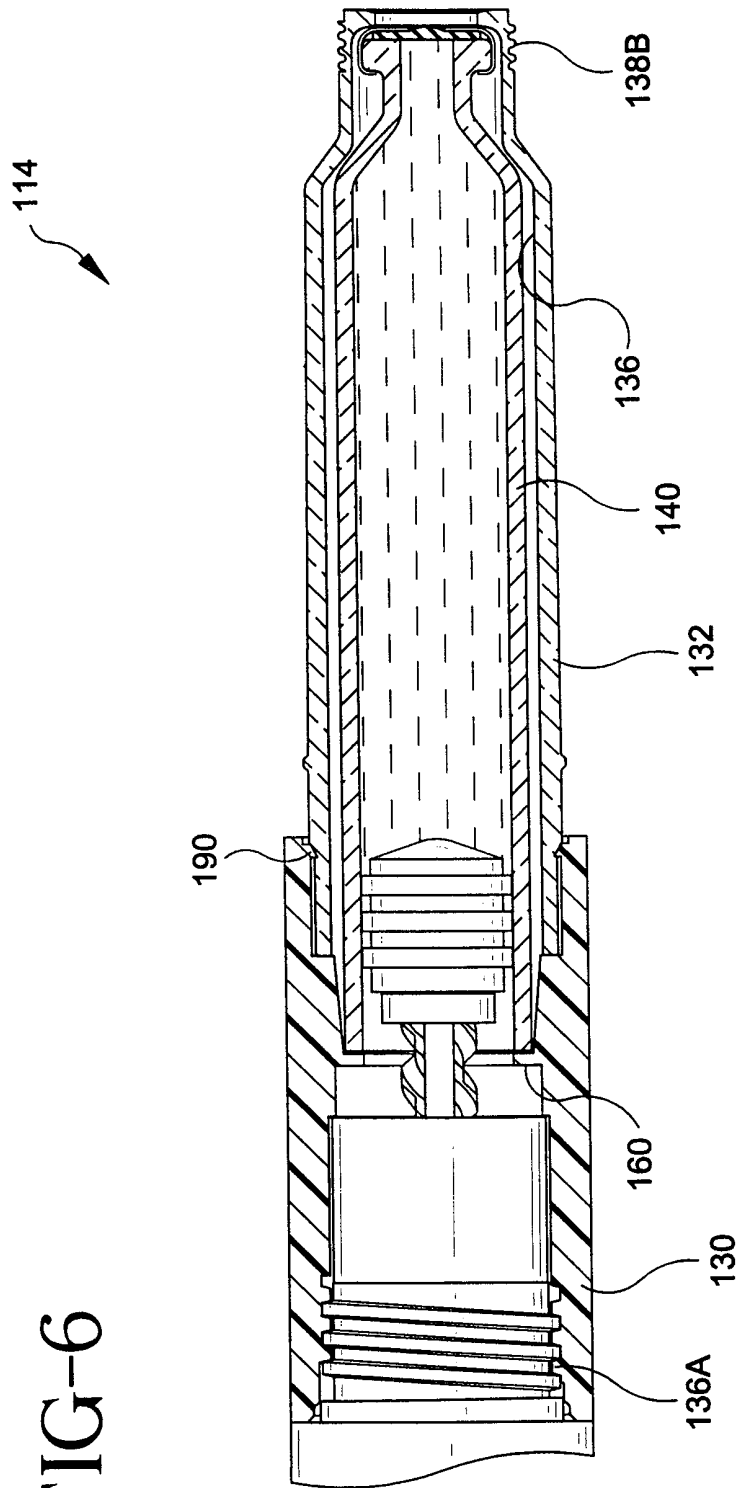


FIG-6

677

FIG-7


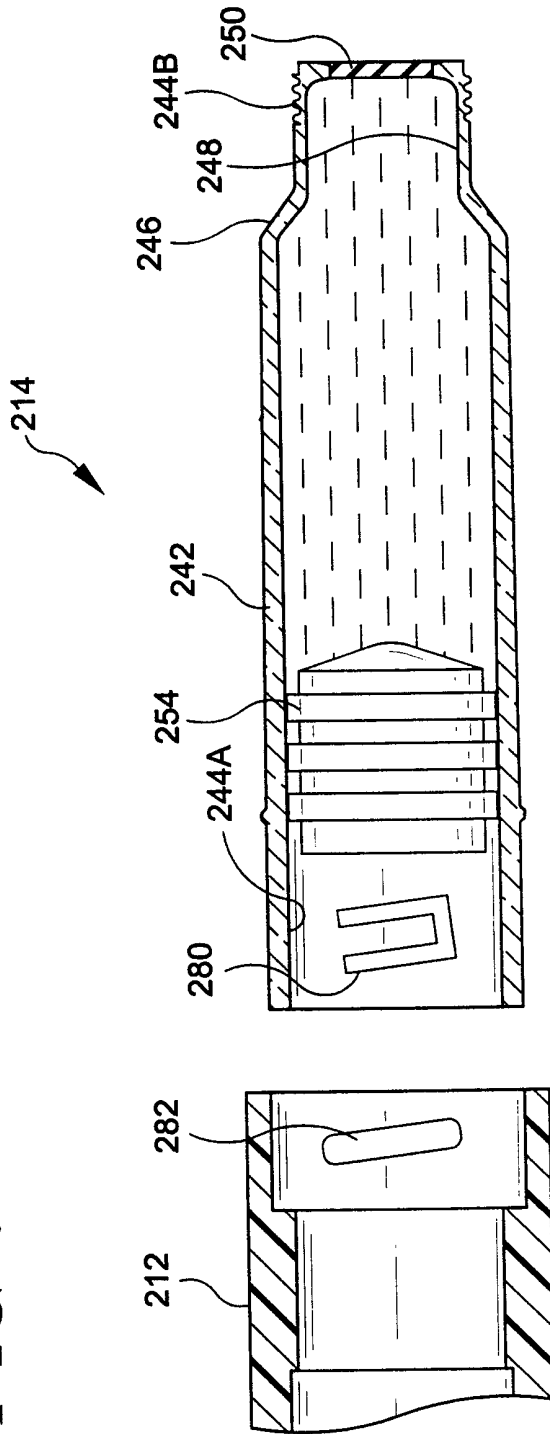


FIG-8

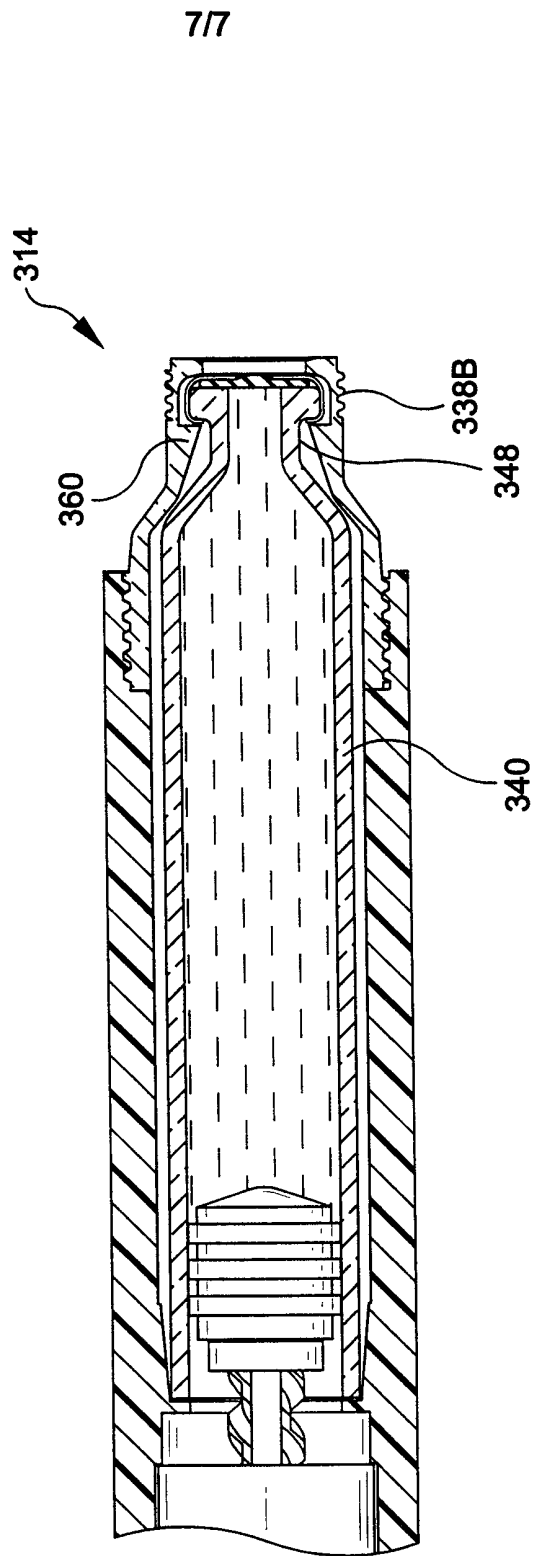

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/17409

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :A61M 5/00  
US CL :604/207, 232

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 222/46, 48, 309; 604/207-209, 224, 228, 232, 234, 241

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,549,575 A (GIAMBATTISTA et al.) 27 August 1996, entire reference, and Figs. 1 and 2.	1-15
X	US 4,936,833 A (SAMS) 26 June 1990, Figs. 1-3 and 15.	1-15
X	US 5,383,865 A (MICHEL) 24 January 1995, Figs. 1, 2 and 14.	1-15

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:  
 \*A\* document defining the general state of the art which is not considered to be of particular relevance  
 \*E\* earlier document published on or after the international filing date  
 \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 \*O\* document referring to an oral disclosure, use, exhibition or other means  
 \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
 \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
 \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
 \*&\* document member of the same patent family

Date of the actual completion of the international search

07 OCTOBER 1998

Date of mailing of the international search report

26 OCT 1998

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

A. T. NGUYEN

Telephone No. (703) 308-2154