



(51) International Patent Classification:
H04W 36/18 (2009.01)

(21) International Application Number:
PCT/US2011/030517

(22) International Filing Date:
30 March 2011 (30.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/749,646 30 March 2010 (30.03.2010) US

(71) Applicant (for all designated States except US): **QUALCOMM INCORPORATED** [US/US]; Attn: International IP Administration, 5775 Morehouse Drive, San Diego, California 92121 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KENCHAREDDY, Sanjay** [US/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **RAMACHANDRAN, Vivek**,

Venkatesh [IN/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **AMERGA, Daniel** [ET/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **BHATTACHARJEE, Supratik** [IN/US]; 5775 Morehouse Drive, San Diego, California 92121 (US).

(74) Agent: **KATBAB, Abdollah**; Attn: International IP Administration, 5775 Morehouse Drive, San Diego, California 92121 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHODS AND APPARATUS FOR SERVICE CONTINUITY IN A COMMUNICATION NETWORK

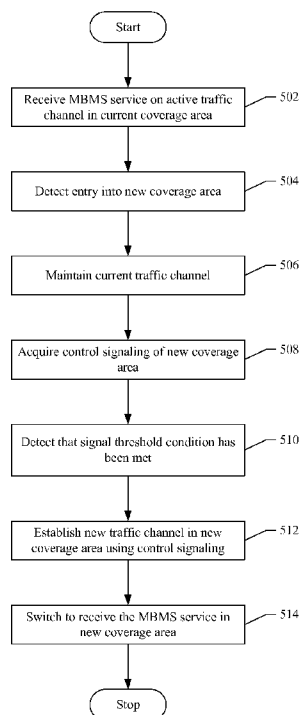


FIG. 5

(57) Abstract: A method includes receiving a service in a first network coverage area, detecting entry into a second coverage area, acquiring control signaling information of the second coverage area in response to entering into the second coverage area, establishing traffic channels in the second coverage area while the service is received from the first coverage area, and switching to receive the service on the traffic channels in the second coverage area so that service disruption is minimized. Another method includes receiving a service in a first network coverage area, acquiring control signaling information associated with other coverage areas while in the first coverage area, detecting entry into a second coverage area, establishing traffic channels in the second coverage area, and switching to receive the service on the traffic channels in the second coverage area so that service disruption is minimized.



GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

METHODS AND APPARATUS FOR SERVICE CONTINUITY IN A COMMUNICATION NETWORK

BACKGROUND

Field

[0001] The present application relates generally to the operation of communication systems, and more particularly, to methods and apparatus for service continuity in a communication network.

Background

[0002] Wireless cellular telecommunication networks are now commonly known and in widespread use. In this regard, the area covered by a telecommunication network is divided into cells and each cell is provided with at least one base station. The base stations are configured to communicate with mobile stations (MS) or other user equipment (UE) located in their respective cells.

[0003] Various standards have been proposed for communication within telecommunication networks. For example, one known standard is the Global System for Mobile Communications (GSM) standard. This standard is primarily designed for speech communications. Another standard is the General Packet Radio Service (GPRS) standard that addresses the transmission of data. The GPRS standard has generally been proposed in the context of the GSM standard. The GSM standard allows circuit switched communication while the GPRS standard allows packet switched communication. Other standards include wideband code division multiple access (WCDMA) systems that are part of Universal Mobile Telecommunications Systems (UMTS) in addition to long term evolution (LTE) systems.

[0004] Mobile stations operating in a cell establish traffic channels within the cell with which to receive broadcasts or multicasts of television programs, streaming video, streaming audio, and other multimedia content. Such services are commonly referred to as multimedia broadcast multicast services (MBMS). A MBMS might be transmitted throughout a single cell or throughout several contiguous or overlapping cells. A set of cells receiving a MBMS can be referred to as a service area.

[0005] When a mobile station moves, it may move from a location in a first coverage area to a location in a second coverage area. If the mobile station was

receiving a MBMS on a traffic channel prior to moving, there may be an interruption in service reception due to the time taken to acquire control information and establish new traffic channels on the new coverage area. This process is known as reselection. Based on current technology, the disruption may be as long as a few tens of seconds. This service disruption may result in loss of audio or video, jumps, static or other annoying effects that will directly affect the device user's experience.

[0006] Therefore, what is needed is a mechanism that operates to overcome the problems associated with conventional systems to provide efficient use of air resources and minimize interruptions for the end user when a mobile station performs reselection in a communication network.

SUMMARY

[0007] In one or more aspects, a service continuity system, comprising methods and apparatus, is provided that operates to provide service continuity for mobile stations resulting in better service reception, minimized interruptions during reselection, and an enhanced user experience.

[0008] In an aspect, a method is provided for service continuity in a communication network. The method comprises receiving a broadcast/multicast service in a first coverage area of the communication network, detecting entry into a second coverage area of the communication network, and receiving control signaling information associated with the second coverage area in response to detecting entry into the second coverage area. The method also comprises establishing one or more traffic channels in the second coverage area while the broadcast/multicast service is received from the first coverage area, and switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

[0009] In an aspect, an apparatus is provided for service continuity in a communication network. The apparatus comprises a transceiver configured to receive a broadcast/multicast service in a first coverage area of the communication network, and a processor coupled to the transceiver and configured to detect entry into a second coverage area of the communication network, receive control signaling information associated with the second coverage area in response to detecting entry into the second coverage area, establish one or more traffic channels in the second coverage area while

the broadcast/multicast service is received from the first coverage area, and switch to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

[0010] In an aspect, an apparatus is provided for service continuity in a communication network. The apparatus comprises means for receiving a broadcast/multicast service in a first coverage area of the communication network, means for detecting entry into a second coverage area of the communication network, means for receiving control signaling information associated with the second coverage area in response to detecting entry into the second coverage area, means for establishing one or more traffic channels in the second coverage area while the broadcast/multicast service is received from the first coverage area, and means for switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

[0011] In an aspect, a computer program product is provided for service continuity in a communication network. The computer program product comprises a computer-readable medium embodying codes executable by a processor to receive a broadcast/multicast service in a first coverage area of the communication network, detect entry into a second coverage area of the communication network, receive control signaling information associated with the second coverage area in response to detecting entry into the second coverage area, establish one or more traffic channels in the second coverage area while the broadcast/multicast service is received from the first coverage area, and switch to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

[0012] In an aspect, a method is provided for service continuity in a communication network. The method comprises receiving a broadcast/multicast service in a first coverage area of the communication network, acquiring control signaling information associated with one or more other coverage areas while in the first coverage area, detecting entry into a second coverage area that is part of the one or more other coverage areas, establishing one or more traffic channels in the second coverage area, and switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

[0013] In an aspect, an apparatus is provided for service continuity in a communication network. The apparatus comprises a transceiver for receiving a

broadcast/multicast service in a first coverage area of the communication network, and a processor coupled to the transceiver and configured to acquire control signaling information associated with one or more other coverage areas while in the first coverage area, detect entry into a second coverage area that is part of the one or more other coverage areas, establish one or more traffic channels in the second coverage area, and switch to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

[0014] Other aspects will become apparent after review of the hereinafter set forth Brief Description of the Drawings, Description, and the Claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The foregoing aspects described herein will become more readily apparent by reference to the following Description when taken in conjunction with the accompanying drawings wherein:

[0016] **FIG. 1** shows an exemplary communication network that illustrates aspects of a service continuity system;

[0017] **FIG. 2** shows a diagram illustrating service continuity problems associated with device mobility in conventional communication systems;

[0018] **FIG. 3** shows an exemplary service continuity apparatus for use in implementations of the service continuity system;

[0019] **FIG. 4** shows an exemplary diagram illustrating a first mode of operation for service continuity provided by the service continuity system;

[0020] **FIG. 5** shows an exemplary method for providing a first mode of operation for use in implementations of a service continuity system;

[0021] **FIG. 6** shows an exemplary diagram illustrating a second mode of operation for service continuity provided by the service continuity system;

[0022] **FIG. 7** shows an exemplary method for providing a second mode of operation for use in implementations of a service continuity system;

[0023] **FIG. 8** shows an exemplary service continuity apparatus for use in implementations of the service continuity system; and

[0024] **FIG. 9** shows an exemplary service continuity apparatus for use in implementations of the service continuity system.

DESCRIPTION

[0025] The following description describes implementations of a service continuity system that operate to provide service continuity for mobile stations as they move across coverage areas of a communication network. For example, the system operates to allow a mobile station (also referred to as a mobile device or user equipment) to maintain continuous reception of a MBMS service while moving across coverage areas of a wireless communication network.

[0026] As discussed below, the system provides several operating modes to maintain service continuity. In a first operating mode, an overlapping time interval is provided between reception of the MBMS service on traffic channel(s) of a previous coverage area and reception of control channel information in a new coverage area. The overlapping time interval allows the mobile device to establish traffic channels to continue to receive the MBMS service in the new coverage area before service in the previous coverage area is lost. The overlapping time interval occurs after the mobile device has moved into the new coverage area. This results in service continuity since the device continues to receive the MBMS service during the time the control channel information in the new coverage area is acquired.

[0027] In a second operating mode, service continuity is maintained during device mobility by pro-actively reading control channel information in neighboring coverage areas before the mobile device moves away from its current coverage area. In this operating mode, the system acquires control signaling information for other coverage areas based on signal strength criteria and stores the control signaling information so that the mobile device can quickly configure traffic channels in a new coverage area as soon as the mobile device moves to the new coverage area. This results in service continuity since the device is already prepared to continue to receive the MBMS service when it moves into the new coverage area.

[0028] This second mode of operation is also applicable when the device is in an idle mode where an active traffic channel has not been established in the first coverage area. The system again acquires the control channel information in neighboring coverage areas before the mobile device moves away from its current coverage area. When the device moves to the new coverage area an active traffic channel can be quickly established since the control signaling information for that coverage area is already stored and available.

[0029] The above modes of operation provided by the service continuity system are discussed in detail below with respect to a multicast/broadcast communication network; however, the teachings of the service continuity system can be extended to other types of communication networks as well.

[0030] FIG. 1 shows a network 100 that illustrates aspects of a service continuity system. The network 100 comprises two coverage areas (A and B). Each of the coverage areas includes a base station (BS) for communicating with devices in their local regions. The network 100 also comprises a device 102. The device 102 may be a mobile telephone, PDA, notebook computer, pager, multimedia device, or any other type of device that is operable to communicate with the base stations in the coverage areas. It should be noted that the implementations of the service continuity system discussed herein are suitable for use with virtually any number of devices.

[0031] The network 100 operates to transmit MBMS services, which can include two components; a multicast control channel (MCCH) and a multicast traffic channel (MTCH). The MTCH delivers the actual content of the MBMS services while the MCCH delivers control information related to the MBMS. The MCCH might include key control information that specifies how the content in the MTCH is to be delivered.

[0032] The MCCH is used for a Point-to-Many (PtM) downlink transmission of control signaling information between a network and mobile devices in a particular coverage area. The control signaling information gives details about the MBMS services available in the coverage area and also specifies the radio bearer configuration (service specific) to receive the services from the coverage area. For example, the MCCH may specify parameters such as channel coding, frequency, or other transmission parameters. Once the MCCH messages are acquired, the MTCH can be setup to receive MBMS services through PtM bearers.

[0033] The MTCH is used for a downlink transmission of user plane information between network and mobile devices. The user plane information on the MTCH is MBMS Service specific and is sent to mobile devices with an activated MBMS service.

[0034] It will be assumed that the device 102 is currently in coverage area A and in communication BS1. For example, the device 102 is currently receiving a MBMS service 104 from BS1. When the device 102 moves from coverage area A into coverage area B, there may be a service disruption since the device 102 may continue receiving the MBMS service 106 only after reception of control signaling information from BS2

and setting up the appropriate traffic channels. Thus, a delay in service reception results that can last as long as tens of seconds depending on the protocol requirements of the transmission technology in use.

[0035] To overcome the problems of service disruption associated with conventional systems as describe above, the device **102** comprises service continuity apparatus **108**. The apparatus **108** operates in accordance with the functions of the service continuity system disclosed herein to reduce or eliminate service disruptions as the device moves across coverage areas of the network **100**. For example, in one implementation, the service continuity apparatus **108** operates to obtain and store control signaling information for new coverage areas while the device **102** is still receiving the MBMS **104** in coverage area A. As the signal from coverage area A fades, the stored control signaling information is used to quickly setup the appropriate traffic channels for reception of the MBMS service **106** in coverage area B so that a service disruption does not occur. A more detailed description of the operation of the service continuity apparatus **108** is provided below.

[0036] Thus, a service continuity system is provided that operates to reduce or eliminate service disruptions as a device moves across coverage areas of a wireless communication network. It should be noted that the network **100** represent just one implementation and that other implementations of the system are possible.

[0037] **FIG. 2** shows a diagram **200** illustrating service continuity problems associated with device mobility in conventional communication systems. The diagram **200** is described below with reference to the network **100** shown in **FIG. 1**.

[0038] At reference **202**, the device **102** is in coverage area A and receives control signaling information **206** from BS1. At reference **210**, the device **102** uses the signaling information to establish traffic channel A in coverage area A with BS1. The timeline **212** indicates that between times T1 and T2, the device is in active service reception in coverage area A so that the MBMS service **104** from BS1 can be received.

[0039] At reference **204** (time T2), the device moves into coverage area B and receives control signaling information **208** from BS2. During the time interval T2-T3, the device experiences a service disruption so that the MBMS service previously received from BS1 is disrupted.

[0040] At reference **214**, the device **102** uses control signaling information obtained at **208** to establish traffic channel B with BS2 in coverage area B. The timeline **212**

indicates that between times T3 and T4 the device is in active service reception in coverage area B so that the MBMS service **106** from BS2 can be received. Unfortunately, the service disruption experienced between times T2 and T3 may be several seconds in length and result is an unsatisfactory user experience.

[0041] **FIG. 3** shows an exemplary service continuity apparatus **300** for use in implementations of the service continuity system. For example, the service continuity apparatus **300** is suitable for use as the service continuity apparatus **108** shown in **FIG. 1**. The service continuity apparatus **300** comprises processor **302**, memory **304**, and transceiver **306**, which are coupled to communicate using data bus **308**. It should be noted that the service continuity apparatus **300** illustrates just one implementation and that other implementations are possible. For example, the service continuity apparatus **300** may be implemented in one or more integrated circuits that provide the functionality of the service continuity system described herein.

[0042] The transceiver **306** comprises hardware and/or hardware executing software that is configured to allow the service continuity apparatus **300** to communicate data or other information over a network with remote devices or systems. For example, the transceiver **306** is configured to receive control signaling information and/or MBMS transmissions from base stations in one or more network coverage areas. Information received by the transceiver **306** is passed to the processor **302**.

[0043] The memory **304** comprises a hard disk, optical disk, RAM, ROM, EEPROM and/or any other suitable memory device operable to allow information to be stored and retrieved. The memory **304** comprises a continuity program **312** which is a set of instructions or codes stored in the memory that are executable by the processor **302** to provide the functions of the service continuity system. The memory also comprises control signaling parameters **314** which identify control signaling information for one or more coverage areas. The control signaling parameters **314** can be used to establish traffic channels as the device moves from one coverage area to another.

[0044] The processor **302** comprises at least one of a CPU, processor, gate array, hardware logic, memory elements, virtual machine, and/or hardware executing software. Thus, in one implementation, the processor **302** comprises logic to execute machine-readable instructions, such as instructions of the continuity program **312**. In another implementation, the processor **302** comprises dedicated logic to control one or

more other elements of the service continuity apparatus **300** to provide the functions of the service continuity system described herein.

[0045] During operation, the processor **302** controls the transceiver **306** to collect control signaling information from nearby coverage areas. The control signaling information comprises modulation and coding schemes, channel configuration parameters, and/or any other type of control signaling information.

[0046] The control signaling information is stored in the memory **304** as part of the control signaling parameters **314** and can later be used to establish traffic channels to provide continuity of service to the mobile device as the device moves from one coverage area to another. A more detailed description of the various operating modes of the service continuity apparatus **300** is provided below.

[0047] The processor **302** operates to control the functions of the continuity apparatus to provide one or more of the following operating modes.

Mode 1 – Maintain MBMS service reception provided in previous coverage area when moving into new coverage area until control signaling information for new coverage area is acquired and new traffic channels established.

Mode 2 – Proactively acquire control signaling information for new coverage areas when available. Use control signaling information to establish new traffic channels when entering new coverage areas so that existing MBMS services in previous coverage area can continue to be received. This mode also is applicable during idle operation when no traffic channel exists in the current coverage area.

[0048] In one implementation, the service continuity system comprises a computer program product having one or more program instructions (“instructions”) or sets of “codes” stored or embodied on a machine-readable medium, such as the continuity program **312** stored in the memory **304**. When the codes are executed by at least one processor, for instance, the processor **302**, their execution causes the service continuity apparatus **300** to provide the functions of the service continuity system described herein. For example, the machine-readable medium comprises a floppy disk, CDROM, memory card, FLASH memory device, RAM, ROM, or any other type of memory device or machine-readable medium that interfaces to the service continuity apparatus **300**. In another aspect, the sets of codes may be downloaded into the service continuity apparatus **300** from an external device or communication network resource. The sets of

codes, when executed, will cause the service continuity apparatus **300** to provide the functions of the service continuity system as described herein.

Mode 1

[0049] In this section, a first mode of operation for maintaining service continuity is described. In this mode, an overlapping time interval exists between the reception of services over a traffic channel of a previous coverage area (A) and reception of control channel information in a new coverage area (B). The overlapping time interval occurs after the mobile device has moved to the new coverage area B.

[0050] FIG. 4 shows an exemplary diagram **400** illustrating the operation of mode 1 for service continuity provided by the service continuity system. For clarity, the diagram **400** is described below with reference to the service continuity apparatus **300** shown in FIG. 3. For example, in one implementation, the processor **302** executes one or more instructions or sets of codes to control the service continuity apparatus **300** to perform the functions described below.

[0051] At reference **402**, a device comprising the service continuity apparatus **300** is located in coverage area A of a wireless communication network. At reference **404**, control signaling information for coverage area A is obtained and stored. For example, the processor **302** controls the transceiver **306** to acquire the control signaling information for coverage area A and store this information in the memory **304** as part of the control signaling parameters **314**.

[0052] At reference **406**, a traffic channel A is established in coverage area A. The traffic channel A is used to receive one or more MBMS services available in coverage area A. A timeline, shown generally at **408**, illustrates that the traffic channel A is established at time T1.

[0053] At time T2, the device moves into coverage area B as indicated at reference **410**. Once in coverage area B, the device acquires control signaling information for coverage area B as indicated at **412**. The control signaling information allows the device to establish traffic channels in coverage area B. During the acquisition of the control signaling information **412**, the device maintains the active traffic channel **406** with coverage area A and continues to receive the MBMS service. The overlap of service reception on traffic channel A and control signaling (B) acquisition indicated by the time interval between T2 and T3 ensures service continuity.

[0054] At time T3, the device establishes traffic channel B **414** in coverage area B. For example, traffic channel A **406** will be lost if its signal strength fades below a selected threshold value. Using the control signaling information acquired at **412**, the device establishes traffic channel B **414**. Since the device has previously acquired the control signaling information for coverage area B, the device is able to quickly switch to traffic channel B once traffic channel A starts to fade or is lost such that disruption of the MBMS service is minimized or eliminated. Between times T3 and T4 the device continues to receive the MBMS service on traffic channel B.

[0055] Therefore, the diagram **400** illustrates mode 1 operation provided by the service continuity system to obtain control signaling parameters for adjacent coverage areas so that new traffic channels can be quickly established as the device moves between coverage areas. As a result, service disruptions are reduced or eliminated.

[0056] **FIG. 5** shows an exemplary method **500** for providing a first mode of operation for use in implementations of a service continuity system. For clarity, the method **500** is described below with reference to the service continuity apparatus **300** shown in **FIG. 3**. In one implementation, the processor **302** executes one or more instructions or sets of codes to control the service continuity apparatus **300** to perform the functions described below. In another implementation, the functions described below are performed by one or more integrated circuits.

[0057] At block **502**, a MBMS service is received on an active traffic channel in a first coverage area. For example, the processor **302** controls the transceiver **306** to receive control signaling parameters in the current coverage area. The control signaling parameters are used to establish one or more traffic channels in the current coverage area allowing a device to receive the MBMS service.

[0058] At block **504**, it is detected that the device has entered a new coverage area. For example, the device moves from a first coverage area to a second coverage area. The move into the new coverage area is detected by the processor **302**.

[0059] At block **506**, the current traffic channel is maintained in the new coverage area. For example, the processor **302** controls the transceiver **306** to maintain the current traffic channel in the new coverage area so that the MBMS service can continue to be received.

[0060] At block **508**, control signaling information of the new coverage area is acquired. For example, the processor **302** controls the transceiver **306** to receive control

signaling parameters in the new coverage area. The control signaling parameters are passed to the processor **302** and stored in the memory **304**.

[0061] At block **510**, it is detected that a signal threshold condition has been met. For example, the transceiver **306** detects the signal strength of the traffic channel provided by the previous coverage area and determines that the signal strength has fallen below a selected threshold indicating that the traffic channel is fading.

[0062] At block **512**, in response to the fading traffic channel from the previous coverage area, a new traffic channel in the new coverage area is established. For example, the processor **302** controls the transceiver **306** to utilize the control signaling parameters stored in the memory to establish one or more new traffic channels in the new coverage area.

[0063] At block **514**, a switch to the new traffic channel is performed to receive the MBMS service on the new traffic channel in the new coverage area such that there is no or minimal service disruption. For example, the processor **302** controls the transceiver **306** to switch to the new traffic channel to receive the MBMS service before the previous traffic channel completely fades such that there is no or minimal disruption in the reception of the MBMS service.

[0064] Therefore, the method **500** operates to provide a first mode of operation provided by the service continuity system. It should be noted that the method **500** is just one implementation and that the operations of the method **500** may be rearranged or otherwise modified such that other implementations are possible.

Mode 2

[0065] In this section, a second operating mode for maintaining service continuity is described. In this mode, control information associated with neighboring coverage areas is pro-actively acquired before the mobile device moves away from the current coverage area. This mode operates to acquire the control information ahead of time and store it in memory so that it can be used to quickly configure traffic channels in the new coverage area as soon as the device moves to the new coverage area. Thus, service disruptions are reduced or eliminated. This mode is also applicable when the device is idle such that no traffic channel is active prior to the move to the new coverage area.

[0066] FIG. 6 shows an exemplary diagram **600** illustrating a second operating mode of the service continuity system. For clarity, the diagram **600** is described below

with reference to the service continuity apparatus **300** shown in **FIG. 3**. In one implementation, the processing logic **302** executes one or more instructions or codes to control the service continuity apparatus **300** to perform the functions described below.

[0067] At reference **602**, a device comprising the service continuity apparatus **300** is located in coverage area A of a wireless communication network. At reference **604**, control signaling information for coverage area A is acquired and stored. For example, the processor **302** controls the transceiver **306** to acquire the control signaling information for coverage area A and store this information in the memory **306** as part of the control signaling parameters **316**.

[0068] At reference **606**, a traffic channel A is established in coverage area A. The traffic channel A is used to receive one or more MBMS services available in coverage area A. A timeline is shown generally at **614**. Between times T1 and T2 control signaling information is acquired for coverage area B. For example, the device determines that the signal strength of coverage area B has reached a selected threshold indicating that control signaling information for that coverage area can be reliably acquired. It should also be noted that traffic channel A need not be established so that the device is in idle mode while in coverage area A.

[0069] At reference **610**, the device moves from coverage area A to coverage area B. Since the device already has acquired the control signaling information for coverage area B, the traffic channel B **612** can be quickly established such that there is no or only minimal disruption in the reception of the MBMS service on traffic channel B. If the device was in idle mode in coverage area A, traffic channel B may still be quickly established when the device moves in coverage area B since the control signaling parameters for coverage area B have already been acquired.

[0070] Therefore, the diagram **600** illustrates a second operating mode provided by the service continuity system which operates to obtain control signaling parameters for adjacent coverage areas so that new traffic channels can be quickly established as the device moves into a new coverage area. As a result, service disruptions are reduced or eliminated.

[0071] **FIG. 7** shows an exemplary method **700** for providing a second operating mode for use in aspects of a service continuity system. For clarity, the method **700** is described below with reference to the service continuity apparatus **300** shown in **FIG. 3**. In one implementation, the processor **302** executes one or more instructions or sets of

codes to control the service continuity apparatus **300** to perform the functions described below. In another implementation, the functions described below are performed by one or more integrated circuits.

[0072] At block **702**, control signaling information for a current coverage area is acquired. For example, the processor **302** controls the transceiver **306** to receive control signaling parameters in the current coverage area. The control signaling parameters are passed to the processor **302** and stored in the memory **304**.

[0073] At block **704**, a determination is made as to whether or not a MBMS service is to be received. For example, the processor **302** makes this determination based on user input or other stored information. If a MBMS service is to be received, the method proceeds to block **706**. If no MBMS is to be received, the method proceeds to block **710**.

[0074] At block **706**, one or more traffic channels are established to receive the MBMS service in the current coverage area. For example, the processor **302** controls the transceiver **306** to use the stored control signaling information to establish the traffic channels.

[0075] At block **708**, the desired MBMS service is received on the established traffic channels in the current coverage area. For example, the transceiver **306** receives the MBMS service and passes the information to the processor **302**.

[0076] At block **710**, the device remains in an idle mode since no traffic channels have been established.

[0077] At block **712**, it is detected that one or more signaling thresholds have been met. For example, the transceiver **306** detects that control signaling information associated with other coverage area can be received at the device's current location. In one implementation, to make this detection, the transceiver detects that the signal strength of control signal transmissions from one or more other coverage areas has reached a selected threshold whereby the associated control signaling information can be accurately received.

[0078] At block **714**, control signaling information is acquired for one or more coverage areas. For example, the processor **302** controls the transceiver **306** to acquire control signaling parameters for each coverage area whose transmission strength meets a selected threshold value. The control signaling parameters are passed to the processor **302** and stored in the memory **304**.

[0079] At block 716, it is detected that the device has entered a new coverage area. For example, the transceiver 306 detects that the device has moved in a new coverage area based on received signal transmissions.

[0080] At block 718, a determination is made as to whether service continuity or a new service is required. For example, if a MBMS service is currently being received from a previous coverage area then service continuity is required to continue to receive the MBMS service in the new coverage area. In one implementation, the processor 302 makes this determination. If service continuity is required, the method proceeds to block 720.

[0081] If a new MBMS service is required, the method proceeds to block 720 to set up traffic channels to receive the new service. If service continuity or a new service is not required, the method ends.

[0082] It should be noted that if a new service is required, the control signaling parameters for the new coverage area are already stored in the memory 304 and can be quickly accessed to establish a new traffic channel in the new coverage area to receive the new MBMS service. As a result, any delay associated with service continuation, activation, or initiation will be minimized.

[0083] At block 720, the stored control signaling information for the new coverage area is retrieve from the memory 304 and used to establish a new traffic channel in the new coverage area. For example, the processor 302 retrieves the control signaling parameters from the memory 304 and controls the transceiver 306 to use the control signaling parameters to establish a new traffic channel.

[0084] At block 722, a switch is performed to receive MBMS service on a traffic channel in the new coverage area. In one implementation, the MBMS service is a continuation of services received at block 708. For example, the device receiving the service has moved into a new coverage area and the reception of service continues in the new coverage area. In this case, the service continuity system operates to minimize or eliminate interruptions in service reception during reselection.

[0085] In another implementation, reception of a new service is started in the new coverage area. For example, the device was operating in an idle mode before moving in the new coverage area. In this case, the service continuity system operates to initiate service reception in the new coverage area so that delay of service initiation is minimized as a device moves into a new coverage area.

[0086] Therefore, the method **700** operates to provide a second mode of operation in accordance with the service continuity system. It should be noted that the method **700** is just one implementation and that the operations of the method **700** may be rearranged or otherwise modified such that other implementations are possible.

[0087] **FIG. 8** shows an exemplary service continuity apparatus **800** for use in aspects of a service continuity system. For example, the apparatus **800** is suitable for use as the service continuity apparatus **108** shown in **FIG. 1**. In one implementation, the apparatus **800** is implemented by at least one integrated circuit comprising one or more modules configured to provide aspects of a service continuity system as described herein. For example, each module comprises hardware and/or hardware executing software.

[0088] The apparatus **800** comprises a first module comprising means (**802**) for receiving a broadcast/multicast service in a first coverage area of the communication network, which in an aspect comprises the transceiver **310**. The apparatus **800** also comprises a second module comprising means (**804**) for detecting entry into a second coverage area of the communication network, which in an aspect comprises processor **302**. The apparatus **800** also comprises a third module comprising means (**806**) for receiving control signaling information associated with the second coverage area in response to detecting entry into the second coverage area, which in an aspect comprises the processor **302**. The apparatus **800** also comprises a fourth module comprising means (**806**) for establishing one or more traffic channels in the second coverage area while the broadcast/multicast service is received from the first coverage area, which in an aspect comprises the processor **302**. The apparatus **800** also comprises a fifth module comprising means (**806**) for switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized, which in an aspect comprises the processor **302**.

[0089] **FIG. 9** shows an exemplary service continuity apparatus **900** for use in aspects of a service continuity system. For example, the apparatus **900** is suitable for use as the service continuity apparatus **109** shown in **FIG. 1**. In one implementation, the apparatus **900** is implemented by at least one integrated circuit comprising one or more modules configured to provide aspects of a service continuity system as described herein. For example, each module comprises hardware and/or hardware executing software.

[0090] The apparatus **900** comprises a first module comprising means (**902**) for receiving a broadcast/multicast service in a first coverage area of the communication network, which in an aspect comprises the transceiver **310**. The apparatus **900** also comprises a second module comprising means (**904**) for acquiring control signaling information associated with one or more other coverage areas while in the first coverage area, which in an aspect comprises the processor **302**. The apparatus **900** also comprises a third module comprising means (**906**) for detecting entry into a second coverage area that is part of the one or more other coverage areas, which in an aspect comprises the processor **302**. The apparatus **900** also comprises a fourth module comprising means (**908**) for establishing one or more traffic channels in the second coverage area, which in an aspect comprises the processor **302**. The apparatus **900** also comprises a fifth module comprising means (**910**) for switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized, which in an aspect comprises the processor **302**.

[0091] In one or more exemplary embodiments, the functions described may be implemented in hardware, software, firmware, or any combination thereof. If implemented in software, the functions may be stored on or transmitted over as one or more instructions or code on a computer-readable medium. Computer-readable media includes both computer storage media and communication media including any medium that facilitates transfer of a computer program from one place to another. A storage media may be any available media that can be accessed by a computer. By way of example, and not limitation, such computer-readable media can comprise RAM, ROM, EEPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other medium that can be used to carry or store desired program code in the form of instructions or data structures and that can be accessed by a computer. Also, any connection is properly termed a computer-readable medium. For example, if the software is transmitted from a website, server, or other remote source using a coaxial cable, fiber optic cable, twisted pair, digital subscriber line (DSL), or wireless technologies such as infrared, radio, and microwave, then the coaxial cable, fiber optic cable, twisted pair, DSL, or wireless technologies such as infrared, radio, and microwave are included in the definition of medium. Disk and disc, as used herein, includes compact disc (CD), laser disc, optical disc, digital versatile disc (DVD), floppy

disk and blu-ray disc where disks usually reproduce data magnetically, while discs reproduce data optically with lasers. Combinations of the above should also be included within the scope of computer-readable media.

[0092] The steps of a method or algorithm described in connection with the aspects disclosed herein may be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module may reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, a hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. An exemplary storage medium is coupled to the processor, such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC. The ASIC may reside in a wireless communication device. In the alternative, the processor and the storage medium may reside as discrete components in a wireless communication device.

[0093] The description of the disclosed aspects is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these aspects may be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other aspects, e.g., in an instant messaging service or any general wireless data communication applications, without departing from the spirit or scope of the invention. Thus, the present invention is not intended to be limited to the aspects shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein. The word “exemplary” is used exclusively herein to mean “serving as an example, instance, or illustration.” Any aspect described herein as “exemplary” is not necessarily to be construed as preferred or advantageous over other aspects.

[0094] Accordingly, while aspects of a service continuity system have been illustrated and described herein, it will be appreciated that various changes can be made to the aspects without departing from their spirit or essential characteristics. Therefore, the disclosures and descriptions herein are intended to be illustrative, but not limiting, of the scope of the invention, which is set forth in the following claims.

CLAIMS**WHAT IS CLAIMED IS:**

1. A method for providing service continuity in a communication network, the method comprising:

receiving a broadcast/multicast service in a first coverage area of the communication network;

detecting entry into a second coverage area of the communication network;

receiving control signaling information associated with the second coverage area in response to detecting entry into the second coverage area;

establishing one or more traffic channels in the second coverage area while the broadcast/multicast service is received from the first coverage area; and

switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

2. The method of claim 1, wherein said detecting comprises detecting that signal power of a signal associated with the second coverage area is above a selected threshold.

3. The method of claim 1, wherein the control signaling information comprises radio bearer configuration information.

4. The method of claim 1, wherein said establishing comprises establishing the one or more traffic channels in the second coverage area using the control signaling information.

5. The method of claim 1, wherein said switching comprises detecting that signal power of a signal associated with the first coverage area is below a selected threshold.

6. The method of claim 1, further comprising releasing traffic channels in the first coverage area after performing said switching operation.

7. An apparatus for providing service continuity in a communication network, the apparatus comprising:

a transceiver configured to receive a broadcast/multicast service in a first coverage area of the communication network; and

a processor coupled to the transceiver and configured to:

detect entry into a second coverage area of the communication network;

receive control signaling information associated with the second coverage area in response to detecting entry into the second coverage area;

establish one or more traffic channels in the second coverage area while the broadcast/multicast service is received from the first coverage area; and

switch to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

8. The apparatus of claim 7, wherein said processor is configured to detect entry into a second coverage area when signal power of a signal associated with the second coverage area is above a selected threshold.

9. The apparatus of claim 7, wherein the control signaling information comprises radio bearer configuration information.

10. The apparatus of claim 7, wherein said processor is configured to establish the one or more traffic channels in the second coverage area using the control signaling information.

11. The apparatus of claim 7, wherein said processor is configured to switch when signal power of a signal associated with the first coverage area is below a selected threshold.

12. The apparatus of claim 7, wherein said processor is configured to release traffic channels in the first coverage area after performing said switching operation.

13. An apparatus for providing service continuity in a communication network, the apparatus comprising:

means for receiving a broadcast/multicast service in a first coverage area of the communication network;

means for detecting entry into a second coverage area of the communication network;

means for receiving control signaling information associated with the second coverage area in response to detecting entry into the second coverage area;

means for establishing one or more traffic channels in the second coverage area while the broadcast/multicast service is received from the first coverage area; and

means for switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

14. The apparatus of claim 13, wherein said means for detecting comprises means for detecting that signal power of a signal associated with the second coverage area is above a selected threshold.

15. The apparatus of claim 13, wherein the control signaling information comprises radio bearer configuration information.

16. The apparatus of claim 13, wherein said means for establishing comprises means for establishing the one or more traffic channels in the second coverage area using the control signaling information.

17. The apparatus of claim 13, wherein said means for switching comprises means for detecting that signal power of a signal associated with the first coverage area is below a selected threshold.

18. The apparatus of claim 13, further comprising means for releasing traffic channels in the first coverage area after performing said switching operation.

19. A computer program product for providing service continuity in a communication network, the computer program product comprising:

a computer-readable medium embodying codes executable by a processor to:

receive a broadcast/multicast service in a first coverage area of the communication network;

detect entry into a second coverage area of the communication network;

receive control signaling information associated with the second coverage area in response to detecting entry into the second coverage area;

establish one or more traffic channels in the second coverage area while the broadcast/multicast service is received from the first coverage area; and

switch to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

20. The computer-readable medium of claim 19, wherein said codes are configured to cause the processor to detect entry into a second coverage area when signal power of a signal associated with the second coverage area is above a selected threshold.

21. The computer-readable medium of claim 19, wherein the control signaling information comprises radio bearer configuration information.

22. The computer-readable medium of claim 19, wherein said codes are configured to cause the processor to establish the one or more traffic channels in the second coverage area using the control signaling information.

23. The computer-readable medium of claim 19, wherein said codes are configured to cause the processor to switch when signal power of a signal associated with the first coverage area is below a selected threshold.

24. The computer-readable medium of claim 19, wherein said codes are configured to cause the processor to release traffic channels in the first coverage area after performing said switching operation.

25. A method for providing service continuity in a communication network, the method comprising:

receiving a broadcast/multicast service in a first coverage area of the communication network;

acquiring control signaling information associated with one or more other coverage areas while in the first coverage area;

detecting entry into a second coverage area that is part of the one or more other coverage areas;

establishing one or more traffic channels in the second coverage area; and

switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

26. The method of claim 25, wherein said detecting comprises detecting that signal power of a signal associated with the second coverage area is above a selected threshold.

27. The method of claim 25, wherein the control signaling information comprises radio bearer configuration information.

28. The method of claim 25, wherein said establishing comprises establishing the one or more traffic channels in the second coverage area using selected control signaling information associated with the second coverage area.

29. The method of claim 25, wherein said switching comprises detecting that signal power of a signal associated with the first coverage area is below a selected threshold.

30. The method of claim 25, further comprising releasing traffic channels in the first coverage area after performing said switching operation.

31. An apparatus for providing service continuity in a communication network, the apparatus comprising:

a transceiver for receiving a broadcast/multicast service in a first coverage area of the communication network; and

a processor coupled to the transceiver and configured to:

acquire control signaling information associated with one or more other coverage areas while in the first coverage area;

detect entry into a second coverage area that is part of the one or more other coverage areas;

establish one or more traffic channels in the second coverage area; and

switch to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

32. The apparatus of claim 31, wherein said processor is configured to detect entry into a second coverage area when signal power of a signal associated with the second coverage area is above a selected threshold.

33. The apparatus of claim 31, wherein the control signaling information comprises radio bearer configuration information.

34. The apparatus of claim 31, wherein said processor is configured to establish the one or more traffic channels in the second coverage area using selected control signaling information associated with the second coverage area.

35. The apparatus of claim 31, wherein said processor is configured to switch when signal power of a signal associated with the first coverage area is below a selected threshold.

36. The apparatus of claim 31, wherein said processor is configured to release traffic channels in the first coverage area after performing said switching operation.

37. An apparatus for providing service continuity in a communication network, the apparatus comprising:

means for receiving a broadcast/multicast service in a first coverage area of the communication network;

means for acquiring control signaling information associated with one or more other coverage areas while in the first coverage area;

means for detecting entry into a second coverage area that is part of the one or more other coverage areas;

means for establishing one or more traffic channels in the second coverage area; and

means for switching to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

38. The apparatus of claim 37, wherein said means for detecting comprises means for detecting that signal power of a signal associated with the second coverage area is above a selected threshold.

39. The apparatus of claim 37, wherein the control signaling information comprises radio bearer configuration information.

40. The apparatus of claim 37, wherein said means for establishing comprises means for establishing the one or more traffic channels in the second coverage area using selected control signaling information associated with the second coverage area.

41. The apparatus of claim 37, wherein said means for switching comprises means for detecting that signal power of a signal associated with the first coverage area is below a selected threshold.

42. The apparatus of claim 37, further comprising means for releasing traffic channels in the first coverage area after performing said switching operation.

43. A computer program product for providing service continuity in a communication network, the computer program product comprising:

a computer-readable medium embodying codes executable by a processor to:

- receive a broadcast/multicast service in a first coverage area of the communication network;
- acquire control signaling information associated with one or more other coverage areas while in the first coverage area;
- detect entry into a second coverage area that is part of the one or more other coverage areas;
- establish one or more traffic channels in the second coverage area; and
- switch to receive the broadcast/multicast service on the one or more traffic channels in the second coverage area so that service disruption is minimized.

44. The computer-readable medium of claim 43, wherein said codes are configured to cause the processor to detect entry into a second coverage area when signal power of a signal associated with the second coverage area is above a selected threshold.

45. The computer-readable medium of claim 43, wherein the control signaling information comprises radio bearer configuration information.

46. The computer-readable medium of claim 43, wherein said codes are configured to cause the processor to establish the one or more traffic channels in the second coverage area using selected control signaling information associated with the second coverage area.

47. The computer-readable medium of claim 43, wherein said codes are configured to cause the processor to switch when signal power of a signal associated with the first coverage area is below a selected threshold.

48. The computer-readable medium of claim 43, wherein said codes are configured to cause the processor to release traffic channels in the first coverage area after performing said switching operation.

49. A method for providing service continuity in a communication network, the method comprising:

receiving control signaling information associated with one or more other coverage areas while in a first coverage area;

detecting entry in to a second coverage area that is part of the one or more other coverage areas;

determining that a broadcast/multicast service is to be received;

establishing one or more traffic channels in the second coverage area; and

receiving the broadcast/multicast service on the one or more traffic channels in the second coverage area so that a delay associated with initiating service reception is minimized.

50. An apparatus for providing service continuity in a communication network, the apparatus comprising:

means for receiving control signaling information associated with one or more other coverage areas while in a first coverage area;

means for detecting entry in to a second coverage area that is part of the one or more other coverage areas;

means for determining that a broadcast/multicast service is to be received;

means for establishing one or more traffic channels in the second coverage area;

and

means for receiving the broadcast/multicast service on the one or more traffic channels in the second coverage area so that a delay associated with initiating service reception is minimized.

1/7

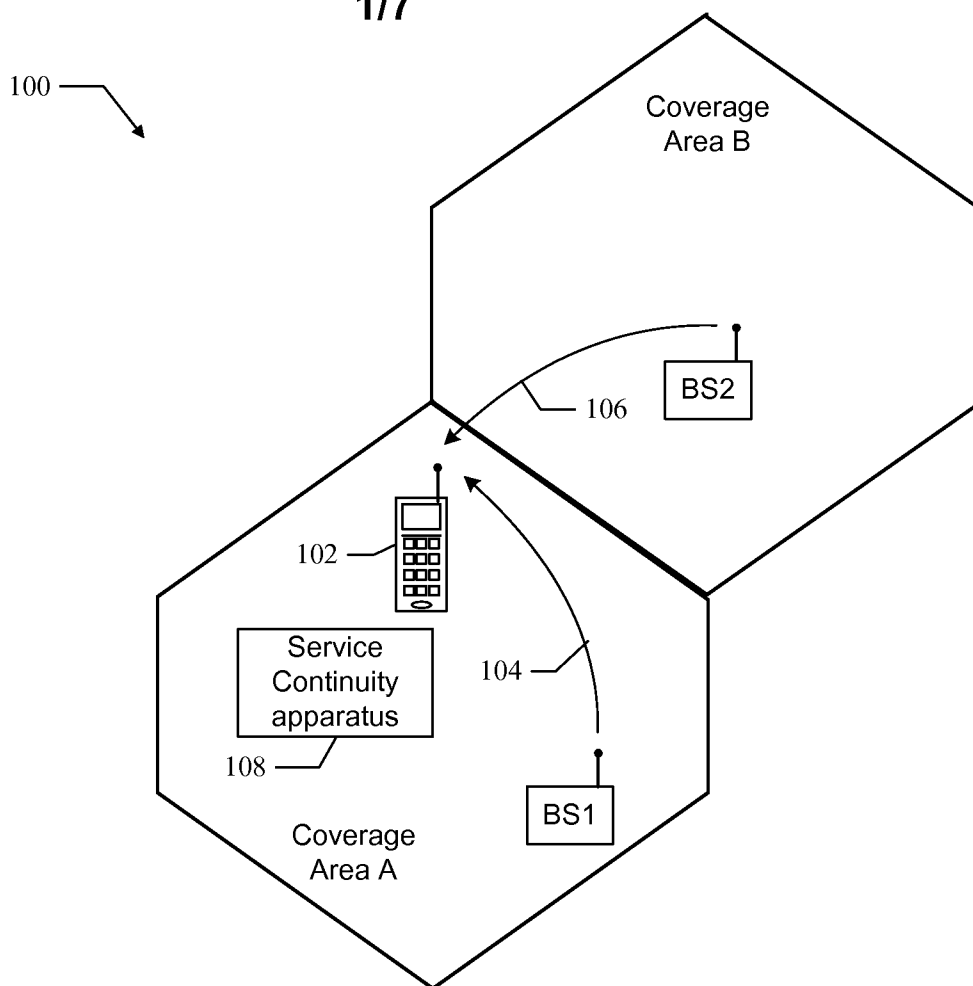
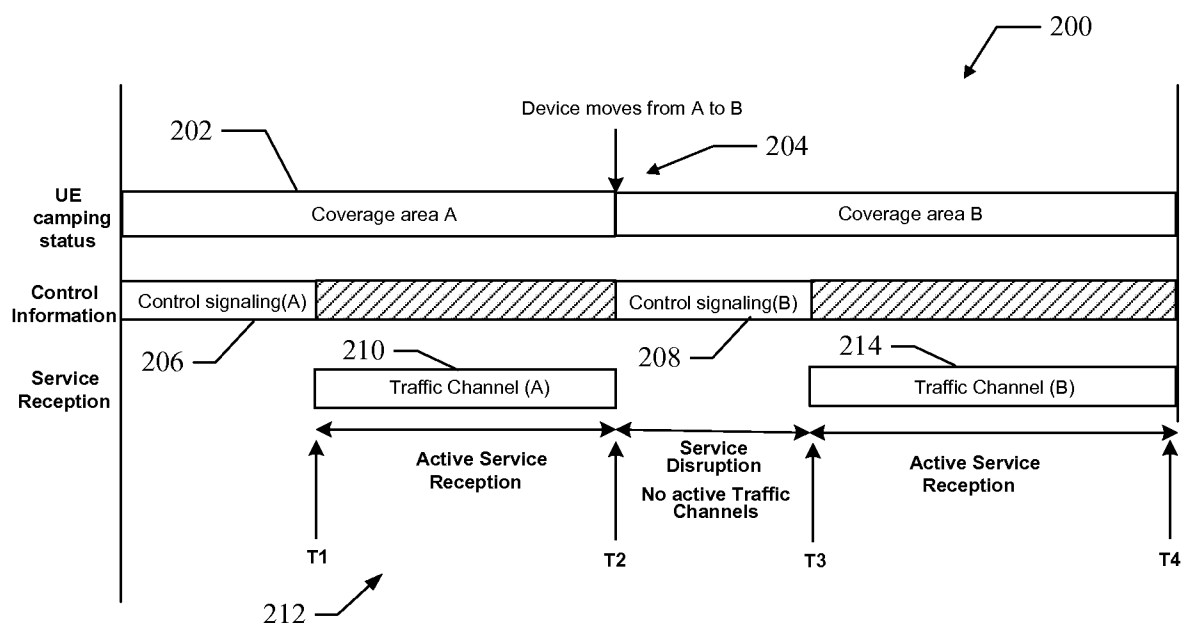


FIG. 1

FIG. 2
Prior Art

2/7

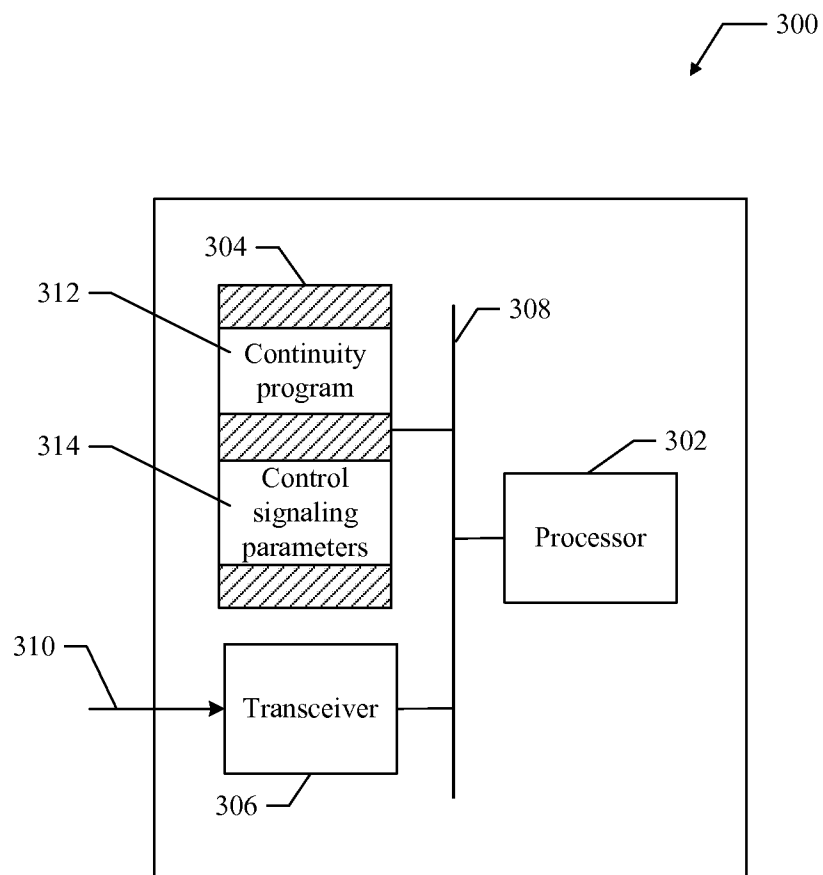


FIG. 3

3/7

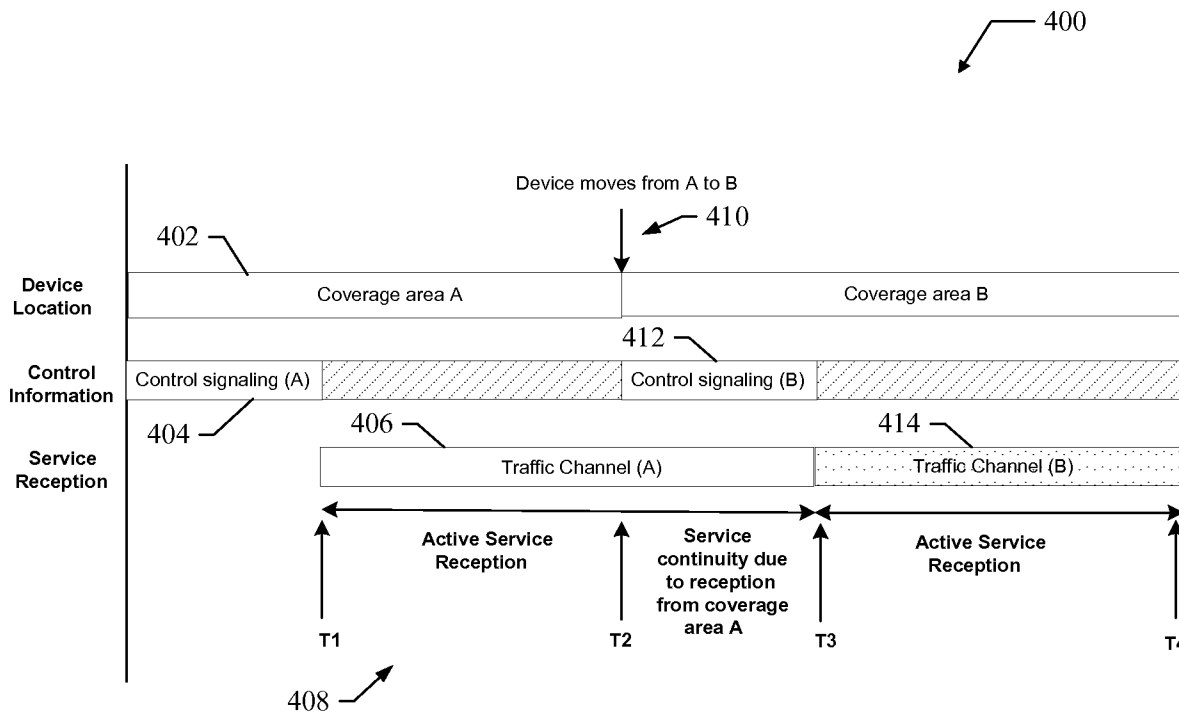


FIG. 4

4/7

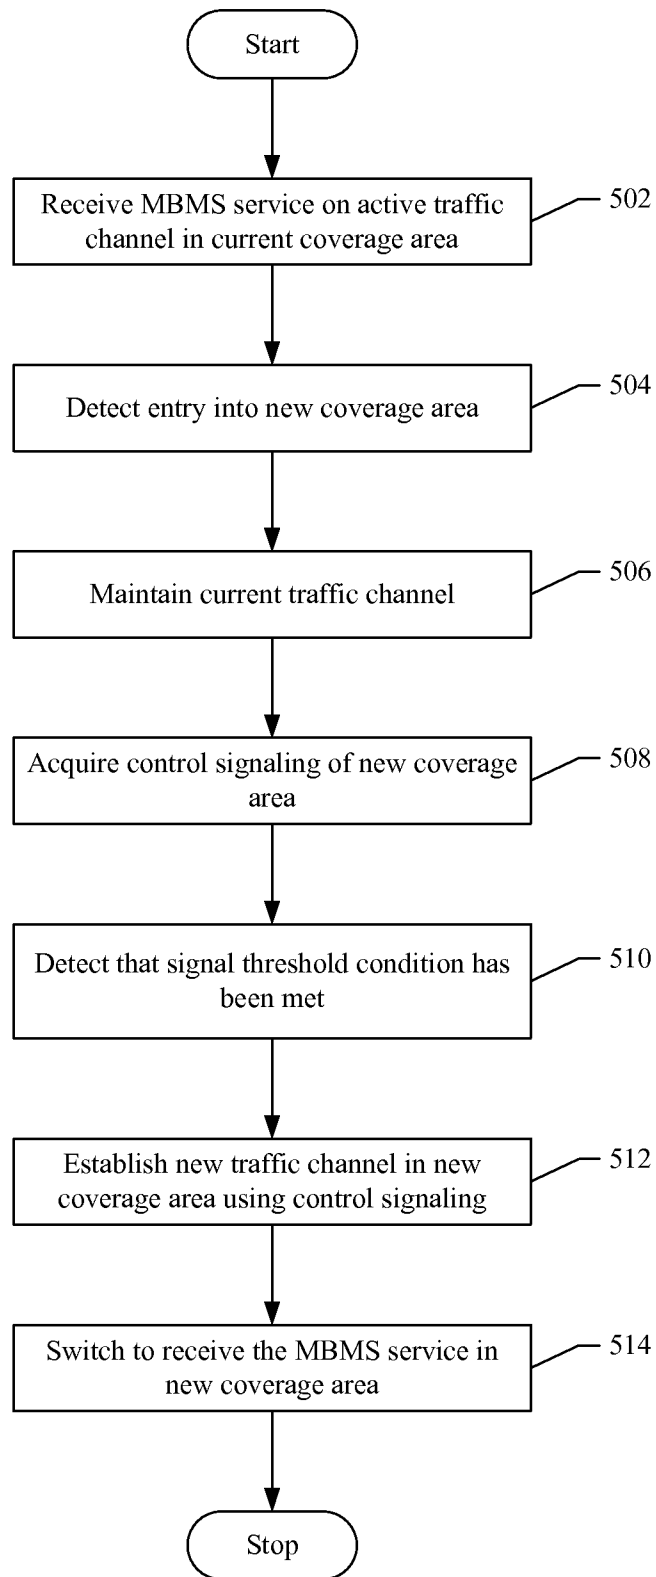


FIG. 5

5/7

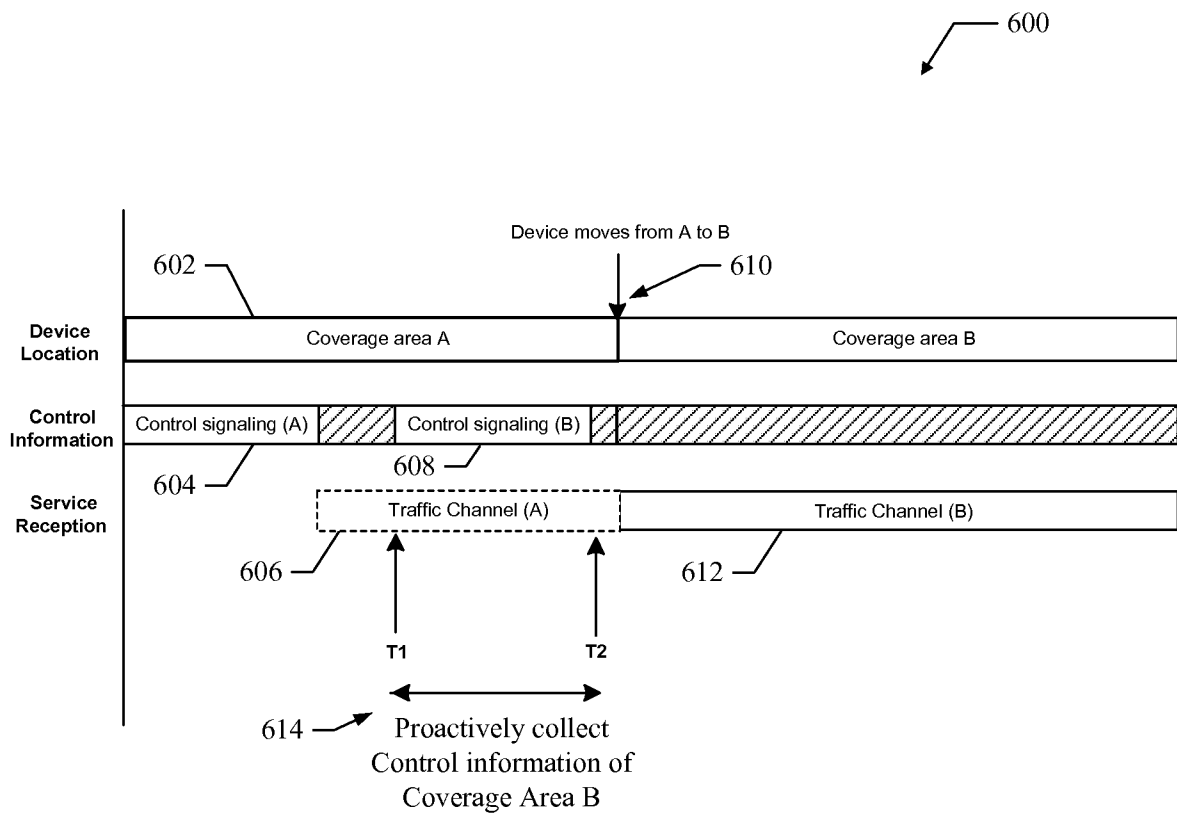


FIG. 6

6/7

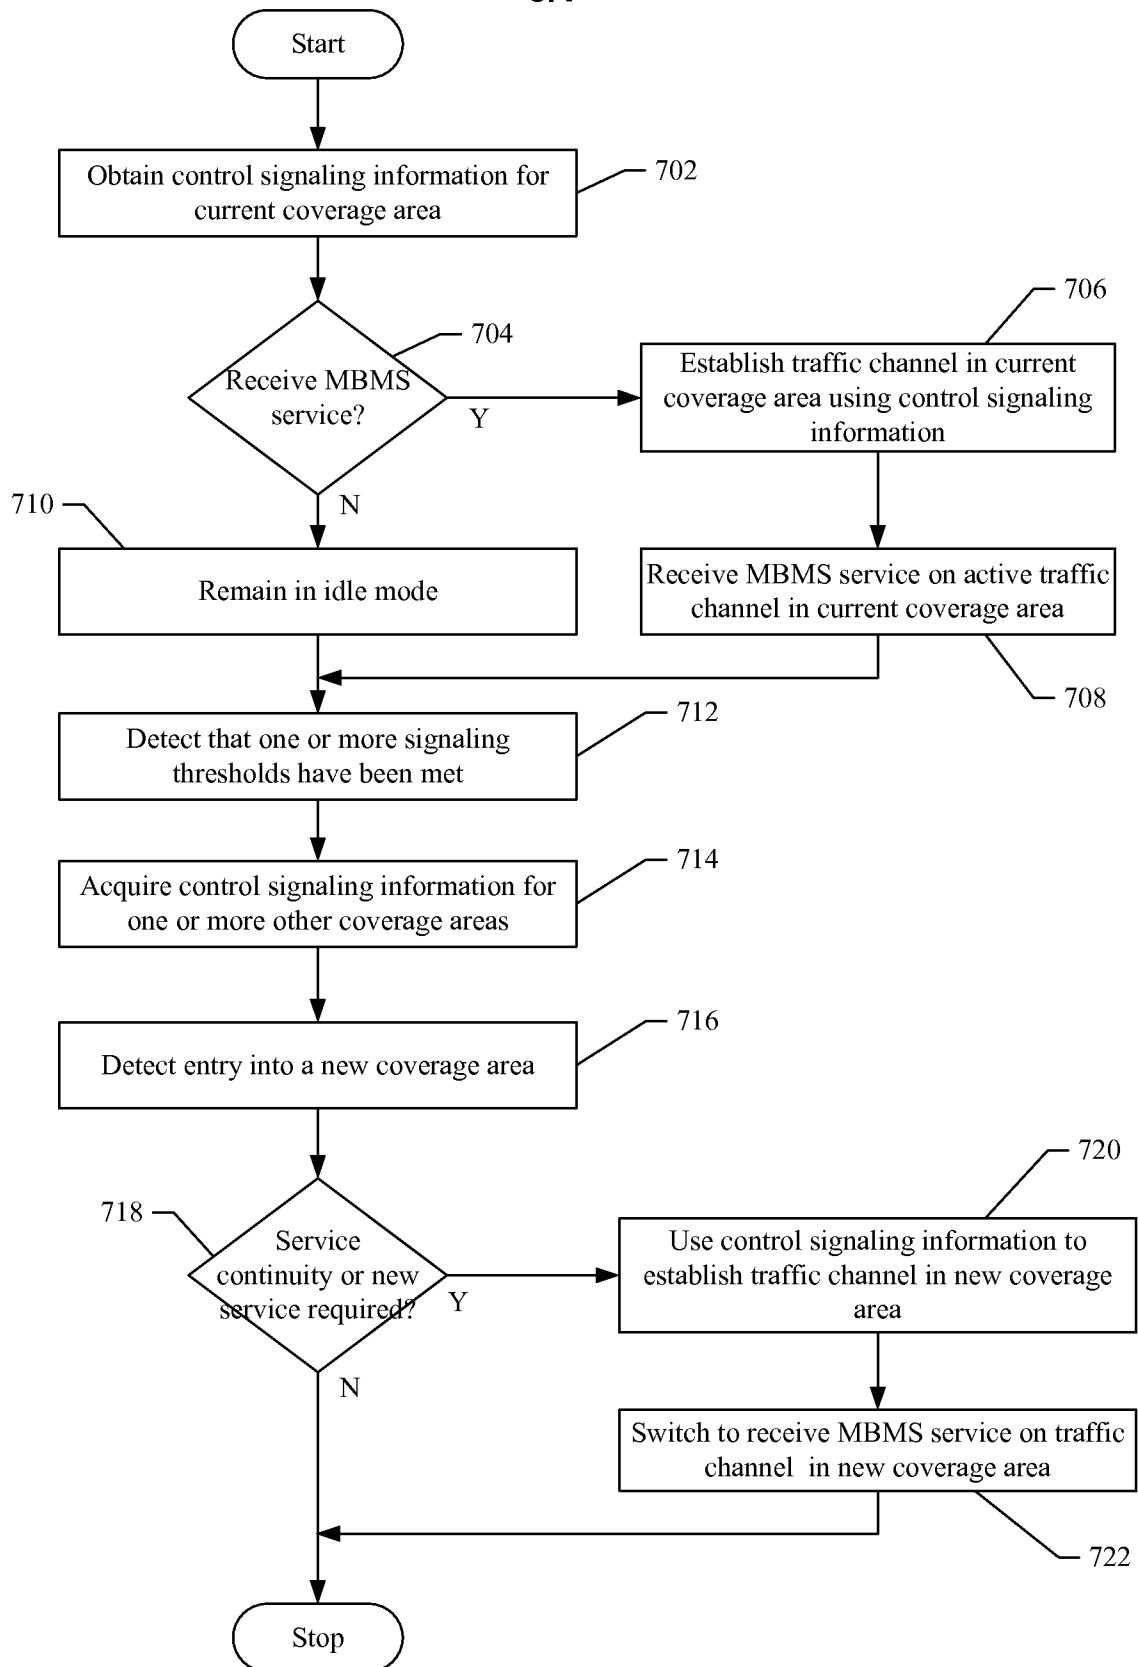


FIG. 7

7/7

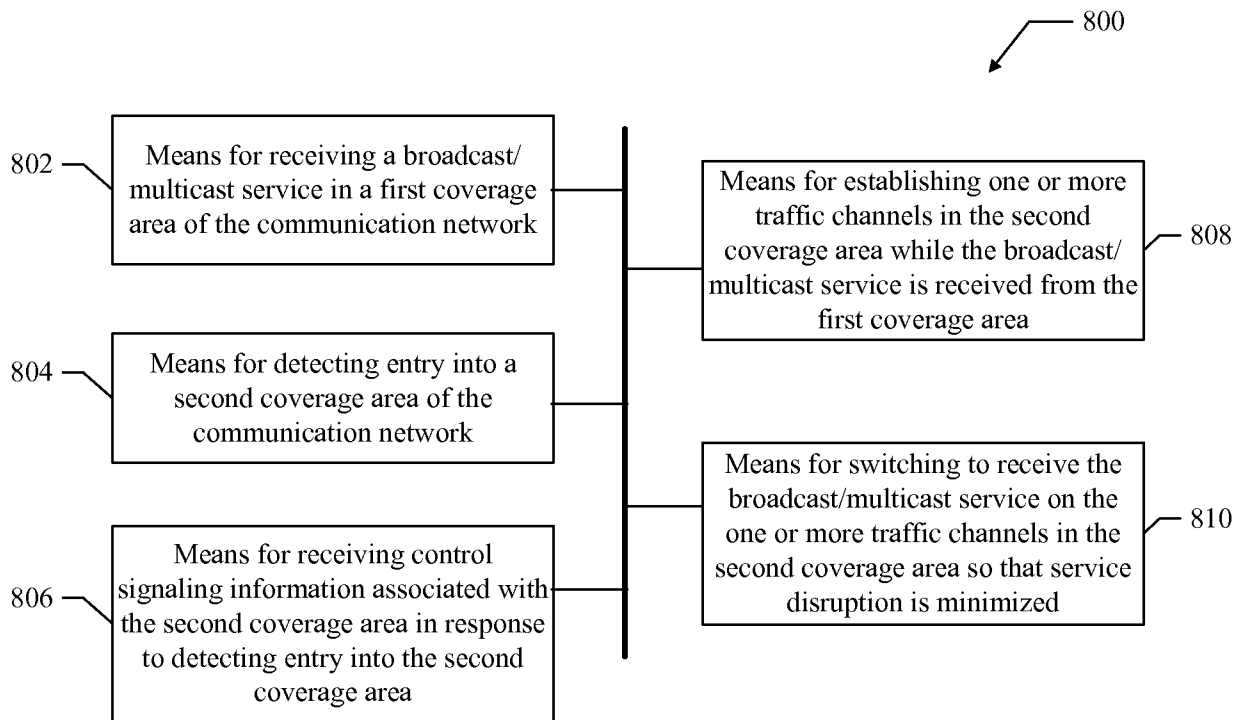


FIG. 8

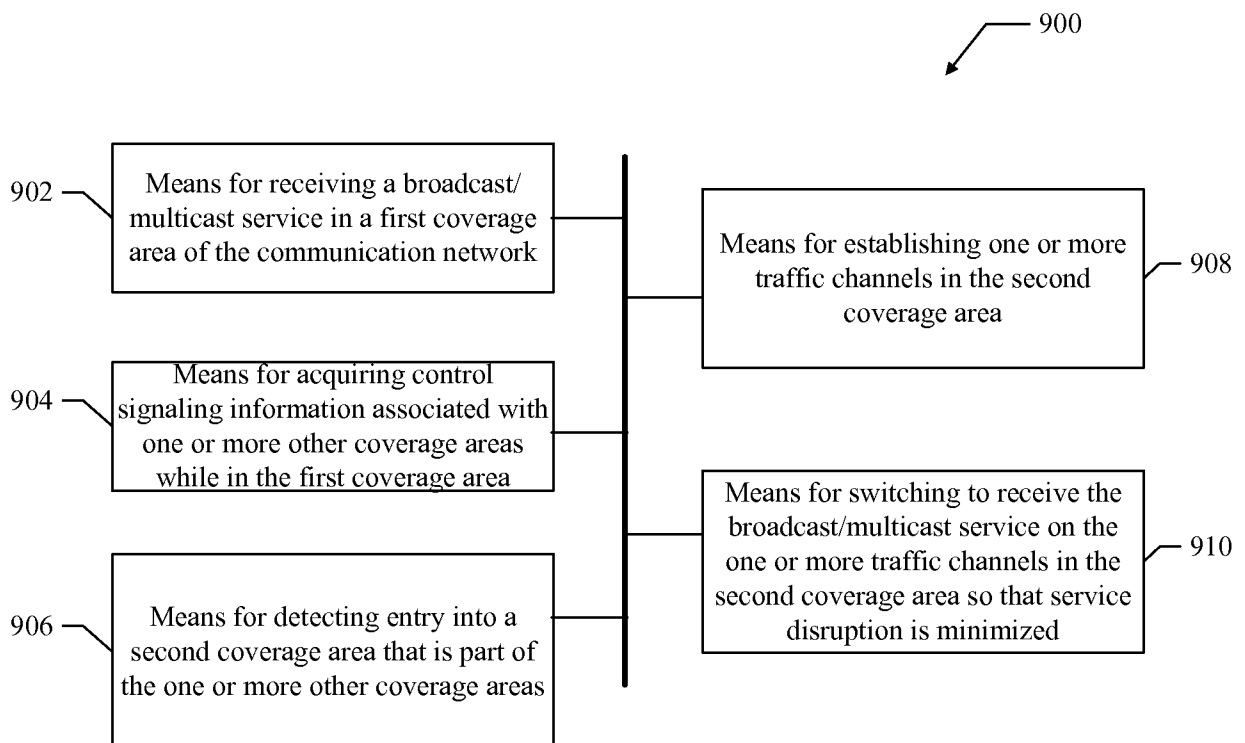


FIG. 9