




- (51) International Patent Classification:
C03C 1/00 (2006.01) *C03C 17/00* (2006.01)
- (21) International Application Number:
PCT/US2012/026562
- (22) International Filing Date:
24 February 2012 (24.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/034,407 24 February 2011 (24.02.2011) US
- (71) Applicant (for all designated States except US): **OWENS-BROCKWAY GLASS CONTAINER INC.** [US/US];
One Michael Owens Way, Perrysburg, OH 43551 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **CLICK, Carol, A.** [US/US]; 912 Louisiana Ave., Perrysburg, OH 43551 (US). **SHARMA, Pramod, K.** [US/US]; 2287 Hickory Point Dr., Ann Arbor, MI 48105 (US).
- (74) Agent: **SMITH, SUSAN L;** OWENS-ILLINOIS, INC., ONE MICHAEL OWENS WAY, PERRYSBURG, OH 43551 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,

[Continued on next page]

(54) Title: HYBRID SOL-GEL COATED GLASS CONTAINERS

(57) Abstract: A glass container (10 or 110) and related methods of manufacturing and coating glass containers. The glass container includes a hybrid sol-gel cross-linked on at least a portion of an exterior glass surface of the glass container.

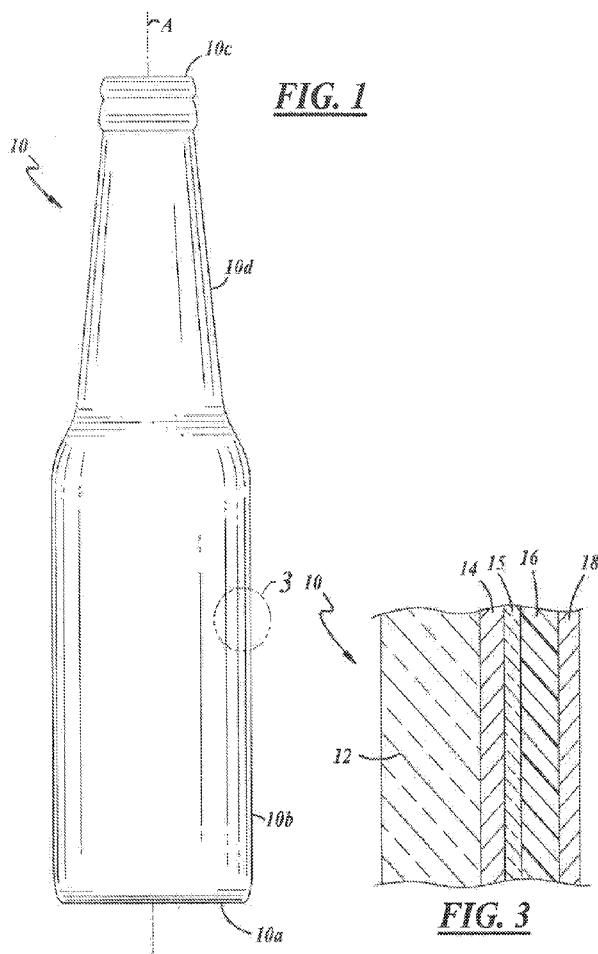



MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD,

Published:

— *with international search report (Art. 21(3))*

HYBRID SOL-GEL COATED GLASS CONTAINERS

The present disclosure is directed to glass containers, and coating processes for glass containers including methods and materials for coating glass containers (e.g., glass bottles
5 and jars).

Background and Summary of the Disclosure

Various processes have been developed to apply coatings to glass containers for different purposes, including glass strengthening for damage prevention and fragment retention. For example, U.S. Patent 3,522,075 discloses a process for coating a glass container in which the
10 glass container is formed, coated with a layer of metal oxide such as tin oxide, cooled through a lehr, and then coated with an organopolysiloxane resin-based material over the metal oxide layer. In another example, U.S. Patent 3,853,673 discloses a method of strengthening a glass article by, for example, applying to a surface of the article a clear solution of a soluble, further hydrolyzable metallosiloxane, and maintaining the glass article at an elevated temperature sufficiently high to
15 convert the metallosiloxane to a cross-linked polymetallosiloxane gel structure. In a further example, U.S. Patent 3,912,100 discloses a method of making a glass container by heating the glass container and applying a polyurethane powder spray to the glass container.

A general object of the present disclosure, in accordance with one aspect of the disclosure, is to provide an improved method of increasing strength and/or fragment retention of
20 a glass container.

The present disclosure embodies a number of aspects that can be implemented separately from or in combination with each other.

A method of coating an exterior surface of a glass container in accordance with one aspect of the disclosure includes the steps of (a) providing a heated hybrid sol-gel having a composition including at least one silane and at least one solvent, (b) coating the exterior glass surface of the glass container with the heated hybrid sol-gel, and (c) heating the coated exterior
5 glass surface of the glass container to cross-link the hybrid sol-gel and result in a coating on the exterior glass surface of the glass container having greater than 90% silicate-based material by weight.

In accordance with a further aspect of the disclosure, there is provided a glass container that includes an axially closed base at an axial end of the glass container, a body
10 extending axially from the base and being circumferentially closed, an axially open mouth at another end of the glass container opposite of the base, and an exterior glass surface. The glass container also includes a hybrid sol-gel cross-linked on at least a portion of the exterior glass surface.

In accordance with an additional aspect of the disclosure, there is provided a glass
15 container that includes an axially closed base at an axial end of the glass container, a body extending axially from the base and being circumferentially closed, an axially open mouth at another end of the glass container opposite of the base, and an exterior glass surface. The glass container also includes a coating of hybrid sol-gel on at least a portion of the exterior glass surface, wherein the hybrid sol-gel includes at least one silane and at least one solvent.

20 In accordance with another aspect of the disclosure, there is provided a method of manufacturing a glass container including the steps of forming the glass container, applying a hot end coating to an exterior glass surface of the glass container, and annealing the glass container.

The method also includes heating a hybrid sol-gel to a temperature of between 70 degrees Celsius and 130 degrees Celsius, wherein a composition of the hybrid sol-gel includes 50% to 60% by weight of at least one silane and 40% to 50% by weight of at least one solvent wherein the heated hybrid sol-gel has a viscosity of between 0.001 Pa-s and 100 Pa-s, coating the exterior
5 glass surface of the glass container with the heated hybrid sol-gel, at a temperature between 80 degrees Celsius and 140 degrees Celsius, and heating the coated exterior glass surface of the glass container at a temperature between 140 degrees Celsius and 160 degrees Celsius for a time between ten minutes and ten hours to cross-link the hybrid sol-gel and result in a coating on the exterior glass surface of the glass container having greater than 90% silicate-based material by
10 weight to increase at least one of strength or fragment retention of the glass container. The method further includes applying a cold end coating to the exterior glass surface of the glass container.

Brief Description of the Drawings

The disclosure, together with additional objects, features, advantages and aspects
15 thereof, will be best understood from the following description, the appended claims and the accompanying drawings, in which:

FIG. 1 is an elevational view of a glass container in accordance with an exemplary embodiment of the present disclosure;

FIG. 2 is a cross-sectional view of the glass container body before coating;

20 FIG. 3 is an enlarged sectional view of the glass container, taken from circle 3 of FIG. 1;

FIG. 3A is a sectional view of a glass container according to another embodiment;

FIG. 4A is micrograph taken of portion of a glass container before a hybrid sol-gel coating is applied and cross-linked in accordance with Example #1 described herein below;

FIG. 4B is micrograph taken of portion of a glass container including the cross-linked hybrid sol-gel coating in accordance with Example #1 described herein below;

5 FIG. 5A is micrograph taken of portion of a glass container before a hybrid sol-gel coating is applied and cross-linked in accordance with Example #2 described herein below;

FIG. 5B is micrograph taken of portion of a glass container including the cross-linked hybrid sol-gel coating in accordance with Example #2 described herein below;

10 FIG. 6A is micrograph taken of portion of a glass container before a hybrid sol-gel coating is applied and cross-linked in accordance with Example #3 described herein below;

FIG. 6B is micrograph taken of portion of a glass container including the cross-linked hybrid sol-gel coating in accordance with Example #3 described herein below;

15 FIG. 7A is micrograph taken of portion of a glass container before a hybrid sol-gel coating is applied and cross-linked in accordance with Example #4 described herein below;
and

FIG. 7B is micrograph taken of portion of a glass container including the cross-linked hybrid sol-gel coating in accordance with Example #4 described herein below.

Detailed Description of Preferred Embodiments

20 FIG. 1 illustrates an exemplary embodiment of a glass container 10 that may be produced in accord with an exemplary embodiment of a manufacturing process presently disclosed hereinbelow. The glass container 10 includes a longitudinal axis A, a base 10a at one axial end of the container 10 that is closed in an axial direction, a body 10b extending in an axial

direction from the axially closed base 10a, and a mouth 10c at another axial end of the container 10 opposite of the base 10a. Accordingly, the glass container 10 is hollow. In the illustrated embodiment, the container 10 also includes a neck 10d that may extend axially from the body 10b, may be generally conical in shape, and may terminate in the mouth 10c. However, the container 10 need not include the neck 10d and the mouth 10c may terminate the body 10b, such as in a glass jar embodiment or the like. The body 10b may be of any suitable shape in cross-section transverse to the axis A as long as the body 10b is circumferentially closed. For example, as shown in FIG. 2, the body 10b may be of cylindrical transverse cross-sectional shape that is circumferentially closed. In other embodiments, the body 10b may be generally oval, square, rectangular, or of any other suitable transverse cross-sectional shape. As used herein, the term “circumferentially” applies not only to circular or cylindrical transverse cross-sectional shapes but also applies to any transverse cross-sectional shape.

FIG. 3 illustrates that the container 10 includes a glass substrate 12, and may further include a hot end coating 14 applied to an exterior glass surface of the container 10 on the substrate 12. The container 10 also includes a cross-linked hybrid sol-gel coating 15 applied to the exterior glass surface of the container 10. The coating 15 may be applied over the hot end coating 14 or directly to the substrate 12. The container 10 further may include a cold end coating 16 applied to the exterior glass surface of container 10 over the cross-linked hybrid sol-gel coating 15, and an organic coating 18 applied to the exterior glass surface of the container 10 over the cold end coating 16. Although the various coatings 14-18 are shown as adjacent layers overlying one another sequentially, one or more of the coatings may penetrate into or even through one or more of the other coatings, and one or more of the coatings may be omitted.

Accordingly, the various coatings 14-18 may be fairly described as being applied generally to the glass container 10, regardless of how or to what extent any given coating contacts any of the other coatings and/or the substrate 12. Similarly, when a material is described as being applied to an exterior glass surface of the glass container 10, the material may be applied over one or
5 more of the coatings 14-18 and/or to the glass substrate 12 itself.

In some embodiments, the cross-linked hybrid sol-gel coating 15 may replace one or more of the other coatings. For example, in one embodiment, the cross-linked hybrid sol-gel coating 15 may replace the hot end coating 14. In another embodiment, cross-linked hybrid sol-gel coating 15 may replace the cold end coating 16. Therefore, the container 10 may be free of
10 conventional hot end and cold end coatings. In other words, the container 10 may be coated without conventional hot end and cold end coatings. One example of a container 110 of these embodiments is illustrated in FIG. 3A.

The coating 15 is produced by cross-linking a hybrid sol-gel that has the potential to increase the strength of glass containers by healing surface anomalies that may be present in
15 the exterior surface of the container 10, and by preventing further creation of surface anomalies. For example, a heated hybrid sol-gel may flow into a crack in glass and be retained therein after cross-linking, thereby bridging and blunting a crack tip to increase a burst strength of the container 10. In another example, the heated hybrid sol-gel may uniformly cover an exterior surface of a glass container and, after cross-linking, may provide a uniform glass fragment
20 retention layer for retention of glass fragments if the container breaks or becomes fractured.

For purposes of the present disclosure, a hybrid sol-gel is a sol-gel that is a hybrid of inorganic and organic components or precursors and is produced by a sol-gel process, but

retains some of the organic nature of the organic precursor(s). The hybrid sol-gel is highly viscous at room temperature and has a relatively long “pot life” which lends itself to use in a glass container manufacturing environment. The viscosity of the hybrid sol-gel may be such that it barely flows under its own weight at room temperature. The hybrid nature of the hybrid sol-gel
5 allows the precursor materials to flow and behave like an organic material when heated, until a cross-linking reaction occurs at a suitable cross-linking temperature to provide the coating 15. After cross-linking, the presently disclosed coating 15 is rigid, scratch resistant, and transparent. Therefore, unlike many conventional surface-sealing coatings, the coating 15 looks and feels like glass. Moreover, the applied coating 15 may be relatively temperature stable and may survive
10 severe temperature extremes, for example, from -100 degrees Celsius to 450 degrees Celsius.

The glass container 10 can be produced in any suitable manner. This typically would involve a “hot end” including one or more melting furnaces, forming machines, and beginning portions of annealing lehrs, and a “cold end” that may include end portions of annealing lehrs and includes inspection equipment and packaging machines. Accordingly, a hot
15 end coating is a coating applied at the hot end of the glass container manufacturing process, and a cold end coating is a coating applied at the cold end of the glass container manufacturing process.

After forming a plurality of the glass container 10 with forming machines, but prior to annealing, the glass containers may be hot-end coated in any suitable manner with any
20 suitable hot-end coating materials to produce the hot-end coating 14.

The glass containers then may be annealed in any suitable manner, for example, in an annealing lehr. At an entry, hot end, or upstream portion of the annealing lehr, the

temperature therein may be between 750 and 550 degrees Celsius. Through the lehr, the temperature may be brought down gradually to a downstream portion, cool end, or exit of the lehr, for example, to a temperature therein of between 130 degrees Celsius and 65 degrees Celsius.

5 In one embodiment, the hybrid sol-gel is applied to the containers at any temperature suitable for such application and, for example, in an intermediate portion of the annealing lehr that is upstream of the downstream portion of the lehr but downstream of the upstream portion of the lehr. In other words, the hybrid sol-gel may be applied to the containers after annealing begins but before annealing ends.

10 The temperature for applying the hybrid sol-gel cannot exceed its consolidation temperature, e.g. about 200 degrees Celsius, above which the sol-gel irreversibly hardens. Preferably, however, the hybrid sol-gel may be applied before the end of the annealing lehr where temperatures are insufficient for proper application of the hybrid sol-gel to the containers. Accordingly, in one embodiment, the hybrid sol-gel may be applied in the annealing lehr,
15 upstream of a cold or downstream end thereof. In another embodiment, the glass containers may be directed off-line from the annealing lehr, coated with the hybrid sol-gel, and directed back on-line into the annealing lehr.

 In a further embodiment, the hybrid sol-gel may be applied to the glass containers in a separate oven, lehr, or the like, downstream of the annealing lehr. In other embodiments, the
20 hybrid sol-gel may be applied to the glass containers in any suitable location in a glass container manufacturing process.

A hybrid sol-gel is prepared for application to the containers to provide the coating 15. Specific examples of preparations are described herein below. In general, however, the hybrid sol-gel is composed of at least one silane and at least one solvent. Accordingly, in a preferred embodiment, the hybrid sol-gel is a liquid-silicate-based material have a very high solids content, for example, greater than 90% by volume.

The silane may be composed of one or more of the following silanes: methyltriethoxysilane, dimethyldiethoxysilane, phenyltriethoxysilane, diphenyldiethoxysilane, phenyltrimethoxysilane, or diphenyldimethoxysilane. The silanes may be obtained from Gelest, Inc. of Morrisville, PA, or any other suitable source(s). In other embodiments, the silane may include one more of the following silanes: 3-glycidoxypropyltrimethoxysilane, 3-glycidoxypropyldimethoxyethoxysilane, aminopropylmethyldimethoxysilane, aminopropyltrimethoxysilane, gamma mercaptopropyltrimethoxysilane, or vinyltrimethoxysilane. In one embodiment, the hybrid sol-gel includes a first silane and a multiple of the first silane. For example, the hybrid sol-gel may include methyltriethoxysilane and dimethyldiethoxysilane, or phenyltriethoxysilane and diphenyldiethoxysilane, or phenyldimethoxysilane and diphenyldimethoxysilane.

The solvent may be composed of one or more of the following solvents: denatured ethanol, anhydrous ethanol, or methanol. The solvents may be high purity solvents, and may be obtained from Fisher Scientific of Hampton, NH, or any other suitable source(s). In other embodiments, the solvent may include one or more of the following solvents: normal propanol, isopropanol, butanol, diethylene glycol, acetones, methylethylketones, triethyleneglycols, vinylpyrrolidones, toluene, glycerine, phenol, benzyl alcohol, or dioxane.

In one embodiment, the silane may be 50% to 60% of the hybrid sol-gel by weight, and the solvent may be 40% to 50% of the hybrid sol-gel by weight. Accordingly, the weight ratio of silane to solvent may be between 1.5:2 and 1:1. In another embodiment, the silane may be between 52% and 58% of the hybrid sol-gel by weight, and the solvent may be between 42% and 46% of the hybrid sol-gel by weight. In a more particular embodiment, the silane may be about 56% of the hybrid sol-gel by weight, and the solvent may be about 44% of the hybrid sol-gel by weight. Accordingly, the weight ratio of silane to solvent may be about 1.3:1. As used herein, the term “about” means within two to three percent. In one embodiment, the hybrid sol-gel may consist essentially of the silane and solvent materials.

In another embodiment, the base composition of the hybrid sol-gel may be modified with other, additional materials. For example, the hybrid sol-gel may be doped with a dopant or doping material, for instance, an ultraviolet blocking material. Accordingly, materials for providing strengthening and ultraviolet blocking properties may be applied in only one step. Accordingly, an ultraviolet blocking material need not be applied in a coating step separate from the hybrid sol-gel coating step. As used herein, the phrase “ultraviolet blocking” includes reducing ultraviolet transparency and not necessarily resulting in 100% ultraviolet opacity. The ultraviolet blocking material may include one or more metal oxides, for example, at least one of cerium oxide, titanium oxide, zinc oxide, bismuth oxide, or barium titanate. In another embodiment, the ultraviolet blocking material may include one or more metal alkoxides, for example, at least one of cerium alkoxide or titanium dialkoxide. Accordingly, in this embodiment, the doped hybrid sol-gel may include, and preferably may consist essentially of, the

silane, solvent, and one or more of the doping materials or dopants. In one embodiment, the ultraviolet blocking material may be 0% to 10% of the hybrid sol-gel by weight.

In any case, before the hybrid sol-gel is applied to the container, the hybrid sol-gel is heated to a temperature suitable to achieve a target viscosity of between 0.001 Pa-s and 100 Pa-s as the hybrid sol-gel is applied to the container. In a more particular embodiment, the target viscosity is between 0.025 Pa-s and 0.05 Pa-s. In a preferred embodiment, the target viscosity is about 0.0375 Pa-s. In one embodiment, the temperature of the hybrid sol-gel is between 70 degrees Celsius and 130 degrees Celsius. In a more particular embodiment, the temperature of the hybrid sol-gel is between 90 degrees Celsius and 110 degrees Celsius. In a preferred embodiment, the temperature of the hybrid sol-gel is about 100 degrees Celsius.

The exterior glass surface of the container is coated with the heated hybrid sol-gel in any suitable manner. For example, the heated hybrid-sol gel may be sprayed onto the exterior glass surface in any suitable manner, the container may be dipped in the heated hybrid sol-gel in any suitable manner, or the like. The hybrid sol-gel is coated to the container at a temperature in the oven orlehr of between 80 degrees Celsius and 140 degrees Celsius. In a more particular embodiment, the temperature is between 95 degrees Celsius and 125 degrees Celsius. In a preferred embodiment, the temperature is about 110 degrees Celsius. Preferably, the temperature is higher than the temperature of the heated hybrid sol-gel. For example, the temperature differential is preferably between 5 degrees Celsius and 15 degrees Celsius and, more preferably, about 10 degrees Celsius.

The coated exterior glass surface of the container is heated for a time and at a temperature suitable to cross-link the hybrid sol-gel to result in the coating 15 having greater

than 90% silicate-based material by weight to increase strength of the container. For example, the coating 15 may have greater than 90% silica-based material. The silicate-based material may bond to the glass container 10 in any suitable manner. In one embodiment, the temperature in the oven or lehr is between 130 degrees Celsius and 170 degrees Celsius for a time of between
5 ten minutes and ten hours. In a more particular embodiment, the temperature is between 140 degrees Celsius and 160 degrees Celsius. In a preferred embodiment, the temperature is about 150 degrees Celsius. The precursors are hydrolysed in the reaction, which is followed by a condensation reaction, but no cross-linker materials need be used. Accordingly, the cross-linking reaction may be free of cross-linkers.

10 In one embodiment, where the coated containers pass continuously through the annealing lehr, the lehr may be constructed and operated to decrease the temperature of the glass containers to a level suitable for applying the hybrid sol-gel, then increase the temperature of the glass containers to a level suitable for cross-linking the hybrid sol-gel, and then decrease the temperature of the glass containers to the downstream end temperature of the lehr. In other
15 embodiments, the cross-linking may be conducted in an off-line loop parallel with the annealing lehr before the containers are brought back into the lehr, may be conducted downstream of the lehr, or the like.

At the end, or downstream of, the annealing lehr, the glass containers may be cold-end coated in any suitable manner. For example, the glass containers may be coated with
20 the cold end coating 16, which may be a protective organic coating applied downstream or at an end of the annealing lehr. The cold end coating 16 may include a polyethylene material, like a polyethylene wax or the like, or may include any other suitable cold end coating material.

After the cold end coating is applied, the glass containers may be inspected for any suitable characteristics and in any suitable manner. For example, the glass containers may be manually or automatically inspected for cracks, inclusions, surface irregularities, hot end and/or cold end coating properties, and/or the like.

5 The organic coating 18 may be applied to the glass containers in any suitable manner by any suitable equipment. For example, the organic coating 18 may be electrostatically applied to exterior glass surfaces of the glass containers, for example, after inspection.

 After applying the organic coating, the glass containers may be cured in any suitable manner. For example, the curable organic coating may be a radiation-curable organic
10 coating cured by any suitable type of radiation like, for instance, ultraviolet or electron beam radiation.

 After curing, the glass containers may be packaged in any suitable manner.

 The manufacturing process may or may not include all of the disclosed steps or be sequentially processed or processed in the particular sequence discussed, and the presently
15 disclosed manufacturing process and coating methods encompass any sequencing, overlap, or parallel processing of such steps.

 The present disclosure provides advancements in the art. For example, the cross-linked hybrid sol-gel coating can increase glass container strength by better healing of glass surface anomalies. In another example, the cross-linked hybrid sol-gel coating can increase glass
20 container strength by retaining glass fragments, without using polyurethane or conventional additives. As used herein, the terminology fragment-retention is a characteristic well known to those of ordinary skill in the art of glass container manufacturing that relates to holding of glass

fragments in the event that a glass container fractures or breaks, for example, from being dropped on hard ground.

Conventionally, it has been understood that sol-gels can be uniformly applied to flat glass to achieve a thin and somewhat brittle coating to increase glass strength. But it was also understood that it was not cost-effective or was impossible to uniformly apply the same sol-gels in solid and continuous films over exterior surfaces of glass containers to achieve reliable glass strengthening results. Contrary to conventional wisdom, it is now possible and cost-effective to produce glass containers with a cross-linked hybrid sol-gel coating applied with relatively uniform coverage to achieve a relatively thicker and stronger coating.

It has also been conventionally understood that fragment retention coatings for glass containers are composed of a polyurethane base formed from an isocyanate monomer or prepolymers of isocyanates, and additives like bisphenol A, melamine, benzoguanamine, and the like to enable room temperature curing. But isocyanates and such additives tend to be cost-prohibitive and undesirable. Contrary to conventional wisdom, it is now possible to produce glass containers with an isocyanate-free and amine-group-free fragment retention coating that is cost-effective and desirable.

Therefore, the presently disclosed method provides simple but elegant solutions to problems in the art of glass container manufacturing that have long been experienced but apparently unappreciated.

Examples

Below, with reference to Table 1, several examples of hybrid sol-gels and their preparation are provided and explained, as well as a coating technique and performance results.

Table 1

5

Examples	Silane #1	Silane #2	Solvent	Coating
Examples #1	MethyltriethoxySilane	DimethyldiethoxySilane	Denatured Ethanol	Haze
Examples #2	MethyltriethoxySilane	DimethyldiethoxySilane	Anhydrous Ethanol	Transparent
Examples #3	PhenyltriethoxySilane	DiphenyldiethoxySilane	Anhydrous Ethanol	Transparent
Examples #4	PhenyltrimethoxySilane	DiphenyldimethoxySilane	Methanol	Transparent

Example #1Solution Preparation

A solution A was prepared using 8.1 ml of H₂O, 0.15gm of HCl (37.1%) and 13.84 gm of denatured ethanol. Solution A was then stirred for 15 minutes.

5 A solution B was prepared using 27.04 gm of methyltriethoxysilane (Silane #1) and 13.79 gm of methanol. Solution B was then stirred for 15 minutes.

Then, solution B was added to solution A very slowly under continuous magnetic stirring. A beaker containing the combined solution A+B was covered with a PARAFILM brand foil. The stirring was kept constant for 3 hours.

10 A solution C was prepared using 7.64 gm of dimethyldiethoxysilane (Silane #2) and 9.21 gm of denatured ethanol, at about 2 hours and 45 minutes after beginning stirring of the combined solution A+B. Solution C was stirred for 15 minutes.

Then, solution C was added drop wise to the combined solution A+B and stirred for 3 more hours. The stirring of the combined solution A+B+C was continued in a closed
15 system for another 2 hours.

2.78 micro liters of ammonium hydroxide 30% were added after the aforementioned 2 hours of stirring the combined solution A+B+C. The stirring of the combined solution A+B+C+ammonium hydroxide was continued in a closed system for another one hour.

Then, the PARAFILM brand foil was removed and continuous mixing was
20 conducted for 48 hours. A very viscous gel was obtained.

This gel was dried overnight at 70 degrees Celsius to remove the rest of the alcohol.

To the so prepared gel, 10 ml of pure acetone were added and stirred for 2 hours.

Thereafter, the solution was filtrated using a Buchner funnel to remove the byproducts. The solution obtained after filtration was continuously stirred for 5-7 hours until all acetone was evaporated. A hazy clear gel was obtained.

5 Then, the gel was thermally treated for 24 hours at 70 degrees Celsius to remove any trace of acetone and alcohol. Another thermal treatment was performed at 110 degrees Celsius for 24 hours to remove water traces and obtain the hybrid sol-gel.

Coating Formation

10 Glass substrates of 2" by 2" size were cleaned by soap and water. The glass substrates were then wiped by isopropanol and dried well.

On a first sample of the glass substrates, a crack was formed on the glass substrate using a Vickers hardness instrument at 25 gf for 30 sec. The glass substrate was coated with the hybrid sol-gel using a drawdown bar (#8). The coating was then cured at 150 degrees Celsius for 6 hours to cross link the hybrid sol-gel.

15 Performance After Curing

On the first sample, the coating was analyzed by optical microscopy to analyze the healing effect on the crack. Micrographs of the crack were taken before and after the coatings as illustrated in FIGS. 4A and 4B, respectively, and indicated that the crack was filled by the coating.

20 On an opposite, uncoated, side of the second sample, a line was scribed along the glass substrate by a diamond cutter. The second sample was flipped over, held along one edge, and struck with a rounded side of the diamond cutter to create a fragment fractured along the

scribed line. The fragment was held to the rest of the second sample by the cross-linked hybrid sol-gel coating.

Example #2

Example #2 was similar to example #1 in solution preparation and coating
5 formation. The silane #1 and silane #2 used in example #2 are methyltriethoxysilane and dimethyldiethoxysilane respectively. The solvent used in this example was anhydrous ethanol instead of denatured ethanol.

On a first sample, micrographs of the crack were taken before and after the
coatings as illustrated in FIGS. 5A and 5B, respectively, and indicated that the crack was filled
10 by the coating.

After scribing and striking a second sample, the fragment was held to the rest of the second sample by the cross-linked hybrid sol-gel coating.

Example #3

Example #3 was similar to example #1 in solution preparation and coating
15 formation. The silane #1 and silane #2 used in example #3 are phenyltriethoxysilane and diphenyldiethoxysilane respectively. The solvent used in this example was anhydrous ethanol instead of denatured ethanol

On a first sample, micrographs of the crack were taken before and after the
coatings, as illustrated in FIGS. 6A and 6B, respectively, and indicated that the crack was filled
20 by the coating.

After scribing and striking a second sample, the fragment was held to the rest of the second sample by the cross-linked hybrid sol-gel coating.

Example #4

Example #4 was similar to example #1 in solution preparation and coating formation. The silane #1 and silane #2 used in example #4 are phenyltriethoxysilane and diphenyldiethoxysilane respectively. The solvent used in this example was methanol instead of
5 denatured ethanol.

On a first sample, micrographs of the crack were taken before and after the coatings, as illustrated in FIGS. 7A and 7B, respectively, and indicated that the crack was filled by the coating.

After scribing and striking a second sample, the fragment was held to the rest of
10 the second sample by the cross-linked hybrid sol-gel coating.

There thus has been disclosed methods of coating glass containers and methods of manufacturing glass containers that at least partially satisfy one or more of the objects and aims previously set forth. The disclosure has been presented in conjunction with several exemplary embodiments, and additional modifications and variations have been discussed. Other
15 modifications and variations readily will suggest themselves to persons of ordinary skill in the art in view of the foregoing discussion.

Claims

1.

A method of coating an exterior surface of a glass container that includes the steps

5 of:

(a) providing a heated hybrid sol-gel having a composition including at least one silane and at least one solvent;

(b) coating an exterior glass surface of a glass container (10 or 110) with said heated hybrid sol-gel; and

10 (c) heating said coated exterior glass surface of the glass container to cross-link said hybrid sol-gel and result in a coating on said exterior glass surface of the glass container having greater than 90% silicate-based material by weight.

2.

15 The method set forth in claim 1 wherein said composition in step (a) includes between 50% and 60% by weight of at least one silane and between 40% and 50% by weight of at least one solvent, said hybrid sol-gel is heated to a temperature between 70 degrees Celsius and 130 degrees Celsius in step (a), said temperature in step (b) is between 90 degrees Celsius and 130 degrees Celsius, and said heating step (c) is carried out at a temperature of between 130
20 degrees Celsius and 170 degrees Celsius and for a time between ten minutes and ten hours.

3.

The method set forth in claim 1 wherein said composition in step (a) includes between 52% and 58% by weight of at least one silane and between 42% and 46% by weight of at least one solvent, said temperature in step (a) is between 90 degrees Celsius and 110 degrees Celsius, said temperature in step (b) is between 95 degrees Celsius and 125 degrees Celsius, and said heating step (c) is carried out at a temperature of between 140 degrees Celsius and 160 degrees Celsius.

4.

The method set forth in claim 1 wherein said composition in step (a) includes about 56% by weight of at least one silane and about 44% by weight of at least one solvent, said temperature in step (a) is about 100 degrees Celsius, said temperature in step (b) is about 110 degrees Celsius, and said heating step (c) is carried out at a temperature of about 150 degrees Celsius.

5.

The method set forth in claim 1 wherein said at least one silane in step (a) includes at least one of methyltriethoxysilane, dimethyldiethoxysilane, phenyltriethoxysilane, diphenyldiethoxysilane, phenyltrimethoxysilane, diphenyldimethoxysilane, 3-glycidoxypropyltrimethoxysilane, 3-glycidoxypropyldimethoxyethoxysilane, aminopropylmethyldimethoxysilane, aminopropyltrimethoxysilane, gamma mercaptopropyltrimethoxysilane, or vinyltrimethoxysilane, and wherein said at least one solvent

in step (a) includes at least one of denatured ethanol, anhydrous ethanol, methanol, normal propanol, isopropanol, butanol, diethylene glycol, acetones, methylethylketones, triethyleneglycols, vinylpyrrolidones, toluene, glycerine, phenol, benzyl alcohol, or dioxane.

5

6.

The method set forth in claim 1 wherein said at least one silane in step (a) includes methyltriethoxysilane and dimethyldiethoxysilane, and wherein said at least one solvent includes at least one of denatured ethanol or anhydrous ethanol.

10

7.

The method set forth in claim 1 wherein said at least one silane in step (a) includes phenyltriethoxysilane and diphenyldiethoxysilane, and wherein said at least one solvent includes anhydrous ethanol.

15

8.

The method set forth in claim 1 wherein said at least one silane in step (a) includes phenyltrimethoxysilane and diphenyldimethoxysilane, and wherein said at least one solvent includes methanol.

20

9.

The method set forth in claim 1 wherein said composition in step (a) includes a silane to solvent weight ratio of between 1.5:1 and 1:1.

10.

The method set forth in claim 1 wherein said composition in step (a) includes a silane to solvent weight ratio of about 1.3:1.

5

11.

The method set forth in claim 1 wherein said hybrid sol-gel is doped with an ultraviolet blocking material, wherein ultraviolet blocking material is not applied in a separate step.

10

12.

The method set forth in claim 11 wherein said ultraviolet blocking material is at least one of cerium oxide, titanium oxide, zinc oxide, bismuth oxide, or barium titanate.

15

13.

The method set forth in claim 1 wherein said hybrid sol-gel is doped with at least one metal alkoxide that is not applied in a separate step.

20

14.

The method set forth in claim 13 wherein said at least one metal alkoxide is at least one of cerium alkoxide or titanium dialkoxide.

15.

The method set forth in claim 1 wherein said at least one silane includes at least one of methyltriethoxysilane, dimethyldiethoxysilane, phenyltriethoxysilane, diphenyldiethoxysilane, phenyltrimethoxysilane, diphenyldimethoxysilane, 3-glycidoxypropyltrimethoxysilane, 3-glycidoxypropyldimethoxyethoxysilane, aminopropylmethyldimethoxysilane, aminopropyltrimethoxysilane, gamma mercaptopropyltrimethoxysilane, or vinyltrimethoxysilane.

16.

The method set forth in claim 1 wherein said at least one solvent includes at least one of denatured ethanol, anhydrous ethanol, methanol, normal propanol, isopropanol, butanol, diethylene glycol, acetones, methylethylketones, triethyleneglycols, vinylpyrrolidones, toluene, glycerine, phenol, benzyl alcohol, or dioxane.

17.

A glass container made by the method set forth in claim 1.

18.

A glass container (10 or 110) that includes:

an axially closed base (10a) at an axial end of the glass container;

a body (10b) extending axially from said base and being circumferentially closed;

5 an axially open mouth (10c) at another end of the glass container opposite of said base;

an exterior glass surface; and

a cross-linked hybrid sol-gel (15) on at least a portion of said exterior glass surface.

10

19.

The glass container set forth in claim 18 wherein said cross-linked hybrid sol-gel has greater than 90% silicate-based material by weight for increasing strength of the glass container and for increasing fragment-retention.

15

20.

The glass container set forth in claim 19, wherein said cross-linked hybrid sol-gel includes at least one silane.

20

21.

The glass container set forth in claim 20, wherein said at least one silane includes a first silane and a multiple of said first silane.

25

22.

The glass container set forth in claim 21, wherein said first silane includes at least one of methyltriethoxysilane, phenyltriethoxysilane, or phenyltrimethoxysilane, and said multiple of said first silane includes at least one of dimethyldiethoxysilane, diphenyldiethoxysilane, diphenyldimethoxysilane, 3-glycidoxypropyltrimethoxysilane, 3-glycidoxypropyldimethoxyethoxysilane, aminopropylmethyldimethoxysilane, aminopropyltrimethoxysilane, gamma mercaptopropyltrimethoxysilane, or vinyltrimethoxysilane.

10

23.

The glass container set forth in claim 20, wherein said hybrid sol-gel includes an ultraviolet blocking material including at least one of cerium oxide, titanium oxide, zinc oxide, bismuth oxide, or barium titanate.

15

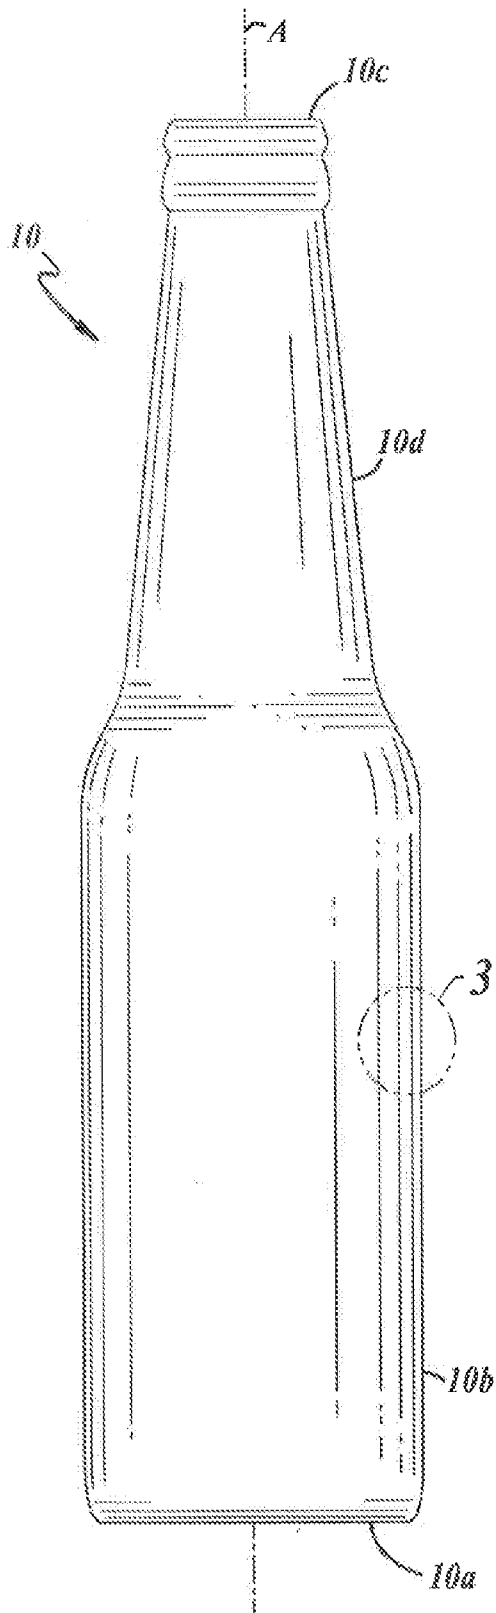


FIG. 1

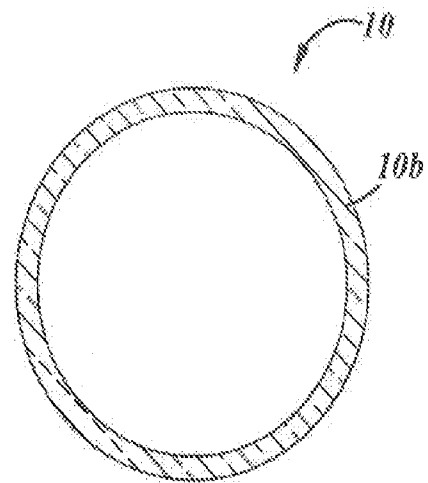


FIG. 2

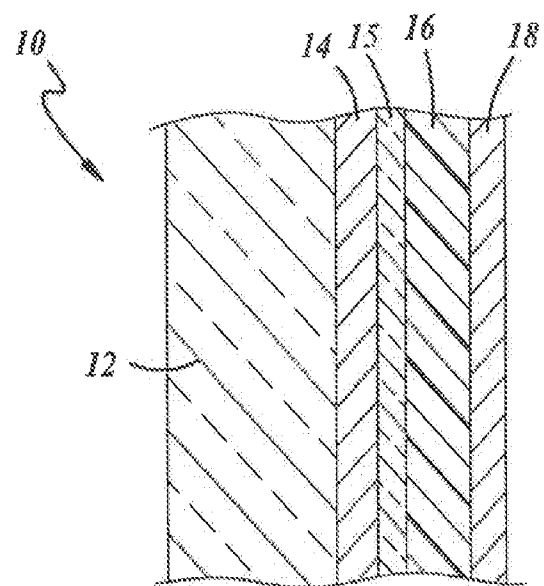


FIG. 3

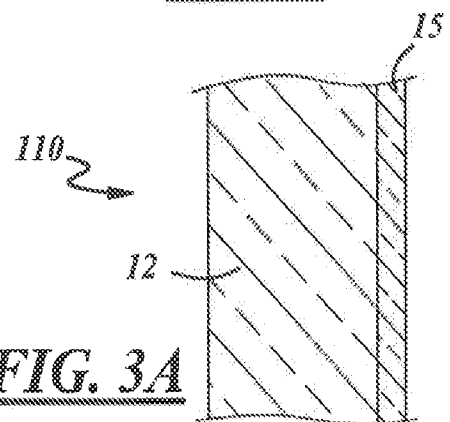


FIG. 3A

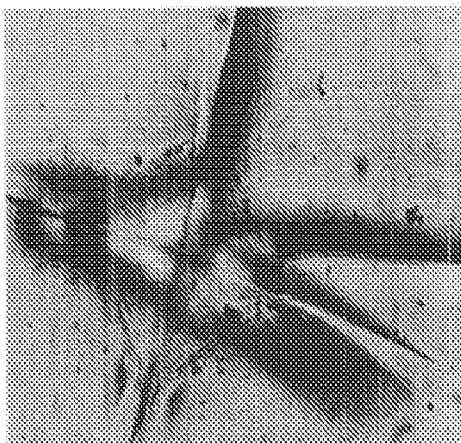


FIG. 4A

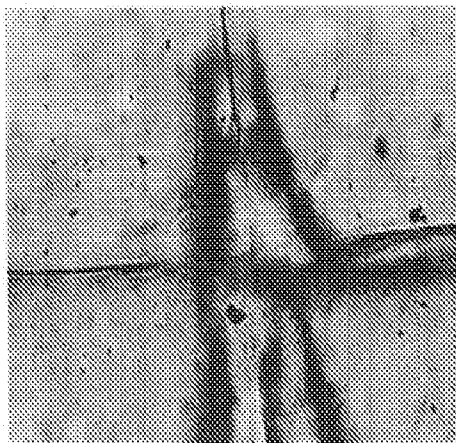


FIG. 4B

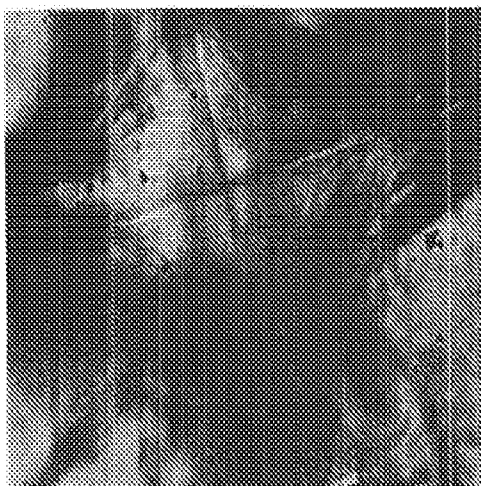


FIG. 5A



FIG. 5B

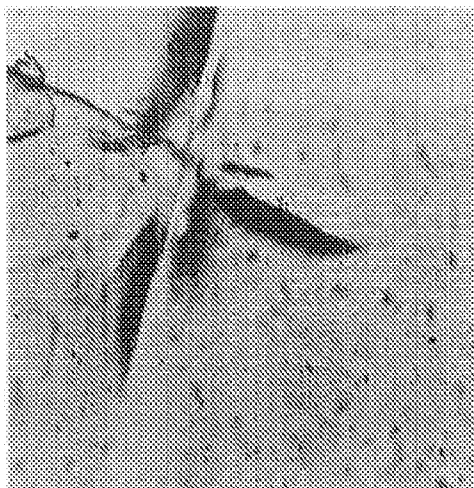


FIG. 6A

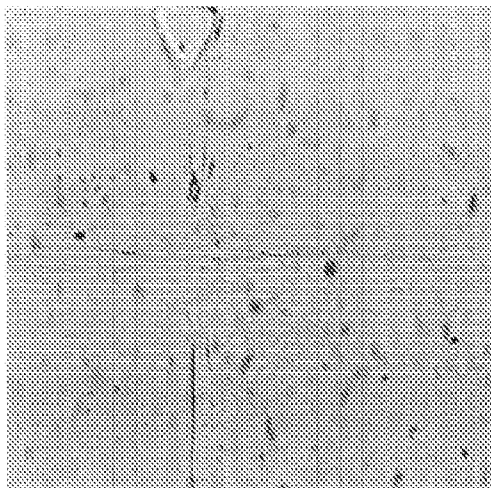


FIG. 6B

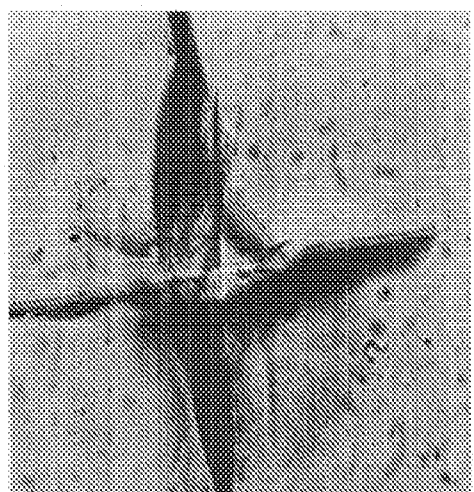


FIG. 7A

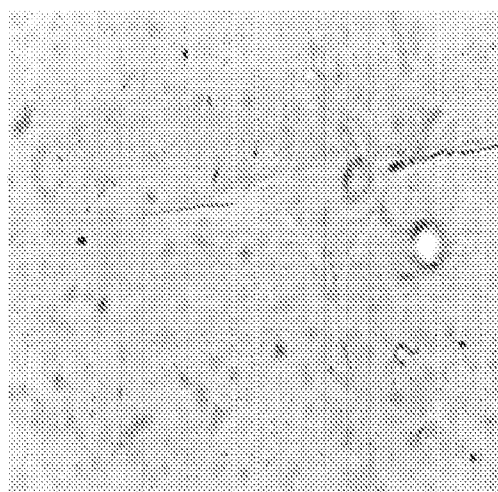


FIG. 7B

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/026562

A. CLASSIFICATION OF SUBJECT MATTER
INV. C03C1/00 C03C17/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2008 273783 A (CENTRAL GLASS CO LTD) 13 November 2008 (2008-11-13) paragraph [0050] - paragraph [0063] -----	1,5,6, 15-22
X	US 4 171 056 A (FORSCHIRM ALEX S [US] ET AL) 16 October 1979 (1979-10-16) examples -----	1-23
X	EP 1 052 230 A1 (TOYO INK MFG CO [JP]) 15 November 2000 (2000-11-15) paragraph [0070] example 4 -----	1,5, 15-22
X	WO 01/32577 A1 (CIBA SC HOLDING AG [CH]) 10 May 2001 (2001-05-10) examples 22,24,29,33,42 ----- -/-	1,5, 15-22

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 July 2012

Date of mailing of the international search report

12/07/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Somann, Karsten

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/026562

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 992 555 A1 (TEIKOKU CHEM IND CO LTD [JP]; ASAHI BEER PAX CO LTD [JP]) 12 April 2000 (2000-04-12) examples -----	1,5, 15-22
X	JP 2001 207115 A (TEIKOKU CHEM IND CO LTD) 31 July 2001 (2001-07-31) paragraph [0119]; examples 7-9 table 2 -----	1,5, 15-22
X	JP 2003 285840 A (MOON STAR CO) 7 October 2003 (2003-10-07) paragraph [0021] - paragraph [0024] -----	1,15, 17-22
A	DE 198 39 682 A1 (DEGUSSA [DE]; OBERLAND GLAS [DE]) 2 March 2000 (2000-03-02) page 2, line 59 - page 3, line 14 example 1 -----	1-23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/026562

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2008273783 A	13-11-2008	JP 4882854 B2 JP 2008273783 A	22-02-2012 13-11-2008
US 4171056 A	16-10-1979	NONE	
EP 1052230 A1	15-11-2000	EP 1052230 A1 JP 2000303025 A	15-11-2000 31-10-2000
WO 0132577 A1	10-05-2001	AT 263126 T AU 7917000 A DE 60009561 D1 DE 60009561 T2 JP 2003512996 A US 6524382 B1 US 2003140820 A1 US 2004159265 A1 WO 0132577 A1	15-04-2004 14-05-2001 06-05-2004 19-08-2004 08-04-2003 25-02-2003 31-07-2003 19-08-2004 10-05-2001
EP 0992555 A1	12-04-2000	EP 0992555 A1 US 6262187 B1 WO 9859010 A1	12-04-2000 17-07-2001 30-12-1998
JP 2001207115 A	31-07-2001	JP 2001207115 A WO 0155271 A1	31-07-2001 02-08-2001
JP 2003285840 A	07-10-2003	NONE	
DE 19839682 A1	02-03-2000	AT 261407 T AU 4486499 A DE 19839682 A1 DK 997446 T3 EP 0997446 A1 ES 2214778 T3 JP 2000086294 A KR 20000022833 A PT 997446 E US 6403175 B1	15-03-2004 16-03-2000 02-03-2000 14-06-2004 03-05-2000 16-09-2004 28-03-2000 25-04-2000 30-07-2004 11-06-2002