

(19)



(11)

EP 2 048 457 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

31.08.2016 Bulletin 2016/35

(51) Int Cl.:

F25B 9/06 ^(2006.01)

F25B 13/00 ^(2006.01)

(86) International application number:

PCT/JP2007/064737

(21) Application number: **07791431.5**

(22) Date of filing: **27.07.2007**

(87) International publication number:

WO 2008/015965 (07.02.2008 Gazette 2008/06)

(54) **REFRIGERATION DEVICE**

KÜHLVORRICHTUNG

DISPOSITIF DE RÉFRIGÉRATION

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(30) Priority: **01.08.2006 JP 2006209708**

(43) Date of publication of application:

15.04.2009 Bulletin 2009/16

(73) Proprietor: **Daikin Industries, Ltd.**

Osaka 530-8323 (JP)

(72) Inventors:

- **ISHIKAWA, Satoshi**
Sakai-shi
Osaka 591-8511 (JP)
- **HORI, Kazutaka**
Sakai-shi
Osaka 591-8511 (JP)

• **KUMAKURA, Eiji**

Sakai-shi
Osaka 591-8511 (JP)
• **SAKITANI, Katsumi**
Sakai-shi
Osaka 591-8511 (JP)

(74) Representative: **Hoffmann Eitle**

Patent- und Rechtsanwälte PartmbB
Arabellastraße 30
81925 München (DE)

(56) References cited:

EP-A1- 1 798 372 JP-A- 07 063 442
JP-A- 07 120 105 JP-A- 2003 279 179
JP-A- 2004 190 938 JP-A- 2005 098 663
JP-A- 2005 188 863 JP-U- 54 178 220
JP-U- 56 018 496 JP-U- 56 060 061
JP-U- 56 099 374 US-A- 4 878 350

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 048 457 B1

Description

Application Publication 2004-190938

TECHNICAL FIELD

[0001] The present invention relates to a refrigerating apparatus performing a vapor compression refrigeration cycle by circulating carbon dioxide and particularly relates to a measure to reduce pressure pulsation of the refrigerant flowing in a refrigerant circuit and being compressed to over its critical pressure.

Background Art

[0002] Conventionally, refrigerating apparatuses including a refrigerant circuit performing a vapor compression refrigeration cycle have been known.

[0003] For example, Patent Document 1 discloses a refrigerating apparatus using carbon dioxide as the refrigerant. A compressor, a radiator, a positive displacement type expander, and an evaporator are connected to the refrigerant circuit of this refrigerating apparatus. In the compressor, the refrigerant is compressed to over its critical pressure. The refrigerant discharged from the compressor radiates heat in the radiator, and is expanded in the expander. Thereafter, the refrigerant is evaporated in the evaporator, and is then sucked into the compressor to be compressed again. For example, in a heating operation of this refrigerating apparatus, heat released from the radiator heats an indoor room.

[0004] In the expansion mechanism of the expander, a refrigerant expansion operation is performed in such a manner that the piston revolves to increase the volume of the expansion chamber. The refrigerant on the inflow side and outflow side of the expander becomes comparatively high in density. Therefore, the expansion operation by the expander accompanies variation in pressure of the refrigerant on the inflow side and outflow side of the expander to cause large pressure pulsation of the refrigerant. The pressure pulsation of the refrigerant may cause noise generation or malfunction of instruments connected to the refrigerant pipes.

[0005] To tackle this problem, Patent Document 2 proposes a refrigerating apparatus in which a pulsation absorbing accumulator is provided on the inflow side of the expander for reducing the pressure pulsation of the refrigerant. This accumulator includes a sealed container housing a bag-shaped membrane. Inside the membrane, a high-pressure nitrogen gas is encapsulated. When the pressure of the refrigerant flowing, for example, on the inflow side of the expander is increased, the membrane contracts to increase the effective volume of the sealed container. As a result, the pressure of the refrigerant lowers to mitigate and absorb the pressure pulsation of the refrigerant.

Patent Document 1: Japanese Unexamined Patent Application Publication 2000-234814

Patent Document 2: Japanese Unexamined Patent

US 4,878,350 relates to a surge bottle or pulsation dampening device for cryogenic services and comprises three sections: a liquid sump section comprised of an enclosed area containing a volume of an incompressible fluid; a warm gas volume section comprised of an enclosed area containing a volume of a compressible warm gas; and a laminar flow section which connects and allows for communication between the liquid sump section and the warm gas volume section.

DISCLOSURE OF THE INVENTION**PROBLEMS THAT THE INVENTION IS TO SOLVE**

[0006] However, the accumulator disclosed in Patent Document 2 necessitates the membrane to make the device configuration comparatively complicated, thereby shortening its lifetime and increasing its cost.

[0007] The present invention has been made in view of the foregoing, and its objective is to reduce, in a refrigerating apparatus performing a vapor compression refrigeration cycle, the pressure pulsation of refrigerant on the inflow side or outflow side of an expander by a comparatively simple device configuration.

MEANS FOR SOLVING THE PROBLEMS

[0008] A first aspect of the present invention is directed to a refrigerating apparatus according to claim 1.

[0009] In the first aspect, a compressor (20) and a positive displacement type expander (22) are provided in a refrigerant circuit (10). In the refrigerant circuit (10), the refrigerant is compressed in the compressor (20), while being expanded in the expander (22), thereby performing the vapor compression refrigeration cycle. In the present aspect, the muffler (30, 40, 50) is provided on the inflow side of the expander (22). This muffler is of any one of expansion type, branch pipe type, and interference type. When the refrigerant flows in the muffler (30, 40, 50), the pressure variation of the refrigerant is suppressed to reduce the pressure pulsation of the refrigerant.

[0010] The refrigerant circuit (10) uses carbon dioxide as the refrigerant for performing the refrigeration cycle, in which the compressor (20) compresses the refrigerant to over its critical pressure.

[0011] When the refrigeration cycle in which carbon dioxide is compressed to over its critical pressure is performed, the refrigerant flowing on the inflow side and outflow side of the expander (22) becomes comparatively low in sonic speed. The lower the sonic speed of the refrigerant of which the sound is to be muffled is, the more the muffler (30, 40, 50) of expansion type, branch pipe type, or interference type according to the present invention can be reduced in size. Accordingly, in this aspect, the pressure pulsation of the refrigerant can be reduced effectively, while size reduction of the muffler (30,

40, 50) can be contemplated.

[0012] The refrigerant circuit (10) includes pressure reducing means (24) for allowing high-pressure refrigerant to be in a gas-liquid two-phase state by reducing its pressure, and the muffler (30, 40, 50) is provided between the outflow side of the pressure reducing means (24) and the inflow side of the expander (22).

[0013] When the refrigerant passes through the pressure reducing means (24), the high-pressure refrigerant having been compressed in the compressor (20) is reduced in pressure to be in a gas-liquid two-phase state. This refrigerant in the gas-liquid two-phase state flows into the muffler (30, 40, 50). The refrigerant in the gas-liquid two-phase state flowing in the muffler (30, 40, 50) is further lower in sonic speed than, for example, refrigerant in a gas state. In consequence, in the present aspect, the pressure pulsation of the refrigerant can be reduced further effectively, while size reduction of the muffler (30, 40, 50) can be contemplated.

[0014] Referring to another aspect not part of the claimed invention, the expander (22) alternatively allows high-pressure refrigerant to be in a gas-liquid two-phase state by reducing its pressure, and the muffler (30, 40, 50) is provided on the outflow side of the expander (22).

[0015] In this case, the refrigerant having been reduced in pressure in the expander (22) to be in the gas-liquid two-phase state flows into the muffler (30, 40, 50). Accordingly, in the present aspect, similarly to the case in the third aspect, the sonic speed of the refrigerant flowing in the muffler (30, 40, 50) becomes low to lead to size reduction of the muffler (30, 40, 50).

[0016] Referring to another aspect of the present invention, the refrigerating apparatus may further include: an expansion type muffler (30) including an expansion passage (32) including at the respective ends thereof opening parts to which refrigerant pipes are connected, the expansion passage (32) having a diameter larger than each of the refrigerant pipes, and a partition plate (60) including an opening (61) having a diameter smaller than an inner diameter of a refrigerant pipe at an opening part of the expansion passage (32) on the side of the expander (22).

[0017] The use of the expansion type muffler (30) may cause resonance of a pressure wave generated in the expander (22) to invite noise generation in a refrigerant pipe connecting the expander (22) and the muffler (30). Specifically, the refrigerant expansion operation by the expander (22) allows a traveling wave of sound to progress from the expander (22) toward the muffler (30), so that this pressure wave enters the expansion passage (32). At the opening part on the inflow side of the expansion passage (32), the traveling wave of the sound is readily reflected, which means that the reflected wave is liable to progress from the muffler (30) toward the expander (22). For this reason, the traveling wave of the sound from the expander (22) and the reflected wave from the muffler (30) resonate with each other in the refrigerant pipe between the expander (22) and the muffler

(30), thereby readily generating noise. To tackle this problem, in the present aspect, the partition plate (60) is provided at the opening part of the expansion passage (32) on the side of the expander (22). The partition plate (60) has the opening smaller in diameter than the refrigerant pipe to function as a generally-called orifice at the opening part of the expansion passage (32). As a result, in the present aspect, the partition plate (60) can prevent generation of the reflected wave from the expansion passage (32) toward the expander (22) to prevent resonance in the refrigerant pipe between the expander (22) and the muffler (30).

[0018] Referring to another aspect of the present invention, the refrigerating apparatus may further include: an expansion type muffler (30) including an expansion passage (32) including at the respective ends thereof opening parts to which refrigerant pipes are connected, the expansion passage (32) having a diameter larger than each of the refrigerant pipes, wherein the expansion passage (32) is formed in a spiral shape.

[0019] Accordingly, in the present aspect, the muffler (30) can be reduced in size with the length of the expansion passage (32) sufficiently secured.

ADVANTAGES OF THE INVENTION

[0020] In the present invention, the muffler (30, 40, 50) of expansion type, branch pipe type, or interference type is provided on the inflow side of the expander (22) to reduce the pressure pulsation of the refrigerant. The mufflers (30, 40, 50) of these types have a device configuration simpler than, for example, the accumulate in Patent Document 2, thereby enabling contemplation of a low cost muffler. Such the simple device configuration facilitates the maintenance of the muffler (30, 40, 50).

[0021] The muffler (30, 40, 50) is applied to a refrigerant circuit (10) in which carbon dioxide is compressed to over its critical pressure. The refrigeration cycle in which the refrigerant is compressed to over its critical pressure lowers comparatively the sonic speed of the refrigerant flowing in the muffler (30, 40, 50), thereby leading to a compact design of the muffler (30, 40, 50).

[0022] Further, the refrigerant in the gas-liquid two-phase state is allowed to flow into the muffler (30, 40, 50). The flow rate of the refrigerant in the gas-liquid two-phase state flowing in the muffler (30, 40, 50) lowers further to lead to a further compact design of the muffler (30, 40, 50).

[0023] Moreover, the partition plate (60) serving as an orifice may be provided at the opening part of the expansion passage (32) on the side of the expander (22) in the expansion type muffler (30). This prevents resonance from causing in the refrigerant pipe between the muffler (30) and the expander (22). As a result, noise generation caused due to the resonance can be suppressed.

[0024] Additionally, the expansion passage (32) may be formed in a spiral shape. This can lead to a further compact design of the muffler (30) with the channel length

of the expansion passage (32) sufficiently secured.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025]

[FIG. 1] FIG. 1 is a schematic diagram showing a configuration of a refrigerant circuit of a refrigerating apparatus which is not part of the invention

[FIG. 2] FIG. 2 is a schematic diagram showing a configuration of an expansion type muffler in accordance with the apparatus of Fig. 1.

[FIG. 3] FIG. 3 is a schematic diagram showing a configuration of a refrigerant circuit of a refrigerating apparatus which is not part of the invention

[FIG. 4] FIG. 4 is a schematic diagram showing a configuration of an expansion type muffler in accordance with the apparatus of Fig. 3.

[FIG. 5] FIG. 5 is a schematic diagram showing a configuration of a refrigerant circuit of a refrigerating apparatus in accordance with the invention.

[FIG. 6] FIG. 6 is a schematic diagram showing a configuration of a branch pipe type muffler.

[FIG. 7] FIG. 7 is a schematic diagram showing a configuration of an interference type muffler.

[FIG. 8] FIG. 8 is a schematic perspective view of an expansion type muffler in a spiral shape.

[FIG. 9] FIG. 9 is a schematic diagram showing a configuration of a refrigerant circuit switchable between a cooling operation and a heating operation.

INDEX OF REFERENCE NUMERALS

[0026]

1	air conditioner
10	refrigerating apparatus
20	compressor
22	expander
24	expansion valve (pressure reducing means)
30	expansion type muffler (muffler)
40	branch pipe type muffler (muffler)
50	interference type muffler (muffler)
60	partition plate

BEST MODE FOR CARRYING OUT THE INVENTION

[0027] Configurations will be described below in detail with reference to the accompanying drawings.

Configuration 1

[0028] The configuration 1 will be described. Configuration 1 illustrates the basic configuration of a refrigerating apparatus which is not part of the claimed invention.

[0029] A refrigerating apparatus in accordance with configuration 1 composes an air conditioner (1) for indoor

air conditioning. The refrigerating apparatus (1) includes a refrigerant circuit (10) performing a vapor compression refrigeration cycle by circulating refrigerant. The refrigerant circuit (10) is filled with carbon dioxide as the refrigerant. The refrigeration cycle in which the refrigerant is compressed to over its critical pressure is performed in the refrigerant circuit (10).

[0030] In the refrigerant circuit (10), a compressor (20), a radiator (21), an expander (22), and an evaporator (23) are connected to one another by means of refrigerant pipes (11, 12, 10 13, 14). Specifically, to the discharge side of the compressor (20), one end of a discharge pipe (11) is connected. The other end of the discharge pipe (11) is connected to one end of the radiator (21). The other end of the radiator (21) is connected to one end of an inflow pipe (12). The other end of the inflow pipe (12) is connected to the inflow side of the expander (22). The outflow side of the expander (22) is connected to one end of an 15 outflow pipe (13). The other end of the outflow pipe (13) is connected to one end of the evaporator (23). The other end of the evaporator (23) is connected to one end of a suction pipe (14). The other end of the suction pipe (14) is connected to the suction side of the compressor (20).

[0031] The compressor (20) is of positive displacement type. The compressor (20) 20 accommodates in its casing a rotary compression mechanism. The compression mechanism of the compressor (20) compresses gas refrigerant up to a pressure over its critical pressure. The radiator (21) is disposed in an indoor space, for example, and is composed of a fin-and-tube type heat exchanger. In the radiator (21), heat is radiated from the high-temperature high-pressure refrigerant indoors. The expander (22) is of 25 positive displacement type. The expander (22) accommodates in its casing a rotary expansion mechanism. The expansion mechanism of the expander (22) reduces the pressure of the high-pressure refrigerant to allow it to be in a gas-liquid two-phase state.

[0032] The evaporator (23) is disposed in an outdoor space, for example, and is composed of a fin-and-tube heat exchanger. In the evaporator (23), the low-pressure liquid refrigerant absorbs heat from the outdoor air to be evaporated.

[0033] An expansion type muffler (30) is provided in the refrigerant circuit (10). The expansion type muffler (30) is mounted to the inflow pipe (12) on the inflow side of the expander (22). As shown in FIG. 2, the expansion type muffler (30) includes a hollow cylindrical casing (31), in which a cylindrical expansion passage (32) is formed. The expansion passage (32) includes an opening part at one end thereof to which a refrigerant inflow pipe (12a) is connected, and an opening part at the other end thereof to which a refrigerant outflow pipe (12b) is connected. Each inner diameter of the refrigerant inflow pipe (12a) and the refrigerant outflow pipe (12b) is set at approximately 10 mm, and the inner diameter of the casing (31) is set at approximately 30 mm. Namely, the inner diameter of the casing (31) is approximately three times as

large as each inner diameter of the refrigerant pipes (12a, 12b) connected to the respective ends of the casing (31). The channel length 1 of the expansion passage (32) is set at approximately 70 cm. The channel length 1 of the expansion passage (32) may be designed according to the sonic speed of the refrigerant which can be obtained from the property and driving condition of the refrigerant flowing in the expansion passage (32) and the frequency of the pressure pulsation which can be obtained from the rotating speed of the expansion mechanism of the expander (22).

[0034] The expansion type muffler (30) includes a partition plate (60) at the opening part of the expansion passage (32) on the side of the expander (22). The partition plate (60) has a circular opening (61) having a diameter smaller than the inner diameter of the refrigerant outflow pipe (12b), and is fitted in the refrigerant outflow pipe (12b). The partition plate (60) functions as an orifice for preventing resonance of the pressure wave from the expander (22) accompanied by the operation of the expander (22).

- Operation Behavior -

[0035] Basic operation behavior of the air conditioner (1) will be described next. During the operation of the air conditioner (1), the compression mechanism of the compressor (20) and the expansion mechanism of the expander (22) are driven. In the compression mechanism of the compressor (20), the gas refrigerant is compressed to over its critical pressure. The refrigerant compressed in the compressor (20) is discharged into the discharge pipe (11). The refrigerant flowing in the discharge pipe (11) flows into the radiator (21). In the radiator (21), the refrigerant radiates heat indoors to heat the indoor air. The refrigerant having radiated the heat in the radiator (21) flows into the inflow pipe (12) and the expansion type muffler (30), and flows then into the expander (22).

[0036] In the expansion mechanism of the expander (22), the high-pressure refrigerant is reduced in pressure to be low-pressure refrigerant in a gas-liquid two-phase state. The refrigerant having been reduced in pressure in the expander (22) flows out into the outflow pipe (13). The refrigerant flowing in the outflow pipe (13) flows into the evaporator (23). In the evaporator (23), the refrigerant absorbs heat from the outdoor air to be evaporated. The gas refrigerant having been evaporated in the evaporator (23) flows into the suction pipe (14), and is then sucked into the compressor (20). In the compression mechanism of the compressor (20), the refrigerant is compressed again to over its critical pressure.

- Pressure Pulsation Suppressing Behavior of Muffler -

[0037] In the operation of the above-described air conditioner (1), refrigerant compression by the compressor (20) may accompany variation in pressure of the refrigerant flowing in the refrigerant circuit (10), which can

cause pressure pulsation of the refrigerant in any of the refrigerant pipes (11, 12, 13, 14). Particularly, in the inflow pipe (12) on the inflow side of the expander (22), the refrigerant at a comparatively high density flows, and therefore, large pressure pulsation is liable to be caused. To tackle this problem, in the air conditioner (1), the expansion type muffler (30) is provided to minimize the pressure pulsation of the refrigerant on the inflow side of the expander (22).

[0038] Specifically, the high-pressure refrigerant having radiated heat in the radiator (21) flows into the expansion type muffler (30). In the expansion passage (32), a wave by the pressure variation of the refrigerant receives interference to mitigate the pressure variation of the refrigerant. As a result, the pressure pulsation of the refrigerant on the inflow side of the expander (22) is reduced.

[0039] In association with the expansion operation of the expander (22), a traveling wave of sound progresses from the inflow side of the expander (22) toward the expansion type muffler (30). In the case where the partition plate (60) is not provided at the opening part of the expansion passage (32) on the side of the expander (22), this traveling wave is reflected by the opening part of the expansion passage (32), and accordingly, the reflected wave from the expansion passage (32) toward the expander (22) is readily produced. Resonance of the traveling wave and the reflected wave may generate noise in the refrigerant outflow pipe (12b). To tackle this problem, the partition plate (60) is provided at the opening part of the expansion passage (32) on the side of the expander (22) in the present embodiment. With the partition plate (60) provided, the reflected wave from the expansion type muffler (30) toward the expander (22) is not produced to suppress resonance in the refrigerant outflow pipe (12b).

- Advantages

[0040] The expansion type muffler (30) is provided on the inflow side of the expander (22). This can reduce the pressure pulsation of the refrigerant on the inflow side of the expander (22) effectively, while the muffler is simplified. In consequence, in the present invention, cost reduction of the muffler can be contemplated when compared with the conventional accumulator. Such the simplified configuration of the muffler can facilitate the maintenance of the muffler (30).

[0041] The carbon dioxide is compressed to over its critical pressure in the refrigerant circuit (10). This lowers the flow rate of the refrigerant flowing in the expansion type muffler (30). By this lowering, the channel length 1 of the expansion passage (32) can be shortened. Thus, the expansion type muffler (30) can be reduced in size.

[0042] Further, the partition plate (60) serving as an orifice is provided at the opening part of the expansion passage (32) on the side of the expander (22). This can prevent resonance from causing in the refrigerant pipe

between the expansion type muffler (30) and the expander (22) (refrigerant outflow pipe (12b)). Hence, noise generated due to the resonance can be avoided.

<Configuration 2>

[0043] In an air conditioner (1) in accordance with configuration 2 which is not part of the claimed invention, 10 as shown in FIG. 3 and FIG. 4, the same expansion type muffler (30) as that in configuration 1 provided to the outflow pipe (13) on the outflow side of the expander (22) (between a refrigerant inflow pipe (13a) and a refrigerant outflow pipe (13b)). In this refrigerant circuit (10), the high-pressure refrigerant at a pressure over its critical pressure is reduced in pressure in the expander (22) to be in a gas-liquid two-phase state. 15 Thereafter, the refrigerant in the gas-liquid two-phase state flows into the expansion type muffler (30). As a result, the pressure pulsation of the refrigerant on the outflow side of the expander (22) can be reduced.

[0044] Further, by allowing the refrigerant in the gas-liquid two-phase state to flow into the expansion type muffler (30), the sonic speed of the refrigerant flowing in the expansion passage (32) can be reduced further when compared with, for example, that of gas refrigerant. Accordingly, the channel length 1 of the expansion passage (32) can be further shortened, thereby enabling contemplation of reduction in size of the expansion type muffler (30).

[0045] The partition plate (60) is provided at the opening part of the 25 expansion passage (32) on the side of the expander (22) (the refrigerant inflow pipe (13a)). This can prevent the aforementioned resonance from being caused in the refrigerant inflow pipe (13a).

<EMBODIMENT>

[0046] In an air conditioner (1) in accordance with an Embodiment of the present invention, as shown in FIG. 5, an expansion valve (24) is provided between the radiator (21) and the expander (22). The expansion valve (24) serves as pressure reducing means for allowing the high-pressure refrigerant having radiated heat in the radiator (21) to be in a gas-liquid two-phase state by reducing its pressure. In the embodiment, the same expansion type muffler (30) as that in above unclaimed configurations is provided between the outflow side of the pressure reducing valve (24) and the inflow side of the expander (22).

[0047] The refrigerant in the gas-liquid two-phase state is allowed to flow into the expansion type muffler (30). This lowers the flow rate of the refrigerant flowing in the expansion passage (32) to lead to shortening of the length of the expansion passage (32).

<OTHER EMBODIMENTS>

[0048] In each of the embodiments, the expansion type

muffler (30) is provided on the inflow side of the expander (22). Rather than the expansion type muffler (30), a branch pipe type muffler (40) shown in FIG. 6 or an interference type muffler (50) shown in FIG. 7 may be employed.

[0049] Specifically, the branch type muffler (40) shown in FIG. 6 includes a branch pipe (41) branching from a refrigerant pipe (12, 13) on the inflow side or outflow side of the expander (22), and having a closed distal end. In the branch pipe type muffler (40), interference in pressure variation is allowed to be caused between the refrigerant flowing in the branch pipe (41) branching from the refrigerant pipe (12, 13) and the refrigerant having been reflected by the closed end of the branch pipe (41) to thus reduce the pressure pulsation of the refrigerant.

[0050] The interference type muffler (50) shown in FIG. 7 includes an interference pipe (51) branching from a refrigerant pipe (12, 13) on the inflow side of the expander (22), and interflowing again with refrigerant pipe (12, 13). In the interference type muffler (50), interference in pressure variation is allowed to be caused between the refrigerant flowing in the refrigerant pipe (12, 13) and the refrigerant flowing in the interference pipe (51) to reduce the pressure pulsation of the refrigerant. Each of the mufflers (40, 50) has a device configuration simpler than the conventional accumulator, thereby enabling contemplation of cost reduction and maintenance facilitation of the muffler.

[0051] Referring again to the expansion type muffler (30), as shown in FIG. 8, the expansion passage (32) may be formed in a spiral or coil shape, for example. The spiral expansion passage (32) can lead to a compact design of the expansion type muffler (30) with the channel length of the expansion passage (32) secured to some extent.

[0052] In the refrigerant circuit (10) in a four-way switching valve (25) and a bridge circuit (26) including four check valves may be provided, as shown in FIG. 9, to make the air conditioner (1) switchable between a cooling operation and a heating operation. In this refrigerant circuit (10), provision of any of the mufflers (30, 40, 50) on the inflow side of the expander (22) can reduce the pressure pulsation of the refrigerant on the inflow side or outflow side of the expander (22) during each operation.

[0053] In each of the embodiments, carbon dioxide is used as the refrigerant in the refrigerant circuit (10) for performing the refrigeration cycle in which the carbon dioxide is compressed to over its critical pressure.

[0054] In each of the above embodiments, the compression mechanism of the compressor (20) and the expansion mechanism of the expander (22) may be connected to each other by means of a rotary shaft to compose a generally-called single shaft expander-compressor unit.

Claims

1. A refrigerating apparatus including a refrigerant circuit (10) to which a compressor (20) and a positive displacement type expander (22) are connected and which performs a refrigeration cycle by circulating refrigerant, comprising:

any one of an expansion type muffler (30), a branch pipe type muffler (40), and an interference type muffler (50) wherein the refrigerant circuit (10) uses carbon dioxide as the refrigerant for performing the refrigeration cycle, in which the compressor (20) compresses the refrigerant to over its critical pressure, **characterized in that** the refrigerant circuit (10) includes pressure reducing means (24) for allowing high-pressure refrigerant to be in a gas-liquid two-phase state by reducing its pressure, and the muffler (30, 40, 50) is provided between the outflow side of the pressure reducing means (24) and the inflow side of the expander (22).

2. The refrigerating apparatus of claim 1, comprising:

an expansion type muffler (30) including an expansion passage (32) including at the respective ends thereof opening parts to which refrigerant pipes are connected, the expansion passage (32) having a diameter larger than each of the refrigerant pipes, and a partition plate (60) including an opening (61) having a diameter smaller than an inner diameter of a refrigerant pipe at an opening part of the expansion passage (32) on the side of the expander (22).

3. The refrigerating apparatus of claim 1, comprising:

an expansion type muffler (30) including an expansion passage (32) including at the respective ends thereof opening parts to which refrigerant pipes are connected, the expansion passage (32) having a diameter larger than each of the refrigerant pipes, wherein the expansion passage (32) is formed in a spiral shape.

Patentansprüche

1. Kühlvorrichtung mit einem Kältemittelkreislauf (10), an den ein Kompressor (20) und eine positive Verdrängungsexpansionseinrichtung (22) angeschlossen sind, und der einen Kühlkreislauf durchführt, indem ein Kältemittel zirkuliert wird, umfassend:

einen Expansions-Schalldämpfer (30), einen Abzweigrohr-Schalldämpfer (40) oder einen Interferenz-Schalldämpfer (50), wobei der Kältemittelkreislauf (10) Kohlendioxid als Kältemittel für die Durchführung des Kühlkreislaufs verwendet, in dem der Kompressor (20) das Kältemittel über seinen kritischen Druck hinaus komprimiert, **dadurch gekennzeichnet, dass** der Kältemittelkreislauf (10) Druckminderungsmittel (24) aufweist, um es einem Hochdruckkältemittel zu ermöglichen, in einem Gas-Flüssig-Zweiphasenzustand zu sein, indem der Druck des Hochdruckkältemittels verringert wird, und der Schalldämpfer (30, 40, 50) zwischen der Ausströmseite des Druckminderungsmittels (24) und der Anströmseite der Expansionseinrichtung (22) vorgesehen ist.

2. Kühlvorrichtung nach Anspruch 1, umfassend:

einen Expansions-Schalldämpfer (30), der einen Expansionskanal (32) aufweist, der an den jeweiligen Enden Öffnungsteile aufweist, an die Kältemittelleitungen angeschlossen sind, der Expansionskanal (32) einen Durchmesser aufweist, der größer ist als jede der Kältemittelleitungen, und eine Trennplatte (60), die eine Öffnung (61) mit einem Durchmesser kleiner als ein Innendurchmesser einer Kältemittelleitung an einem Öffnungsteil des Expansionskanals (32) auf der Seite der Expansionseinrichtung (22) aufweist.

3. Kühlvorrichtung nach Anspruch 1, umfassend:

einen Expansions-Schalldämpfer (30), der einen Expansionskanal (32) aufweist, der an den jeweiligen Enden Öffnungsteile aufweist, an die Kältemittelleitungen angeschlossen sind, der Expansionskanal (32) einen Durchmesser aufweist, der größer ist als jede der Kältemittelleitungen, wobei der Expansionskanal (32) in einer Spiralform ausgebildet ist.

Revendications

1. Appareil de réfrigération incluant un circuit de réfrigérant (10) auquel un compresseur (20) et un détendeur du type à déplacement positif (22) sont connectés et qui effectue un cycle de réfrigération en faisant circuler un réfrigérant, comprenant :

l'un quelconque d'un silencieux du type à expansion (30), d'un silencieux du type à tuyau d'embranchement (40) et d'un silencieux du type

pe à interférence (50), dans lequel
le circuit de réfrigérant (10) utilise du dioxyde de
carbone comme réfrigérant pour effectuer le cy-
cle de réfrigération, dans lequel le compresseur
(20) comprime le réfrigérant à plus de sa pres- 5
sion critique,

caractérisé en ce que :

le circuit de réfrigérant (10) inclut un moyen
de réduction de pression (24) pour permet- 10
tre à du réfrigérant haute pression d'être
dans un état à deux phases gaz-liquide en
réduisant sa pression, et
le silencieux (30, 40, 50) est disposé entre 15
le côté de décharge du moyen de réduction
de pression (24) et le côté d'entrée du dé-
tendeur (22).

2. Appareil de réfrigération selon la revendication 1, 20
comprenant :

un silencieux du type à expansion (30) incluant
un passage d'expansion (32) comportant à ses
extrémités respectives des parties d'ouverture
auxquelles des tuyaux de réfrigérant sont con- 25
nectés, le passage d'expansion (32) ayant un
diamètre supérieur à celui de chacun des tuyaux
de réfrigérant et
une plaque de séparation (60) incluant une
ouverture (61) ayant un diamètre inférieur au 30
diamètre intérieur d'un tuyau de réfrigérant dans
une partie d'ouverture du passage d'expansion
(32) sur le côté du détendeur (22).

3. Appareil de réfrigération selon la revendication 1, 35
comprenant :

un silencieux du type à expansion (30) incluant
un passage d'expansion (32) comportant à ses
extrémités respectives des parties d'ouverture 40
auxquelles des tuyaux de réfrigérant sont con-
nectés, le passage d'expansion (32) ayant un
diamètre supérieur à celui de chacun des tuyaux
de réfrigérant,
dans lequel le passage d'expansion (32) est for- 45
mé en spirale.

50

55

FIG. 1

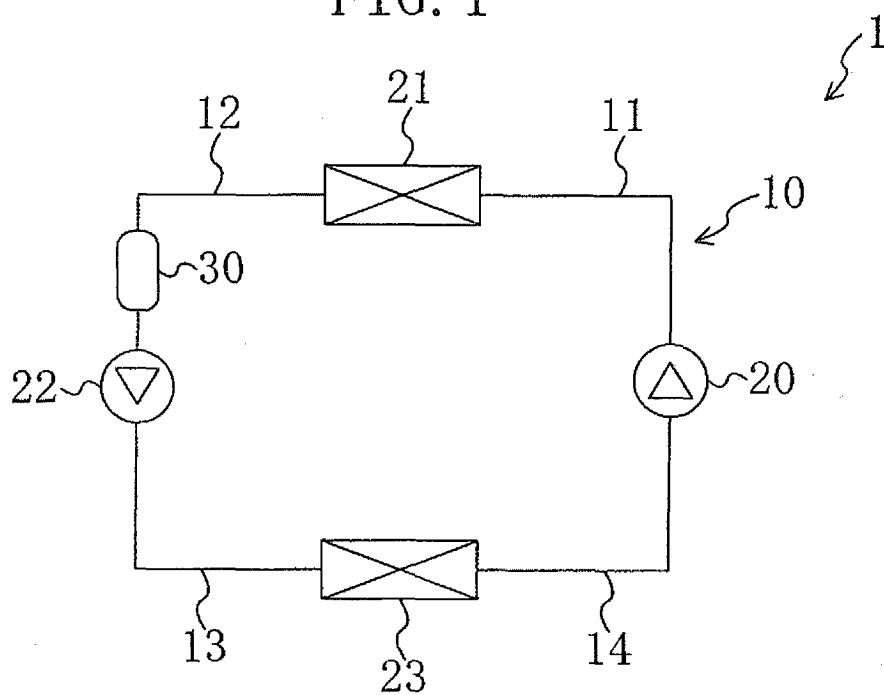


FIG. 2

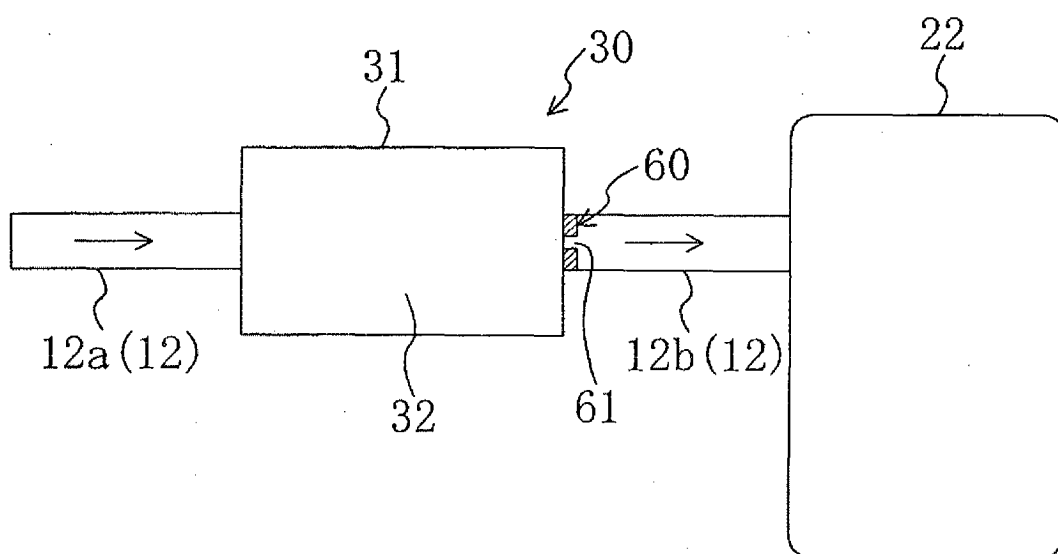


FIG. 3

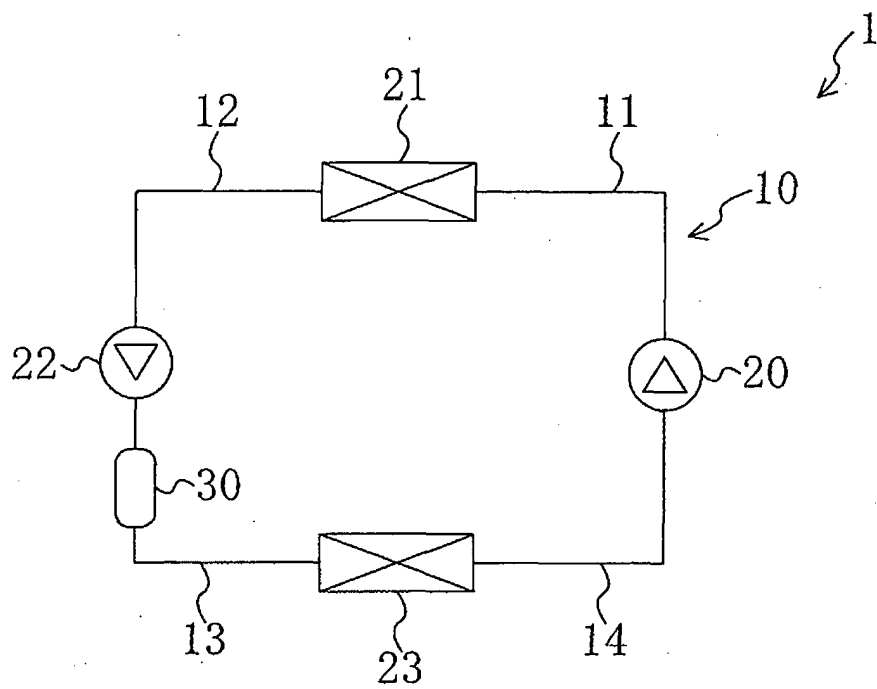


FIG. 4

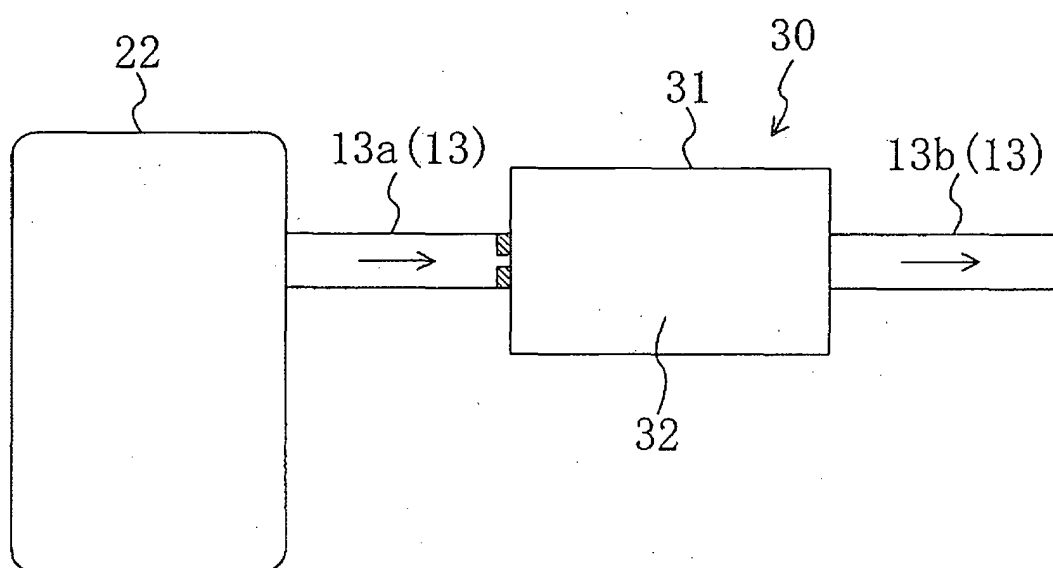


FIG. 5

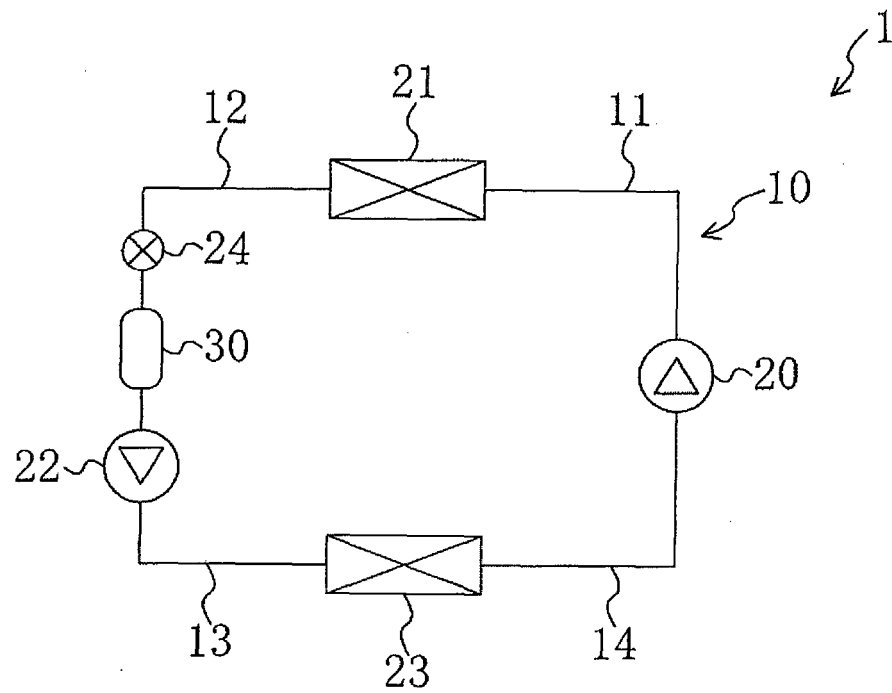


FIG. 6

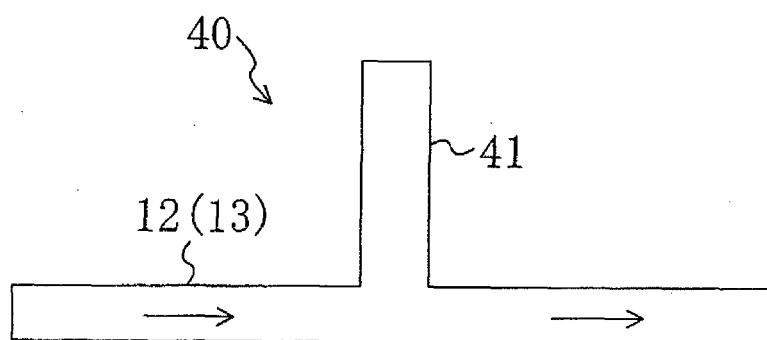


FIG. 7

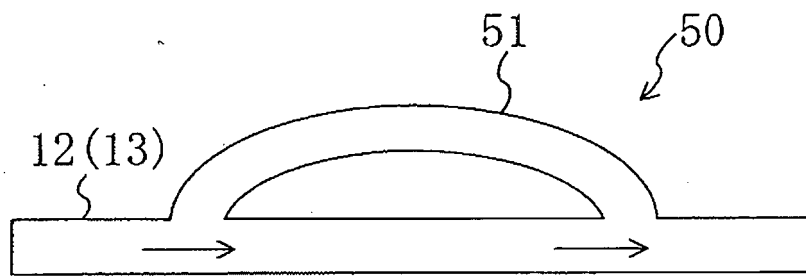


FIG. 8


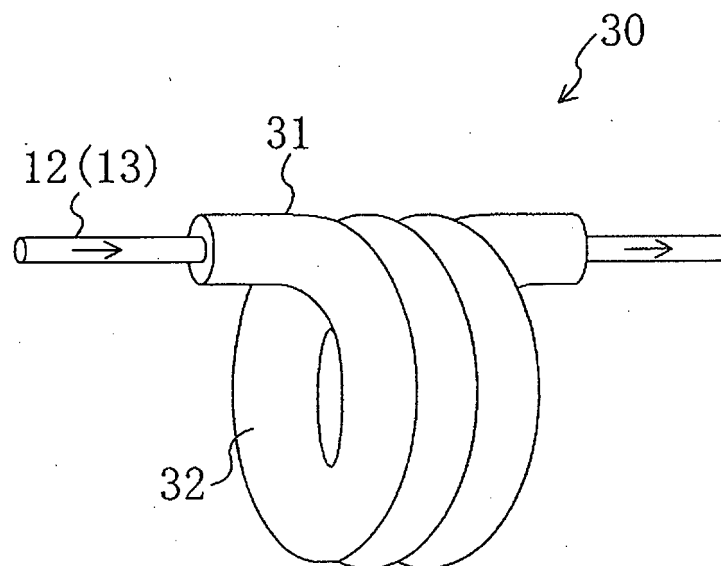


FIG. 9

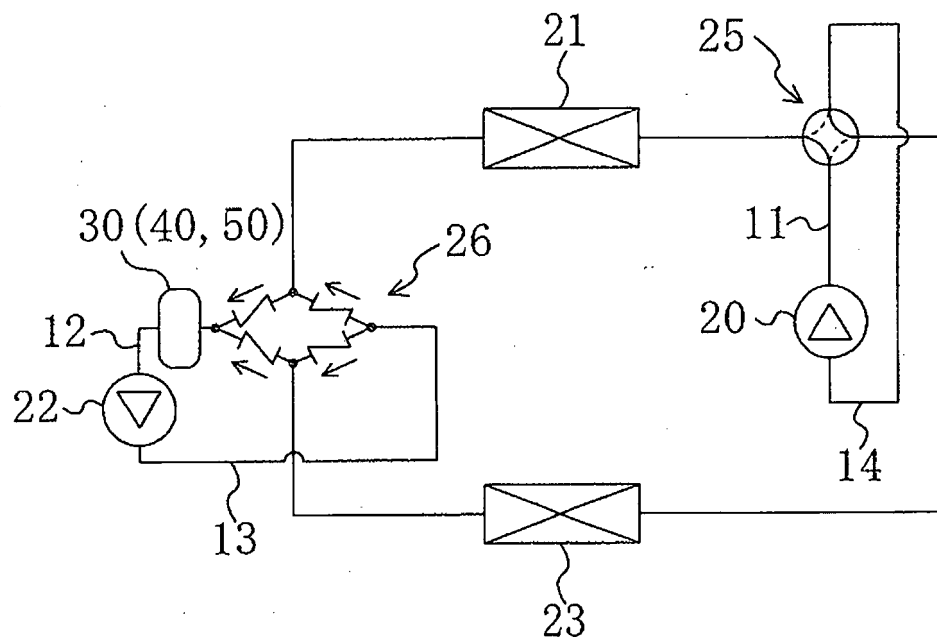

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000234814 A [0005]
- JP 2004190938 A [0005]
- US 4878350 A [0005]