



(11) **EP 3 882 437 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
19.06.2024 Bulletin 2024/25

(51) International Patent Classification (IPC):
F01D 5/20 ^(2006.01) **F01D 11/12** ^(2006.01)
F01D 5/34 ^(2006.01)

(21) Application number: **21164108.9**

(52) Cooperative Patent Classification (CPC):
F01D 5/20; F01D 11/122; F05D 2250/183;
F05D 2250/192; F05D 2250/294; F05D 2250/314

(22) Date of filing: **22.03.2021**

(54) **INTEGRALLY BLADED ROTOR, GAS TURBINE ENGINE AND METHOD FOR MANUFACTURING AN INTEGRALLY BLADED ROTOR**

INTEGRAL BESCHAUFELTER ROTOR, GASTURBINENTRIEBWERK UND VERFAHREN ZUR HERSTELLUNG EINES INTEGRAL BESCHAUFELTEN ROTORS

ROTOR À AUBAGE INTÉGRAL, MOTEUR À TURBINE À GAZ ET PROCÉDÉ DE FABRICATION D'UN ROTOR À AUBAGE INTÉGRAL

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **20.03.2020 US 202016825610**

(43) Date of publication of application:
22.09.2021 Bulletin 2021/38

(73) Proprietor: **RTX Corporation**
Farmington, CT 06032 (US)

(72) Inventors:
• **GUO, Changsheng**
South Windsor, CT 06074 (US)

• **STROCK, Christopher W.**
Kennebunk, ME 04043 (US)

(74) Representative: **Dehns**
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(56) References cited:
EP-A1- 2 309 097 EP-A1- 2 952 686
EP-A1- 3 686 438 EP-A1- 3 839 215
US-A1- 2007 077 149 US-A1- 2010 329 875

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present disclosure relates to blades, and more particularly to blade tip surfaces such as those for cooperating with abradable coatings on turbomachines, such as in gas turbine engines. The present invention relates to an integrally bladed rotor, to a method for manufacturing an integrally bladed rotor and to a gas turbine engine.

BACKGROUND ART

[0002] A variety of rotating blades are known for use in gas turbine engines. Traditionally, air seals are used between rotating blades and the inner surface of the engine case in order to increase engine efficiency. Engine efficiency can be correlated to the clearance between tips of the blades and the inner diameter of the air seal. In this regard, some air seals are provided as an abradable air seal that incorporates an abradable material affixed to the inner surface of a casing. During operation, the rotating blade tips of the blades contact and abrade the abradable material (also known as "rubbing").

[0003] Performance requirements for abradable air seal systems can include efficiency standards and maintenance cost targets, among other requirements. In order to meet these standards, abradable air seal systems can be required to have low gas permeability, low roughness, good erosion resistance, but still be abradable during interaction with blades. These requirements can conflict with one another, for example, typically the more erosion resistant an air seal is, the greater the increase in the density and hardness of the seal, tending to increase the difficulty of abrading such a seal. In order to cut the hard and dense abradable material, blades can include abrasive tip coatings such as Cubic Boron Nitride (CBN), which tends to increase the cost of the blades.

[0004] Such conventional methods and systems have generally been considered satisfactory for their intended purpose. However, there is still a need in the art for improved blades for use in sealing systems. The present disclosure provides solutions for these problems.

[0005] US 2010/0329875 A1 discloses an airfoil having a tip-cutter located on a sidewall near a tip portion, the tip-cutter being capable of removing a portion of an abradable material during a tip rub.

[0006] EP 2 952 686 A1 discloses a blade with a blade body including a cutting edge where the tip surface of the blade body meets the pressure side of the blade body.

[0007] US 2007/0077149 A1 discloses a compressor blade for a rotary disk, wherein the blade presents at least one chamfer.

[0008] EP 2 309 097 A1 discloses an airfoil with a tip region and a platform, wherein the tip region has first and second surfaces with different distances from the platform.

SUMMARY OF THE INVENTION

[0009] A blade includes a blade body extending from a blade root to an opposed blade tip surface along a longitudinal axis. The blade body defines a pressure side and a suction side. The blade body includes a cutting edge defined where the tip surface of the blade body meets the pressure side of the blade body. The cutting edge is configured to abrade a seal section of an engine case. The blade tip surface includes a chamfered surface between the pressure side and the suction side of the blade body that tapers toward the blade root in a direction from the pressure side to the suction side. The blade tip surface includes a land on the blade tip surface between the pressure side and the chamfered surface. The cutting edge defines an arcuate portion transitioning between the pressure side and the land of the blade tip surface.

[0010] According to a first aspect, an integrally bladed rotor is provided according to claim 1.

[0011] The integrally bladed rotor may include cutting points extending axially from the blade tip surface along the longitudinal axis.

[0012] A coating may be disposed on a portion of the blade tip surface, wherein the coating may include abrasive particles, the abrasive particles including at least one of TiN, TiCN, TiAlN, Al₂O₃, carbide particles, CBN and diamond. The abrasive particles may be retained in a matrix material.

[0013] The coating may be disposed only on a portion of the blade tip surface that includes the cutting points.

[0014] The cutting edge may include a projection portion, wherein the projection portion extends from the pressure side of the blade body.

[0015] According to a second aspect of the invention, a method for manufacturing an integrally bladed rotor is provided according to claim 6.

[0016] Forming a cutting edge may include machining the chamfered surface on the tip surface between the pressure side and the suction side, wherein machining the chamfered surface may include tapering the chamfered surface toward the hub in a direction from the pressure side to the suction side.

[0017] Forming a cutting edge may include machining a projection portion extending from the pressure side.

[0018] Forming a cutting edge may include forging the chamfered surface between the pressure side and the suction side, wherein forging the chamfered surface may include tapering the chamfered surface toward the hub in a direction from the pressure side to the suction side.

[0019] Forming a cutting edge may include forging a projection portion extending from the pressure side.

[0020] The method may further comprise forming cutting points in the tip surface, wherein the cutting points may extend axially from the tip surface along the longitudinal axis.

[0021] The method may further comprise coating a portion of the tip surface with a coating material, wherein the coating material may include abrasive particles, and the

abrasive particles may include at least one of TiN, TiCN, TiAlN, Al₂O₃, carbide particles, CBN and diamond. The abrasive particles may be retained in a matrix material.

[0022] According to a third aspect of the invention, a gas turbine engine is provided according to claim 11.

[0023] These and other features of the systems and methods of the subject disclosure will become more readily apparent to those skilled in the art from the following detailed description of the preferred embodiments taken in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] So that those skilled in the art to which the subject disclosure appertains will readily understand how to make and use the devices and methods of the subject disclosure without undue experimentation, preferred embodiments thereof will be described by way of example only in detail herein below with reference to certain figures, wherein:

Fig. 1 is a schematic diagram depicting an exemplary embodiment of a gas turbine engine with an integrally bladed rotor constructed in accordance with the present disclosure;

Fig. 2 is a schematic perspective view of an exemplary embodiment of a blade of the integrally bladed rotor constructed in accordance with the present disclosure, showing a pressure side of the blade and a cutting edge;

Fig. 3 is a schematic cross-sectional view of a portion of the blade shown in Fig. 2 disposed in the a gas turbine engine of Fig. 1, showing the cutting edge proximate to an abradable liner;

Fig. 4 is a schematic cross-sectional view of a portion of another exemplary embodiment of a blade of an integrally bladed rotor with a cutting edge constructed in accordance with the present disclosure, showing an arcuate portion on the blade tip surface with a coating;

Fig. 5 is a schematic cross-sectional view of a portion of another exemplary embodiment of a blade of an integrally bladed rotor with a cutting edge constructed in accordance with the present disclosure, showing a projection portion on the blade tip surface with a coating; and

Fig. 6 is a schematic cross-sectional view of a portion of another exemplary embodiment of a blade of an integrally bladed rotor with a cutting edge constructed in accordance with the present disclosure, showing cutting points disposed on a portion of the blade tip surface with a coating.

DETAILED DESCRIPTION

[0025] Reference will now be made to the drawings wherein like reference numerals identify similar structural features or aspects of the subject disclosure. For purposes

of explanation and illustration, and not limitation, a partial view of an exemplary embodiment of a gas turbine engine in accordance with the disclosure is shown in Fig. 1 and is designated generally by reference character 100.

An enlarged perspective view of an exemplary embodiment of a gas turbine blade in accordance with the disclosure is shown in Fig. 2. Other embodiments of gas turbine blades in accordance with the disclosure, or aspects thereof, are provided in Figs. 3-6, as will be described. The systems and methods described herein can be used to enable blades, e.g. nickel blades with or without any coating, to be used in abradable seal systems for gas turbine engines.

[0026] Fig. 1 schematically shows a gas turbine engine 100 including (in serial flow communication) a fan 102, a compressor 104, a combustor 106, and a turbine 108. Gas turbine engine 100 is circumferentially disposed about an engine centerline axis A. Gas turbine engine 100 includes an engine case 110 and an integrally bladed rotor 111 having a hub 112 with a plurality of blades 114 radially inward from case 110. The plurality of blades 114 being integrally formed with the hub 112 in order to form a single component, the plurality of blades projecting integrally and radially outward from hub 112 for rotation about centerline axis A.

[0027] Now with reference to Figs. 2 and 3, blade 114 of the integrally bladed rotor 111 includes a blade body 124 integrally formed with the hub 112 and radially extends from the hub 112 to a blade tip surface 128 along a longitudinal axis B. Blade body 124 defines a pressure side 130 and a suction side 132. According to the invention, blade body 124 includes a cutting edge 134 defined between tip surface 128 of blade body 124 and pressure side 130 of blade body 124. Cutting edge 134 is configured to abrade a portion of an abradable liner 116, e.g. a seal section, of case 110. Those skilled in the art will readily appreciate that cutting edge 134 acts similar to a cutting edge of a cutting machine tool. Instead of removing abradable liner 116 material with friction wear, abradable liner 116 material is removed by the cutting action of cutting edge 134. It is contemplated that the reduced friction energy consumption as compared with traditional blades tends to reduce heat generation during rubbing of abradable liner 116 and improves the life of the integrally bladed rotor 111.

[0028] Those skilled in the art will also readily appreciate that blade 114 tends to reduce costs as compared with CBN tipped blades used in traditional seal systems because no CBN tipping is required for blade 114. In addition, it is contemplated that blade 114 can rub harder abradable layers, e.g. abradable liner 116, than traditional CBN tipped blades, therein increasing efficiency and engine performance, notably in the high-pressure compressor (HPC) section 104 of gas turbine 100. The pressure and temperature are higher in HPC section 104 therefore any clearance/gap reduction typically have a higher impact on efficiency improvements. In addition, in HPC section 104, abradables with high temperature ca-

pability, such as nickel and cobalt based materials, are often needed which tend to make it harder to abrade than other abrasives found in other turbine sections.

[0029] As shown in Fig. 3, abradable liner 116 is located between the blade 114 and an inner surface 118 of engine case 110. Abradable liner 116 includes a layer of rub material 120 disposed on an inner diameter 122 of abradable liner 116. According to the invention, blade tip surface 128 includes a chamfered surface 136 between pressure side 130 and suction side 132 of blade body 124 that tapers toward the hub 112 in a direction from pressure side 130 to suction side 132. The chamfered surface 136 reduces the width of contact of the blade tip surface 128 with the rub material 120. Blade tip surface 128 includes a land 138 between pressure side 130 and chamfered surface 136. A portion of land 138 is at a ninety degree angle with respect to a portion of pressure side 130. Those skilled in the art will readily appreciate that while the angle between land 138 and pressure side 130 is shown and described herein as approximately ninety degrees, the angle can vary depending on the application. For example, a smaller angle tends to increase cutting capability, but there may be a trade-off of reduced cutting edge strength. Those skilled in the art will readily appreciate that a relief angle θ between land 138 and chamfered surface 136 can range from 2 to 6 degrees. Relief angle θ reduces the contact between blade tip surface 128 and abradable liner 116, tending to reduce friction force and frictional heat generation as compared to traditional blades.

[0030] With continued reference to Fig. 3, cutting edge 134 of blade body 124 is positioned proximate an inner diameter 121 of layer of rub material 120 for abrading layer of rub material 120 during circumferential movement of cutting edge 134 as blade body 124 rotates about centerline axis A, shown in Fig. 1, as indicated schematically by the arrow.

[0031] As shown in Fig. 4, blade 214 is similar to blade 114. According to the invention, cutting edge 234 of blade 214 defines an arcuate portion 240 transitioning between pressure side 230 and land 238 of blade tip surface 228. Blade tip surface 228 also includes a coating 246, described in further detail below. Those skilled in the art will readily appreciate that arcuate portion 240 can be stronger than a sharp cutting edge, but there may be a trade-off of increased frictional forces and higher energy tending to cause increased heat generation.

[0032] Now with reference to Fig. 5, blade 314 is similar to blade 114. Cutting edge 334 of blade 314 includes a projection portion 342. Projection portion 342 extends from pressure side 330 of blade body 324, e.g. extending left as oriented in Fig. 5. An angle β between pressure side 330 and projection portion 342, e.g. rake angle, can range from 0 to 4 degrees, and/or can be a variety of suitable angles depending on the given application. For example, the larger angle β is, the sharper and more efficient cutting edge 334 can be, tending to require less force to cut through an abradable liner, e.g. abradable

liner 116, but there may be a trade-off of reduced cutting edge 334 strength. Blade tip surface 328 also includes a coating 346, described in further detail below.

[0033] As shown in Fig. 6, blade 414 is substantially similar to blade 114. Blade 414 includes asperities or raised material such as cutting points 444 extending axially from blade tip surface 428 along longitudinal axis B. Cutting points are disposed on land 438 of blade tip surface 428. Those skilled in the art will readily appreciate that cutting points 444 can also be disposed on lands 138, 238 and 338 of blades 114, 214 and 314, respectively. Those skilled in the art will readily appreciate that the reduced surface area contact between cutting points 444 and an abradable liner, e.g. abradable liner 116, as compared to the surface area contact between the abradable liner a blade tip surface 428 without cutting points 444, tends to reduce heat generation.

[0034] With reference now to Figs. 3-6, blades 214, 314 and 414 include a coating 246, 346 and 446 disposed on a portion of blade tip surfaces 228, 328, and 428. The coating 246, 346 and 446 may be a hard anodize or thin film coating that does cover the entire portion of blade tip surfaces 228, 328, and 428. The coating 246, 346 and 446 may be disposed only on the cutting edge 134, 234, 334, and 434. In at least one embodiment, the coating 246, 346 and 446 may be disposed on a thin area between blade tip surface 128, 228, 328, and 428 and pressure side 130, 230, 330, and 430 and be provided instead of the cutting edge.

[0035] The coating 246, 346, and 446 can include abrasive particles or an abrasive grit, retained in a matrix material. The abrasive particles / abrasive grit may extend above or beyond the matrix material reducing the contact area to reduce the cutting load and heat between the cutting features and the abradable liner 116 therefore improving the life of the blades of the integrally bladed rotor. The abrasive particles can include TiN, TiCN, TiAlN, Al_2O_3 , carbide particles, diamond, CBN and/or any other suitable coating for machining high strength aerospace alloys. Those skilled in the art will readily appreciate that the CBN coating varies from CBN abrasive tipping in that the CBN abrasives are typically brazed or plated on the tips of the blades, while the CBN coating is a thin layer, in the range of microns, on the blade tip, similar to a coated cutting tool edge. Coatings 246, 346 and 446 tend to reduce the wearing away of blade material, e.g. a nickel alloy material, during rubbing. As shown in Fig. 6, coating 446 is disposed only on a portion of blade tip surface 428 that includes cutting points 444. Those skilled in the art will readily appreciate that, while blade 414 is shown with coating 446 only on cutting points 444, coating 446 can be applied directly to a cutting edge, e.g. cutting edge 134, of a blade, e.g. blade 114, similar to coatings 246 and 346 shown in Figs. 4 and 5. It is also contemplated that other suitable coatings can be applied to blade tip surfaces 128, 228, 328 and 428 depending on where blades 114, 214, 314 and 414 are being used in the turbine engine.

[0036] With reference now to Figs. 1-6, a method for manufacturing an integrally bladed rotor, e.g. blades 114, 214, 314 and 414 extending from hub 112, includes forming an airfoil, e.g. blade bodies 124, 224, 324 and 424, extending from the hub 112 towards an opposed tip surface, e.g. tip surfaces 128, 228, 328 and 428, along a longitudinal axis, e.g. longitudinal axis B, wherein the airfoil defines a pressure side, e.g. pressure sides 130, 230, 330 and 430, and a suction side, e.g. suction sides 132, 232, 332 and 432, and forming a cutting edge, e.g. cutting edges 134, 234, 334 and 434, between the tip surface of the airfoil and the pressure side of the airfoil. The cutting edge is configured to abrade a seal section, e.g. abradable liner 116, of an engine case, e.g. engine case 110.

[0037] According to the invention, forming the cutting edge includes either machining or forging a chamfered surface, e.g. chamfered surfaces 136, 236, 336 and 436, between the pressure side and the suction side. Machining and/or forging the chamfered surface includes tapering the chamfered surface toward the blade root in a direction from the pressure side to the suction side. According to the invention, forming the cutting edge includes machining and/or forging an arcuate portion, e.g. arcuate portion 240, between the pressure side and a land. Further, those skilled in the art will also readily appreciate that forming the cutting edge can include machining and/or forging a projection portion, e.g. projection portion 342, extending from the pressure side.

[0038] In addition, it is contemplated that the method can include forming cutting points, e.g. cutting points 444, in the tip surface. Those skilled in the art will readily appreciate that the cutting points can be formed by machining, knurling or any other suitable manufacturing process. It is contemplated that the method can also include coating a portion of the tip surface with a coating material including at least one of TiN, TiCN, TiAlN, Al₂O₃, CBN and diamond. Those skilled the art will readily appreciate that physical vapor deposition (PVD) and/or chemical vapor deposition (CVD) can be used to deposit the coatings, e.g. coatings 146, 246, 346 and 446, described above. It is contemplated that the methods described herein are suitable for mass production of the integrally bladed rotor disk.

[0039] The methods and systems of the present disclosure, as described above and shown in the drawings, provide for blades with superior properties including increased efficiency and potentially reduced cost. While the apparatus and methods of the subject disclosure have been shown and described with reference to preferred embodiments, those skilled in the art will readily appreciate that changes and/or modifications may be made thereto without departing from the scope of the invention as defined by the appended claims.

Claims

1. An integrally bladed rotor (111), comprising:

- 5 a plurality of blades (114; 214; 314; 414) integrally formed with a hub (112) as a single component, each of the plurality of blades having a blade body (124; 324; 424) extending from the hub (112) to an opposed blade tip surface (128; 228; 328; 428) along a longitudinal axis, wherein the blade body (124; 324; 424) defines a pressure side (130; 230; 330; 430) and a suction side (132; 232; 332; 432), and wherein the blade body (124; 324; 424) includes a cutting edge (134; 234; 334; 434) defined between the blade tip surface (128; 228; 328; 428) of the blade body and the pressure side (130; 230; 330; 430) of the blade body, wherein the cutting edge (134; 234; 334; 434) is configured to abrade a seal section (116) of an engine case (110); wherein the blade tip surface (128; 228; 328; 428) includes a chamfered surface (136; 236; 336; 436) between the pressure side (130; 230; 330; 430) and the suction side (132; 232; 332; 432) of the blade body (124; 324; 424) that tapers toward the hub (112) in a direction from the pressure side to the suction side; **characterized in that** the cutting edge (134; 234; 334; 434) defines an arcuate portion (240) transitioning between the pressure side (130; 230; 330; 430) and a land (138; 238; 338; 438) of the blade tip surface (128; 228; 328; 428), wherein the land is between the pressure side (130; 230; 330; 430) and the chamfered surface (136; 236; 336; 436).
2. The integrally bladed rotor (111) as in claim 1, further comprising cutting points (444) extending axially from the blade tip surface (428) along the longitudinal axis.
3. The integrally bladed rotor (111) as in claim 1 or 2, further comprising a coating (246; 346; 446) disposed on a portion of the blade tip surface (128; 228; 328; 428), wherein the coating (246; 346; 446) includes abrasive particles, the abrasive particles including at least one of TiN, TiCN, TiAlN, Al₂O₃, carbide particles, CBN and diamond, and wherein the abrasive particles are retained in a matrix material.
4. The integrally bladed rotor (111) as in claim 3 when dependent on claim 2, wherein the coating (246; 346; 446) is disposed only on a portion of the blade tip surface (128; 228; 328; 428) that includes the cutting points (444).
5. The integrally bladed rotor (111) as in any preceding claim, wherein the cutting edge (134; 234; 334; 434)

includes a projection portion (342), wherein the projection portion extends from the pressure side (130; 230; 330; 430) of the blade body (124; 324; 424).

6. A method for manufacturing an integrally bladed rotor (111), the method comprising:

forming a plurality of airfoils integrally with a hub (112) to form a single component, each of the plurality of airfoils having an opposed tip surface (128; 228; 328; 428) with respect to the hub extending along a longitudinal axis, wherein each of the plurality of airfoils defines a pressure side (130; 230; 330; 430) and a suction side (132; 232; 332; 432); and
forming a cutting edge (134; 234; 334; 434) between the tip surface (128; 228; 328; 428) and the pressure side (130; 230; 330; 430) of each of the plurality of airfoils, wherein the cutting edge is configured to abrade a seal section (116) of an engine case (110), wherein forming a cutting edge (134; 234; 334; 434) includes machining and/or forging an arcuate portion (240) between the pressure side (130; 230; 330; 430) and a land (138; 238; 338; 438), wherein the land is on the tip surface (128; 228; 328; 428) between the pressure side and a chamfered surface (136; 236; 336; 436), and wherein the chamfered surface is on the tip surface between the pressure side and the suction side (132; 232; 332; 432) and tapers toward the hub (112) in a direction from the pressure side to the suction side.

7. The method as recited in claim 6, wherein forming a cutting edge (134; 234; 334; 434) includes machining and/or forging the chamfered surface (136; 236; 336; 436) between the pressure side (130; 230; 330; 430) and the suction side (132; 232; 332; 432), wherein machining and/or forging the chamfered surface includes tapering the chamfered surface toward the hub (112) in a direction from the pressure side to the suction side, wherein the machining of the chamfered surface includes machining the chamfered surface on the tip surface (128; 228; 328; 428).

8. The method as recited in claim 6 or 7, wherein forming a cutting edge (134; 234; 334; 434) includes machining and/or forging a projection portion (342) extending from the pressure side (130; 230; 330; 430).

9. The method as recited in any of claims 6 to 8, further comprising forming cutting points (444) in the tip surface (128; 228; 328; 428), wherein the cutting points extend axially from the tip surface along the longitudinal axis.

10. The method as recited in any of claims 6 to 9, further

comprising coating a portion of the tip surface (128; 228; 328; 428) with a coating material (246; 346; 446) including abrasive particles, the abrasive particles comprising at least one of TiN, TiCN, TiAlN, Al_2O_3 , carbide particles, CBN and diamond, and wherein the abrasive particles are retained in a matrix material.

11. A gas turbine engine (100) comprising:

a case (110) defining a centerline axis;
an abradable liner (116) disposed radially inward from the case including a layer of rub material (120) disposed on an inner diameter (122) of the abradable liner;
an integrally bladed rotor (111) as claimed in any of claims 1 to 5 having a hub (112) radially inward of the case (110) and the abradable liner (116); and
wherein the plurality of blade bodies (124; 324; 424) extend radially outward from the hub (112) for rotation about the centerline axis, and the cutting edge (134; 234; 334; 434) of each blade body being positioned proximate an inner diameter (121) of the layer of rub material (120) for abrading the layer of rub material during circumferential movement of the cutting edges as the blade bodies rotate about the centerline axis.

Patentansprüche

1. Integral beschaufelter Rotor (111), umfassend:

eine Vielzahl von Schaufeln (114; 214; 314; 414), die integral mit einer Nabe (112) als eine einzige Komponente ausgebildet ist, wobei jede der Vielzahl von Schaufeln einen Schaufelkörper (124; 324; 424) aufweist, der sich von der Nabe (112) zu einer gegenüberliegenden Schaufelspitzenoberfläche (128; 228; 328; 428) entlang einer Längsachse erstreckt, wobei der Schaufelkörper (124; 324; 424) eine Druckseite (130; 230; 330; 430) und eine Saugseite (132; 232; 332; 432) definiert, und wobei der Schaufelkörper (124; 324; 424) eine Schneidkante (134; 234; 334; 434) beinhaltet, die zwischen der Schaufelspitzenoberfläche (128; 228; 328; 428) des Schaufelkörpers und der Druckseite (130; 230; 330; 430) des Schaufelkörpers definiert ist, wobei die Schneidkante (134; 234; 334; 434) so konfiguriert ist, dass sie einen Dichtungsabschnitt (116) eines Motorgehäuses (110) abschleift; wobei die Schaufelspitzenoberfläche (128; 228; 328; 428) eine abgeschrägte Oberfläche (136; 236; 336; 436) zwischen der Druckseite (130; 230; 330; 430) und der Saugseite (132; 232; 332; 432) des Schaufelkörpers

- (124; 324; 424) beinhaltet, die sich zu der Nabe (112) hin in einer Richtung von der Druckseite zu der Saugseite verjüngt; **dadurch gekennzeichnet, dass** die Schneidkante (134; 234; 334; 434) einen bogenförmigen Abschnitt (240) definiert, der zwischen der Druckseite (130; 230; 330; 430) und einem Steg (138; 238; 338; 438) der Schaufelspitzenoberfläche (128; 228; 328; 428) übergeht, wobei der Steg zwischen der Druckseite (130; 230; 330; 430) und der abgeschrägten Oberfläche (136; 236; 336; 436) liegt.
2. Integral beschaufelter Rotor (111) nach Anspruch 1, ferner umfassend Schneidspitzen (444), die sich axial von der Schaufelspitzenoberfläche (428) entlang der Längsachse erstrecken.
 3. Integral beschaufelter Rotor (111) nach Anspruch 1 oder 2, ferner umfassend eine Beschichtung (246; 346; 446), die auf einem Abschnitt der Schaufelspitzenoberfläche (128; 228; 328; 428) angeordnet ist, wobei die Beschichtung (246; 346; 446) Schleifpartikel beinhaltet, wobei die Schleifpartikel mindestens eines von TiN, TiCN, TiAlN, Al₂O₃, Karbidpartikeln, CBN und Diamant umfassen, und wobei die Schleifpartikel in einem Matrixmaterial zurückgehalten werden.
 4. Integral beschaufelter Rotor (111) nach Anspruch 3 in Abhängigkeit von Anspruch 2, wobei die Beschichtung (246; 346; 446) nur auf einem Abschnitt der Schaufelspitzenoberfläche (128; 228; 328; 428) angeordnet ist, der die Schneidpunkte (444) beinhaltet.
 5. Integral beschaufelter Rotor (111) nach einem der vorhergehenden Ansprüche, wobei die Schneidkante (134; 234; 334; 434) einen vorstehenden Abschnitt (342) beinhaltet, wobei sich der vorstehende Abschnitt von der Druckseite (130; 230; 330; 430) des Schaufelkörpers (124; 324; 424) erstreckt.
 6. Verfahren zur Herstellung eines integral beschaufelten Rotors (111), wobei das Verfahren folgendes umfasst:

Ausbilden einer Vielzahl von Schaufelblättern integral mit einer Nabe (112), um eine einzelne Komponente zu bilden, wobei jedes der Vielzahl von Schaufelblättern eine gegenüberliegende Spitzenoberfläche (128; 228; 328; 428) in Bezug auf die Nabe aufweist, die sich entlang einer Längsachse erstreckt, wobei jedes der Vielzahl von Schaufelblättern eine Druckseite (130; 230; 330; 430) und eine Saugseite (132; 232; 332; 432) definiert; und
Ausbilden einer Schneidkante (134; 234; 334; 434) zwischen der Spitzenoberfläche (128; 228; 328; 428) und der Druckseite (130; 230; 330; 430) jedes der Vielzahl von Schaufelblättern, wobei die Schneidkante so konfiguriert ist, dass sie einen Dichtungsabschnitt (116) eines Triebwerksgehäuses (110) abschleift, wobei das Ausbilden einer Schneidkante (134; 234; 334; 434) Bearbeiten und/oder Schmieden eines gebogenen Abschnitts (240) zwischen der Druckseite (130; 230; 330; 430) und einem Steg (138; 238; 338; 438) beinhaltet, wobei sich der Steg auf der Spitzenoberfläche (128; 228; 328; 428) zwischen der Druckseite und einer abgeschrägten Oberfläche (136; 236; 336; 436) befindet, und wobei sich die abgeschrägte Oberfläche auf der Spitzenoberfläche zwischen der Druckseite und der Saugseite (132; 232; 332; 432) befindet und sich in Richtung der Nabe (112) in einer Richtung von der Druckseite zur Saugseite verjüngt.
 7. Verfahren nach Anspruch 6, wobei das Ausbilden einer Schneidkante (134; 234; 334; 434) Bearbeiten und/oder Schmieden der abgeschrägten Oberfläche (136; 236; 336; 436) zwischen der Druckseite (130; 230; 330; 430) und der Saugseite (132; 232; 332; 432) beinhaltet, wobei das Bearbeiten und/oder Schmieden der abgeschrägten Oberfläche eine Verjüngung der abgeschrägten Oberfläche in Richtung der Nabe (112) in einer Richtung von der Druckseite zu der Saugseite beinhaltet, wobei das Bearbeiten der abgeschrägten Oberfläche das Bearbeiten der abgeschrägten Oberfläche auf der Spitzenoberfläche (128; 228; 328; 428) beinhaltet.
 8. Verfahren nach Anspruch 6 oder 7, wobei das Ausbilden einer Schneidkante (134; 234; 334; 434) Bearbeiten und/oder Schmieden eines vorstehenden Abschnitts (342) beinhaltet, der sich von der Druckseite (130; 230; 330; 430) erstreckt.
 9. Verfahren nach einem der Ansprüche 6 bis 8, ferner umfassend das Ausbilden von Schneidpunkten (444) in der Spitzenoberfläche (128; 228; 328; 428), wobei sich die Schneidpunkte axial von der Spitzenoberfläche entlang der Längsachse erstrecken.
 10. Verfahren nach einem der Ansprüche 6 bis 9, ferner umfassend das Beschichten eines Abschnitts der Spitzenoberfläche (128; 228; 328; 428) mit einem Beschichtungsmaterial (246; 346; 446), das Schleifpartikel beinhaltet, wobei die Schleifpartikel mindestens eines von TiN, TiCN, TiAlN, Al₂O₃, Karbidpartikeln, CBN und Diamant umfassen, und wobei die Schleifpartikel in einem Matrixmaterial zurückgehalten werden.
 11. Gasturbinentriebwerk (100), umfassend:

ein Gehäuse (110), das eine Mittellinienachse definiert;
 eine abreibbare Auskleidung (116), die radial nach innen von dem Gehäuse angeordnet ist und eine Schicht aus Reibmaterial (120) beinhaltet, die auf einem inneren Durchmesser (122) der abreibbaren Auskleidung angeordnet ist;
 einen integral beschaukelten Rotor (111) nach einem der Ansprüche 1 bis 5, der eine Nabe (112) radial innerhalb des Gehäuses (110) und die abreibbare Auskleidung (116) aufweist; und wobei sich die Vielzahl von Schaufelkörpern (124; 324; 424) von der Nabe (112) radial nach außen erstreckt, um sich um die Mittellinienachse zu drehen, und die Schneidkante (134; 234; 334; 434) jedes Schaufelkörpers in der Nähe eines Innendurchmessers (121) der Schicht des Reibmaterials (120) angeordnet ist, um die Schicht des Reibmaterials während der Umfangsbewegung der Schneidkanten abzuschleifen, wenn sich die Schaufelkörper um die Mittellinienachse drehen.

Revendications

1. Rotor à aubage intégral (111), comprenant :

une pluralité d'aubes (114 ; 214 ; 314 ; 414) formées d'un seul tenant avec un moyeu (112) en tant que composant unique, chacune de la pluralité d'aubes ayant un corps d'aube (124 ; 324 ; 424) s'étendant à partir du moyeu (112) à une surface de pointe d'aube opposée (128 ; 228 ; 328 ; 428) le long d'un axe longitudinal, dans lequel le corps d'aube (124 ; 324 ; 424) définit un intrados (130 ; 230 ; 330 ; 430) et un extrados (132 ; 232 ; 332 ; 432), et dans lequel le corps d'aube (124 ; 324 ; 424) comporte un bord tranchant (134 ; 234 ; 334 ; 434) défini entre la surface de pointe d'aube (128 ; 228 ; 328 ; 428) du corps d'aube et l'intrados (130 ; 230 ; 330 ; 430) du corps d'aube, dans lequel le bord tranchant (134 ; 234 ; 334 ; 434) est configuré pour abraiser une section d'étanchéité (116) d'un carter de moteur (110) ;
 dans lequel la surface de pointe d'aube (128 ; 228 ; 328 ; 428) comporte une surface chanfreinée (136 ; 236 ; 336 ; 436) entre l'intrados (130 ; 230 ; 330 ; 430) et l'extrados (132 ; 232 ; 332 ; 432) du corps d'aube (124 ; 324 ; 424) qui s'effile vers le moyeu (112) dans une direction allant de l'intrados vers l'extrados ; **caractérisé en ce que** le bord tranchant (134 ; 234 ; 334 ; 434) définit une partie arquée (240) faisant la transition entre l'intrados (130 ; 230 ; 330 ; 430) et une surface (138 ; 238 ; 338 ; 438) de la surface de pointe d'aube (128 ; 228 ; 328 ; 428), dans

lequel la surface est située entre l'intrados (130 ; 230 ; 330 ; 430) et la surface chanfreinée (136 ; 236 ; 336 ; 436).

2. Rotor à aubage intégral (111) selon la revendication 1, comprenant en outre des points tranchants (444) s'étendant axialement à partir de la surface de pointe d'aube (428) le long de l'axe longitudinal.
3. Rotor à aubage intégral (111) selon la revendication 1 ou 2, comprenant en outre un revêtement (246 ; 346 ; 446) disposé sur une partie de la surface de pointe d'aube (128 ; 228 ; 328 ; 428), dans lequel le revêtement (246 ; 346 ; 446) comporte des particules abrasives, les particules abrasives comportant au moins l'un parmi TiN, TiCN, TiAlN, Al₂O₃, des particules de carbure, du CBN et du diamant, et dans lequel les particules abrasives sont retenues dans un matériau de matrice.
4. Rotor à aubage intégral (111) selon la revendication 3 lorsqu'elle dépend de la revendication 2, dans lequel le revêtement (246 ; 346 ; 446) est disposé uniquement sur une partie de la surface de pointe d'aube (128 ; 228 ; 328 ; 428) qui comporte les points tranchants (444).
5. Rotor à aubage intégral (111) selon une quelconque revendication précédente, dans lequel le bord tranchant (134 ; 234 ; 334 ; 434) comporte une partie en saillie (342), dans lequel la partie en saillie s'étend à partir de l'intrados (130 ; 230 ; 330 ; 430) du corps d'aube (124 ; 324 ; 424).
6. Procédé de fabrication d'un rotor à aubage intégral (111), le procédé comprenant :
 la formation d'une pluralité de profils aérodynamiques d'un seul tenant avec un moyeu (112) pour former un composant unique, chacun de la pluralité de profils aérodynamiques ayant une surface de pointe opposée (128 ; 228 ; 328 ; 428) par rapport au moyeu s'étendant le long d'un axe longitudinal, dans lequel chacun de la pluralité de profils aérodynamiques définit un intrados (130 ; 230 ; 330 ; 430) et un extrados (132 ; 232 ; 332 ; 432) ; et
 la formation d'un bord tranchant (134 ; 234 ; 334 ; 434) entre la surface de pointe (128 ; 228 ; 328 ; 428) et l'intrados (130 ; 230 ; 330 ; 430) de chacun de la pluralité de profils aérodynamiques, dans lequel le bord tranchant est configuré pour abraiser une section d'étanchéité (116) d'un carter de moteur (110), dans lequel la formation d'un bord tranchant (134 ; 234 ; 334 ; 434) comporte l'usinage et/ou le forgeage d'une partie arquée (240) entre l'intrados (130 ; 230 ; 330 ; 430) et une surface (138 ; 238 ; 338 ; 438) ;

- 438), dans lequel la superficie est située sur la surface de pointe (128 ; 228 ; 328 ; 428) entre l'intrados et une surface chanfreinée (136 ; 236 ; 336 ; 436), et dans lequel la surface chanfreinée se trouve sur la surface de pointe entre l'intrados et l'extrados (132 ; 232 ; 332 ; 432) et s'effile vers le moyeu (112) dans une direction allant de l'intrados vers l'extrados. 5
7. Procédé selon la revendication 6, dans lequel la formation d'un bord tranchant (134 ; 234 ; 334 ; 434) comporte l'usinage et/ou le forgeage de la surface chanfreinée (136 ; 236 ; 336 ; 436) entre l'intrados (130 ; 230 ; 330 ; 430) et l'extrados (132 ; 232 ; 332 ; 432), dans lequel l'usinage et/ou le forgeage de la surface chanfreinée comporte l'effilement de la surface chanfreinée vers le moyeu (112) dans une direction allant de l'intrados vers l'extrados, dans lequel l'usinage de la surface chanfreinée comporte l'usinage de la surface chanfreinée sur la surface de pointe (128 ; 228 ; 328 ; 428). 10 15 20
8. Procédé selon la revendication 6 ou 7, dans lequel la formation d'un bord tranchant (134 ; 234 ; 334 ; 434) comporte l'usinage et/ou le forgeage d'une partie en saillie (342) s'étendant à partir de l'intrados (130 ; 230 ; 330 ; 430). 25
9. Procédé selon l'une quelconque des revendications 6 à 8, comprenant en outre la formation de points tranchants (444) dans la surface de la pointe (128 ; 228 ; 328 ; 428), dans lequel les points tranchants s'étendent axialement à partir de la surface de pointe le long de l'axe longitudinal. 30 35
10. Procédé selon l'une quelconque des revendications 6 à 9, comprenant en outre le revêtement d'une partie de la surface de pointe (128 ; 228 ; 328 ; 428) avec un matériau de revêtement (246 ; 346 ; 446) comportant des particules abrasives, les particules abrasives comprenant au moins l'un parmi TiN, TiCN, TiAlN, Al₂O₃, des particules de carbure, du CBN et du diamant, et dans lequel les particules abrasives sont retenues dans un matériau de matrice. 40 45
11. Moteur à turbine à gaz (100) comprenant :
- un carter (110) définissant un axe central ;
 - un revêtement abrasable (116) disposé radialement vers l'intérieur du carter comportant une couche de matériau de frottement (120) disposée sur un diamètre interne (122) du revêtement abrasable ;
 - un rotor à aubage intégral (111) selon l'une quelconque des revendications 1 à 5, ayant un moyeu (112) radialement vers l'intérieur du carter (110) et le revêtement abrasable (116) ; et 50 55

dans lequel la pluralité de corps d'aube (124 ; 324 ; 424) s'étendent radialement vers l'extérieur à partir du moyeu (112) pour une rotation autour de l'axe central, et le bord tranchant (134 ; 234 ; 334 ; 434) de chaque corps d'aube étant positionné à proximité d'un diamètre interne (121) de la couche de matériau de frottement (120) pour abraser la couche de matériau de frottement pendant le mouvement circconférentiel des bords tranchants lorsque les corps d'aube tournent autour de l'axe central.

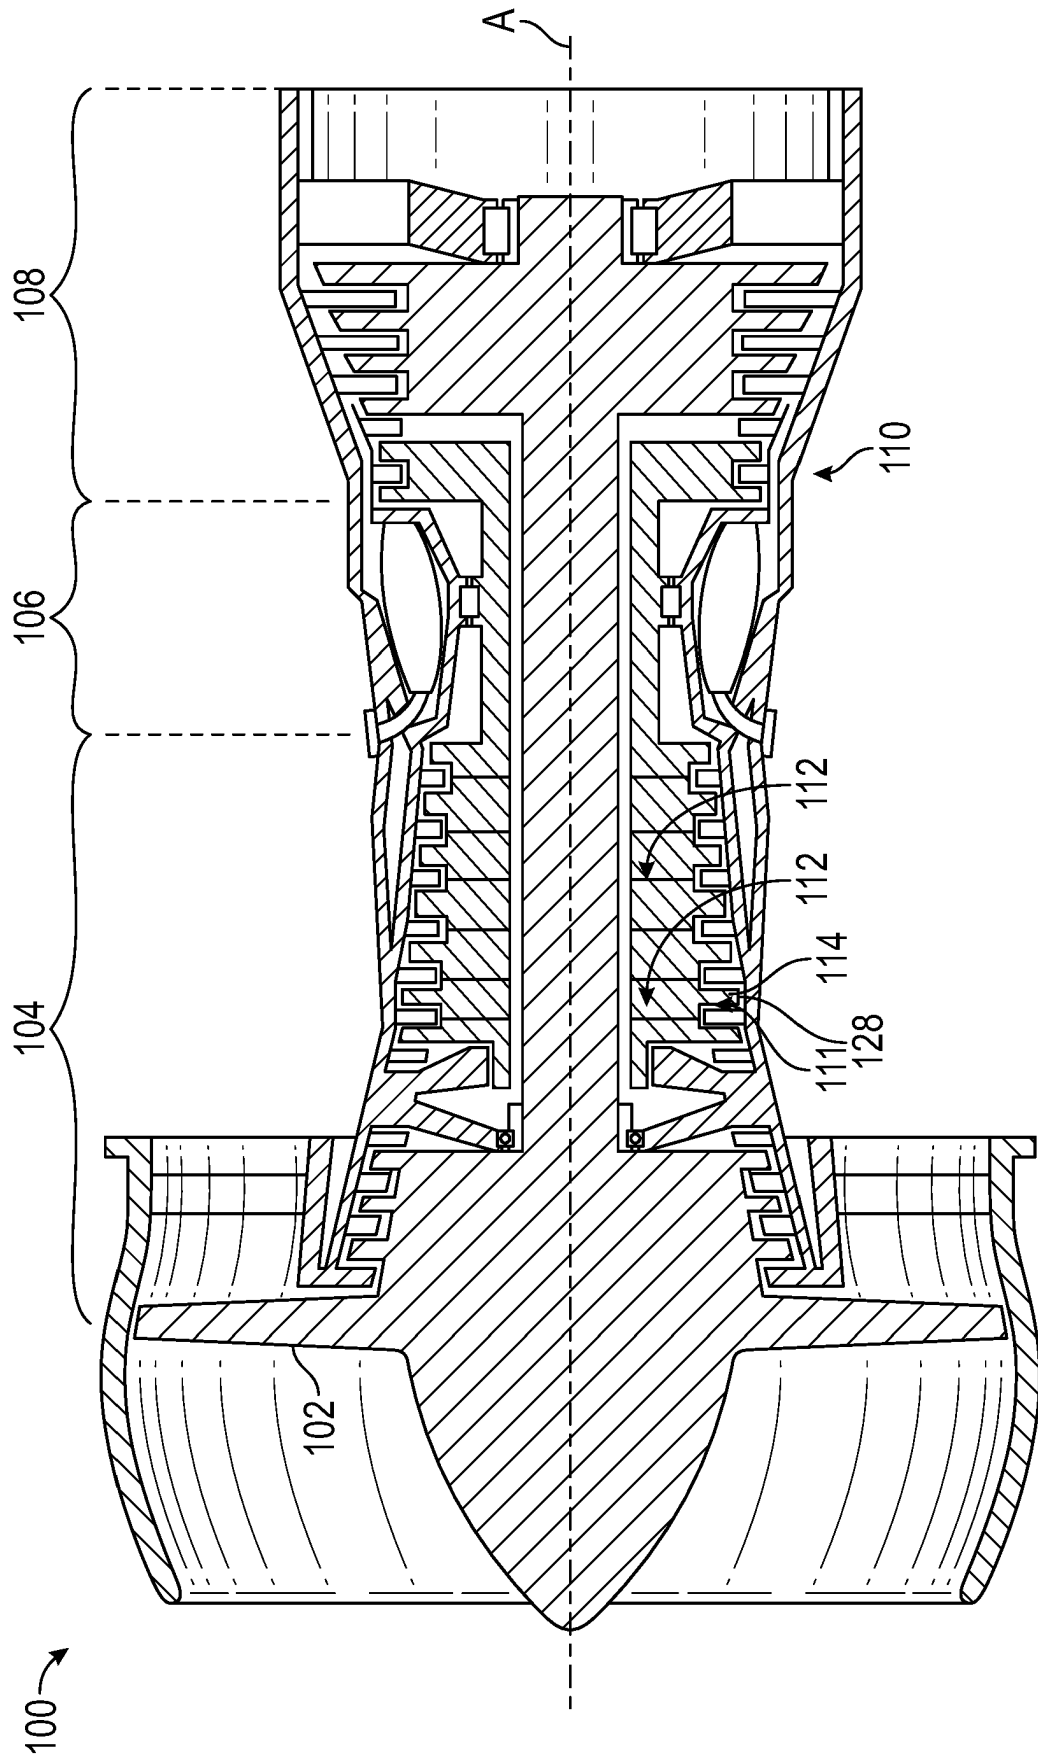


FIG. 1

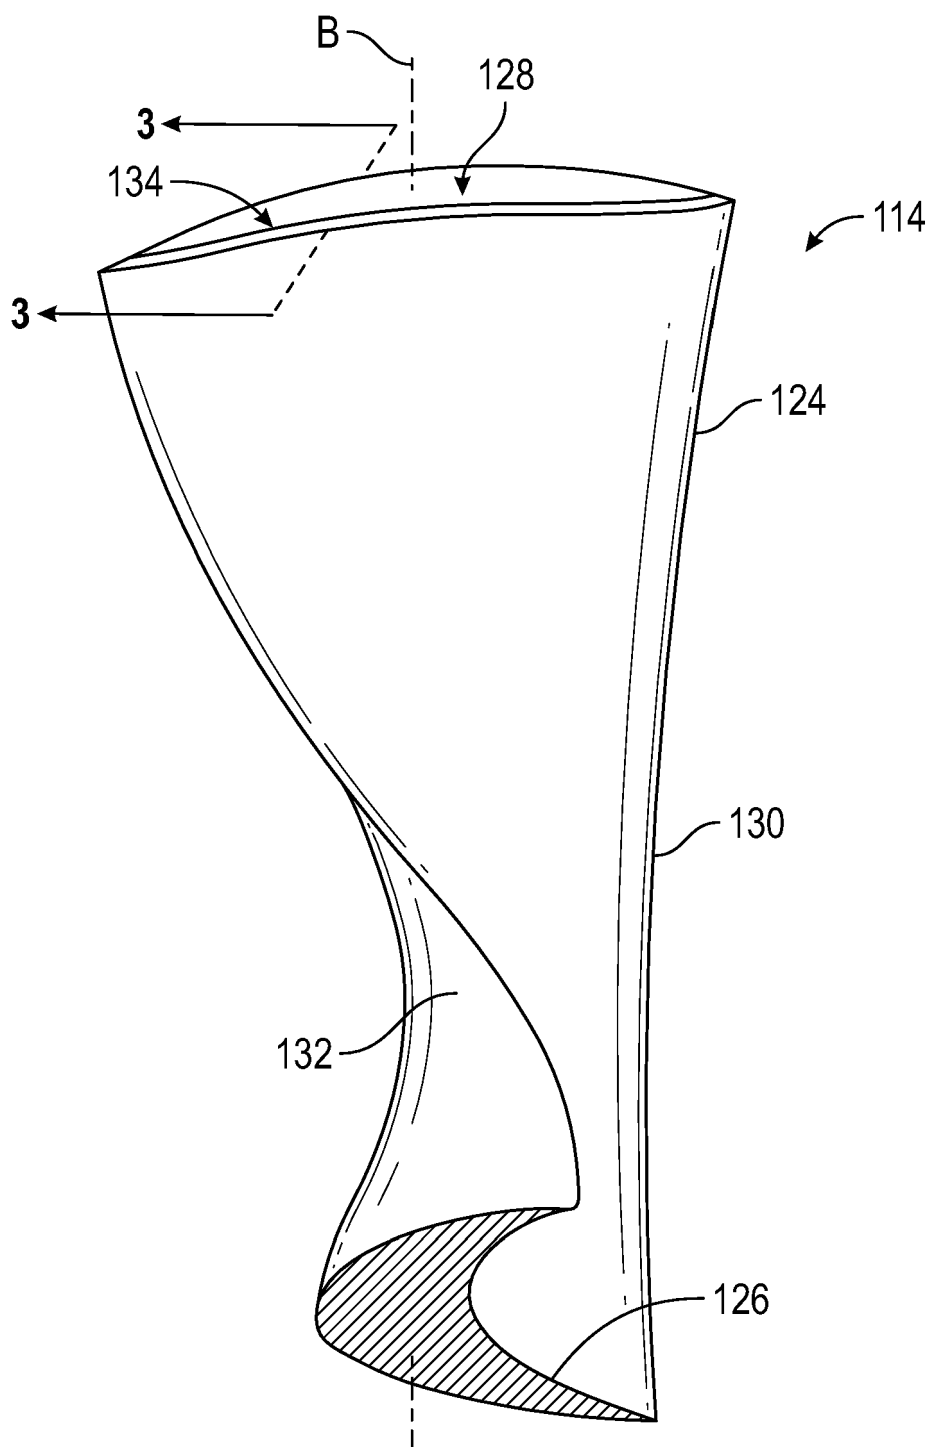


FIG. 2

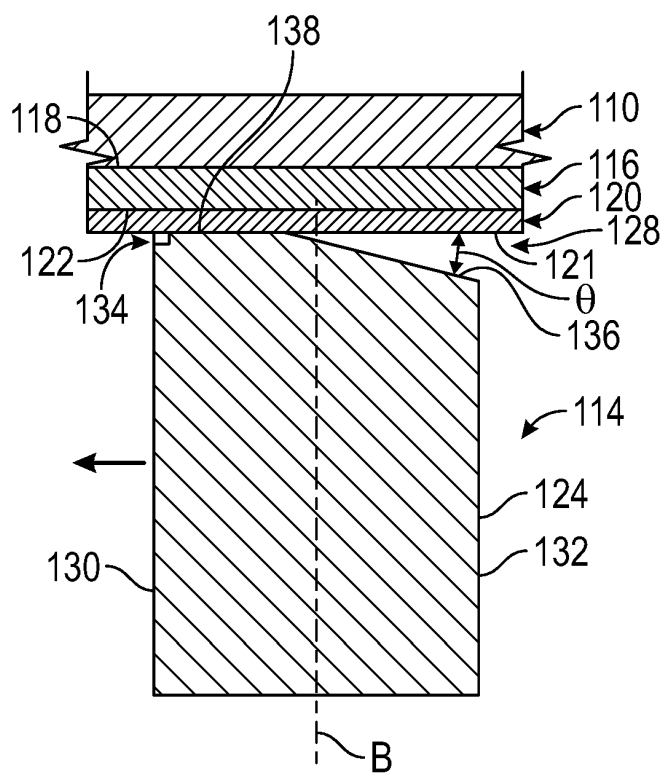


FIG. 3

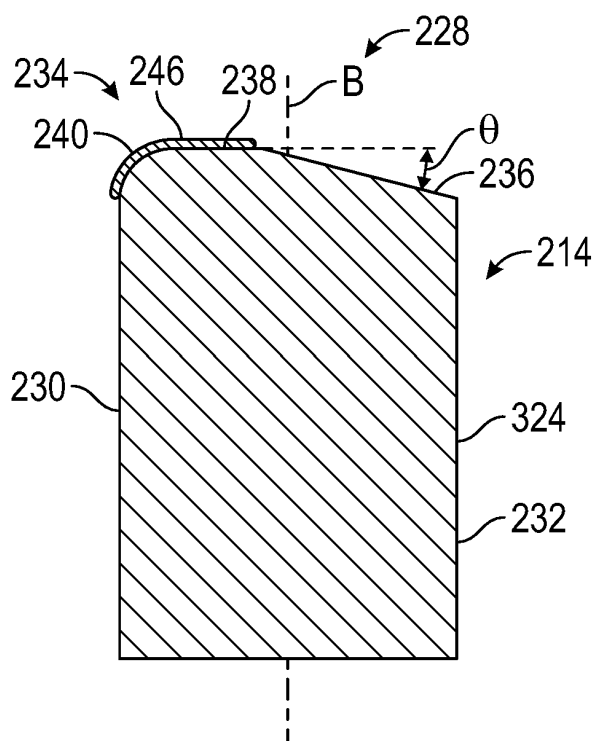


FIG. 4

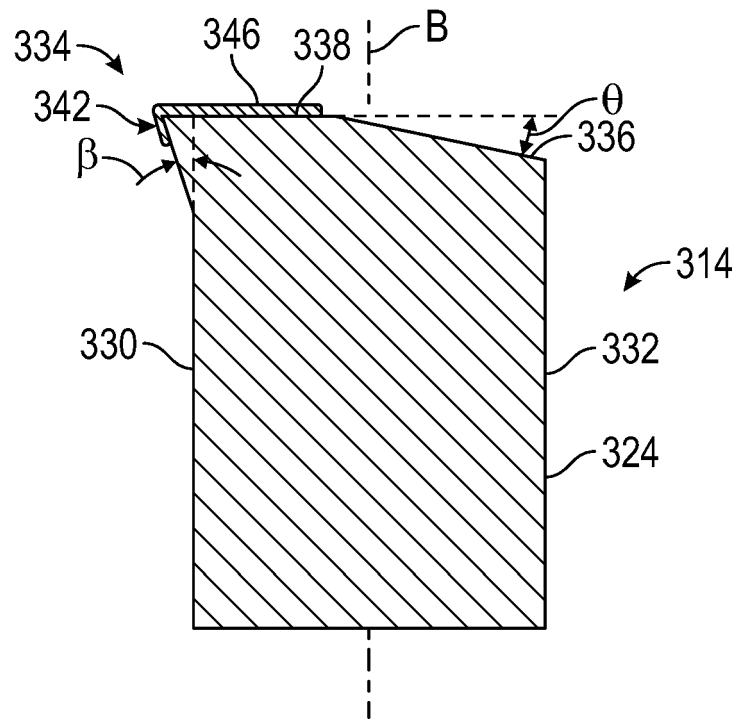


FIG. 5

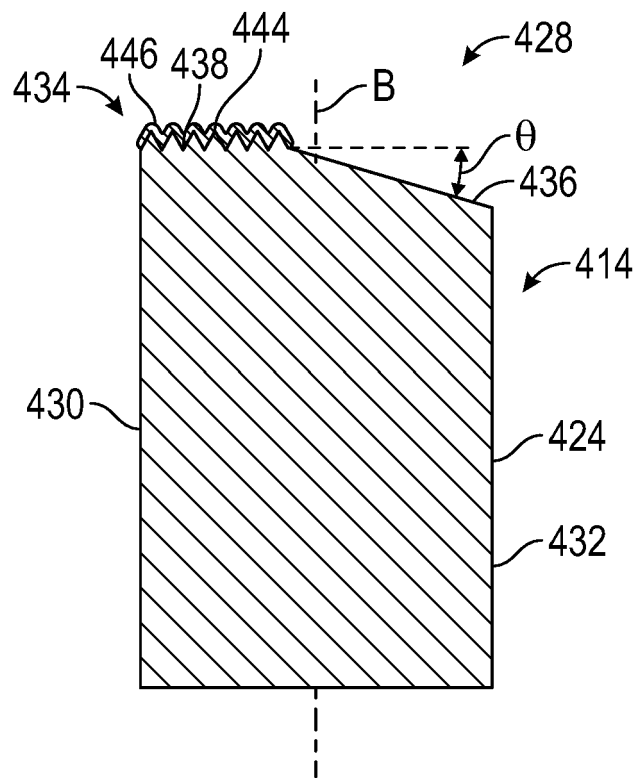


FIG. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20100329875 A1 [0005]
- EP 2952686 A1 [0006]
- US 20070077149 A1 [0007]
- EP 2309097 A1 [0008]