



- (51) **International Patent Classification:**
E21B 43/04 (2006.01) *E21B 34/06* (2006.01)
- (21) **International Application Number:**
PCT/US2014/050149
- (22) **International Filing Date:**
7 August 2014 (07.08.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/027,467 16 September 2013 (16.09.2013) US
- (71) **Applicant:** BAKER HUGHES INCORPORATED
[US/US]; P.O. Box 4740, Houston, TX 77210 (US).
- (72) **Inventors:** HAMMER, Aaron, C.; 2607 Lazybrook Dr.,
Houston, TX 77008 (US). SAMUELSON, Marc, N.;
13006 Taylorcrest Rd, Houston, TX 77079 (US).
- (74) **Agent:** DUPHORNE, Darin, H.; Intellectual Property
Counsel, Baker Hughes Incorporated, P.O. Box 4740,
Houston, TX 77210-4740 (US).
- (81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** SAND CONTROL CROSSOVER TOOL WITH MUD PULSE TELEMETRY POSITION

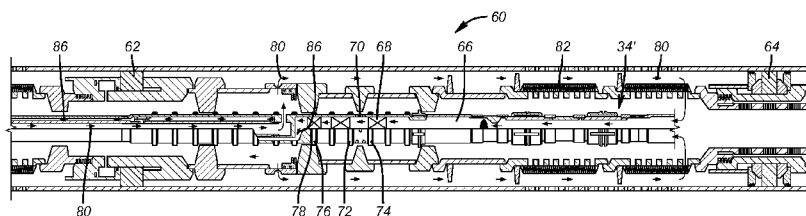


FIG. 13

(57) **Abstract:** A completion tool for gravel packing screens incorporates an added position to allow redirection of flow to a signal transmission tool at the needed flow rates to optimize signal to noise ratios by creation of a discrete flow path that channels the desired flow directly to the device and using the production tubing and upper annulus as the balance of the flow circuit. The Smart Collet® has a landing location for this position which is preferably between the circulation and reverse positions of the crossover tool. The wash pipe assembly can have a shifting tool that closes the sleeve over the gravel exit ports for the information transmittal such ports can thereafter remain closed because the gravel packing is complete but for the reversing out of excess gravel which happens above the gravel exit ports.



SAND CONTROL CROSSOVER TOOL WITH MUD PULSE TELEMETRY POSITION

FIELD OF THE INVENTION

[0001] The field of the invention is completions involving frac-packing or gravel packing using a crossover tool and wash pipe and more particularly to the addition of a new crossover position between circulation and reversing out that directs flow away from screens and through a return path through a mud pulse transmitter for low noise transmission of data to a surface location during the completion operation.

BACKGROUND OF THE INVENTION

[0002] Crossover tools are used in frac-pack and gravel packing operations. In a circulation position flow comes through the tool from the tubing and laterally exits to a screen annulus. The gravel is deposited in the screen annulus while returns come through the screens and up a wash pipe and into the crossover tool that allows the path of returning fluid to continue to the surface in the upper annulus above the production packer. The return path can be closed in a squeeze operation so that the carrier fluid goes right into the formation. Using a pickup force the crossover port can be lifted to allow excess gravel to be reversed out with annulus flow pushing the gravel to the surface through the tubing. These positions are described in detail in USP 8230924. Also relevant in the area of gravel packing crossover tools is USP 6464006.

[0003] Mud pulse telemetry has been used to transmit a variety of information to the surface. It can transmit information on the distribution of gravel in a screen annulus, the conditions of the drilling mud, movement of tools such as circulation valves or the placement of service tools to name a few examples. Some of these applications and others are discussed in the following references: US20070272404; USP 7168508; US20110241897; WO/2012/100259A2; USP 8164476; USP 5662170; US20120186874 and USP 7316272.

[0004] For mud pulse telemetry to provide useful signal to noise ratios there has to be a fairly unrestricted flow path regardless of the flow direction. The circulation position in existing crossovers has a fairly restricted flow path

in forward circulation leading to low signal to noise ratios and in that same crossover tool position with flow in the opposite direction the large flow area in the upper annulus will create the same low signal to noise ratios.

[0005] The present invention creates a new configuration in a crossover tool between the circulate and reverse out positions so that in the forward transmitting position the flow goes through the tubing and out of the frac port and directly back into the crossover tool upstream of the mud pulse tool before returning to the surface by emerging from the crossover tool and going up the upper annulus to the surface. Alternatively the fluid flow direction can be reversed. The Smart Collet® or similar device or pick-up distance can be used to define the data transmission position of the crossover tool between the circulation and the reverse position. The needed data can then be transmitted during the gravel packing operation in real time.

[0006] FIGS. 1-10 all labeled prior art and discussed in detail in USP 8230924 and are incorporated by reference herein as if fully set forth. FIGS. 11 and 12 show the existing outer assembly and inner service assembly that fits inside it, respectively. The component description of the known parts of the design will now be reviewed. The outer assembly **10** has an isolation packer **12** followed internally by a metering shoulder that is selectively engaged by the metering locator **16** that works in conjunction with the wash pipe valve **18** for its closure. The valve **18** is shown open in FIGS. 1-7 and closed in FIGS. 8-9. Gravel exit port **20** has an associated sliding sleeve **22** that is closed when the shifting tool **24** is moved past sliding sleeve **22**. The Smart Collet® profile **26** is selectively engaged by the Smart Collet® **28** to define a position of the crossover tool assembly **10**. Profiles **30** and **32** are used in the closing procedure for the wash pipe valve **18** as shown in FIGS. 6-8 and described in detail in USP 8230924. The inner assembly **34** further has a ball catcher **36** just below a frac port **38** that selectively aligns with the gravel exit ports **20** when collet **40** lands on shoulder **42**. Return ports **44** allow returns during circulation to reach the upper annulus as shown by arrows in FIG. 2. The major component of the known prior tool have now been briefly introduced and a discussion of all the positions of the tool will next be described.

[0007] In FIG. 1 the packer 12 is set at the desired location using the setting tool 46 by applying tubing pressure. The packer is tested by annulus pressure represented by arrows 48. When that packer test is completed the delivery of gravel begins in the FIG. 2 position. The delivered gravel is represented by arrow 50 is shown exiting the slanted ports 20 with arrow 52 and then the gravel remains on the outside of the screens that are not shown as part of the outer assembly. The carrier fluid then enters the inner assembly 34 and passes through the open valve 18 and through the crossover by bypassing the ball catcher 36 to enter the frac port 38 for an ultimate exit through ports 44 as shown by arrow 54 and passing through the packer 12 and into the upper annulus. FIG. 3 is the squeeze position at the location of the upper annulus. At this time the carrier fluid is forced under pressure to enter the formation for fracturing. In FIG. 4 the inner assembly 34 is picked up to bring ports 38 out of the outer assembly 10 so that reverse flow represented by arrow 58 enters ports 38 from the upper annulus to sweep away excess gravel up the production tubing as represented by arrow 60. The reversing continues as weight is set down on the inner assembly 34. The reversing flow is cut off by the downward movement in FIG. 5 followed by the picking up in FIG. 6 and the setting down in FIG. 7 acts to close the wash pipe valve 18. In FIG. 8 the inner assembly 34 is raised again and additional reversing out can take place just as in FIG. 4 with the difference being that the wash pipe valve 18 is now closed. The reversing can continue as weight is set down. The removal of the inner assembly also accomplishes engaging the closing sleeve with shifting tool 24 to close off the slanted gravel exit ports 20 as shown in FIG. 10 with the inner assembly 34 removed. These steps are fully discussed in greater detail in USP 8230924 and represent a background to the description of the present invention which creates a new position between FIGS. 2 and 4 for the purpose of data transmission to the surface with mud pulse telemetry equipment incorporated into the inner assembly 34 and configured to be in a discrete flow circuit in the transmitting position where flow goes to the mud pulse unit without making a trip through the gravel and the screens to enhance the signal to noise ratio of the data transmission. Those skilled in the art will better understand additional aspects of the invention from a review of the description of the preferred embodiment and the associated drawings while

recognizing that the full scope of the invention is to be found in the appended claims.

SUMMARY OF THE INVENTION

[0008] A completion tool for frac packing or gravel packing equipment incorporates an added position to allow redirection of flow to a signal transmission tool at the needed flow rates to optimize signal to noise ratios by creation of a discrete flow path that channels the desired flow directly to the device and using the production tubing and upper annulus or the formation as the balance of the flow circuit. The Smart Collet® has a landing location for this position which is preferably between the circulation and reverse positions of the crossover tool. The inner assembly can have a shifting tool that closes the sleeve over the gravel exit ports for the information transmittal such ports can thereafter remain closed because the gravel packing is complete but for the reversing out of excess gravel which happens above the gravel exit ports. Other orders for the timing of the transmission of data are contemplated.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a section of a prior art gravel packing assembly with the isolation packer set and being pressure tested;

[0010] FIG. 2 is the same view as FIG. 1 with the fluid or slurry being delivered through the tubing and returns coming up the crossover assembly;

[0011] FIG. 3 is the view of FIG. 2 with the return path up the crossover assembly closed so that carrier fluid for the gravel can be squeezed into the formation;

[0012] FIG. 4 is the reverse view allowing excess gravel to be removed with annulus flow;

[0013] FIGS. 5 is the reverse view allowing excess gravel to be removed with annulus flow while slacking off weight to a set-down position;

[0014] FIGS. 6-7 illustrate a movement sequence of the inner assembly designed to close the wash pipe valve;

[0015] FIG. 8 shows the reversing position with the wash pipe valve closed;

[0016] FIG. 9 shows the reversing position with the wash pipe valve closed and setting down weight on the inner assembly;

[0017] FIG. 10 is the view of FIG. 9 with the inner assembly removed and the gravel outlet ports closed;

[0018] FIG. 11 is a section view of the outer assembly of FIG. 1 shown above the screens;

[0019] FIG. 12 is the inner assembly for the outer assembly of FIG. 11;

[0020] FIG. 13 is a detailed view of a the outer and inner assemblies of the present invention shown in the circulation mode;

[0021] FIG. 14 is the view of FIG. 13 shifted to the data transmission mode with flow in the circulation direction; and

[0022] FIG. 15 is the view of FIG. 14 with the flow going in the opposite direction; and

[0023] FIG. 16 is a data transmitting flow regime with flow going into the formation.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0024] Referring to FIG. 13 the crossover **60** is shown in a single zone isolated between packers **62** and **64**. Those skilled in the art will appreciate that while a multi-zone completion is illustrated that a single zone completion is also contemplated. There are several differences in the equipment when comparing FIGS. 1-12 with FIGS. 13-15. The Inner service assembly **34'** has a return path **66** in which are located pressure and/or temperature sensors/transmitters **68** followed by a wall port or ports **70** that is located between seals **72** and **74** such that when those seals or an adjacent seal **76** are in a seal bore **78**, the circulating fluid represented by arrows **80** is isolated from ports **70** as is shown in FIG. 13. The gravel is deposited in the known way outside screens **82** and the returns come back through the inner string assembly **34'** through the return path **66**. Apart from the sensors/transmitters **68** there is a mud pulse unit **84** that takes flow through itself to operate in a known manner. Arrows **86** represent the return flow through the crossover to the upper annulus as previously described.

[0025] At the desired point of the installation sequence of the sand control completion, the inner string assembly **34'** is picked up so that Smart Collet **28'** lands on shoulder **88** as shown in FIG. 14. Openings **70** are now out of seal bore **78** so that clean fluid circulation represented by arrows **90** can exit through frac port **38'** and be redirected right into openings **70** as shown by

arrows **92**. Note that in FIG. 14 the sliding sleeve **22'** that closes the gravel ports **20'** is shown in the initial open position at the bottom of FIG. 14 and in the closed position for redirection of flow to openings **70** at the top of FIG. 14. A schematically illustrated shifting tool **92** can do the shifting to the closed position for the sleeve **22'** as by that time the gravel deposition step is completed and the ports **20'** can stay closed as the reversing out step previously described takes place above. Signal transmission can preferably occur before gravel deposition so as to minimize erosion of carryover gravel when reconfiguring the flow regime for data transmission. Arrows **94** illustrate the return of fluids to the upper annulus after passing through the crossover. The parts in FIG. 15 are in the same position as in FIG. 14 but the flow is in the reverse direction.

[0026] A variety of data can be sent such as set down weight on the outer assembly and local pressure readings in flow regimes that can be affected by pressure drop over a long distance in deep wells that can be over 7500 meters deep. Another piece of data can be pressure reduction rates after squeezing which give an accurate reading of the effectiveness of the fracturing during the squeeze step. Mud pulse communication can be in either direction and can be used to operate components in the completion assembly from the surface such as sleeve **22'** instead of using a shifting tool such as **92** or **24** in the tool of FIGS. 1-12.

[0027] One variation of the configuration in FIGS. 14 and 15 is that the sleeve **22'** does not need to be closed. If the gravel pack has concluded by the time the inner assembly **34'** has been lifted from the circulation position of FIG. 13 the path of least resistance for the flow represented by arrows **92** is for the flow to go into ports **70** rather than out the gravel exit ports **20'** where the flow will have to go through the gravel pack and the screens **82** to reach the same location that is reached with access through ports **70** in the FIG. 14 position. Significantly, the gravel-laden flow in FIG. 13 is isolated from the mud pulse unit **84** during the gravel deposition going on in the FIG. 13 position. The data communication mode can be an intermediate position between the circulation position of FIG. 13 and the reverse position shown in FIG. 4. The Smart Collet® is given a new landing location in FIG. 14 to identify this position. As a result the fluid circuit up to the mud pulse unit **84** is

one with minimal flow restrictions that ups the signal to noise ration. The reverse flow alternative in FIG. 15 is less preferred in that the flow area in the upper annulus is quite large and that can increase the noise to make getting the signal more difficult. Another alternative is to simply use the circulation flow scheme shown in FIG. 2 and add the mud pulse unit **84** in passage **66** as shown in FIGS. 13-15 and use the normal circulation flow during gravel deposition to transmit data to the surface. Of the alternatives discussed the flow orientation of FIG. 14 is preferred for optimal signal to noise ratios. The mud pulse unit **84** can store data for subsequent transmission when in transmission mode. More than one device can be deployed in the crossover to have the ability to transmit with opposed flow regimes in the same tool.

[0028] The invention is applicable in a broad range of downhole equipment not necessarily limited to completions such as fracturing or gravel packing. In more general terms, the invention envisions a tool with reconfigurable flow regimes through it where one is used to accomplish the intended function of the tool and another is used to send data preferably with mud pulse telemetry either before or after the use of the tool for its intended function. For space saving considerations and considerations of cost and complexity there can be a part overlap between the flow regimes. The telemetry flow regime can also be a one way path into the formation as opposed to a closed loop for circulation or reverse circulation. The change between flow regimes can occur using relative movement such as translation or rotation or combinations thereof as illustrated in the embodiment of the crossover tool described above where axial movement was used to reconfigure to the data sending flow regime with telemetry. Other ways can employ dropped objects on seats, remotely operated valves or sleeves powered in a variety of ways such as hydraulically or electrically, to name a few examples.

[0029] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below:


We claim:

1. A subterranean tool assembly, comprising:
a subterranean tool having at least a first and a second flow regime threrethrough;
said first flow regime enables said tool to accomplish a predetermined function at the subterranean location and said second flow regime allows data transmission with at least one data transmission device that is isolated from flow in said second flow regime when said first flow regime is in use by said tool.
2. The assembly of claim 1, wherein:
said first and second flow regimes are independent.
3. The assembly of claim 1, wherein:
said first and second flow regimes overlap at least in part.
4. The assembly of claim 3, wherein:
said tool is reconfigured between said flow regimes with axial relative movement.
5. The assembly of claim 1, wherein:
said tool is reconfigured between said flow regimes with relative movement in at least one direction.
6. The assembly of claim 1, wherein:
said tool is reconfigured between said flow regimes with applied pressure or valve operation.
7. The assembly of claim 4, wherein:
said tool comprises an inner assembly movable relatively to an outer assembly to define at least three flow regimes selectively obtained with axial relative movement between said inner and outer assemblies.
8. The assembly of claim 7, wherein:
end locations for said relative movement define two of said flow regimes and an intermediate position between said end locations defines said third flow regime.
9. The assembly of claim 8, wherein:
said second flow regime is enabled in said intermediate position.


10. The assembly of claim **8**, wherein:
- said outer assembly comprising at least one screen;
 - said inner assembly is relatively movable with respect to said outer assembly and further comprising a crossover tool for configuring the assembly in said first flow regime to at least deposit gravel in a screen annulus in a circulation position and pass carrier fluid through said screen to an upper annulus above a packer or squeeze fluid into a formation and in said third flow regime to a reverse position where said inner assembly is raised with respect to said outer assembly to expose a gravel exit port to allow flow going down the upper annulus to enter said gravel exit port and carry off excess gravel to a surface location through a string supporting said inner assembly;
 - said data transmission device positioned in said crossover in said second flow regime in a manner that isolates said data transmission device from flowing gravel transported in said carrier fluid in said first or third said flow regimes.
11. The assembly of claim **10**, wherein:
- said data transmission device has return flow through a passage therein that is aligned with a passage in said crossover that receives carrier fluid that has passed through said screen.
12. The assembly of claim **10**, wherein:
- said crossover is movable to a data transmission second flow regime such that fluid that enters an inlet to said crossover can exit through a gravel exit port in said crossover and into a return portion of said crossover through a wall port on said inner assembly that is opened to said gravel exit port by movement to said second flow regime.
13. The assembly of claim **12**, wherein:
- said wall port is obstructed by placement in a seal bore in said circulation position.
14. The assembly of claim **13**, wherein:
- said data transmission position using said second flow regime is defined by a locating device.
15. The assembly of claim **10**, wherein:
- said data transmission device comprises a mud pulse transmitter.

16. The assembly of claim **10**, wherein:
said data transmission device functions when said second flow regime is selected with flow going through said crossover in opposed directions or in a single direction.
17. The assembly of claim **10**, wherein:
said outer assembly having a gravel exit port that stays open when said data transmission device sends data.
18. The assembly of claim **12**, wherein:
said outer assembly having a gravel exit port that is closed when said data transmission device sends data.
19. The assembly of claim **13**, wherein:
said wall port is opened by removal from said seal bore for communication with at least a portion of fluid exiting said gravel exit port.
20. The assembly of claim **10**, wherein:
said data transmission device sends data regarding the set down weight of said inner assembly on said outer assembly.
21. The assembly of claim **10**, wherein:
said data transmission device sends data regarding pressure decline rates in a surrounding formation after applied pressure to the formation is removed.
22. The assembly of claim **10**, wherein:
said data transmission device sends data regarding pressure measured adjacent said crossover with fluid moving through said crossover.
23. The assembly of claim **10**, wherein:
said data transmission device stores data for subsequent transmission.
24. The assembly of claim **10**, wherein:
said data transmission device operates a component on said inner or outer assemblies.
25. The assembly of claim **10**, further comprising:
said at least one data transmission device further comprises a plurality of data transmission devices with opposed orientations provided to accommodate opposed flow regimes for the same or different purposes.


+

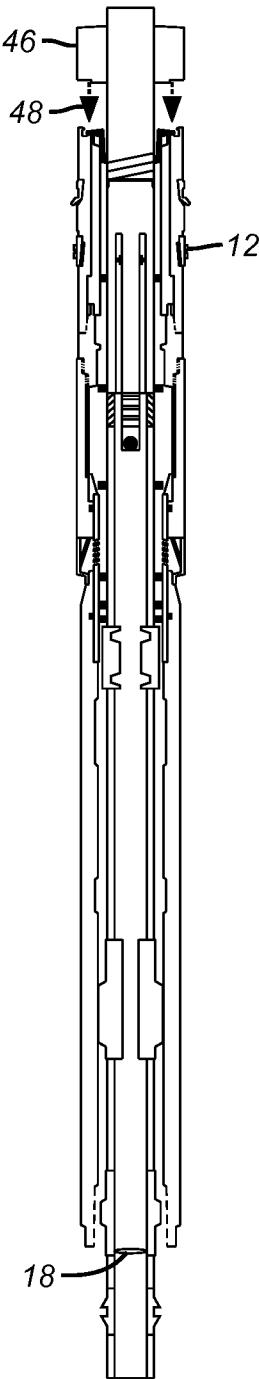


(PRIOR ART)
FIG. 1

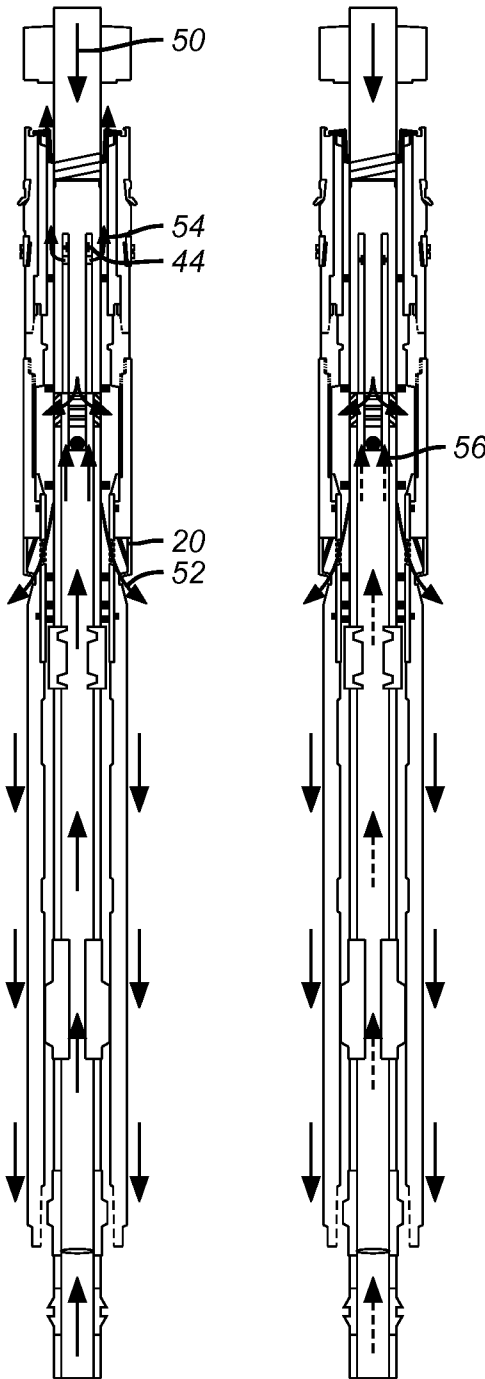

(PRIOR ART)
FIG. 2

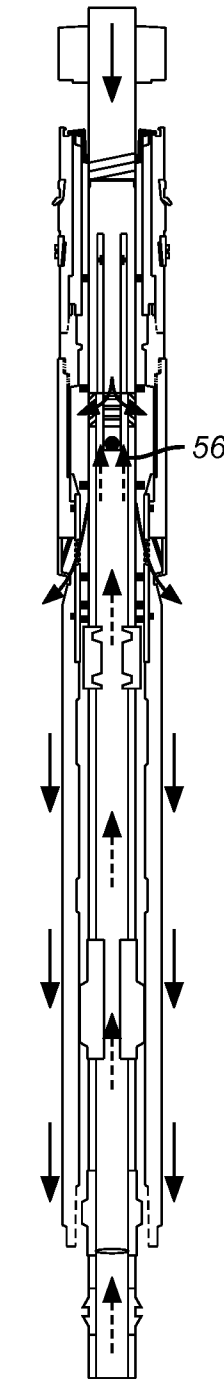

(PRIOR ART)
FIG. 3




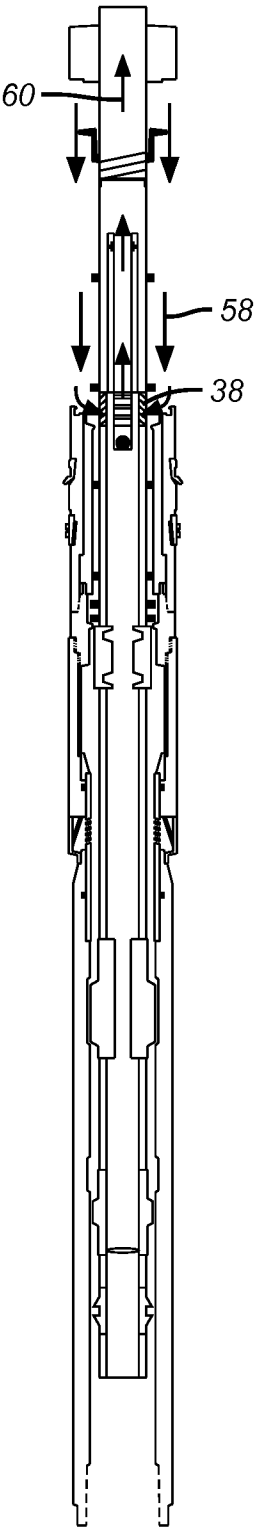


(PRIOR ART)
FIG. 4

+

+

2/5

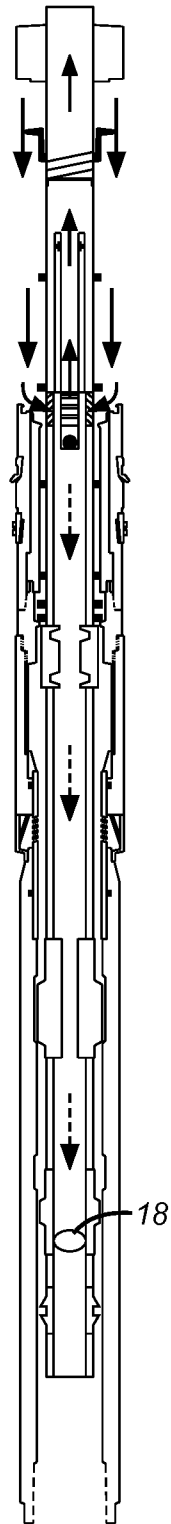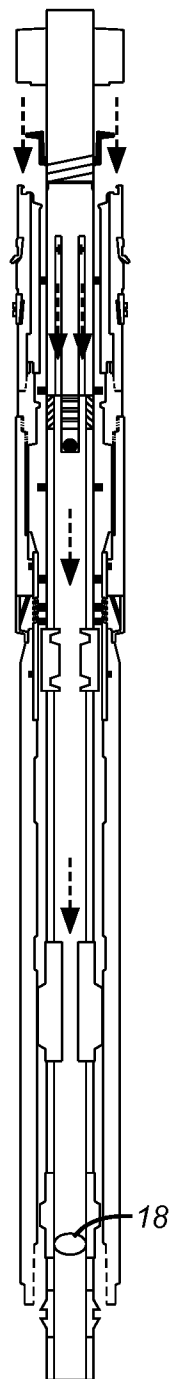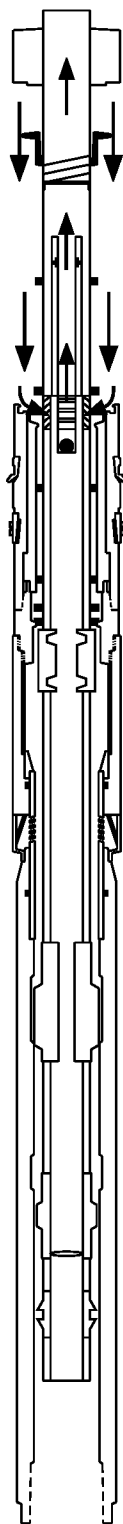

(PRIOR ART)
FIG. 5


(PRIOR ART)
FIG. 6

(PRIOR ART)
FIG. 7

(PRIOR ART)
FIG. 8

+

+

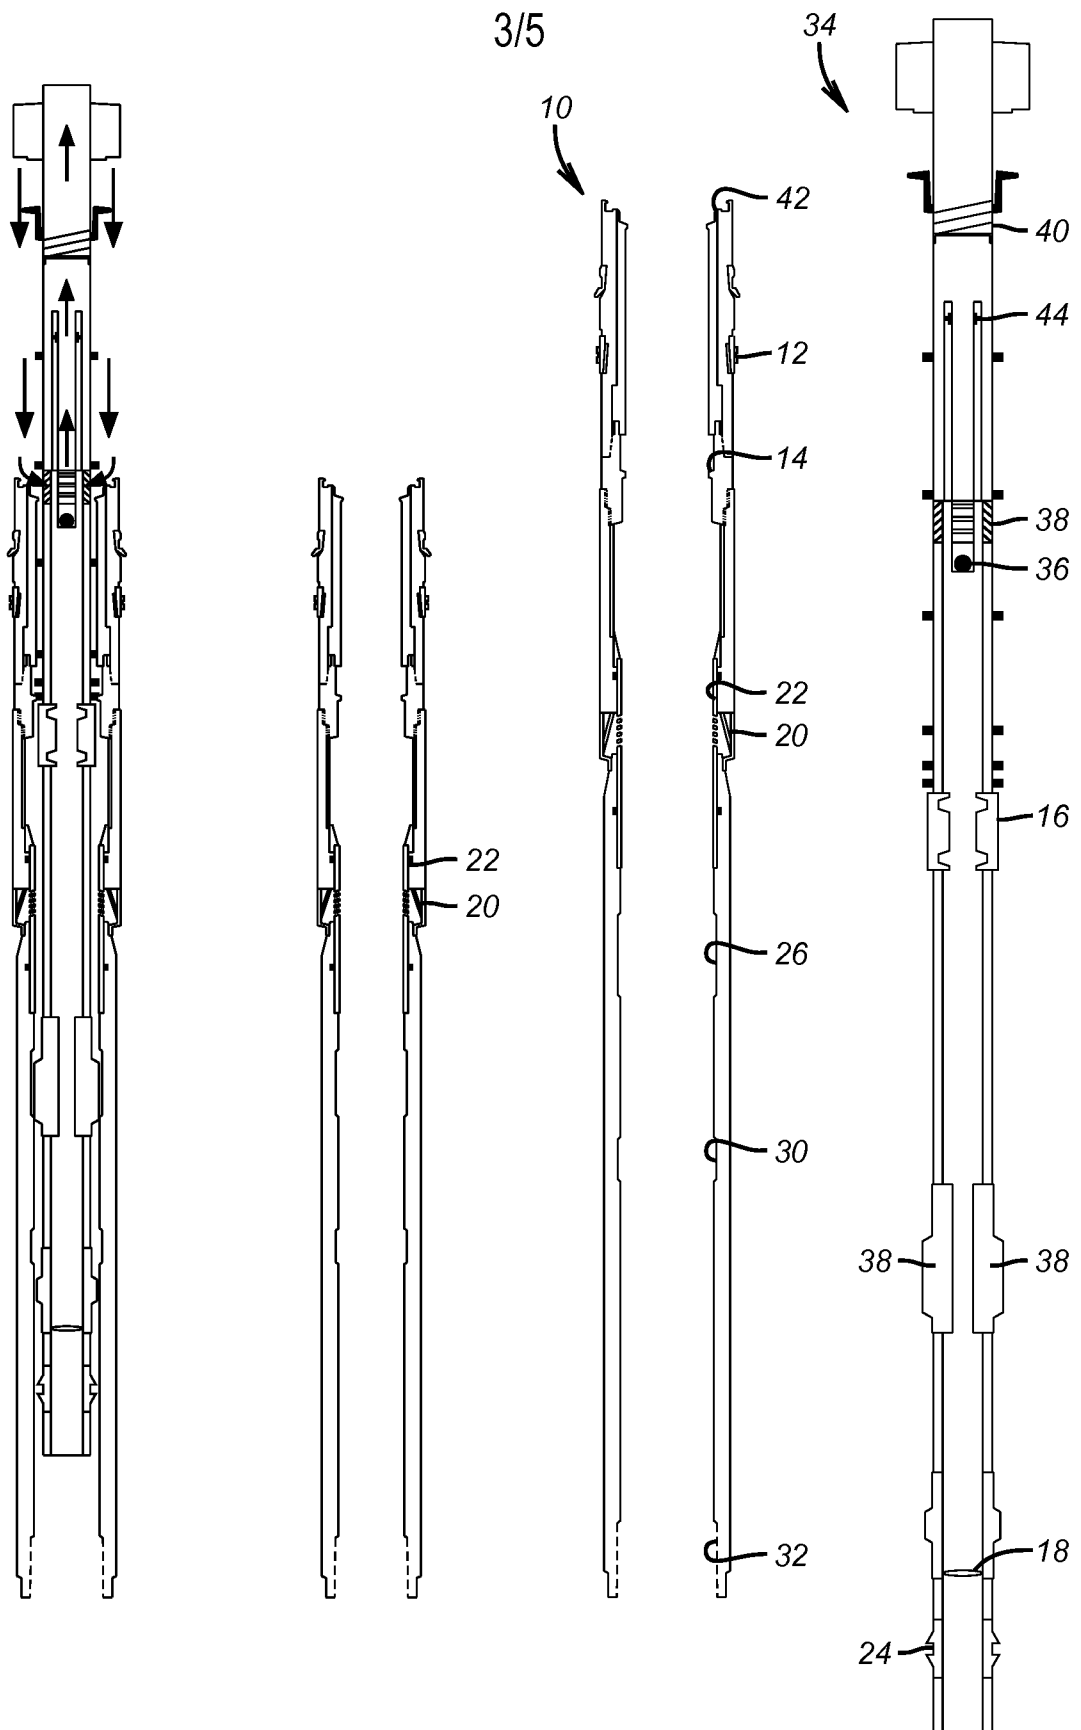

(PRIOR ART)
FIG. 9

(PRIOR ART)
FIG. 10

(PRIOR ART)
FIG. 11

(PRIOR ART)
FIG. 12

+

+

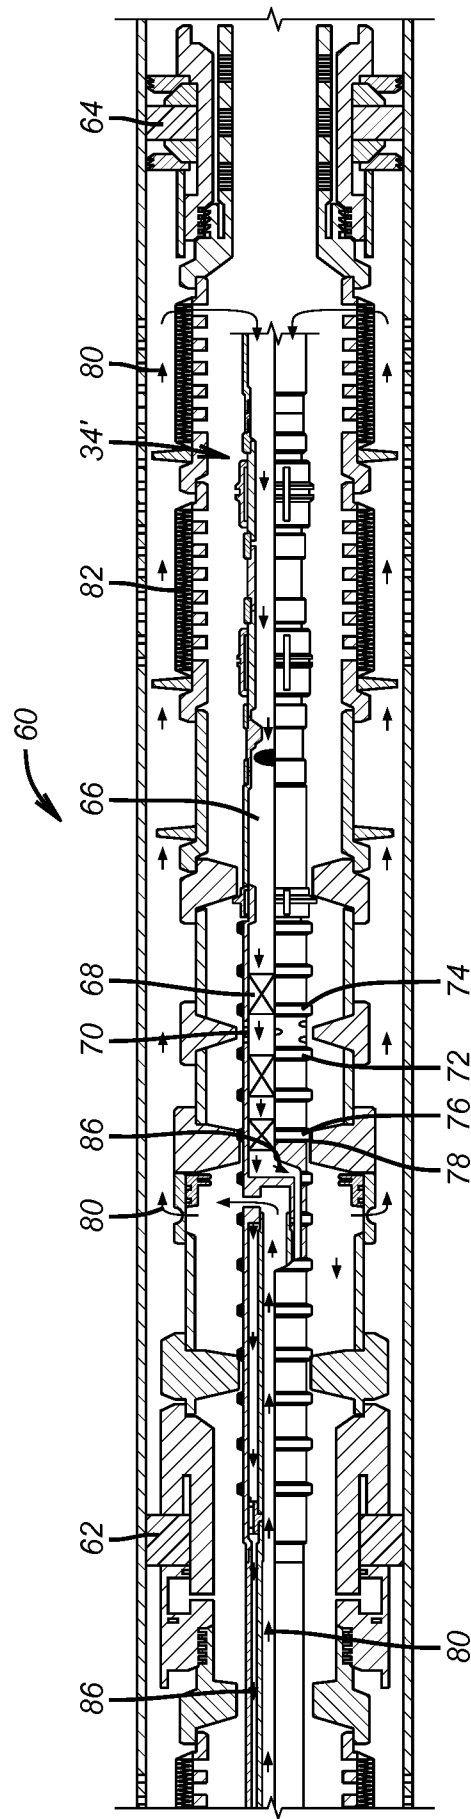


FIG. 13

4/5

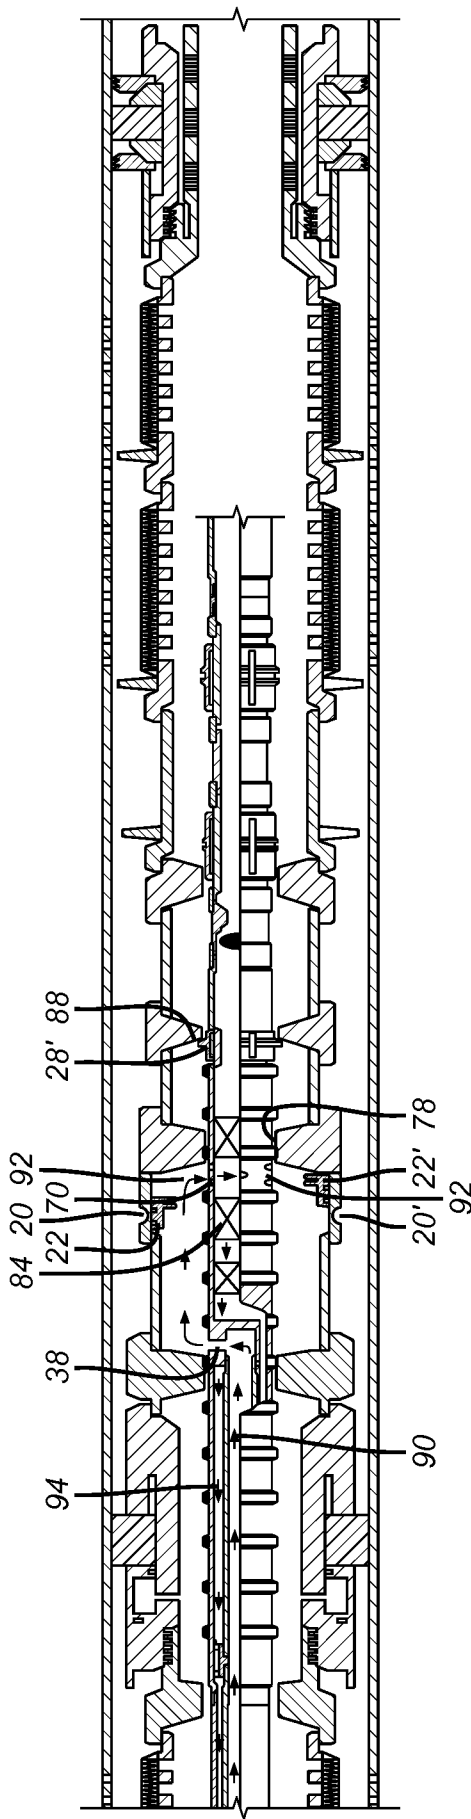


FIG. 14

+

+

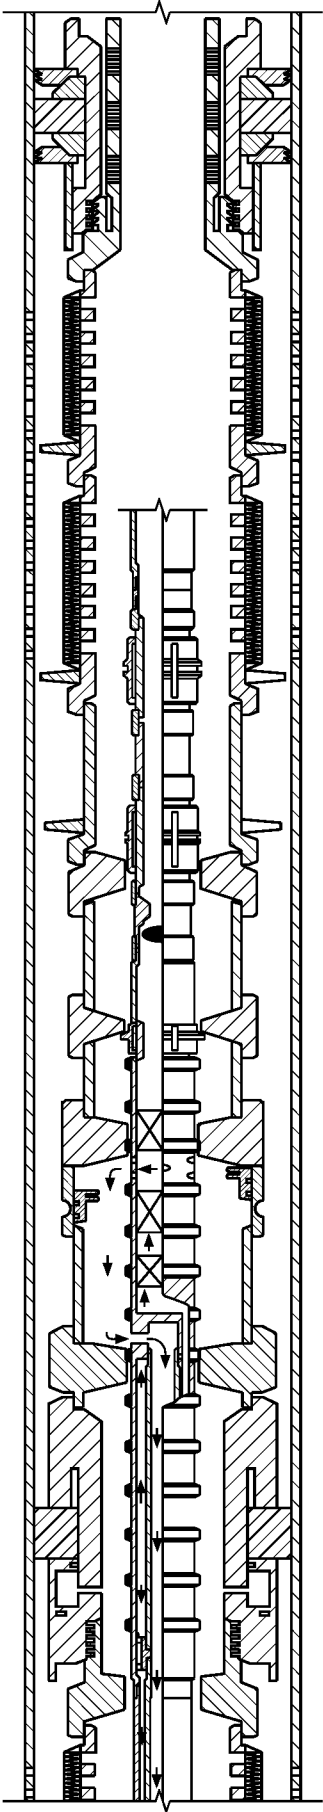


FIG. 15

5/5

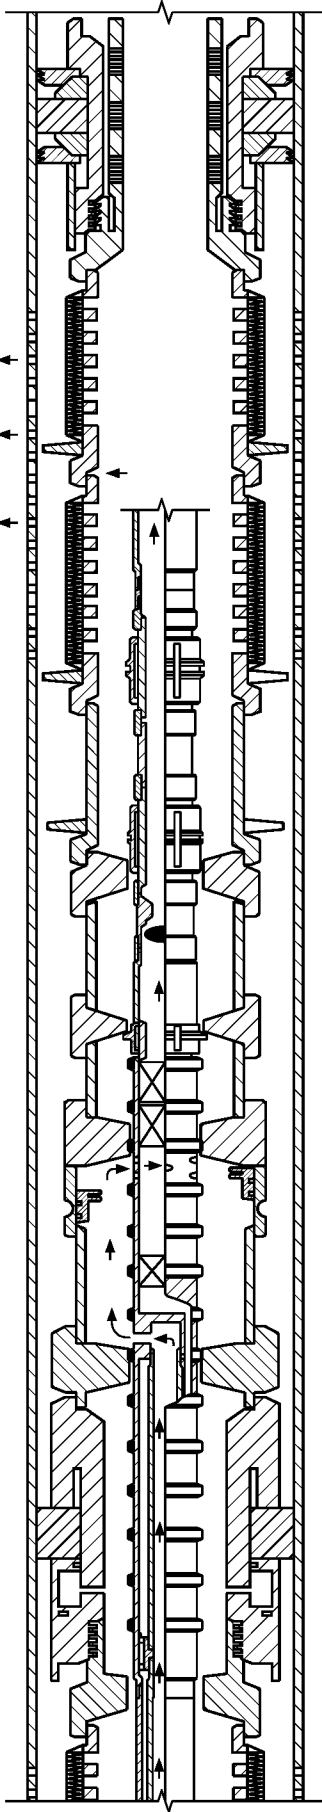


FIG. 16

+

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/050149**A. CLASSIFICATION OF SUBJECT MATTER****E21B 43/04(2006.01)i, E21B 34/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 43/04; E21B 43/12; E21B 47/00; E21B 34/06; E21B 33/12

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: gravel packing, shift, flow regime, isolate, data transmission device

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010-0163235 A1 (MOOTOO et al.) 01 July 2010 See paragraphs [0030]-[0047] and figures 2-5.	1-25
A	US 2012-0024523 A1 (AYAN et al.) 02 February 2012 See paragraphs [0017]-[0029], claims 1-2 and figures 2A-4B.	1-25
A	US 2011-0005746 A1 (SCHMITT et al.) 13 January 2011 See paragraphs [0046]-[0076] and figures 1-5.	1-25
A	US 2012-0043079 A1 (WASSOUF et al.) 23 February 2012 See paragraphs [0025]-[0118] and figures 1-6.	1-25
A	US 2013-0112423 A1 (DYKSTRA et al.) 09 May 2013 See paragraphs [0027]-[0066] and figures 1-6.	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 November 2014 (21.11.2014)

Date of mailing of the international search report

21 November 2014 (21.11.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Hun Gil

Telephone No. +82-42-481-8525



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/050149

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0163235 A1	01/07/2010	US 8496055 B2 WO 2010-077729 A1	30/07/2013 08/07/2010
US 2012-0024523 A1	02/02/2012	AU 2009-236392 A1 AU 2009-236392 B2 CA 2721589 A1 EP 2279330 A1 MX 2010011431 A RU 2010146165 A RU 2457326 C2 US 2009-0255669 A1 US 8297354 B2 US 8720552 B2 WO 2009-129128 A1	22/10/2009 06/12/2012 22/10/2009 02/02/2011 25/11/2010 20/05/2012 27/07/2012 15/10/2009 30/10/2012 13/05/2014 22/10/2009
US 2011-0005746 A1	13/01/2011	CA 2635101 A1 EP 2025863 A1 US 2009-0038793 A1 US 7798214 B2 US 8056623 B2	09/02/2009 18/02/2009 12/02/2009 21/09/2010 15/11/2011
US 2012-0043079 A1	23/02/2012	CA 2808301 A1 EP 2598713 A1 WO 2012-027283 A1	01/03/2012 05/06/2013 01/03/2012
US 2013-0112423 A1	09/05/2013	CA 2851559 A1 CN 103917741 A US 2014-0110128 A1 WO 2013-070181 A1	16/05/2013 09/07/2014 24/04/2014 16/05/2013