



(51) International Patent Classification:

A61M 39/28 (2006.01)

(21) International Application Number:

PCT/US2020/018856

(22) International Filing Date:

19 February 2020 (19.02.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/808,119 20 February 2019 (20.02.2019) US
16/793,948 18 February 2020 (18.02.2020) US

(71) Applicant: **BECTON, DICKINSON AND COMPANY**
[US/US]; 1 Becton Drive, Franklin Lakes, New Jersey
07417 (US).

(72) Inventor: **SPATARO, Joseph**; 7701 S. Summerhill Circle,
Cottonwood Heights, Utah 84121 (US).

(74) Agent: **METCALF, Craig**; Kirton McConkie, 36 S. State
Street, Suite 1900, Salt Lake City, Utah 84111 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))

Published:

— with international search report (Art. 21(3))

(54) Title: EXTENSION TUBE CLAMP PROVIDING POSITIVE DISPLACEMENT

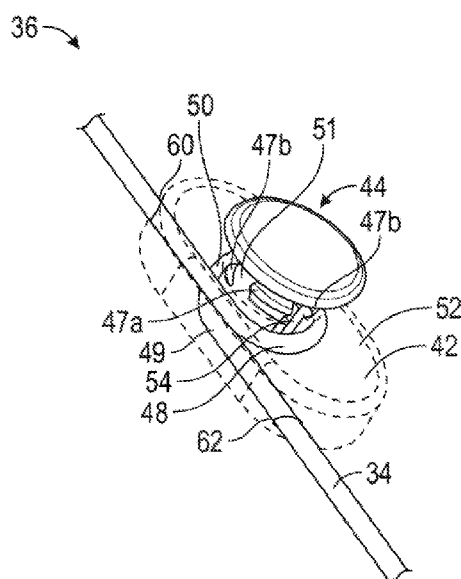


FIG. 5A

(57) Abstract: An extension set may include a clamp, which may include a housing and an actuator. The actuator may be movable between a raised position and a depressed position with respect to the housing. The actuator may include a bump profile. The extension set may include an extension tube, which may be disposed within the housing. The extension tube may include a loop. In response to movement of the actuator between the raised position and the depressed position with respect to the housing, the bump profile may progressively clamp the extension tube along the loop. The loop may facilitate an increased fluid volume flowing distally towards a catheter in response to actuating the clamp.



EXTENSION TUBE CLAMP PROVIDING POSITIVE DISPLACEMENT

BACKGROUND

[0001] Catheters are commonly used for a variety of infusion therapies. For example, catheters may be used for infusing fluids, such as normal saline solution, various medicaments, and total parenteral nutrition, into a patient. Catheters may also be used for withdrawing blood from the patient.

[0002] A common type of catheter is an over-the-needle peripheral IV catheter (“PIVC”). As its name implies, the over-the-needle PIVC may be mounted over an introducer needle having a sharp distal tip. The sharp distal tip may be used to pierce skin and the vasculature of the patient. Insertion of the PIVC into the vasculature may follow the piercing of the vasculature by the needle. The needle and the PIVC are generally inserted at a shallow angle through the skin into the vasculature of the patient with a bevel of the needle facing away from the skin of the patient. Once placement of the needle within the vasculature has been confirmed, the clinician may temporarily occlude flow in the vasculature and withdraw the needle, leaving the PIVC in place for future blood withdrawal and/or fluid infusion.

[0003] A needleless connector may be used to connect the PIVC with a medical device for fluid administration or blood withdrawal. The medical device may include a transfusion bag, syringe, or the like. Currently, many needleless connectors reflux, meaning they draw blood and fluid from the vasculature into the catheter upon disconnection of the medical device from the needleless connector. This connector-driven reflux is not desirable due to the increased potential for reduced PIVC dwell times, which may result from clotting and occlusion within the PIVC.

Systems and methods described in the present disclosure can mitigate and/or overcome these drawbacks.

[0004] The subject matter claimed herein is not limited to embodiments that solve any disadvantages or that operate only in environments such as those described above. Rather, this background is only provided to illustrate one example technology area where some implementations described herein may be practiced.

SUMMARY

[0005] In some embodiments, an extension set may include a clamp, which may include a housing and an actuator. In some embodiments, the actuator may be movable between a raised position and a depressed position with respect to the housing. In some embodiments, the actuator may include a bump profile. In some embodiments, the extension set may include an extension tube, which may be disposed within the housing. In some embodiments, the extension tube may include a loop.

[0006] In some embodiments, in response to movement of the actuator between the raised position and the depressed position with respect to the housing, the bump profile may progressively clamp the extension tube along the loop. In some embodiments, the loop may facilitate an increased fluid volume flowing distally towards a catheter in response to movement of the actuator to the depressed position.

[0007] In some embodiments, in response to movement of the actuator between the raised position and the depressed position with respect to the housing, the bump profile may contact a distal portion of the loop prior to contacting a proximal portion of the loop. In some embodiments,

the bump profile may be configured to force fluid disposed within the loop distally in response to movement of the actuator from the raised position to the depressed position.

[0008] In some embodiments, the housing may include one or more protrusions. In some embodiments, the actuator may include one or more grooves. In some embodiments, the protrusions may be disposed within the grooves to orient the actuator within the housing. In some embodiments, the protrusions and the grooves may prevent the actuator from rotating with respect to the housing.

[0009] In some embodiments, the actuator may include a head, which may be disposed outside the housing. In some embodiments, the head may contact an outer surface of the housing in response to movement of the actuator to the depressed position. In some embodiments, the head of the actuator may be disposed proximate a body of the actuator. In some embodiments, a diameter of the head may be greater than a diameter of the body. In some embodiments, the body may include the bump profile.

[0010] In some embodiments, the housing may include a distal opening and a proximal opening. In some embodiments, the extension tube may extend through the distal opening and the proximal opening. In some embodiments, the loop may be disposed between the distal opening and the proximal opening. In some embodiments, an interior of the housing may include one or more support elements, which may be configured to contact the extension tube to support the extension tube and maintain the loop in a loop configuration.

[0011] In some embodiments, the extension set may include a needleless connector coupled to the extension tube. In some embodiments, a catheter system may include the extension set and a catheter assembly. In some embodiments, the catheter assembly may include a catheter adapter

and a catheter extending distally from the catheter adapter. In some embodiments, the extension tube may be coupled to the catheter adapter.

[0012] In some embodiments, a method of clamping the extension tube may include placing a first digit of a hand of a user on the actuator. In some embodiments, the first digit of the hand of the user may include a thumb. In some embodiments, the method may include placing a second digit and a third digit of the hand of the user on a side of the housing opposite the actuator and the first digit. In some embodiments, the method may include depressing the actuator with the first digit to move the actuator to the depressed position. In some embodiments, in response to depression of the actuator with the first digit, the bump profile may progressively clamp the extension tube along the loop.

[0013] The object and advantages of the embodiments will be realized and achieved at least by the elements, features, and combinations particularly pointed out in the claims. It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are not restrictive of the invention, as claimed.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0014] Example embodiments will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

[0015] Figure 1A is a side view of a prior art clamp, illustrating the prior art clamp in an unactuated position, according to some embodiments;

[0016] Figure 1B is another side view of the prior art clamp of Figure 1A, illustrating the prior art clamp in an actuated position, according to some embodiments;

[0017] Figure 2 is an upper perspective view of an example catheter system, according to some embodiments;

[0018] Figure 3A is an upper perspective view of an example clamp of the catheter system of Figure 2, illustrating an example actuator of the clamp in a raised position, according to some embodiments;

[0019] Figure 3B is an upper perspective view of the clamp of Figure 3A, illustrating the actuator in a depressed position, according to some embodiments;

[0020] Figure 4A is a side view of the actuator of the clamp of Figure 3A, according to some embodiments;

[0021] Figure 4B is an opposite side view of the actuator of the clamp of Figure 3A, according to some embodiments;

[0022] Figure 5A is an enlarged view of the clamp of Figure 3A, illustrating the actuator in the raised position, according to some embodiments;

[0023] Figure 5B is a top view of the clamp of Figure 3A, illustrating the actuator in the depressed position and an example head of the actuator removed for illustration purposes, according to some embodiments;

[0024] Figure 6A is a partial cutaway view of the clamp of Figure 3A, illustrating the actuator in the raised position, according to some embodiments;

[0025] Figure 6B is another partial cutaway view of the clamp of Figure 3A, illustrating the clamp in a partially depressed position, according to some embodiments;

[0026] Figure 6C is another partial cutaway view of the clamp of Figure 3A, illustrating the clamp in the depressed position, according to some embodiments;

[0027] Figure 6D is another partial cutaway view of the clamp of Figure 3A, illustrating the clamp in the depressed position, according to some embodiments; and

[0028] Figure 7 is an upper perspective view of an example extension set that includes the clamp of Figure 3A, according to some embodiments.

DESCRIPTION OF EMBODIMENTS

[0029] Referring now to Figures 1A-1B, a prior art clamp 10 is illustrated. An extension tube 12 may extend from a PIVC (not illustrated in Figures 1A-1B) and through the prior art clamp 10. The extension tube 12 may be connected and proximal to the PIVC. The prior art clamp 10 attempts to overcome connector-driven reflux by distally displacing fluid along a given length of the extension tube 12 during clamping of the extension tube 12. In further detail, in response to the clinician actuating the prior art clamp 10, the prior art clamp 10 acts to squeeze fluid out of the extension tube 12 in the vicinity of the prior art clamp 10, resulting in some clamp-driven positive displacement or net positive output of fluid from the PIVC. However, the clamp-driven positive displacement may be relatively small.

[0030] Referring now to Figure 2, an example catheter system 14 is illustrated, according to some embodiments. In some embodiments, the catheter system 14 may include a catheter assembly 16. In some embodiments, the catheter assembly 16 may include a catheter adapter 18 and a catheter 20 extending distally from the catheter adapter 18. In some embodiments, the catheter adapter 18 may include a side port 22 in fluid communication with the lumen of the catheter adapter 18. In some embodiments, the catheter adapter 18 may include a proximal end 23, a distal end 24, and a lumen extending there between. In some embodiments, the catheter 20 may include a PIVC.

[0031] In some embodiments, the catheter assembly 16 may be removably coupled to a needle assembly, which may include a needle hub 26 and an introducer needle 28. In some embodiments, the introducer needle 28 may include a sharp distal tip 30. In some embodiments, a proximal end of the introducer needle 28 may be secured within the needle hub 26. In some embodiments, the introducer needle 28 may extend through the catheter 20 when the catheter assembly 16 is in an insertion position ready for insertion into vasculature of a patient, as illustrated, for example, in Figure 2. In some embodiments, in response to the introducer needle 28 being inserted into the vasculature of the patient, flashback of blood may flow through the sharp distal tip 30 of the introducer needle 28 and may be visible to a clinician between the introducer needle 28 and the catheter 20 and/or at another location within the catheter assembly 16.

[0032] In some embodiments, in response to confirmation via the blood flashback that the catheter 20 is positioned within vasculature of the patient, the needle assembly may be removed from the catheter assembly 16. In some embodiments, when the needle assembly is coupled to the catheter assembly 16, as illustrated, for example, in Figure 2, the introducer needle 28 of the needle assembly may extend through a septum disposed within the lumen of the catheter adapter 18.

[0033] In some embodiments, the catheter system 14 may include an extension set 32, which may include an extension tube 34 and a clamp 36. In some embodiments, a distal end of the extension tube 34 may be integrated with the catheter adapter 18, as illustrated, for example, in Figure 2. For example, the extension tube 34 may be integrated with the side port 24 of the catheter adapter 18. In some embodiments, the extension tube 34 may be removably coupled to the catheter adapter 18, as illustrated, for example, in Figure 7. In some embodiments, the clamp 36 may selectively close off the extension tube 16 to prevent blood or another fluid from flowing through the extension tube 16.

[0034] In some embodiments, the extension set 32 may include an adapter 38 coupled to a proximal end of the extension tube 34. In some embodiments, the adapter 38 may include a Y-adapter or another suitable connector. In some embodiments, a needleless connector 40 may be coupled to the adapter 38. In some embodiments, the adapter 38 and/or the needleless connector 40 may be used to connect the catheter 20 with a medical device for fluid administration or blood withdrawal. The medical device may include a transfusion bag, syringe, or any other suitable medical device. In some instances, the needleless connector 40 may reflux, meaning the needleless connector 40 may draw blood and fluid from the vasculature into the catheter 20 upon disconnection of the medical device from the needleless connector 40. This connector-driven reflux may not be desirable due to the increased potential for reduced catheter dwell times, which may result from clotting and occlusion within the catheter system 14.

[0035] In some embodiments, the clamp 36 may facilitate positive displacement or net positive output of fluid from the PIVC. In some embodiments, in response to actuation of the clamp 36, fluid may be pushed out of the clamp 36 and into the catheter assembly 16, which may be connected to the extension tube 34 and disposed distal to the clamp 36. The fluid that is pushed out of the clamp 36 may be pushed into the catheter 20 and into the patient.

[0036] In some embodiments, the clamp 36 may include a housing 42 and an actuator 44. In some embodiments, the housing 42 may be constructed of multiple pieces, which may be coupled together, or the housing 42 may be monolithically formed as a single unit. Similarly, in some embodiments, the actuator 44 may be constructed of multiple pieces, which may be coupled together, or the actuator 44 may be monolithically formed as a single unit. It is understood that the size, shape, and configuration of the housing 42 and/or the actuator 44 may vary.

[0037] Referring now to Figures 3A-3B, in some embodiments, the actuator 44 may be movable between a raised position and a depressed position with respect to the housing 42. The raised position is illustrated in Figure 3A, according to some embodiments. The depressed position is illustrated in Figure 3B, according to some embodiments. In some embodiments, the clinician may move the actuator 44 to the depressed position to actuate the clamp 36. In some embodiments, the actuator 44 may include a head 45, which may be disposed outside the housing 42. In some embodiments, the head 45 may contact an outer surface of the housing 42 when the actuator 44 is in the depressed position. In some embodiments, the head 45 may not contact the outer surface of the housing 42 when the actuator 44 is in the depressed position.

[0038] In some embodiments, a method of clamping the extension tube 34 may include placing a first digit of a hand of a user on the actuator 44, as illustrated, for example, in Figures 3A-3B. In some embodiments, the first digit of the hand of the user may include a thumb. In some embodiments, the method may include placing a second digit and a third digit of the hand of the user on a side of the housing 42 opposite the actuator 44 and the first digit as illustrated, for example, in Figures 3A-3B. In some embodiments, the method may include pinching the clamp to depress the actuator 44 and move the actuator 44 to the depressed position. In some embodiments, in response to depression of the actuator 44 with the first digit, the bump profile may progressively clamp the extension tube 34 along the loop.

[0039] Referring now to Figures 4A-4B, in some embodiments, the actuator 44 may include a bump profile 46. In some embodiments, the head 45 of the actuator 44 may be disposed proximate a body 58 of the actuator 44. In some embodiments, a diameter of the head 45 may be greater than a diameter of the body 58. In some embodiments, the body 58 may include the bump profile 46. In some embodiments, the bump profile 46 may include one or more ridges 47. For example, the

bump profile 46 may include a first ridge 47a and a second ridge 47b (which may be referred to in the present disclosure as “ridges 47”). In some embodiments, the one or more ridges 47 may form a spiral or corkscrew shape on the body 58. In some embodiments, the bump profile 46 may include one continuous ridge 47, which may form the spiral or corkscrew shape on the body 58.

[0040] In some embodiments, the spiral may include a curve that turns around an axis at a constant distance from the axis while moving parallel to the axis. In some embodiments, the curve may turn around the axis at a constant angle such that a pitch of the spiral, or the height of the spiral along one complete turn of the spiral, would be constant. In some embodiments, the curve may turn around the axis at a variable angle such that the pitch of the spiral would be variable. In some embodiments, the curve of the spiral may be mathematically optimized based on characteristics of a loop of the extension tube 34, such as a pitch of the loop.

[0041] Referring now to Figure 5A-5C, in some embodiments, the extension tube 34 of the extension set 32 may include the loop 48. In some embodiments, in response to movement of the actuator 44 between the raised position and the depressed position with respect to the housing 42, the bump profile 46 may progressively clamp the extension tube 34 along the loop 48. In some embodiments, the loop 48 may facilitate an increased fluid volume flowing distally from the clamp 36 towards the catheter 20 in response to actuating the clamp 36.

[0042] In some embodiments, in response to movement of the actuator 44 between the raised position and the depressed position with respect to the housing 42, the bump profile 46 may contact a distal portion 50 of the loop 48 prior to contacting a proximal portion 52 of the loop 48. In some embodiments, an overlap portion 49 of the 48 may be disposed between the distal portion 50 and the proximal portion 52. In some embodiments, the bump profile 46 may be configured to force fluid disposed within the loop 48 distally in response to movement of the actuator 44 from the

raised position to the depressed position. In some embodiments, the first ridge 47a may be spaced apart from the second ridge 47b to form a gap 51 that may be aligned with the overlap portion 49.

[0043] In some embodiments, the housing 42 may include one or more protrusions 54. In some embodiments, the actuator 44 may include one or more grooves 56. In some embodiments, the protrusions 54 may be disposed within the grooves 56 to orient the actuator 44 within the housing 42. In some embodiments, the protrusions 54 and the grooves 56 may prevent the actuator 44 from rotating with respect to the housing 42. In some embodiments, the housing 42 may not include the protrusions 54 and/or the actuator 44 may not include the grooves 56. In these and other embodiments, the first ridge 47a and the second ridge 47b may be connected or continuous.

[0044] In some embodiments, the housing 42 may include a distal opening 60 and/or a proximal opening 62. In some embodiments, the extension tube 34 may extend through the distal opening 60 and/or the proximal opening 62. In some embodiments, the loop 48 may be disposed between the distal opening 60 and the proximal opening 62.

[0045] Referring now to Figures 6A-6D, in some embodiments, an interior of the housing 42 may include one or more support elements 64, which may be configured to contact the extension tube 34 to support the extension tube 34 and maintain the loop 48 in a loop configuration. In some embodiments, the support elements 64 may include grooves and/or protrusions.

[0046] Figure 6A is a partial cutaway view of the clamp 36, illustrating the actuator 44 in the raised position, according to some embodiments. In some embodiments, when the actuator 44 is in the raised position, the one or more ridges 47 may not contact and/or pinch the extension tube 34. In some embodiments, when the actuator 44 is in the raised position, the one or more ridges 47 may not contact and/or clamp the loop 48. In some embodiments, when the actuator 44 is in the raised position, the one or more ridges 47 may not contact and/or clamp the distal portion 50 and

the proximal portion 52. In some embodiments, in response to a portion of the extension tube 34 being clamped or pinched, fluid may be prevented from flowing through the portion.

[0047] Figure 6B is another partial cutaway view of the clamp 36, illustrating the clamp 36 in a partially depressed position, according to some embodiments. In some embodiments, when the actuator 44 is in the raised position, one or more of the ridges 47 may clamp the distal portion 50 but not the proximal portion 52. Figure 6C is another partial cutaway view of the clamp 36, illustrating the clamp in the depressed position, according to some embodiments. In some embodiments, when the clamp 36 is in the depressed position, both the distal portion 50 and the proximal portion 52 may be clamped by the one or more ridges 47. Thus, Figures 6A-6C illustrate how the bump profile 46 may progressively clamp the extension tube 34 along the loop 48, according to some embodiments.

[0048] Referring now to Figure 6D, another partial cutaway view of the clamp 36 in the depressed position is illustrated, according to some embodiments. In some embodiments, in response to the actuator 44 moving from the raised position to the depressed position, an area of contact between the ridges 47 and the extension tube 34 may rotate around a circumference of the actuator 44. In these embodiments, in response to the actuator 44 moving from the raised position to the depressed position, the area of contact between the ridges 47 and the extension tube 34 may not increase in size, which may reduce an input force necessary to close the clamp 36.

[0049] In these and other embodiments, as illustrated in Figure 6D, in response to the actuator 44 moving from the raised position to the depressed position, a portion of the one or more ridges 47, such as a portion of the second ridge 47b, may move past the distal portion 50 and no longer contact and/or clamp the distal portion 50. In some embodiments, a portion of the one or more ridges 47 in contact with the extension tube 34 may move past the extension tube 34 to no longer

contact and/or clamp the extension tube 34 in response to movement of the actuator 44 from the raised position to the depressed position. In some embodiments, the one or more ridges 47 may form the spiral to progressively clamp and/or move past the extension tube 34.

[0050] Figure 7 is an upper perspective view of an example extension set 66 that includes the clamp 36, according to some embodiments. In some embodiments, a distal end 68 of the extension tube 34 may be coupled to the side port 22 (illustrated, for example, in Figure 2) via a connector 70. In some embodiments, the connector 70 may include a luer adapter, such as, for example, a slip or thread male or female luer adapter. In some embodiments, the connector 70 may include a non-luer adapter. In some embodiments, the distal end 68 of the extension tube 34 may be integrated with the connector 70.

[0051] All examples and conditional language recited herein are intended for pedagogical objects to aid the reader in understanding the invention and the concepts contributed by the inventor to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions. Although embodiments of the present inventions have been described in detail, it should be understood that the various changes, substitutions, and alterations could be made hereto without departing from the spirit and scope of the invention.

CLAIMS

1. An extension set, comprising:
a clamp, comprising:
a housing; and
an actuator movable between a raised position and a depressed position with respect to the housing, wherein the actuator comprises a bump profile; and
an extension tube disposed within the housing, wherein the extension tube comprises a loop, wherein in response to movement of the actuator between the raised position and the depressed position with respect to the housing, the bump profile progressively clamps the extension tube along the loop.
2. The extension set of claim 1, wherein the bump profile is configured to force fluid disposed within the loop distally in response to movement of the actuator from the raised position to the depressed position.
3. The extension set of claim 1, wherein in response to movement of the actuator between the raised position and the depressed position with respect to the housing, the bump profile contacts a distal portion of the loop prior to contacting a proximal portion of the loop.
4. The extension set of claim 1, wherein the housing comprises a protrusion, wherein the actuator comprises a groove, wherein the protrusion is disposed within the groove to orient the actuator within the housing.
5. The extension set of claim 1, wherein the actuator comprises a head disposed outside the housing, wherein the head contacts an outer surface of the housing in response to movement of the actuator to the depressed position.

6. The extension set of claim 5, wherein the head of the actuator is disposed proximate a body of the actuator, wherein a diameter of the head is greater than a diameter of the body, wherein the bump profile is disposed on the body.
7. The extension set of claim 1, wherein the housing comprises a distal opening and a proximal opening, wherein the extension tube extends through the distal opening and the proximal opening, wherein the loop is disposed within the housing between the distal opening and the proximal opening.
8. The clamp of assembly of claim 1, wherein an interior of the housing comprises a support element configured to contact the extension tube to support the extension tube and maintain the loop in a loop configuration.
9. The extension set of claim 1, further comprising a needleless connector coupled to the extension tube.
10. A catheter system, comprising:
 - a catheter assembly, comprising:
 - a catheter adapter; and
 - a catheter extending distally from the catheter adapter;
 - a clamp, comprising:
 - a housing;
 - an actuator movable between a raised position and a depressed position with respect to the housing, wherein the actuator comprises a bump profile; and
 - an extension tube coupled to the catheter adapter, wherein the extension tube comprises a loop, wherein in response to movement of the actuator between the raised position and the

depressed position with respect to the housing, the bump profile progressively clamps the extension tube along the loop.

11. The extension set of claim 10, wherein the bump profile is configured to force fluid disposed within the loop distally in response to movement of the actuator from the raised position to the depressed position.

12. The extension set of claim 10, wherein in response to movement of the actuator between the raised position and the depressed position with respect to the housing, the bump profile contacts a distal portion of the loop prior to contacting a proximal portion of the loop.

13. The extension set of claim 10, wherein the housing comprises a protrusion, wherein the actuator comprises a groove, wherein the protrusion is disposed within the groove to orient the actuator within the housing.

14. The extension set of claim 10, wherein the actuator comprises a head disposed outside the housing, wherein the head contacts an outer surface of the housing in response to movement of the actuator to the depressed position.

15. The extension set of claim 14, wherein the head of the actuator is disposed proximate a body of the actuator, wherein a diameter of the head is greater than a diameter of the body, wherein the bump profile is disposed on the body.

16. The extension set of claim 10, wherein the housing comprises a distal opening and a proximal opening, wherein the extension tube extends through the distal opening and the proximal opening, wherein the loop is disposed within the housing between the distal opening and the proximal opening.

17. The clamp of assembly 1, wherein an interior of the housing comprises a support element configured to contact the extension tube to support the extension tube and maintain the loop in a loop configuration.

18. A method of clamping an extension tube, comprising:

placing a first digit of a hand of a user on an actuator of a clamp of a extension set, wherein the first digit includes a thumb, wherein the extension set comprises:

a clamp, comprising:

a housing; and

the actuator movable between a raised position and a depressed position with respect to the housing, wherein the actuator comprises a bump profile;

an extension tube comprising a loop;

placing a third digit and a fourth digit of the hand of the user on a side of the housing opposite the actuator; and

depressing the actuator with the first digit to move the actuator to a depressed position with respect to the housing, wherein in response to depressing the actuator with the first digit, the bump profile progressively clamps the extension tube along the loop.

19. The method of claim 18, wherein the bump profile is configured to force fluid disposed within the loop distally in response to depression of the actuator.

20. The method of claim 18, wherein in response to movement of the actuator between the raised position and the depressed position with respect to the housing, the bump profile contacts a distal portion of the loop prior to contacting a proximal portion of the loop.

1/8

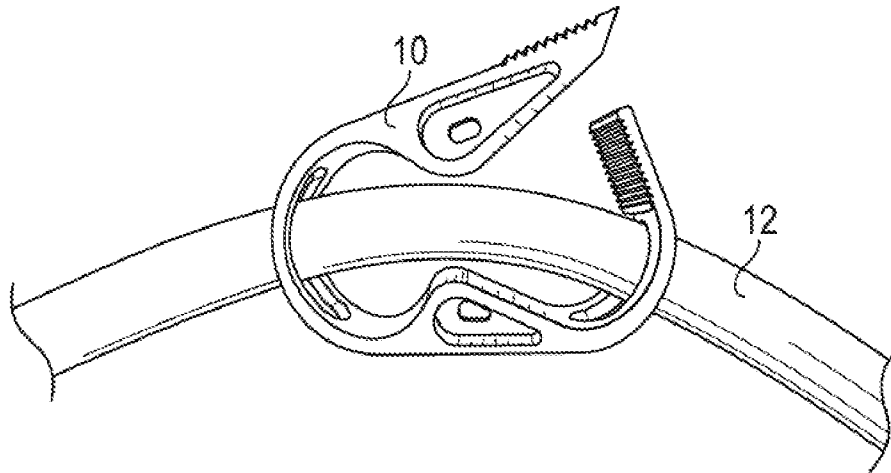


FIG. 1A
(Prior Art)

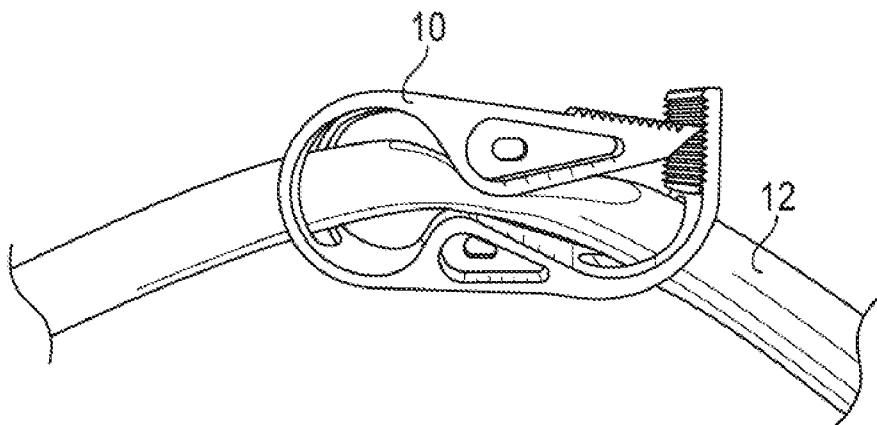


FIG. 1B
(Prior Art)

2/8

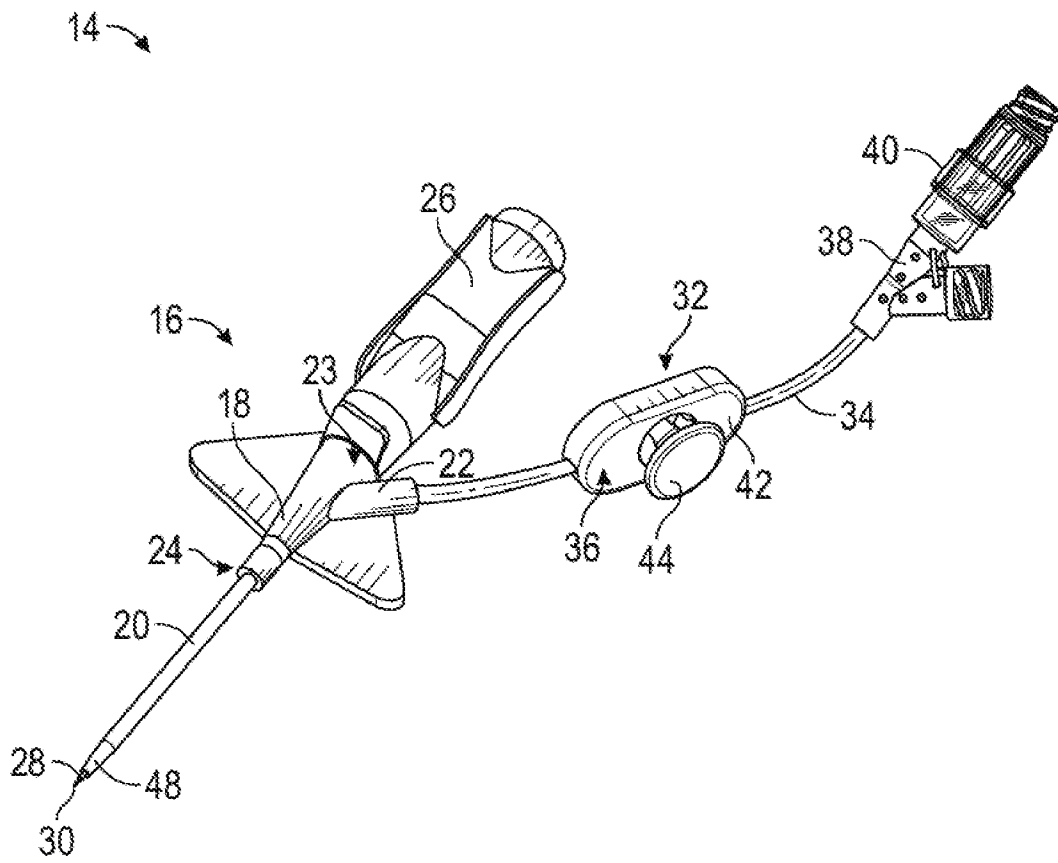


FIG. 2

3/8

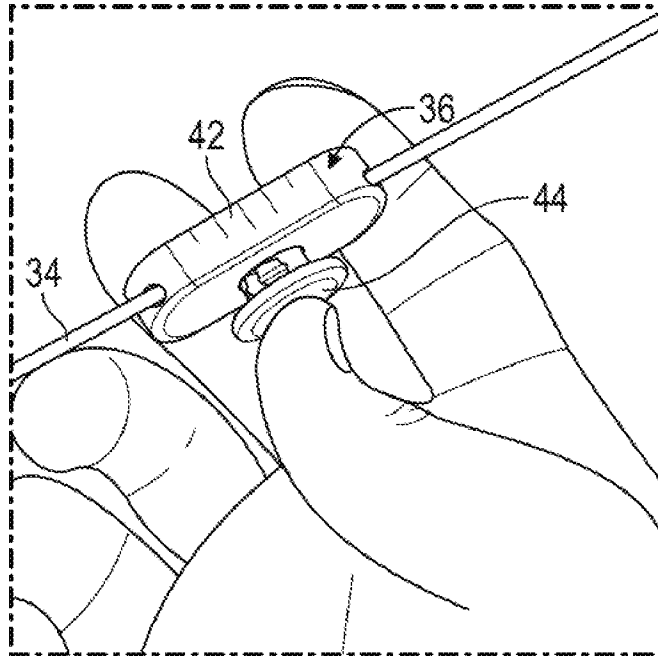


FIG. 3A

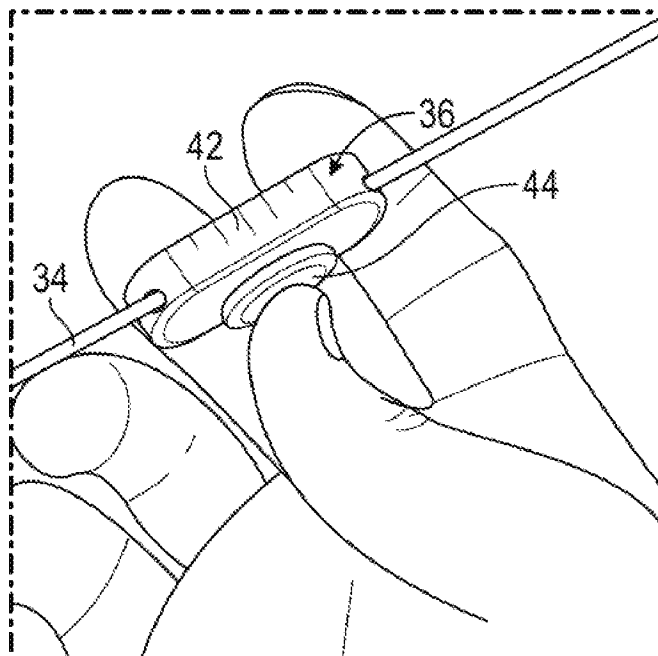


FIG. 3B

4/8

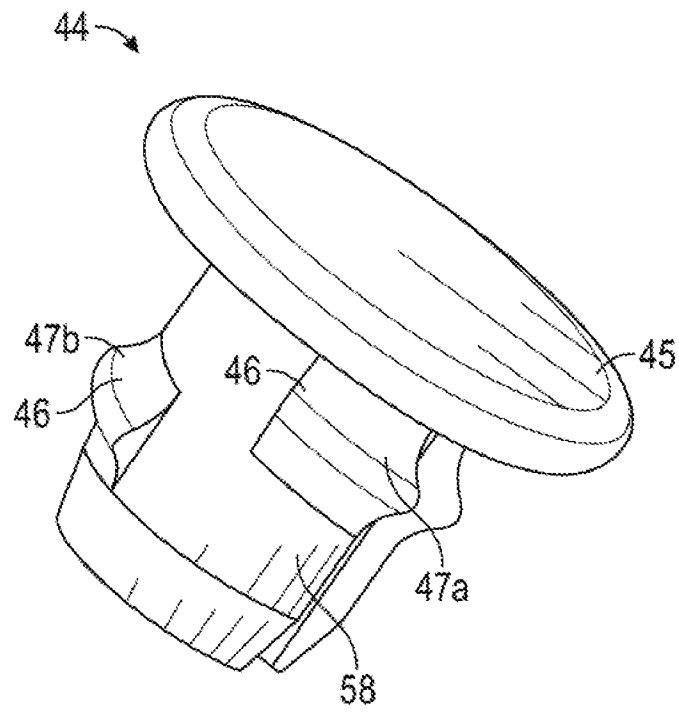


FIG. 4A

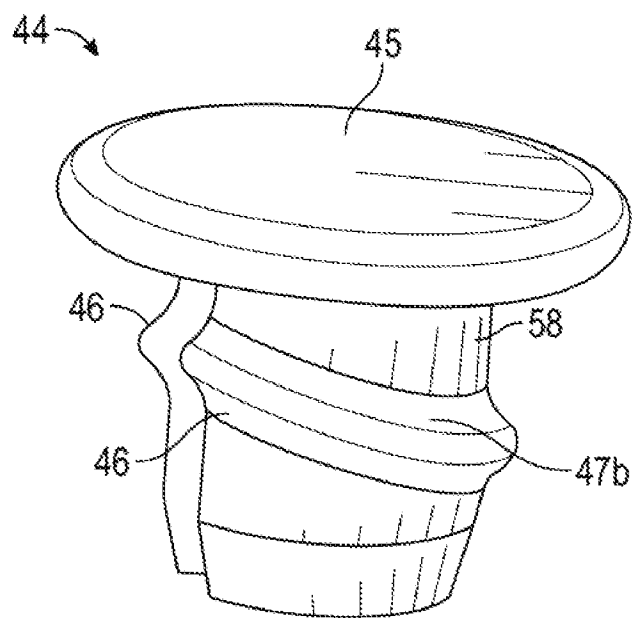


FIG. 4B

5/8

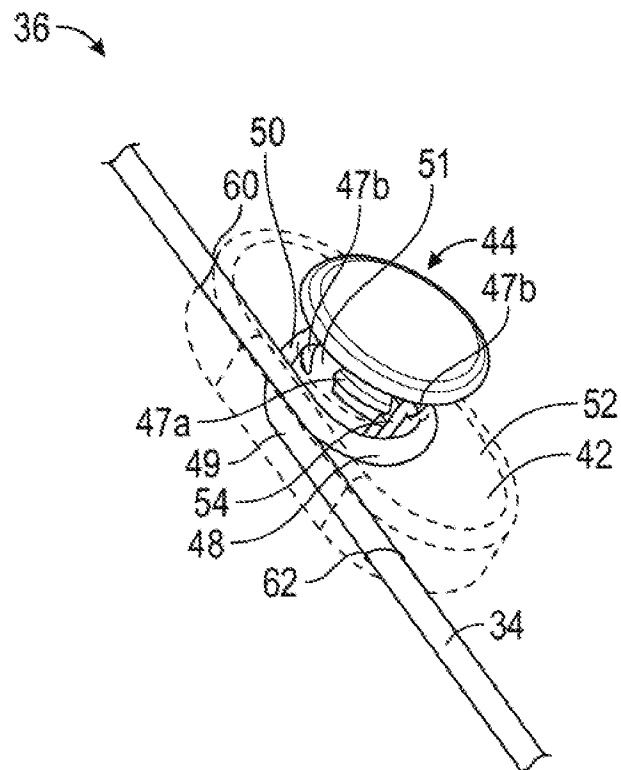


FIG. 5A

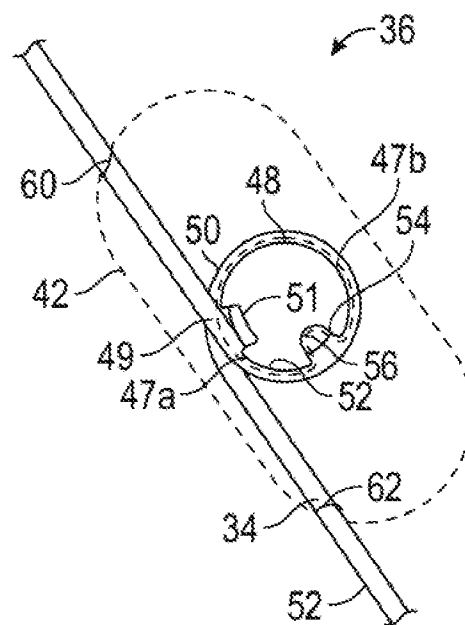


FIG. 5B

6/8

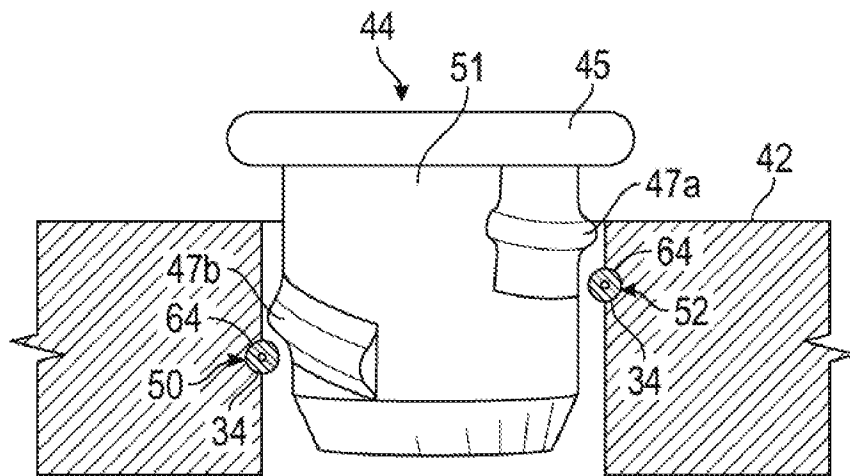


FIG. 6A

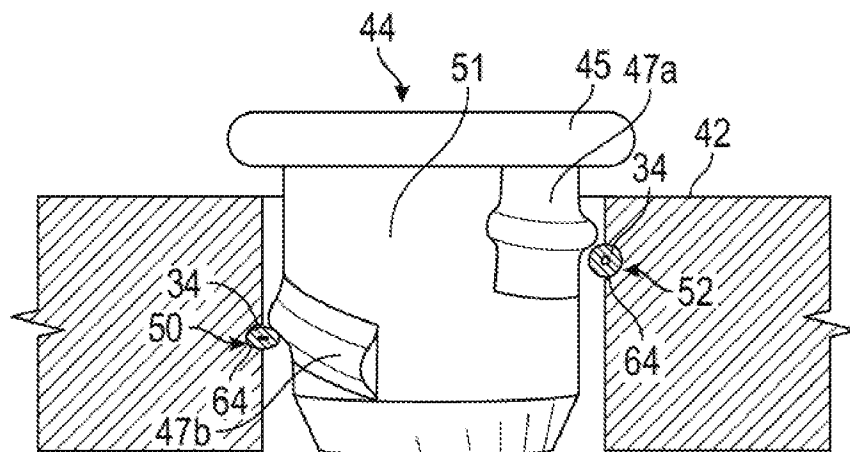


FIG. 6B

7/8

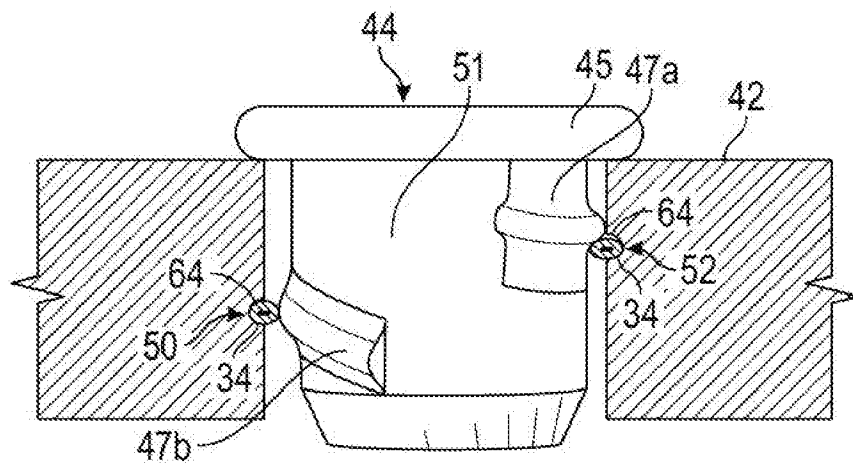


FIG. 6C

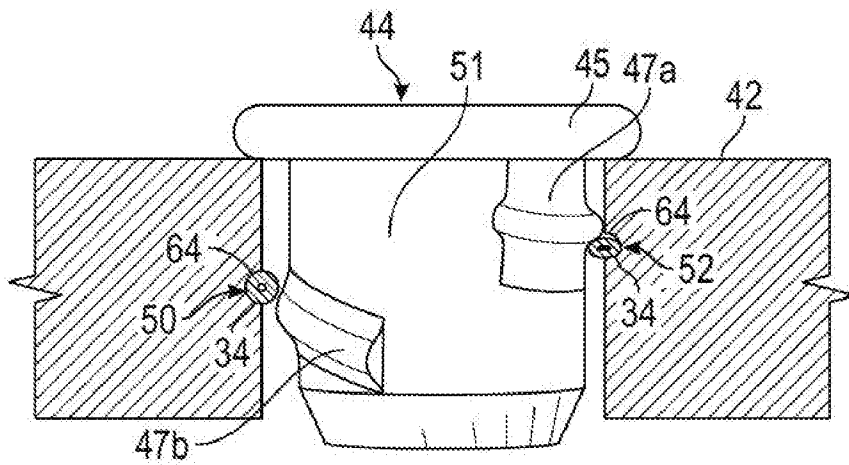


FIG. 6D

8/8

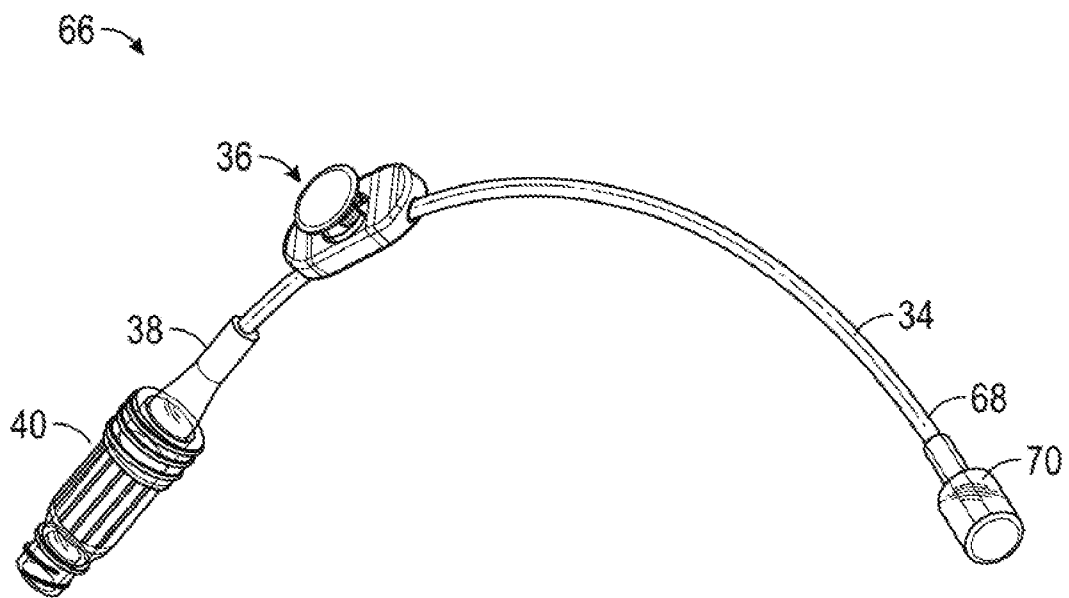


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2020/018856

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61M39/28
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/254034 A1 (BECK KENT [US] ET AL) 8 October 2009 (2009-10-08) the whole document	1-20
X	WO 2014/169428 A1 (FUJIAN BESTWAY MEDICAL POLYMER CORP [CN]) 23 October 2014 (2014-10-23) the whole document	1-20
X	WO 2015/062101 A1 (FUJIAN BESTWAY MEDICAL POLYMER CORP [CN]) 7 May 2015 (2015-05-07) the whole document	1-20
X	US 2013/324975 A1 (DOUGLAS PETER F [US] ET AL) 5 December 2013 (2013-12-05) the whole document	1-20
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 April 2020

Date of mailing of the international search report

28/04/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Neiller, Frédéric

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2020/018856

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/083737 A1 (BECK KENT [US]) 5 April 2012 (2012-04-05) the whole document -----	1-20
X	WO 2011/073766 A1 (GAMBRO LUNDIA AB [SE]; PARALUPPI MARCO [IT]; LITTERA MICHELE [IT]) 23 June 2011 (2011-06-23) the whole document -----	1-20
X	EP 0 307 743 A1 (JOKA KATHETERTECHNIK GMBH [DE]) 22 March 1989 (1989-03-22) the whole document -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2020/018856

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009254034 A1	08-10-2009	AU 2009251680 A1 CA 2720492 A1 CN 102065931 A EP 2271386 A2 IL 208329 A JP 5632363 B2 JP 2011516162 A KR 20110025736 A US 2009254034 A1 WO 2009146045 A2	03-12-2009 03-12-2009 18-05-2011 12-01-2011 31-07-2014 26-11-2014 26-05-2011 11-03-2011 08-10-2009 03-12-2009
WO 2014169428 A1	23-10-2014	CN 105209109 A WO 2014169428 A1	30-12-2015 23-10-2014
WO 2015062101 A1	07-05-2015	NONE	
US 2013324975 A1	05-12-2013	US 2013324975 A1 US 2014171922 A1 WO 2013180866 A1	05-12-2013 19-06-2014 05-12-2013
US 2012083737 A1	05-04-2012	AU 2011308752 A1 CA 2812764 A1 CN 103298506 A EP 2621560 A2 IL 225424 A JP 2013538649 A KR 20130099128 A US 2012083737 A1 WO 2012044807 A2	02-05-2013 05-04-2012 11-09-2013 07-08-2013 21-04-2016 17-10-2013 05-09-2013 05-04-2012 05-04-2012
WO 2011073766 A1	23-06-2011	EP 2512548 A1 IT 1397622 B1 WO 2011073766 A1	24-10-2012 18-01-2013 23-06-2011
EP 0307743 A1	22-03-1989	DE 3731242 A1 EP 0307743 A1 ES 2032912 T3 US 4960259 A	30-03-1989 22-03-1989 01-03-1993 02-10-1990