

(12) **UK Patent Application** (19) **GB** (11) **2486096** (13) **A**

(43) Date of Reproduction by UK Office **06.06.2012**

(21) Application No: **1202985.6**
(22) Date of Filing: **12.08.2010**
Date Lodged: **22.02.2012**

(30) Priority Data:
(31) **0914971** (32) **28.08.2009** (33) **GB**

(86) International Application Data:
PCT/GB2010/051339 En 12.08.2010

(87) International Publication Data:
WO2011/023977 En 03.03.2011

(51) INT CL:
E05B 3/00 (2006.01) **E05B 13/10** (2006.01)

(56) Documents Cited by ISA:
GB 2460489 A **GB 2264861 A**
DE 010250960 A1 **DE 002435359 A1**
DE 000832411 C **FR 002186687 A1**
US 3880536 A **US 1951188 A**
US 1714708 A **US 1590680 A**

(58) Field of Search by ISA:
INT CL **E05B**
Other: **EPO-Internal**


(71) Applicant(s):
Heywood Williams Components Limited
(Incorporated in the United Kingdom)
Premier Way, Lowfields Business Park, Elland,
HALIFAX, HX5 9HT, United Kingdom

(72) Inventor(s):
Paul Robert Pearson

(74) Agent and/or Address for Service:
Appleyard Lees
15 Clare Road, HALIFAX, West Yorkshire, HX1 2HY,
United Kingdom

(54) Title of the Invention: **Handles**
Abstract Title: **Handles**

(57) A handle, for example a door handle, is provided comprising a handle portion (10), a base portion (11), and spindle (12). The handle portion (10) is rotatable with respect to the base portion (11) but is held in position against the base (portion 11) by trapping the base portion (11) between a projecting part and the spindle (12) and the handle portion (10).

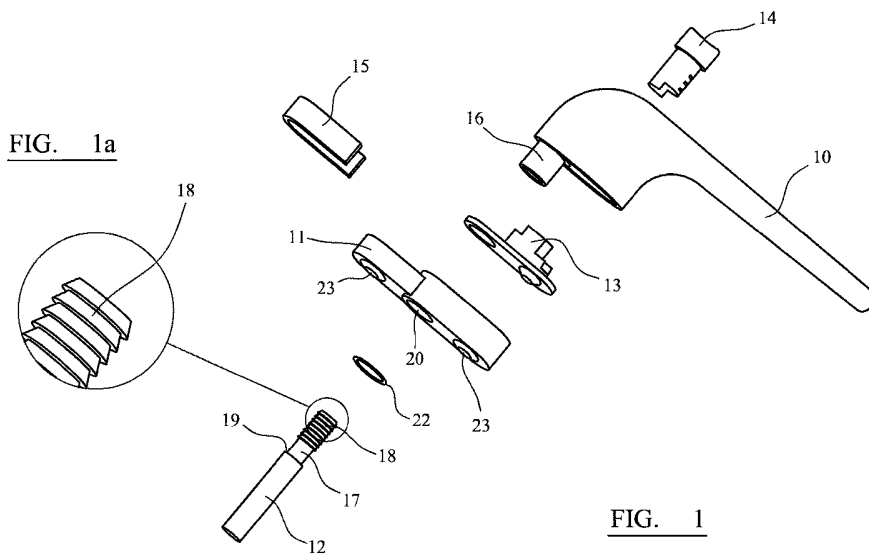

GB 2486096 A