

(19)



(11)

EP 3 501 944 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.06.2019 Bulletin 2019/26

(51) Int Cl.:
B62D 6/00 (2006.01)

(21) Application number: **17209114.2**

(22) Date of filing: **20.12.2017**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD TN

(71) Applicant: **Aptiv Technologies Limited
St. Michael (BB)**

(72) Inventor: **Wuthishuwong, Chairit
42107 Wuppertal (DE)**

(74) Representative: **Manitz Finsterwald
Patent- und Rechtsanwaltspartnerschaft mbB
Martin-Greif-Strasse 1
80336 München (DE)**

(54) METHOD AND DEVICE FOR ESTIMATING A STEERING TORQUE

(57) Method for estimating a steering torque (28), in particular for the lateral control of a vehicle (34), comprising the steps of detecting at least one signal on a current vehicle state and/or current vehicle environment, determining a desired steering angle (δ) by a steering control unit (42) based on the at least one detected signal, estimating a vehicle lateral force on the basis of a tire dynamics model, including the determined steering angle

(δ) as an input factor, estimating a vehicle lateral force on the basis of a lateral dynamics model, correcting the lateral force value estimated by the tire dynamics model on the basis of the lateral force value estimated by the lateral dynamics model, estimating a self-aligning torque (32) based on the corrected lateral force value, and estimating a steering torque (28) from the estimated self-aligning torque (32).

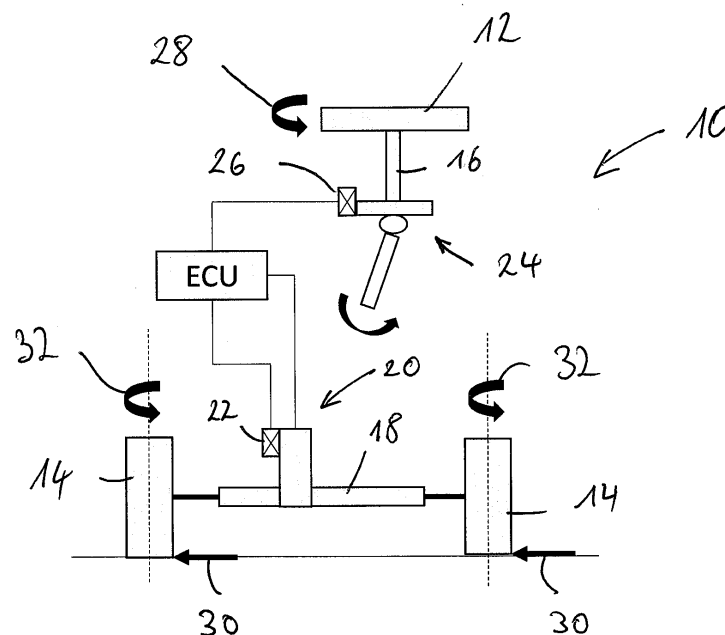


Fig. 1

EP 3 501 944 A1

Description

[0001] The present invention refers to a method and a device for estimating a steering torque, in particular for the lateral control of a vehicle.

[0002] Advanced Driver Assistant Systems (ADAS) and automated driving concepts, such as fully or semi-autonomous driving systems, provide assistance to a driver in different driving situations or allow to stabilize and/or control a vehicle in a longitudinal and/or lateral orientation.

[0003] As regards the lateral control of a vehicle, for example, Lane Keeping Assist Systems (LKAS) or auto pilots for autonomous driving are known which may actively turn a steering wheel to make a vehicle move towards a desired travel course by compensating the difference between a current heading direction, a detected road curvature, and a lateral offset to the respective lane center. Steering control is the crucial part of keeping a vehicle moving on a desired travel course. Accordingly, the lateral control of a vehicle requires determining a desired steering angle, which is appropriate for realising the desired travel course of the vehicle.

[0004] By determining merely a desired steering angle, the respective steering system may attempt to reach said steering angle with a maximum possible steering torque. However, this steering torque may be higher than a permissible or adequate limit for such steering torque, which may, for example, be defined at ± 3 Nm for safety and/or comfort reasons. Current Advanced Driver Assistant Systems (ADAS) and also autonomous driving systems - at least semi-autonomous systems - may still require a driver's hand on the steering wheel for overriding in case of an unexpected driving situation. If the level of torque a driver has to apply instantaneously is high, in particular higher than 3 Nm, the driving comfort and/or safety may be affected.

[0005] Furthermore, most of the steering systems such as electric power steering systems may only be provided with torque as an input signal. Inputting merely a steering angle may therefore not be sufficient. Finally, the steering angle as an input factor limits the handling properties of a vehicle. To reach the same desired steering angle, different torque values may be necessary dependant on the respective driving conditions. The road surface, vehicle speed, and or the tire properties and conditions may influence the required steering torque for realising a specific steering angle. At the same time, if the desired steering angle is attempted to be reached with an inappropriate steering torque, the vehicle may lose grip.

[0006] In view of the above, it has been an object of the present invention to provide a method for estimating a steering torque with a high level of accuracy and only limited calculating effort. It has also been an object to provide a device for estimating a steering torque.

[0007] With regard to the method, this objective has been solved by the features of new claim 1. A device for estimating a steering torque is subject to claim 15. Further embodiments of the invention are referred to in the dependent claims.

[0008] A method for estimating a steering torque according to the present invention comprises the steps of detecting at least one signal on a current vehicle state and/or current vehicle environment, determining a desired steering angle by a steering control unit based on the at least one detected signal, estimating a vehicle lateral force on the basis of a tire dynamics model, including the determined steering angle as an input factor, estimating a vehicle lateral force on the basis of a lateral dynamics model, correcting the lateral force value estimated by the tire dynamics model on the basis of the lateral force value estimated by the lateral dynamics model, estimating a self-aligning torque based on the corrected lateral force value, and estimating a steering torque from the estimated self-aligning torque.

[0009] The estimated steering torque may be used for the lateral control of a vehicle or for driver assistance, such as for providing a warning signal to a driver.

[0010] The step of detecting a signal on a current vehicle state and/or current vehicle environment may be conducted by a respective sensor or by a plurality of sensors. The current vehicle state, including a vehicle position, orientation, speed and the respective rate of change may be detected by a GPS unit and/or an inertial measurement unit (IMU). The vehicle environment, such as static or dynamic obstacles or lane markers, may be detected by a camera, radar, LIDAR and/or ultrasonic sensor.

[0011] The detected signal or the plurality of detected signals may then be used for determining a desired steering angle. This operation is particularly conducted by a steering control unit, and by applying an appropriate calculation model. The desired steering angle may subsequently be used as an input factor for estimating a vehicle lateral force on the basis of a tire dynamics model. Independently of the tire dynamics model, a vehicle lateral force is estimated on the basis of a lateral dynamics model. The lateral force value estimated by the tire dynamics model is then corrected on the basis of the lateral force value estimated by the lateral dynamics model. A self-aligning torque is estimated based on the corrected lateral force value. Finally, a steering torque may be estimated from the estimated self-aligning torque.

[0012] In particular, the self-aligning torque may correspond to a counter torque for correcting a tire slip angle, whereas the steering torque may correlate in a specific relationship to the required counter torque, allowing to estimate the steering torque.

[0013] According to an embodiment of the present invention, the method further comprises the step of estimating a tire slip angle, wherein the determined steering angle provides an input factor for said tire slip angle estimation and/or

wherein the step of estimating the vehicle lateral force on the basis of the tire dynamics model includes the estimated tire slip angle as an input factor. Thereby, the accuracy of the lateral force estimation on the basis of the tire dynamics model may be improved.

[0014] The step of estimating the slip angle may be conducted on the basis of a slip angle model, which is, for example, based on the equations:

$$\alpha_F(k) = -\beta(k) + \delta_w(k) - \frac{l_F \dot{\psi}(k)}{v_x(k)}$$

and

$$\alpha_R(k) = -\beta(k) + \frac{l_R \dot{\psi}(k)}{v_x(k)}$$

where

α_F represents the tire slip angle of the front axle,
 α_R represents the tire slip angle of the rear axle,
 β represents the angle of the vehicle body relative to the travel direction,
 δ_w represents the steering angle,
 l_F represents the distance between the vehicle center of gravity and the front axle,
 l_R represents the distance between the vehicle center of gravity and the rear axle,
 ψ represents the yaw rate,
 v_x represents the vehicle longitudinal velocity, and
 k represents a discrete time sequence.

[0015] Such calculation allows to accurately estimate the slip angle with only little computation effort. The values for l_F and l_R may be substantially fix and known for the respective vehicle. Variations regarding the center of gravity due to loading may be considered or neglected. The values for β , $\dot{\psi}$, and v_x may be measured by sensors online during driving. The value for δ_w may be the desired steering angle previously determined.

[0016] According to a further embodiment, the tire dynamics model is a Pacejka model, for example, based on the equations:

$$\hat{F}_{yF}(k) = D \sin(C \tan^{-1}(B\alpha_F - E(B\alpha_F - \tan^{-1}(B\alpha_F))))$$

and

$$\hat{F}_{yR}(k) = D \sin(C \tan^{-1}(B\alpha_R - E(B\alpha_R - \tan^{-1}(B\alpha_R))))$$

where

$\hat{F}_{yF}$ represents the tire lateral force of the front axle,
 $\hat{F}_{yR}$ represents the tire lateral force of the rear axle,
 α_F represents the tire slip angle of the front axle,
 α_R represents the tire slip angle of the rear axle,
 k represents a discrete time sequence, and
 B , C , D and E represent fitting coefficients.

[0017] Such a Pacejka model provides a rather high level of accuracy with an acceptable amount of computation effort, which is still possible to provide continuously during the driving of a vehicle. The values for α_F and α_R may be determined via the slip angle estimation mentioned above. The values for B , C , D and E may be obtained offline for respective road conditions, such as the properties of the road surface.

[0018] The values for B , C , D and E may in particular represent dry, wet or snow covered road surfaces, and also different road surface materials such as concrete, asphalt or cobblestone.

[0019] The method according to the present invention may further comprise the step of estimating a yaw acceleration, wherein the step of estimating the vehicle lateral force on the basis of the lateral dynamics model may include the estimated yaw acceleration as an input factor. Thereby, the accuracy of the lateral force estimation on the basis of the lateral dynamics model may be improved.

[0020] The step of estimating the yaw acceleration may be conducted on the basis of a backward Euler method, for example, based on the equation:

$$\ddot{\psi}(k) = \frac{\dot{\psi}(k) - \dot{\psi}(k-1)}{T_s}$$

where

$\ddot{\psi}$ represents the yaw acceleration,
 $\dot{\psi}$ represents the yaw rate, and
 T_s represents a sampling period or resolution, and
 k represents a discrete time sequence.

[0021] Based on the backward Euler method, in particular based on the equation above, the yaw acceleration may be estimated accurately and with only little computation effort.

[0022] According to yet a further embodiment, the step of estimating the vehicle lateral force on the basis of a lateral dynamics model is conducted independent from the desired steering angle determined by the steering control unit. In this case, the desired steering angle is not required as an input factor for the lateral dynamics model, whereby computation may be simplified accordingly conducted with reduced effort, while at the same time a sufficient level of accuracy may be ensured.

[0023] The lateral dynamics model may be a single track model, for example, based on the equations:

$$Ma_y(k) = F_{yF}(k) + F_{yR}(k)$$

and

$$I_z \ddot{\psi}(k) = l_F F_{yF}(k) - l_R F_{yR}(k)$$

where

M represents the vehicle mass,
 a_y represents the vehicle lateral acceleration,
 F_{yF} represents the tire lateral force of the front axle,
 F_{yR} represents the tire lateral force of the rear axle,
 I_z represents the vehicle rotation moment of inertia,
 $\ddot{\psi}$ represents the yaw acceleration, and
 k represents a discrete time sequence.

[0024] Such a single track model provides a high level of accuracy with only little computation effort. The values for M and I_z may be substantially fix and known for the respective vehicle. Variations regarding the mass and/or the rotation moment of inertia due to loading may be considered or neglected. The values for a_y and $\ddot{\psi}$ may be measured by sensors online during driving.

[0025] According to yet a further embodiment, the step of correcting the lateral force value is conducted by an observer. The observer may, for example, be a linear observer, such as a Luenberger-Observer. Also other types of observers may be used, for example, non-linear observers. Using an observer for correcting the lateral force value is simple and effective in achieving a higher degree of accuracy with only little computation effort.

[0026] Furthermore, the step of correcting the lateral force value may comprise the detection of an error value between the lateral force value estimated by the tire dynamics model and the lateral force value estimated by the lateral dynamics model, and the multiplication of the error value by an observer gain for receiving a correction value. The correction value may then be taken as a basis for correcting the lateral force value estimated by the tire dynamics model in a subsequent sampling time sequence. The multiplication of the error value with the observer gain may be conducted by an observer

mentioned above. The step of correcting the lateral force value estimated by the tire dynamics model may thus be conducted in a particularly robust manner.

[0027] According to yet a further embodiment, the method may further comprise the step of estimating a pneumatic trail, wherein the step of estimating the self-aligning torque may include the estimated pneumatic trail as an input factor. The pneumatic trail may facilitate the estimation of the self-aligning torque, particularly, once the vehicle lateral force is known or adequately estimated.

[0028] The step of estimating the pneumatic trail may be conducted on the basis of a pneumatic trail model, which is, for example, based on the equation:

$$t_p = - \left(\frac{T_{SAT}}{F_y} \right)_{\alpha \rightarrow 0} = \frac{1}{3} a$$

where

t_p represents the pneumatic trail,

T_{SAT} represents the self-aligning torque,

F_y represents the corrected lateral force, and

a represents the length of the contact surface between tire and road in a longitudinal orientation.

[0029] This equation above allows an effective calculation of the self-aligning torque. Once the vehicle lateral force is known or adequately estimated, a sufficient estimation of the self-aligning torque may be conducted on the basis of the factor a , which represents the length of the contact surface between tire and road in a longitudinal orientation. That is, once the tire touches the road surface, a small area around the contact point between tire and vehicle, known as contact patch, is established. The size of the area in question is the tire width multiplied with the patch length a . The value for a , may be dependent on the tire characteristics, such as tire size or radial tire design, and current properties, such as air pressure and driving situation. The value for a may be determined offline, in particular by empirical analysis and testing, wherein variable factors for a , such as air pressure, may be considered or neglected.

[0030] The steering torque may be derived from the self-aligning torque on the basis of a steering model, which represents a mechanical or electro-mechanical system between the tires and the steering wheel of a vehicle. The steering model may comprise a first order system, for example, a first order lag system. Higher order systems are also applicable. Thereby the modelling of a comparably complex electro-mechanical steering system may be facilitated, while at the same time achieving sufficiently accurate results.

[0031] In the first order system, two free parameters may be present, namely the power steering ratio, which is typically a fix value and simple to obtain, and the pole location of the steering system. Electric power steering dynamics can be determined offline using a frequency response method or other methods like empirical data, or may, for example, also be obtained from an OEM. A driver may perform a final adjustment to the first order system in view of the pole location, in order to meet respective requirements, such as the steady state, response time, and/or improve the performance of such system.

[0032] A further aspect of the present invention refers to a method for the lateral control of a vehicle, in particular for a passenger car or a truck, comprising the steps of estimating of a steering torque according to the above description, and applying the estimated steering torque to a steering column of said vehicle.

[0033] A yet further aspect of the present invention refers to a method for assisting a driver, in particular of a passenger car or a truck, comprising the steps of estimating of a steering torque according to the above description, and outputting a warning signal to the driver in case the estimated steering torque is above a permissible threshold value.

[0034] According to yet a further aspect of the present invention, a device for estimating a steering torque, in particular for the lateral control of a vehicle, comprises a detecting means for detecting at least one signal on a current vehicle state and/or current vehicle environment, a control unit for determining a desired steering angle based on the at least one detected signal, an estimation unit for estimating a vehicle lateral force on the basis of a tire dynamics model, including the determined steering angle as an input factor, an estimation unit for estimating a vehicle lateral force on the basis of a lateral dynamics model, a correction unit for correcting the lateral force value estimated by the tire dynamics model on the basis of the lateral force value estimated by the lateral dynamics model, an estimating unit for estimating a self-aligning torque based on the corrected lateral force value, and an estimating unit for estimating a steering torque from the estimated self-aligning torque.

[0035] A further aspect of the present invention refers to a steering system for a vehicle, in particular for a passenger car or a truck, with a device according to the above specification.

[0036] A yet further aspect of the present invention refers to a vehicle, in particular for a passenger car or a truck, with a device and/or a steering system according to the above specification.

[0037] The details mentioned above with regard to the method likewise apply to the device, the steering system and/or the vehicle according to the present invention.

[0038] The features and advantages of the various embodiments of the present invention will, in the following, be described with reference to the figures.

- Figure 1 shows a schematic illustration of a vehicle steering system;
- Figure 2 shows a schematic block diagram for a vehicle lateral control;
- Figure 3 shows a schematic block diagram for the estimation of a steering torque;
- Figure 4 shows a schematic illustration of a contact patch between a vehicle tire and a road surface;
- Figure 5 shows a schematic illustration of the relationship between the tire lateral force, pneumatic trail, and self-aligning torque during cornering;
- Figure 6a shows a schematic illustration of a vehicle steering system with an electro-mechanical system between tires and steering wheel being highlighted;
- Figure 6b shows a schematic illustration of a vehicle steering system with the electro-mechanical system between tires and steering wheel being represented by a model;
- Figure 7 shows a graph illustrating the relationship between the vehicle lateral force and the slip ration dependant on the road conditions.

[0039] Fig. 1 shows a schematic illustration of a vehicle steering system 10. The vehicle steering system 10 comprises a steering wheel 12 and road wheel 14, wherein the steering wheel 12 is coupled to the road wheels 14 via a steering column 16 and an axle 18. The steering system 10 further includes an electric power steering (EPS) system 20 with an electric steering motor 22 for providing electric steering assistance in response to a driver turning the steering wheel 12. The vehicle steering system 10 may furthermore include an active front steering (AFS) system 24 with an electric motor 26 mounted to the steering column 16. The AFS system 24 may provide additional or corrective steering, for example, during fully or semi-autonomous driving.

[0040] In Fig. 1 the steering torque applied to the steering wheel 12 is denoted with reference numeral 28. The steering torque 28 may, for example, be provided by a driver and/or the AFS system 24. During cornering, a lateral force 30 may be exerted onto the road wheels 14. This lateral force may cause a so called self-aligning torque 32.

[0041] As may further be comprehended from Fig. 1, the vehicle steering system 10 may also include an electronic control unit ECU, which may provide system control for the EPS system 20 and/or the AFS system 24. The ECU may particularly be configured for conducting a method for estimating a steering torque 28 in accordance with the present invention. The ECU may, inter alia, receive signals from a steering angle sensor and/or a torque sensor not shown here. The steering angle sensor and/or a torque sensor may be mounted to the steering column 16.

[0042] Fig. 2 shows a schematic block diagram for a vehicle lateral control according to an embodiment of the present invention. A vehicle is denoted with numeral 34, and may comprise a vehicle steering system 10, as depicted in Fig. 1 and referred to above. The vehicle 34 may also comprise a communication system such as CAN. The current state of the vehicle 34, such as the position, speed, yaw rate and/or orientation, as well as their rates of changing, may be detected with a detecting means 36. The detecting means may comprise a GPS unit and/or an inertial measurement unit (IMU).

[0043] The current environment of the vehicle may be detected by detecting means 38 and 40. The detecting means 38 may comprise sensors such as, a camera and/or a Lidar sensor, which may provide information regarding static and/or dynamics obstacles, lane markers and/or road curvature. The detecting means 38 may output a lateral offset, for example, as a value or presented by polynomial coefficients of a polynomial equation. The polynomial equation may be expressed by:

$$y = a_0 + a_1x + a_2x^2 + a_3x^3$$

where

y represents the lateral offset,

x represents the longitudinal distance from the vehicle center, and a_0, a_1, a_2 and a_3 represent coefficients.

[0044] The output of detecting means 36 may, for example, be inputted to the detecting means 38. Detecting means 40 may comprise a radar sensor

[0045] The output of the detecting means 36, 38 and 40 may be fed to a control unit 42 for determining a desired steering angle. That is, lateral parameters, lateral offset from the lane center, orientation difference from the lane center, their derivatives and vehicle dynamics parameter such as longitudinal and lateral velocity, yaw and yaw rate may be fed to the control unit 42. The control unit 42 may comprise a Model Predictive Controller (MPC) or any other type of controller, which is particularly configured to determine a desired steering angle δ at a respective time sequence, included current and preview time sequences.

[0046] The steps for estimating of a steering torque 28 may be conducted by an estimating system 44, which may include an estimation unit 46 for estimating a vehicle lateral force, an estimating unit 48 for estimating a pneumatic trail value, an estimating unit 50 for estimating a self-aligning torque, and an estimating unit 52 for estimating a steering torque from the estimated self-aligning torque.

[0047] Vehicle parameters are denoted with numeral 54, and may be fix or substantially fix values, for example, including the vehicle mass or distances between the front and rear axle to the vehicle center of gravity.

[0048] The desired steering angle determined by control unit 42, the vehicle parameters 54 and the output of the detecting means 36 are input to the estimation unit 46.

[0049] The functionality of the estimating unit 46 is described in greater detail with reference to Fig. 3. A slip angle estimation unit 56 may receive input signals, such as vehicle parameters 54 and signals from the control unit 42 including a desired steering angle. The slip angle estimation unit 56 may also receive vehicle state information from detecting means 36, such as the vehicle longitudinal speed and yaw rate.

[0050] Subsequently, the tire slip angle of the front and rear axle may be estimated by the equations:

$$\alpha_F(k) = -\beta(k) + \delta_w(k) - \frac{l_F \dot{\psi}(k)}{v_x(k)}$$

and

$$\alpha_R(k) = -\beta(k) + \frac{l_R \dot{\psi}(k)}{v_x(k)}$$

where

α_F represents the tire slip angle of the front axle,

α_R represents the tire slip angle of the rear axle,

β represents the angle of the vehicle body relative to the travel direction,

δ_w represents the steering angle,

l_F represents the distance between the vehicle center of gravity and the front axle,

l_R represents the distance between the vehicle center of gravity and the rear axle,

ψ represents the yaw rate, and

v_x represents the vehicle longitudinal velocity, and

k represents a discrete time sequence.

[0051] The estimated tire slip angles of the front and rear axle may then be fed to estimating unit 58 for estimating a vehicle lateral force on the basis of a tire dynamics model. The estimating unit 58 may, in particular, include a Pacejka model, which may be expressed by the equations:

$$\hat{F}_{yF}(k) = D \sin(C \tan^{-1}(B\alpha_F - E(B\alpha_F - \tan^{-1}(B\alpha_F))))$$

and

$$\hat{F}_{yR}(k) = D \sin(C \tan^{-1}(B\alpha_R - E(B\alpha_R - \tan^{-1}(B\alpha_R))))$$

where

$\hat{F}_{yF}$ represents the tire lateral force of the front axle,
 $\hat{F}_{yR}$ represents the tire lateral force of the rear axle,
 α_F represents the tire slip angle of the front axle,
 α_R represents the tire slip angle of the rear axle,
 k represents a discrete time sequence, and
 B , C , D and E represent fitting coefficients.

[0052] The values for B , C , D and E may be obtained offline for any relevant road condition, such as the road surface, dry, wet or snow covered road surfaces, or also different road surface materials such as concrete, asphalt or cobblestone. The relationship between the vehicle lateral force and the slip ratio dependant on the road conditions, including different road materials, is illustrated in Fig. 7. The coefficients B , C , D and E may be obtained from such data set, illustrating the dependency of the road conditions for the slip ratio.

[0053] In parallel, a yaw acceleration is estimated by estimation unit 60 by applying a backward Euler formula, which may be expressed by the equation:

$$\ddot{\psi}(k) = \frac{\dot{\psi}(k) - \dot{\psi}(k-1)}{T_s}$$

where

$\ddot{\psi}$ represents the yaw acceleration,
 $\dot{\psi}$ represents the yaw rate, and
 T_s represents a sampling period or resolution,
 k represents a discrete time sequence.

[0054] The yaw rate as input factor for the estimation unit 60 may be derived from detecting means 36.

[0055] Furthermore, an estimation unit 62 estimates the lateral force of both front and rear axle on the basis the lateral dynamics model. In particular, the lateral dynamics model applied by the estimation unit 62 may be a single track model, in particular expressed by the equations:

$$Ma_y(k) = F_{yF}(k) + F_{yR}(k)$$

and

$$I_z \ddot{\psi}(k) = l_F F_{yF}(k) - l_R F_{yR}(k)$$

where

M represents the vehicle mass,
 a_y represents the vehicle lateral acceleration,
 F_{yF} represents the tire lateral force of the front axle,
 F_{yR} represents the tire lateral force of the rear axle,
 I_z represents the vehicle rotation moment of inertia,
 $\ddot{\psi}$ represents the yaw acceleration, and
 k represents a discrete time sequence.

[0056] The yaw acceleration as an input factor may be derived from unit 60, whereas the lateral acceleration as input factor may be derived from detection means 36, for example. Furthermore, also vehicle parameters 54 are provided as input factors for the estimation unit 62.

[0057] An error determination unit 64 determines an error vector of the lateral forces between the lateral force value estimated by the tire dynamics model of unit 58 on the one hand and the lateral dynamics model of unit 62 on the other hand. An observer gain L is multiplied to the error vector and used as an input value or input vector for unit 62. That is, the observer gain L multiplied by the error vector may provide a correction value or correction vector, respectively, which

is used to correct the estimation of the vehicle lateral force by unit 58 in the next sampling time sequence.

[0058] The estimation unit 48 indicated in Fig. 2 is configured to estimate a pneumatic trail. The pneumatic trail is illustrated in greater detail in Fig. 4. The left hand side of Fig. 4 illustrates a side view of a road wheel 14 rolling in direction 66. A contact point between the road wheel 14 and a road surface 68 is indicated with numeral 70. A detailed view of the contact point 70 is shown on the right hand side of Fig. 4. A lateral force 30 as well as a contact patch 72, which is present between the road wheel 14 and the road surface 68, is shown. The contact patch 72 may have a length a which is denoted with numeral 74. The size of the contact patch 72 and therewith its length 74 is dependent on the tire characteristics, and properties such as air pressure or tire size. It is possible to estimate a value of the pneumatic trail 76 when the tire slip angle is small.

[0059] The step of estimating the pneumatic trail may, in particular, be conducted on the basis of a pneumatic trail model, which is, for example, based on the equation:

$$t_p = - \left(\frac{T_{SAT}}{F_y} \right)_{\alpha \rightarrow 0} = \frac{1}{3} a$$

where

t_p represents the pneumatic trail,
 T_{SAT} represents the self-aligning torque,
 F_y represents the corrected lateral force, and
 a represents the length of the contact surface between tire and road in a longitudinal orientation of the tire.

[0060] The estimation unit 50 indicated in Fig. 2 is configured to estimate a self-aligning torque. The self-aligning torque may be computed by the product of the corrected vehicle lateral force, estimated by estimation unit 46 and the pneumatic trail, estimated by estimation unit 48. In particular, the following equation may be applied:

$$T_{sat} \approx F_y \cdot t_p$$

where

T_{sat} represents the self-aligning torque,
 F_y represents the corrected vehicle lateral force, and
 t_p represents the pneumatic trail.

[0061] The relationship between the vehicle lateral force, pneumatic trail, and self-aligning torque during cornering is illustrated in Fig. 5. It may be comprehended that a lateral force 30 is present on the wheel, resulting in a counter lateral force 31 as well as a self-aligning torque 32. A slip angle α is denoted with numeral 78. The direction, into which the wheel points, is denoted with numeral 80, whereas the direction of motion is denoted with numeral 82. The center of pressure is denoted with numeral 84 and the pressure distribution with numeral 86.

[0062] In order to control a vehicle while cornering, the torque 90 that a vehicle requires has to be at least sufficient to correct the tire slip angle 78. In other words, the torque 90 has to be at least at the same level of the self-aligning torque 32. Accordingly, the desired torque 28 at the steering wheel 12 may be estimated on the basis of the self-aligning torque 32.

[0063] The estimation unit 52 indicated in Fig. 2 is configured to estimate a self-aligning torque on the basis of a steering model. The steering model may represent a mechanical and/or electro-mechanical system between the tires and the steering wheel of a vehicle. The mechanical or electro-mechanical system as a whole is denoted with numeral 92 in Fig. 6a. The steering model may comprise a first order system 94, which is shown in schematically Fig. 6a. The first order system may be a first order lag system. Also a higher order system may be applied. In the first order system, for example, two free parameters may be present, namely the power steering ratio, which is typically a fix value and simple to obtain, and the pole location of the steering system. A driver may perform a final adjustment to the first order system in view of the pole location, in order to meet respective requirements, such as the steady state, response time, and/or improve the performance of such system. The system may be tuned by testing.

Claims

1. Method for estimating a steering torque (28), in particular for the lateral control of a vehicle (34), comprising the steps of:

- detecting at least one signal on a current vehicle state and/or current vehicle environment,
- determining a desired steering angle (δ) by a steering control unit (42) based on the at least one detected signal,
- estimating a vehicle lateral force on the basis of a tire dynamics model, including the determined steering angle (δ) as an input factor,
- estimating a vehicle lateral force on the basis of a lateral dynamics model,
- correcting the lateral force value estimated by the tire dynamics model on the basis of the lateral force value estimated by the lateral dynamics model,
- estimating a self-aligning torque (32) based on the corrected lateral force value, and
- estimating a steering torque (28) from the estimated self-aligning torque (32).

2. Method according to claim 1, further comprising the step of estimating a tire slip angle (α_F, α_R), wherein the determined steering angle (δ) provides an input factor for said tire slip angle estimation and/or wherein the step of estimating the vehicle lateral force on the basis of the tire dynamics model includes the estimated tire slip angle (α_F, α_R) as an input factor.

3. Method according to claim 2, wherein the step of estimating the slip angle (α_F, α_R) is conducted on the basis of a slip angle model, which is preferably based on the equations:

$$\alpha_F(k) = -\beta(k) + \delta_w(k) - \frac{l_F \dot{\psi}(k)}{v_x(k)}$$

and

$$\alpha_R(k) = -\beta(k) + \frac{l_R \dot{\psi}(k)}{v_x(k)}$$

where

- α_F represents the tire slip angle of the front axle,
- α_R represents the tire slip angle of the rear axle,
- β represents the angle of the vehicle body relative to the travel direction,
- δ_w represents the steering angle,
- l_F represents the distance between the vehicle center of gravity and the front axle,
- l_R represents the distance between the vehicle center of gravity and the rear axle,
- $\dot{\psi}$ represents the yaw rate, and
- v_x represents the vehicle longitudinal velocity, and
- k represents a discrete time sequence.

4. Method according to any one of the preceding claims, wherein the tire dynamics model is a Pacejka model, preferably based on the equations:

$$\hat{F}_{yF}(k) = D \sin(C \tan^{-1}(B\alpha_F - E(B\alpha_F - \tan^{-1}(B\alpha_F))))$$

and

$$\hat{F}_{yR}(k) = D \sin(C \tan^{-1}(B\alpha_R - E(B\alpha_R - \tan^{-1}(B\alpha_R))))$$

where

$\hat{F}_{yF}$ represents the tire lateral force of the front axle,
 $\hat{F}_{yR}$ represents the tire lateral force of the rear axle,
 α_F represents the tire slip angle of the front axle,
 α_R represents the tire slip angle of the rear axle,
 k represents a discrete time sequence, and
 B , C , D and E represent fitting coefficients, preferably obtained offline.

5. Method according to any one of the preceding claims,
 further comprising the step of estimating a yaw acceleration ($\ddot{\psi}$), wherein the step of estimating the vehicle lateral
 force on the basis of the lateral dynamics model includes the estimated yaw acceleration ($\ddot{\psi}$) as an input factor.

6. Method according to claim 5,
 wherein the step of estimating the yaw acceleration ($\ddot{\psi}$) is conducted on the basis of a backward Euler method,
 preferably based on the equation:

$$\ddot{\psi}(k) = \frac{\dot{\psi}(k) - \dot{\psi}(k-1)}{T_s}$$

where

$\ddot{\psi}$ represents the yaw acceleration,
 $\dot{\psi}$ represents the yaw rate, and
 T_s represents a sampling period or resolution,
 k represents a discrete time sequence.

7. Method according to any one of the preceding claims,
 wherein the step of estimating the vehicle lateral force on the basis of a lateral dynamics model is conducted
 independent from the desired steering angle (δ) determined by the steering control unit (42).

8. Method according to any one of the preceding claims,
 wherein the lateral dynamics model is a single track model, preferably based on the equations:

$$M a_y(k) = F_{yF}(k) + F_{yR}(k)$$

and

$$I_z \ddot{\psi}(k) = l_F F_{yF}(k) - l_R F_{yR}(k)$$

where

M represents the vehicle mass,
 a_y represents the vehicle lateral acceleration,
 F_{yF} represents the tire lateral force of the front axle,
 F_{yR} represents the tire lateral force of the rear axle,
 I_z represents the vehicle rotation moment of inertia,
 $\ddot{\psi}$ represents the yaw acceleration, and
 k represents a discrete time sequence.

9. Method according to any one of the preceding claims,
 wherein the step of correcting the lateral force value is conducted by an observer, in particular by a linear observer.

10. Method according to any one of the preceding claims,
 wherein the step of correcting the lateral force value comprises the detection of an error value between the lateral
 force value estimated by the tire dynamics model and the lateral force value estimated by the lateral dynamics
 model, and the multiplication of the error value by an observer gain (L) for receiving a correction value, wherein the

correction value is taken as a basis for correcting the lateral force value estimated by the tire dynamics model in a subsequent sampling time.

11. Method according to any one of the preceding claims,
further comprising the step of estimating a pneumatic trail (t_p), wherein the step of estimating the self-aligning torque (32) includes the estimated pneumatic trail (t_p) as an input factor.

12. Method according to claim 11,
wherein the step of estimating the pneumatic trail (t_p), is conducted on the basis of a pneumatic trail model, which is preferably based on the equation:

$$t_p = - \left(\frac{T_{SAT}}{F_y} \right)_{\alpha \rightarrow 0} = \frac{1}{3} a$$

where

t_p represents the pneumatic trail,
 T_{SAT} represents the self-aligning torque,
 F_y represents the corrected lateral force, and
 a represents the length of the contact surface between tire and road in a longitudinal orientation.

13. Method according to any one of the preceding claims,
wherein the steering torque (28) is derived from the self-aligning torque (32) on the basis of a steering model (94), which represents a mechanical or electromechanical system (92) between the tires (14) and the steering wheel (12) of a vehicle (34), and/or wherein the steering model comprises a first order lag system.

14. Method for the lateral control of a vehicle (34), in particular for a passenger car or a truck, comprising the steps of estimating of a steering torque (28) according any one of the preceding claims, and applying the estimated steering torque (28) to a steering column (18) of said vehicle (34).

15. Device for estimating a steering torque (28), in particular for the lateral control of a vehicle (34), comprising:

- a detecting means (36, 38, 40) for detecting at least one signal on a current vehicle state and/or current vehicle environment,
- a control unit (42) for determining a desired steering angle (δ) based on the at least one detected signal,
- an estimation unit (58) for estimating a vehicle lateral force on the basis of a tire dynamics model, including the determined steering angle (δ) as an input factor,
- an estimation unit (62) for estimating a vehicle lateral force on the basis of a lateral dynamics model,
- a correction unit for correcting the lateral force value estimated by the tire dynamics model on the basis of the lateral force value estimated by the lateral dynamics model,
- an estimating unit (50) for estimating a self-aligning torque (32) based on the corrected lateral force value, and
- an estimating unit (52) for estimating a steering torque (28) from the estimated self-aligning torque (32).

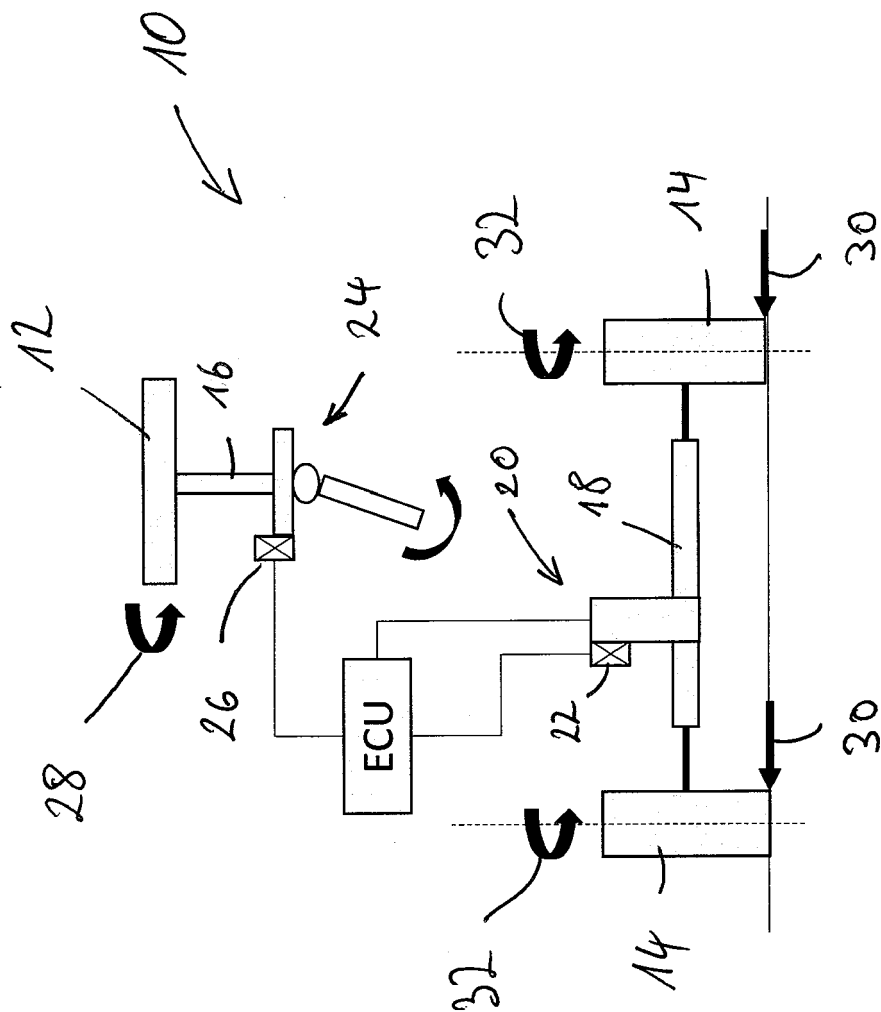


Fig. 1

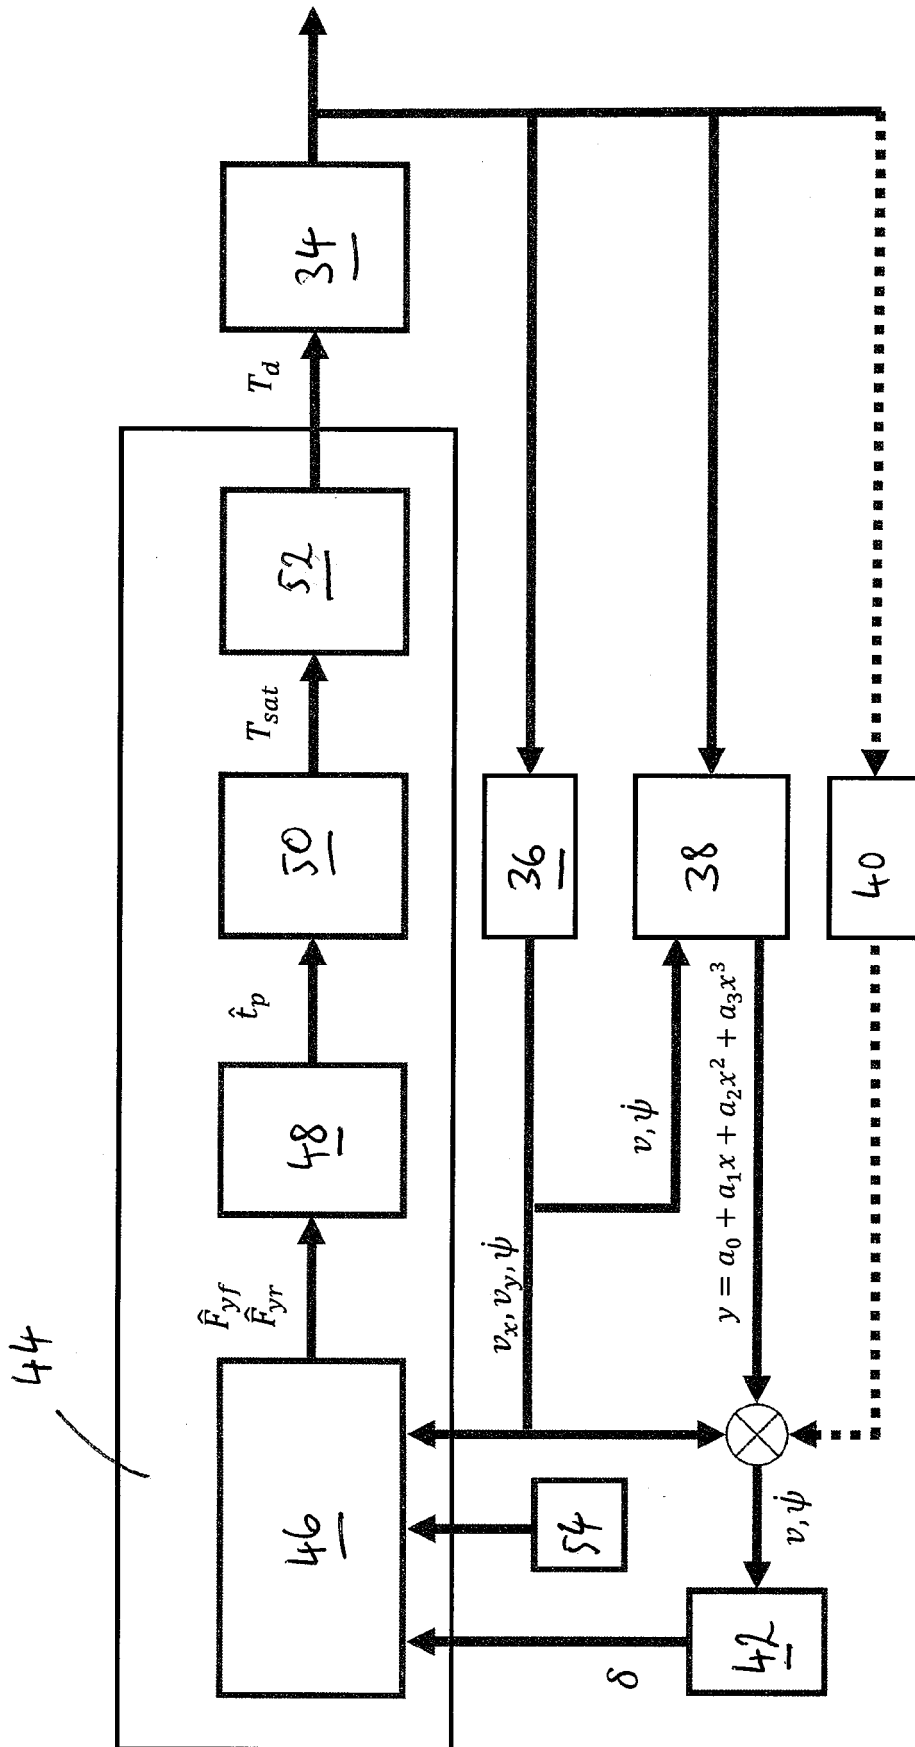


Fig. 2

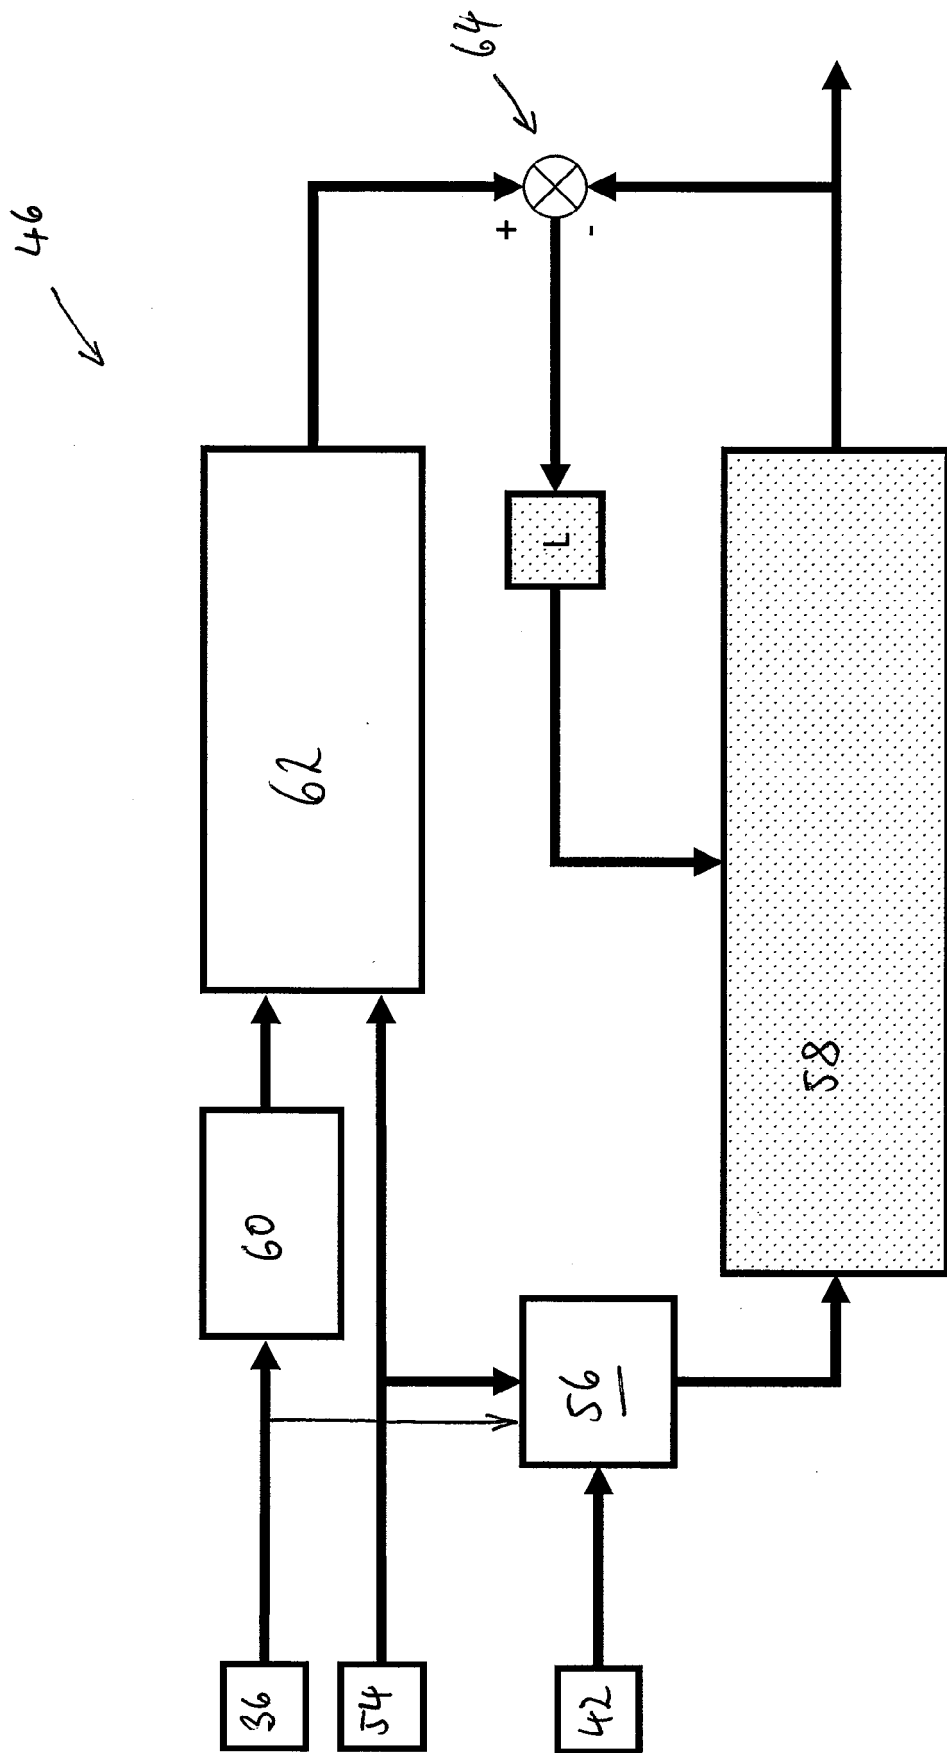


Fig. 3


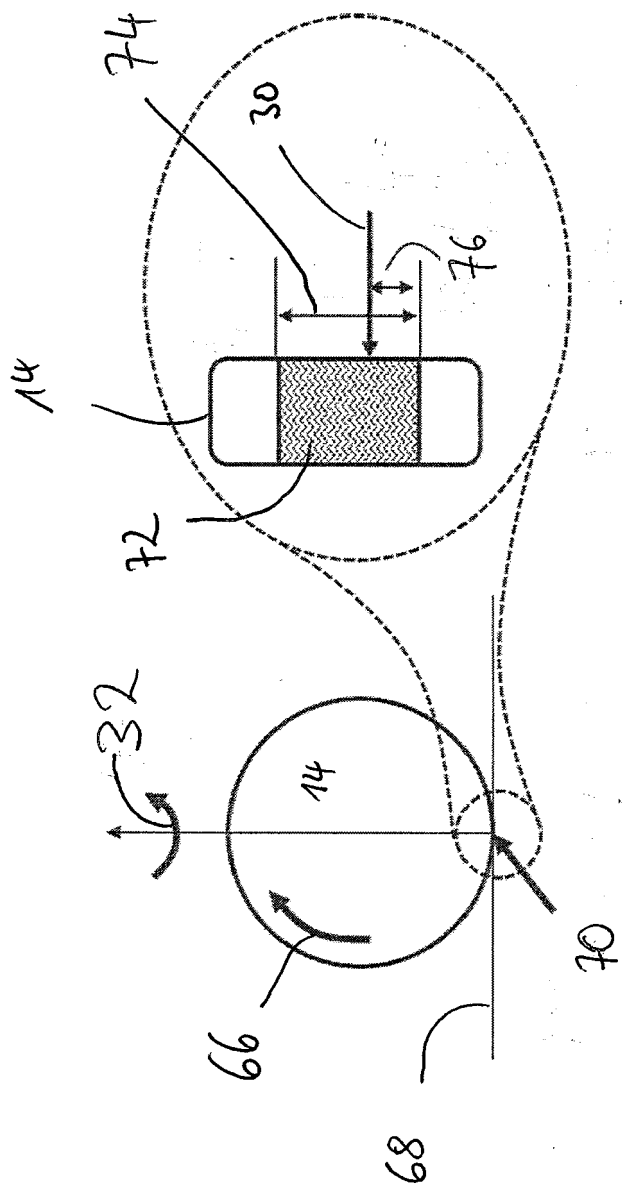


Fig. 4

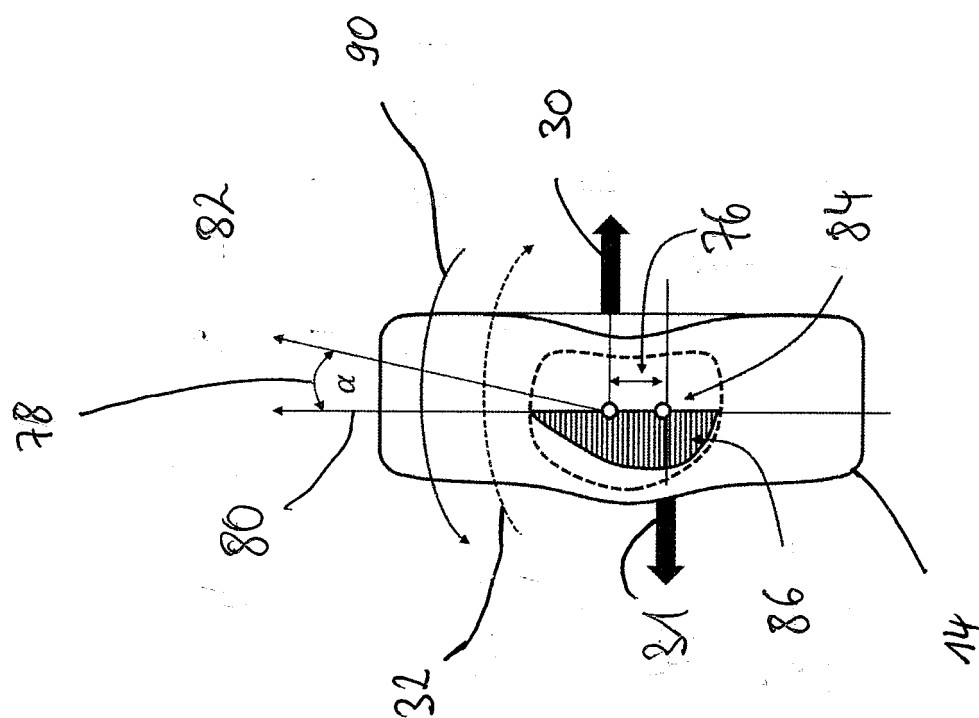

50 ft

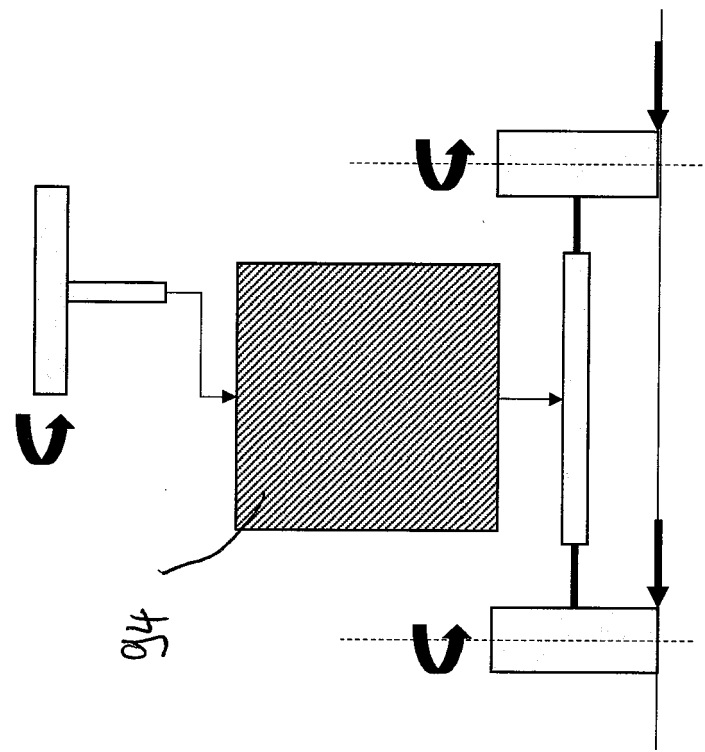


Fig-6b

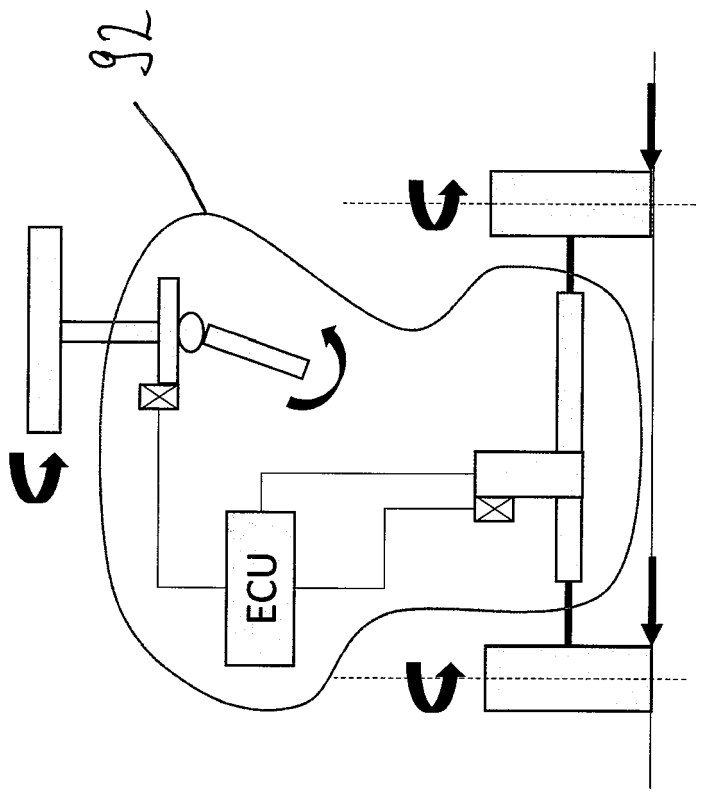


Fig-6a

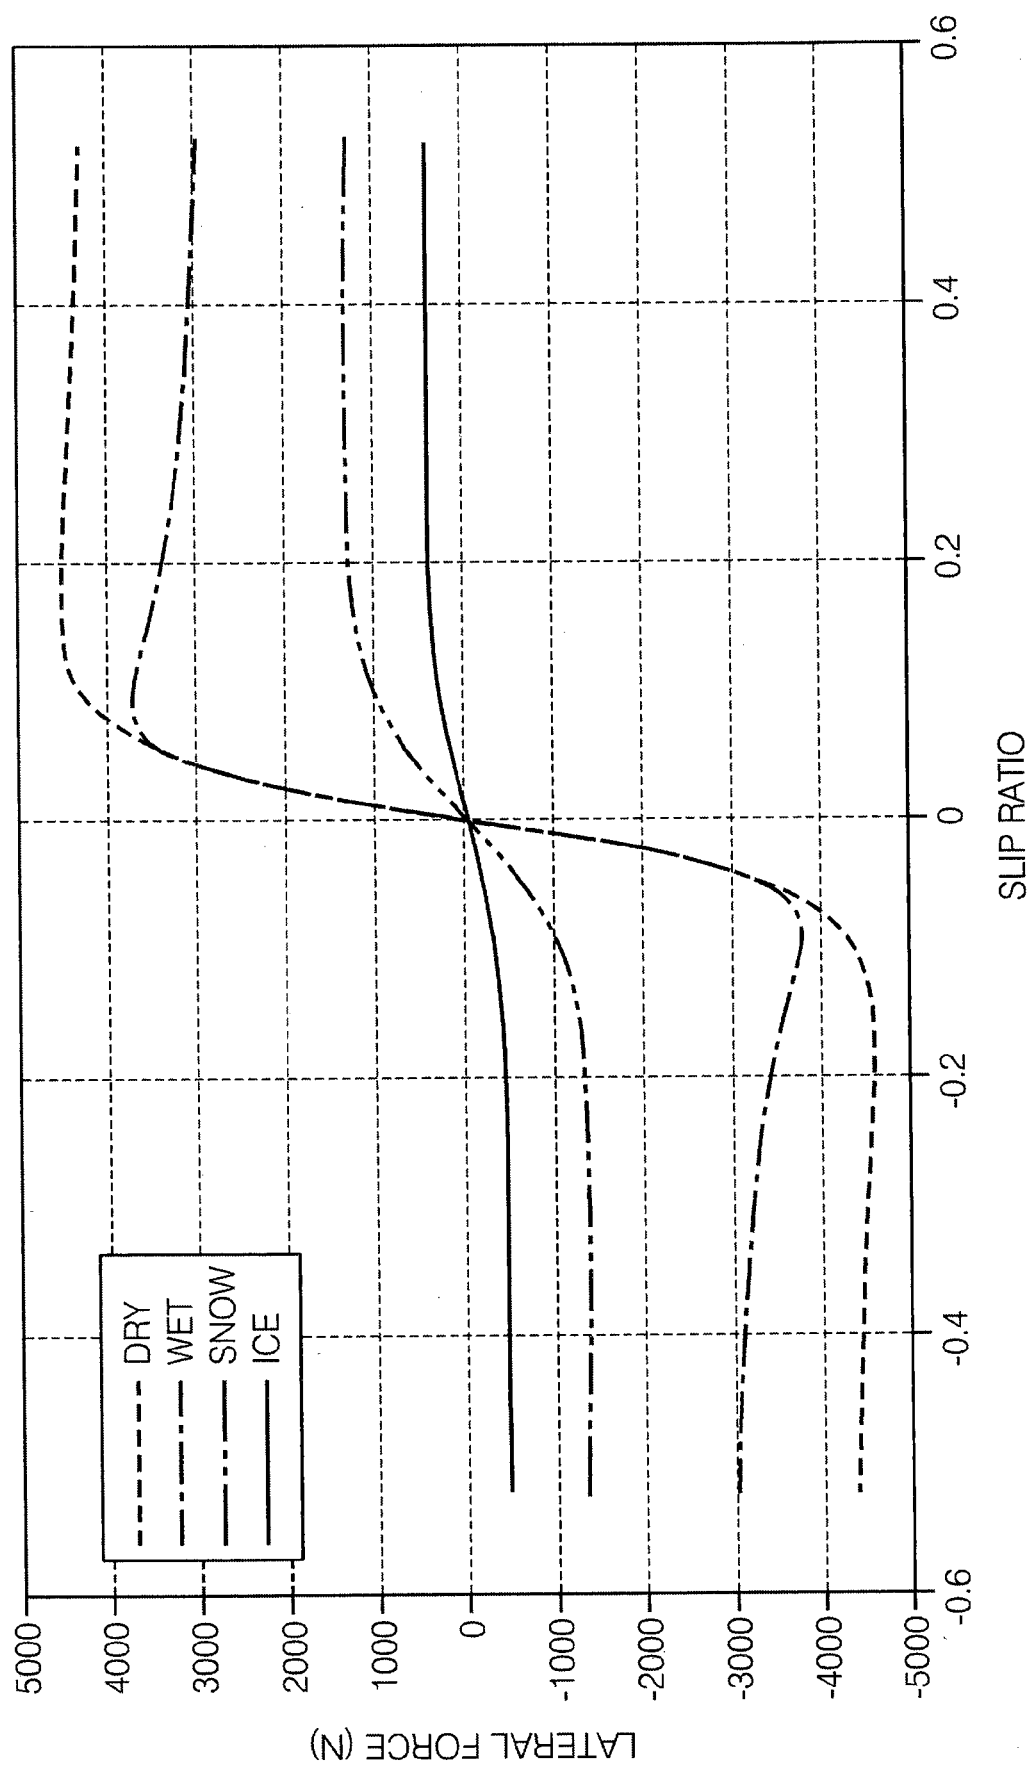


FIG. 7



EUROPEAN SEARCH REPORT

Application Number
EP 17 20 9114

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	DE 10 2010 042135 A1 (ZF LENKSYSTEME GMBH [DE]) 12 April 2012 (2012-04-12) * paragraphs [0040] - [0047]; figures 1-3 * -----	1,15	INV. B62D6/00
			TECHNICAL FIELDS SEARCHED (IPC)
			B62D
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 13 June 2018	Examiner Kulozik, Ehrenfried
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 20 9114

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-06-2018

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 102010042135 A1	12-04-2012	DE 102010042135 A1	12-04-2012
		WO 2012045497 A1	12-04-2012

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82