

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 June 2007 (21.06.2007)

PCT

(10) International Publication Number
WO 2007/068243 A1

(51) International Patent Classification:
H04R 25/00 (2006.01)

(21) International Application Number:
PCT/DK2005/000801

(22) International Filing Date:
16 December 2005 (16.12.2005)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **WIDEX A/S** [DK/DK]; Ny Vestergaardsvej 25, DK-3500 Værløse (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WESTERGAARD, Anders** [DK/DK]; Hojbjergvej 213, DK-2730 Herlev (DK).

(74) Agent: **RINDORF, Hans, Jorgen**; Widex A/S, Ny Vestergaardsvej 25, DK-3500 Værløse (DK).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR SURVEILLANCE OF A WIRELESS CONNECTION IN A HEARING AID FITTING SYSTEM

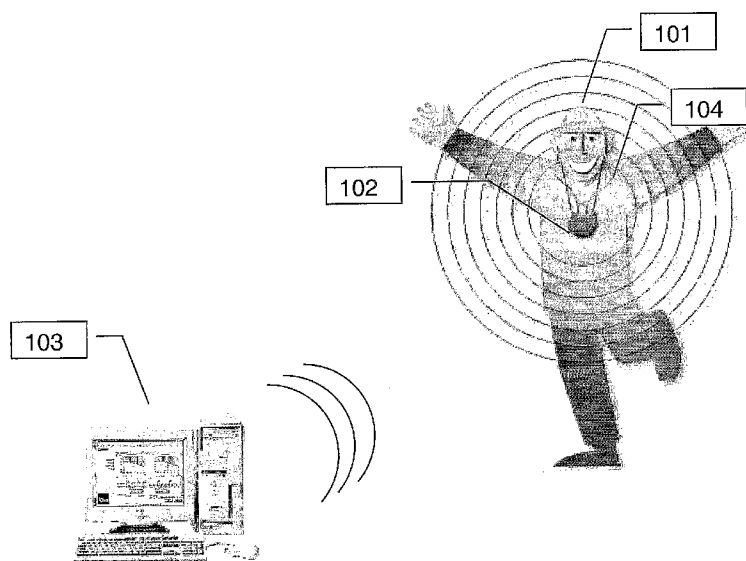

(57) Abstract: A method is presented of evaluating a wireless connection when fitting a hearing aid. The method comprises the steps of sending a signal via the wireless connection from a computer system (103) to a portable device (102), receiving the signal in the computer system via the wireless connection from the portable device, thereby obtaining information about the wireless connection, evaluating the information in the computer system through retrieving a current value representative of the quality of the wireless communication, smoothing the current value thereby obtaining a smoothed value, and providing a quality parameter based on the smoothed value. Also a system for fitting a hearing aid, a computer programme, and a computer system adapted to the use of such a method are presented.

WO 2007/068243 A1

METHOD AND SYSTEM FOR SURVEILLANCE OF A WIRELESS CONNECTION IN A HEARING AID FITTING SYSTEM

The present invention relates to hearing aids and to the fitting of hearing aids. The
5 invention, more specifically, relates to fitting of hearing aids using wireless
communication systems. The invention, still more specifically, relates to methods for
fitting hearing aids using wireless communication.

When fitting a hearing aid to a hearing aid user a fitting system may be used. It is an
10 industry standard to use a system comprising a portable device, e.g. a so-called
NOAHlink, being connected to a computer system through a wireless connection such as
Bluetooth (BT), Radio communication between two or more Bluetooth enabled devices
has a short range (typically up to 10 meters depending on the type and the environmental
15 conditions). If the user of the hearing aid moves out of the communication range, the
connection is cut off. This is particular a problem when fitting a hearing aid for a child. In
some cases this means that the fitting system has to be restarted, which is very time
consuming.

Though it is an advantage for the hearing aid user to be able to move more freely, as in
20 this case, when the portable device is wireless, rather than having the portable device
connected by a cable thereby tethering the portable device, it is a disadvantage that the
time it takes for the fitting system to respond to a broken connection is much higher than
the time it would take to respond to a problem in a wired connection. Thus it will not be
possible for the fitter immediately to see that the wireless connection is broken. Since the
25 computer system is waiting for a time out, this may be misinterpreted as the Graphical
User Interface GUI having gone frozen and the computer system consequently in need of
a restart. A restart is very time consuming and may cause loss of information. In addition
sometimes the wireless connection may also have recovered so that there is no need to
restart the computer system but since there is no indication that the system has recovered
30 the fitter may be tempted to turn off the computer.

A way to address the problem of monitoring the connection is to use a time out on the signal. The time out may e.g. be set in the range of 60 seconds, which may however still lead to situations where the fitter may think that the GUI has frozen and then may attempt to restart the computer, since the indication in the GUI that the portable device is out of range will only appear once the present time interval has expired.

It is an object of the invention to provide a system and a method that will enable the fitter of the hearing aid to guide the hearing aid user to stay within communication range.

It is a further object of the invention to provide a fitting system and a method that can be used in a daily day environment, such as on the street, when fitting a hearing aid.

These and other objects are fulfilled by the present invention.

According to a first aspect of the invention, a method of evaluating a wireless connection when fitting a hearing aid is presented, the method comprising the steps of sending a signal via the wireless connection from a computer system to a portable device, receiving the signal in the computer system via the wireless connection from the portable device, thereby obtaining information about the wireless connection, evaluating the information in the computer system through retrieving a current value representative of the quality of the wireless communication, smoothing the current value thereby obtaining a smoothed value, and providing a quality parameter based on the smoothed value.

With the method according to the invention it is possible to monitor the quality of a wireless connection while fitting a hearing aid, which detects the quality of the signal between a portable device, such as a NOAHlink, and a computer system without being distracted of fluctuations in the signal, due to the smoothing of a value extracted from the signal.

In an embodiment of the invention the step of evaluating may further comprise a step of transforming information from the signal into a value that reflects the transmission time is implemented.

5 The transmission time reflects the time it takes to transmit information from the portable device to the computer system. When the transmission time is smoothed the value reflects any difficulties in transmitting the signal, a long smoothed transmission time reflects that the wireless connection has difficulties in transmitting the signal. In another embodiment the signal comprises statistical information about the wireless communication such as a
10 Return Signal Strength Indicator (RSSI). It is an advantage to use statistical information since variations in the signal may already have been taken into account though today even the statistically information like the RSSI still fluctuates and therefore needs to be further smoothed before evaluating the quality of the wireless connection. An even more reliable result may be achieved by taking into account at least two different values for indicating
15 the quality of the wireless connection, such as the bit rate and the RSSI at the same time.

In another embodiment of the invention a method is implemented, wherein said step of smoothing the value is based on processing a set of prior values and the current value. It is an advantage to use only one value based on one signal since it is then not necessary to
20 store any prior information or values in the computer system. But also a set of prior values and the current value may be used smoothing the current value, e.g. by a moving average. In an embodiment of the invention the receiving step further comprises storing the current value in a memory.

25 In yet another embodiment of the invention said step of providing a quality parameter further comprises presenting information based on said quality parameter to a user. It is an advantage to provide information about the quality of the wireless information to a user e.g. a fitter of the hearing aid, since it is then possible for the user to guide the hearing aid user in whether the hearing aid user is about to get out of the range covered
30 by the wireless connection. A way to do this could be by presenting the information as a colour on a Graphical User Interface, wherein the colour reflects the value of the quality

parameter. The quality may e.g. be classified among three levels. By indicating the quality of the wireless connection in a colour it is easily seen when the quality changes. This may e.g. be done by changing the colour gradually so that it e.g. changes from a green colour when the quality of the wireless connection is good to a red colour when the quality is critical. Preferably there will only be a number of levels of colours each presenting a grade in the quality in the quality of the wireless connection, e.g. three levels where a green colour represents a good grade, a yellow represents a warning grade, indicating to the user to get into reach, and a red colour represents a critical grade indicating that the connection is about to drop out or already has dropped out. It is preferable to have a clear indication of the quality of the wireless connection, such as a low number of grades, since it makes it easier for the user to interpret the quality and avoids distracting the user of the fitting system, who has a lot of other information to check. It may therefore also be an advantage to give an alert if the quality parameter of the wireless communication is in a predetermined level, e.g. drops below a predetermined quality value and thus enters into a critical quality level. The alert may e.g. be given as a sound alert e.g. directly to the hearing aid user or emitted from the computer system, alternatively the alert could be a message e.g. providing information that the hearing aid user is moving is approaching a critical zone etc.

In another embodiment of the invention said step of smoothing said value further comprises checking if the current value is subject to a steady change and if so then reflecting the permanent change in the smoothed value. It is an advantage to implement a permanent change check since in this way it will be possible to react earlier if e.g. the quality of the wireless connection suddenly becomes critical.

In a second aspect of the invention, a computer system for fitting a hearing aid is provided, said computer system comprising, a wireless communication driver adapted to exchange a signal with a wireless communication radio thereby providing information about the wireless communication between said wireless communication driver and said wireless communication radio, a smoothing component adapted to extract a current value based on said information and to smooth said current value in order to derive a

smoothened value, and a link quality component adapted to evaluate said smoothened value thereby determining whether trip a warning.

5 In an embodiment a computer system is provided, wherein said smoothing component is adapted to extract a value reflecting a transmission time of said signal. Another way may be to use a signal that provides information about the Return Signal Strength Indicator (RSSI).

10 In another embodiment a computer system is provided, wherein said smoothing component comprises a smoothing algorithm.

In a third aspect a computer program is given containing executable program code which, when executed on a computer, executes a method according to a first aspect of the invention.

15 In a fourth aspect a computer program product is presented, containing executable program code which, when executed on a computer, executes a method according to a first aspect of the invention.

20 A system for fitting a hearing aid is provided in a fifth aspect of the invention, comprising a portable device connected with said hearing aid, said portable device comprising a first wireless communication mean, and a computer system.

25 In a sixth aspect of the invention, a system for fitting a hearing aid is presented, the comprises a portable device connected with said hearing aid, said portable device comprising a first wireless communication means, a computer system comprising a fitting software component, a second wireless communication means adapted to communicate with said first wireless communication means thereby obtaining a signal reflecting the quality of the wireless connection, a quality component adapted to extract a current value
30 based on the signal and smooth said current value thereby obtaining information about

the quality of the wireless connection. The system may further comprise a graphical user interface for presenting said information about the quality of the wireless connection.

5 In another embodiment a system is presented, wherein said computer system is adapted to store a set of prior values extracted on a number of prior signals and wherein the quality component is adapted to smooth said current values by processing said set of prior values and said current value.

10 In still another embodiment a system is provided, wherein said computer system further comprises audio means adapted to present an audible alert based on said information about the quality of wireless connection. The audio means may e.g. be an output transducer in a personal computer or a loudspeaker connected to the computer system. In another embodiment a system is provided, wherein said audio means are positioned in a computer system. This may be an advantage since it will be possible for a user, such as
15 the fitter, to hear if the hearing aid user is moving out of reach. In an alternative embodiment said audio means are positioned in said hearing aid, in this way the hearing aid user may be warned directly and can thus move according to the alert.

20 In an embodiment of the invention a system is provided, wherein computer system further comprises a steady change component.

25 Other aspects and advantages of the present invention will become clear from the following detailed description taken in conjunction with the accompanying drawings, which illustrate, by way of example, the principles of the invention.

In the drawings:

Figure 1 shows a fitting system for a hearing aid;

Figure 2 shows a computer system comprising fitting software;

30 Figure 3 shows a flow diagram of the quality evaluation of one or more signals from a wireless communication;

Figure 4 shows a block diagram comprising a smoothing algorithm and a warning algorithm; and

Figure 5 shows graph of a series of time estimates and their corresponding smoothed estimates.

5

Fig. 1 shows a fitting system for fitting one or two hearing aids for a hearing aid user 101.

The hearing aid user 101 may have one or two hearing aids that are connected e.g. via cables 104 to a portable device 102 such as a NOAHlink. The computer system 103

comprises fitting software that may program the hearing aids via a high-speed wireless connection to the portable device 102. The wireless connection may be e.g. a Bluetooth

10 connection. The computer system 103 may be a personal computer, a client in a client server environment, a hand held computer device such as a pocket computer, or a smart

phone, or a combination thereof. Preferably the computer system comprises a Graphical

User Interface (GUI) 3. In a preferred embodiment of the invention the quality of the

15 communication will be classified among a number of levels such as three levels: a

satisfactory level, a warning level and a critical level and thereafter presented in the GUI.

The quality level of the communication will be presented in the GUI, so that the fitter will

be able to instruct the hearing aid user to move into a better communication area. E.g. a satisfactory level may be presented to the fitter as a green colour, a warning level as

20 yellow and a critical level as red. If the quality is in a satisfactory level the fitter may continue without paying attention to where the hearing aid user is situated. If the quality

changes into a warning level the fitter may be alerted e.g. by a change in colour, a sound or a message that the wireless connection may be lost if the hearing aid user moves

further away from the computer system. Likewise if the quality changes into an uncritical

25 level again the fitter may be informed that the wireless connection is within reach again.

It may also be an advantage to show a quality indicator in the GUI continuously so that it will be possible for the fitter to react to changes in the quality indicator by watching the

quality indicator. The fitter may simultaneously be guided by e.g. showing the colour

30 codes as explained above.

Typically a computer application that uses a Bluetooth application will interface directly with the BT stack. Through this interface the computer application will be able to scan for other BT devices, establish connection to a BT device, get events if a new BT radio gets within reach, and finally obtain statistical information of e.g. Return Signal Strength Indicator (RSSI). The RSSI provides information about the quality of the wireless BT connection. Some of the BT devices provide an application showing the quality of the RSSI in a GUI. This can e.g. be done by a bar that illustrates the RSSI, so that the length of a coloured bar varies with the changes in RSSI. The bar varies between being too weak, good and too strong. If the signal strength gets too weak the wireless connection may be cut off. The bar may vary between too weak and good even when the distance between the BT device and the BT radio is approximately constant, as the signal not only depends on the distance between the two but also depends on the other factors such as the mutual position of the BT device and the BT radio. Even if the wireless connection is cut off it may be possible to re-establish it once the BT device and the BT radio have been moved into a good transmission distance.

When evaluating the quality of the wireless BT connection it may therefore be an advantage to evaluate the amount of data that are transmitted, e.g. the bit rate. It is possible that even after the signal strength bar indicates that the RSSI is too weak the bit rate may be satisfactory. It is also possible that even when the signal strength bar has decreased to too weak and the bit rate has become dissatisfactory the bit rate may slowly increase to a satisfactory level. Even in cases where the wireless communication has been cut off and then re-established the bit rate may slowly increase to a satisfactory level.

Since the signal strength may fluctuate between too weak and good even while the hearing aid user is in the same position but the BT radio is moved around (while the bit rate is at a satisfactory level) the signal strength bar provided with the BT application is not suitable for the fitter to monitor. Furthermore not all BT devices have information about the RSSI.

A way to overcome this and other problems may be by use of an embodiment according to the invention as the one shown in Figures 2-5.

Fig. 2 shows a computer system that may be used when fitting a hearing aid according to an embodiment of the invention. The computer system comprises a number of elements
5 such as a fitting software component 210, the Operative System OS 220, a portable device driver 230, a link quality component 240 and a wireless connection driver 250. The elements can be adapted to communicate mutually in order to exchange information. In an embodiment of the invention the fitting component 210 is adapted to communicate
10 with the link quality component 240 and the OS 220, which may comprise the wireless connection driver 250. It will be obvious for a person skilled in the art how to establish the connections, depending on the choice of portable device 230, wireless connection 250 and fitting software 210. It is also possible that the fitting software comprises the link
15 quality component 240.

Fig. 3 is a flow diagram 300 of a method of the quality evaluation of one or more signals originating from the wireless connection. The method may be implemented in the link
20 quality component 240. The signals are, according to an embodiment of the invention, evaluated by a computer system e.g. as the one shown in Fig. 2.

As a step 310, one or more signals from the wireless connection are received by the link
25 quality component. The signals may be used directly or one or more parameters may be extracted from the signals thereby obtaining one or more quality parameters as illustrated in step 320. In a step 330 the one or more quality parameters are smoothed in order to
30 reduce fluctuations in the quality parameters. The smoothing provides a modification of a set of signals to make it smooth and nearly continuous and remove or diminish outlying points. In step 340 the one or more quality parameters are evaluated, and finally in step
35 a quality indication is presented, e.g. in a GUI.

Figure 4 shows a block diagram 400 comprising a smoothing algorithm 330 and a
35 classification algorithm 340. The smoothing algorithm 330 is initiated with t , which is the

transformation of the signal into the transmission time, i.e. the time it has taken for the signal to be emitted from the computer system and received by the portable device and then returned back to the computer system. $Avg=0$, $q=0$ and $Result=""$. Thus the first time a signal is received at $t:= t1$ and thus $Avg := t1$. The second time a signal is received occurs at $t=t2$, and thus $Avg=t1$ will be compared with $t2$. The smoothing algorithm 330 corresponds to the one shown in the following:

$Avg+Critical < t \Rightarrow Avg = Avg + a, Q = Q + 1$

$Avg+Warning < t \leq Avg+Critical \Rightarrow Avg = Avg + b, Q = 0$

$Avg+Good < t \leq Avg+Warning \Rightarrow Avg = Avg + c, Q = 0$

$Avg-Good \leq t \leq Avg+Good \Rightarrow$ no changes in $Avg, Q = 0$

$Avg-Warning \leq t < Avg-Warning \Rightarrow Avg = Avg - c, Q = 0$

$Avg-Critical \leq t < Avg-Warning \Rightarrow Avg = Avg - b, Q = 0$

$t < Avg-Critical \Rightarrow Avg = Avg - a, Q = 0$

In a preferred embodiment the grade levels are the following: Critical =30, Warning= 20, Good=2, A=10, B=5, C=1. Naturally the levels can be varied and should be determined depending on the kind of signal and the wanted sensitivity of the smoothing. Also the number of intervals that t is classified into can be decreased or increased, thus reflecting the number of grade levels.

By smoothing the signal in this way fluctuations in a group of signals will be removed or diminished. It is an advantage of the method that it can be effectuated based on only one signal (if e.g. Avg is set to e.g. 20 in the beginning).

Due to the smoothing algorithm a continuous increase in the signal will be dampened delaying the response. In order to overcome that the damping will excessively delay the time too much in order to react to a permanent change in the signal, a permanent change algorithm may be introduced. The embodiment shown in Figure 4 includes a permanent change algorithm 350 that once the signal has entered into a critical area four times in a

row sees to that the signal is increased over the maximum value (in this case
Avg=Avg+Critical) and sets Avg=t, in this case a max value=60 corresponding to the
time out value. By doing this, a permanent increase in the signal will be detected and the
Avg will be increased to the new level. Obviously a similar way of detecting permanent
5 decrease in the value can be detected and Avg can be corrected according to the new
level.

In the categorisation algorithm 340 it is determined whether the value of Avg results in a
good, warning or a critical quality of the wireless communication. In a preferred
10 embodiment a Result=Good will be presented on a GUI as a green colour, a
Result=Warning as a yellow colour and a Result=Critical as a red colour. The number of
colours may vary depending on the wanted quality levels in the categorisation algorithm.
It is an advantage to keep the number of levels low such as 3-5 since it should be kept
simple for the fitter to interpret the information about the wireless communication. The
15 change in level may be notified by an acoustic alert, e.g. a sound signifying Result =
Warning or Result = Critical. The sound may e.g. be a tone, a melody or a spoken
message. Also variations in the sound output may be associated with the quality of the
wireless communication, e.g. such that a tone increases in frequency as the Avg increases
when the quality is at the warning level or the critical level.

20 Figure 5 shows a series of transmission times t calculated on bases of a series of signals
that have been collected over a period of time. For each transmission time a smoothed
time estimate is determined by use of the algorithm 330 and algorithm 340 shown in
Figure 4 explained above). As it appears in the series of smoothed time estimates the
25 outlying points in the current time estimate series have almost been removed.
Furthermore the algorithm provides for a time lag when large variations in the current
time estimate appears. By evaluating the smoothed time estimate by the categorisation
algorithm 340 a quality of the signal can be provided. In the figure the three quality grade
intervals used in the categorisation algorithm 340 are indicated by the areas Good,
30 Warning and Critical.

Other ways of smoothing the transmission time can be carried out by using a smoothing algorithm based on a series of adjacent transmission times. E.g. a rectangular or unweighted sliding-average smooth or a triangular smooth may be used, that replaces each point in the signal with the average of m adjacent signals, where m is a positive integer called the smooth width, e.g. $m=3$.

Claims

1. A method of evaluating a wireless connection when fitting a hearing aid, comprising the steps of
- 5 • sending a signal via the wireless connection from a computer system to a portable device,
 - receiving the signal in the computer system via the wireless connection from the portable device, thereby obtaining information about the wireless connection,
 - 10 • evaluating the information in the computer system through retrieving a current value representative of the quality of the wireless communication,
 - smoothing the current value thereby obtaining a smoothed value, and
 - providing a quality parameter based on the smoothed value.
2. A method according to claim 1, wherein the step of evaluating further comprises a step of
15 transforming information from the signal into a value that reflects the transmission time.
3. A method according to claim 1, wherein the signal comprises statistical information about the wireless communication.
- 20 4. A method according to any of the preceding claims, wherein the signal is a Return Signal Strength Indicator (RSSI).
5. A method according to any of the preceding claims, wherein said step of smoothing the value is based on processing a set of prior values and the current value.
25
6. A method according to any of the preceding claims, wherein said receiving step further comprises storing the current value in a memory.
7. A method according to any of the preceding claims, wherein said step of providing a
30 quality parameter further comprises presenting information based on said quality parameter to a user.

8. A method according to claim 7, wherein the information is presented as a colour on a Graphical User Interface, wherein the colour reflects the value of the quality parameter.

5 9. A method according to any of the claims 7 or 8, wherein the quality of the wireless communication is classified among three levels.

10. A method according to any of the preceding claims, wherein an alert is given if the quality parameter of the wireless communication drops below a predetermined level.

10

11. A method according to claim 10, wherein the alert is a sound alert.

12. A method according to any of the preceding claims, wherein said step of smoothing the current value further comprises checking if the current value is subject to a steady change and if so then reflecting the permanent change in the smoothed value.

15

13. A computer system for fitting a hearing aid, said computer system comprising,

- a wireless communication driver adapted to exchange a signal with a wireless communication radio thereby providing information about the wireless communication between said wireless communication driver and said wireless communication radio,
- a smoothing component adapted to extract a current value based on said information and to smooth said current value in order to derive a smoothed value, and
- a link quality component adapted to evaluate said smoothed value thereby determining whether trip a warning.

20

25

14. A computer system according to claim 13, wherein said smoothing component is adapted to extract a value reflecting a transmission time of said signal.

30

15. A computer system according to claim 13, wherein the signal provides information about the Return Signal Strength Indicator (RSSI).

5 16. A computer system according to any of the claims 13-15, wherein said smoothing component comprises a smoothing algorithm.

17. A computer program containing executable program code which, when executed on a computer, executes a method according to any one of the claims 1-12.

10 18. A computer program product, containing executable program code which, when executed on a computer, executes a method according to any of the claims 1-12.

19. A system for fitting a hearing aid, comprising

- 15
- a portable device connected with said hearing aid, said portable device comprising a first wireless communication means,
 - a computer system according to any of the claims 13-16.

20. A system for fitting a hearing aid, comprising

- 20
- a portable device connected with said hearing aid, said portable device comprising a first wireless communication means,
 - a computer system comprising
 - a fitting software component,
 - a second wireless communication means adapted to communicate with said first wireless communication means thereby obtaining a
 - 25 signal reflecting the quality of the wireless connection,
 - a quality component adapted to extract a current value based on the signal and smooth said current value thereby obtaining information about the quality of the wireless connection.

30 21. A system according to claim 20, wherein said system further comprises a graphical user interface for presenting said information about the quality of the wireless connection.

22. A system according to any of the claims 20-21, wherein said computer system is adapted to store a set of prior values extracted on a number of prior signals and wherein the quality component is adapted to smooth said current values by processing said set of prior values and
5 said current value.

23. A system according to any of the claims 20-22, wherein said computer system further comprises audio means adapted to present an audible alert based on said information about the quality of wireless connection.
10

24. A system according to any claim 23, wherein said audio means are positioned in a computer system.

25. A system according to claim 23, wherein said audio means are positioned in said hearing
15 aid.

26. A system according to any of the claims 20-25, wherein computer system further comprises a steady change component.

1/5

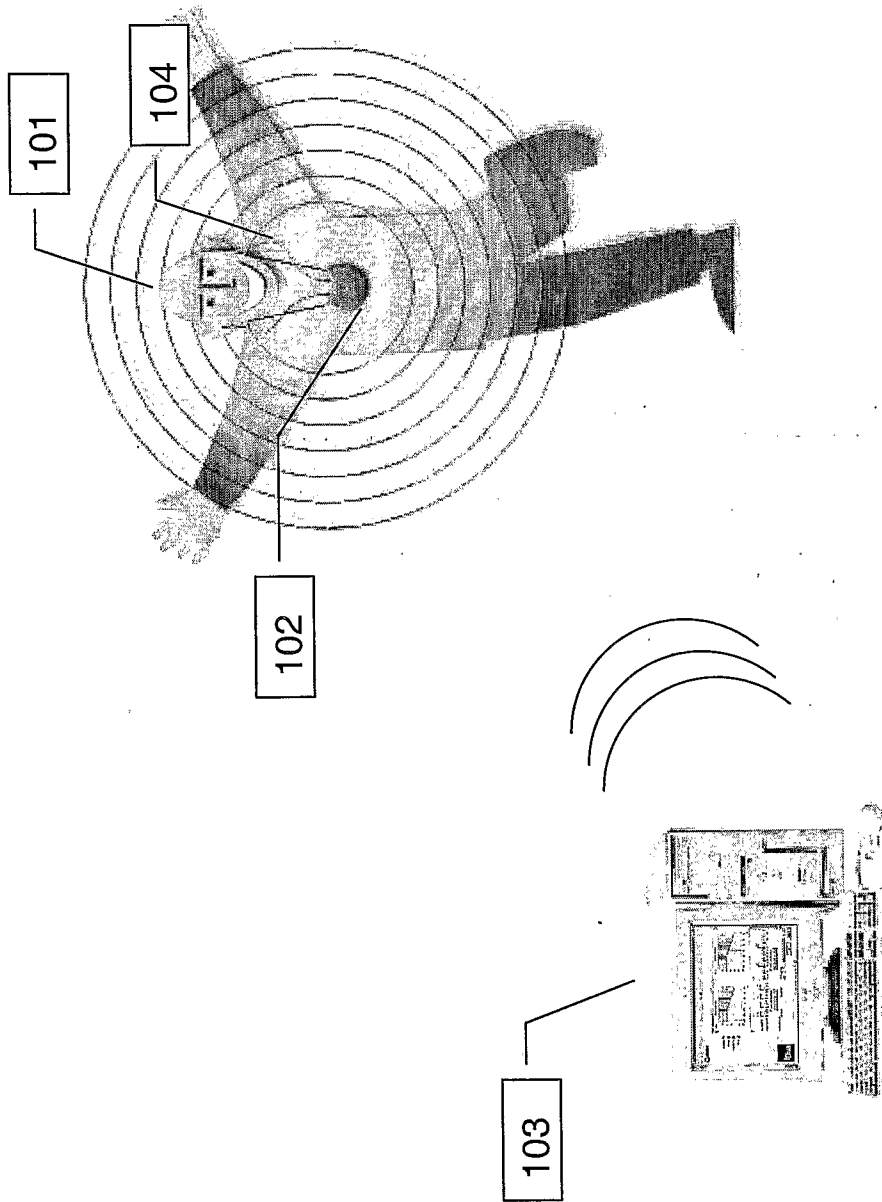


Fig. 1

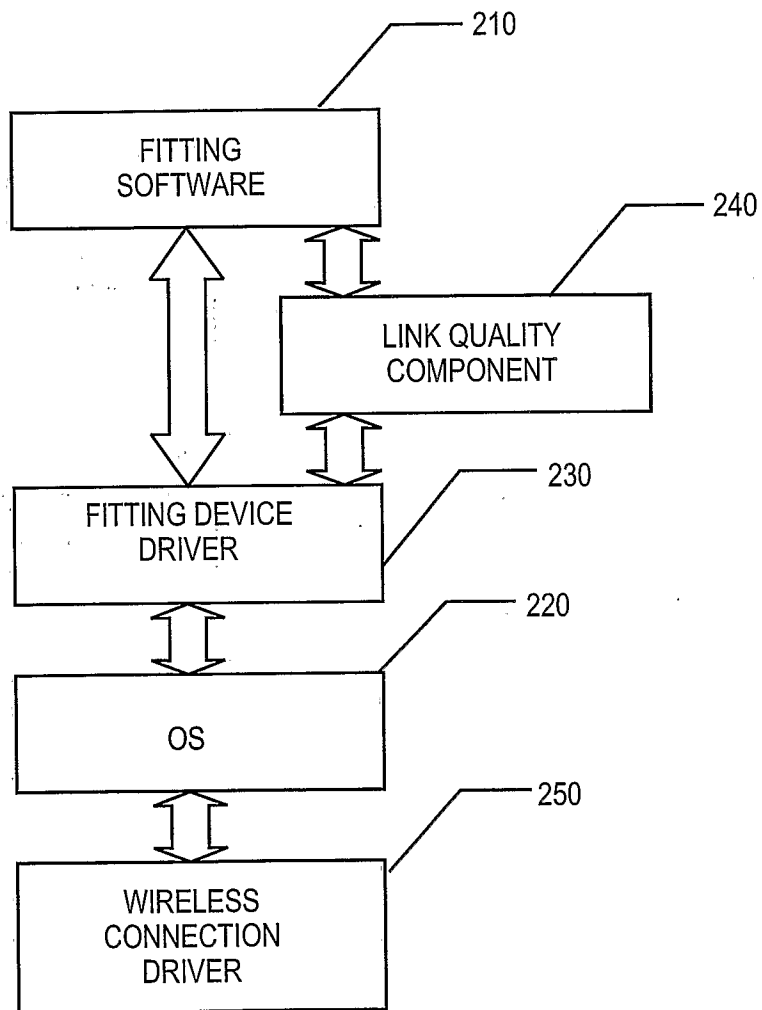


Fig. 2

3/5

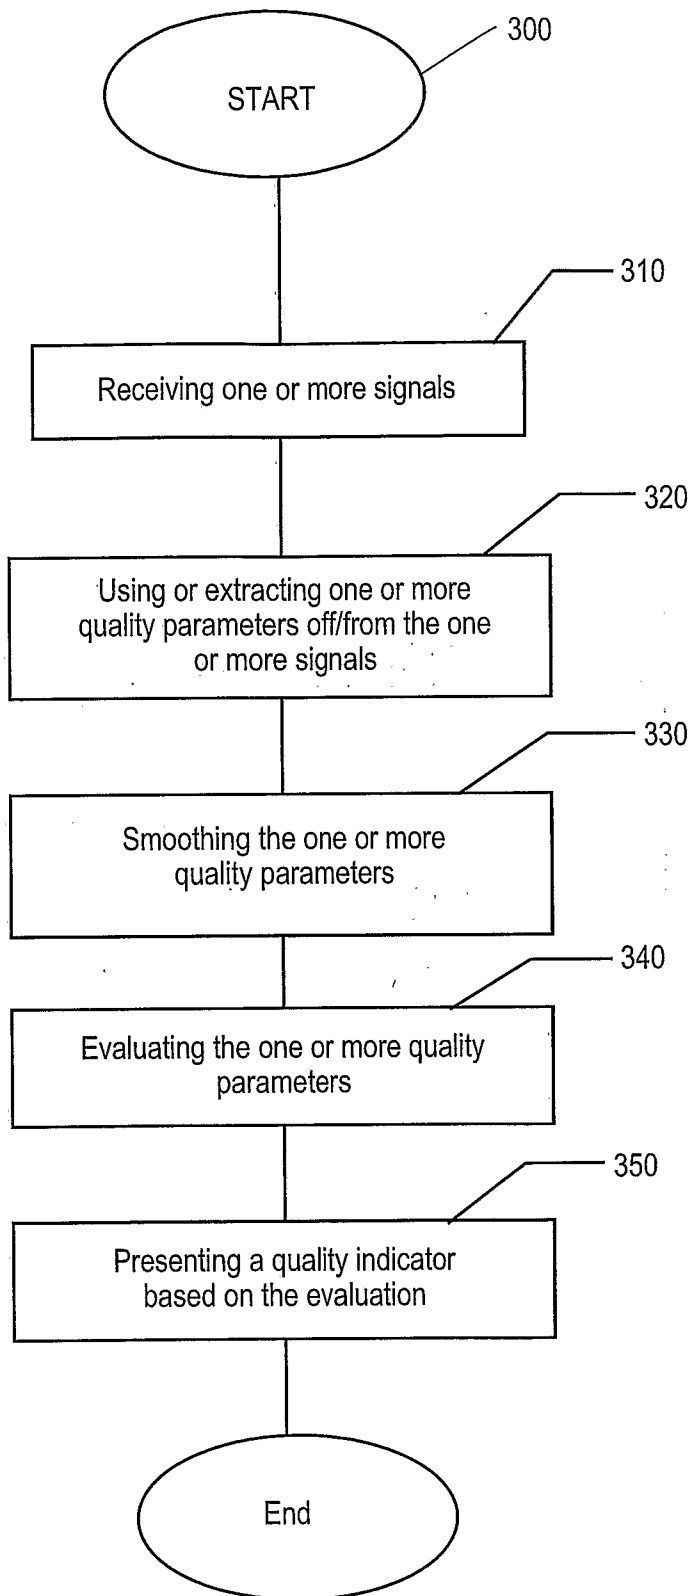


Fig. 3

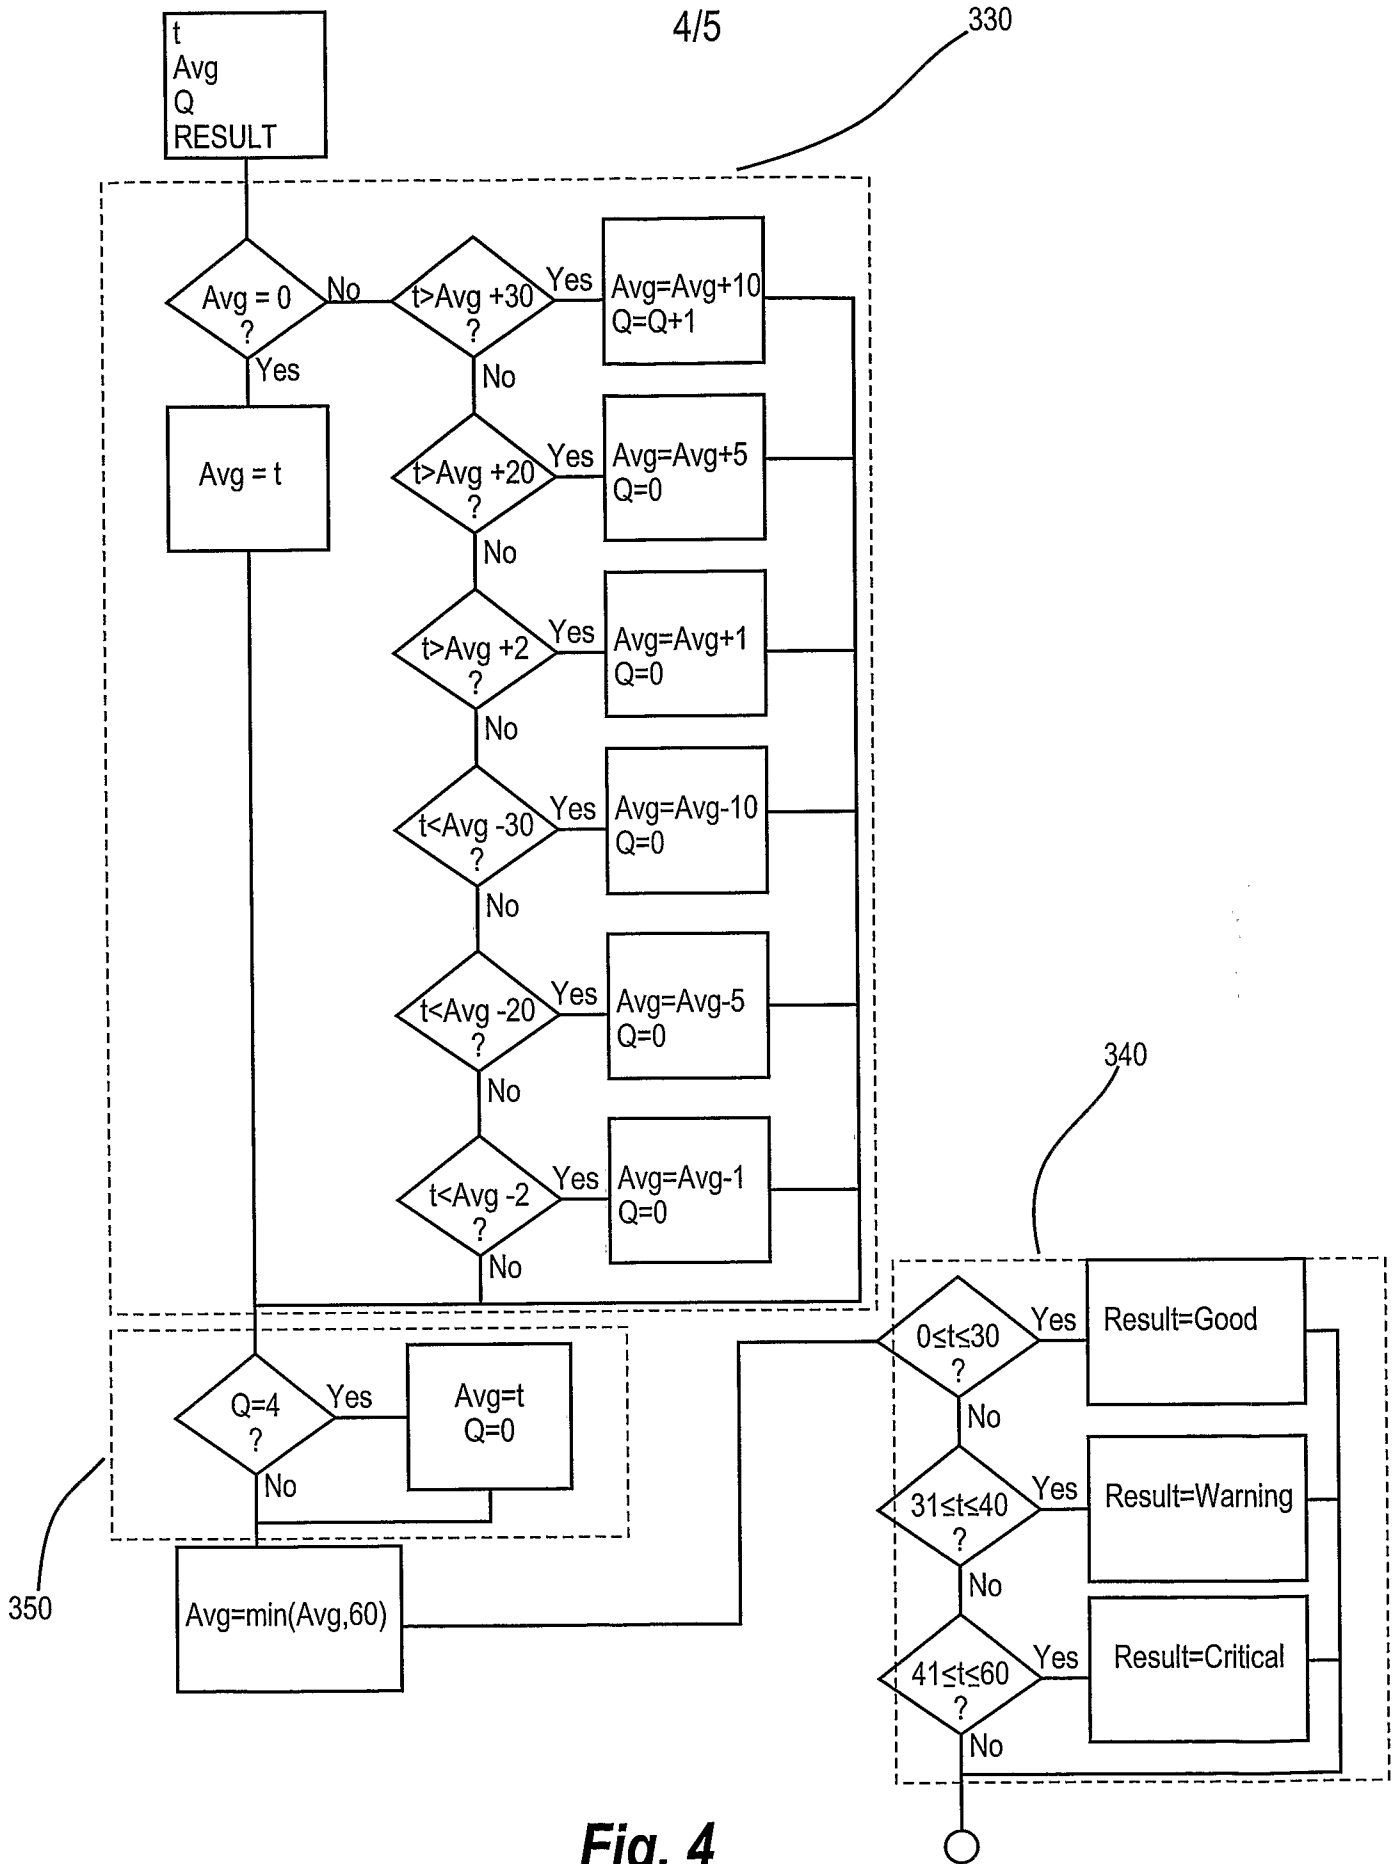


Fig. 4

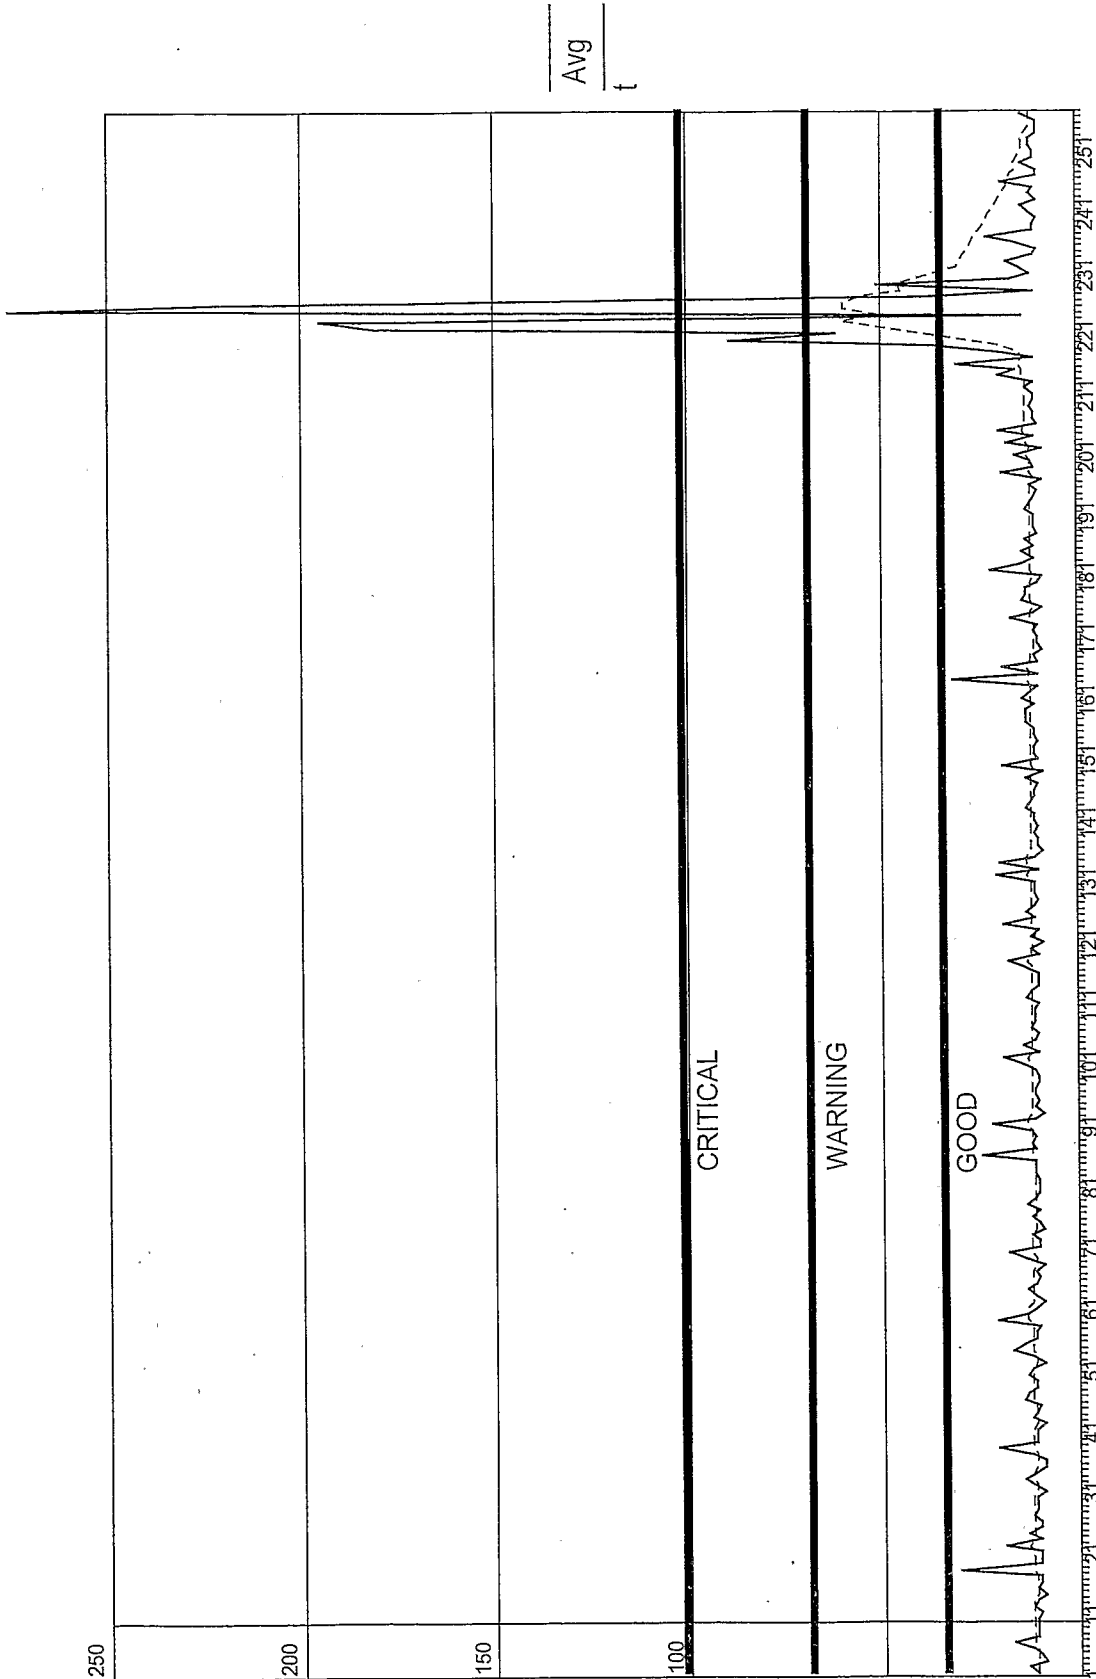


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/DK2005/000801

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04R25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04R H04B H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2003/003868 A1 (JUURIKKO ILKKA) 2 January 2003 (2003-01-02) the whole document	1-26
Y	WO 01/22777 A (INSONUS MEDICAL, INC) 29 March 2001 (2001-03-29) abstract page 4, line 20 - page 5, line 5 page 8, line 15 - page 10, line 7 page 13, line 12 - page 14, line 8 page 15, line 23 - line 28; figures 3,5	1-26
A	EP 1 022 578 A (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD) 26 July 2000 (2000-07-26) abstract	5, 12, 16

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

28 August 2006

Date of mailing of the international search report

11/09/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fülöp, I

INTERNATIONAL SEARCH REPORT

International application No
PCT/DK2005/000801

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	"BASEBAND SPECIFICATION" 4 November 2004 (2004-11-04), BLUETOOTH SPECIFICATION VERSION 2.0 + EDR [VOL 3] , XP002396499 page 95 page 242 page 393 -----	1,2,13, 14,19,20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/DK2005/000801

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003003868	A1	02-01-2003	NONE
<hr/>			
WO 0122777	A	29-03-2001	AU 773251 B2 20-05-2004
			AU 4022901 A 24-04-2001
			CA 2385499 A1 29-03-2001
			EP 1219139 A1 03-07-2002
			JP 2003510113 T 18-03-2003
			US 7016504 B1 21-03-2006
<hr/>			
EP 1022578	A	26-07-2000	JP 3607516 B2 05-01-2005
			JP 2000213948 A 04-08-2000
<hr/>			